

Produkte
Products

Prüfbericht - Nr.: 12307454 001		Seite 1 von 76 <i>Page 1 of 76</i>	
<i>Test Report No.:</i>			
Auftraggeber: <i>Client:</i>	INTELLIGENT SYSTEMS Co., Ltd. 60 Kamitakamatsu-cho, Fukuine, Higashiyama-ku, Kyoto City, Kyoto Pre. 605-0983 Japan		
Gegenstand der Prüfung: <i>Test item:</i>	DEBUGGER and CAPTURE		
Bezeichnung: <i>Identification:</i>	ISXD and ISXC	Serien-Nr.: <i>Serial No.:</i>	Engineering Sample
Wareneingangs-Nr.: <i>Receipt No.:</i>	213083532-1	Eingangsdatum: <i>Date of receipt:</i>	2008-10-17
Prüfort: <i>Testing location:</i>	4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan		
Prüfgrundlage: <i>Test specification:</i>	47 CFR Part 15.247 (Subpart: C), October , 2008 ANSI C63.4-2003 Measurement of Digital Transmission Systems Operating under Section 15.247 RSS-210 (Issue 7): 2007 RSS-Gen (Issue 2): 2007		
Prüfergebnis: <i>Test Result:</i>	Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>		
Prüflaboratorium: <i>Testing Laboratory:</i>	TÜV Rheinland Japan Ltd. - Regional Office West Japan Higashi-Tenma 2-9-1, Kita-ku, Osaka 530-0044, Japan		
geprüft/ tested by:		kontrolliert/ reviewed by:	
2009-03-27 T. Cheung / Inspector 		2009-03-27 R. Sehb / Reviewer 	
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>
Sonstiges / Other Aspects:			
This test report deals with the intentional radiator 802.11.b/g of the tested product, details refer to Section 1: General remarks			
Abkürzungen:	P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations:	P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>			

TEST SUMMARY

3.2.1 VOLTAGE REQUIREMENTS, FCC 15.31(E)

RESULT: PASS

3.2.2 ANTENNA REQUIREMENTS, FCC 15.203, FCC 15.204 AND RSS-GEN 7.1.4

RESULT: PASS

5.1.1 CONDUCTED OUTPUT POWER AT ANTENNA TERMINALS, FCC 15.247(B)(3) AND RSS-210 A8.4(4)

RESULT: PASS

5.1.2 6dB BANDWIDTH, FCC 15.247(A)(2) AND RSS-210 A8.2(A)

RESULT: PASS

5.1.3 CONDUCTED SPURIOUS EMISSION, FCC 15.247(D) AND RSS-210 A8.5

RESULT: PASS

5.1.4 PEAK POWER SPECTRAL DENSITY, FCC 15.247(E) AND RSS-210 A8.2(B)

RESULT: PASS

6.1.1 MAINS TERMINAL CONTINUOUS DISTURBANCE VOLTAGE OF TRANSMITTER, FCC 15.207 AND RSS-GEN 7.2.2

RESULT: PASS

7.1.1 BAND EDGE RADIATED EMISSION, FCC 15.247(D) AND RSS- 210 2.2

RESULT: Pass

7.1.2 RADIATED EMISSION, OUT-OF-BAND AND SPURIOUS EMISSION, FCC 15.247(D), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 AND RSS-GEN 7.2.1

RESULT: PASS

7.2.1 RADIATED EMISSION OF RECEIVER, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5, RSS-GEN 7.2.3.2

RESULT: PASS

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	SYSTEM DETAILS	8
3.2.1	<i>Voltage Requirements, FCC 15.31(e)</i>	<i>9</i>
3.2.2	<i>Antenna Requirements, FCC 15.203, FCC 15.204 and RSS-Gen 7.1.4</i>	<i>9</i>
3.3	CLOCK FREQUENCIES	10
3.4	INDEPENDENT OPERATION MODES	10
3.5	NOISE SUPPRESSING PARTS	11
4.	TEST SET-UP AND OPERATION MODES	12
4.1	TEST METHODOLOGY	12
4.2	PHYSICAL CONFIGURATION FOR TESTING	13
4.3	TEST OPERATION AND TEST SOFTWARE	14
4.4	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	14
4.5	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	18
5.	TEST RESULTS CONDUCTED TESTING AT ANTENNA PORT	19
5.1.1	<i>Conducted Output Power at Antenna Terminals, FCC 15.247(b)(3) and RSS-210 A8.4(4)</i>	<i>19</i>
5.1.2	<i>6dB Bandwidth, FCC 15.247(a)(2) and RSS-210 A8.2(a)</i>	<i>21</i>
5.1.3	<i>Conducted Spurious Emission, FCC 15.247(d) and RSS-210 A8.5</i>	<i>26</i>
5.1.4	<i>Peak Power Spectral Density, FCC 15.247(e) and RSS-210 A8.2(b)</i>	<i>46</i>
6.	TEST RESULTS AC MAINS CONDUCTED EMISSION	51
6.1	AC MAINS CONDUCTED EMISSION OF TRANSMITTER	51
6.1.1	<i>Mains Terminal Continuous Disturbance Voltage of Transmitter, FCC 15.207 and RSS-Gen 7.2.2</i>	<i>51</i>
7.	TEST RESULTS RADIATED EMISSION	54
7.1	RADIATED EMISSION OF TRANSMITTER	54
7.1.1	<i>Band Edge Radiated Emission, FCC 15.247(d) and RSS- 210 2.2</i>	<i>54</i>
7.1.2	<i>Radiated Emission, Out-of-Band and Spurious Emission, FCC 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 and RSS-Gen 7.2.1</i>	<i>59</i>

Produkte
Products

Prüfbericht - Nr.:	12307454 001	Seite 4 von 76
<i>Test Report No.:</i>		<i>Page 4 of 76</i>
7.2	RADIATED EMISSION OF RECEIVER	66
7.2.1	<i>Radiated Emission of Receiver, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5, RSS-Gen 7.2.3.2</i>	<i>66</i>
8.	PHOTOGRAPHS OF TEST SETUP	68
9.	LIST OF TABLES.....	74
10.	LIST OF FIGURES	75
11.	LIST OF PHOTOGRAPHS	76

1. General Remarks

The EUTs are Debugger, ISXD and Capture, ISXC. The Debugger and Capture are tested due to different Digital interface construction. This test report covers intentional radiator aspects in 802.11.b/g, other aspects are covered by other test report as shown follows.

Test report number	Content
12307454 001	Intentional radiator: 802.11.b/g
12307454 002	Intentional radiator: 802.11
12308454 003	Unintentional radiator
12308454 004	Exposure letter

1.1 Complementary Materials

All attachments are integral parts of this test report.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland Japan Ltd. - Global Technology Assessment Center
4-25-2 Kita-Yamata, Tsuzuki-ku, Yokohama 224-0021, Japan

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communication Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules.

The description of the test facility is listed under FCC registration number 299054.

The Industry Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under O.A.T.S filing number 3466B.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equipment ID	Calibrated until
For Antenna Conducted Emission					
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2009-02
Peak Power Meter	Agilent	N1911A	MY45101339	-	2008-12
Wideband Power Sensor (50MHz-18GHz)	Agilent	N1921A	MY45241019	-	2008-12
For AC Mains Conducted Emission (CE)					
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2009-02
Two-Line V-Network (LISN)	Rohde & Schwarz	ENV216	100276	RF-0016	2009-05
For Radiated Emission (RE)					
Receiver	Rohde & Schwarz	ESU 8	100025	RF-0020	2009-02
Receiver	Rohde & Schwarz	ESU 40	100029	RF-0021	2009-02
RF Selector (10m)	Toyo Corporation	NS4900	0703-182	RF-0029	2009-05
Low Noise Pre-Amplifier	TSJ	MLA-10K01-B01-35	1370750	RF-0253	2009-05
3dB Attenuator 50Ohm	Tamagawa Electronics Co., Ltd.	CFA-01	-	RF-0265	2009-05
Band Reject Filter	Nitsuki	NF-49BT	027	RF-0131	2008-12
Microwave Preamplifier, 1-8GHz	Toyo Corporation	TPA0108-40	0634	RF-0052	2008-12
Trilog Antenna	Schwarzbeck	VULB9168	0245	RF-0019	2009-05
Biconical Antenna	EMCO	3110B	9603-2379	RF-0207	2009-03
Broad Band Horn Antenna (1-10GHz)	Schwarzbeck	BBHA9120B	419	RF-0050	2009-05
Double Ridged Broadband Horn Antenna (2-18GHz)	Toyo Corporation	HAP06-18W	00000025	RF-0065	2009-05
Broad Band Horn Antenna (18-26.5GHz)	Toyo Corporation	HAP18-26N	00000010	RF-0070	2009-05
Constant Voltage Constant Frequency Stabilizers					
CVCF (3m chamber)	NF Corporation	ESU2000S	9067195	RF-0208	N/A
CVCF Booster (3m chamber)	NF Corporation	ESU2000B	9072132	RF-0209	N/A
CVCF (Shielded Room)	NF Corporation	ESU2000S	9075612	RF-0210	N/A
CVCF Booster (Shielded Room)	NF Corporation	ESU2000B	9074403	RF-0211	N/A
CVCF (10m chamber)	NF Corporation	ESU2000S	9067307	RF-0212	N/A

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 7 von 76

Page 7 of 76

Kind of Equipment	Manufacturer	Model Name	Serial Number	Equipment ID	Calibrated until
CVCF Booster (10m chamber)	NF Corporation	ESU2000B	9074408	RF-0213	N/A
CVCF (Pulse Test lab)	NF Corporation	ESU2000U	9067195	RF-0122	N/A
CVCF Booster (Pulse Test lab)	NF Corporation	ESU2000B	9072108	RF-0121	N/A

2.3 Measurement Uncertainty

Table 2: Emission Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Conducted Emission	150kHz - 30MHz	±1.4dB
Antenna Port Conducted Emissions	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Radiated Emission (Horizontal Orientation)	30MHz - 1GHz	±4.8dB
	> 1GHz	±5.2dB
Radiated Emission (Vertical Orientation)	30MHz - 1GHz	±4.2dB
	> 1GHz	±5.2dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test)s are DEBUGGER or CAPTURE which is the tool that can take screenshots and AVI movies of game play. The radio module includes 802.11 b/g and 802.11 using the same antenna which can transmit either one at the same time. 802.11 can be connected with Wii or Nintendo DS.

3.2 System Details

Radio standard:	IEEE 802.11.b/g
Specified power output:	2.0dBm
Antenna gain:	2.0dBi
Antenna type:	Dipole antenna
Mounting type:	External
Frequency range:	2412 – 2462 MHz
Number of channel:	11
Channel spacing:	5 MHz
Modulation type:	BPSK, QPSK, CCK, BPSK, QPSK, 16 QAM, 64 QAM
FCC Classification:	DTS
Classification:	G1D
System Input Voltage:	AC 110-240V, 50/60Hz via AC adaptor
Protection Class:	II

Radio standard:	IEEE 802.11
Specified power output:	0dBm (max. peak power: 1mW)
Antenna gain:	2.0 dBi
Antenna type:	Dipole antenna
Mounting type:	External
Frequency range:	2412 – 2472 MHz
Number of channel:	13
Channel spacing:	5 MHz
Modulation type:	DBPSK, DQPSK
FCC Classification:	DTS
Classification:	G1D
System Input Voltage:	AC 110-240V, 50/60Hz via AC adaptor
Protection Class:	II

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 9 von 76
Page 9 of 76

3.2.1 Voltage Requirements, FCC 15.31(e)

RESULT: **PASS**

The EUT has an internal voltage regulator to supply the RF circuit. Hence it complies with the power supply requirements.

3.2.2 Antenna Requirements, FCC 15.203, FCC 15.204 and RSS-Gen 7.1.4

RESULT: **PASS**

The EUT has an external antenna with SMA connector, details refer to the professional installation letter for the installation guidance.

3.3 Clock Frequencies

The EUT generates internally the following clock frequencies:

Frequency	Source
32.768 kHz	RTC
4 MHz	CPLD
16.756991 MHz	TWL CPU(TARGET CPU)
24 MHz	USB controller
48 MHz	V850 (HOST CPU)

3.4 Independent Operation Modes

The system was configured for testing in a typical fashion (as a customer would normally use it).

The justification and manipulation of cables and equipment in order to simulate a worst-case behavior of the test setup has been carried out as prescribed in ANSI C63.4:2003. Testing was performed at the lowest operating frequency (2412 MHz), the operating frequency in the middle of the specified frequency band (2437 MHz) and the highest operating frequency (2462 MHz).

The basic operation modes are:

- A. EUT transmits at lowest Channel (2412 MHz), 802.11 b/g radio
- B. EUT transmits at middle Channel (2437 MHz), 802.11 b/g radio
- C. EUT transmits at highest Channel (2462 MHz), 802.11 b/g radio
- D. EUT transmits with 802.11 b radio
- E. EUT transmits with 802.11 g radio
- F. EUT receives packets with 802.11 b radio
- G. EUT receives packets with 802.11 g radio
- I. EUT transmits at lowest Channel (2412 MHz), 802.11 radio
- J. EUT transmits at middle Channel (2437 MHz), 802.11 radio
- K. EUT transmits at highest Channel (2472 MHz), 802.11 radio
- L. EUT receives packets with 802.11 radio
- H. Normal Operation mode – to simulate the data processing on EUT in below sequences
 - Data transfer (Tx/Rx) through signal cable (EUT <-> Controller (Dummy Game Machine)) and make verification,
 - Communication (Tx/Rx) through USB cable (EUT <-> Host PC) and make verification
 - Picture display through video signal cables (EUT -> Monitor x2)

Prüfbericht - Nr.: **12307454 001**
Test Report No.:

Seite 11 von 76
Page 11 of 76

3.5 Noise Suppressing Parts

Refer to the schematic

4. Test Set-up and Operation Modes

4.1 Test Methodology


The test methodology used is based on the requirements of 47 CFR Part 15, sections 15.31, 15.33, 15.35, 15.205, 15.209 and Measurement of Digital Transmission Systems Operating under Section 15.247.

The test methods, which have been used, are based on ANSI C63.4:2003 and RSS-Gen.

For details, see under each test item.

4.2 Physical Configuration for Testing

Figure 1: Test setup

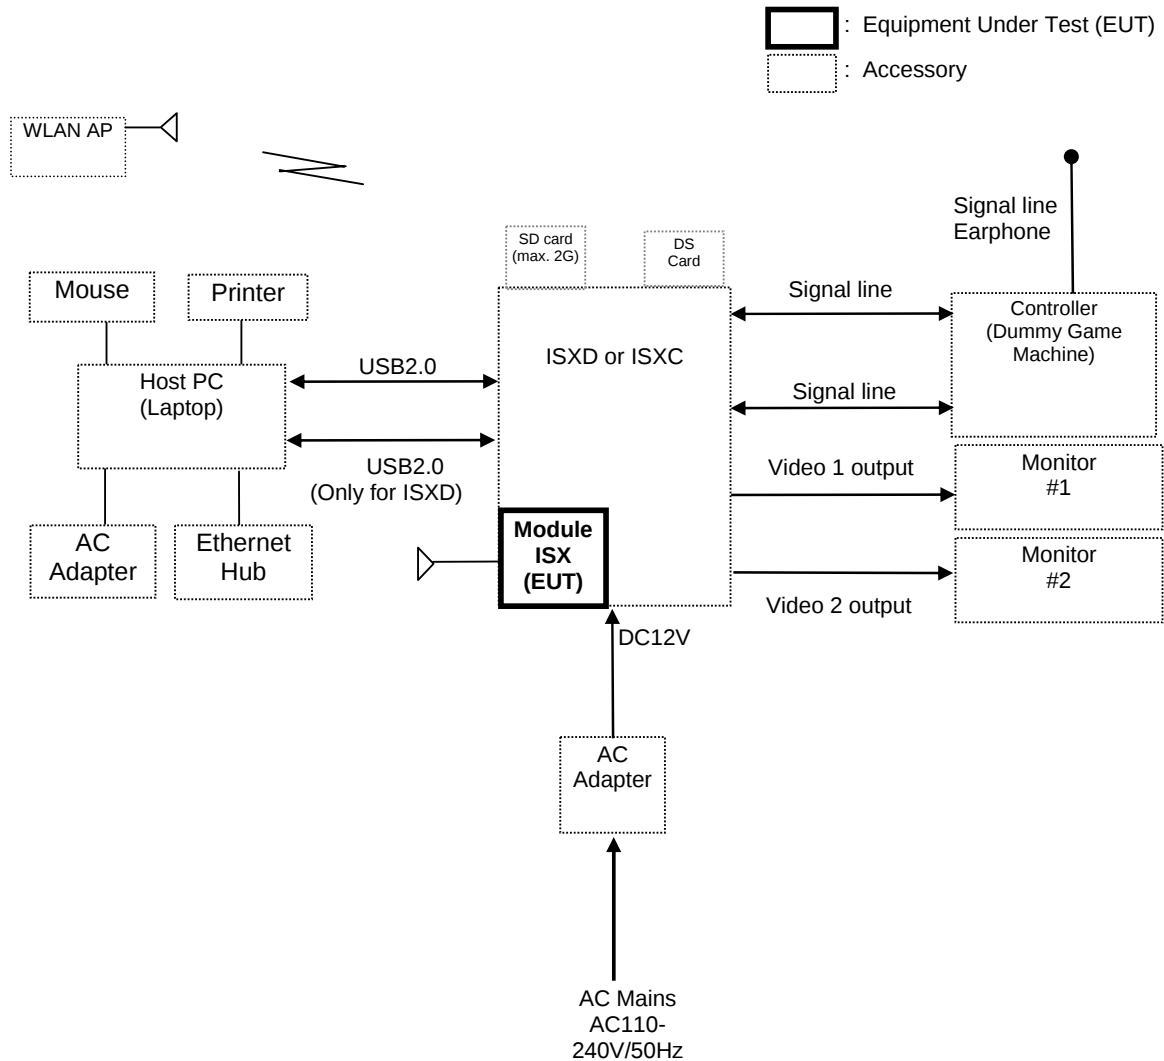

Remark: All AC input power ports of accessories are not shown.

In the sample for conducted tests, the antenna was replaced by a 50Ω antenna connector.

The printer was only used for the measurement of the AC mains conducted and radiated emissions of the receiver.

For more details, refer to section: Photographs of the Test Set-Up.

4.3 Test Operation and Test Software

Following software were used for testing provided by INTELLIGENT SYSTEMS Co., Ltd.

- a. RF Module
Wireless communication program
 - EMC-1(WIFI) / WR-HP-G54 (Access Point)
 - SPI-USB
 - ARTPC SOFT
 - WIFI-ISXD
 - WIFI-ISXCProgram on DS Card
 - WMTEST
- b. Debugger and Capture
Full operation test program
 - EMC-1PC SOFT
 - ISXC
 - ISXDLimited function test program.
 - EMC-1(MIN)Program on DS Card
 - WMTEST

Above software were running on the external PC performing continuous radio communication of the EUT with the WLAN Access Point, and data process (Digital Interface) was disable. It was used to enable on the EUT the test operation mode specified in section 3.4 as appropriate.

4.4 Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- 1. Product: ISXD
Manufacturer: Intelligent Systems
Model: IS-TWL-Debugger
Rated voltage: DC 12V
Input current: 3.7A
Frequency: -
Serial number: 1100427-2

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Seite 15 von 76

Test Report No.:

Page 15 of 76

2. Product: Nintendo DS i
Manufacturer: Intelligent Systems
Model: IS-TWL-CTRL
Rated voltage: DC 1.65V
Frequency: -
Serial number: 1100427-2

3. Product: AC Adapter (for ISXD)
Manufacturer: Nintendo
Model: RVL-002 (USA)
Rated voltage: 120V
Input power: 53W
Frequency: 60Hz
Serial number: A8VT210

4. Product: 4 Port USB Hub
Manufacturer: Green House
Model: GH-UHC204BW
Rated voltage: USB
Input current: -
Frequency: -
Protection class:-
Serial number: R010/1518

5. Product: Laptop Computer
Manufacturer: NEC
Model: LaVie LJ700/7
Rated voltage: 19 V
Input current: 2.64 A
Frequency: -
Protection class:-
Serial number: D03-0041 JPB

6. Product: AC Adapter for NEC Laptop Computer
Manufacturer: NEC
Model: ADP63
Rated voltage: AC 100-240V
Input current: 101-141 VA
Frequency: 50-60Hz
Serial number: 3800492DC

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 16 von 76

Page 16 of 76

7. Product: Laptop Computer
Manufacturer: Dell
Model: PP18L
Rated voltage: 19.5V
Input current: 4.62A
Frequency: -
Serial number: 18188759085
8. Product: AC Adapter for Dell Laptop Computer
Manufacturer: Dell
Model: HA65NS0-00
Rated voltage: 100-240V
Input current: 1.5A
Frequency: 50-60Hz
Serial number: CN-0DF261-47890-73K-A0GL
9. Product: WLAN Access Point
Manufacturer: PCI
Model: GW-US54GXS
Rated voltage: USB
Input current: -
Frequency: -
Serial number: 61HH06344AR
10. Product: Nintendo DS Headphone
Manufacturer: Un-specified
Model: Un-specified
Rated voltage: -
Input current: -
Frequency: -
Serial number: Un-specified
11. Product: Monitor
Manufacturer: Sony
Model: KVL-14SP2
Rated voltage: DC 16.5C
Input current: 60W
Frequency: -
Serial number: 2008220
12. Product: AC Adapter for Monitor
Manufacturer: Sony
Model: AC-FD006
Rated voltage: 100-240V
Input current: 125-165VA
Frequency: 50-60 Hz
Serial number: 045005895

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 17 von 76

Page 17 of 76

13. Product: Monitor
Manufacturer: Sony
Model: KVL-14SP2
Rated voltage: DC 16.5C
Input current: 60W
Frequency: -
Serial number: 2015371
14. Product: AC Adapter for Monitor
Manufacturer: Sony
Model: AC-FD006
Rated voltage: 100-240V
Input current: 125-165VA
Frequency: 50-60 Hz
Serial number: 044003931
15. Product: Mouse
Manufacturer: Dell
Model: MP58UC
Rated voltage: USB
Input current: -
Frequency: -
Serial number: G0601Z20
16. Product: Ethernet Hub
Manufacturer: Buffalo
Model: Giga Switching Hub, LSW3-GT-5NS(D1)
Rated voltage: AC100V
Input power: 5W
Frequency: 50/60Hz
Serial number: 16485784211186
17. Product: Printer
Manufacturer: HP
Model: HP Officejet Pro K550
Rated voltage: 100-240V
Input current: 0.7A
Frequency: 50-60Hz
Serial number: MY6C77101X
18. Product: Printer
Manufacturer: Dell
Model: 725
Rated voltage: 100-240V
Input current: 1A
Frequency: 50-60Hz
Serial number: CN-OFF790-48734-5BS-3HAV

4.5 Countermeasures to achieve EMC Compliance

1. USB port
L shape aluminum tape was added to USB connector.
2. Shielding for controller (dummy game unit) ferrite sheet and copper sheet was added between housing and connecting cable for main unit Cable connector's GND for controller (dummy game unit) was improved.
3. Ferrite ring
 - a. Seiwa (small): E04SR211132
 - i. For USB cables (ISXD and ISXC), 25cm from main unit, 1 loop
 - ii. For controller (dummy game unit)
Both Nintendo DS cables and Nintendo DS side, 0 loop
 - b. TDK (large): ZCAT3035-1330
 - i. For Controller (dummy game unit) cable x 2
Both Nintendo DS cables and main unit side, 0 loop

All the countermeasures are considered due to the digital interface's noise.

5. Test Results Conducted Testing at Antenna Port

For conducted tests, the antenna was replaced by a 50Ω antenna connector.

5.1.1 Conducted Output Power at Antenna Terminals, FCC 15.247(b)(3) and RSS-210 A8.4(4)

RESULT: **PASS**

Date of testing:	2008-11-05	2008-11-17
Ambient temperature:	25 °C	25°C
Relative humidity:	35 %	44%
Atmospheric pressure:	1016hPa	1005hPa

Requirements:

For systems using digital modulation in the 2400-2483.5MHz band, the maximum peak output power is 1W (30dBm).

Test procedure:

RSS-Gen 4.8 and Measurement of Digital Transmission Systems Operating under Section 15.247.

The maximum peak output power (conducted) was measured directly at the antenna connector with the power meter. The final measurement takes into account the loss generated by the short cable provided by the EUT manufacturer to support the antenna connector.

The highest emission amplitudes relative to the appropriate limit were recorded in this report.

Table 3: Conducted Output Power , 802.11.b

	Power (dBm), DSS, 802.11.b, Peak				Limit (dBm)
	1Mbps	2Mbps	5.5Mbps	11Mbps	
Lo (2412MHz)	4.3	4.3	3.9	4.2	30
Mid (2437MHz)	4.3	4.2	3.8	4.2	30
Hi (2462MHz)	4.0	4.0	3.5	4.0	30

Table 4: Conducted Output Power , 802.11.g

	Power (dBm), OFDM, 802.11(g), Peak								Limit (dBm)
	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Lo (2412MHz)	9.6	9.6	9.8	10.2	10.0	9.0	8.6	8.8	30
Mid (2437MHz)	9.6	9.6	9.5	9.8	9.9	9.5	9.2	8.8	30
Hi (2462MHz)	9.4	9.5	9.6	9.6	9.9	9.2	8.8	8.6	30

The worst case configuration was found for the power output of the 802.11.b radio at 1Mbps and 802.11.g at 18 Mbps. These two test modes will be used for the rest of evaluation of the RF Module.

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 21 von 76

Page 21 of 76

5.1.2 6dB Bandwidth, FCC 15.247(a)(2) and RSS-210 A8.2(a)

RESULT:

PASS

Date of testing: 2008-11-23

Ambient temperature: 24°C

Relative humidity: 42%

Atmospheric pressure: 1019hPa

Requirements:

For systems using digital modulation in the 2400-2483.5MHz band, the minimum 6dB bandwidth shall be at least 500 kHz.

Test procedure:


RSS-Gen 4.6.2 and Measurement of Digital Transmission Systems Operating under Section 15.247.

The antenna connector was connected to a spectrum analyzer. The spectrum analyzer resolution bandwidth was set to 1% of the SPAN (10MHz). The 6dB Bandwidth was measured by using the DELTA MARKER function of the analyzer.

Table 5: 6dB Bandwidth, 802.11.b


Frequency [MHz]	6dB Bandwidth [MHz]	Minimum Limit [kHz]
2412	12.34	500
2437	12.18	500
2462	12.34	500

Figure 2: 6dB Bandwidth, Mode A (2412MHz)

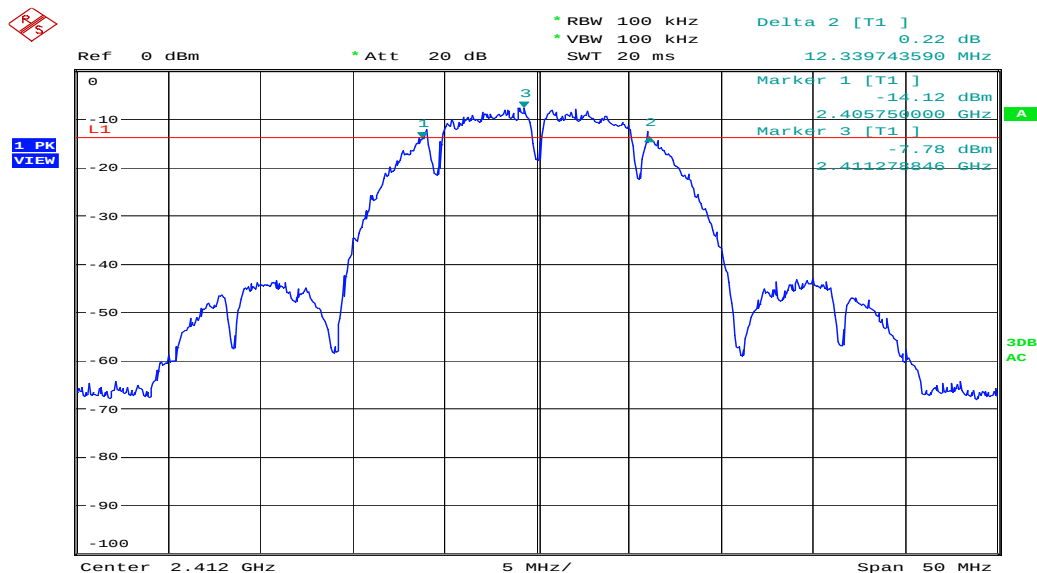

6dB bandwidth, 802.11b, lower channel
Date: 23.NOV.2008 17:25:52

Figure 3: 6dB Bandwidth, Mode B (2437MHz)

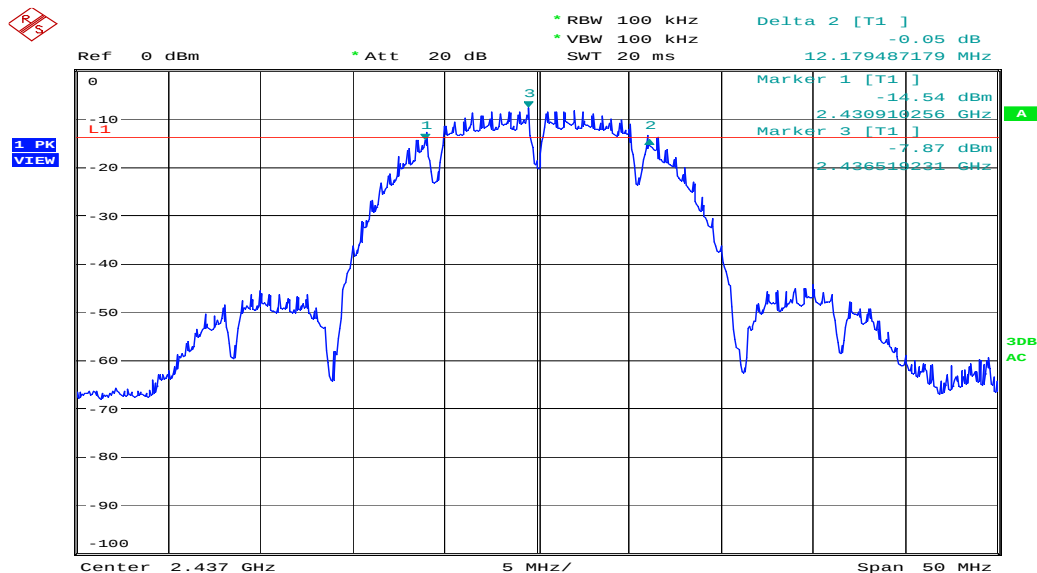


6dB bandwidth, 802.11b, middle channel
Date: 23.NOV.2008 17:29:52

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 23 von 76
Page 23 of 76

Figure 4: 6dB Bandwidth, Mode C (2462MHz)

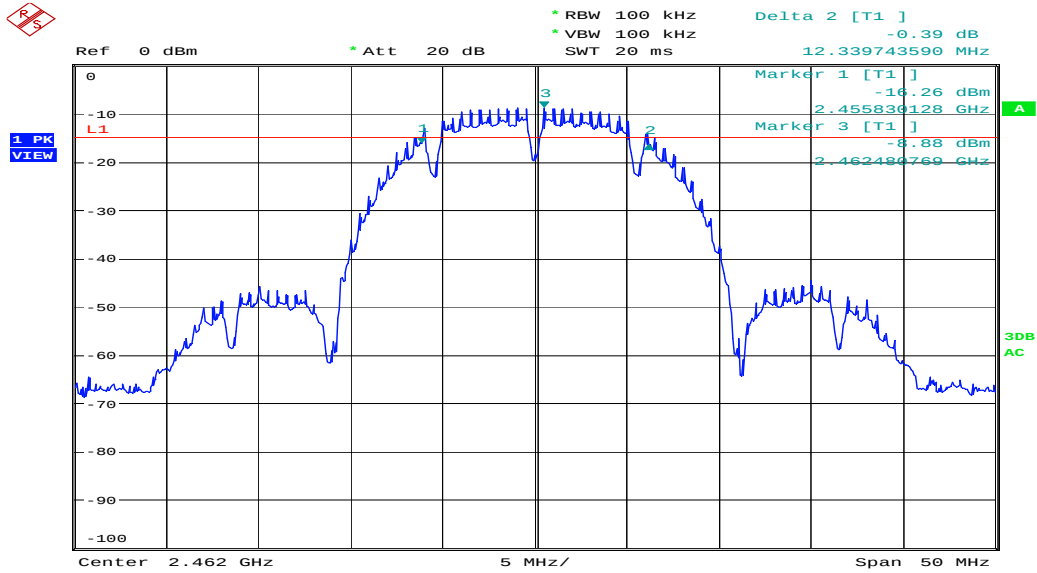


6dB bandwidth, 802.11b, higher channel

Table 6: 6dB Bandwidth, 802.11.g


Frequency [MHz]	6dB Bandwidth [MHz]	Limit [kHz]
2412	16.67	500
2437	16.67	500
2462	16.67	500

Figure 5: 6dB Bandwidth, Mode A (2412MHz)

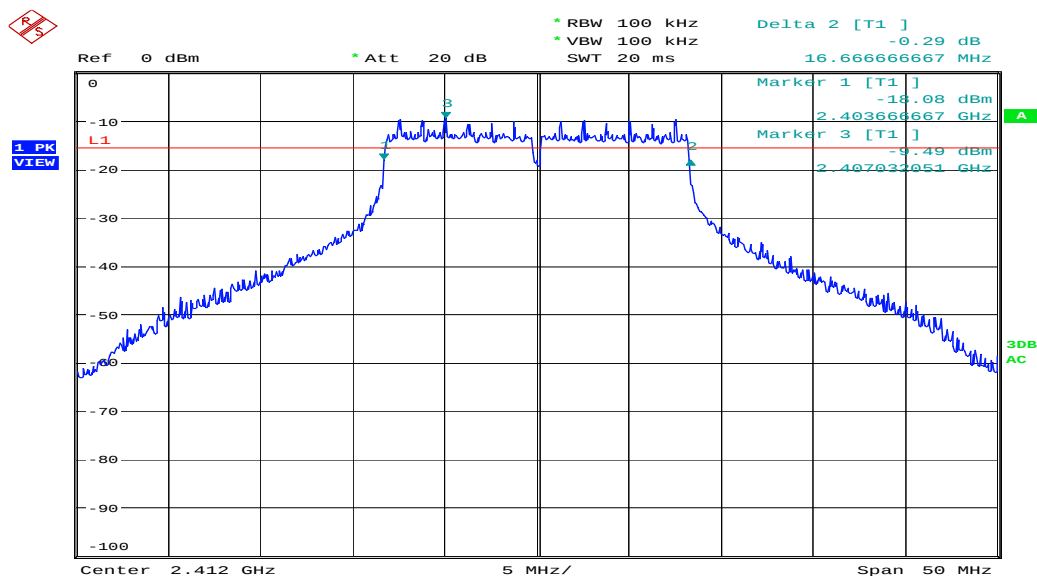


6dB bandwidth, 802.11g, lower channel
Date: 23.NOV.2008 17:43:13

Figure 6: 6dB Bandwidth, Mode B (2437MHz)

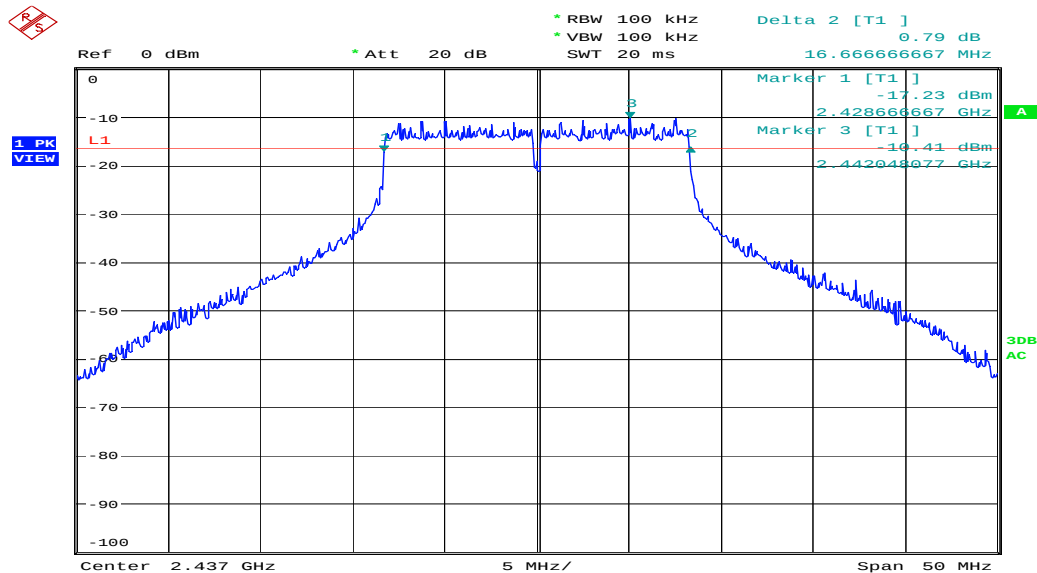

6dB bandwidth, 802.11g, middle channel
Date: 23.NOV.2008 17:39:54

Figure 7: 6dB Bandwidth, Mode C (2462MHz)

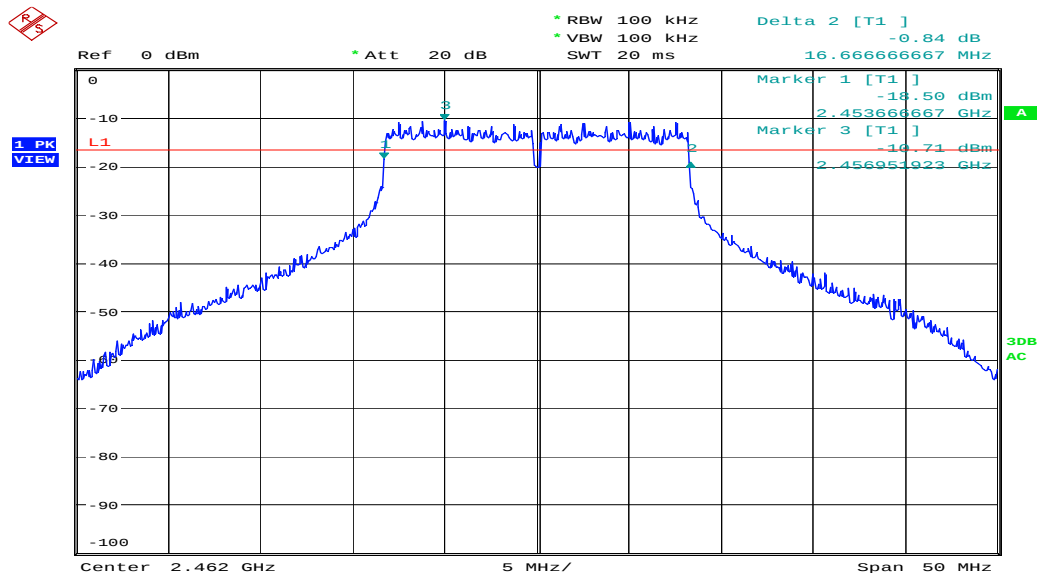

6dB bandwidth, 802.11g, higher channel
Date: 23.NOV.2008 17:37:19

5.1.3 Conducted Spurious Emission, FCC 15.247(d) and RSS-210 A8.5

RESULT:

PASS

Date of testing: 2008-11-23

Ambient temperature: 24°C

Relative humidity: 42%

Atmospheric pressure: 1019hPa

Requirements:

In any 100 kHz bandwidth outside the frequency band, the RF power shall be at least 20 dBc below that of the maximum in-band 100 kHz emission.

Test procedure:

RSS-Gen 4.9 and Measurement of Digital Transmission Systems Operating under Section 15.247.

A spectrum analyzer was connected to the antenna port of the transmitter. Analyzer Resolution Bandwidth was set to 100 kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30 MHz to 25 GHz (10th harmonics).

The final measurement takes into account the loss generated by all the involved cables.

Table 7: Conducted Spurious Emission, Mode A (2412MHz), 802.11.b


Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
98.40	-61.55	0.23	-61.32	-27.01	34.31
410.85	-66.42	0.49	-65.93	-27.01	38.92
2410	-8.18	1.17	-7.01	N/A	N/A
2586	-62.54	1.20	-61.34	-27.01	34.33
3218	-53.42	1.50	-51.92	-27.01	24.91
4827	-61.09	1.70	-59.39	-27.01	32.38
7636	-67.07	2.25	-64.82	-27.01	37.81
19567	-66.35	3.29	-63.06	-27.01	36.05
21250	-65.08	3.54	-61.54	-27.01	34.53

Notes: Limit = Reading of fundamental + Correction factor – 20dB

Emission level = Reading + Correction factor


Correction factor = Total cable loss

Figure 8: Spurious Emission from 30MHz to 1GHz, Mode A (2412MHz)

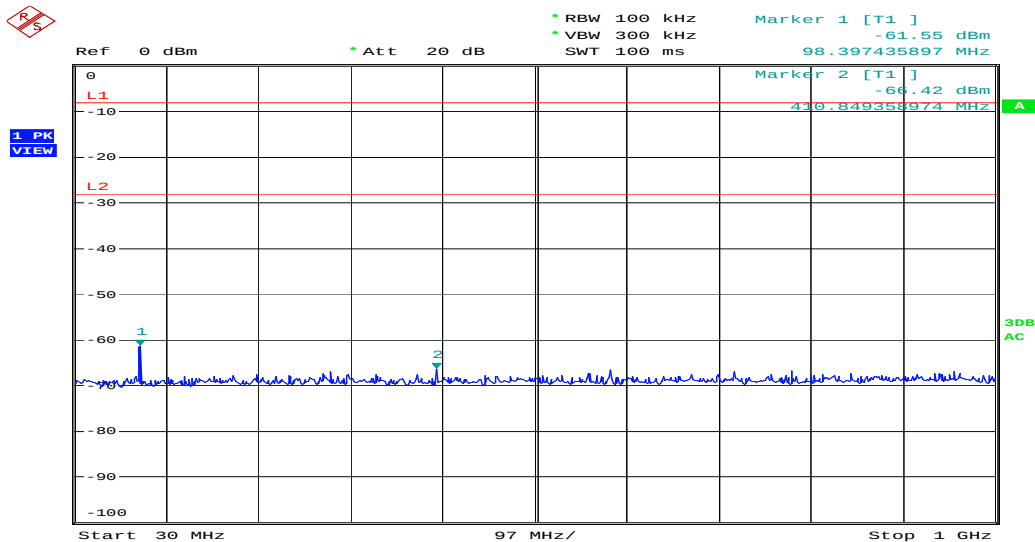


Spurious, 802.11b, lower channel
L1=-8.18dBm, L2=-28.18dBm
Date: 23.NOV.2008 21:58:41

Figure 9: Spurious Emission from 1 to 5GHz, Mode A (2412MHz)

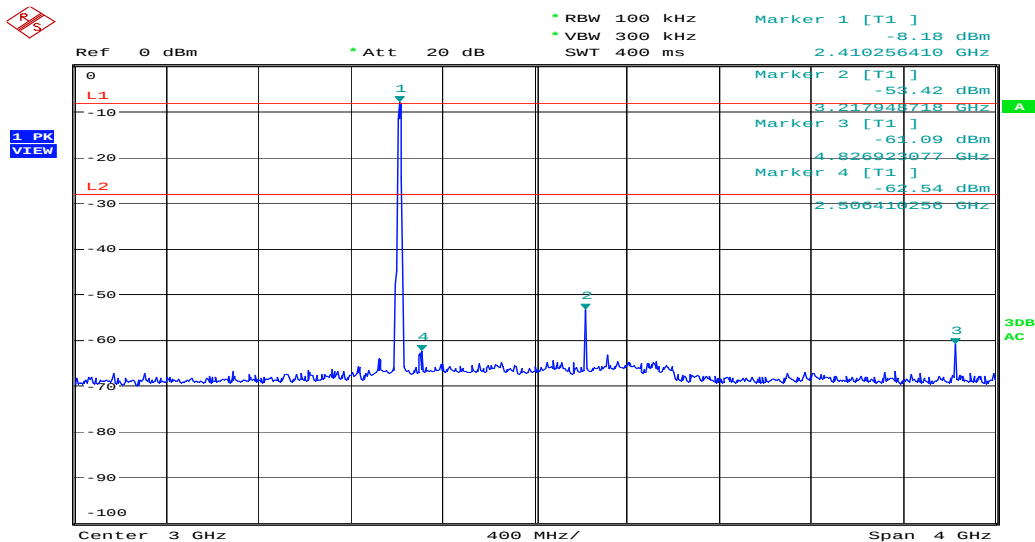


Spurious, 802.11b, lower channel
L1=-8.18dBm, L2=-28.18dBm
Date: 23.NOV.2008 21:57:19

Figure 10: Spurious Emission from 5 to 10GHz, Mode A (2412MHz)

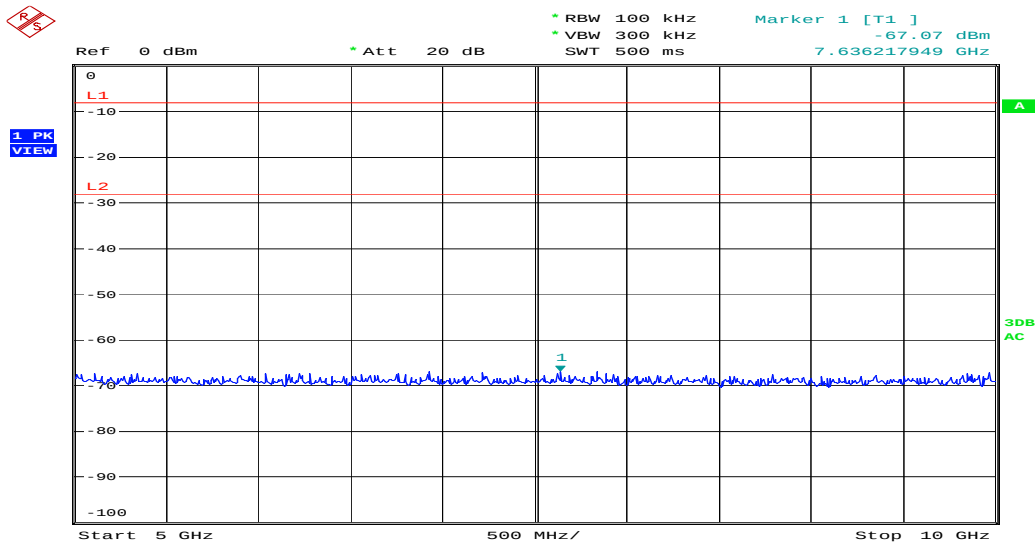

Spurious, 802.11b, lower channel
L1=-8.18dBm, L2=-28.18dBm
Date: 23.NOV.2008 21:59:28

Figure 11: Spurious Emission from 10 to 20GHz, Mode A (2412MHz)

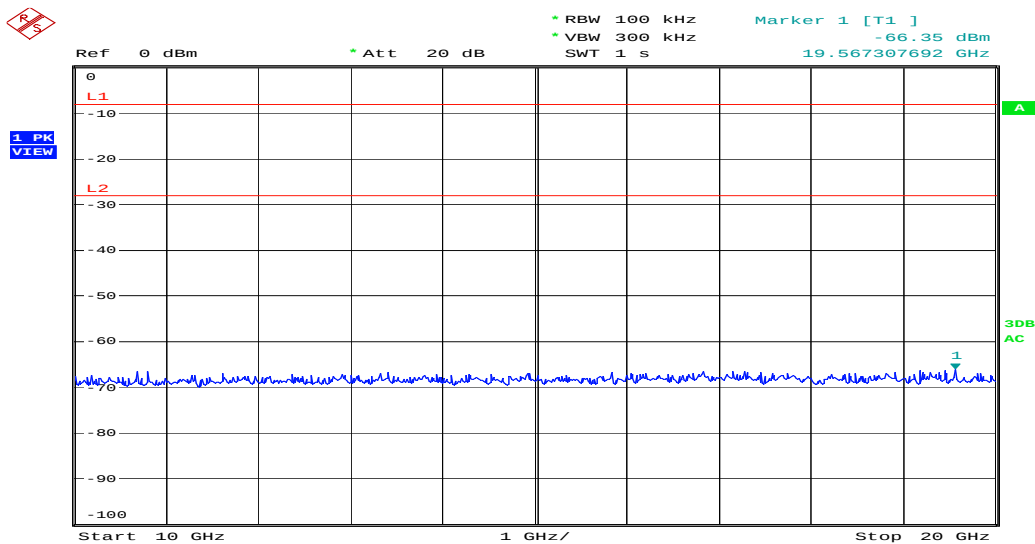


Spurious, 802.11b, lower channel
L1=-8.18dBm, L2=-28.18dBm
Date: 23.NOV.2008 22:01:05

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 29 von 76
Page 29 of 76


Figure 12: Spurious Emission from 20 to 25GHz, Mode A (2412MHz)

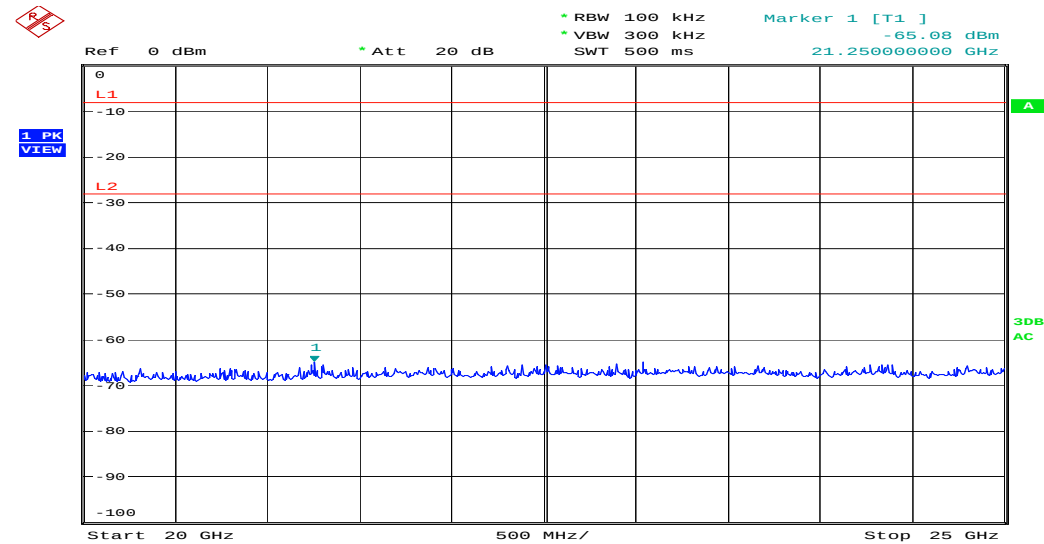

Spurious, 802.11b, lower channel
L1=-8.18dBm, L2=-28.18dBm
date: 23 NOV 2008 22:01:43


```
Spurious, 802.11b, middle channel
L1=-8.21dBm, L2=-28.21dBm
Date: 23.NOV.2008 22:07:48
```

Figure 14: Spurious Emission from 1 to 5GHz, Mode B (2437MHz)

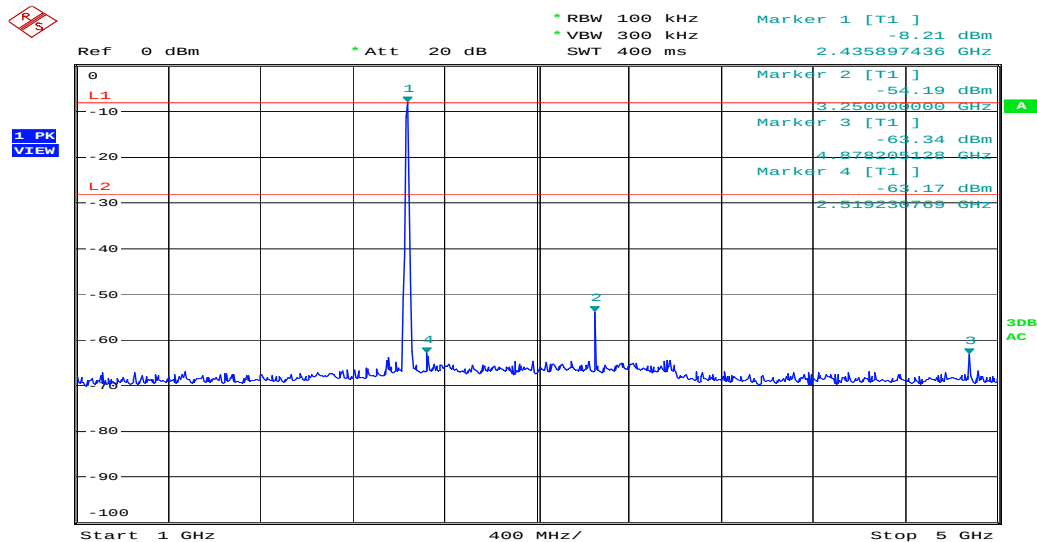


Spurious, 802.11b, middle channel
L1=-8.21dBm, L2=-28.21dBm
Date: 23.NOV.2008 22:05:53

Figure 15: Spurious Emission from 5 to 10GHz, Mode B (2437MHz)

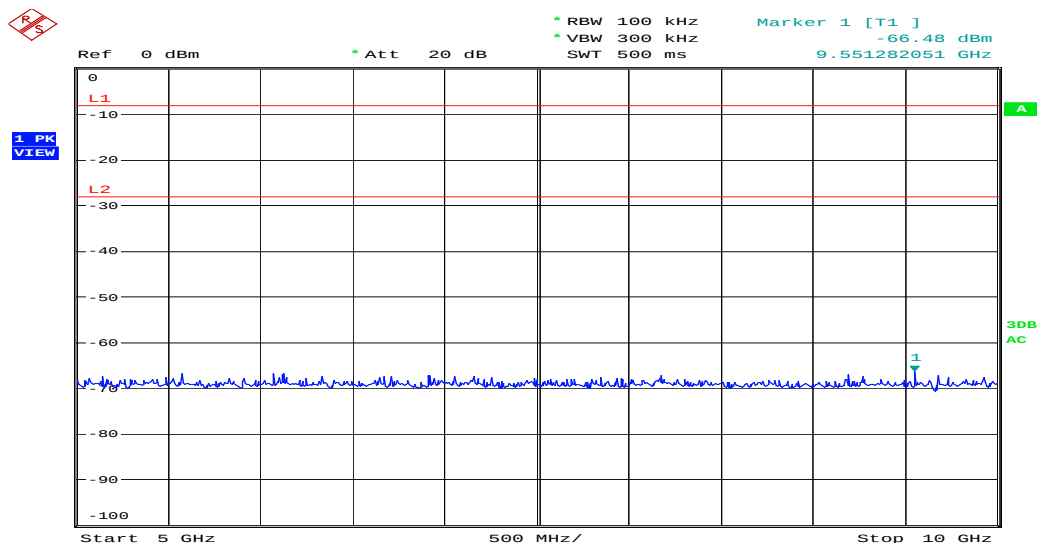


Spurious, 802.11b, middle channel
L1=-8.21dBm, L2=-28.21dBm
Date: 23.NOV.2008 22:09:03

Figure 16: Spurious Emission from 10 to 20GHz, Mode B (2437MHz)

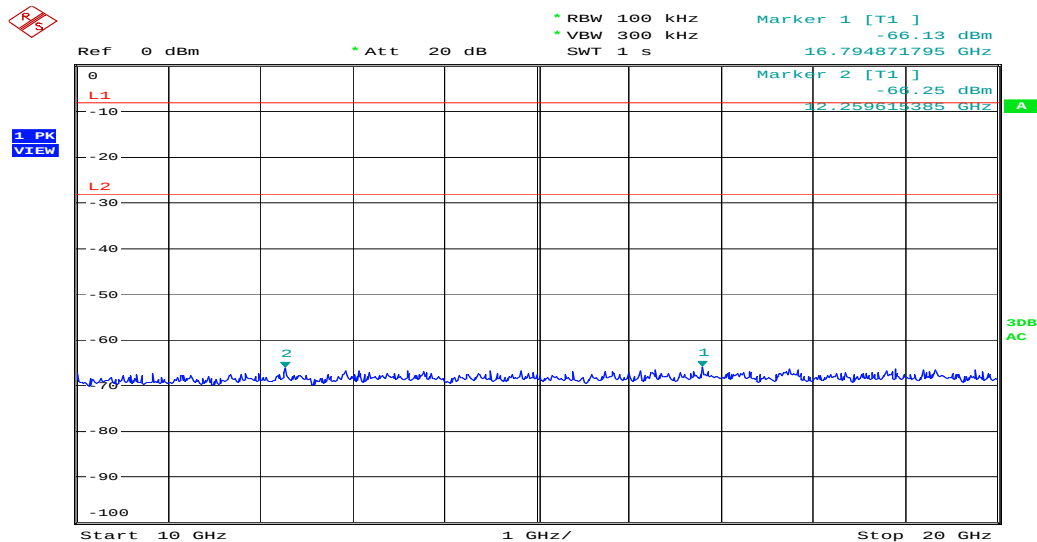

Spurious, 802.11b, middle channel
L1=-8.21dBm, L2=-28.21dBm
Date: 23.NOV.2008 22:09:52

Figure 17: Spurious Emission from 20 to 25GHz, Mode B (2437MHz)

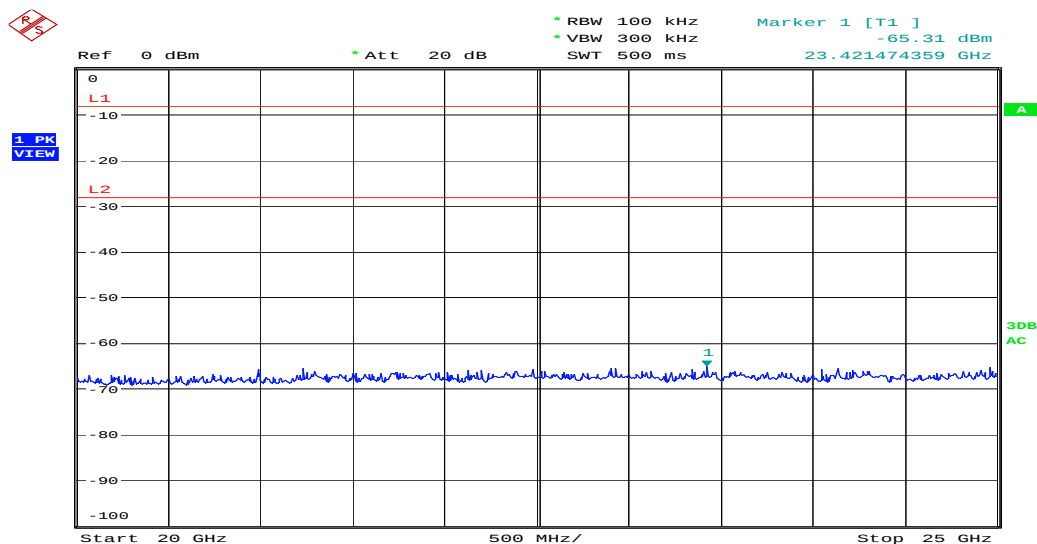


Spurious, 802.11b, middle channel
L1=-8.21dBm, L2=-28.21dBm
Date: 23.NOV.2008 22:10:36

Table 9: Conducted Spurious Emissions, Mode C (2462MHz), 802.11.b

Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
146.59	-61.12	0.29	-60.83	-28.03	32.80
196.33	-66.90	0.34	-66.56	-28.03	38.53
2378	-64.57	1.15	-63.42	-28.03	35.39
2455	-9.20	1.17	-8.03	N/A	N/A
3282	-55.92	1.50	-54.42	-28.03	26.39
4929	-65.52	1.72	-63.80	-28.03	35.77
5489	-66.36	1.84	-64.52	-28.03	36.49
7412	-66.51	2.21	-64.30	-28.03	36.27
19279	-65.89	3.30	-62.59	-28.03	34.56
24119	-65.22	3.83	-61.39	-28.03	33.36


Notes: Limit = Reading of fundamental + Correction factor – 20dB
Emission level = Reading + Correction factor
Correction factor = Total cable loss

Figure 18: Spurious Emission from 30MHz to 1GHz, Mode C (2462MHz)

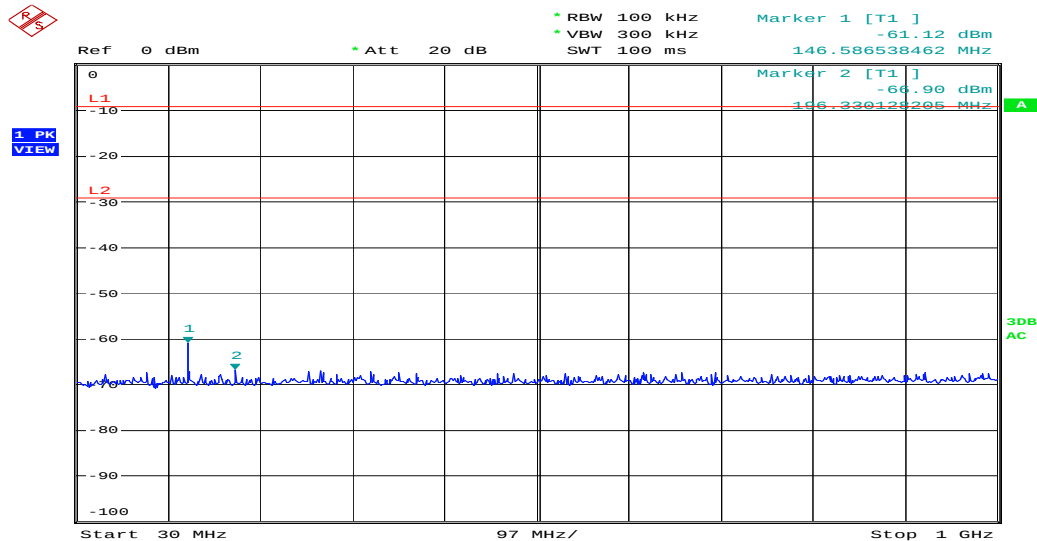


Spurious, 802.11b, higher channel
L1=-9.20dBm, L2=-29.20dBm
Date: 23.NOV.2008 22:17:02

Figure 19: Spurious Emission from 1 to 5GHz, Mode C (2462MHz)

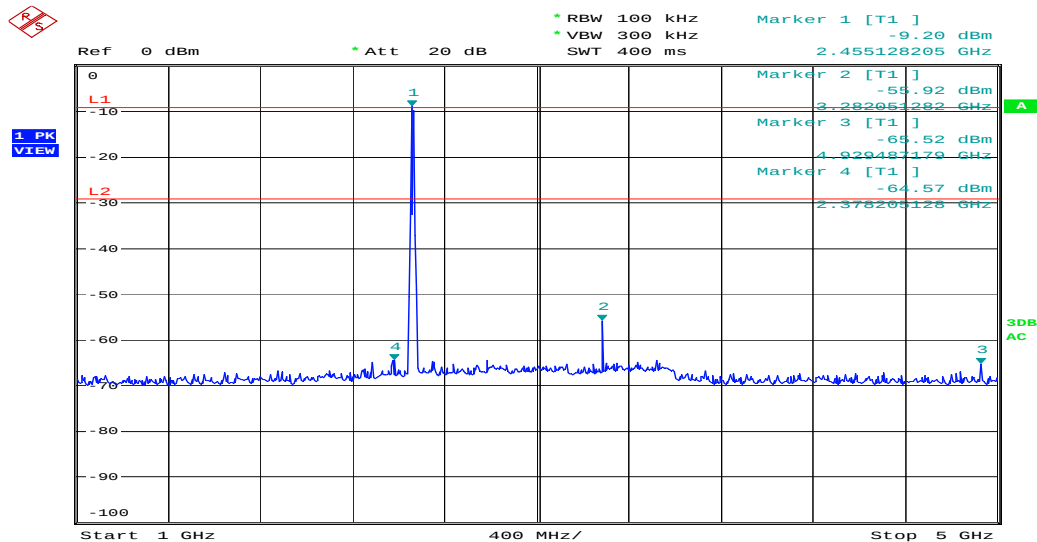


Spurious, 802.11b, higher channel
L1=-9.20dBm, L2=-29.20dBm
Date: 23.NOV.2008 22:14:47

Figure 20: Spurious Emission from 5 to 10GHz, Mode C (2462MHz)

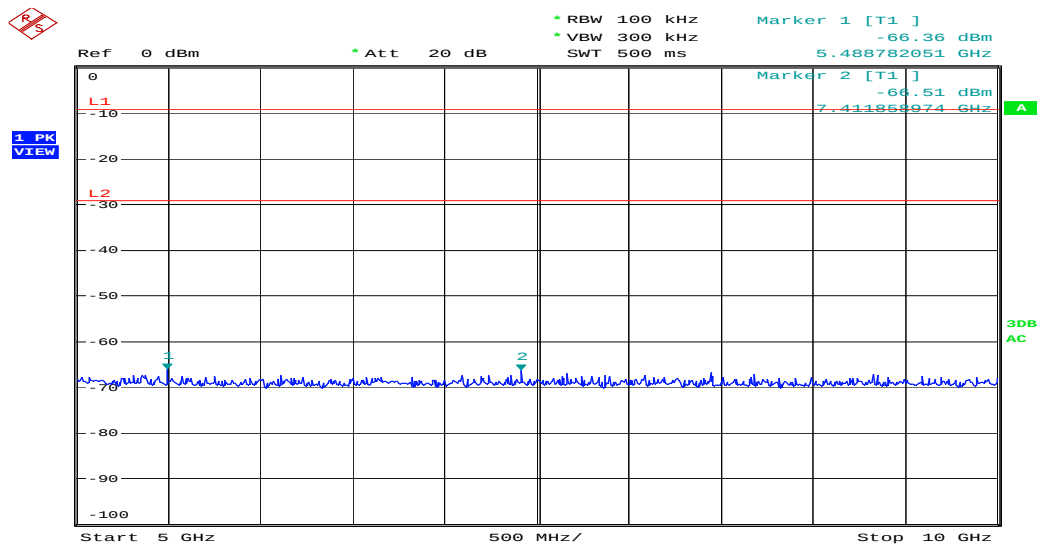


Spurious, 802.11b, higher channel
L1=-9.20dBm, L2=-29.20dBm
Date: 23.NOV.2008 22:17:53

Figure 21: Spurious Emission from 10 to 20GHz, Mode C (2462MHz)

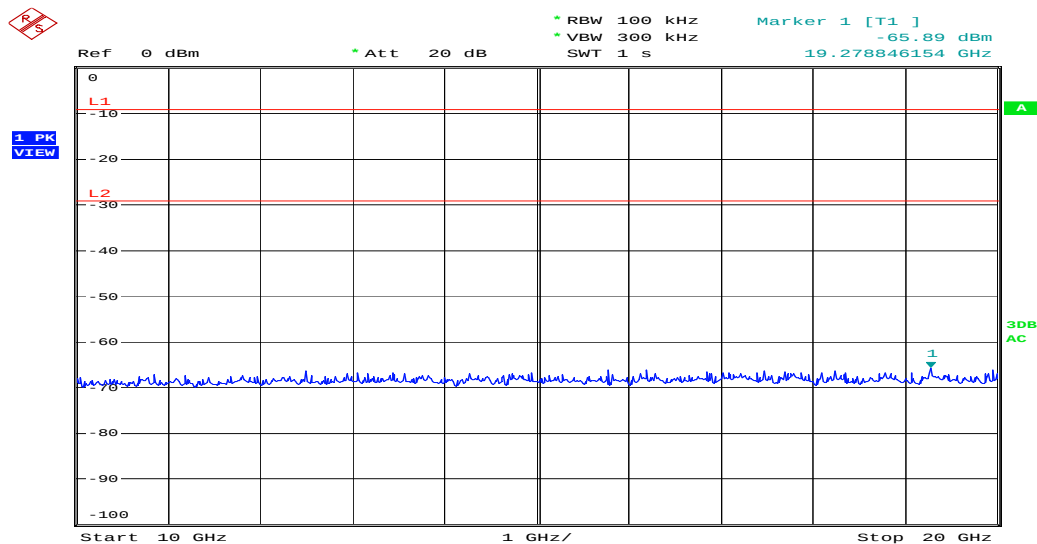

Spurious, 802.11b, higher channel
L1=-9.20dBm, L2=-29.20dBm
Date: 23.NOV.2008 22:18:48

Figure 22: Spurious Emission from 20 to 25GHz, Mode C (2462MHz)

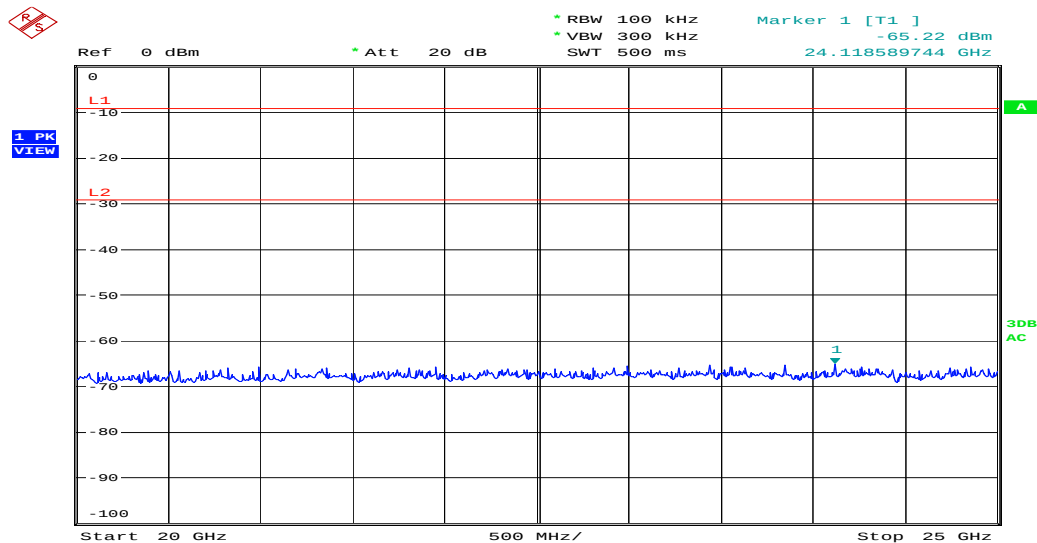


Spurious, 802.11b, higher channel
L1=-9.20dBm, L2=-29.20dBm
Date: 23.NOV.2008 22:19:22

Table 10: Conducted Spurious Emissions, Mode A (2412MHz), 802.11g

Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
894.29	-65.94	0.70	-65.24	-30.79	34.45
2327	-62.69	1.15	-61.54	-30.79	30.75
2417	-11.96	1.17	-10.79	N/A	N/A
2494	-62.93	1.18	-61.75	-30.79	30.96
3218	-45.01	1.50	-43.51	-30.79	12.72
6883	-66.56	2.12	-64.44	-30.79	33.65
15353	-66.22	2.96	-63.26	-30.79	32.47
18526	-66.08	3.17	-62.91	-30.79	32.12
21955	-65.29	3.63	-61.66	-30.79	30.87
24391	-64.57	4.31	-60.26	-30.79	29.47


Notes: Limit = Reading of fundamental + Correction factor – 20dB
Emission level = Reading + Correction factor
Correction factor = Total cable loss

Figure 23: Spurious Emission from 30MHz to 1GHz, Mode A (2412MHz)

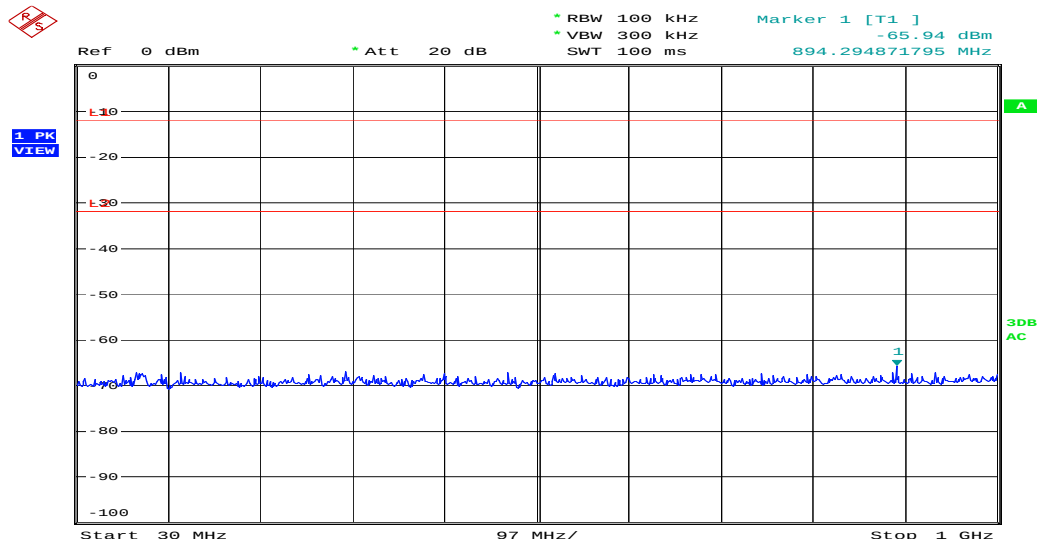


Spurious, 802.11g, lower channel
L1=-11.96dBm, L2=-31.96dBm
Date: 23.NOV.2008 22:41:03

Figure 24: Spurious Emission from 1 to 5GHz, Mode A (2412MHz)

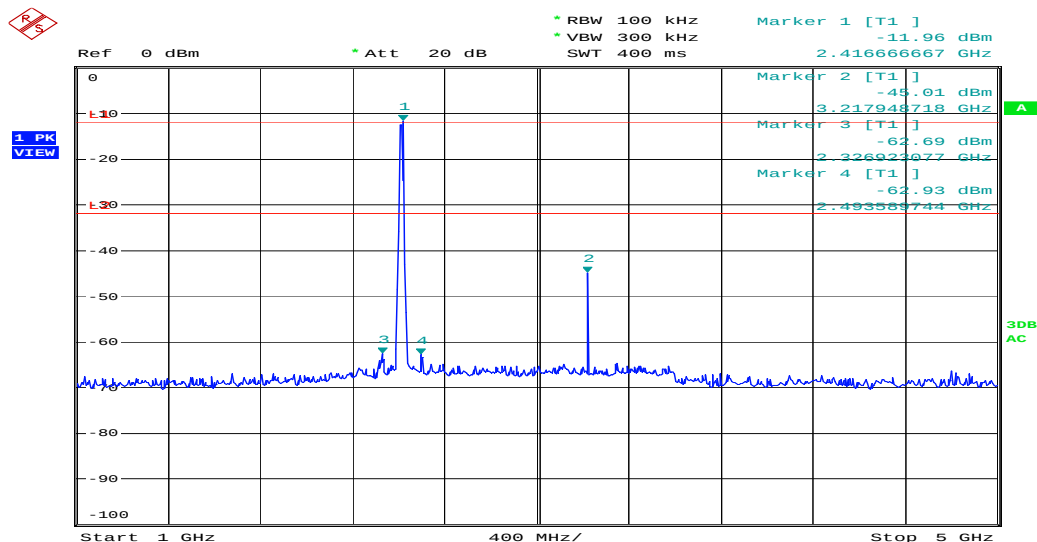


Spurious, 802.11g, lower channel
L1=-11.96dBm, L2=-31.96dBm
Date: 23.NOV.2008 22:40:05

Figure 25: Spurious Emission from 5 to 10GHz, Mode A (2412MHz)

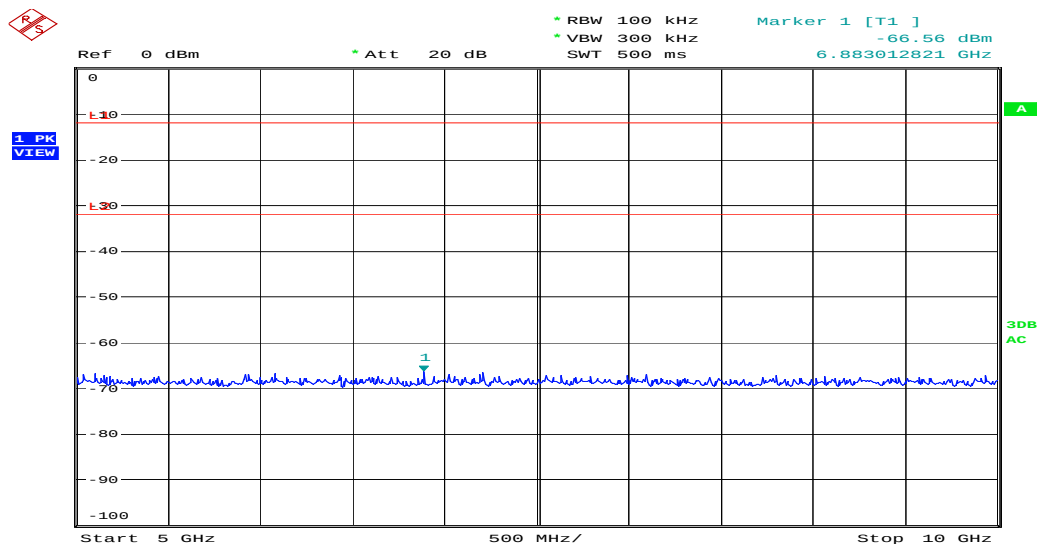


Spurious, 802.11g, lower channel
L1=-11.96dBm, L2=-31.96dBm
Date: 23.NOV.2008 22:42:25

Figure 26: Spurious Emission from 10 to 20GHz, Mode A (2412MHz)

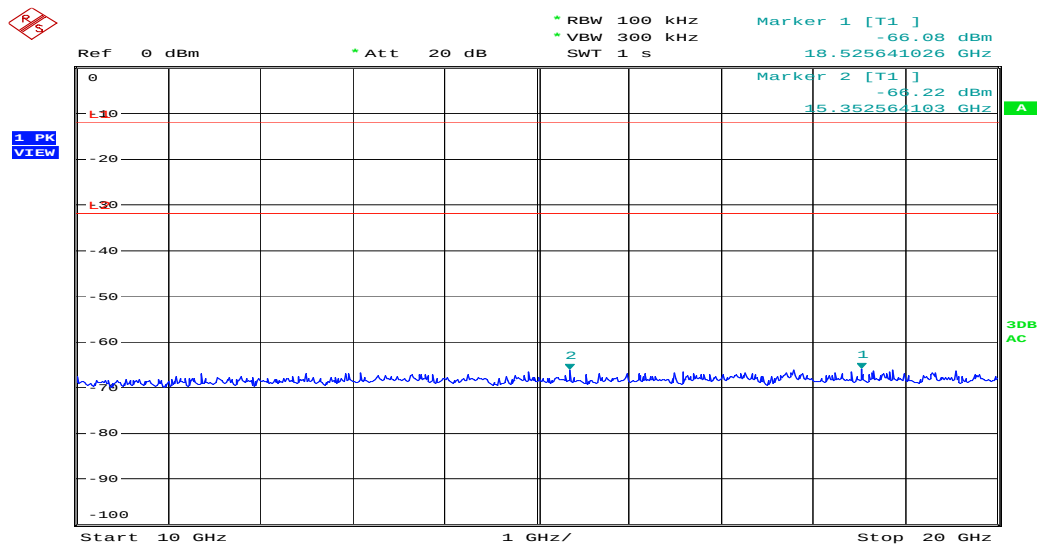

Spurious, 802.11g, lower channel
L1=-11.96dBm, L2=-31.96dBm
Date: 23.NOV.2008 22:43:15

Figure 27: Spurious Emission from 20 to 25GHz, Mode A (2412MHz)

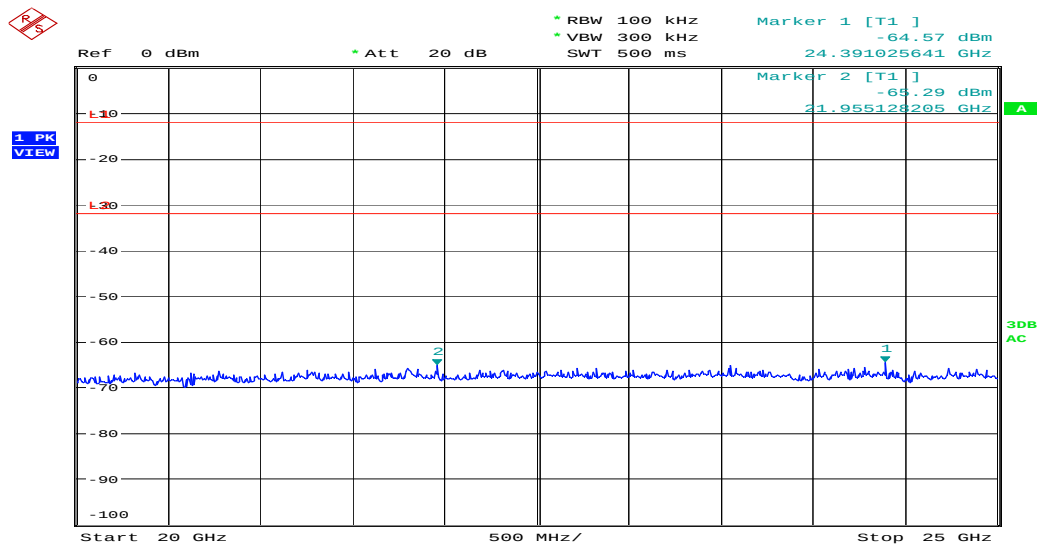


Spurious, 802.11g, lower channel
L1=-11.96dBm, L2=-31.96dBm
Date: 23.NOV.2008 22:44:08

Table 11: Conducted Spurious Emissions, Mode B (2437MHz), 802.11g

Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
951.81	-66.78	0.73	-66.05	-30.59	35.46
2353	-64.05	1.16	-62.89	-30.59	32.30
2436	-11.76	1.17	-10.59	N/A	N/A
2532	-63.37	1.20	-62.17	-30.59	31.58
3250	-46.38	1.50	-44.88	-30.59	14.29
8165	-66.89	2.29	-64.60	-30.59	34.01
11154	-66.52	2.74	-63.78	-30.59	33.19
16346	-66.19	2.91	-63.28	-30.59	32.69
24143	-64.33	3.83	-60.50	-30.59	29.91

Notes: Limit = Reading of fundamental + Correction factor – 20dB
Emission level = Reading + Correction factor
Correction factor = Total cable loss

Figure 28: Spurious Emission from 30MHz to 1GHz, Mode B (2437MHz)

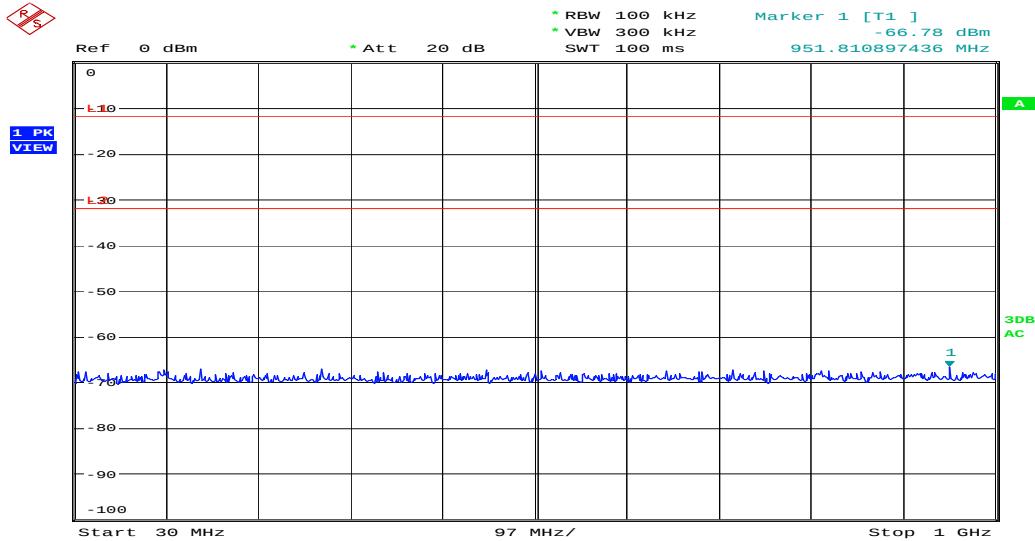


Spurious, 802.11g, middle channel
L1=-11.76dBm, L2=-31.76dBm
Date: 23.NOV.2008 22:32:58

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:


Seite 40 von 76
Page 40 of 76

Figure 29: Spurious Emission from 1 to 5GHz, Mode B (2437MHz)

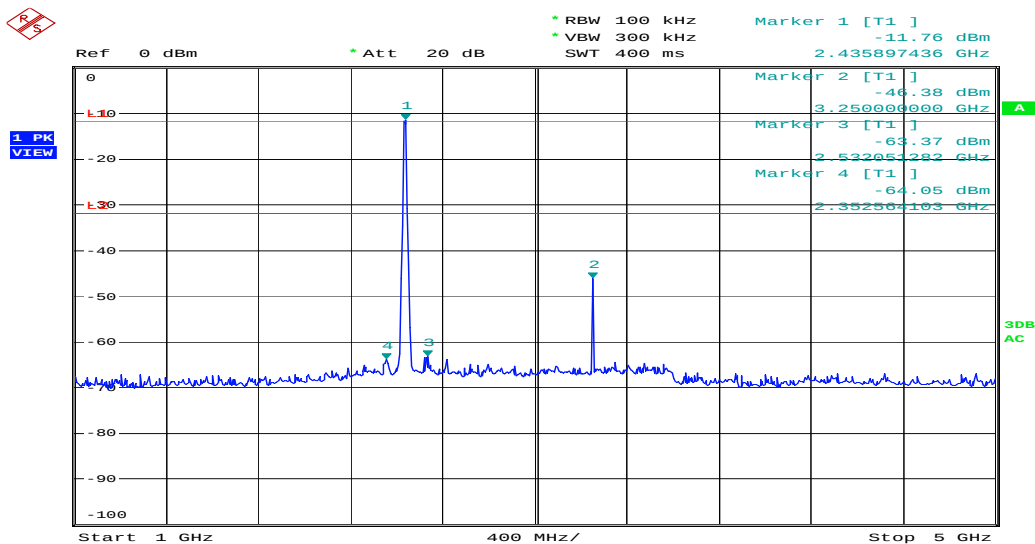


Spurious, 802.11g, middle channel
L1=-11.76dBm, L2=-31.76dBm
Date: 23.NOV.2008 22:31:38

Figure 30: Spurious Emission from 5 to 10GHz, Mode B (2437MHz)

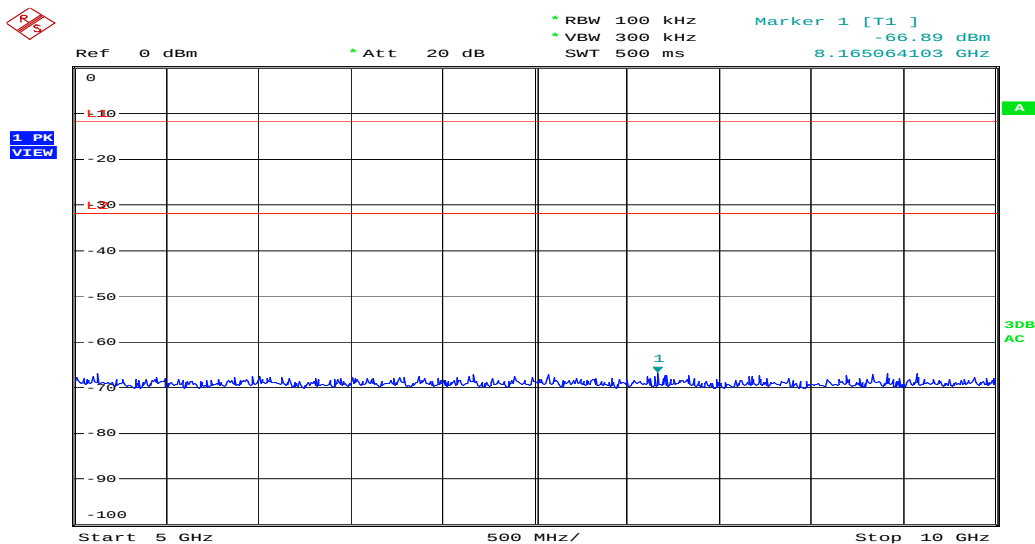


Spurious, 802.11g, middle channel
L1=-11.76dBm, L2=-31.76dBm
Date: 23.NOV.2008 22:33:49

Figure 31: Spurious Emission from 10 to 20GHz, Mode B (2437MHz)

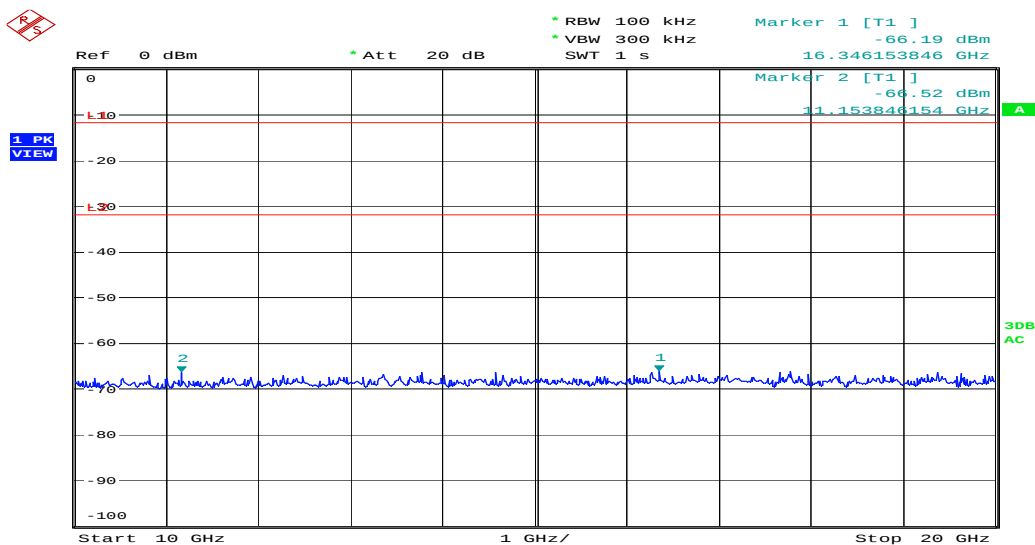

Spurious, 802.11g, middle channel
L1=-11.76dBm, L2=-31.76dBm
Date: 23.NOV.2008 22:35:54

Figure 32: Spurious Emission from 20 to 25GHz, Mode B (2437MHz)

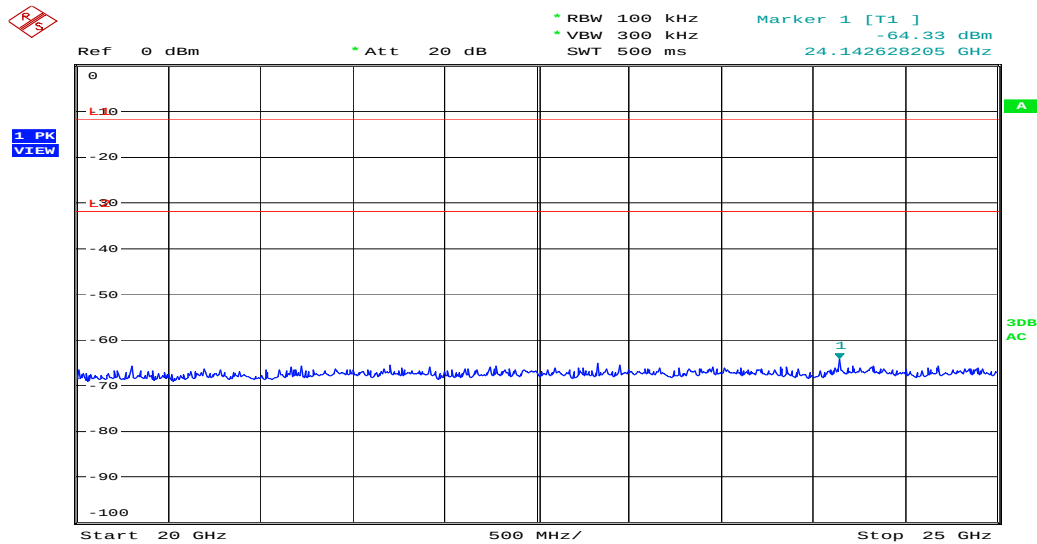


Spurious, 802.11g, middle channel
L1=-11.76dBm, L2=-31.76dBm
Date: 23.NOV.2008 22:36:43

Table 12: Conducted Spurious Emissions, Mode C (2462MHz), 802.11.g

Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Emission Level [dBm]	Limit [dBm]	Margin [dB]
944.04	-67.04	0.73	-66.31	-30.79	35.52
2365	-63.53	1.15	-62.38	-30.79	31.59
2468	-11.97	1.18	-10.79	N/A	N/A
2538	-64.13	1.20	-62.93	-30.79	32.14
3282	-47.39	1.50	-45.89	-30.79	15.10
5256	-66.51	1.77	-64.74	-30.79	33.95
13782	-65.96	2.76	-63.20	-30.79	32.41
20545	-65.88	3.49	-62.39	-30.79	31.60
21811	-65.00	3.66	-61.34	-30.79	30.55


Notes: Limit = Reading of fundamental + Correction factor – 20dB
Emission level = Reading + Correction factor
Correction factor = Total cable loss

Figure 33: Spurious Emission from 30MHz to 1GHz, Mode C (2462MHz)

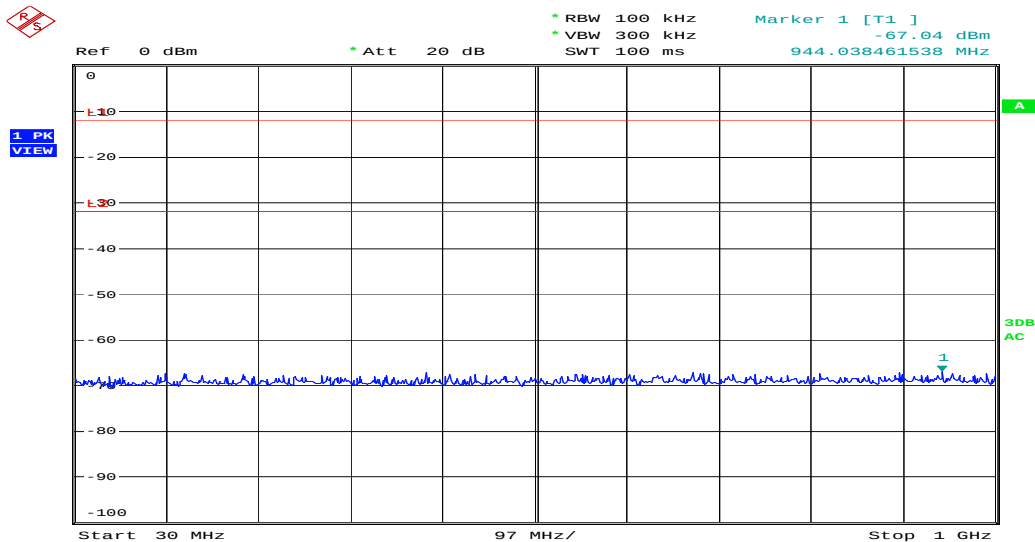


Spurious, 802.11g, higher channel
L1=-11.97dBm, L2=-31.97dBm
Date: 23.NOV.2008 22:25:14

Figure 34: Spurious Emission from 1 to 5GHz, Mode C (2462MHz)

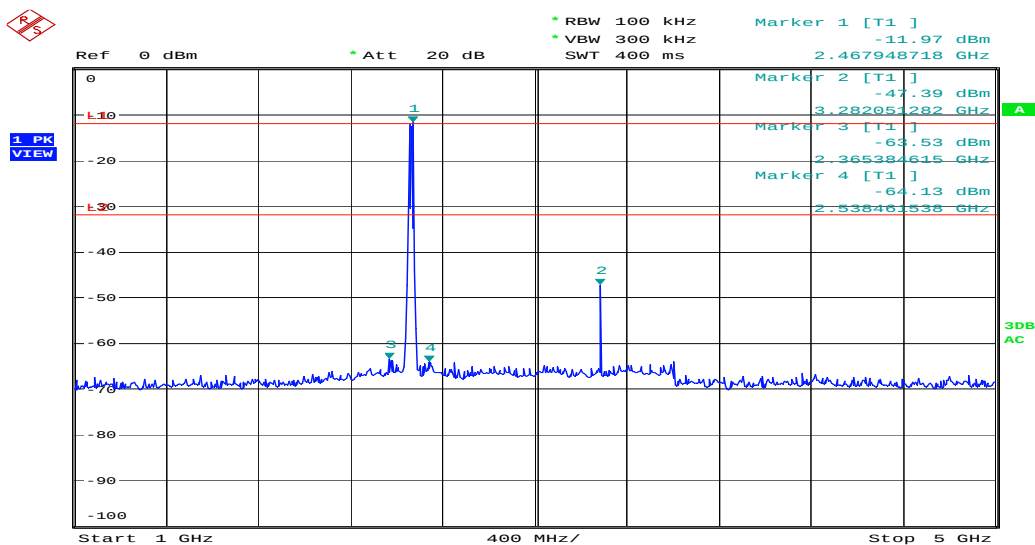


Spurious, 802.11g, higher channel
L1=-11.97dBm, L2=-31.97dBm
Date: 23.NOV.2008 22:23:59

Figure 35: Spurious Emission from 5 to 10GHz, Mode C (2462MHz)

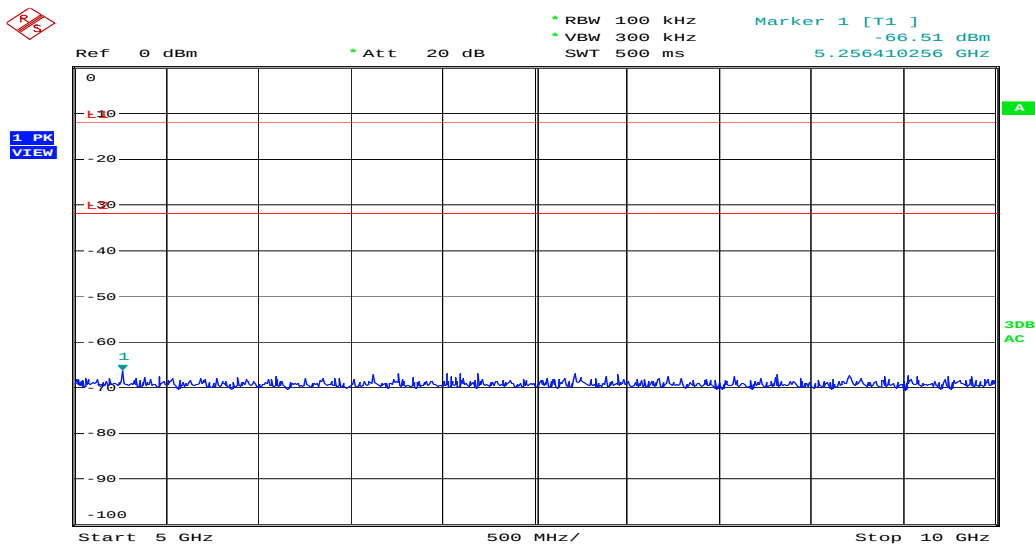

Spurious, 802.11g, higher channel
L1=-11.97dBm, L2=-31.97dBm
Date: 23.NOV.2008 22:25:53

Figure 36: Spurious Emission from 10 to 20GHz, Mode C (2462MHz)

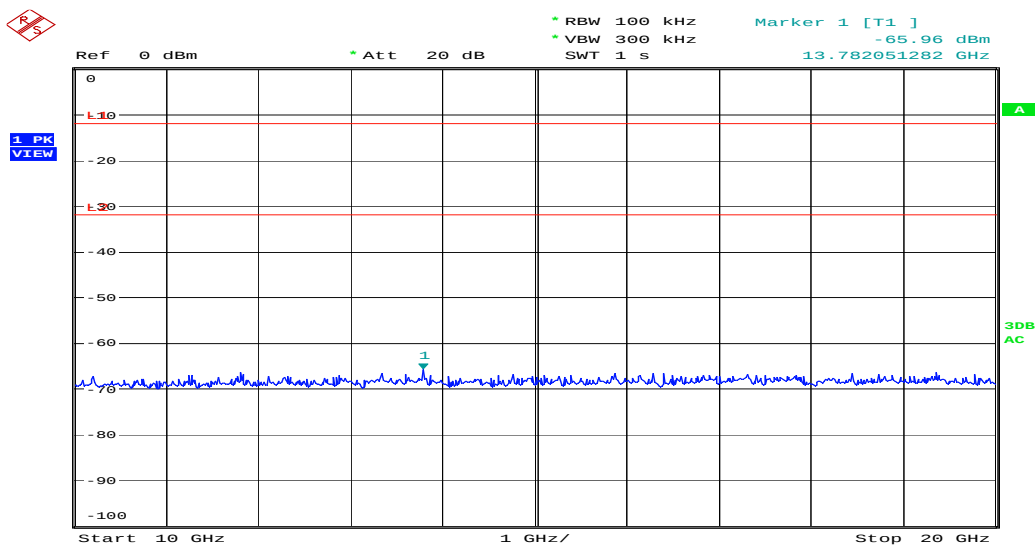


Spurious, 802.11g, higher channel
L1=-11.97dBm, L2=-31.97dBm
Date: 23.NOV.2008 22:26:41

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 45 von 76
Page 45 of 76

Figure 37: Spurious Emission from 20 to 25GHz, Mode C (2462MHz)

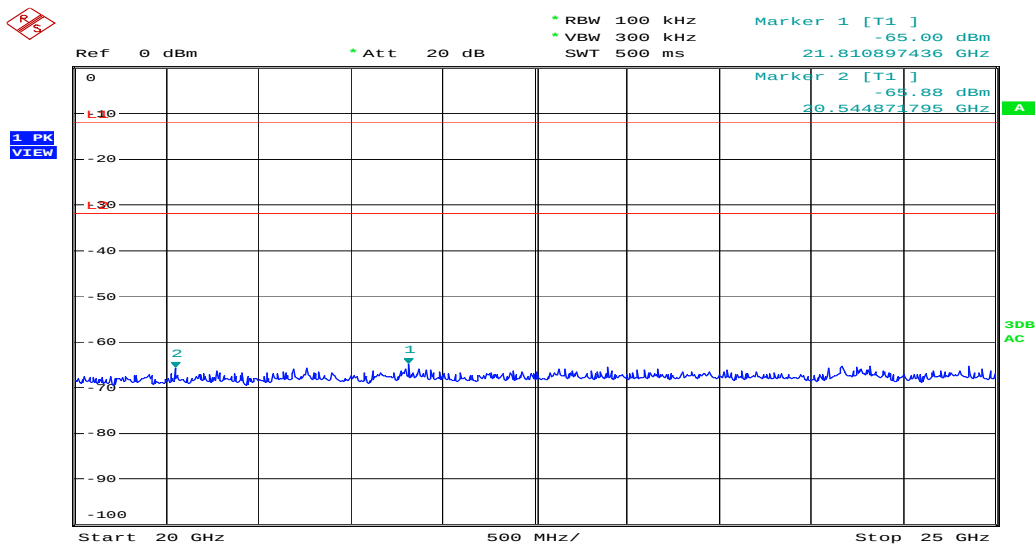

Spurious, 802.11g, higher channel
L1=-11.97dBm, L2=-31.97dBm
Date: 23.NOV.2008 22:27:58

5.1.4 Peak Power Spectral Density, FCC 15.247(e) and RSS-210 A8.2(b)

RESULT:

PASS

Date of testing: 2008-11-23

Ambient temperature: 24°C

Relative humidity: 42%

Atmospheric pressure: 1019hPa

Requirements:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

Test procedure:

RSS-Gen 4.8 and Measurement of Digital Transmission Systems Operating under Section 15.247.

A spectrum analyzer was connected to the antenna port of the transmitter. Analyzer Resolution Bandwidth was set to 3kHz. The Video Bandwidth was set to 10kHz, and the sweep time was set to 500sec.


The final measurement takes into account the loss generated by all the involved cables.

Table 13: Peak Power Spectral Density, 802.11.b

Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Power Density [dBm]	Limit [dBm]	Margin [dB]
2410.45	-20.16	1.17	-18.99	8	26.99
2437.76	-21.45	1.17	-20.28	8	28.28
2462.76	-21.06	1.17	-19.89	8	27.89


Notes: Power density = Reading + Correction factor
Correction factor = Total cable loss

Figure 38: Power Spectral Density, Mode A (2412MHz), 802.11.b

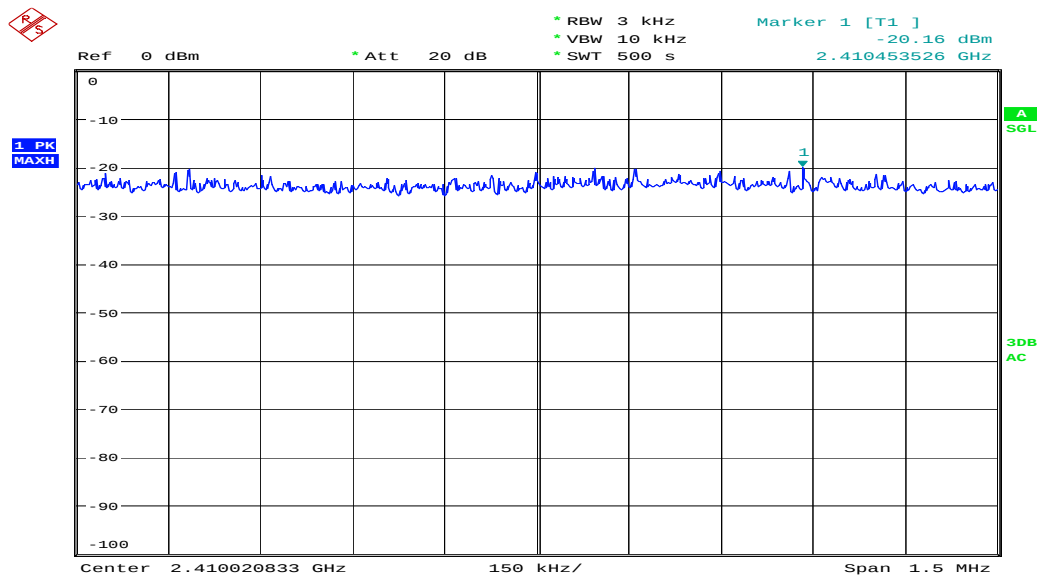

Power spectral density, 802.11b, lower channel
Date: 23.NOV.2008 19:25:02

Figure 39: Power Spectral Density, Mode B (2437MHz), 802.11.b

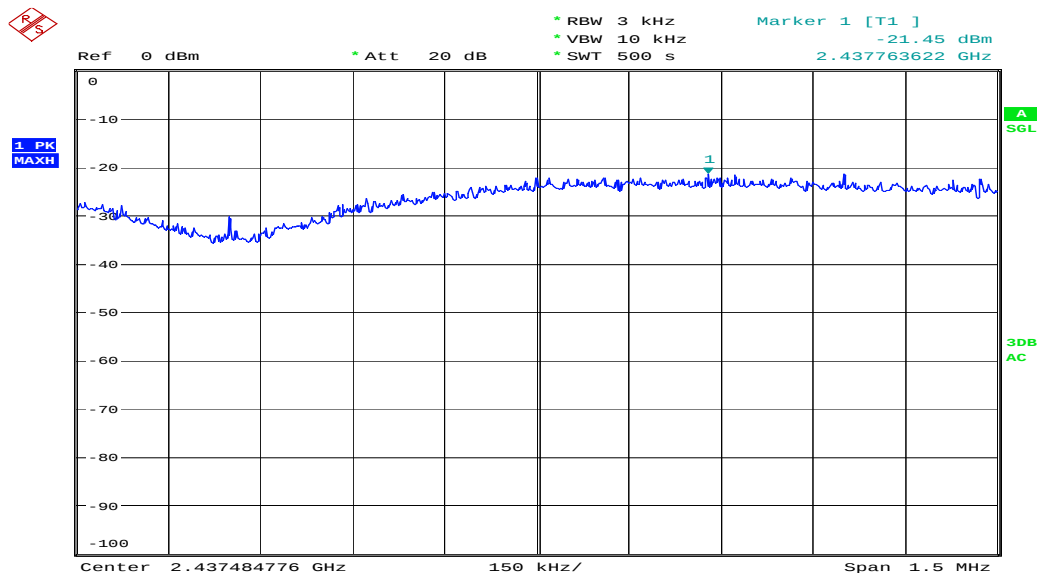


Power spectral density, 802.11b, middle channel
Date: 23.NOV.2008 19:36:52

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 48 von 76
Page 48 of 76

Figure 40: Power Spectral Density, Mode C (2462MHz), 802.11.b

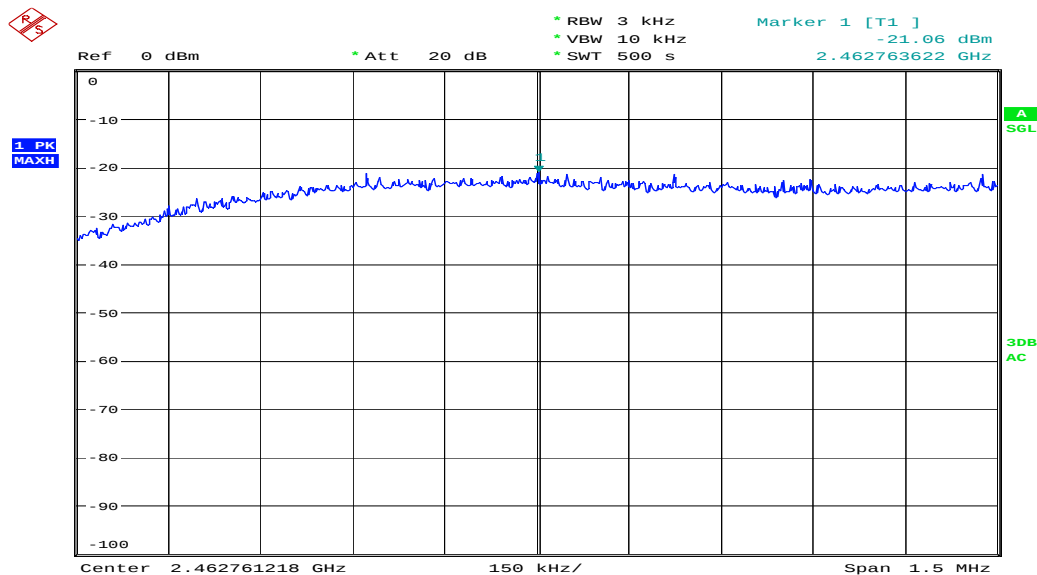


Power spectral density, 802.11b, higher channel
Date: 23.NOV.2008 20:02:57

Table 14: Peak Power Spectral Density, 802.11.g


Frequency [MHz]	Reading [dBm]	Correction Factor [dB]	Power Density [dBm]	Limit [dBm]	Margin [dB]
2418.25	-22.32	1.17	-21.15	8	29.15
2432.59	-22.51	1.17	-21.34	8	29.34
2457.59	-22.47	1.17	-21.30	8	29.30

Figure 41: Power Spectral Density, Mode A (2412MHz), 802.11.g

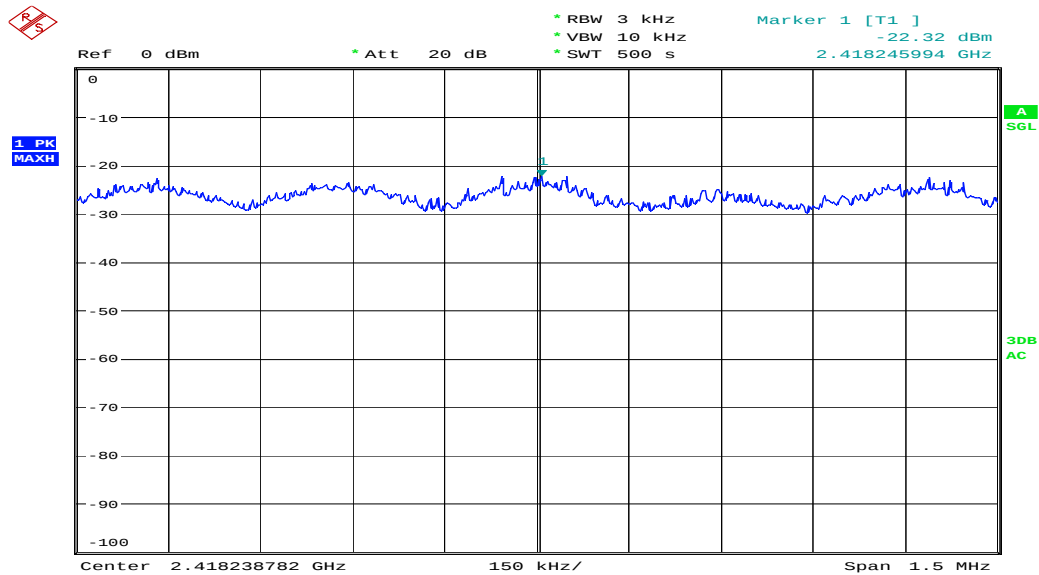

Power spectral density, 802.11g, lower channel
Date: 23.NOV.2008 18:12:07

Figure 42: Power Spectral Density, Mode B (2437MHz), 802.11.g

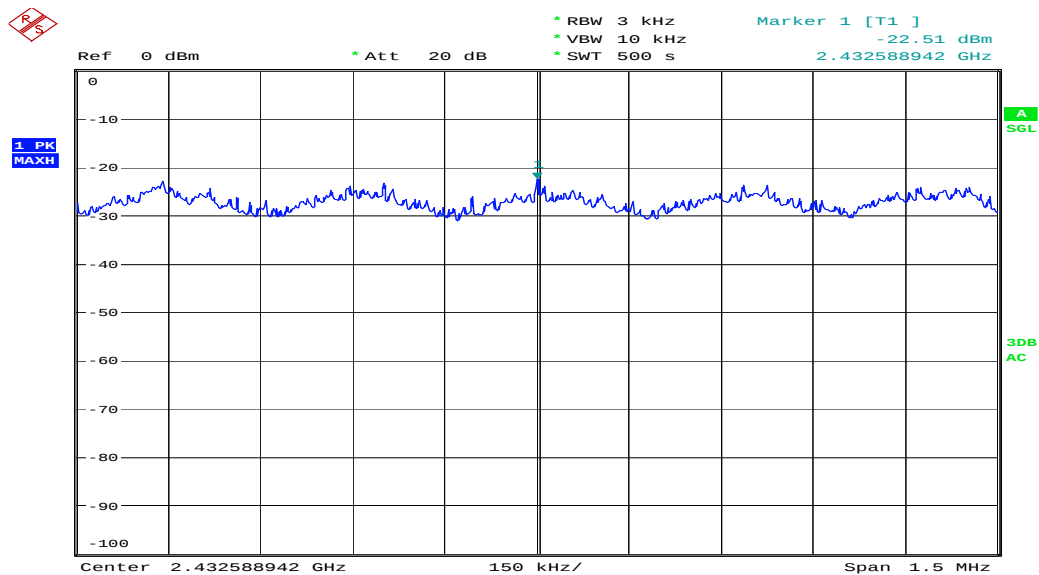


Power spectral density, 802.11g, middle channel
Date: 23.NOV.2008 18:59:42

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 50 von 76
Page 50 of 76

Figure 43: Power Spectral Density, Mode C (2462MHz), 802.11.g

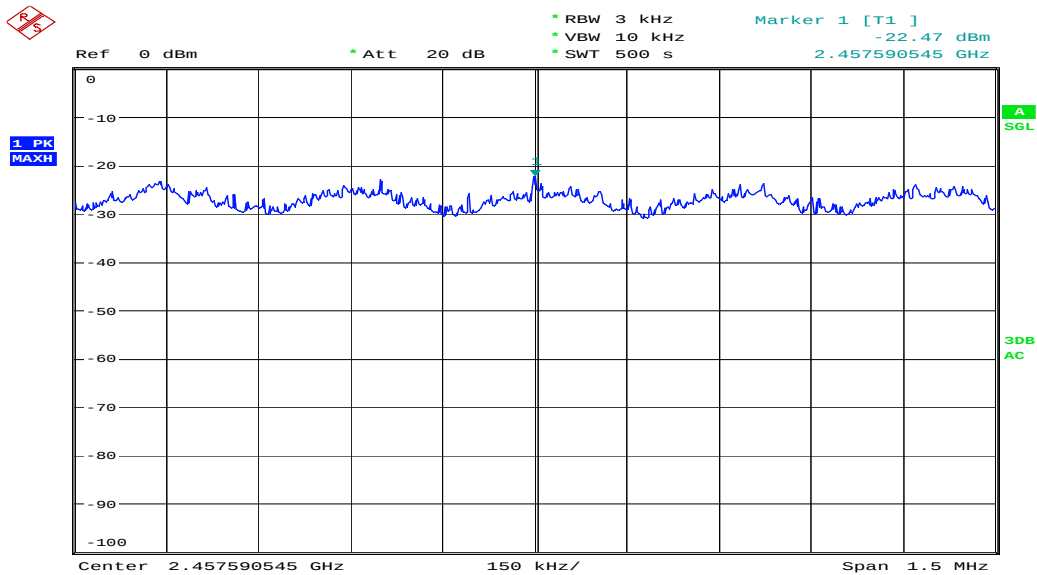

Power spectral density, 802.11g, higher channel
Date: 23.NOV.2008 18:48:07

6. Test Results AC Mains Conducted Emission

6.1 AC Mains Conducted Emission of Transmitter

6.1.1 Mains Terminal Continuous Disturbance Voltage of Transmitter, FCC 15.207 and RSS-Gen 7.2.2

RESULT: **PASS**

Date of testing: 2008-11-27

Ambient temperature: 25°C

Relative humidity: 45%

Atmospheric pressure: 1019hPa

Frequency range: 0.15 – 30MHz

Kind of test site: Shielded Room

Requirements:

The AC power line on any frequency within the band 150 kHz to 30MHz shall not exceed the limits specified in FCC 15.207 and RSS-Gen 7.2.2.

Test procedure:

ANSI C63.4-2003

The EUT was placed on a wooden table raised 80cm above the reference ground plane. A vertical conducting plane of the screened room was located 40cm to the rear of the EUT. The AC adapter of the laptop computer was connected to a Line Impedance Stabilization Network (LISN) / Artificial Mains Network (AMN).

The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude and frequency in order to ensure that maximum emission amplitudes were attained.

The measurements were performed using a CISPR quasi-peak detector and average detector. The 50 ohm output of the EUT LISN was connected to the spectrum analyzer input. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or average mode if applicable). The analyzer's 6 dB bandwidth was set to 9 kHz. No video filter less than 10 times the resolution bandwidth was used. Average measurements were performed in a linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by decreasing the sweep time in order to obtain a calibrated measurement.

Disturbances other than those mentioned are small or not detectable.

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 52 von 76

Page 52 of 76

Table 15: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A, 802.11.b

Freq. [MHz]	Phase	Reading QP [dB(μV)]	Reading AV [dB(μV)]	Factor [dB]	Level QP [dB(μV)]	Level AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
0.170	L1	44.2	42.3	9.6	53.8	51.9	64.9	54.9	11.1	3.0
0.171	N	45.4	43.5	9.6	55.0	53.1	64.9	54.9	9.9	1.8
0.225	N	36.1	35.3	9.6	45.7	44.9	62.6	52.6	16.9	7.7
0.230	L1	40.6	40.0	9.6	50.2	49.6	62.5	52.5	12.3	2.9
0.285	L1	35.8	35.5	9.7	45.5	45.2	60.7	50.7	15.2	5.5
0.287	N	37.1	36.9	9.7	46.8	46.6	60.6	50.6	13.8	4.0
0.459	N	27.3	26.4	9.7	37.0	36.1	56.7	46.7	19.7	10.6
0.575	N	30.6	30.1	9.7	40.3	39.8	56.0	46.0	15.7	6.2
0.629	N	32.9	32.3	9.7	42.6	42.0	56.0	46.0	13.5	4.0
0.631	L1	34.4	33.8	9.7	44.1	43.5	56.0	46.0	11.9	2.5
0.688	L1	29.1	28.6	9.7	38.8	38.3	56.0	46.0	17.2	7.7
4.994	L1	30.9	30.6	9.8	40.7	40.4	56.0	46.0	15.3	5.6

Notes: Level QP = Reading QP + Factor
Level AV = Reading AV + Factor

Table 16: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode C, 802.11.b

Freq. [MHz]	Phase	Reading QP [dB(μV)]	Reading AV [dB(μV)]	Factor [dB]	Level QP [dB(μV)]	Level AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
0.169	L1	43.3	41.4	9.6	52.9	51.0	65.0	55.0	12.1	4.0
0.171	N	45.3	43.4	9.6	54.9	53.0	64.9	54.9	10.0	1.9
0.171	N	45.5	43.6	9.6	55.1	53.2	64.9	54.9	9.8	1.7
0.229	L1	40.7	40.1	9.6	50.3	49.7	62.5	52.5	12.2	2.8
0.230	N	41.3	40.6	9.6	50.9	50.2	62.4	52.4	11.5	2.2
0.287	L1	36.8	36.5	9.7	46.5	46.2	60.6	50.6	14.1	4.4
0.630	L1	34.3	33.8	9.7	44.0	43.5	56.0	46.0	12.0	2.5
0.631	N	34.9	34.3	9.7	44.6	44.0	56.0	46.0	11.4	2.0
0.689	L1	29.8	29.2	9.7	39.5	38.9	56.0	46.0	16.5	7.1
4.990	N	29.8	29.3	9.8	39.6	39.1	56.0	46.0	16.4	6.9
6.257	N	30.8	29.3	9.9	40.7	39.2	60.0	50.0	19.3	10.8

Notes: Level QP = Reading QP + Factor
Level AV = Reading AV + Factor

Table 17: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A, 802.11.g

Freq. [MHz]	Phase	Reading QP [dB(μV)]	Reading AV [dB(μV)]	Factor [dB]	Level QP [dB(μV)]	Level AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
0.151	L1	38.6	13.8	9.6	48.2	23.4	66.0	56.0	17.8	32.6
0.152	N	38.9	13.9	9.6	48.5	23.5	65.9	55.9	17.4	32.4
0.172	L1	45.4	43.5	9.6	55.0	53.1	64.8	54.8	9.8	1.7
0.174	N	44.9	43.0	9.6	54.5	52.6	64.8	54.8	10.3	2.2
0.229	L1	40.9	40.2	9.6	50.5	49.8	62.5	52.5	12.0	2.7
0.287	N	37.4	37.1	9.7	47.1	46.8	60.6	50.6	13.5	3.8
0.287	L1	36.9	36.6	9.7	46.6	46.3	60.6	50.6	14.0	4.3
0.629	N	34.4	33.8	9.7	44.1	43.5	56.0	46.0	11.9	2.5
0.630	L1	34.5	34.0	9.7	44.2	43.7	56.0	46.0	11.8	2.3
0.685	L1	27.4	26.7	9.7	37.1	36.4	56.0	46.0	18.9	9.6
4.989	N	30.2	29.7	9.8	40.0	39.5	56.0	46.0	16.0	6.5
4.991	L1	30.9	30.5	9.8	40.7	40.3	56.0	46.0	15.3	5.7
5.908	L1	32.4	31.6	9.9	42.3	41.5	60.0	50.0	17.7	8.5

Notes: Level QP = Reading QP + Factor
Level AV = Reading AV + Factor

Table 18: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode C, 802.11.g

Freq. [MHz]	Phase	Reading QP [dB(μV)]	Reading AV [dB(μV)]	Factor [dB]	Level QP [dB(μV)]	Level AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
0.168	L1	42.0	39.9	9.6	51.6	49.5	65.0	55.0	13.4	5.5
0.171	N	45.4	43.5	9.6	55.0	53.1	64.9	54.9	9.9	1.8
0.174	L1	44.8	42.9	9.6	54.4	52.5	64.8	54.8	10.4	2.3
0.227	L1	39.8	39.2	9.6	49.4	48.8	62.5	52.5	13.1	3.7
0.285	N	36.8	36.5	9.7	46.5	46.2	60.7	50.7	14.2	4.5
0.287	L1	36.9	36.7	9.7	46.6	46.4	60.6	50.6	14.0	4.2
0.632	L1	34.4	33.8	9.7	44.1	43.5	56.0	46.0	11.9	2.5
0.633	N	34.5	33.9	9.7	44.2	43.6	56.0	46.0	11.8	2.4
4.992	L1	30.7	30.4	9.8	40.5	40.2	56.0	46.0	15.5	5.8
4.992	N	30.0	29.4	9.8	39.8	39.2	56.0	46.0	16.2	6.8
6.368	N	32.5	31.3	10.0	42.5	41.3	60.0	50.0	17.5	8.7
6.424	L1	32.7	31.3	9.9	42.6	41.2	60.0	50.0	17.4	8.8
0.168	L1	42.0	39.9	9.6	51.6	49.5	65.0	55.0	13.4	5.5

Notes: Level QP = Reading QP + Factor
Level AV = Reading AV + Factor

7. Test Results Radiated Emission

7.1 Radiated Emission of Transmitter

7.1.1 Band Edge Radiated Emission, FCC 15.247(d) and RSS- 210 2.2

RESULT: **Pass**

Date of testing: 2008-11-19

Ambient temperature: 24°C

Relative humidity: 62%

Atmospheric pressure: 1009hPa

Measurement distance: 3m

Kind of test site: Semi Anechoic Chamber

Requirements:

Radiated emissions which fall in the restricted bands, as defined in FCC 15.205(a) and RSS-210 2.7 (Table 1), must comply with the radiated emission limits specified in FCC 15.209(a) and RSS-210 2.7 (Table 2 and 3).

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10 and Measurement of Digital Transmission Systems Operating under Section 15.247

Measurements were made in a Semi Anechoic Chamber at a measurement distance of 3m. The EUT was placed on a nonconductive turntable 0.8m above the ground plane. The EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level.

Measurements were taken using both horizontal and vertical antenna polarizations for 3 antenna orientations (X, Y and Z) of the EUT.

Peak (1 MHz RBW/VBW) and average (1 MHz RBW/10 Hz VBW) radiated measurements were taken with a suitable span to encompass the peak of the fundamental.


The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Table 19: Band Edge Radiated Emission, 802.11.b

Operating Frequency [MHz]	EUT / Antenna Orient.	Peak Value [dBuV/m]	Average Value [dBuV/m]	Peak Limit [dBuV/m]	Average Limit [dBuV/m]	Peak Margin [dB]	Average Margin [dB]
2412	X / H	47.10	35.56	74	54	26.9	18.44
2462	X / H	47.08	34.67	74	54	26.92	19.33

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBuV/m is calculated as follows: Average limit = 20 x log(500uV/m).
Peak limit in dBuV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 44: Band Edge Radiated Emission, Mode A (2412MHz), Peak and Average

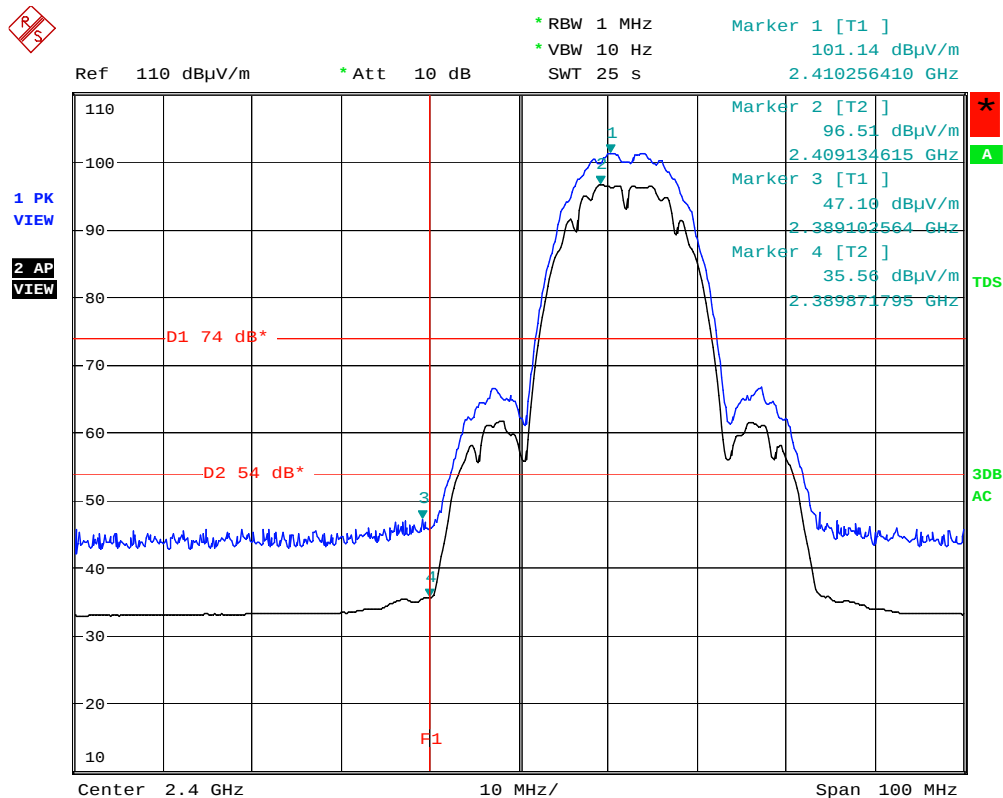

Band edge, mode AD, antenna H, EUT orientation X
Date: 19.NOV.2008 22:09:48

Note: The upper trace shows the peak value and the lower trace shows the average value.

Produkte
Products


Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 56 von 76

Page 56 of 76

Figure 45: Band Edge Radiated Emission, Mode C (2462MHz), Peak and Average

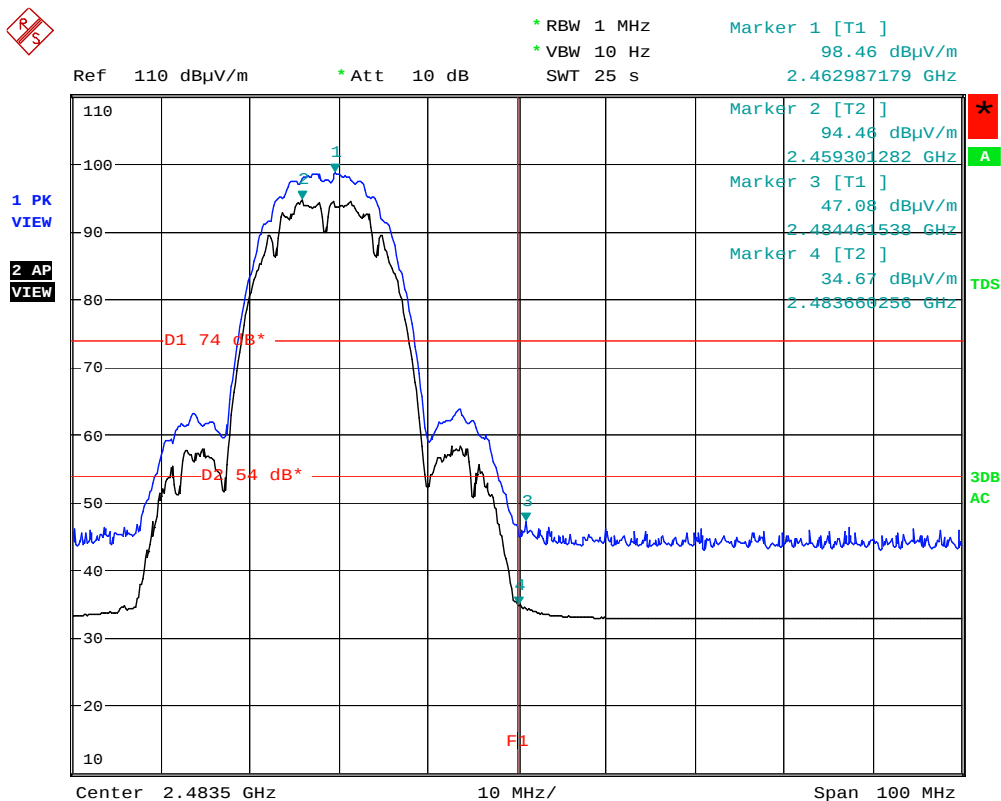

Band edge, mode CD, antenna H, EUT orientation X

Date: 19.NOV.2008 22:03:26


Note: The upper trace shows the peak value and the lower trace shows the average value.

Table 20: Band Edge Radiated Emission, 802.11.g

Operating Frequency [MHz]	EUT / Antenna Orient.	Peak Value [dBuV/m]	Average Value [dBuV/m]	Peak Limit [dBuV/m]	Average Limit [dBuV/m]	Peak Margin [dB]	Average Margin [dB]
2412	X / H	65.64	46.94	74	54	8.36	7.06
2462	X / H	65.77	45.03	74	54	8.23	8.97

Notes: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.
Average limit in dBuV/m is calculated as follows: Average limit = 20 x log(500uV/m).
Peak limit in dBuV/m is calculated as follows: Peak limit = Average limit + 20dB.

Figure 46: Band Edge Radiated Emission, Mode A (2412MHz), Peak and Average

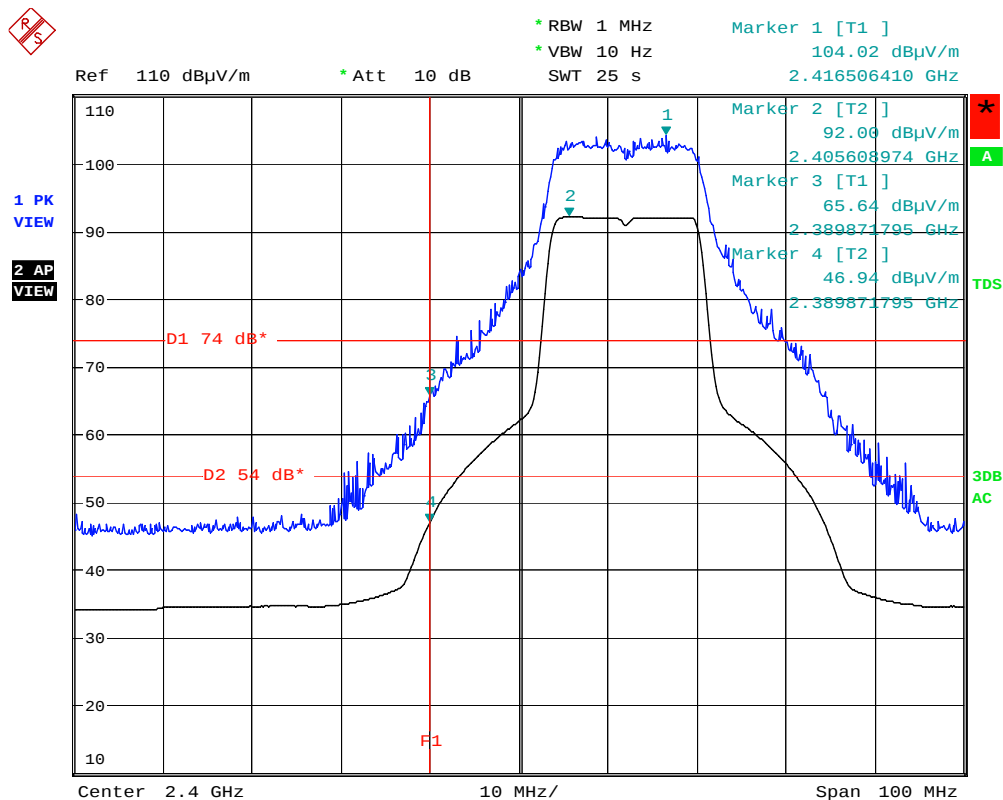

Band edge, mode CE, antenna H, EUT orientation X
Date: 19.NOV.2008 23:15:58


Note: The upper trace shows the peak value and the lower trace shows the average value.

Produkte
Products

Prüfbericht - Nr.: 12307454 001
Test Report No.:

Seite 58 von 76
Page 58 of 76

Figure 47: Band Edge Radiated Emission, Mode C (2462MHz), Peak and Average

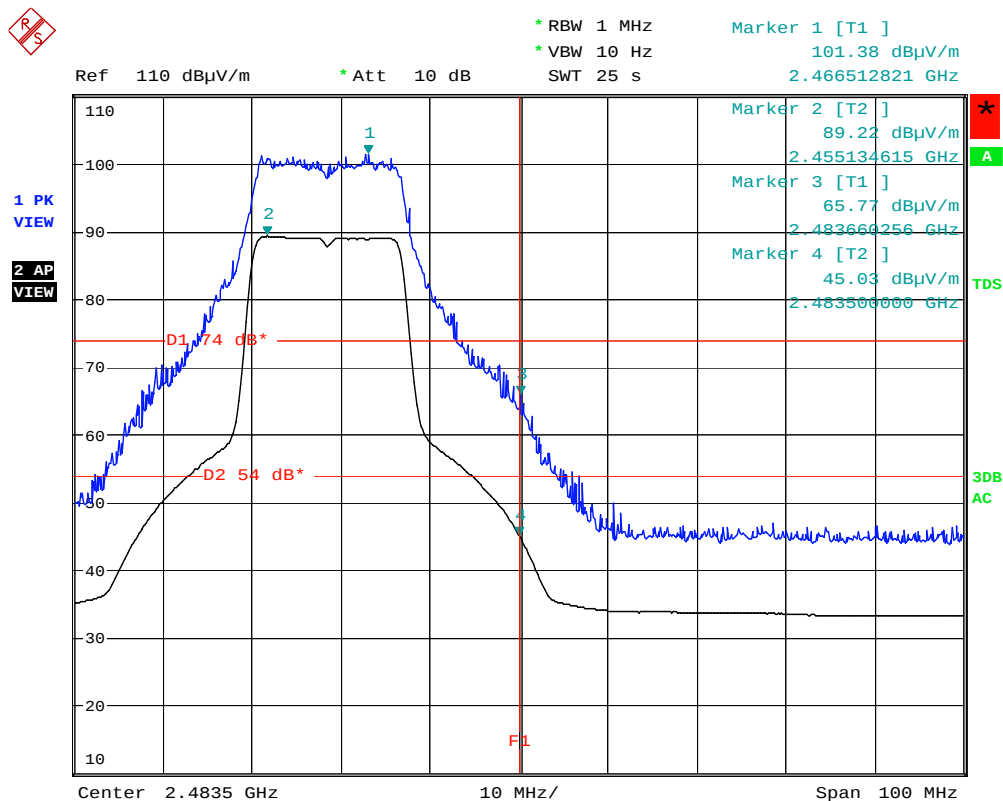

Band edge, mode CE, antenna H, EUT orientation X
Date: 19.NOV.2008 23:08:26

Note: The upper trace shows the peak value and the lower trace shows the average value.

7.1.2 Radiated Emission, Out-of-Band and Spurious Emission, FCC 15.247(d), FCC 15.205, FCC 15.209, RSS-210 2.2, RSS-210 A8.5 and RSS-Gen 7.2.1

RESULT:

PASS

Date of testing:	2008-11-10 2008-11-11	2008-11-20 2008-11-28	2008-11-29
Ambient temperature:	22°C 22°C	24°C 23°C	
Relative humidity:	33% 33%	23% 41%	
Atmospheric pressure:	1016hPa 1022hPa	1009hPa 1002hPa	1002hPa
Frequency range:	9kHz – 25GHz		
Measurement distance:	3m		
Kind of test site:	Semi Anechoic Chamber		

Requirements:

The emissions from the intentional radiator shall not exceed the field strength specified in FCC 15.209(a) and RSS-210 2.7.

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10 and Measurement of Digital Transmission Systems Operating under Section 15.247

Before final measurements of radiated emissions were made in Semi Anechoic Chamber, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the antenna orientation (X, Y, Z) of the EUT were varied in order to ensure that maximum emission amplitudes were attained.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Final radiated emission measurements were made at 3m. The spectrum was examined from 30 MHz to the 10th harmonic of the highest fundamental transmitter frequency (25 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, emissions were measured using following settings: Peak: RBW=1MHz, VBW=1MHz, Average: RBW=1MHz, VBW=10Hz.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 60 von 76

Page 60 of 76

Table 21: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode A, 802.11.b

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
41.89	Z / V	58.6	-23.4	35.2	40.0	4.8	100	94
75.40	Z / V	59.6	-26.2	33.4	40.0	6.6	174	294
259.73	Z / H	59.6	-22.9	36.7	46.0	9.3	111	140
293.24	Z / V	50.3	-21.3	29.0	46.0	17.0	174	164
319.52	Z / V	62.0	-20.5	41.5	46.0	4.5	127	160
347.89	Z / H	62.9	-19.9	43.0	46.0	3.0	180	159
522.87	Z / V	55.7	-15.2	40.5	46.0	5.5	100	167
695.82	Z / H	54.8	-12.6	42.2	46.0	3.8	100	210
811.79	Z / V	56.3	-11.4	44.9	46.0	1.1*	102	165
811.79	Z / H	55.1	-11.5	43.6	46.0	2.4	274	207

Note: Level QP = Reading QP + Factor

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

Table 22: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode B, 802.11.b

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
41.91	X / V	58.6	-23.4	35.2	40.0	4.8	100	98
75.41	X / V	59.6	-26.2	33.4	40.0	6.6	163	292
87.69	X / V	49.9	-27.8	22.1	40.0	17.9	110	253
343.83	X / H	49	-20.1	28.9	46.0	17.1	100	219
519.44	X / H	38	-15.3	22.7	46.0	23.3	170	8
552.95	X / H	37.3	-14.4	22.9	46.0	23.1	251	260
576.08	X / H	42.9	-14	28.9	46.0	17.1	138	276
695.47	X / H	38.9	-12.7	26.2	46.0	19.8	124	226
816.02	X / V	47.5	-11.3	36.2	46.0	9.8	161	201

Note: Level QP = Reading QP + Factor

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 61 von 76

Page 61 of 76

Table 23: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode C, 802.11.b

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
36.17	Z / V	56.0	-24.0	32.0	40.0	8.0	100	221
41.89	Z / V	58.7	-23.4	35.3	40.0	4.7	101	102
75.40	Z / V	59.6	-26.2	33.4	40.0	6.6	173	295
343.85	Z / H	49.2	-20.1	29.1	46.0	16.9	100	314
519.48	Z / H	40.5	-15.3	25.2	46.0	20.8	142	285
553.00	Z / H	41.2	-14.4	26.8	46.0	19.2	202	266
611.64	Z / H	44.5	-13.5	31.0	46.0	15.0	147	333
695.46	Z / H	38.9	-12.7	26.2	46.0	19.8	255	137
816.15	Z / V	44.5	-11.3	33.2	46.0	12.8	125	163

Note: Level QP = Reading QP + Factor

Table 24: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode A, 802.11.b

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1159.68	Z / H	59.1	64.5	-16.3	42.8	48.2	54.0 / 74.0	11.2	25.8	100	204
1219.97	Z / H	60.8	65.0	-16.1	44.7	48.9	54.0 / 74.0	9.3	25.1	106	212
1457.53	Z / H	45.6	56.7	-15.2	30.4	41.6	54.0 / 74.0	23.6	32.4	101	185
2499.13	Z / V	50.3	58.9	-13.4	36.9	45.5	54.0 / 74.0	17.1	28.5	123	162
3216.00	Z / V	57.0	60.8	-11.7	45.3	49.1	54.0 / 74.0	8.7	24.9	114	73
14030.92	X / V	37.0	51.2	-6.7	30.3	44.5	54.0 / 74.0	23.7	29.5	175	13

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Table 25: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode B, 802.11.b

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1093.49	Z / V	58.0	64.0	-16.6	41.4	47.4	54.0 / 74.0	12.6	26.6	103	212
1219.98	Z / H	62.4	67.1	-16.1	46.3	51.0	54.0 / 74.0	7.7	23.0	101	212
1394.27	Z / H	44.8	56.4	-15.4	29.4	41.0	54.0 / 74.0	24.6	33.0	102	183
3249.32	Z / V	53.6	57.8	-11.6	42.0	46.2	54.0 / 74.0	12.0	27.8	106	75
16271.05	X / V	37.1	51.0	-6.6	30.5	44.4	54.0 / 74.0	23.5	29.6	106	52
20086.76	X / H	36.7	51.0	-12.0	24.7	38.9	54.0 / 74.0	29.3	35.1	135	142

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 62 von 76

Page 62 of 76

Table 26: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode C, 802.11.b

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1056.06	Y / V	55.0	62.3	-16.8	38.2	45.5	54.0 / 74.0	15.8	28.5	137	302
1161.88	Y / H	59.1	64.7	-16.3	42.8	48.4	54.0 / 74.0	11.2	25.6	104	208
1219.96	Y / H	62.0	66.4	-16.1	45.9	50.3	54.0 / 74.0	8.1	23.7	102	211
1229.26	Y / H	51.1	61.5	-16.1	35.0	45.5	54.0 / 74.0	19.0	28.5	130	199
3282.62	Y / H	54.5	58.4	-11.6	42.9	46.8	54.0 / 74.0	11.1	27.2	118	167
12169.38	X / V	35.9	50.9	-7.0	28.9	43.9	54.0 / 74.0	25.1	30.1	135	52

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 63 von 76

Page 63 of 76

Table 27: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode A, 802.11.g

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
41.88	X / V	58.2	-23.4	34.8	40.0	5.2	100	94
75.39	X / V	59.0	-26.2	32.8	40.0	7.2	180	290
242.98	X / H	61.4	-23.7	37.7	46.0	8.3	131	130
293.25	X / V	51.5	-21.3	30.2	46.0	15.8	167	163
319.54	X / V	61.5	-20.5	41.0	46.0	5.0	132	162
347.91	X / H	63.3	-19.9	43.4	46.0	2.6*	182	157
377.61	X / V	59.2	-18.9	40.3	46.0	5.7	130	211
522.86	X / V	55.4	-15.2	40.2	46.0	5.8	100	167
695.81	X / H	54.9	-12.6	42.3	46.0	3.7*	101	211
811.79	X / V	56.3	-11.4	44.9	46.0	1.1*	100	163

Note: Level QP = Reading QP + Factor

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

Table 28: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode B, 802.11.g

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
41.89	X / V	58.0	-23.4	34.6	40.0	5.4	100	95
75.41	X / V	59.1	-26.2	32.9	40.0	7.1	174	285
259.72	X / H	59.2	-22.9	36.3	46.0	9.7	111	142
293.23	X / H	58.3	-21.4	36.9	46.0	9.1	113	70
319.52	X / V	62.0	-20.5	41.5	46.0	4.5	128	162
347.91	X / H	63.2	-19.9	43.3	46.0	2.7*	181	160
522.85	X / V	55.9	-15.2	40.7	46.0	5.3	100	166
623.99	X / H	56.7	-13.4	43.3	46.0	2.7*	143	262
695.83	X / H	54.6	-12.6	42.0	46.0	4.0*	100	211
811.79	X / V	56.1	-11.4	44.7	46.0	1.3*	100	163

Note: Level QP = Reading QP + Factor

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

Table 29: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode C, 802.11.g

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
41.90	X / V	58.4	-23.4	35.0	40.0	5.0	101	93
75.39	X / V	59.4	-26.2	33.2	40.0	6.8	174	283
343.83	X / H	48.0	-20.1	27.9	46.0	18.1	100	225
524.91	X / V	35.8	-15.2	20.6	46.0	25.4	115	351
552.09	X / H	33.7	-14.4	19.3	46.0	26.7	160	234
576.07	X / H	37.6	-14.0	23.6	46.0	22.4	236	244
699.74	X / H	36.6	-12.6	24.0	46.0	22.0	110	205
815.98	X / V	48.4	-11.3	37.1	46.0	8.9	104	359

Note: Level QP = Reading QP + Factor

Table 30: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode A, 802.11.g

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1093.47	Y / V	59.2	64.9	-16.6	42.6	48.3	54.0 / 74.0	11.4	25.7	100	212
1159.66	Y / H	59.1	64.6	-16.3	42.8	48.3	54.0 / 74.0	11.2	25.7	101	205
1219.97	Y / H	62.0	66.4	-16.1	45.9	50.3	54.0 / 74.0	8.1	23.7	102	211
2493.21	Y / H	49.6	62.0	-13.4	36.2	48.6	54.0 / 74.0	17.8	25.4	106	204
3215.96	Y / H	67.5	68.8	-11.7	55.8	57.1	72.0 / 84.0	16.2**	26.9	141	168
11074.10	Y / V	35.2	49.6	-7.4	27.8	42.2	54.0 / 74.0	26.2	11.8	127	128
13064.26	Y / H	37.3	51.0	-7.5	29.8	43.5	54.0 / 74.0	24.2	10.5	173	23

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

**Since 3215.96MHz is not the restricted bands of operation according to Section 15.205 and it is 36.2dB below the carrier frequency 2412MHz (Level AV is 92.0 dBuV/m), it is considered to pass.

Table 31: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode B, 802.11.g

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1093.48	Y / V	52.3	60.6	-16.6	35.7	44.0	54.0 / 74.0	18.3	30.0	101	204
1219.97	Y / H	62.1	67.0	-16.1	46.0	50.9	54.0 / 74.0	8.0	23.1	102	211
3249.30	Y / H	64.7	66.2	-11.6	53.1	54.6	54.0 / 74.0	0.9*	19.4	124	166
13939.90	Y / V	36.9	51.1	-6.5	30.4	44.6	54.0 / 74.0	23.6	29.4	189	308
25294.14	Z / H	40.0	54.7	-14.3	25.7	40.4	54.0 / 74.0	28.3	33.6	168	190

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

Produkte
Products

Prüfbericht - Nr.: 12307454 001

Seite 65 von 76

Test Report No.:

Page 65 of 76

Table 32: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode C, 802.11.g

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1093.48	Y / H	58.4	64.6	-16.6	41.8	48.0	54.0 / 74.0	12.2	26.0	123	223
1219.96	Y / H	62.2	66.3	-16.1	46.1	50.2	54.0 / 74.0	7.9	23.8	102	213
3282.61	Y / H	63.2	65.3	-11.6	51.6	53.7	54.0 / 74.0	2.4*	20.3	122	167
14164.22	Y / H	37.8	52.3	-7.2	30.6	45.1	54.0 / 74.0	23.4	28.9	119	311

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.

7.2 Radiated Emission of Receiver

7.2.1 Radiated Emission of Receiver, FCC 15.109, RSS-210 2.2, RSS-210 2.6, RSS-210 A8.5, RSS-Gen 7.2.3.2

RESULT:

PASS

Date of testing:	2008-11-11	2008-11-20	2008-11-29
Ambient temperature:	22°C	24°C	23°C
Relative humidity:	33%	23%	41%
Atmospheric pressure:	1022 hPa	1009hPa	1002hPa
Frequency range:	30MHz – 25GHz		
Equipment classification:	Class B		
Measurement distance:	3m		
Kind of test site:	Semi Anechoic Chamber		

Requirements:

The emissions from the unintentional radiator shall not exceed the field strength specified in 15.109(a) and RSS-210 Table 2 (and RSS-Gen Table 1).

Test procedure:

ANSI C63.4-2003, RSS-Gen 4.9, 4.10

Before final measurements of radiated emissions were made in Semi Anechoic Chamber, the EUT was scanned to determine its emission spectrum profile. The physical arrangement of the test system, the associated cabling and the antenna orientation (X, Y, Z) of the EUT were varied in order to ensure that maximum emission amplitudes were attained.

The EUT was placed on a nonconductive turntable 0.8m above the ground plane. Final radiated emission measurements were made at 3m. The spectrum was examined from 30 MHz to the 10th harmonic of the highest fundamental transmitter frequency (25 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations.

For frequencies between 30MHz and 1GHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1GHz, emissions were measured using following settings: Peak: RBW=1MHz, VBW=1MHz, Average: RBW=1MHz, VBW=10Hz.

The highest emission amplitudes relative to the appropriate limit were recorded in this report. Emissions other than those mentioned are small or not detectable.

Prüfbericht - Nr.: 12307454 001

Test Report No.:

Seite 67 von 76

Page 67 of 76

Table 33: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode F and G, 802.11.b/g

Freq. [MHz]	EUT / Antenna Orientation	Reading QP [dB(μV)]	Factor [dB(1/m)]	Level QP [dB(μV/m)]	Limit [dB(μV/m)]	Margin QP [dB]	Height [cm]	Angle [°]
36.19	Y / V	58.0	-24.0	34.0	40.0	6.0	102	248
42.18	Y / V	56.8	-23.3	33.5	40.0	6.5	102	101
42.23	Y / V	60.0	-23.3	36.7	40.0	3.3*	101	93
67.01	Y / V	47.9	-24.8	23.1	40.0	16.9	102	294
75.39	Y / V	58.5	-26.2	32.3	40.0	7.7	100	276
343.52	Y / H	59.3	-20.1	39.2	46.0	6.8	101	117
480.04	Y / H	58.1	-16.1	42.0	46.0	4.0	101	30
576.04	Y / H	42.6	-14.0	28.6	46.0	17.4	141	95
816.04	Y / V	48.8	-11.3	37.5	46.0	8.5	119	77

Note: Level QP = Reading QP + Factor

Uncertainty

(*) The measured result is below the specification limit by a margin less than the measurement uncertainty; it is not therefore possible to determine compliance at a level of confidence of 95%. However, the measured result indicates a higher probability that the product tested complies with the specification limit.


Table 34: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode F and G, 802.11.b/g

Freq. [MHz]	EUT / Antenna P	Reading AV [dB(μV)]	Reading PK [dB(μV)]	Factor [dB(1/m)]	Level AV [dB(μV/m)]	Level PK [dB(μV/m)]	Limit AV / PK [dB(μV/m)]	Margin AV [dB]	Margin PK [dB]	Height [cm]	Angle [°]
1093.49	X / H	57.5	63.6	-16.6	40.9	47.0	54.0 / 74.0	13.1	27.0	101	320
1219.97	X / H	64.5	67.7	-16.1	48.4	51.6	54.0 / 74.0	5.6	22.4	111	92
1920.11	X / H	53.5	58.2	-13.9	39.6	44.3	54.0 / 74.0	14.4	29.7	102	226
16102.52	Z / V	37.0	51.2	-6.5	30.5	44.7	54.0 / 74.0	23.5	29.3	152	67

Note: All correction factors (antenna, cable, pre-amplifier) are included in the measurement values.

8. Photographs of test setup

Photograph 1: Set-up for Conducted Emissions at Antenna Port

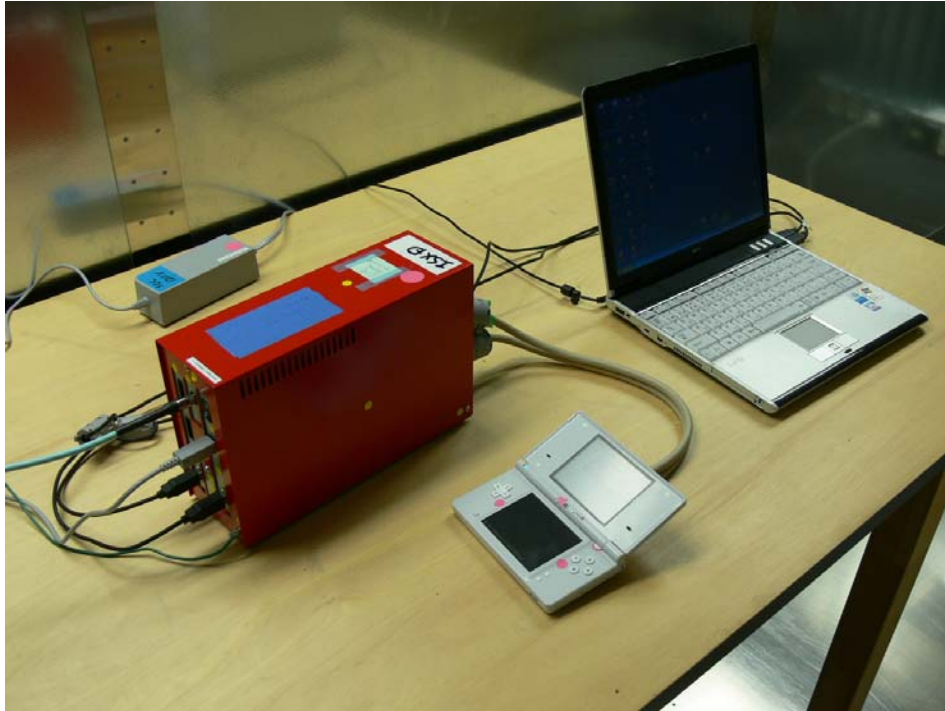


Photograph 2: Set-up for Radiated Emission, EUT Configuration X-Axis




Photograph 3: Set-up for Radiated Emission, EUT Configuration Y-Axis




Photograph 6: Set-up for AC Mains Conducted Emission of Transmitter, Rear View

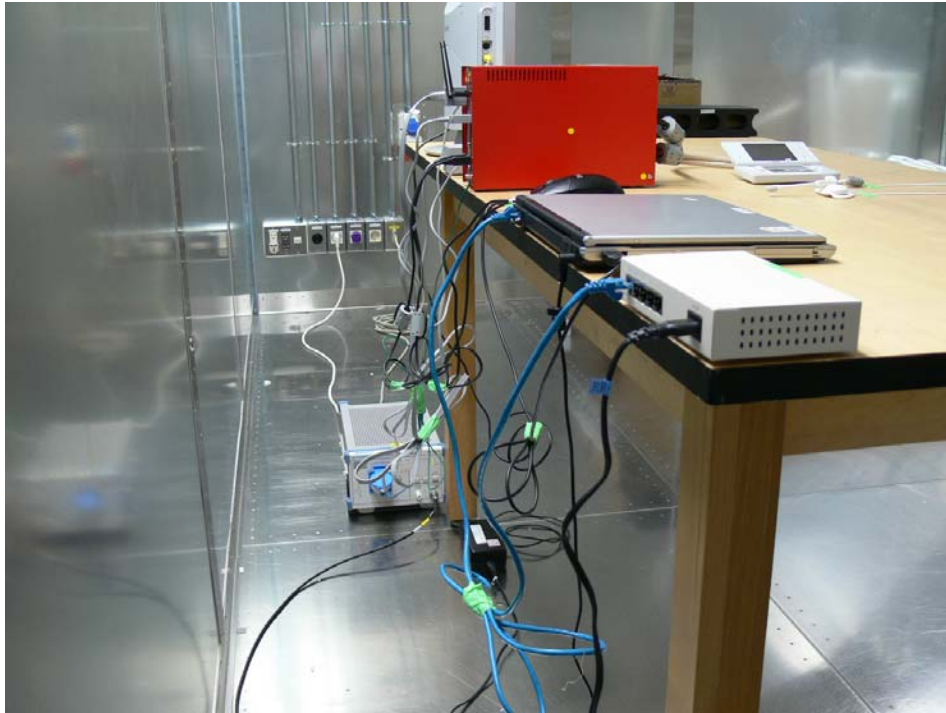

Photograph 7: Set-up for Radiated Emission of Transmitter, Front View

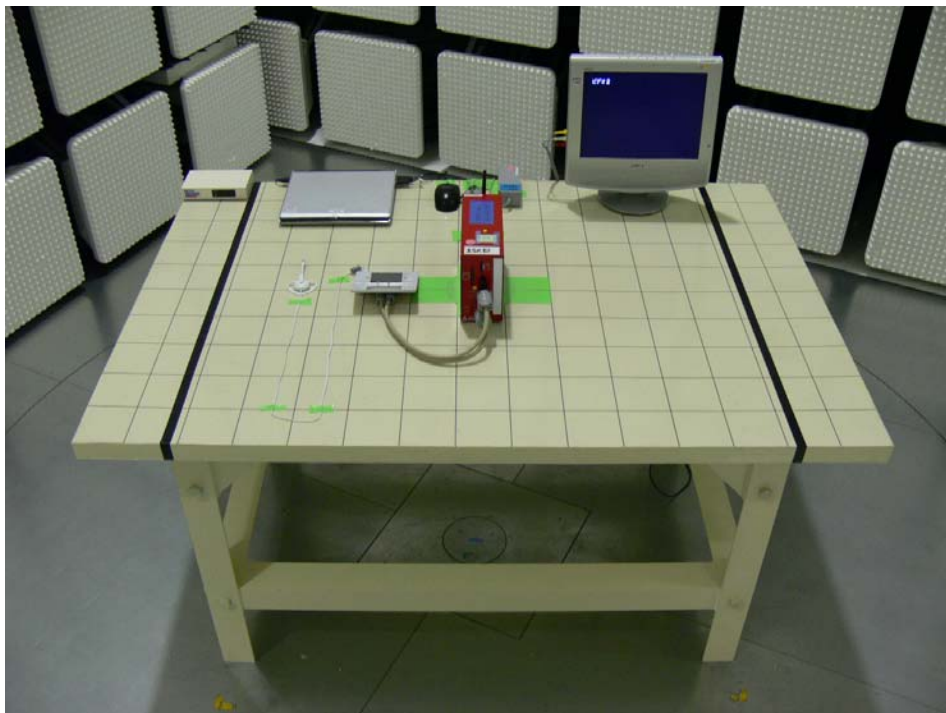


Photograph 8: Set-up for Radiated Emission of Transmitter, Rear View

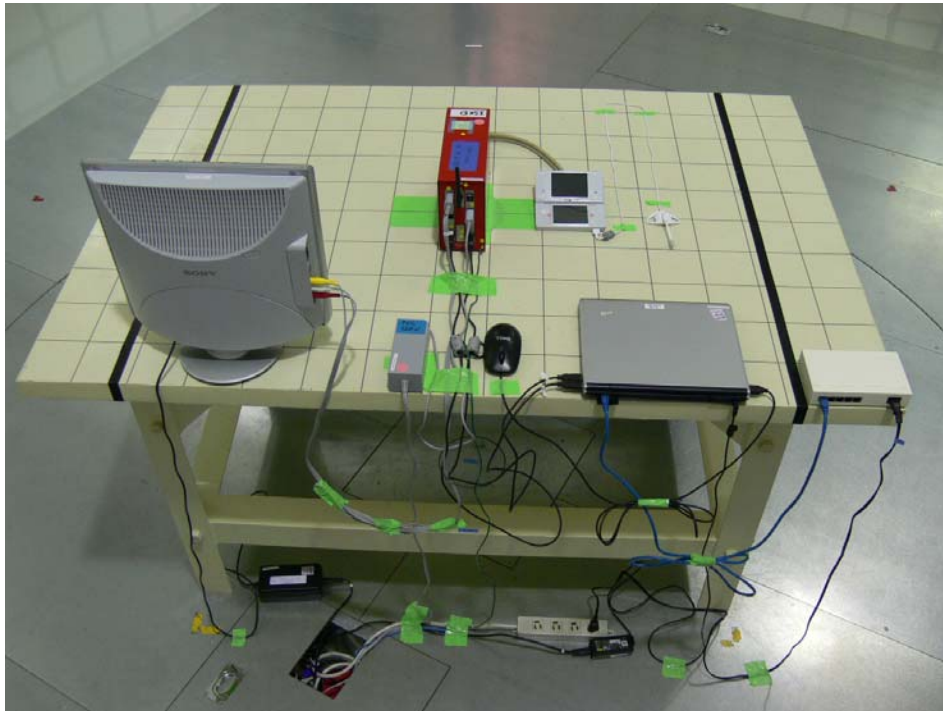

Photograph 9: Set-up for Radiated Emission of Receiver, Front View



Photograph 10: Set-up for Radiated Emission of Receiver, Rear View

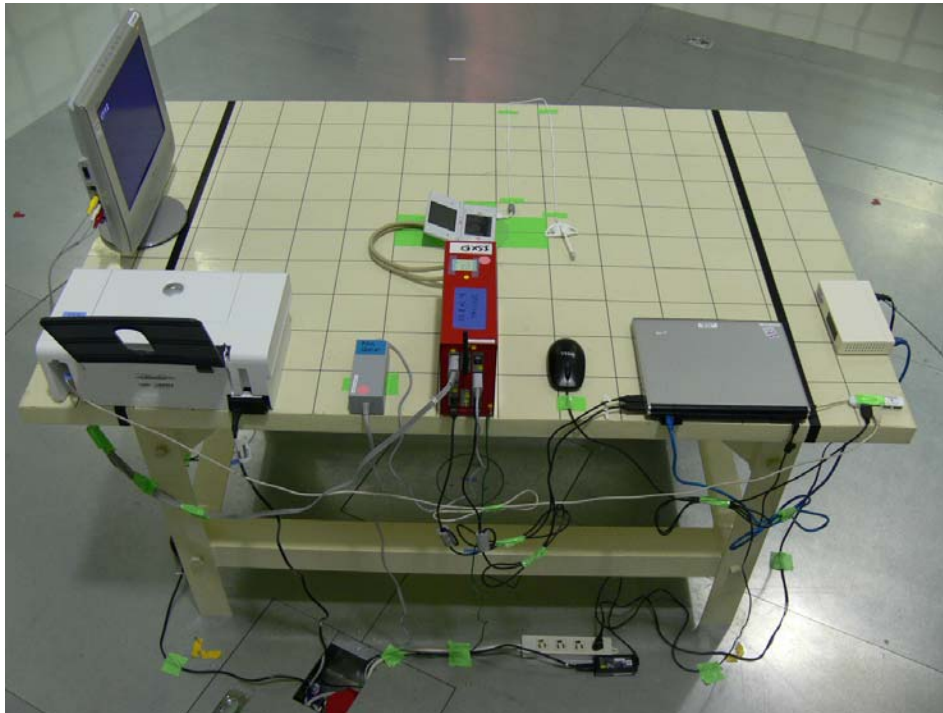

9. List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Emission Measurement Uncertainty.....	7
Table 3: Conducted Output Power , 802.11.b.....	20
Table 4: Conducted Output Power , 802.11.g.....	20
Table 5: 6dB Bandwidth, 802.11.b.....	21
Table 6: 6dB Bandwidth, 802.11.g.....	24
Table 7: Conducted Spurious Emission, Mode A (2412MHz), 802.11.b.....	26
Table 8: Conducted Spurious Emissions, Mode B (2437MHz), 802.11.b.....	30
Table 9: Conducted Spurious Emissions, Mode C (2462MHz), 802.11.b.....	33
Table 10: Conducted Spurious Emissions, Mode A (2412MHz), 802.11.g.....	36
Table 11: Conducted Spurious Emissions, Mode B (2437MHz), 802.11.g.....	39
Table 12: Conducted Spurious Emissions, Mode C (2462MHz), 802.11.g.....	42
Table 13: Peak Power Spectral Density, 802.11.b.....	46
Table 14: Peak Power Spectral Density, 802.11.g.....	48
Table 15: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A, 802.11.b.....	52
Table 16: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode C, 802.11.b.....	52
Table 17: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode A, 802.11.g.....	53
Table 18: Conducted Emission, 150kHz – 30MHz, Quasi Peak and Average Data, Phase N (N) and L1 (L), Mode C, 802.11.g.....	53
Table 19: Band Edge Radiated Emission, 802.11.b.....	55
Table 20: Band Edge Radiated Emission, 802.11.g.....	57
Table 21: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode A, 802.11.b.....	60
Table 22: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode B, 802.11.b.....	60
Table 23: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode C, 802.11.b.....	61
Table 24: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode A, 802.11.b.....	61
Table 25: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode B, 802.11.b.....	61
Table 26: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode C, 802.11.b.....	62
Table 27: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode A, 802.11.g.....	63
Table 28: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode B, 802.11.g.....	63
Table 29: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode C, 802.11.g.....	64
Table 30: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode A, 802.11.g.....	64
Table 31: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode B, 802.11.g.....	64
Table 32: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode C, 802.11.g.....	65
Table 33: Radiated Emission 30MHz – 1GHz, Horizontal & Vertical Antenna Orientations, Quasi Peak Data, Mode F and G, 802.11.b/g.....	67
Table 34: Radiated Emission 1GHz – 25GHz, Horizontal & Vertical Antenna Orientations, Peak and Average Data, Mode F and G, 802.11.b/g.....	67

10. List of Figures

Figure 1: Test setup.....	13
Figure 2: 6dB Bandwidth, Mode A (2412MHz).....	22
Figure 3: 6dB Bandwidth, Mode B (2437MHz).....	22
Figure 4: 6dB Bandwidth, Mode C (2462MHz).....	23
Figure 5: 6dB Bandwidth, Mode A (2412MHz).....	24
Figure 6: 6dB Bandwidth, Mode B (2437MHz).....	25
Figure 7: 6dB Bandwidth, Mode C (2462MHz).....	25
Figure 8: Spurious Emission from 30MHz to 1GHz, Mode A (2412MHz)	27
Figure 9: Spurious Emission from 1 to 5GHz, Mode A (2412MHz)	27
Figure 10: Spurious Emission from 5 to 10GHz, Mode A (2412MHz)	28
Figure 11: Spurious Emission from 10 to 20GHz, Mode A (2412MHz)	28
Figure 12: Spurious Emission from 20 to 25GHz, Mode A (2412MHz)	29
Figure 13: Spurious Emission from 30MHz to 1GHz, Mode B (2437MHz)	30
Figure 14: Spurious Emission from 1 to 5GHz, Mode B (2437MHz)	31
Figure 15: Spurious Emission from 5 to 10GHz, Mode B (2437MHz)	31
Figure 16: Spurious Emission from 10 to 20GHz, Mode B (2437MHz)	32
Figure 17: Spurious Emission from 20 to 25GHz, Mode B (2437MHz)	32
Figure 18: Spurious Emission from 30MHz to 1GHz, Mode C (2462MHz)	33
Figure 19: Spurious Emission from 1 to 5GHz, Mode C (2462MHz)	34
Figure 20: Spurious Emission from 5 to 10GHz, Mode C (2462MHz)	34
Figure 21: Spurious Emission from 10 to 20GHz, Mode C (2462MHz)	35
Figure 22: Spurious Emission from 20 to 25GHz, Mode C (2462MHz)	35
Figure 23: Spurious Emission from 30MHz to 1GHz, Mode A (2412MHz)	36
Figure 24: Spurious Emission from 1 to 5GHz, Mode A (2412MHz)	37
Figure 25: Spurious Emission from 5 to 10GHz, Mode A (2412MHz)	37
Figure 26: Spurious Emission from 10 to 20GHz, Mode A (2412MHz)	38
Figure 27: Spurious Emission from 20 to 25GHz, Mode A (2412MHz)	38
Figure 28: Spurious Emission from 30MHz to 1GHz, Mode B (2437MHz)	39
Figure 29: Spurious Emission from 1 to 5GHz, Mode B (2437MHz)	40
Figure 30: Spurious Emission from 5 to 10GHz, Mode B (2437MHz)	41
Figure 31: Spurious Emission from 10 to 20GHz, Mode B (2437MHz)	41
Figure 32: Spurious Emission from 20 to 25GHz, Mode B (2437MHz)	42
Figure 33: Spurious Emission from 30MHz to 1GHz, Mode C (2462MHz)	43
Figure 34: Spurious Emission from 1 to 5GHz, Mode C (2462MHz)	43
Figure 35: Spurious Emission from 5 to 10GHz, Mode C (2462MHz)	44
Figure 36: Spurious Emission from 10 to 20GHz, Mode C (2462MHz)	44
Figure 37: Spurious Emission from 20 to 25GHz, Mode C (2462MHz)	45
Figure 38: Power Spectral Density, Mode A (2412MHz), 802.11.b	47
Figure 39: Power Spectral Density, Mode B (2437MHz), 802.11.b	47
Figure 40: Power Spectral Density, Mode C (2462MHz), 802.11.b	48
Figure 41: Power Spectral Density, Mode A (2412MHz), 802.11.g	49
Figure 42: Power Spectral Density, Mode B (2437MHz), 802.11.g	49
Figure 43: Power Spectral Density, Mode C (2462MHz), 802.11.g	50
Figure 44: Band Edge Radiated Emission, Mode A (2412MHz), Peak and Average	55
Figure 45: Band Edge Radiated Emission, Mode C (2462MHz), Peak and Average	56
Figure 46: Band Edge Radiated Emission, Mode A (2412MHz), Peak and Average	57
Figure 47: Band Edge Radiated Emission, Mode C (2462MHz), Peak and Average	58

11. List of Photographs

Photograph 1: Set-up for Conducted Emissions at Antenna Port.....	68
Photograph 2: Set-up for Radiated Emission, EUT Configuration X-Axis.....	69
Photograph 3: Set-up for Radiated Emission, EUT Configuration Y-Axis.....	69
Photograph 4: Set-up for Radiated Emission, EUT Configuration Z-Axis.....	70
Photograph 5: Set-up for AC Mains Conducted Emission of Transmitter, Front View.....	70
Photograph 6: Set-up for AC Mains Conducted Emission of Transmitter, Rear View.....	Error! Bookmark not defined.
Photograph 9: Set-up for Radiated Emission of Transmitter, Front View	Error! Bookmark not defined.
Photograph 10: Set-up for Radiated Emission of Transmitter, Rear View...	Error! Bookmark not defined.
Photograph 11: Set-up for Radiated Emission of Receiver, Front View	Error! Bookmark not defined.
Photograph 12: Set-up for Radiated Emission of Receiver, Rear View.....	Error! Bookmark not defined.