

# Extremtrac Technology Co., Ltd

## GPS Vehicle/Asset Tracker

**Main Model: MC500**

**Serial Model: N/A**

**April 15, 2013**

**Report No.: 13020239-FCC-R1-V1**

**(This report supersedes NONE)**



**Modifications made to the product : None**

**This Test Report is Issued Under the Authority of:**

*William Long*

*Alex Liu*



**William Long**  
Compliance Engineer

**Alex Liu**  
Technical Manager

**This test report may be reproduced in full only.  
Test result presented in this test report is applicable to the representative sample only.**

**RF Test Report**

**SIEMIC, Inc.**  
Accessing global markets



**To: FCC Part 22(H) & FCC Part 24(E): 2012**

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC , RF/Wireless , Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless , Telecom
Taiwan	BSMI , NCC , NIST	EMC, RF, Telecom , Safety
Hong Kong	OFTA , NIST	RF/Wireless , Telecom
Australia	NATA, NIST	EMC, RF, Telecom , Safety
Korea	KCC/RRA, NIST	EMI, EMS, RF , Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	Safety, EMC , RF/Wireless, Telecom
Europe	A2LA, NIST	EMC, RF, Telecom , Safety

### Accreditations for Product Certifications

Country/Region	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC , RF , Telecom
Canada	IC FCB , NIST	EMC , RF , Telecom
Singapore	iDA, NIST	EMC , RF , Telecom
EU	NB	EMC & R&TTE Directive
Japan	MIC, (RCB 208)	RF , Telecom
Hong Kong	OFTA (US002)	RF , Telecom



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GPS Vehicle/Asset Tracker  
**Main Model:** MC500  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2012

**Report No:** 13020239-FCC-R1-V1  
**Issue Date:** April 15, 2013  
**Page:** 3 of 39  
[www.siemic.com.cn](http://www.siemic.com.cn)

This page has been left blank intentionally.

## CONTENTS

<b>1. EXECUTIVE SUMMARY &amp; EUT INFORMATION.....</b>	<b>5</b>
<b>2. TECHNICAL DETAILS.....</b>	<b>6</b>
<b>3. MODIFICATION .....</b>	<b>7</b>
<b>4. TEST SUMMARY .....</b>	<b>8</b>
<b>5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....</b>	<b>9</b>
<b>ANNEX A. TEST INSTRUMENT &amp; METHOD .....</b>	<b>25</b>
<b>ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS .....</b>	<b>28</b>
<b>ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....</b>	<b>35</b>
<b>ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST .....</b>	<b>38</b>
<b>ANNEX E. DECLARATION OF SIMILARITY .....</b>	<b>39</b>

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GPS Vehicle/Asset Tracker  
Main Model: MC500  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2012

Report No: 13020239-FCC-R1-V1  
Issue Date: April 15, 2013  
Page: 5 of 39  
www.siemic.com.cn

## **1. EXECUTIVE SUMMARY & EUT INFORMATION**

**The purpose of this test programme was to demonstrate compliance of the Extremtrac Technology Co., Ltd, GPS Vehicle/Asset Tracker and model: MC500 against the current Stipulated Standards. The GPS Vehicle/Asset Tracker has demonstrated compliance with the FCC Part 22(H) & FCC Part 24(E): 2012.**

### **EUT Information**

**EUT** : GPS Vehicle/Asset Tracker  
**Description** :  
**Main Model** : MC500  
**Serial Model** : N/A  
                  GSM850: 2dBi  
**Antenna Gain** : PCS1900: 2 dBi  
                  GPS: 2dBi  
**Input Power** : 9V - 36V(DC)  
**Maximum Conducted Peak Power to Antenna** :  
                  GSM850: 32.78 dBm  
                  PCS1900: 29.19dBm  
  
**Maximum Radiated ERP/EIRP** :  
                  GSM850: 30.05 dBm / ERP  
                  PCS1900: 27.26 dBm / EIRP

**Classification**  
**Per Stipulated Test Standard** : FCC Part 22(H) & FCC Part 24(E): 2012

*NOTE: The model use the GSM module-M35 (from Quectel Wireless), M35 FCC ID: XMR201202M35.*

**SIEMIC, INC.**

Title: RF Test Report for GPS Vehicle/Asset Tracker  
Main Model: MC500  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2012

Report No: 13020239-FCC-R1-V1  
Issue Date: April 15, 2013  
Page: 6 of 39  
www.siemic.com.cn

## 2. TECHNICAL DETAILS

<b>Purpose</b>	Compliance testing of GPS Vehicle/Asset Tracker with stipulated standard
<b>Applicant / Client</b>	Extremtrac Technology Co., Ltd 4F,The Second Building,MinZhi The Third Industrial Zone,Bao'an District,P.O.518131,Shenzhen China
<b>Manufacturer</b>	Extremtrac Technology Co., Ltd 4F,The Second Building,MinZhi The Third Industrial Zone,Bao'an District,P.O.518131,Shenzhen China
<b>Laboratory performing the tests</b>	SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email:info@siemic.com
<b>Test report reference number</b>	13020239-FCC-R1-V1
<b>Date EUT received</b>	April 01, 2013
<b>Standard applied</b>	FCC Part 22(H) & FCC Part 24(E): 2012
<b>Dates of test</b>	April 08, 2013
<b>No of Units</b>	#1
<b>Equipment Category</b>	PCE
<b>Trade Name</b>	N/A
<b>RF Operating Frequency (ies)</b>	GSM850 TX : 824.2 ~ 848.8 MHz; RX : 869.2 ~ 893.8 MHz PCS1900 TX : 1850.2 ~ 1909.8 MHz; RX : 1930.2 ~ 1989.8 MHz GPS:1575.42MHz(Rx)
<b>Number of Channels</b>	299CH (PCS1900) and 124CH (GSM850)
<b>Modulation</b>	GSM/PCS: GMSK
<b>FCC ID</b>	SRZET800MC500

### **3. MODIFICATION**

**NONE**

## 4. TEST SUMMARY

The product was tested in accordance with the following specifications.  
 All testing has been performed according to below product classification:

### PCE

#### Test Results Summary

Test Standard	Description	Product Class	Pass / Fail
§ 1.1307, § 2.1093	RF Exposure (SAR)	See Above	Pass
§2.1046; § 22.913 (a); § 24.232 (c)	RF Output Power	See Above	Pass
§ 2.1047	Modulation Characteristics	See Above	N/A
§ 2.1049; § 22.905 § 22.917; § 24.238	99% & -26 dB Occupied Bandwidth	See Above	Pass
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	See Above	Pass
§ 2.1053 § 22.917 (a); § 24.238 (a)	Field Strength of Spurious Radiation	See Above	Pass
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	See Above	Pass
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	See Above	Pass

*Note1: Testing was performed by configuring EUT to maximum output power status, the declared output power class for different.*

*Note2: Because the GSM Module of EUT has been granted, so we only test the ERP & EIRP of RF Output Power and Field Strength of Spurious Radiation, the other test data please refer to FCC ID: XMR201202M35.*



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GPS Vehicle/Asset Tracker  
**Main Model:** MC500  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2012

**Report No:** 13020239-FCC-R1-V1  
**Issue Date:** April 15, 2013  
**Page:** 9 of 39  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **5. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS**

### **5.1 §1.1307, §2.1093- RF Exposure (SAR)**

**Test Result:** Reference to SAR evolution report 13020239-FCC-H1.



## 5.2 §2.1046 ;§22.913 (a); §24.232 (c)- RF Output Power

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions  

Temperature	15°C
Relative Humidity	50%
Atmospheric Pressure	1016mbar
4. Test date : April 08, 2013  
Tested By : William Long

### **Procedures:**

#### **For Conducted Power:**

1. The transmitter output port was connected to base station.
2. Set EUT at maximum power through base station.
3. Select lowest, middle, and highest channels for each band and different test mode.

#### **For ERP/EIRP:**

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$  – the absolute level

Spurious attenuation limit in dB =  $43 + 10 \log_{10} (\text{power out in Watts})$

### **Test Result: Pass**

**Remark:** Conducted Burst Average power for reporting purposes only

## Conducted Power

Burst Average Power (dBm)								
Band	GSM850				GSM1900			
Channel	128	190	251	Tune up Power tolerant	512	661	810	Tune up Power tolerant
Frequency (MHz)	824.2	836.6	848.8	/	1850.2	1880	1909.8	/
GSM Voice (1 uplink)	<b>32.78</b>	32.75	32.66	33±2	28.26	28.68	<b>29.19</b>	30±2
GPRS Multi-Slot Class 8 (1 uplink)	32.75	32.68	32.59	33±2	27.98	28.47	29.05	30±2
GPRS Multi-Slot Class 10 (2 uplink)	32.67	32.60	32.49	30±2	27.95	28.44	29.01	28±2
GPRS Multi-Slot Class 12 (4 uplink)	31.72	31.58	31.48	28±2	27.88	28.34	28.88	26±2

Remark :  
 GPRS, CS1 coding scheme.  
 Multi-Slot Class 8 , Support Max 4 downlink, 1 uplink , 5 working link  
 Multi-Slot Class 10 , Support Max 4 downlink, 2 uplink , 5 working link  
 Multi-Slot Class 12 , Support Max 4 downlink, 4 uplink , 5 working link

Note1: since GSM mode has higher power, so the test items below were not performed to GPRS mode.

Note2: the upper test data please refer to FCC ID: XMR201202M35.

## ERP & EIRP (worst case)

### ERP for Cellular Band (Part 22H)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
824.2	25.33	V	6.2	1.67	29.86	38.45
824.2	24.89	H	6.2	1.67	29.42	38.45
836.6	25.42	V	6.2	1.67	29.95	38.45
836.6	25.33	H	6.2	1.67	29.86	38.45
848.8	25.39	V	6.3	1.67	30.02	38.45
848.8	25.42	H	6.3	1.67	30.05	38.45

### EIRP for PCS Band (Part 24E)

Frequency (MHz)	Substituted level (dBm)	Antenna Polarization	Antenna Gain correction (dBi)	Cable Loss (dB)	Absolute Level (dBm)	Limit (dBm)
1850.2	21.26	V	8.6	2.66	27.20	33
1850.2	21.03	H	8.6	2.66	26.97	33
1880	20.86	V	8.6	2.34	27.12	33
1880	20.71	H	8.6	2.34	26.97	33
1909.8	20.83	V	8.6	2.17	27.26	33
1909.8	20.52	H	8.6	2.17	26.95	33

Note: Factors= Antenna Gain Correction-Cable Loss



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GPS Vehicle/Asset Tracker  
**Main Model:** MC500  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E): 2012

**Report No:** 13020239-FCC-R1-V1  
**Issue Date:** April 15, 2013  
**Page:** 12 of 39  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **5.3 §2.1047 - Modulation Characteristic**

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## 5.4 §2.1049, §22.917, §22.905 & §24.238 - Occupied Bandwidth

### 1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyser was connected to the antenna terminal.

### 2. Environmental Conditions

Temperature	15°C
Relative Humidity	50%
Atmospheric Pressure	1020mbar

### 3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.

### 4. Test date : ---

Tested By : ---

### Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The 99% and 26 dB occupied bandwidth (BW) of the middle channel for the highest RF powers.

### Test Results: Pass

Note: the following test data please refer to FCC ID: XMR201202M35.

#### Cellular Band (Part 22H)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
190	836.6	250.2273	337.098


#### PCS Band (Part 24E)

Channel	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
661	1880.0	249.7699	337.005

Please refer to the following plots.


## Cellular Band (Part 22H)

## 99% Occupied Bandwidth &amp; 26 dB Bandwidth

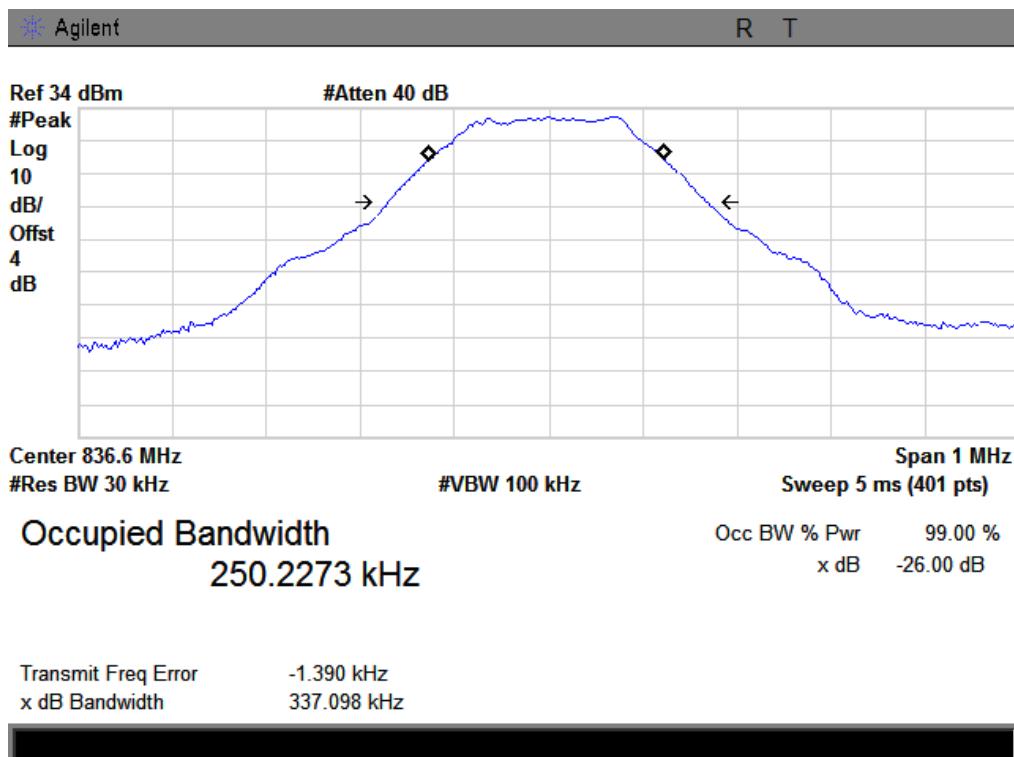

## PCS Band (Part 24E)

## 99% Occupied Bandwidth &amp; 26 dB Bandwidth

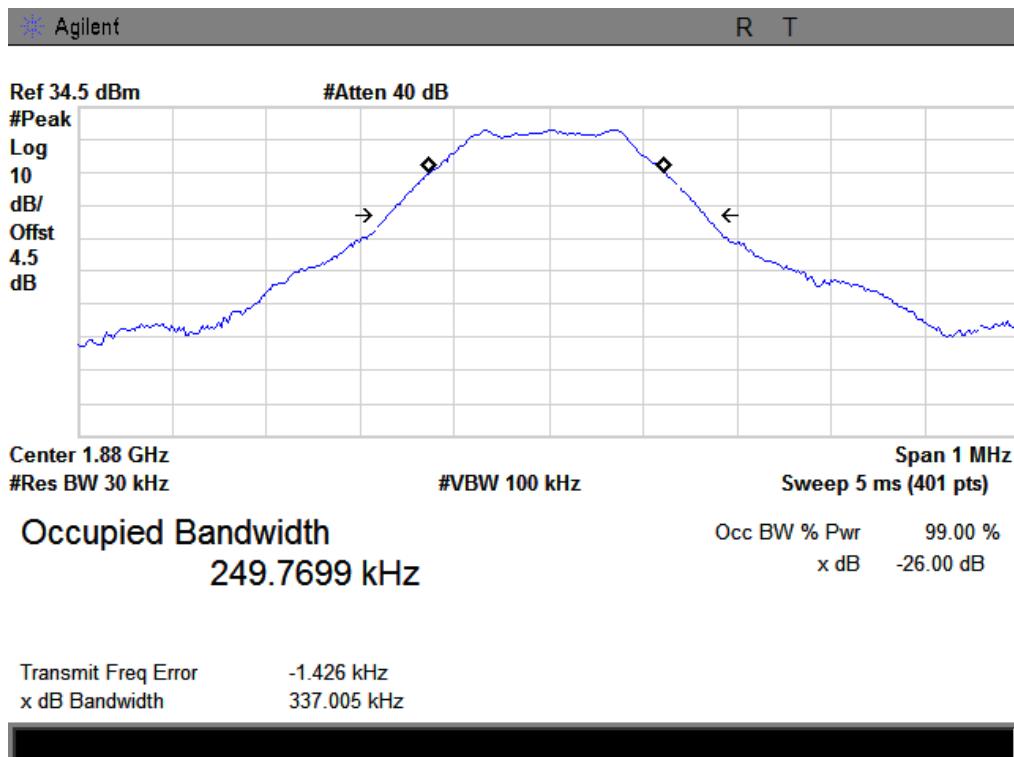



## **5.5 §2.1051, §22.917(a) & §24.238(a) - Spurious Emissions at Antenna Terminals**

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power.  
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5\text{dB}$ .
3. Environmental Conditions      Temperature      15°C  
    Relative Humidity      50%  
    Atmospheric Pressure      1020mbar
4. Test date : ---  
Tested By : ---

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

## Procedures:

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

## Test Result: Pass


Refer to the attached plots.

Note: the following test data please refer to FCC ID: XMR201202M35.

## Worst Case:


### Cellular Band (Part 22H)

30MHz-10G – GSM850 Middle Channel

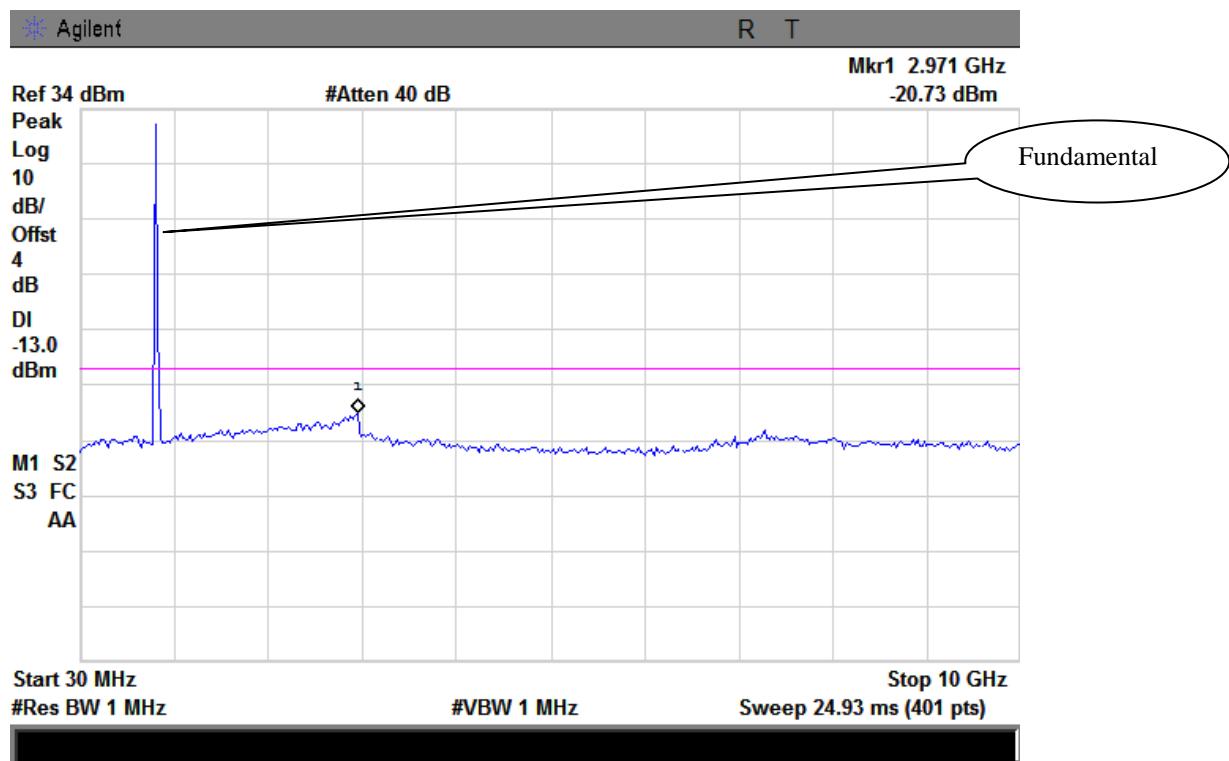

### PCS Band (Part24E)

30MHz-20G – PCS1900 Middle Channel

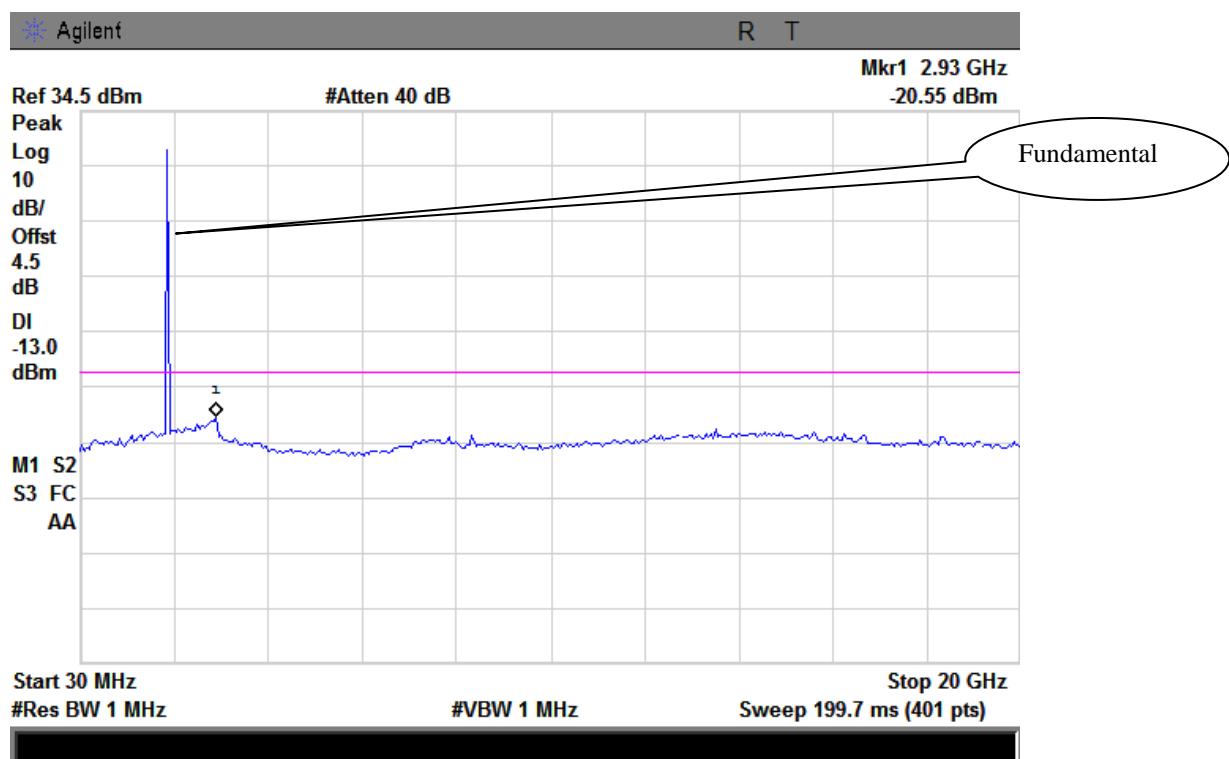

**SIEMIC, INC.**

Accessing global markets

Title: RF Test Report for GPS Vehicle/Asset Tracker  
Main Model: MC500  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2012

Report No: 13020239-FCC-R1-V1  
Issue Date: April 15, 2013  
Page: 17 of 39  
www.siemic.com.cn

## **5.6 §2.1053, §22.917 & §24.238 - Spurious Radiated Emissions**

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 40GHz is  $\pm 6.0$ dB (for EUTs  $< 0.5$ m X 0.5m X 0.5m).
4. Environmental Conditions      Temperature      14°C  
    Relative Humidity      50%  
    Atmospheric Pressure      1018mbar
5. Test date : April 08, 2013  
Tested By : William Long

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB. The spectrum is scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

### **Procedures:**

Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. An emission was scan up to 10<sup>th</sup> harmonic of the operating frequency.

### **Sample Calculation:**

EUT Field Strength = Raw Amplitude (dB $\mu$ V/m) – Amplifier Gain (dB) + Antenna Factor (dB) + Cable Loss (dB) + Filter Attenuation (dB, if used)

### **Test Result: Pass**

## Cellular Band (Part 22H)

### Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1648.3	-29.53	86	112	V	8.2	2.17	0	-23.5	-13	-10.5
1648.4	-34.26	167	152	H	8.2	2.17	0	-28.23	-13	-15.23
595.21	-35.15	211	145	V	6.4	2.16	0	-30.91	-13	-17.91
778.55	-34.99	212	132	H	6.3	2.5	0	-31.19	-13	-18.19

### Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1673.2	-32.15	123	112	V	8.2	2.17	0	-26.12	-13	-13.12
1673.2	-35.36	151	152	H	8.2	2.17	0	-29.33	-13	-16.33
770.26	-31.55	28	110	V	6.3	2.5	0	-27.75	-13	-14.75
801.12	-36.15	322	120	H	6.4	2.5	0	-32.25	-13	-19.25

### High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
1697.6	-31.22	59	152	V	8.2	2	0	-25.02	-13	-12.02
1697.6	-35.26	251	112	H	8.2	2	0	-29.06	-13	-16.06
693.51	-35.81	151	112	V	6.6	2.33	0	-31.54	-13	-18.54
762.13	-36.88	121	230	H	6.4	2.5	0	-32.98	-13	-19.98

### PCS Band (Part 24E)

#### Low channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3700.4	-35.26	156	152	V	10	3.84	0	-29.1	-13	-16.1
3700.4	-36.33	121	203	H	10	3.84	0	-30.17	-13	-17.17
678.72	-35.15	193	152	V	6.5	2.33	0	-30.98	-13	-17.98
952.07	-36.92	36	210	H	6.5	2.83	0	-33.25	-13	-20.25

#### Middle channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3760	-35.39	145	152	V	10	4.17	0	-29.56	-13	-16.56
3760	-36.88	263	110	H	10	4.17	0	-31.05	-13	-18.05
675.2	-37.58	261	121	V	6.5	2.33	0	-33.41	-13	-20.41
666.3	-36.92	251	230	H	6.3	2.14	0	-32.76	-13	-19.76

#### High channel

Frequency (MHz)	Substituted level (dBm)	Direction (degree)	Height (cm)	Polarity (H/V)	Antenna Gain Correction (dB)	Cable Loss (dB)	Amplifier (dB)	Corrected Reading (dBm)	Limit (dBm)	Margin (dB)
3819.4	-36.55	56	154	V	10	4	0	-30.55	-13	-17.55
3819.5	-37.92	263	123	H	10	4	0	-31.92	-13	-18.92
576.36	-36.25	215	152	V	6.1	2.16	0	-32.31	-13	-19.31
489.1	-37.88	152	185	H	5.8	1.84	0	-33.92	-13	-20.92

## 5.7 §22.917(a) & §24.238(a) - Band Edge

1. Conducted Measurement  
EUT was set for low, mid, high channel with modulated mode and highest RF output power. The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty  
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is  $\pm 1.5$ dB.
3. Environmental Conditions
 

Temperature	15°C
Relative Humidity	50%
Atmospheric Pressure	1019mbar
4. Test date : ---  
Tested By : ---

### **Standard Requirement:**

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

### **Procedures:**

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The Band Edges of low and high channels for the highest RF powers were measured. Setting RBW as roughly BW/100.

### **Test Result: Pass**

Note: the following test data please refer to FCC ID: XMR201202M35.


#### **Cellular Band (Part 22H)**

Frequency (MHz)	Emission (dBm)	Limit (dBm)
823.995	-13.49	-13
849.015	-13.18	-13


#### **PCS Band (Part 24E)**

Frequency (MHz)	Emission (dBm)	Limit (dBm)
1849.995	-14.85	-13
1910.015	-17.82	-13


## Cellular Band, Lowest Channel

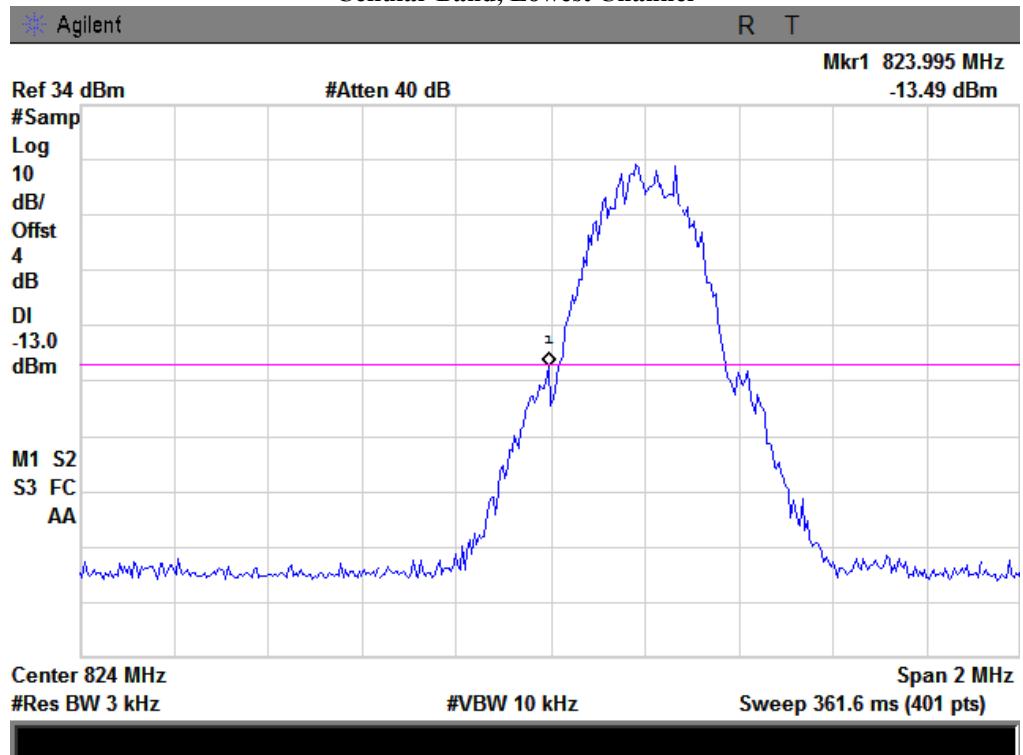


## Cellular Band, Highest Channel

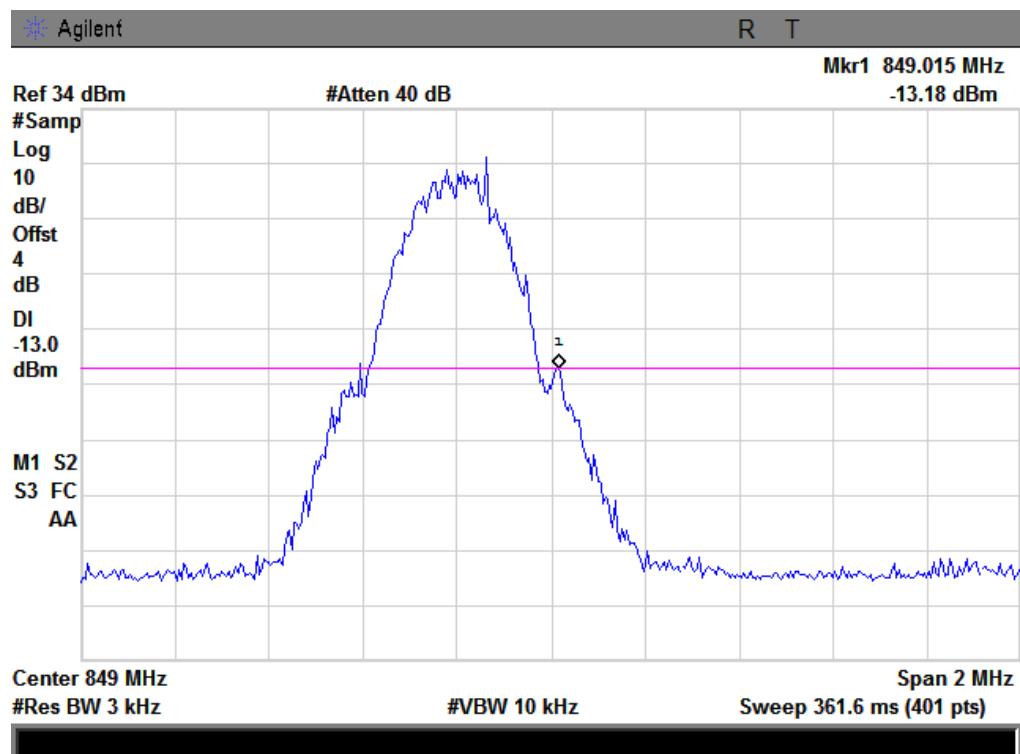

## PCS Band, Lowest Channel

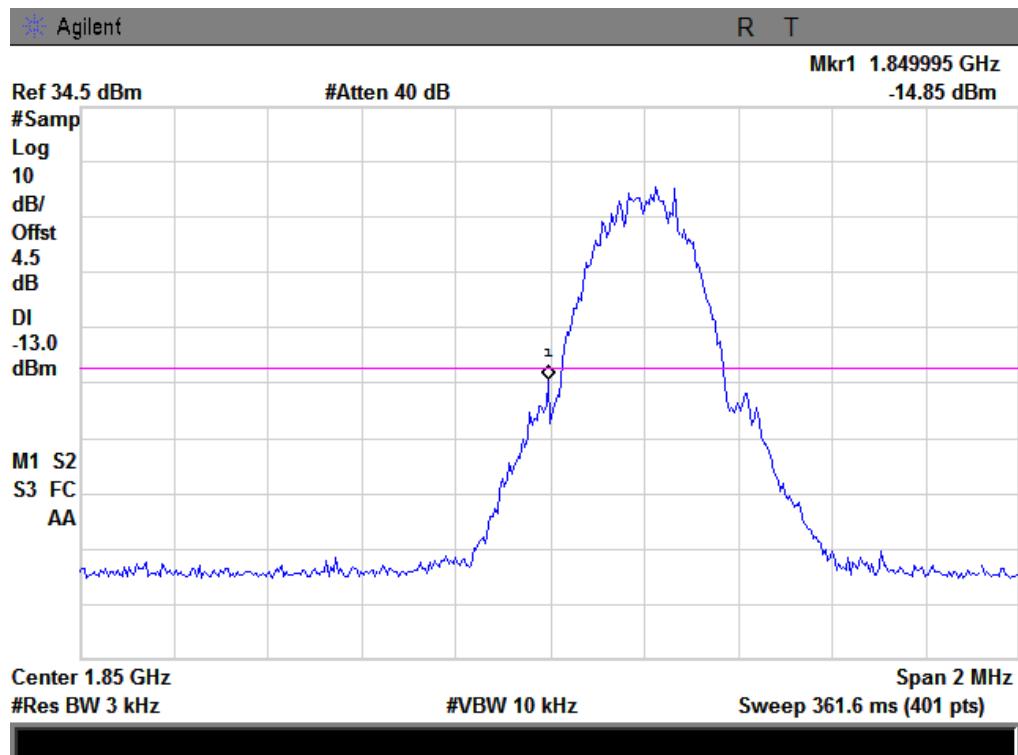

## PCS Band, Highest Channel

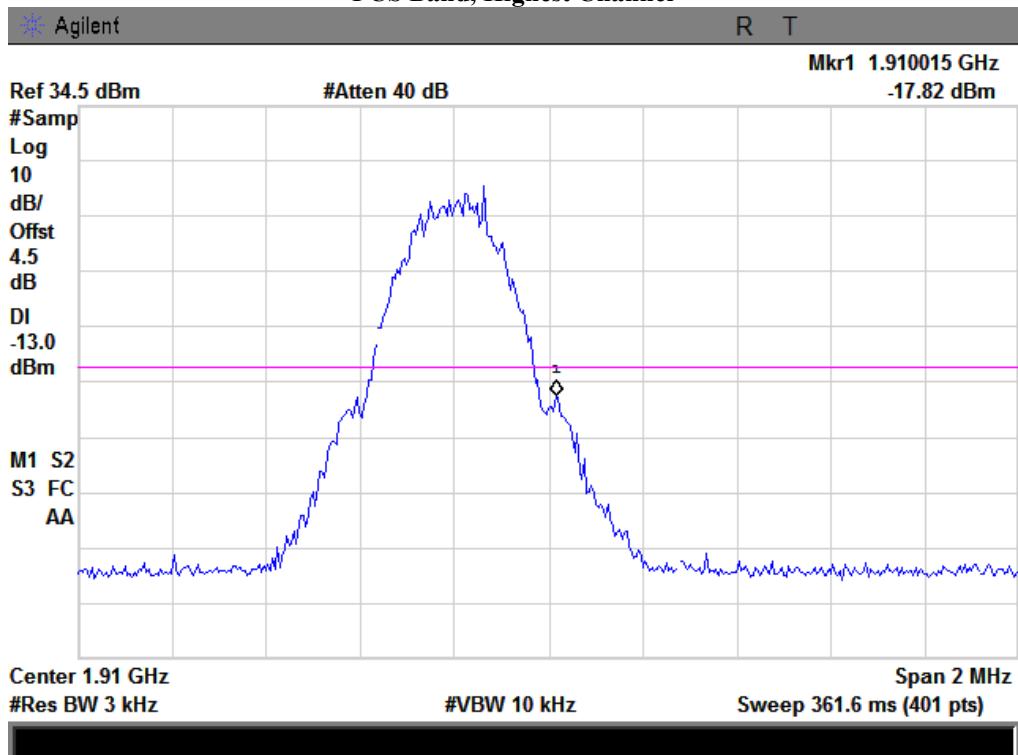

## 5.8 §2.1055, §22.355 & §24.235 - Frequency Stability

1.	Environmental Conditions	Temperature Relative Humidity Atmospheric Pressure	15°C 50% 1019mbar
2.	Test date : --- Tested By : ---		

### **Standard Requirement:**

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile ≤ 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A

According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized frequency block.

### **Procedures:**

A communication link was established between EUT and base station. The frequency error was monitored and measured by base station under variation of ambient temperature and variation of primary supply voltage.

Limit: The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **Test Results: Pass**

Note: the following test data please refer to FCC ID: XMR201202M35.


**Frequency Stability versus Temperature:** The Frequency tolerance of the carrier signal shall be maintained within 2.5ppm of the operating frequency over a temperature variation of -10°C to +55°C at normal supply voltage.

### Cellular Band (Part 22H)

Middle Channel, $f_0 = 836.6$ MHz				
Temperature (°C)	Power Supplied (V <sub>AC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	120	18	0.0215	2.5
0		17	0.0203	2.5
10		21	0.0251	2.5
20		21	0.0251	2.5
30		21	0.0251	2.5
40		15	0.0179	2.5
50		16	0.0191	2.5
55		18	0.0215	2.5
25	132	17	0.0203	2.5
	108	20	0.0239	2.5

### PCS Band (Part 24E)

Middle Channel, $f_0 = 1880$ MHz				
Temperature (°C)	Power Supplied (V <sub>AC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
-10	120	26	0.0138	2.5
0		25	0.0133	2.5
10		31	0.0165	2.5
20		31	0.0165	2.5
30		29	0.0154	2.5
40		27	0.0144	2.5
50		30	0.0160	2.5
55		26	0.0138	2.5
25	132	26	0.0138	2.5
	108	26	0.0138	2.5

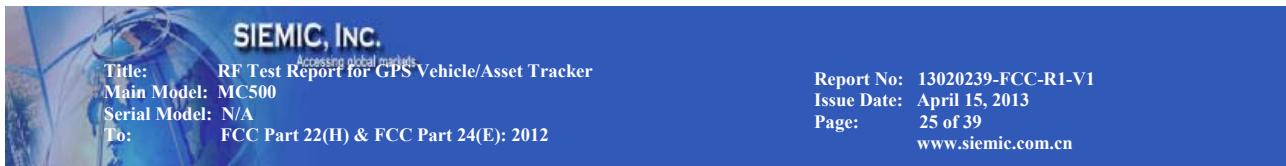

## **Annex A. TEST INSTRUMENT & METHOD**

### **Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES**

Instrument	Model	Serial #	Calibration Date	Calibration Due Date
<b>RF Conducted Test</b>				
Spectrum Analyzer	8563E	3821A09023	01/10/2013	01/09/2014
Power Splitter	1#	N/A	02/02/2013	02/01/2014
Universal Radio Communication Tester	CMU200	104031	10/27/2012	10/26/2013
Temperature/Humidity Chamber	MHP-150-1C	MHA090510A	11/03/2012	11/02/2013
DC Power Supply	1786B	169D12111	N/A	N/A
<b>Radiated Emissions</b>				
Hp Spectrum Analyzer	8563E	3821A09023	01/10/2013	01/09/2014
R&S EMI Receiver	ESPI3	101216	10/27/2012	10/26/2013
Antenna (30MHz~6GHz)	JB6	A121411	12/28/2011	12/27/2012
ETS-Lindgren Antenna(1 ~18GHz)	3115	N/A	10/29/2012	10/28/2013
A- INFOMW Antenna (1 ~18GHz)	JXTXLB-10180	J20310811200 92	06/25/2012	06/24/2013
Horn Antenna (18~40GHz)	AH-840	101013	04/22/2012	04/21/2013
Microwave Pre-Amp (18~40GHz)	PA-840	181250	05/30/2012	05/29/2013
Hp Agilent Pre-Amplifier	8447F	1937A01160	05/26/2012	05/25/2013
MITEQ Pre-Amplifier (0.1 ~ 18GHz)	AMF-7D-00101800-30-10P	1451710	11/03/2012	11/02/2013
Universal Radio Communication Tester	CMU200	104031	10/27/2012	10/26/2013
Chamber	3m	N/A	04/13/2012	04/12/2013

**SIEMIC, INC.**

Title: RF Test Report for GPS Vehicle/Asset Tracker  
Main Model: MC500  
Serial Model: N/A  
To: FCC Part 22(H) & FCC Part 24(E): 2012

Report No: 13020239-FCC-R1-V1  
Issue Date: April 15, 2013  
Page: 26 of 39  
www.siemic.com.cn

## **Annex A. ii. RADIATED EMISSIONS TEST DESCRIPTION**


### **EUT Characterisation**

EUT characterisation, over the frequency range from 30MHz to 1GHz (for FCC tests, until the 10<sup>th</sup> harmonic for operating frequencies  $\geq$  108MHz),, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m or 10m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS) or EMC 3m chamber.

### **Test Set-up**

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

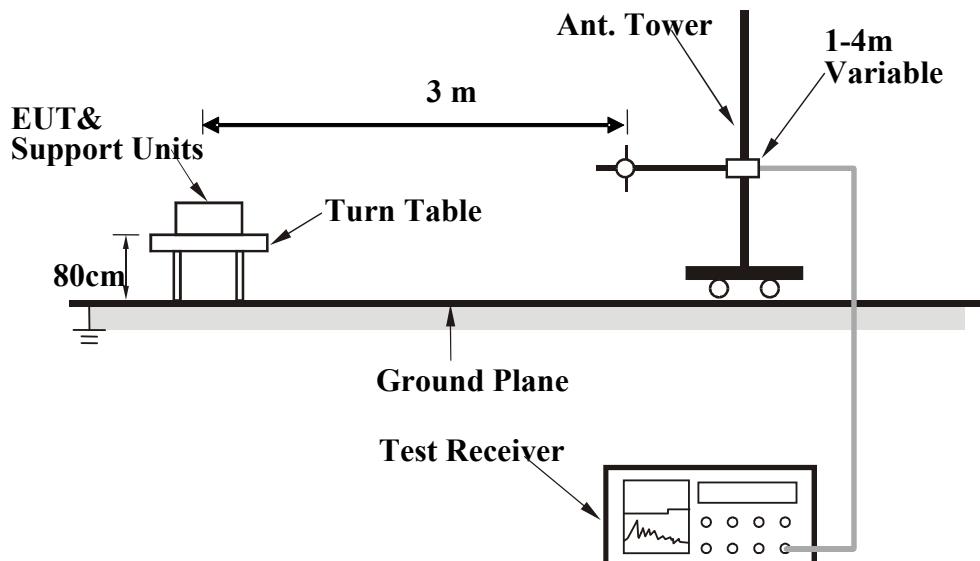

## Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

### Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site or EMC 10m chamber. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	Peak	100 kHz	100 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

## Description of Radiated Emission Program

This EMC Measurement software run LabView automation software and offers a common user interface for electromagnetic interference (EMI) measurements. This software is a modern and powerful tool for controlling and monitoring EMI test receivers and EMC test systems. It guarantees reliable collection, evaluation, and documentation of measurement results. Basically, this program will run a pre-scan measurement before it proceeds with the final measurement. The pre-scan routine will run the scan on four different antenna heights, 2 antenna polarity, and 360 degrees table rotation. For example, the program was set to run 30 MHz to 1 GHz scan; the program will first start from a meter antenna height and divide the 30 MHz to 1 GHz into 10 separate parts of maximum hold sweeps. Each parts of maximum hold sweep, the program will collect the data from 0 degree to 360 degrees table rotation. After the program complete the 1m scan, the antenna continues to rise to 2m and continue the scan. The step will repeated for all specified antenna height and polarity. This program will perform the Quasi Peak measurement after the signal maximization process and pre-scan routine. The final measurement will be base on the pre-scan data reduction result.

## Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note:

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

## Annex B. EUT AND TEST SETUP PHOTOGRAPHS

### Annex B.i. Photograph 1: EUT External Photo



EUT - Front View



EUT - Rear View




EUT - Top View



EUT - Bottom View



EUT - Left View

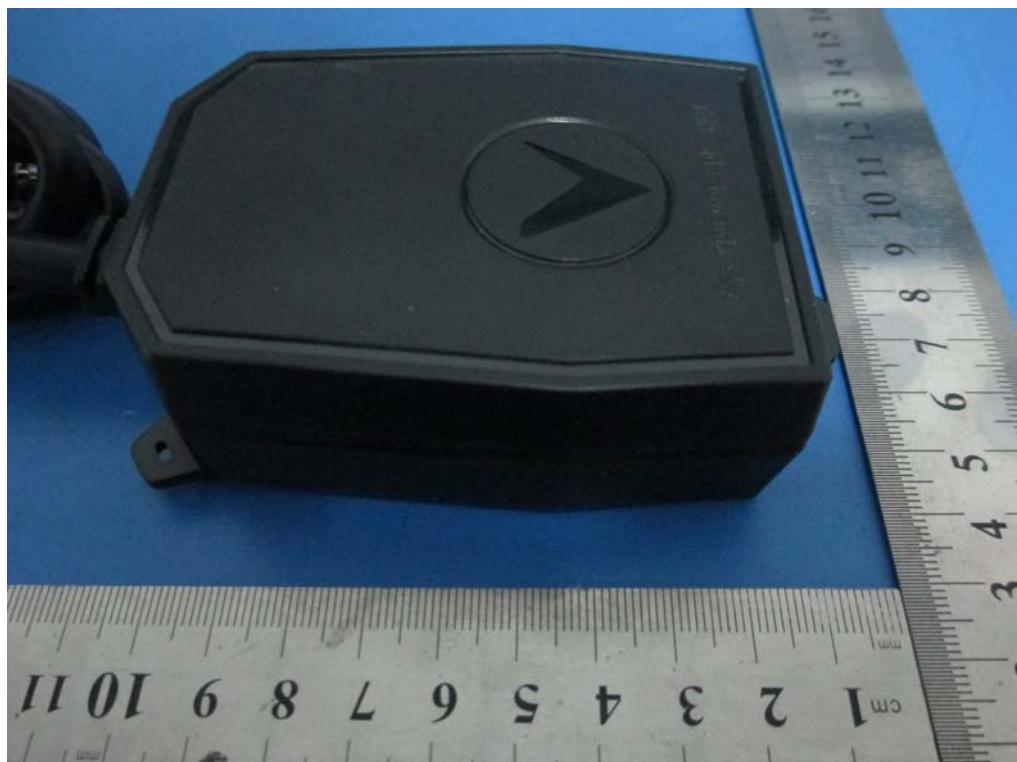


EUT - Right View

**Annex B.ii. Photograph 2: EUT Internal Photo**



Cover Off - Top View1

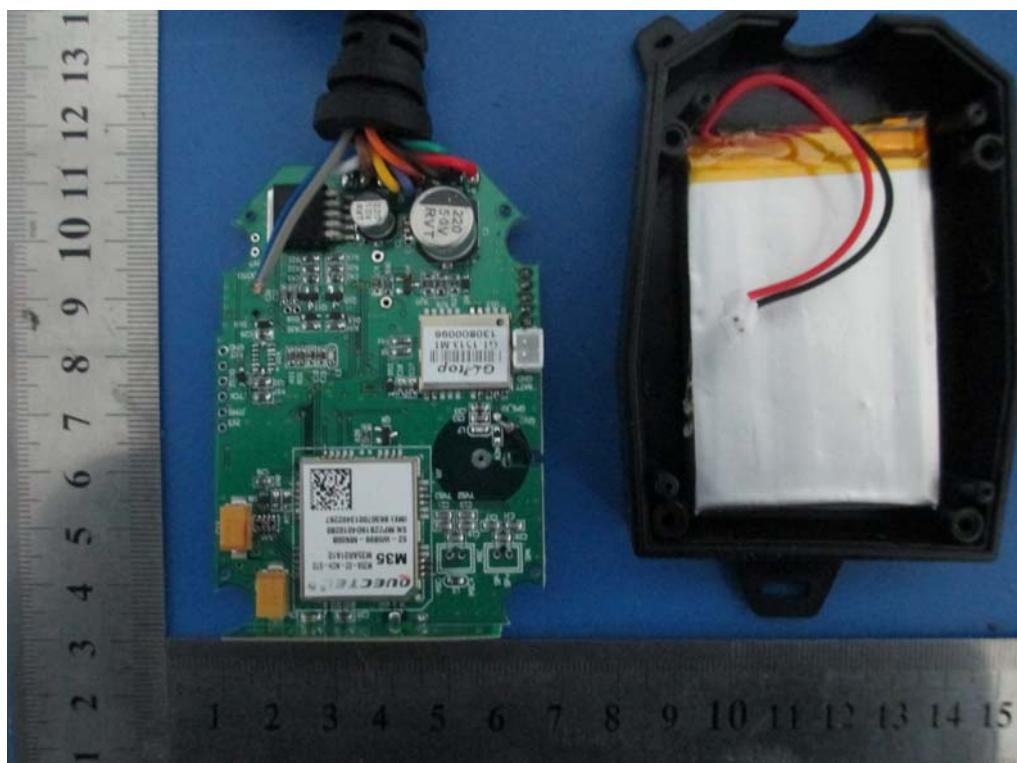


Cover Off - Top View2




Power Supply – Front View



EUT – Main PCB Board Front View

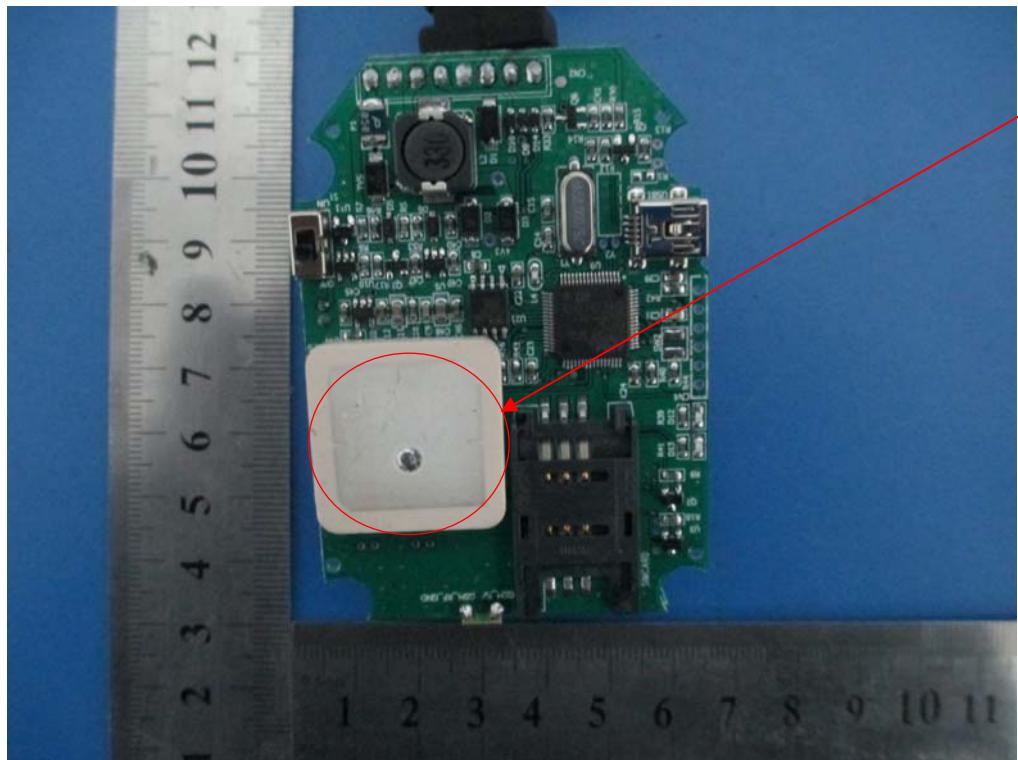


EUT – Main PCB Board Rear View

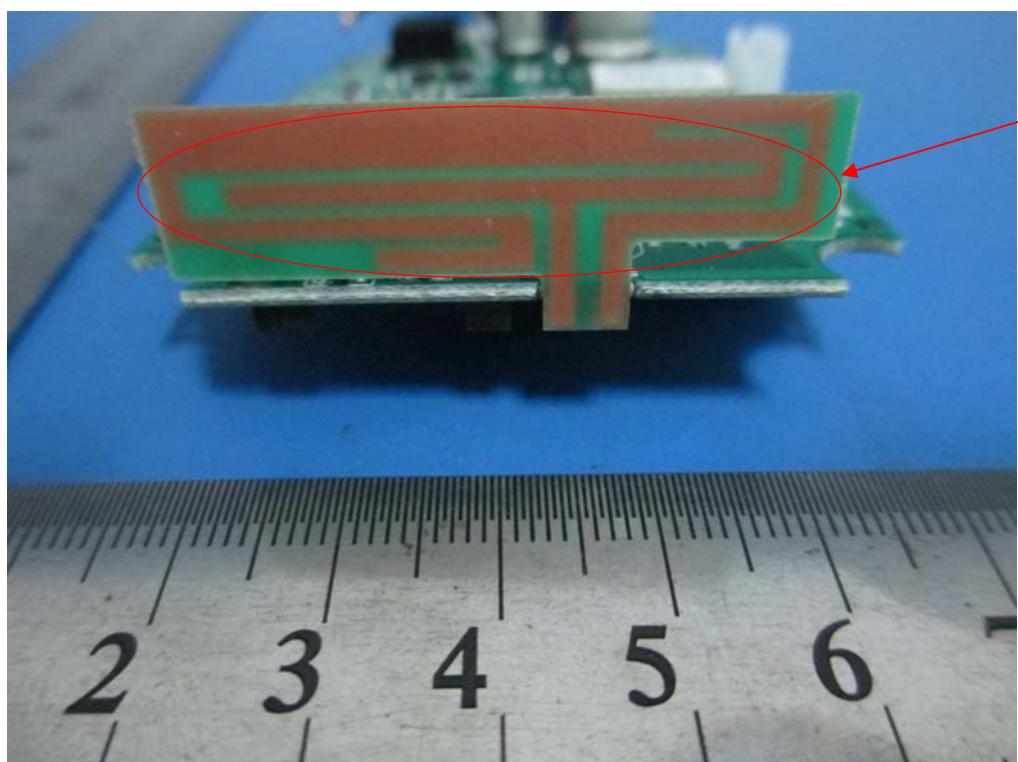

GSM Antenna – Front View

**Annex B.iii. Photograph 3: Test Setup Photo**

Radiated Spurious Emissions Test Setup Below 1GHz - Front View

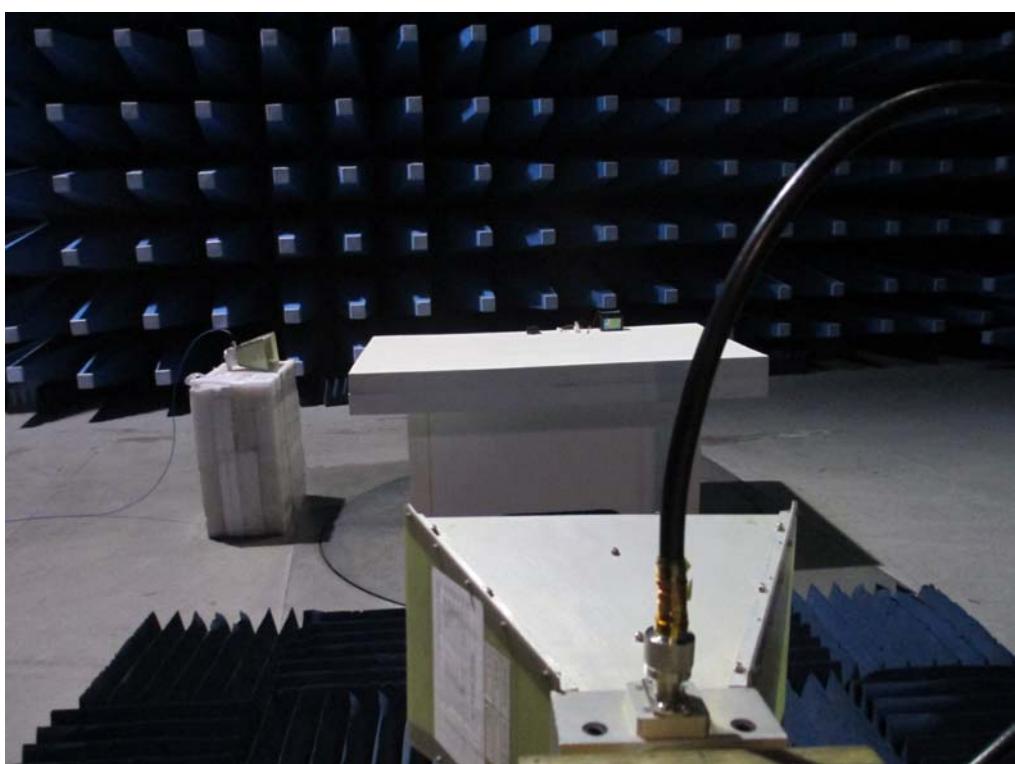

Radiated Spurious Emissions Test Setup Above 1GHz - Front View

## **Annex C. TEST SETUP AND SUPPORTING EQUIPMENT**


### **EUT TEST CONDITIONS**

#### **Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION**

The following is a description of supporting equipment and details of cables used with the EUT.

<b>Equipment Description (Including Brand Name)</b>	<b>Model &amp; Serial Number</b>	<b>Cable Description (List Length, Type &amp; Purpose)</b>
A-INFOMW Horn Antenna	A-INFOMW Horn Antenna	N/A
Artificial Load	N/A	N/A

## Block Configuration Diagram for Radiated Emissions

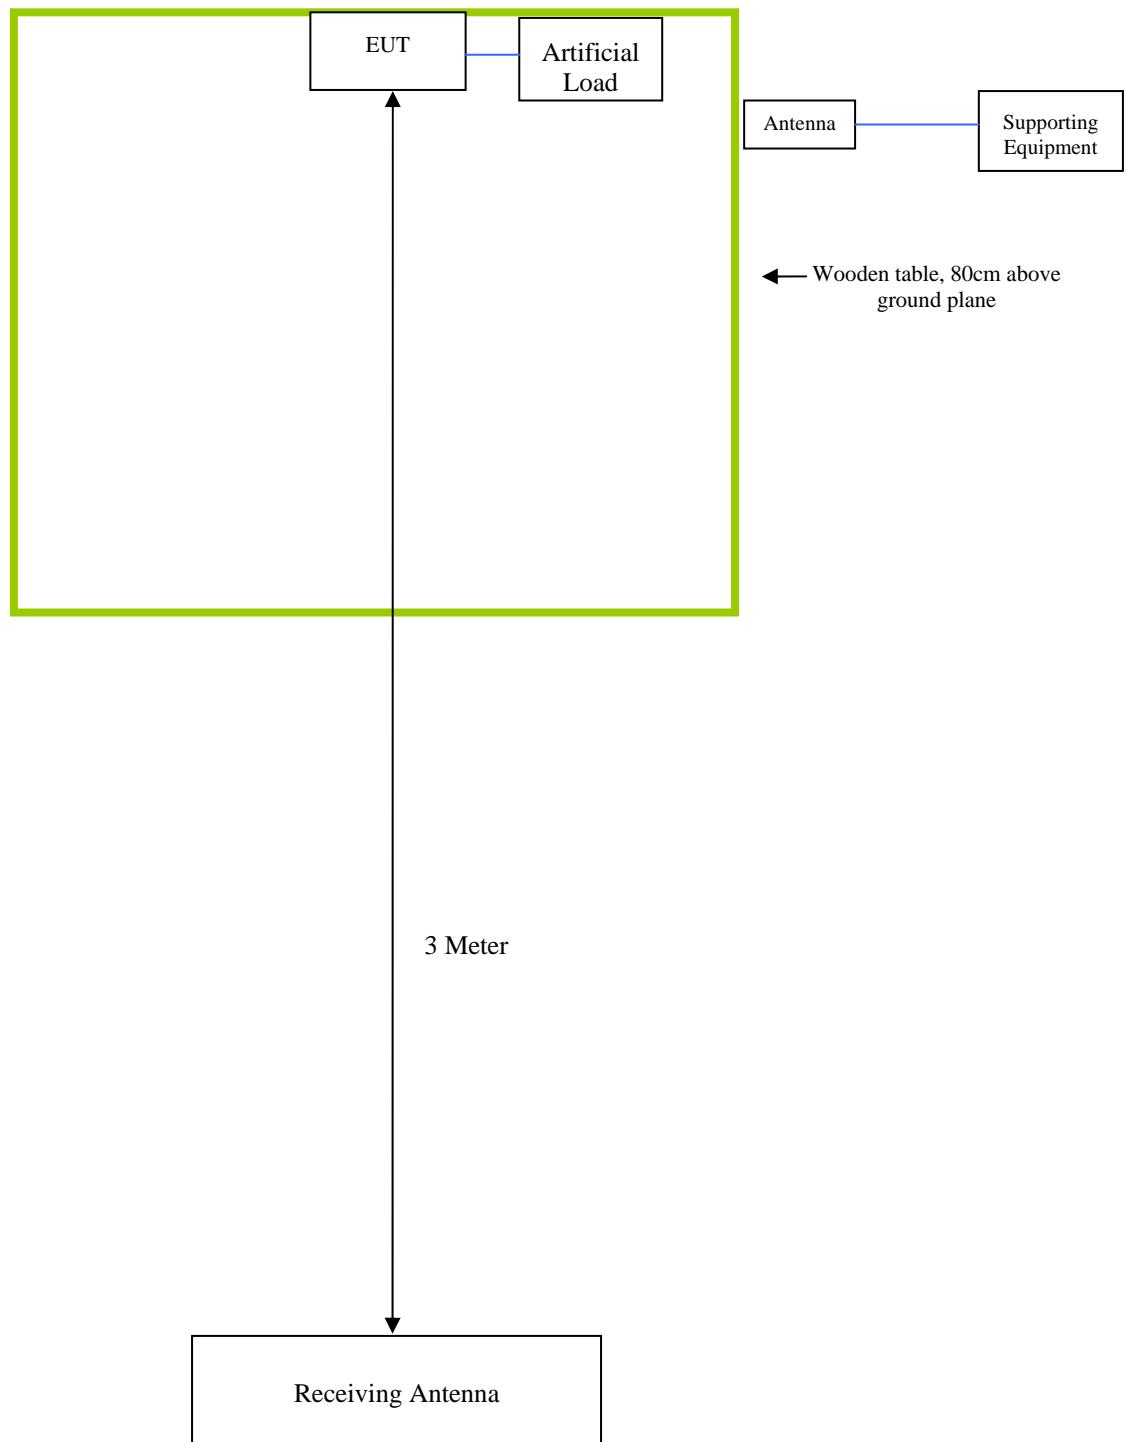

## **Annex C.ii. EUT OPERATING CONDITIONS**

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation
<b>Emissions Testing</b>	The EUT was communicating with base station and set to work at maximum output power.
<b>Others Testing</b>	The EUT was communicating with base station and set to work at maximum output power.



**SIEMIC, INC.**

Accessing global markets

**Title:** RF Test Report for GPS Vehicle/Asset Tracker  
**Main Model:** MC500  
**Serial Model:** N/A  
**To:** FCC Part 22(H) & FCC Part 24(E); 2012

**Report No:** 13020239-FCC-R1-V1  
**Issue Date:** April 15, 2013  
**Page:** 38 of 39  
[www.siemic.com.cn](http://www.siemic.com.cn)

## **Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST**

**Please see attachment**

## **Annex E. DECLARATION OF SIMILARITY**

NOTE: The model use the GSM module-M35 ( from Quectel Wireless), M35 FCC ID:  
**XMR201202M35.**

**Company Name:** ExtremTrac Technology Co., Ltd

**Address:** 4F, 2nd Building, MinZhi The 3rd Industrial Zone, Bao'an District, Shenzhen, 51811, China

**Tel:** +86 755 27384725

**Contact Person & Position:** Product Manager

**Email:** [tom.chan@extremtrac.com](mailto:tom.chan@extremtrac.com)

**Signature:**



EXTREMTRAC TECHNOLOGY CO., LTD  
極峰科技有限公司