



RF TEST REPORT

Report No.: SET2014-01530

Product Name: DJI LIGHTBRIDGE

FCC ID: SS3-201402240

IC: 11805A-201402240

Model No. : DJI Lightbridge (air)

Applicant: SZ DJI TECHNOLOGY CO.,LTD.

Address: Room 613、614, 6/F, HKUST SZ IER Bldg, No.9 Yuexing 1st Rd
Hi-Tech Park(South), Nanshan District, Shenzhen, Guangdong,
China

Issued by: CCIC-SET

Lab Location: Electronic Testing Building, Shahe Road, Xili, Nanshan District,
Shenzhen, 518055, P. R. China

Tel: 86 755 26627338 **Fax:** 86 755 26627238

This test report consists of 47 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 20 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name : DJI LIGHTBRIDGE

Brand Name : DJI

Trade Name : DJI

Applicant : SZ DJI TECHNOLOGY CO.,LTD.

Applicant Address : Room 613、 614, 6/F, HKUST SZ IER Bldg, No.9 Yuexing
1st Rd Hi-Tech Park(South), Nanshan District, Shenzhen,
Guangdong, China

Manufacturer..... : SZ DJI TECHNOLOGY CO.,LTD.


Manufacturer Address : Room 613、 614, 6/F, HKUST SZ IER Bldg, No.9 Yuexing
1st Rd Hi-Tech Park(South), Nanshan District, Shenzhen,
Guangdong, China

Test Standards..... : 47 CFR Part 15 Subpart C
RSS-GEN Issue 3, December 2010
RSS-210 Issue 8, December 2010
ANSI C63.10:2009 : American National Standard for
Testing Unlicensed Wireless Devices

Test Result : PASS

Tested by :  2014.03.01

Lu Lei, Test Engineer

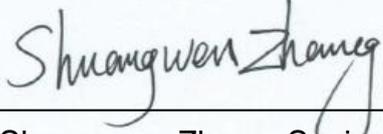Reviewed by..... :  2014.03.01

Shuangwen Zhang, Senior EGINEER

Approved by :  2014.03.01

Wu Li'an, Manager



TABLE OF CONTENTS

1.	GENERAL INFORMATION	5
1.1	EUT Description	5
1.2	Support Equipment	5
1.3	Test Standards and Results	5
1.4	Facilities and Accreditations	7
1.4.1	Facilities	7
1.4.2	Test Environment Conditions	7
2.	47 CFR PART 15C REQUIREMENTS	8
2.1	Antenna requirement	8
2.1.1	Applicable Standard	8
2.1.2	Antenna Information	8
2.1.3	Result: comply	8
2.2	Peak Output Power	9
2.2.1	Requirement	9
2.2.2	Test Description	9
2.2.3	Test Result	9
2.3	Bandwidth	13
2.3.1	Requirement	13
2.3.2	Test Description	13
2.3.3	Test Result	13
2.4	Conducted Spurious Emissions	21
2.4.1	Requirement	21
2.4.2	Test Description	21
2.4.3	Test Result	21
2.5	Power spectral density (PSD)	25
2.5.1	Requirement	25
2.5.2	Test Description	25
2.5.3	Test Result	26
2.6	Band Edge	30
2.6.1	Requirement	30



2.6.2 Test Description30

2.6.3 Test Result.....31

2.7 Radiated Emission38

2.7.1 Requirement38

2.7.2 Test Description39

2.7.3 Test Result.....41

2.8 RF exposure evaluation46

2.8.1 . Limits For Maximum Permissible Exposure46

2.8.2. Test Result.....46

2.8.3. Conclusion47

Change History		
Issue	Date	Reason for change
1.0	Mar 01, 2014	First edition



4	ANSI C63.10 2009	American National Standard for Testing Unlicensed Wireless Devices
---	------------------	---

Test detailed items/section required by FCC rules and results are as below:

No	Section	Section in RSS-GEN, RSS-210	Description	Result
1	15.203	7.1.2	Antenna Requirement	PASS
2	15.247(b)	A8.4(2)	Peak Output Power	PASS
3	15.247(a)	A8.2(a)	Bandwidth	PASS
4	15.247(d)	A8.5	Conducted Spurious Emission	PASS
5	15.247(d)	A8.5	Band Edge	PASS
6	15.207	7.2.4	Conducted Emission	PASS
7	15.209 15.247(c)	4.9	Radiated Emission	PASS
8	15.247(e)	A8.2(b)	Power spectral density (PSD)	PASS

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10 2009.

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item.

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel
Peak Conducted Output Power Power Spectral Density 6dB Bandwidth Spurious RF conducted emission Radiated Emission 9kHz~1GHz& Radiated Emission 1GHz~10th Harmonic	COFDM	1Mbps	1/4/8
	COFDM	1Mbps	1/4/8
Band Edge	COFDM	1Mbps	1/8



1.4 Facilities and Accreditations

1.4.1 Facilities

CNAS-Lab Code: L1659

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659. A 12.8*6.8*6.4 (m) fully anechoic chamber was used for the radiated spurious emissions test.

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, Renewal date Nov. 19, 2011, valid time is until Nov. 18, 2014.

IC-Registration No.: 11185A

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on July. 15, 2013, valid time is until July. 15, 2016.

1.4.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 °C - 35 °C
Relative Humidity (%):	30% -60%
Atmospheric Pressure (kPa):	86KPa-106KPa



2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

And according to FCC 47 CFR Section 15.247(c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

2.1.2 Antenna Information

Antenna Category: External antenna

EUT has two external antennas via non-standard connector, which can be removed.

Antenna General Information:

No.	EUT Model	Ant. Cat.	Ant. Type	Gain(dBi)
1	DJI LIGHTBRIDGE	External	MMCX	2.5

2.1.3 Result: comply

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2 Peak Output Power

2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

2.2.2 Test Description



The measured output power was calculated by the reading of the spectrum analyzer and calibration.

A. Test Setup:

The EUT (Equipment under the test) which is powered by the Battery is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10

2.2.3 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	Measured Output Peak Power(dBm)		Total Output Peak Power (dBm)	Refer to Plot	Limits (dBm)	Result
		Antenna 1 port	Antenna 2 port				
1	2406.5	22.78	22.96	25.88	Plot 2.2 A/D	30	PASS
4	2436.5	22.60	22.66	25.64	Plot 2.2 B/E	30	PASS
8	2476.5	22.20	22.53	25.38	Plot 2.2 C/F	30	PASS




B. Test Plots:


Antenna 1 port:

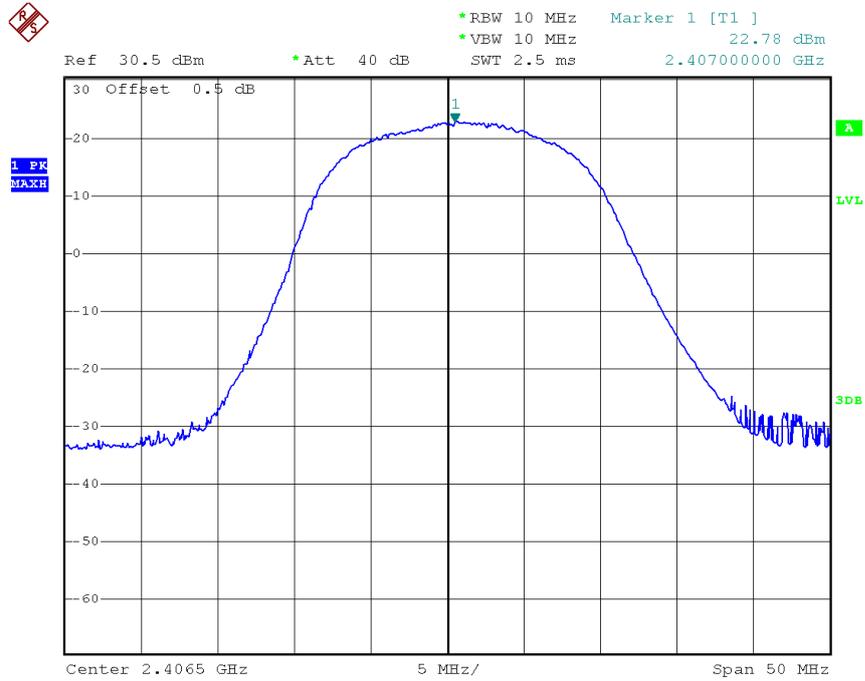

(Plot 2.2 A: Channel 1: 2406.5MHz)

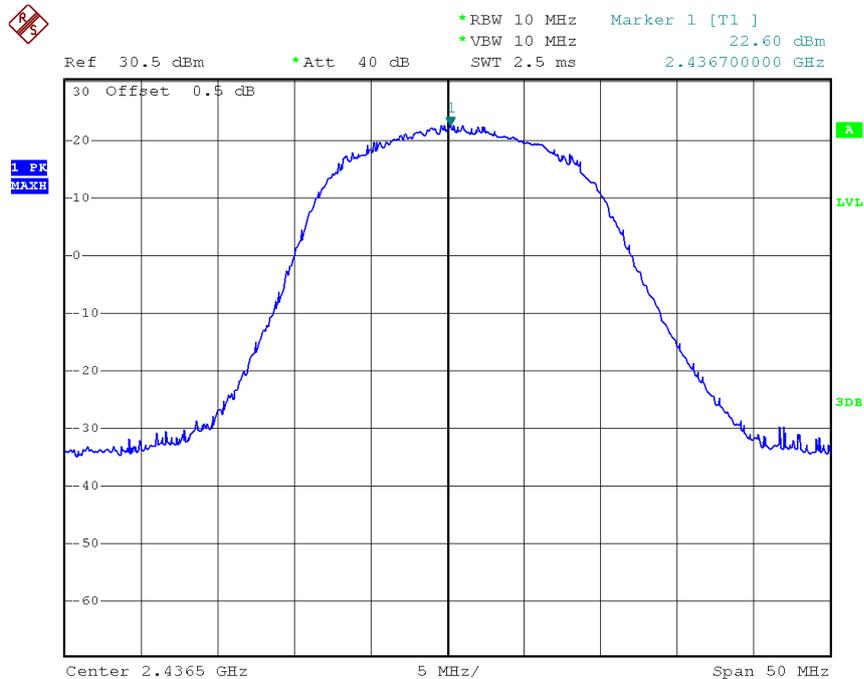


(Plot 2.2 B: Channel 4: 2436.5MHz)

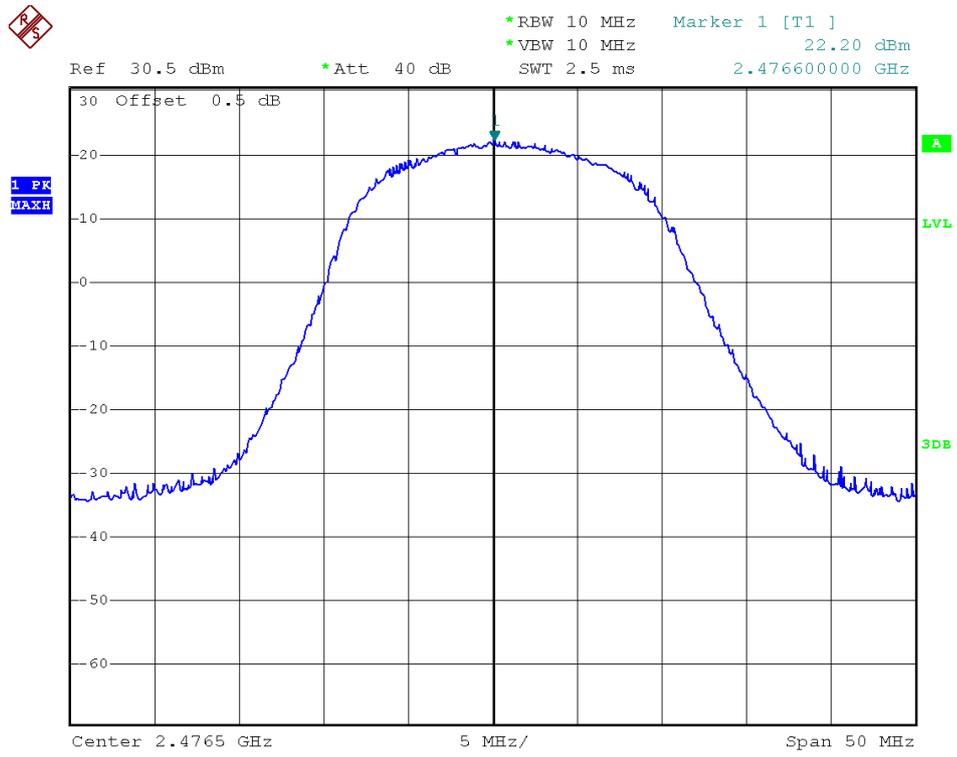


(Plot 2.2 C: Channel 8: 2476.5MHz)


Antenna 2 port:

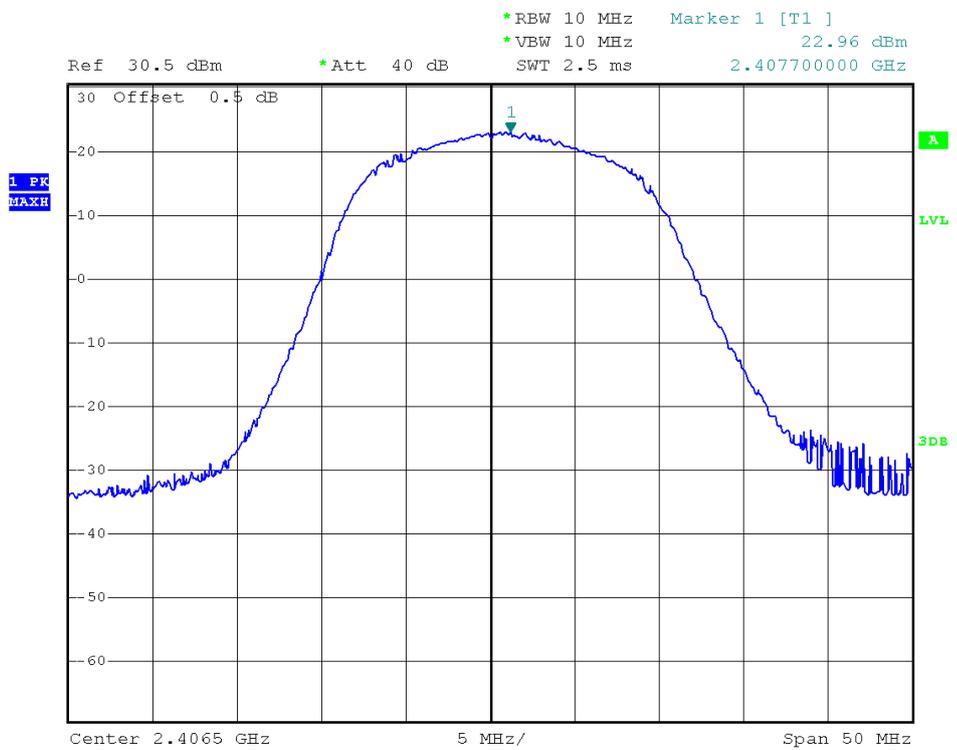

(Plot 2.2 D: Channel 1: 2406.5MHz)

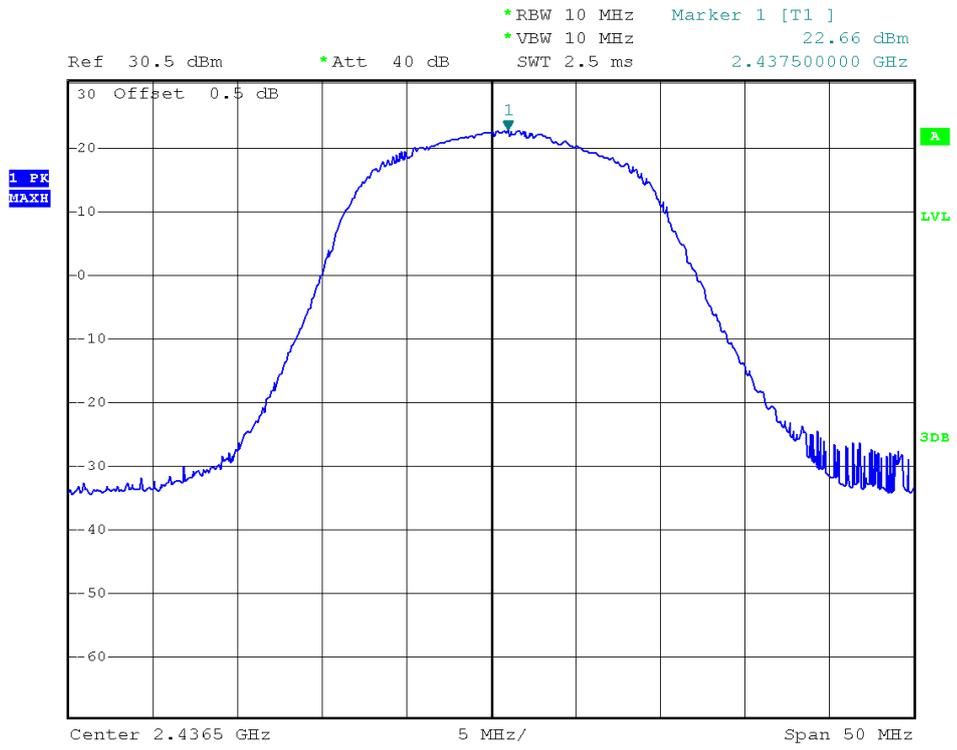

(Plot 2.2 E: Channel 4: 2436.5MHz)

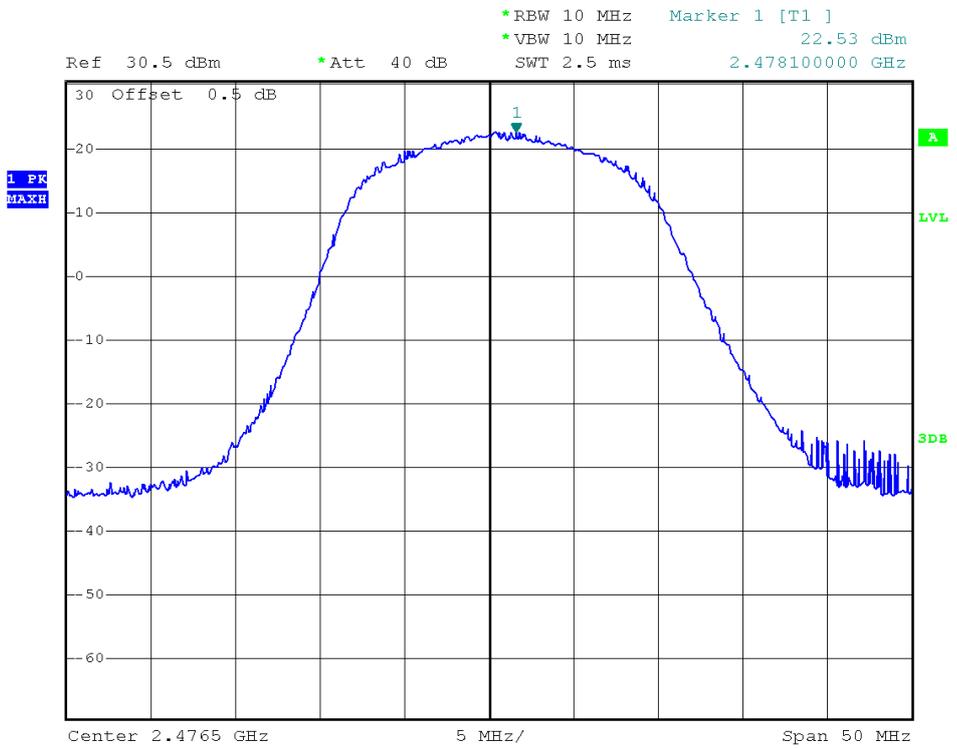

(Plot 2.2 F: Channel 8: 2476.5MHz)


2.3 Bandwidth

2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

2.3.2 Test Description

A. Test Set:

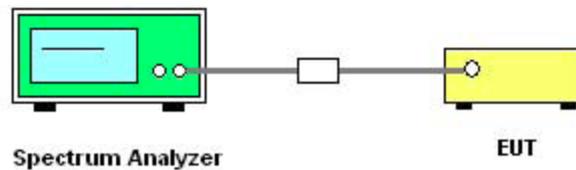

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

A. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10

2.3.3 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the Module.

A. Test Verdict:

6 dB Bandwidth

Antenna 1 port:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
1	2406.5	9.54	Plot 2.3 A	≥ 500	PASS
4	2436.5	9.54	Plot 2.3 B	≥ 500	PASS
8	2476.5	9.54	Plot 2.3 C	≥ 500	PASS




Antenna 2 port:


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
1	2406.5	9.48	Plot 2.3 D	≥500	PASS
4	2436.5	9.51	Plot 2.3 E	≥500	PASS
8	2476.5	9.54	Plot 2.3 F	≥500	PASS

B. Test Plots:


Antenna 1 port:

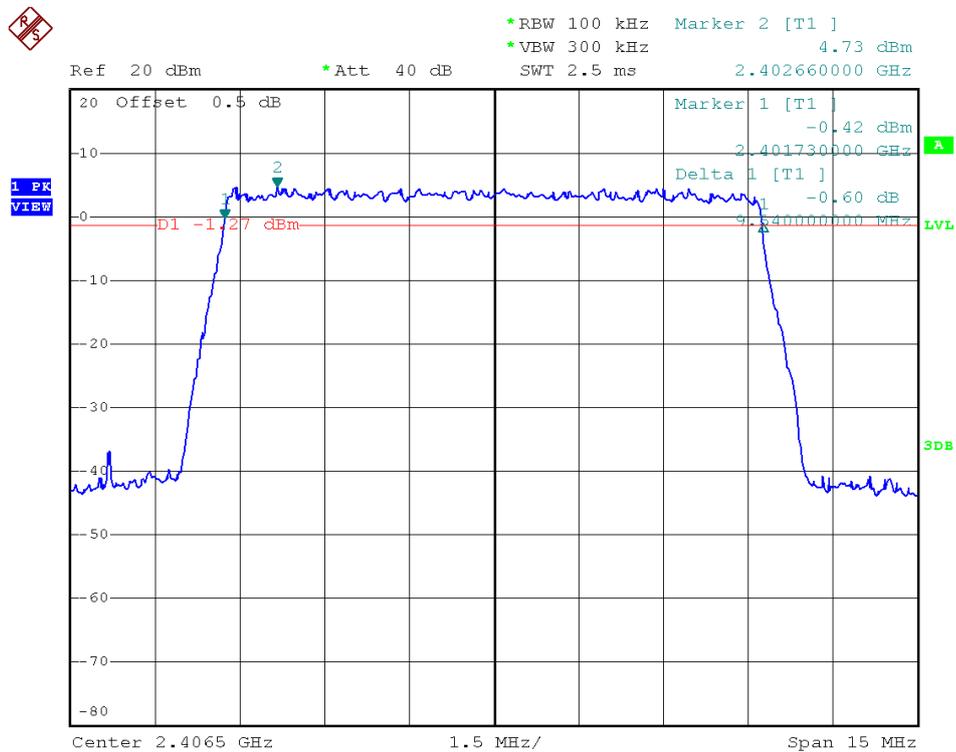

(Plot 2.3 A: Channel 1: 2406.5MHz)

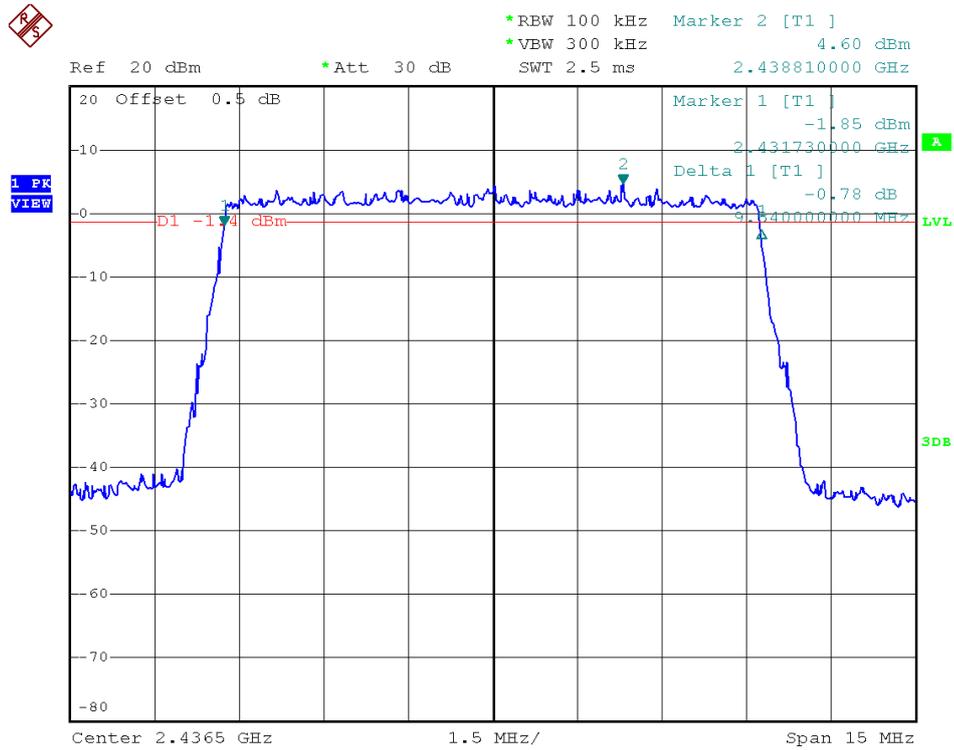


(Plot 2.3 B: Channel 4: 2436.5 MHz)

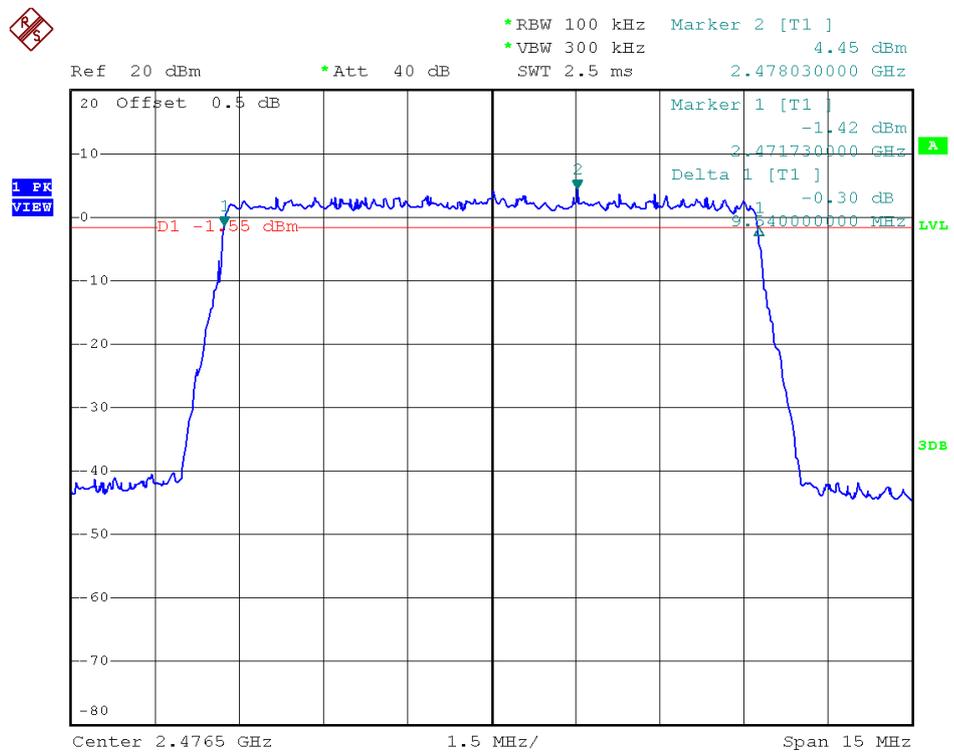


(Plot 2.3 C: Channel 8: 2476.5MHz)




Antenna 2 port:

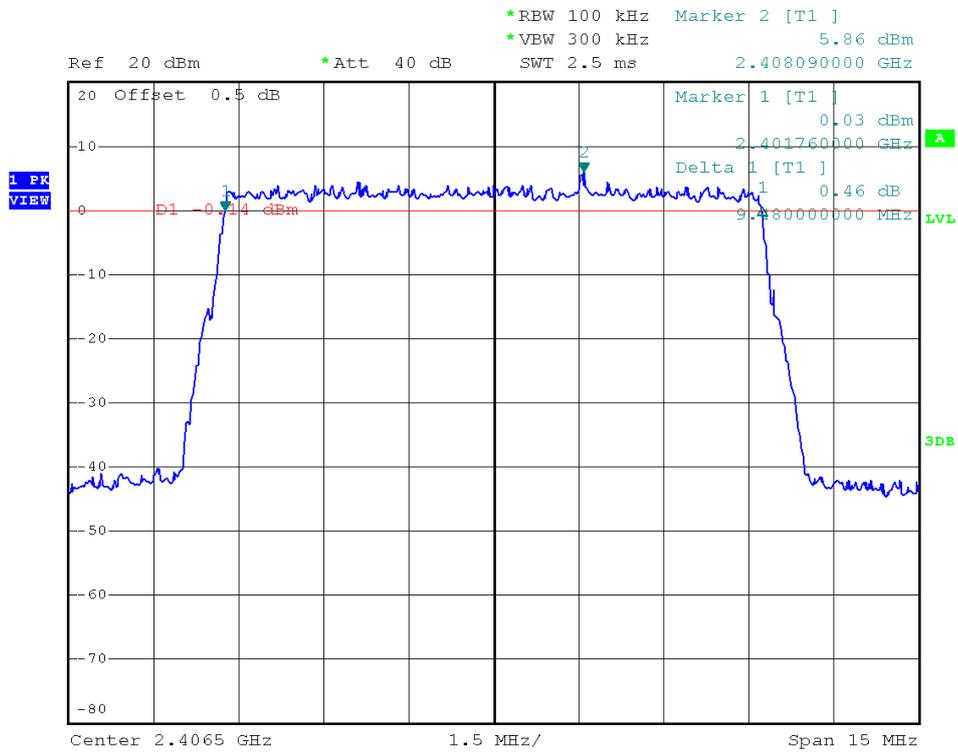

(Plot 2.3 D: Channel 1: 2406.5MHz)

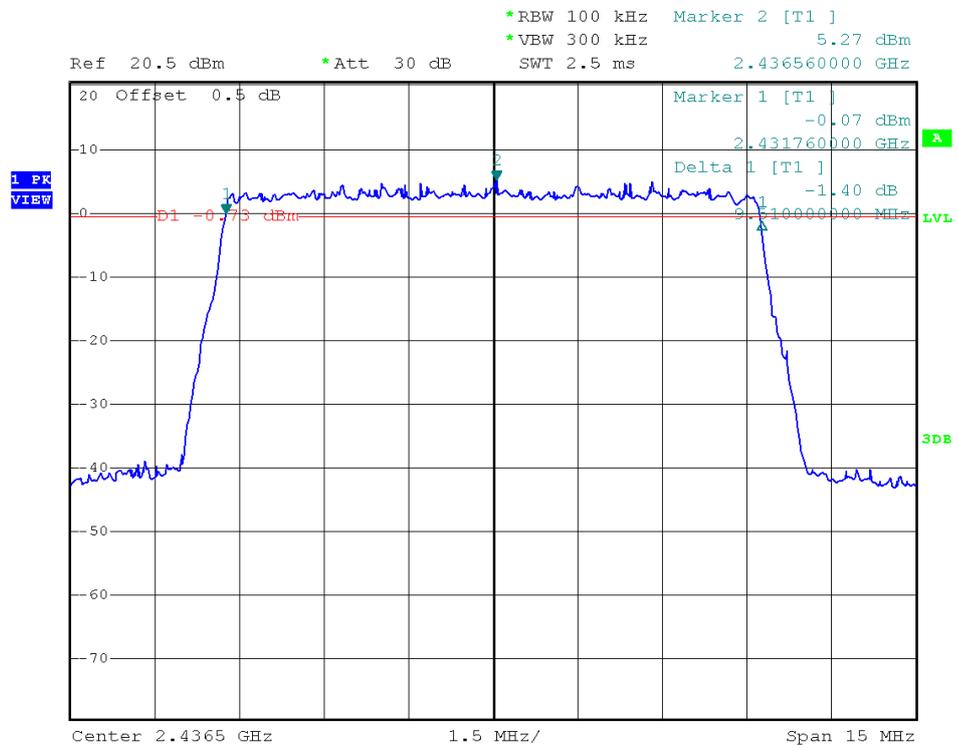

(Plot 2.3 E: Channel 4: 2436.5MHz)

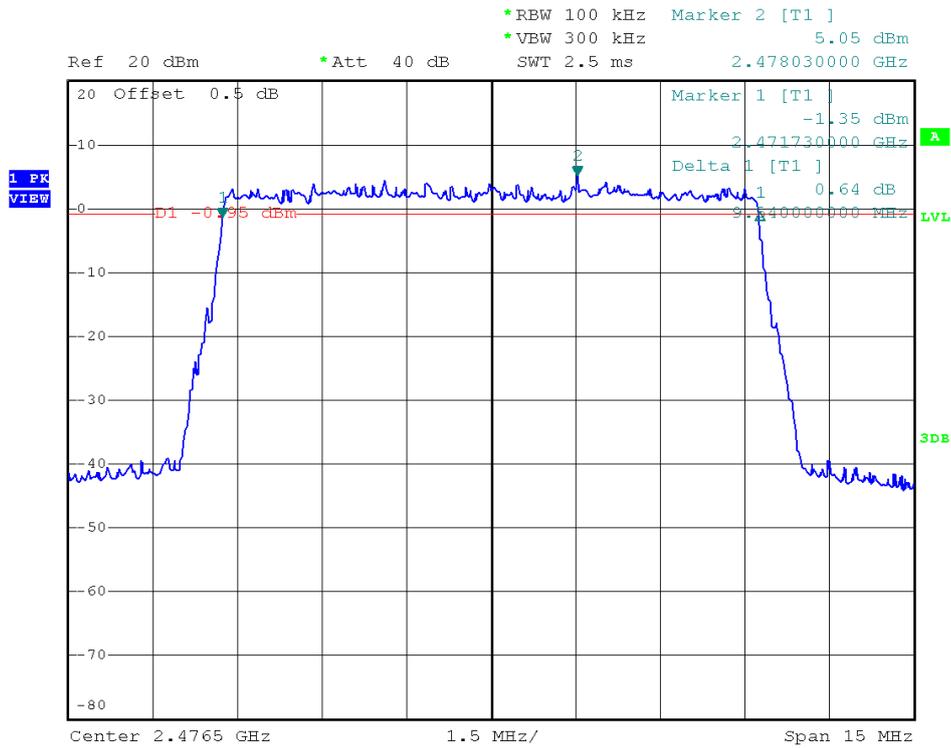

(Plot 2.3 F: Channel 8: 2476.5MHz)

99% Bandwidth

A. Test Verdict:

Antenna 1 port:

Channel	Frequency (MHz)	99% Bandwidth (MHz)	Refer to Plot
1	2406.5	9.45	Plot 2.3 G
4	2436.5	9.45	Plot 2.3 H
8	2476.5	9.48	Plot 2.3 I


Antenna 2 port:

Channel	Frequency (MHz)	99% Bandwidth (MHz)	Refer to Plot
1	2406.5	9.44	Plot 2.3 J
4	2436.5	9.46	Plot 2.3 K
8	2476.5	9.47	Plot 2.3 L




B. Test Plots:


Antenna 1 port:

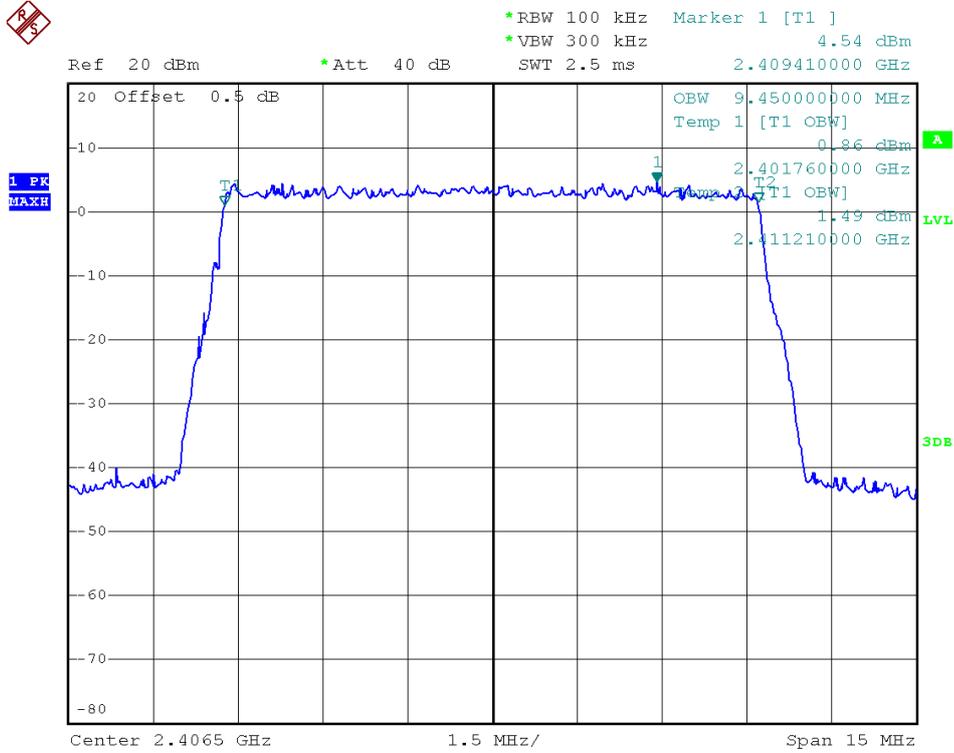

(Plot 2.3 G: Channel 1: 2406.5MHz)

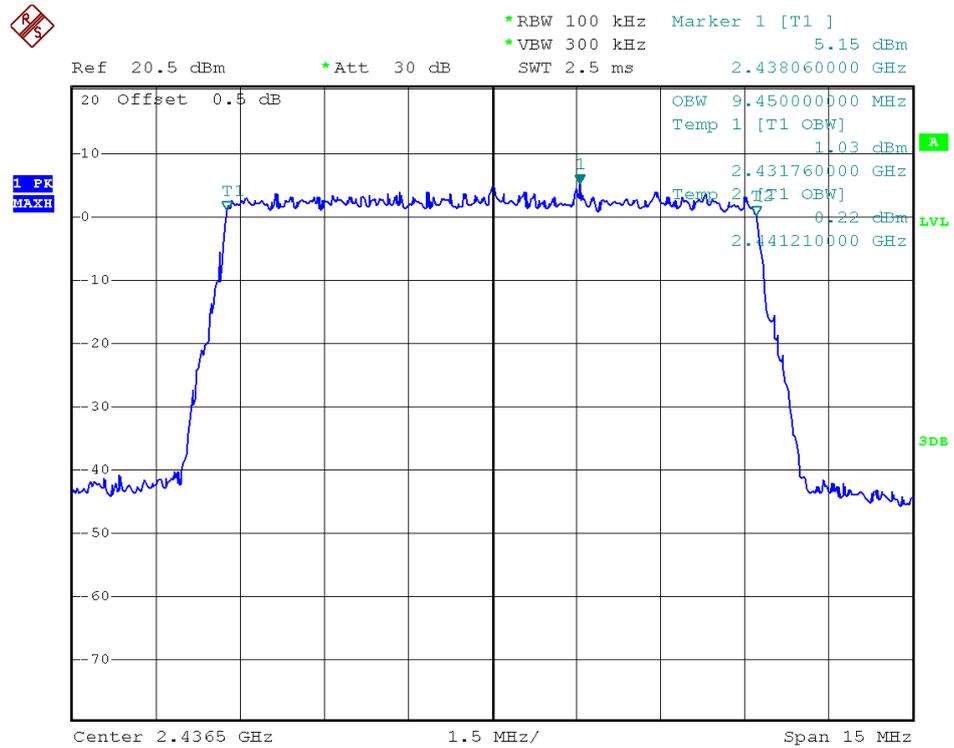


(Plot 2.3 H: Channel 4: 2436.5 MHz)

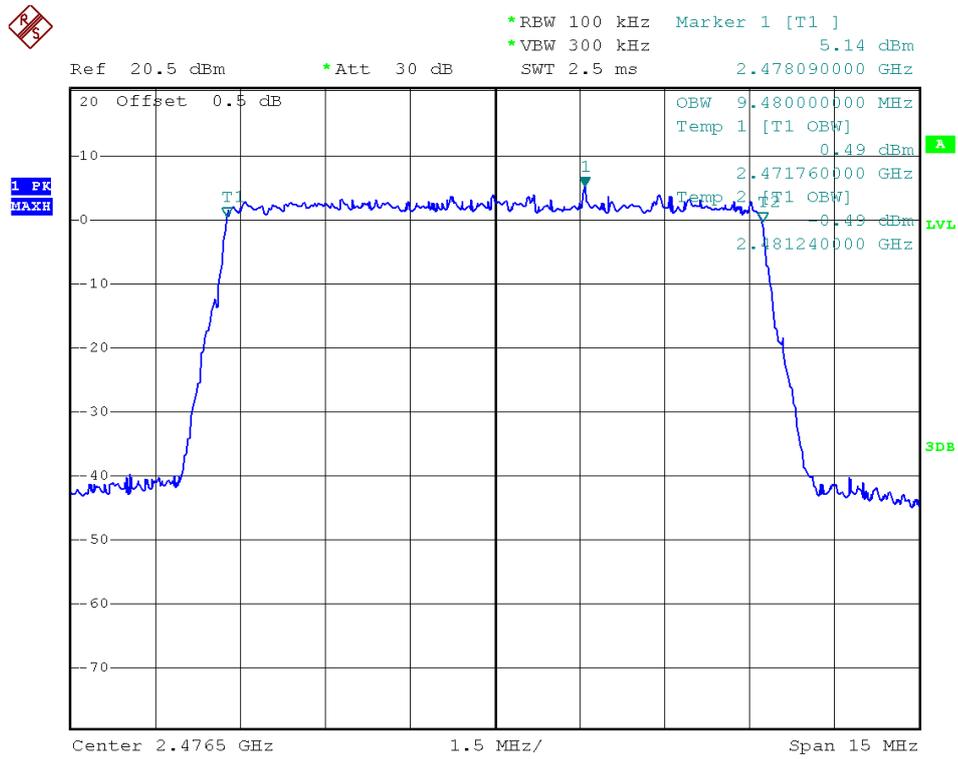


(Plot 2.3 I: Channel 8: 2476.5MHz)


Antenna 2 port:

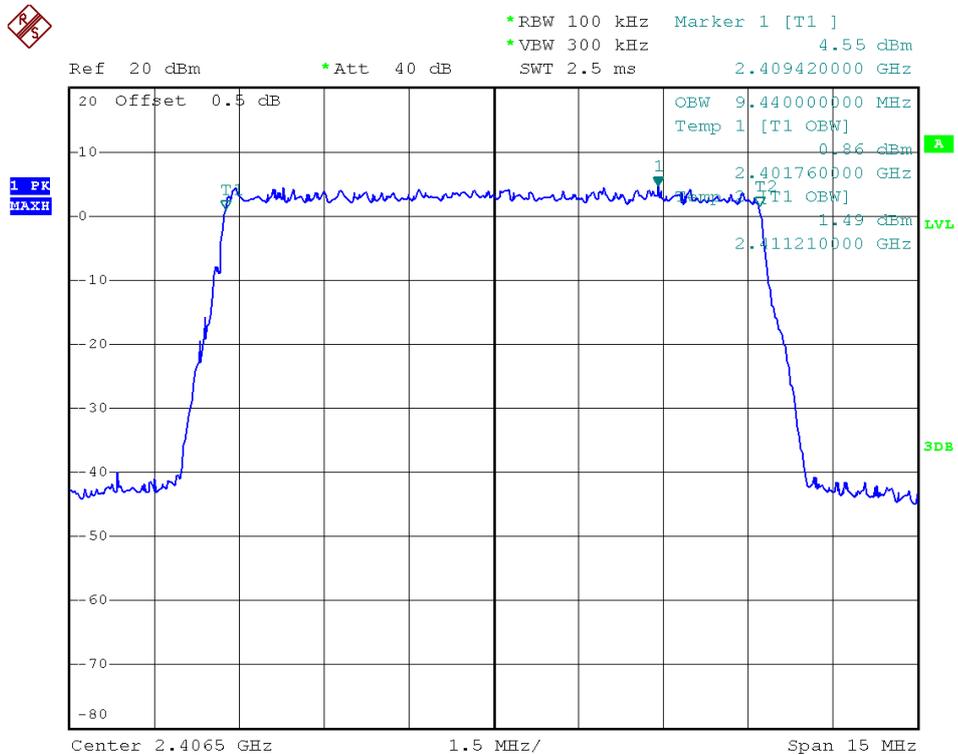

(Plot 2.3 J: Channel 1: 2406.5MHz)

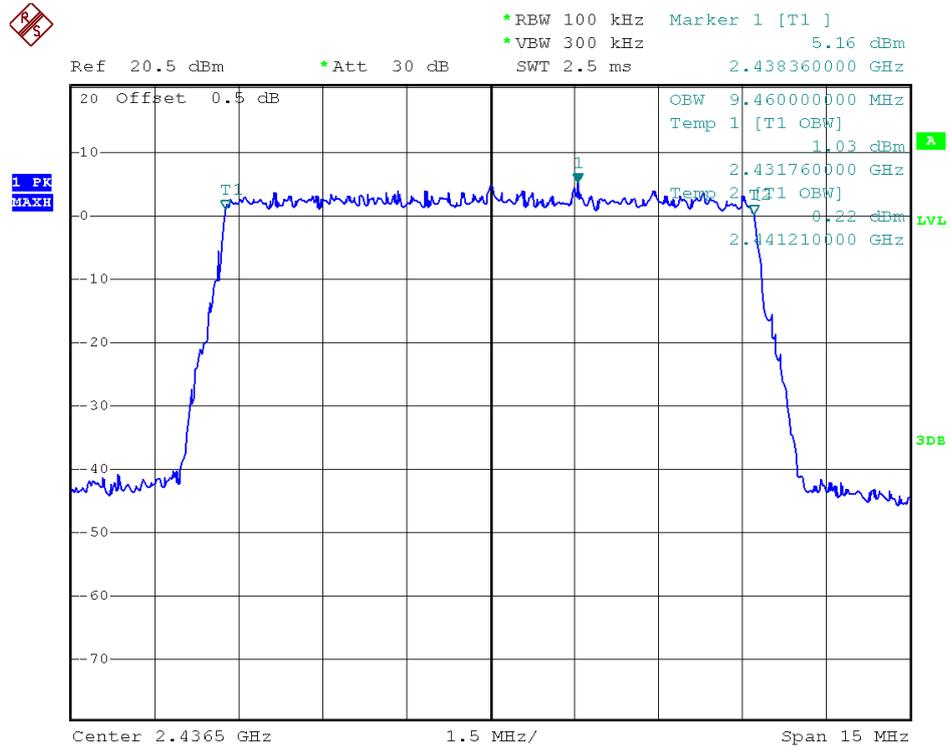

(Plot 2.3 K: Channel 4: 2436.5MHz)

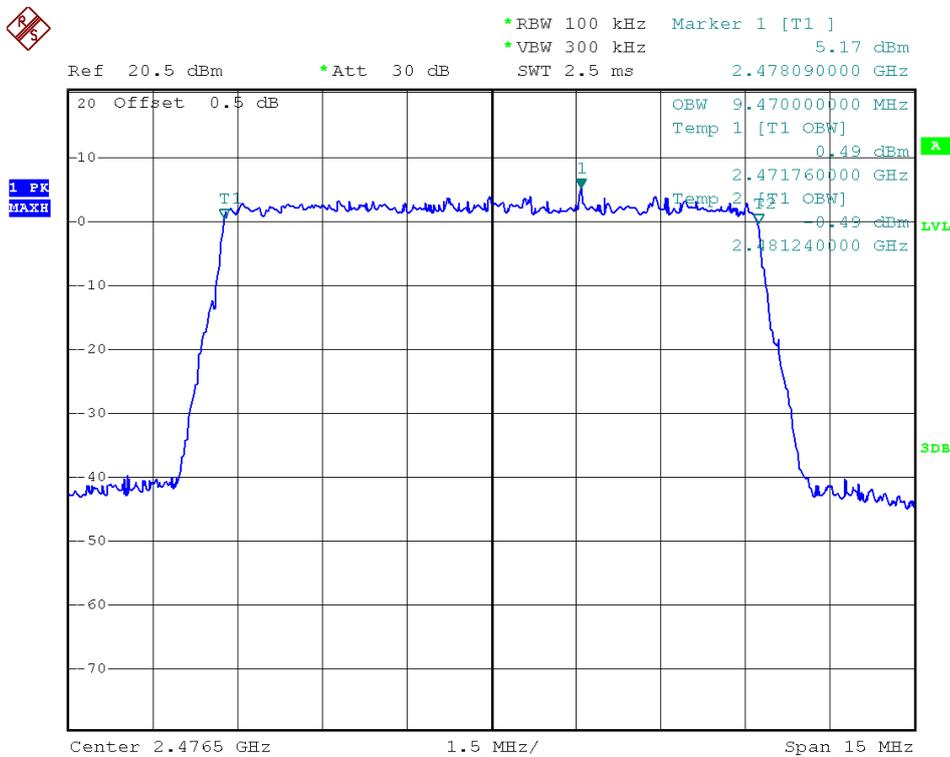

(Plot 2.3 L: Channel 8: 2476.5MHz)


2.4 Conducted Spurious Emissions

2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.4.2 Test Description

A. Test Set:

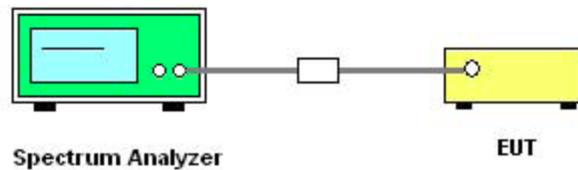

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10

2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

A. Test Verdict:


Channel	Frequency (MHz)	Refer to Plot	Limit (dBc)	Verdict
1	2406.5	Plot 2.4 A/D	-20	PASS
4	2436.5	Plot 2.4 B/E	-20	PASS
8	2476.5	Plot 2.4 C/F	-20	PASS




B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.


Antenna 1 port:

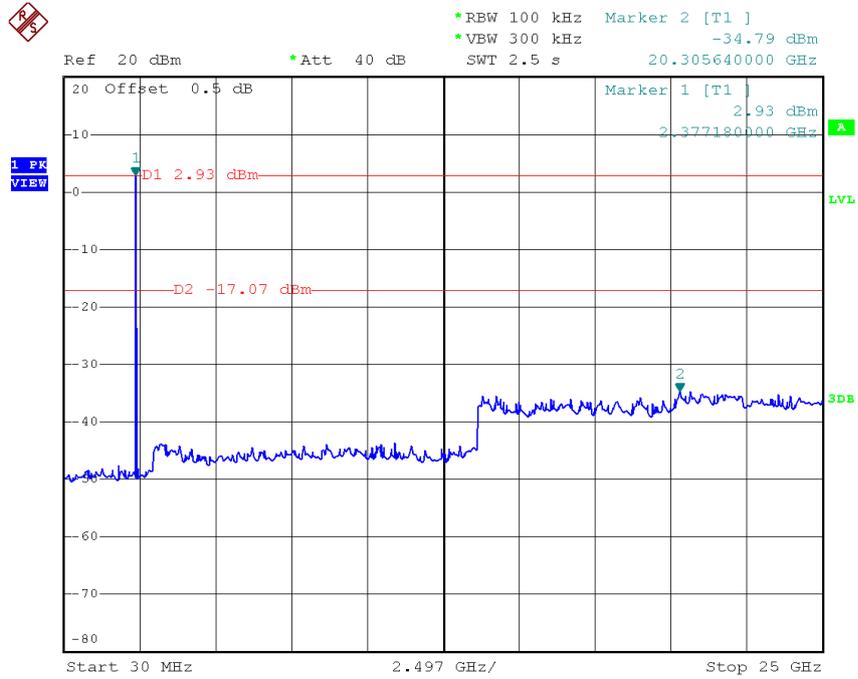

(Plot 2.4 A: Channel = 1, 30MHz to 25GHz)

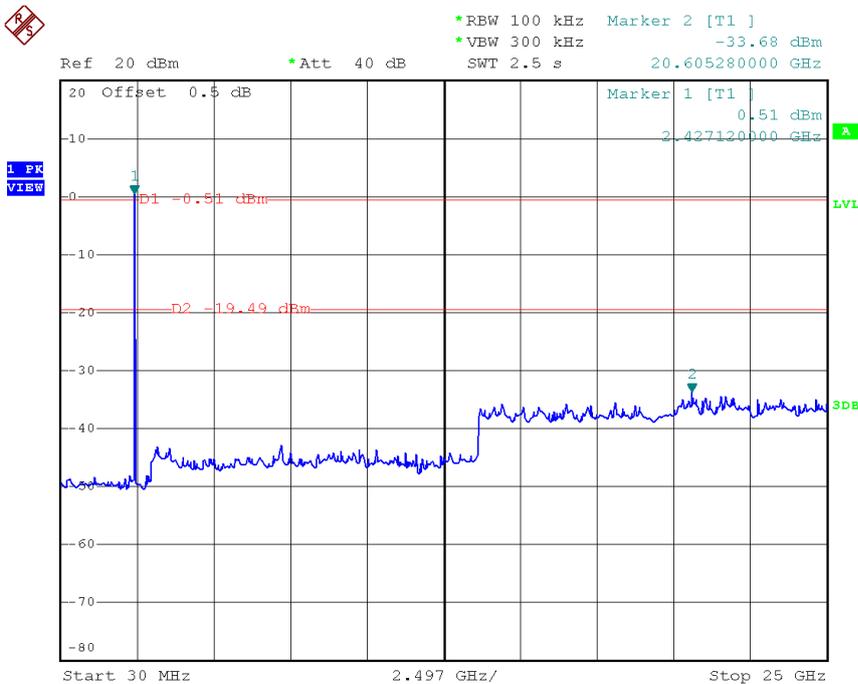


(Plot 2.4 B: Channel = 4, 30MHz to 25GHz)

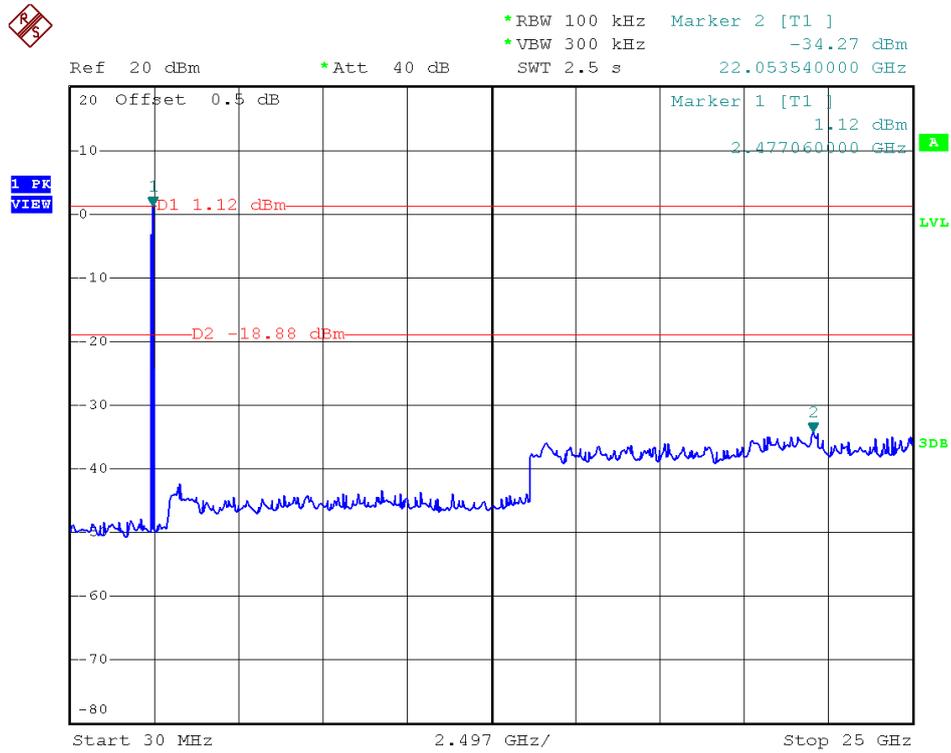


(Plot 2.4 C: Channel = 8, 30MHz to 25GHz)


Antenna 2 port:

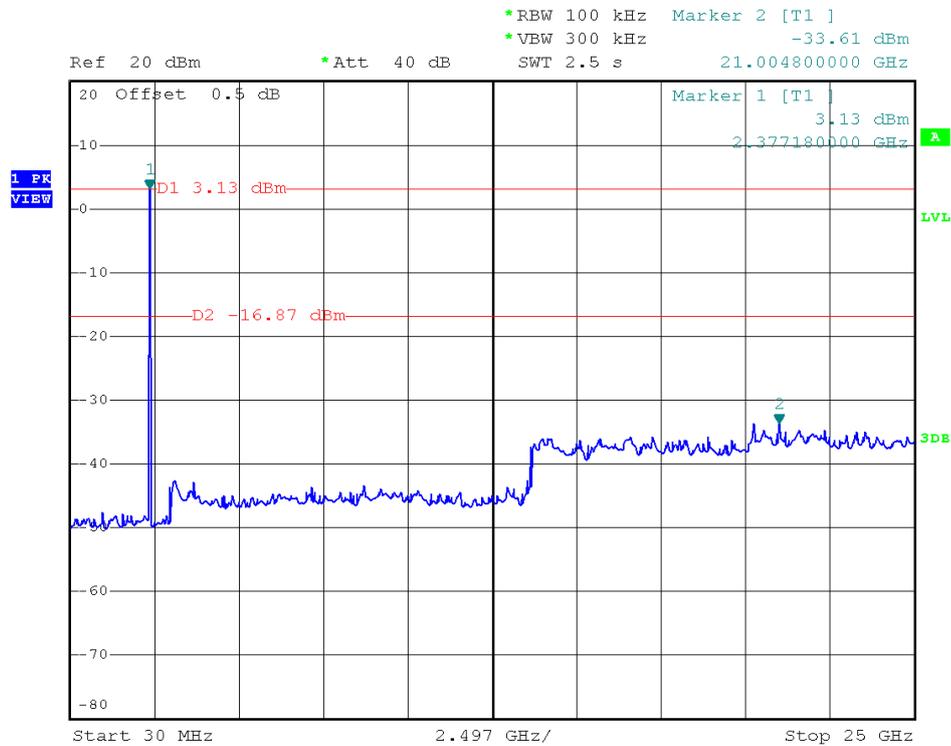

(Plot 2.4 D: Channel = 1, 30MHz to 25GHz)

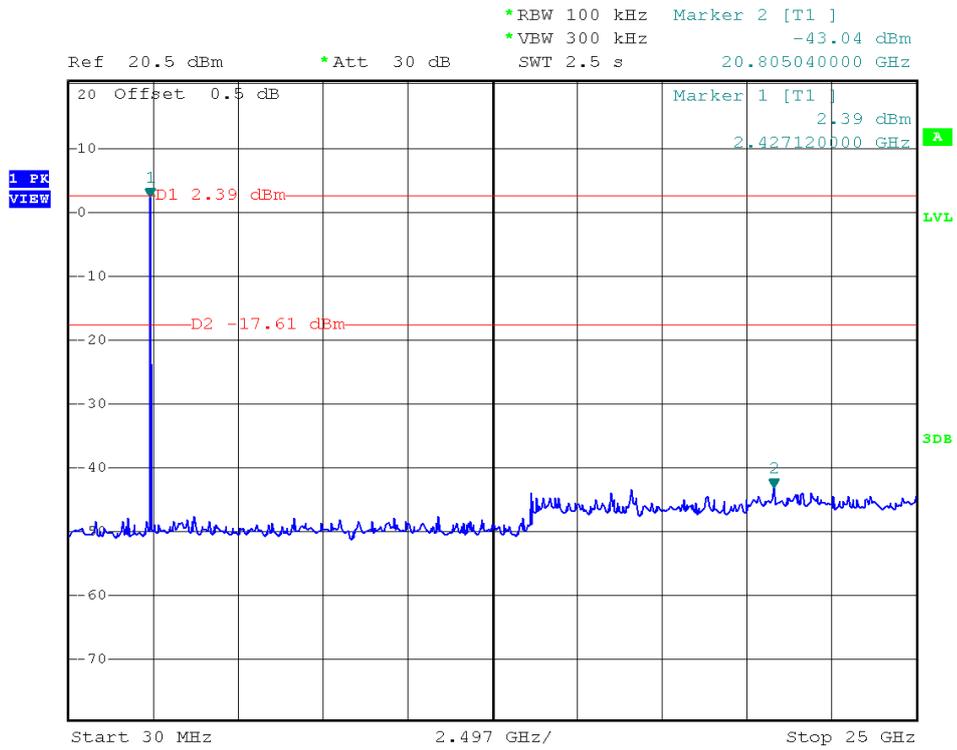

(Plot 2.4 E: Channel = 4, 30MHz to 25GHz)

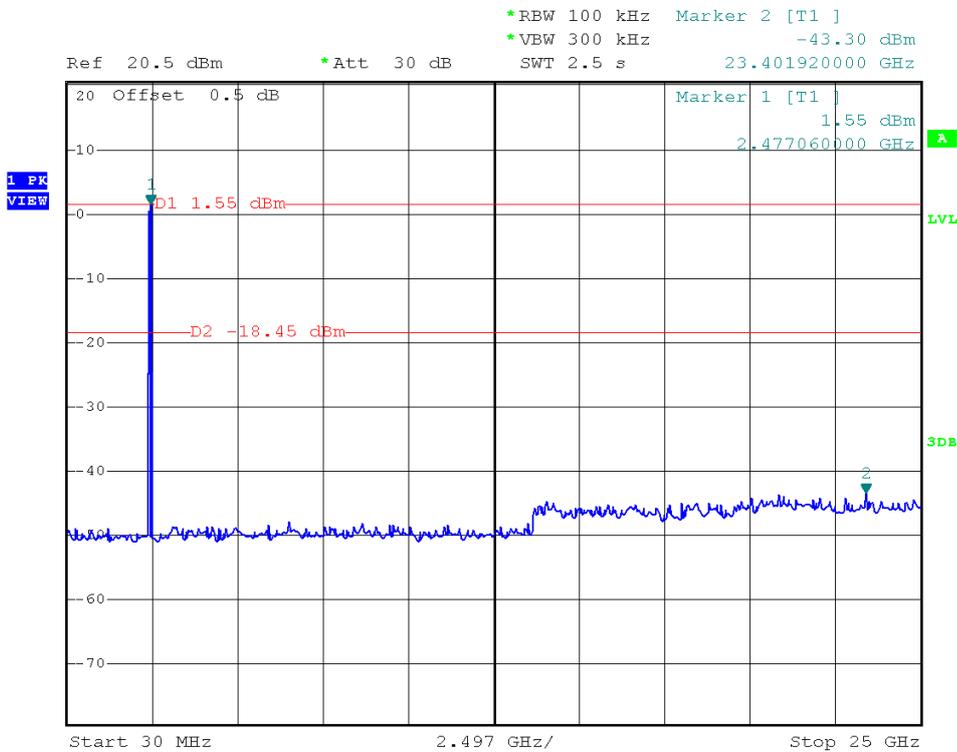

(Plot 2.4 F: Channel = 8, 30MHz to 25GHz)


2.5 Power spectral density (PSD)

2.5.1 Requirement

According to FCC section 15.247(d), the same method of determining the conducted output power shall be used to determine the power spectral density. If a peak output power is measured, then a peak power spectral density measurement is required. If an average output power is measured, then an average power spectral density measurement should be used.

2.5.2 Test Description

A. Test Set:

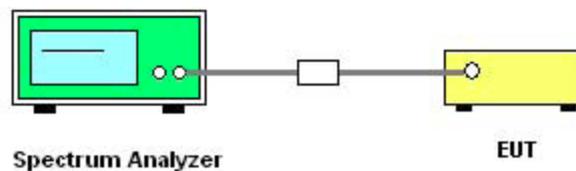

The EUT which is powered by the Battery, is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss and Atten as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Test Procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW \geq 3 kHz.
4. Set the VBW \geq 3 x RBW.
5. Detector = peak.
6. Sweep time = auto couple
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

C. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Spectrum Analyzer	R&S	FSP40	1164.4391.40	2014.06.10



2.5.3 Test Result

The lowest, middle and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


Spectral power density (dBm/3kHz)							
Channel	Frequency (MHz)	Measured PSD (dBm)		Total PSD (dBm)	Refer to Plot	Limit (dBm/3kHz)	Verdict
		Antenna 1 port	Antenna 2 Port				
1	2406.5	-1.34	-1.43	1.63	Plot 2.5 A/D	8	PASS
4	2436.5	-1.47	-1.54	1.50	Plot 2.5 B/E	8	PASS
8	2476.5	-1.54	-1.54	1.47	Plot 2.5 C/F	8	PASS

Measurement uncertainty: ± 1.3 dB


Note: 1. The test results including the cable lose.

B. Test Plots:


Antenna 1 Port:

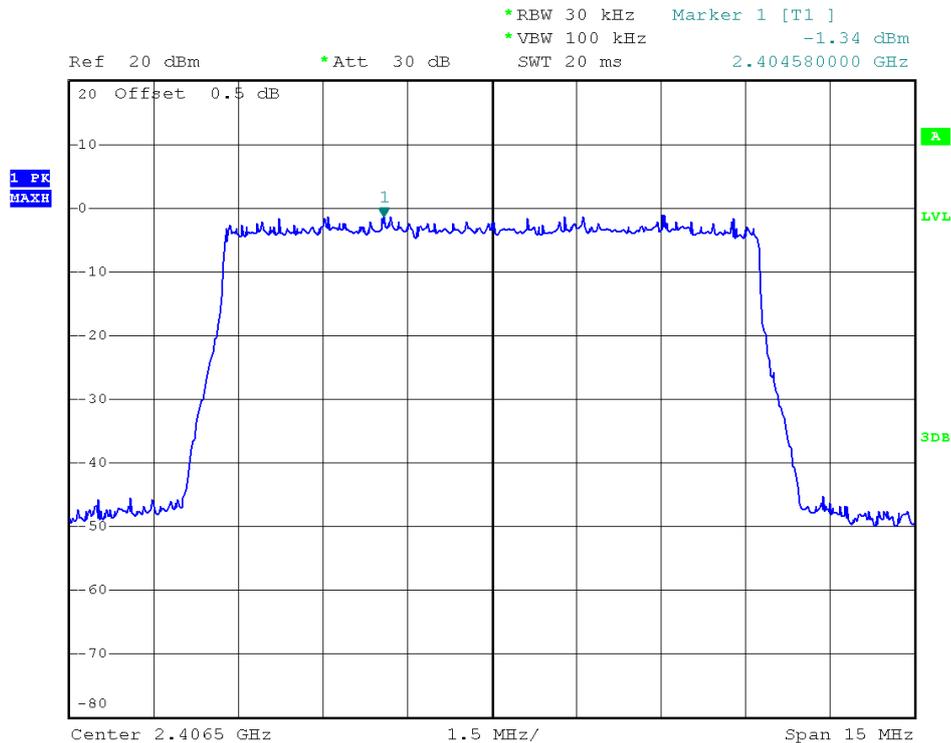

(Plot 2.5 A: Channel = 1)

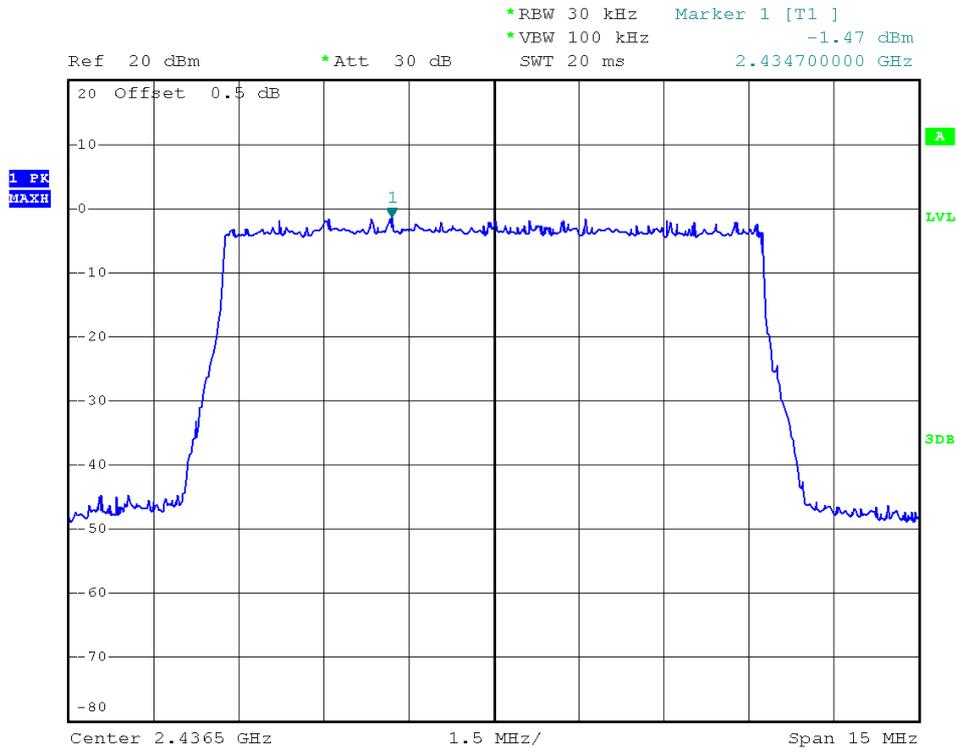


(Plot 2.5 B: Channel = 4)

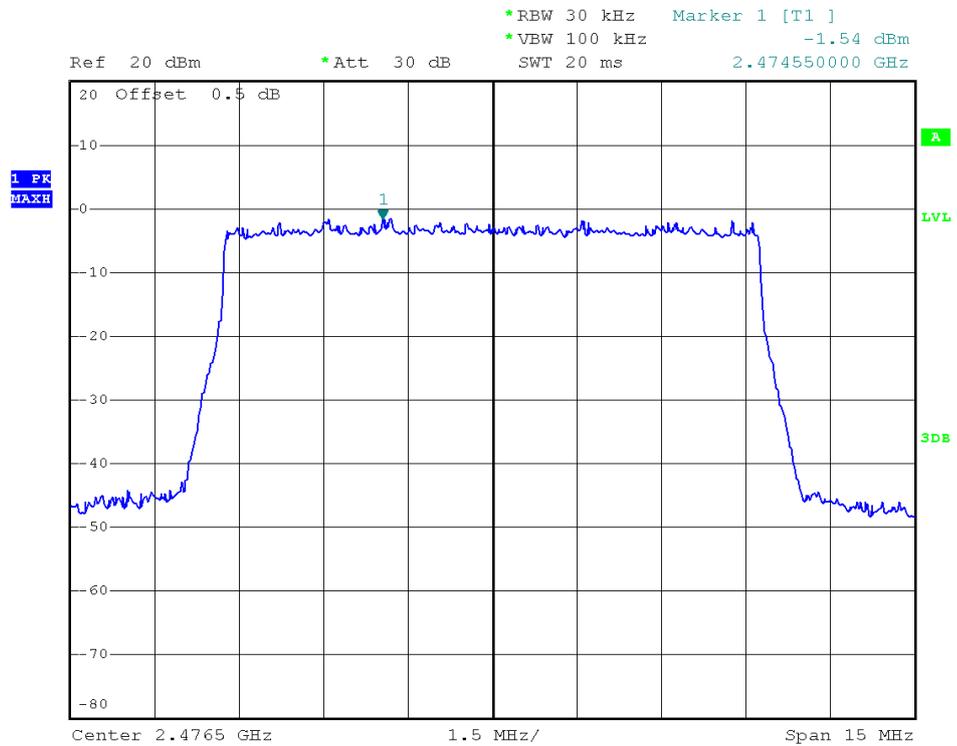


(Plot 2.5 C: Channel = 8)




Antenna 2 Port:

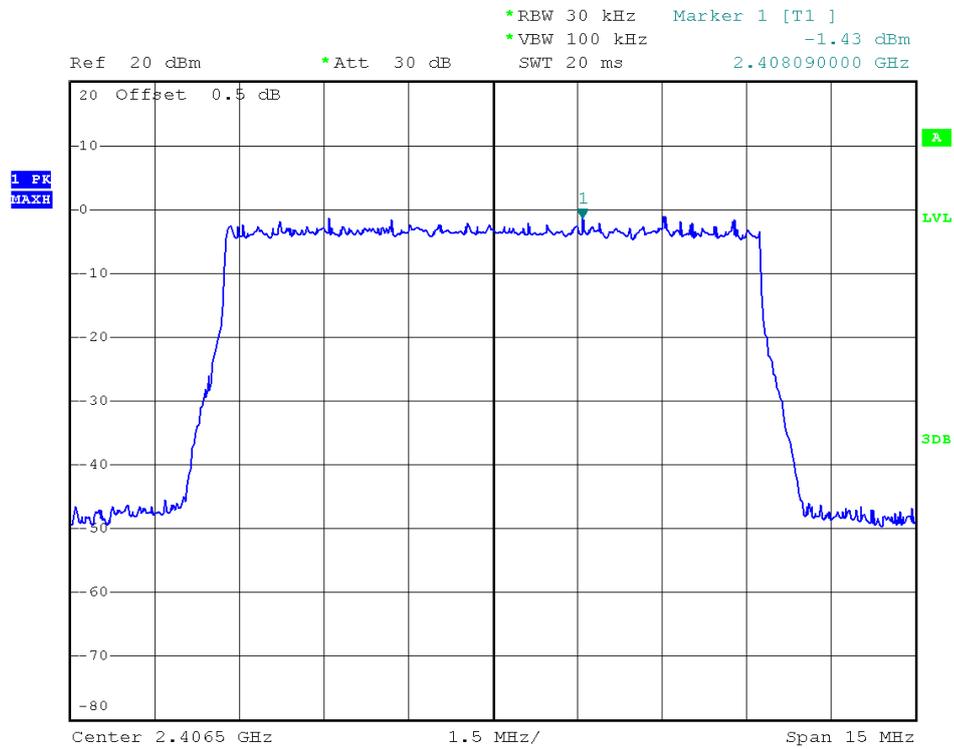

(Plot 2.5 D: Channel = 1)

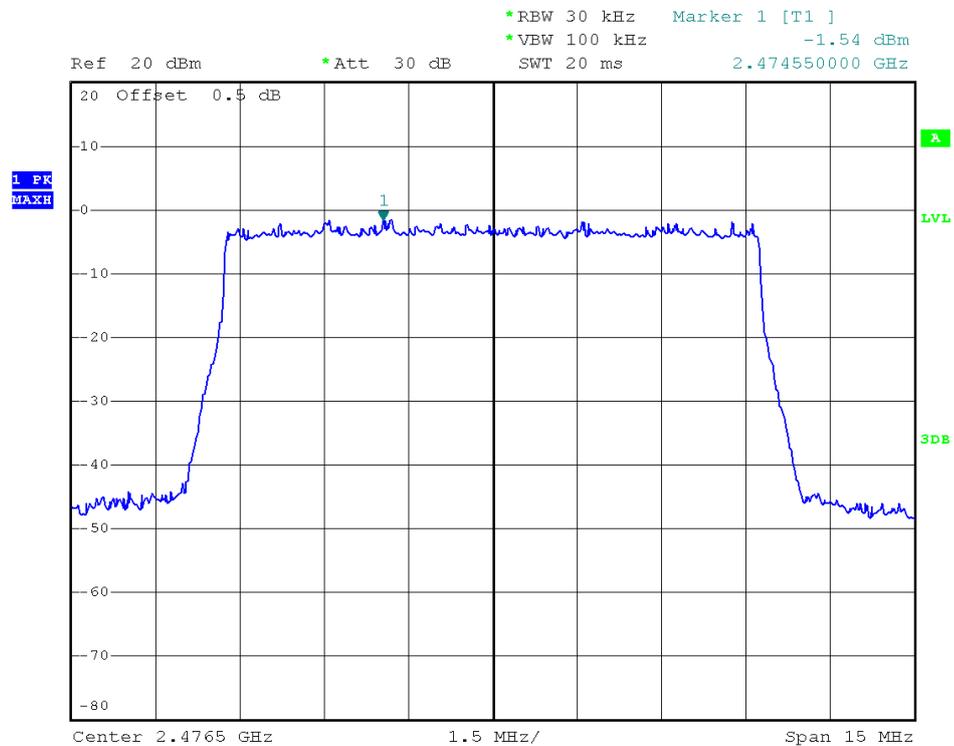

(Plot 2.5 E: Channel = 4)

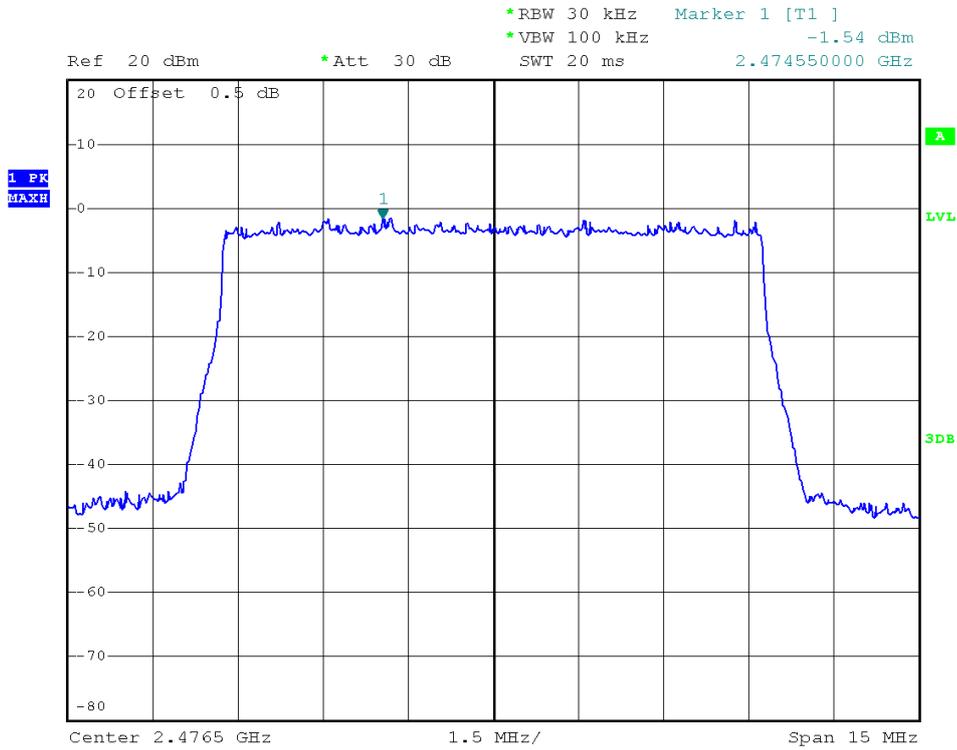

(Plot 2.5 F: Channel = 8)


2.6 Band Edge

2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2 Test Description

A. Test Setup

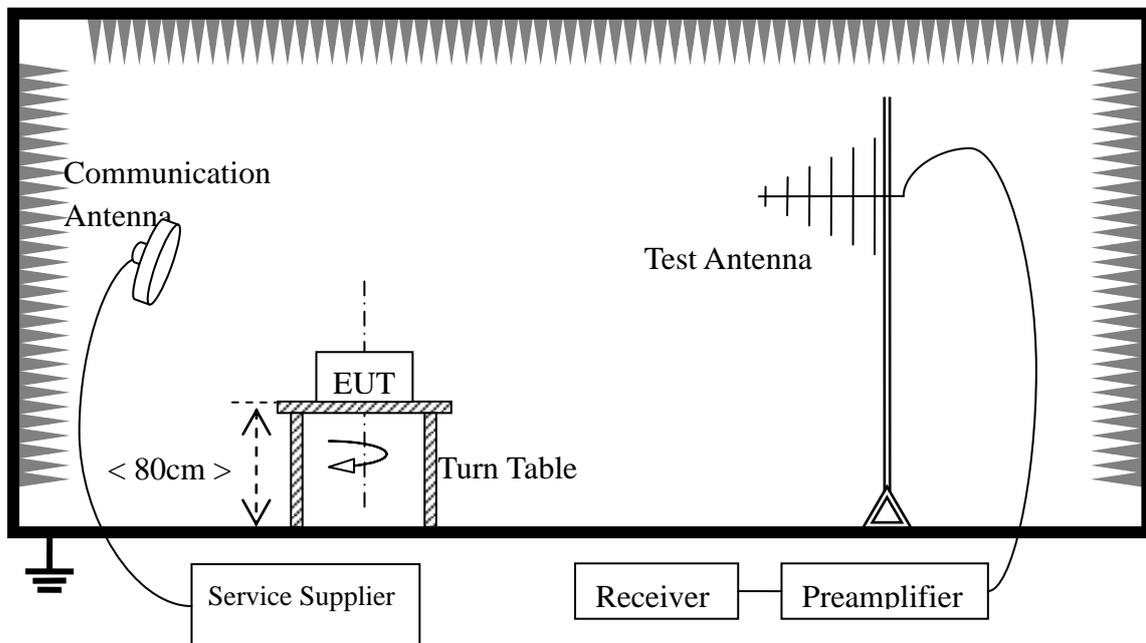

The Module of the EUT is powered by the Battery charged with the AC Adapter. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal. Due Date
Receiver	R&S	ESIB26	A0304218	2014.06.07
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2014.06.07
Double ridge horn antenna	R&S	HF906	100150	2014.06.10
Ultra-wideband antenna	R&S	HL562	100089	2014.06.10
Amplifier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2014.06.05

2.6.3 Test Result**Radiated band edge Measurement:**

The lowest and highest channels are tested to verify the band edge emissions.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

NOTE 1: The red vertical lines “F1” in the following charts is to indicate the frequencies 2400MHz and 2483.5MHz respectively


NOTE 2: Both horizontal and vertical polarity direction of the test antenna has been performed, only the worst case recorded in this report.




A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading UR (dBuV)	AT (dB)	AFactor (dB@3m)	Max. Emission E (dB μV/m)	Limit (dB μV/m)	Verdict
		PK/ AV						
1	2399.607	PK	63.63	-31.7	28.3	60.23	74	Pass
1	2398.902	AV	47.93	-31.7	28.3	44.53	54	Pass
8	2484.126	PK	63.54	-29.45	29.2	63.29	74	Pass
8	2484.700	AV	48.37	-29.45	29.2	48.12	54	Pass


B. Test Plots:

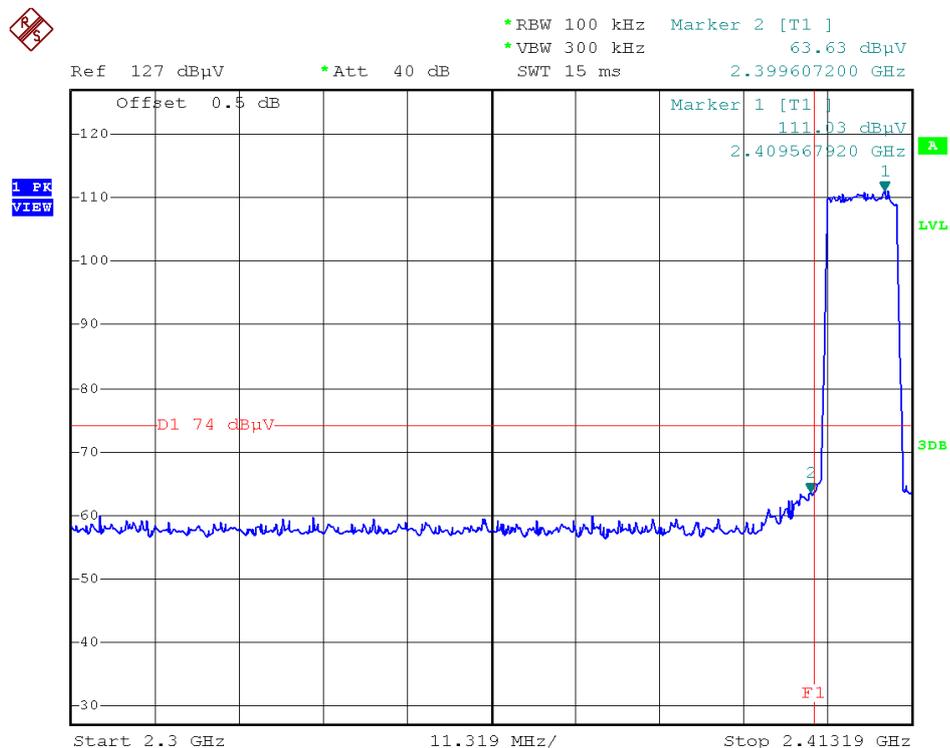


(Plot 2.6 A1: Channel = 1 Peak)

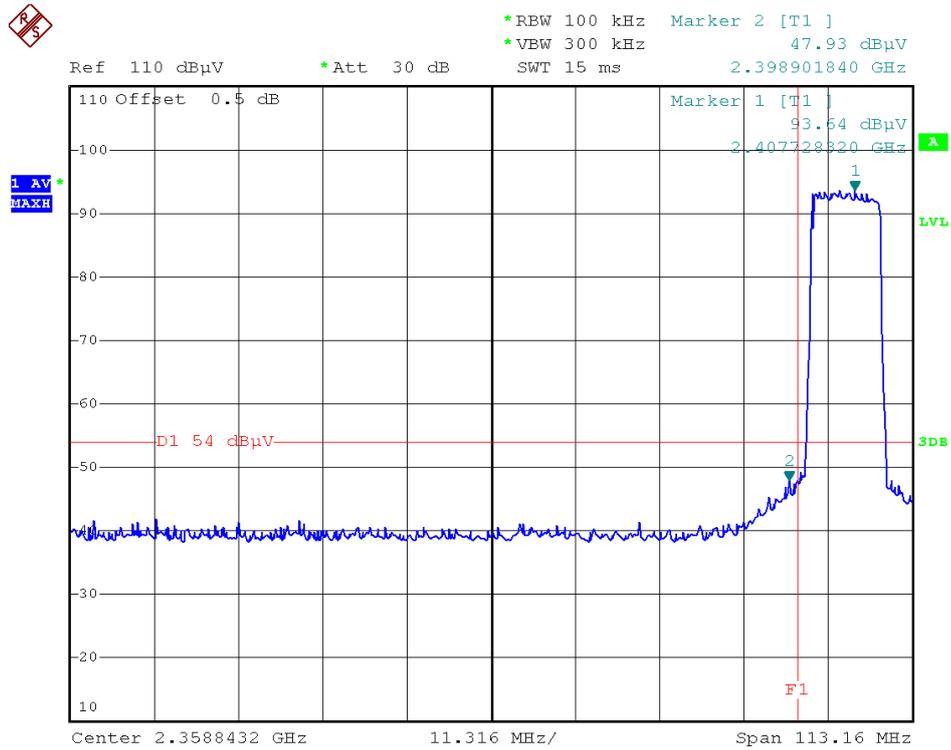

(Plot 2.6 A2: Channel = 1 AVG)

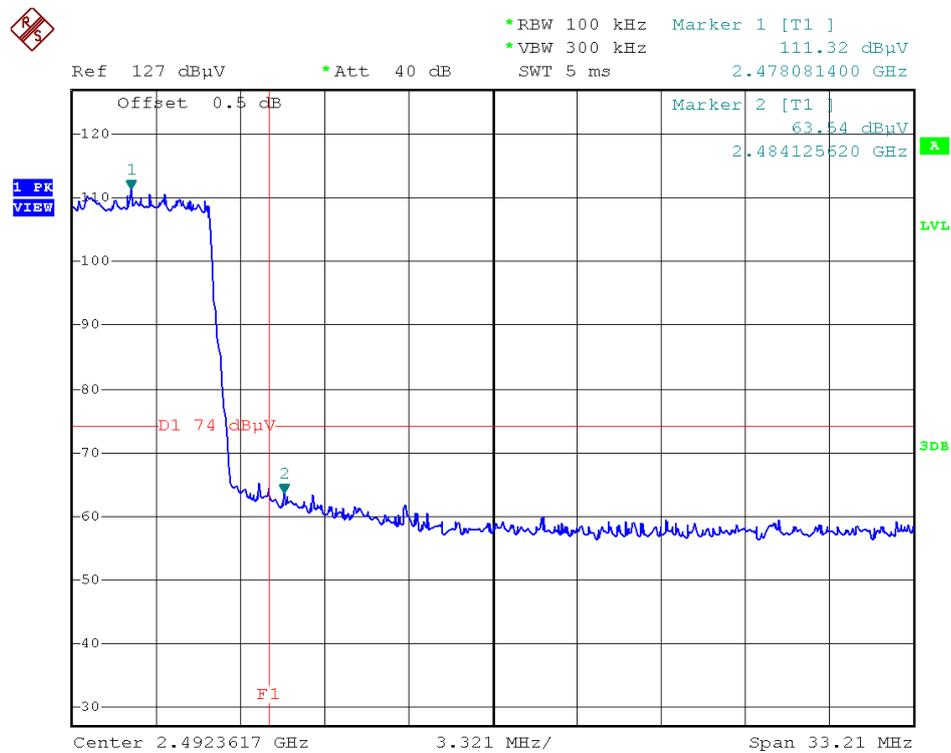

(Plot 2.6 A3: Channel = 8 Peak)

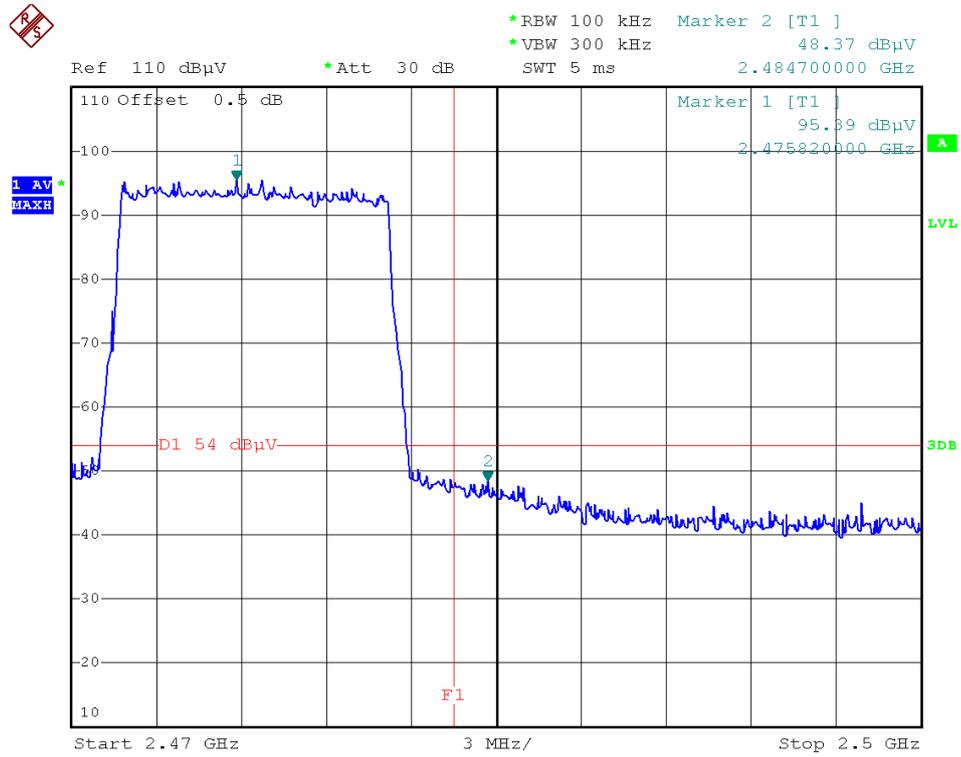

(Plot 2.6 A4: Channel = 8 AVG)



Conducted Band Edge Measurement

A. Test Verdict:

Antenna 1


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2398.868	-46.67	PK	-20.00	Plot 2.6 E1	Pass
Out of right side band					
2484.657	-48.33	PK	-20.00	Plot 2.6 E2	Pass

Antenna 2


Frequency (MHz)	Delta Peak to Band emission (dBc)	Detector	Limit (dBc)	Refer to Plot	Verdict
Out of left side band					
2398.406	-46.10	PK	-20.00	Plot 2.6 E3	Pass
Out of right side band					
2483.603	-44.63	PK	-20.00	Plot 2.6 E4	Pass

B. Test Plots:

Antenna 1 Port:

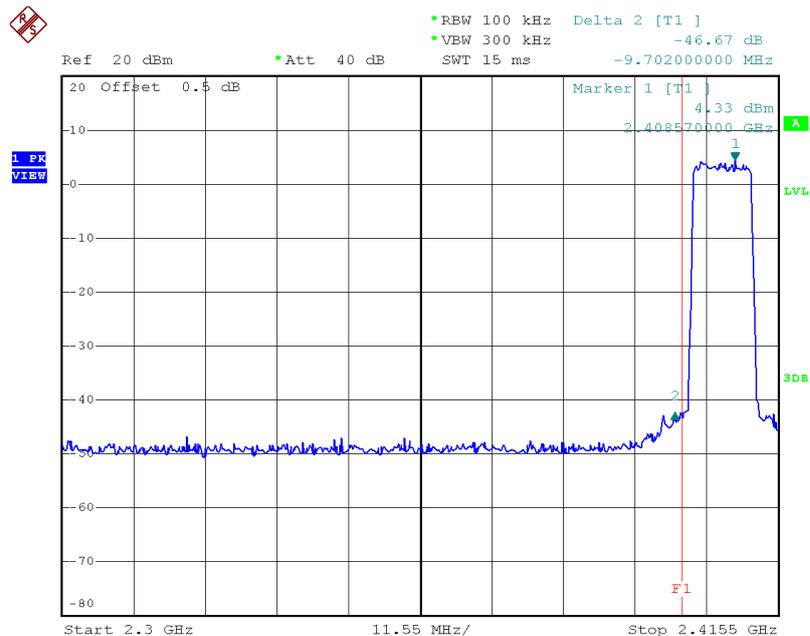


(Plot 2.6 E1: Channel =1 2406.5MHz)

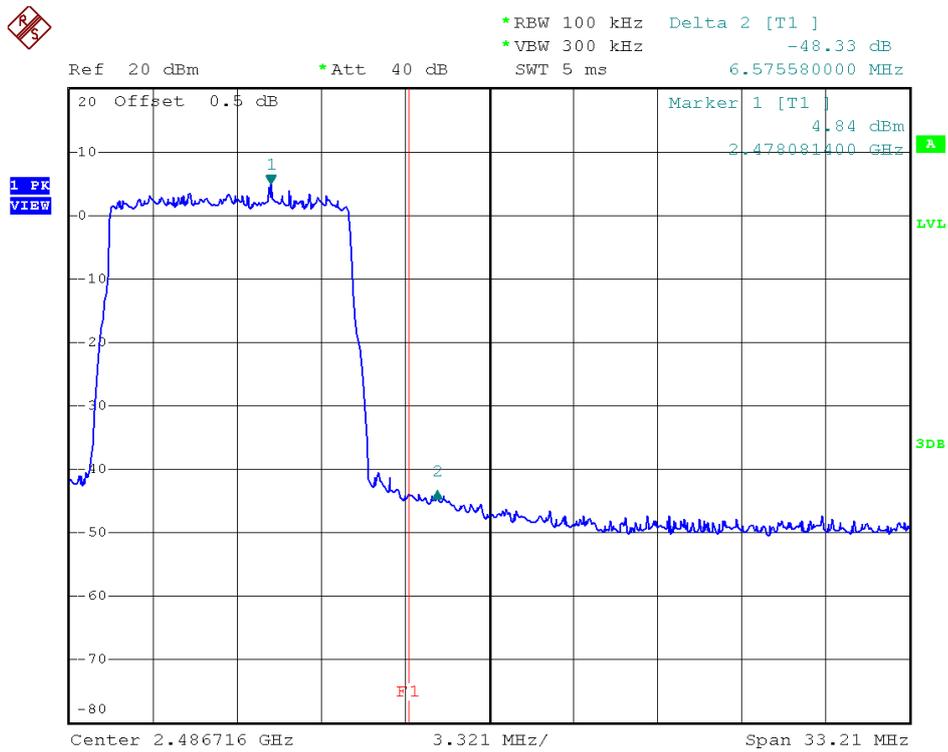


(Plot 2.6 E2: Channel =8 2476.5MHz)

Antenna 2 Port:

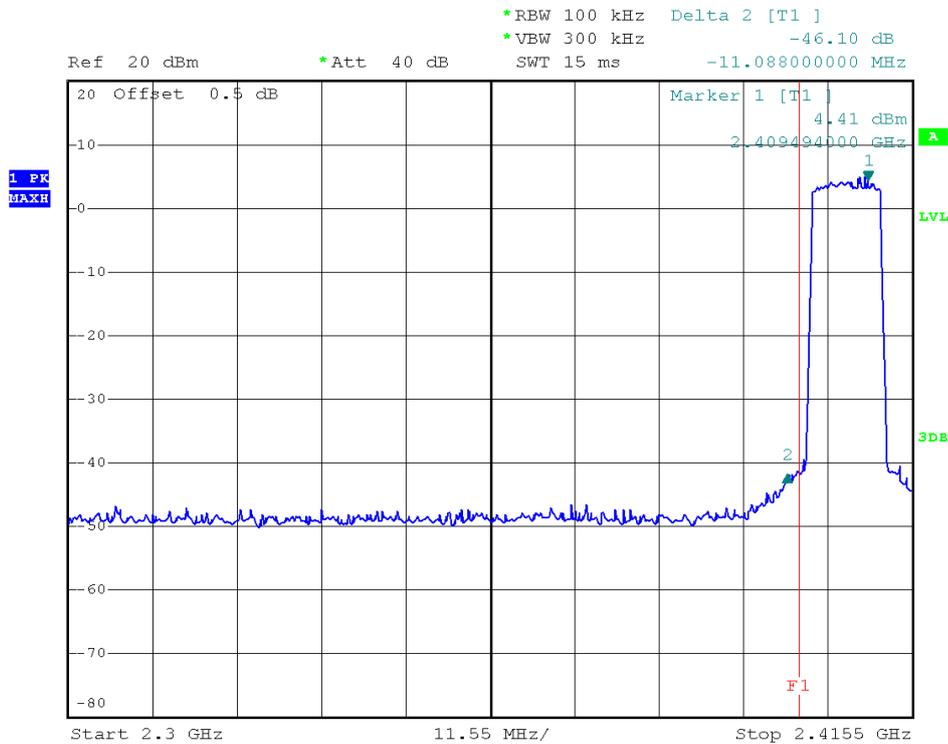

(Plot 2.6 E3: Channel =1 2406.5MHz)

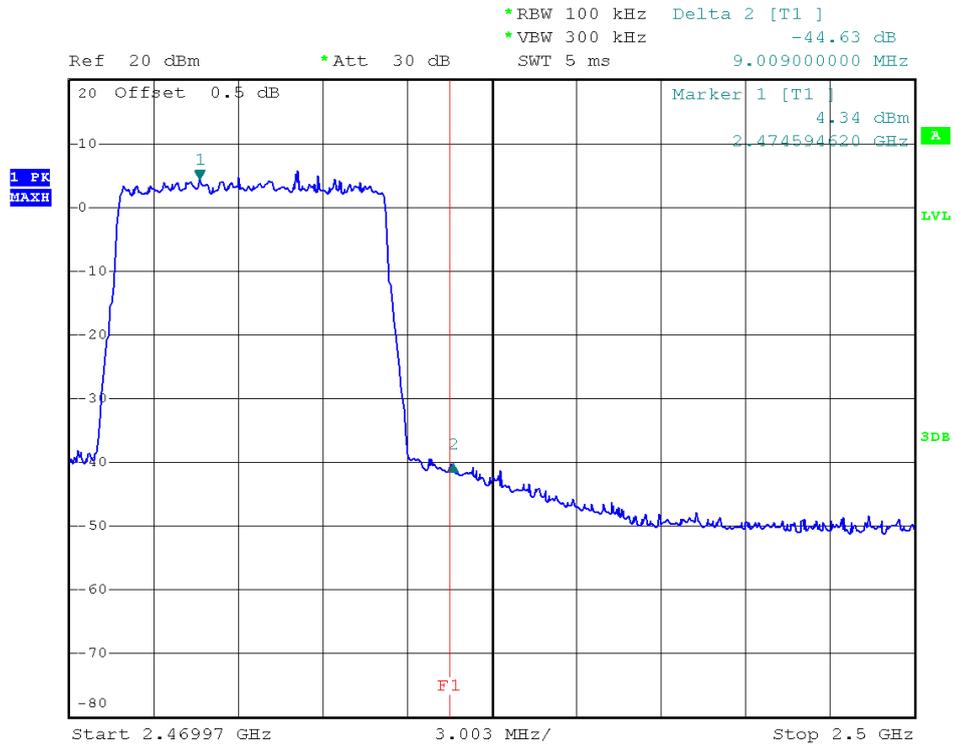

(Plot 2.6 E4: Channel =8 2476.5MHz)



2.7 Radiated Emission

2.7.1 Requirement

According to FCC section 15.247(c), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Field Strength ($\text{dB } \mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	$2400/\text{F}(\text{kHz})$	$20\log(2400/\text{F}(\text{kHz}))+80$	300
0.490 - 1.705	$24000/\text{F}(\text{kHz})$	$20\log(24000/\text{F}(\text{kHz}))+40$	30
1.705 - 30.0	30	$20\log(30)+40$	30
30 - 88	100	40.0	3
88 - 216	150	43.5	3
216 - 960	200	46.0	3
Above 960	500	54.0	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.7.2 Test Description

A. Test Setup:


(1) For radiated emissions from 9kHz to 30MHz

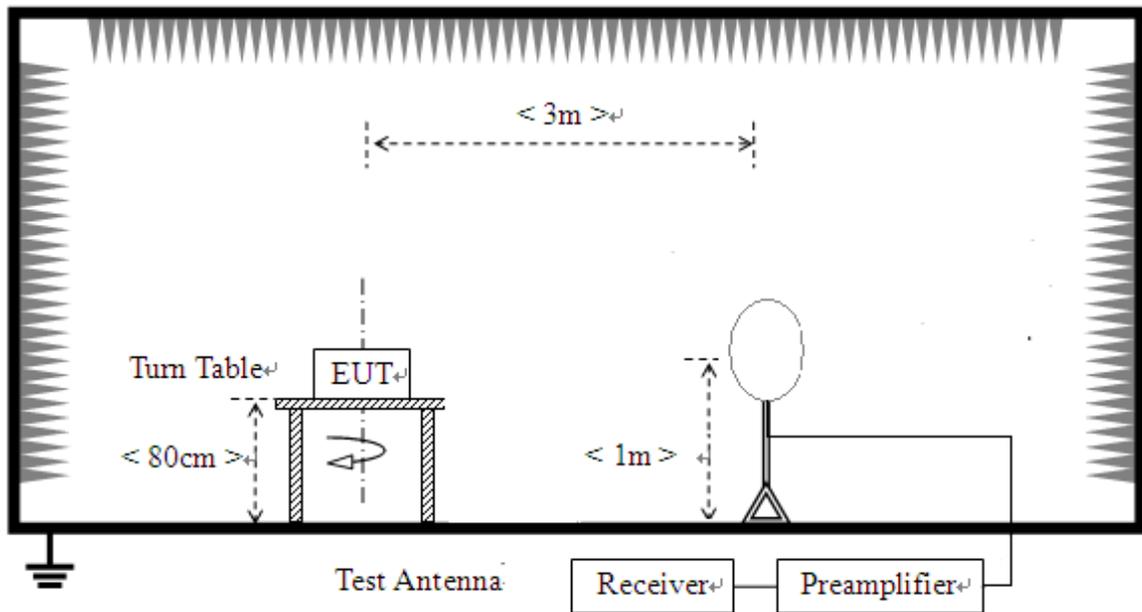

(2) For radiated emissions from 30MHz to 1GHz

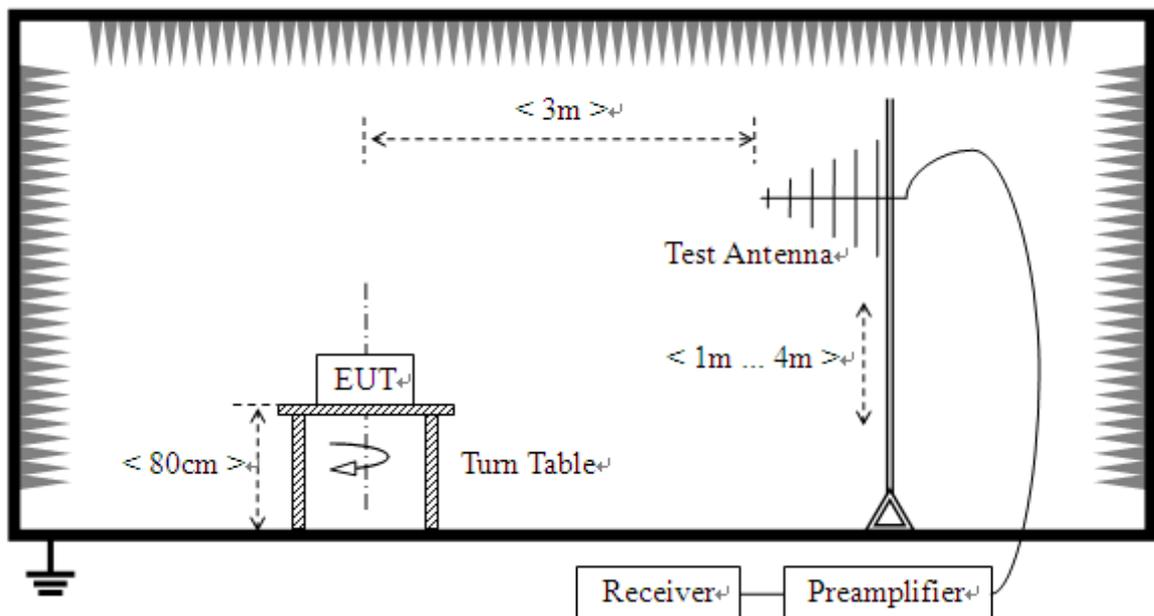

(3) For radiated emissions above 1GHz

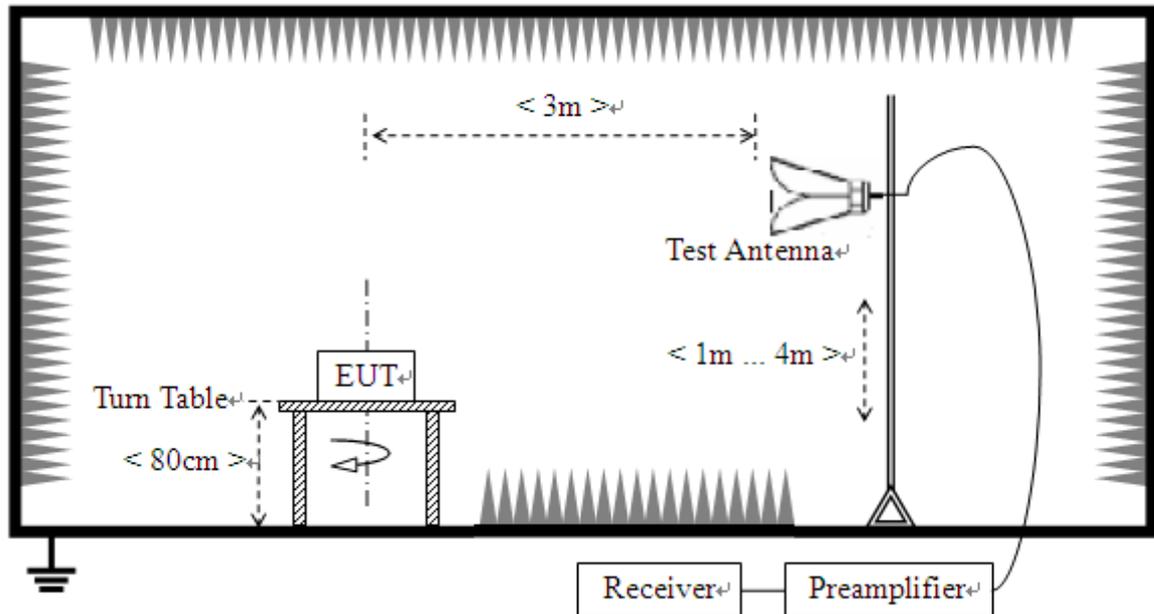

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2009). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The EUT was powered by the PC. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, the EUT is activated and controlled by the PC, set to operate under WIFI test mode.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**B. Equipments List:**

Description	Manufacturer	Model	Serial No.	Cal.Due Date
Receiver	R&S	ESIB26	A0304218	2014.06.07
Full-Anechoic Chamber	Albatross	12.8m*6.8m*6.4m	A0412372	2014.06.07
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2014.06.09
Test Antenna - Horn	R&S	BBHA 9120D	9120C-963	2014.06.09
Test Antenna - Horn	R&S	HF960	100150	2014.06.09
Test Antenna – Horn (18-25GHz)	ETS	UG-596A/U	A0902607	2014.06.05
Test Antenna -Loop	Schwarzbeck	HFH2-Z2	100047	2014.06.02
Ampilier 1G~18GHz	R&S	MITEQ AFS42-00101800	25-S-42	2014.06.05
Ampilier 18G~40GHz	R&S	JS42-18002600-28 -5A	12111.0980.0 0	2014.06.05
amplifier 20M~3GHz	R&S	PAP-0203H	22018	2014.06.10

2.7.3 Test Result

According to ANSI C63.4 selection 4.2.2, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

$L_{\text{Cable loss}}$: Cable loss

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The minimum clock frequency was 24MHz, the radiated frequency range from 9KHz to 25GHz.

Note: 1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.

2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.


3. HORN ANTENNA for the radiation emission test above 1G.

Test plots for the whole measurement frequency range:

For 9KHz to 30MHz


The test has been performed, and the Radiated Emission level is 20 dB below to the limit.

For 30MHz to 1000 MHz

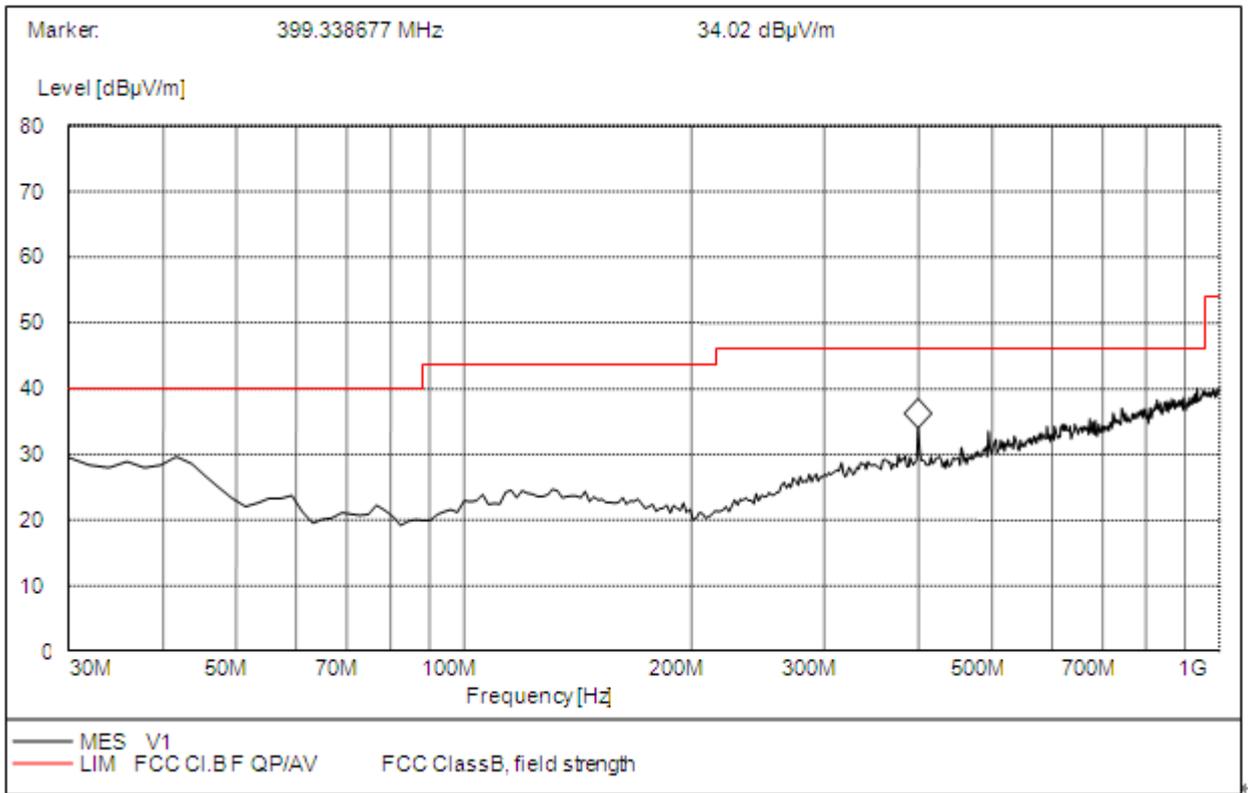

(Plot A: 30MHz to 1GHz, Antenna Vertical)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Verdict
41.663	29.61	120	100	40.0	10.19	Vertical	Pass
399.3387	34.02	120	100	43.5	9.48	Vertical	Pass

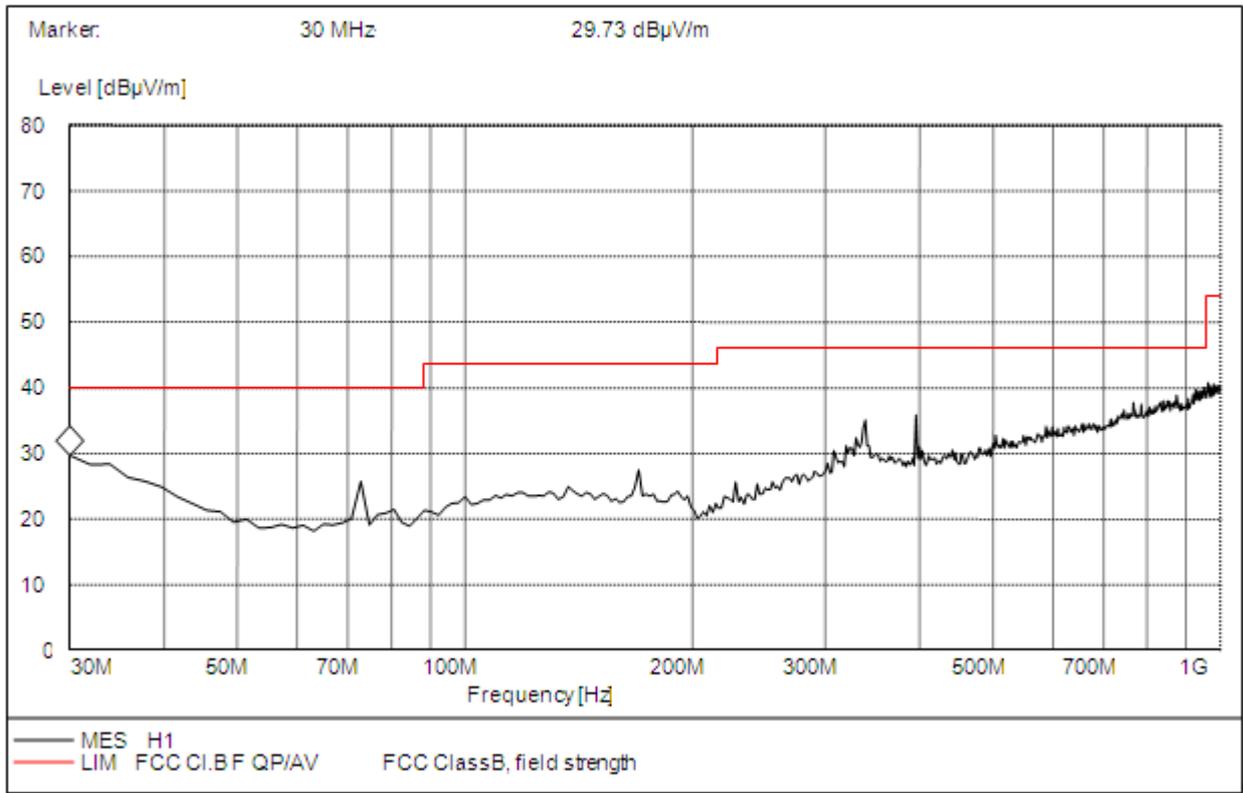

(Plot B: 30MHz to 1GHz, Antenna Horizontal)

Frequency (MHz)	QuasiPeak (dBµV/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dBµV/m)	Margin (dB)	Antenna	Verdict
169.960	27.46	120	100	43.5	16.04	Horizontal	Pass
395.450	35.90	120	100	46.0	10.10	Horizontal	Pass

For 1GHz to 25GHz

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2406.50MHz)											
No.	Frequency (MHz)	Emission Level		Limit (dBµV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2406.50	108.9	PK	/	/	1.00 H	118	112.3	28.3	4.90	-36.6
1	*2406.50	98.28	AV	/	/	1.00 H	118	101.68	28.3	4.90	-36.6
2	4813.00	51.98	PK	74	22.02	1.00 H	24	48.78	32.7	7.00	-36.5
2	4813.00	46.37	AV	54	7.63	1.00 H	24	43.17	32.7	7.00	-36.5
3	7219.50	51.08	PK	74	22.92	1.00 H	107	41.68	35.8	8.90	-35.3
3	7219.50	43.73	AV	54	10.27	1.00 H	107	34.33	35.8	8.90	-35.3
4	9626.00	50.49	PK	74	23.51	1.00 H	39	37.89	37.2	10.20	-34.8
4	9626.00	44.76	AV	54	9.24	1.00 H	39	32.16	37.2	10.20	-34.8



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2406.50MHz)											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2406.50	109.44	PK	/	/	1.00 V	109	112.84	28.3	4.90	-36.6
1	*2406.50	99.37	AV	/	/	1.00 V	109	102.77	28.3	4.90	-36.6
2	4813.00	52.43	PK	74	21.57	1.00 V	62	49.23	32.7	7.00	-36.5
2	4813.00	45.73	AV	54	8.27	1.00 V	62	42.53	32.7	7.00	-36.5
3	7219.50	51.45	PK	74	22.55	1.00 V	349	42.05	35.8	8.90	-35.3
3	7219.50	43.94	AV	54	10.06	1.00 V	349	34.54	35.8	8.90	-35.3
4	9626.00	54.86	PK	74	19.14	1.00 V	211	42.26	37.2	10.20	-34.8
4	9626.00	46.10	AV	54	7.9	1.00 V	211	33.5	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2436.5MHz)											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2436.50	107.3	PK	/	/	1.00 H	202	110.5	28.3	5.10	-36.6
1	*2436.50	99.57	AV	/	/	1.00 H	202	102.77	28.3	5.10	-36.6
2	4873.00	53.50	PK	74	20.5	1.00 H	187	50.1	32.3	7.60	-36.5
2	4873.00	47.80	AV	54	6.2	1.00 H	187	44.4	32.3	7.60	-36.5
3	7309.50	54.45	PK	74	19.55	1.00 H	107	45.05	36.1	8.60	-35.3
3	7309.50	48.46	AV	54	5.54	1.00 H	107	39.06	36.1	8.60	-35.3
4	9746.00	50.10	PK	74	23.9	1.00 H	144	37.5	37.2	10.20	-34.8
4	9746.00	43.06	AV	54	10.94	1.00 H	144	30.46	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2436.5MHz)											
No.	Frequency (MHz)	Emssion Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2436.50	108.4	PK	/	/	1.00 V	104	111.6	28.3	5.10	-36.6
1	*2436.50	97.74	AV	/	/	1.00 V	104	100.94	28.3	5.10	-36.6
2	4873.00	51.49	PK	74	22.51	1.00 V	304	48.09	32.3	7.60	-36.5
2	4873.00	47.65	AV	54	6.35	1.00 V	304	44.25	32.3	7.60	-36.5
3	7309.50	49.50	PK	74	24.5	1.00 V	203	40.1	36.1	8.60	-35.3
3	7309.50	47.08	AV	54	6.92	1.00 V	203	37.68	36.1	8.60	-35.3
4	9746.00	49.21	PK	74	24.79	1.00 V	172	36.61	37.2	10.20	-34.8
4	9746.00	44.18	AV	54	9.82	1.00 V	172	31.58	37.2	10.20	-34.8



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M (2476.5MHz)											
No.	Frequency (MHz)	Emission Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2476.50	110.93	PK	/	/	1.00 H	325	114.23	28.6	4.70	-36.6
1	*2476.50	99.95	AV	/	/	1.00 H	325	103.25	28.6	4.70	-36.6
2	4953.00	52.21	PK	74	22.04	1.00 H	311	48.41	33	7.00	-36.2
2	4953.00	47.28	AV	54	6.98	1.00 H	311	43.48	33	7.00	-36.2
3	7429.50	50.25	PK	74	23.99	1.00 H	330	40.85	36.2	8.50	-35.3
3	7429.50	46.95	AV	54	7.37	1.00 H	330	37.55	36.2	8.50	-35.3
4	9906.00	51.86	PK	74	22.45	1.00 H	42	39.26	37.2	10.20	-34.8
4	9906.00	48.78	AV	54	5.41	1.00 H	42	36.18	37.2	10.20	-34.8

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M (2476.5MHz)											
No.	Frequency (MHz)	Emission Level		Limit (dBuV/m)	Margin (dB)	Antenna Height	Table Angle	Raw Value	Antenna Factor	Cable Factor	Pre-amplifier
1	*2476.50	112.57	PK	/	/	1.00 V	34	115.87	28.6	4.70	-36.6
1	*2476.50	99.82	AV	/	/	1.00 V	34	103.12	28.6	4.70	-36.6
2	4953.00	50.76	PK	74	23.49	1.00 V	55	46.96	33	7.00	-36.2
2	4953.00	43.85	AV	54	10.41	1.00 V	55	40.05	33	7.00	-36.2
3	7429.50	51.15	PK	74	23.09	1.00 V	258	41.75	36.2	8.50	-35.3
3	7429.50	48.10	AV	54	6.22	1.00 V	258	38.7	36.2	8.50	-35.3
4	9906.00	50.70	PK	74	23.61	1.00 V	254	38.1	37.2	10.20	-34.8
4	9906.00	48.20	AV	54	5.99	1.00 V	254	35.6	37.2	10.20	-34.8

- REMARKS:**
1. Emission level (dBuV/m) =Raw Value (dBuV) +Antenna Factor (dB/m) + Cable Factor (dB) +Pre-amplifier Factor
 2. The other emissions levels is 20dB below to the limit..
 3. Margin value = Limit value- Emission level.
 4. The limit value is defined as per 15.247
 5. “ * “ : Fundamental frequency
 6. The output signals of two antennas are uncorrelated.



2.8 RF exposure evaluation

Equation from page 8 of OET Bulletin 65, Edition 97-01.

$$S = \frac{PG}{4\pi R^2}$$

Where:

S=power density

P=power input to the antenna

G=numeric gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the centre of radiation of the antenna

2.8.1 . Limits For Maximum Permissible Exposure

According to FCC Part 1.1307, system operation under the provisions of this section shall be operated in a Manner the ensures that the pulic is not exposed to radio frequency energy level in excess of the commission’s guidelines.

According to FCC Part 1.1310 RF exposure is calculated.

Limits for Occupational/controlled Exposure			
Frequency Range(MHz)	Electric Field Strength(E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density(S) (mW/cm2)
0.3-1.34	614	1.63	(100)*
1.34-30	1842/f	2.19/f	(180/f2)*
30-300	27.5	0.073	0.2
300-1500	--	--	f/1500
1500-100,000	--	--	1.0

2.8.2. Test Result



Maximum peak output power at antenna input terminal(dBm):	25.88
Maximum peak output power at antenna input terminal(mW):	387.258
Source-based time-averaged output power:	--
Prediction distance(cm):	20
Predication frequency(MHz):	2406.5
Antenna Gain (typical) (dBi):	2.5
Power density at predication frequency at 20 cm(mW/cm ²):	0.137
MPE limit for RF exposure at prediction frequency(mW/cm ²):	1.0

2.8.3. Conclusion

Since the test result is passed.

**** END OF REPORT ****