

CFR 47 FCC PART 15 SUBPART C

TEST REPORT

For

DJI Neo 2

MODEL NUMBER: DEN225

REPORT NUMBER: 4791807217-1-RF-2

ISSUE DATE: June 27, 2025

FCC ID: SS3-DEN225

Prepared for

SZ DJI TECHNOLOGY CO., LTD.

**Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community, Xili Street,
Nanshan District, Shenzhen, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 27, 2025	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.2.3.1	FCC Part 15.247 (b)(3)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2)	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.5	FCC Part 15.247 (e)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d)	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>CHANNEL LIST</i>	<i>9</i>
5.3. <i>MAXIMUM POWER</i>	<i>9</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>10</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>10</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.7. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>13</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	14
7. ANTENNA PORT TEST RESULTS	17
7.1. <i>CONDUCTED OUTPUT POWER</i>	<i>17</i>
7.2. <i>6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	<i>18</i>
7.3. <i>POWER SPECTRAL DENSITY</i>	<i>20</i>
7.4. <i>CONDUCTED BAND EDGE AND SPURIOUS EMISSION</i>	<i>21</i>
7.5. <i>DUTY CYCLE</i>	<i>23</i>
8. RADIATED TEST RESULTS.....	24
8.1. <i>RESTRICTED BANDEDGE</i>	<i>31</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~3 GHZ)</i>	<i>57</i>
8.3. <i>SPURIOUS EMISSIONS(3 GHZ~18 GHZ)</i>	<i>63</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>99</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>102</i>
8.6. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ)</i>	<i>104</i>
9. ANTENNA REQUIREMENT	106
10. AC POWER LINE CONDUCTED EMISSION	107
11. TEST DATA.....	110

11.1.	APPENDIX A: DTS BANDWIDTH.....	110
11.1.1.	Test Result.....	110
11.1.2.	Test Graphs.....	111
11.2.	APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....	123
11.2.1.	Test Result.....	123
11.2.2.	Test Graphs.....	124
11.3.	APPENDIX C: MAXIMUM CONDUCTED OUTPUT POWER.....	136
11.3.1.	Test Result.....	136
11.4.	APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY.....	137
11.4.1.	Test Result.....	137
11.4.2.	Test Graphs.....	138
11.5.	APPENDIX E: BAND EDGE MEASUREMENTS.....	150
11.5.1.	Test Result.....	150
11.5.2.	Test Graphs.....	151
11.6.	APPENDIX F: CONDUCTED SPURIOUS EMISSION.....	159
11.6.1.	Test Result.....	159
11.6.2.	Test Graphs.....	161
11.7.	APPENDIX G: DUTY CYCLE.....	197
11.7.1.	Test Result.....	197
11.7.2.	Test Graphs.....	198

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: SZ DJI TECHNOLOGY CO., LTD.
Address: Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community,
Xili Street, Nanshan District, Shenzhen, China

Manufacturer Information

Company Name: SZ DJI TECHNOLOGY CO., LTD.
Address: Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community,
Xili Street, Nanshan District, Shenzhen, China

EUT Information

EUT Name: DJI Neo 2
Model: DEN225
Brand: DJI
Sample Received Date: May 26, 2025
Sample Status: Normal
Sample ID: 8510078
Date of Tested: June 4, 2025 to June 27, 2025


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	Pass

Prepared By:



Johnson Liu
Laboratory Engineer

Checked By:



Kebo Zhang
Operations Leader

Approved By:



Stephen Guo
Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C, KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, KDB 662911 D01 Multiple Transmitter Output v02r01, CFR 47 FCC Part 2, ANSI C63.10-2013

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules. ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.
---------------------------	--

Note 1:

All tests measurement facilities use to collect the measurement data are located at Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	DJI Neo 2
Model	DEN225

Frequency Range:	2412 MHz to 2462 MHz
Type of Modulation:	IEEE 802.11b: DSSS(CCK, DQPSK, DBPSK) IEEE 802.11g/n: OFDM(64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11ax: OFDM(1024-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Radio Technology:	IEEE 802.11b/g/n HT20/11n HT40/ax HE20/ax HE40
Battery	DC 7.16V
Power Supply	DC 7.16V

Note: All power supply modes have been pre-scanned, only the worst data was recorded in the report.

5.2. CHANNEL LIST

Channel List For Bandwidth=20 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List For Bandwidth=40 MHz							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	16.76
g	2412 ~ 2462	1-11[11]	16.83
n HT20	2412 ~ 2462	1-11[11]	19.38
n HT40	2422 ~ 2452	3-9[7]	17.42
ax HE20	2412 ~ 2462	1-11[11]	18.46
ax HE40	2422 ~ 2452	3-9[7]	15.57

5.4. TEST CHANNEL CONFIGURATION

IEEE Std. 802.11	Test Channel Number	Frequency
b	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
g	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
n HT40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz
ax HE20	CH 1(Low Channel), CH 6(MID Channel), CH 11(High Channel)	2412 MHz, 2437 MHz, 2462 MHz
ax HE40	CH 3(Low Channel), CH 6(MID Channel), CH 9(High Channel)	2422 MHz, 2437 MHz, 2452 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		DjiSdrConsole-v2.9.5					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	0	13	15	13	/		
	1	13	15	13			
802.11g	0	13	14	14			
	1	13	14	14			
802.11n HT20	0	12	14	12			
	1	12	14	12			
802.11n HT40	0	/			11	11	10
	1	/			11	11	10
802.11ax HE20	0	12	12	12	/		
	1	12	12	12			
802.11ax HE40	0	/			8	9	8
	1	/			8	9	8

WORST-CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps
802.11g mode: 6 Mbps
802.11n HT20 mode: MCS0
802.11n HT40 mode: MCS0
802.11ax HE20 mode: MCS0
802.11ax HE40 mode: MCS0

802.11b/g only support SISO mode.
802.11n HT20/HT40/ax HE20/HE40 support SISO and MIMO mode.

802.11b/g SISO mode, Antenna 0 and Antenna 1 has the same power setting, so only Antenna 1 worst case test data were recorded in the report.

802.11n/ax SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

802.11ax mode only supports full RU mode.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 1 and Core 2 correspond to antenna 0 and antenna 1 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

Conducted bandedge and spurious emissions tests were performed with SISO mode, as this port was found to have the worst case in terms of power settings amongst all supported possible SISO & MIMO port combinations.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, so we only chose the worst case mode CDD for final testing.

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
0	2412-2462	Dipole Antenna	2.28
1	2412-2462	Dipole Antenna	2.50

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing were performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2.50 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5.51 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒2TX, 2RX	ANT 0 or ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒2TX, 2RX	ANT 0 or ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE20	☒2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.
IEEE 802.11ax HE40	☒2TX, 2RX	ANT 0 and ANT 1 can be used as transmitting/receiving antenna.

Note: 1. The value of the antenna gain was declared by customer.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E14	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type C	Unshielded	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	Lithium-ion Rechargeable Battery	DJI	BWXNN2-1606-7.16	Max Charge Voltage: 8.6V Normal Voltage: 7.16V
2	Adapter Power	DJI	PD-65CN	Input: AC 100 ~ 240 V, 50/60 Hz, 2.0 A Output: DC 5 V, 5 A/9 V, 5 A/12V, 5 A/15V, 4.3A/20V, 3.25A
3	DJI Neo 2 Digital Transceiver	DJI	DEP1	FCC ID: SS3-DEP125 IC: 11805A-DEP125

TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

SETUP DIAGRAM FOR TESTS

For AC Power Line Conducted Emission Test:



For Others Test:



6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Dec.27,2024	Dec.26,2025
Vector Signal Generator	R&S	SMBV100A	261637	Sep.28, 2024	Sep.27, 2025
Signal Generator	R&S	SMB100A	178553	Sep.28, 2024	Sep.27, 2025
Signal Analyzer	R&S	FSV40	101118	Sep.28, 2024	Sep.27, 2025
Software					
Description	Manufacturer		Name		Version
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.13, 2024	Sep.12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Sep.28, 2024	Sep.27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Sep.28, 2024	Sep.27, 2025
DC power supply	Keysight	E3642A	MY55159130	Sep.28, 2024	Sep.27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Sep.28, 2024	Sep.27, 2025
Attenuator	Aglient	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	Dec.27,2024	Dec.26,2025
Software					
Description	Manufacturer	Name			Version
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System			V3.2.22

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Sep.28, 2024	Sep.27, 2025
Two-Line V-Network	R&S	ENV216	101983	Sep.28, 2024	Sep.27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Sep.28, 2024	Sep.27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	June 28, 2024	June.27 2027
Preamplifier	HP	8447D	2944A09099	Sep.28, 2024	Sep.27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Sep.28, 2024	Sep.27, 2025
Horn Antenna	TDK	HRN-0118	130940	Dec.10, 2024	Dec.11, 2027
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Sep.28, 2024	Sep.27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	Jun 30, 2024	Jun 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Sep.28, 2024	Sep.27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Sep.28, 2024	Sep.27, 2025
Loop antenna	Schwarzbeck	1519B	00008	Dec.09, 2024	Dec.08, 2027
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Sep.28, 2024	Sep.27, 2025
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Sep.28, 2024	Sep.27, 2025
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Sep.28, 2024	Sep.27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.9.2.3.1.

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

The test result in dBm by adding $[10 \log (1 / D)]$, where D is the duty cycle.

TEST SETUP



TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	June 11, 2025	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

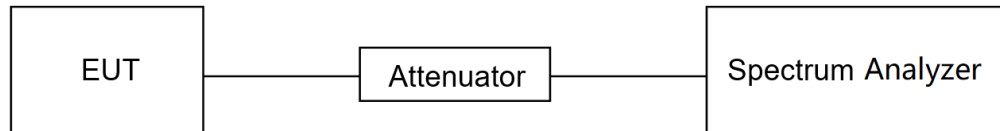TEST SETUP**TEST ENVIRONMENT**

Temperature	23.5℃	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	June 11, 2025	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.5.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	power averaging (rms)
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{OBW bandwidth}$
Trace	Employ trace averaging(rms)mode over a minimum of 100 traces
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

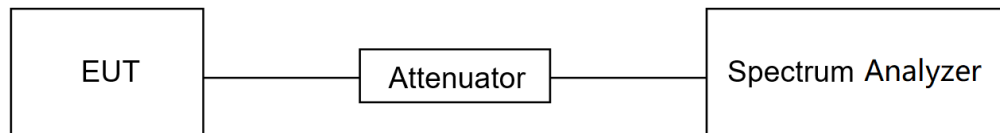

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	June 11, 2025	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP

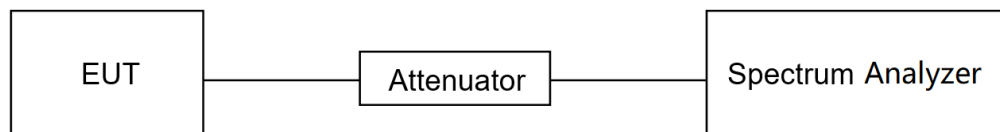

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	June 11, 2025	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E&F

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

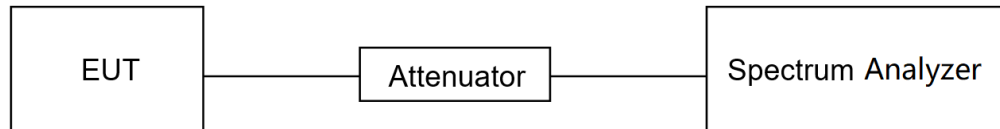

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	60%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	June 11, 2025	Test By	Bairong Liu
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.

7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

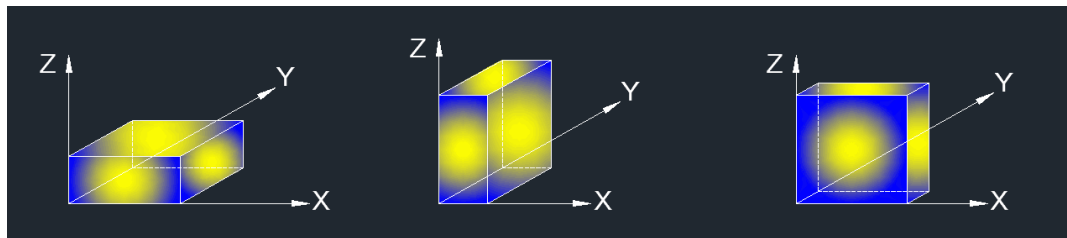

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.
9. *-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.5.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.
9. *-indicates frequency is out of the restricted bands and the limit is referring to 15.247 (d) and RSS-247 clause 5.5. We had already performed the conducted non-restricted bands test, please refer to clause 7.5.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

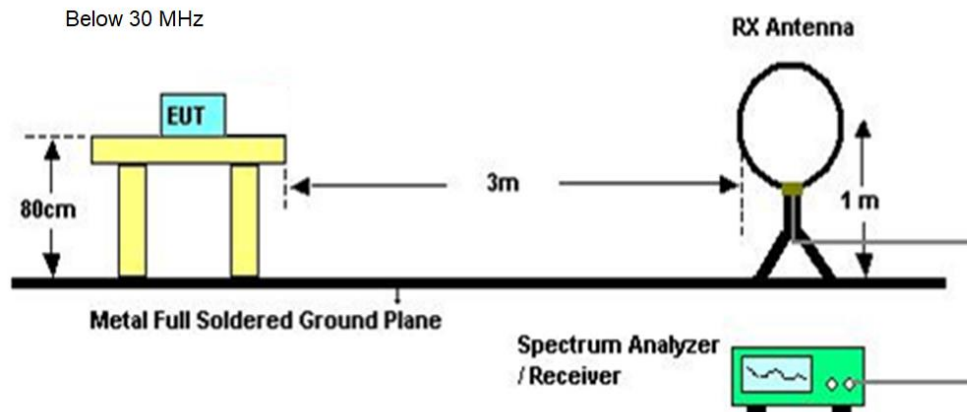

Below 1 GHz and above 30 MHz

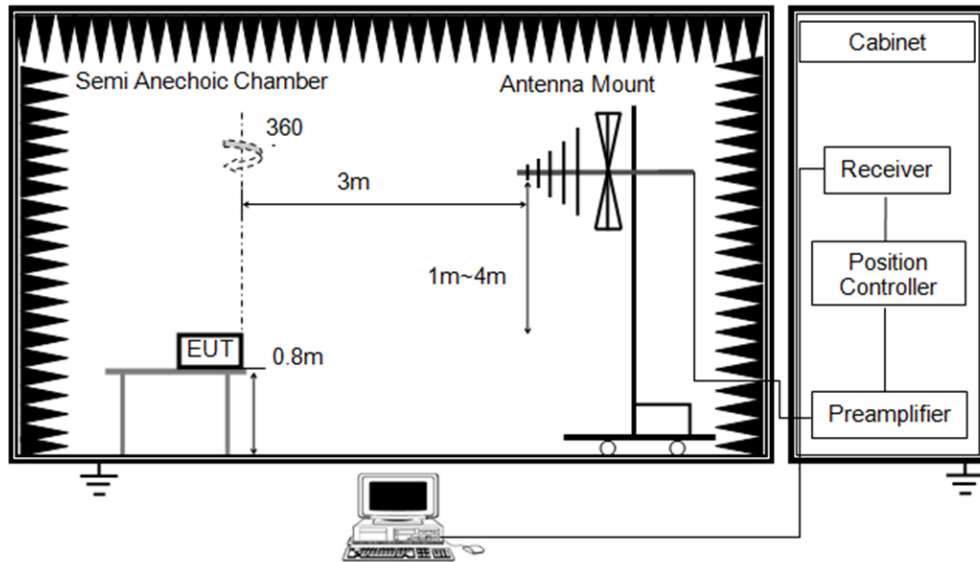

Above 1GHz

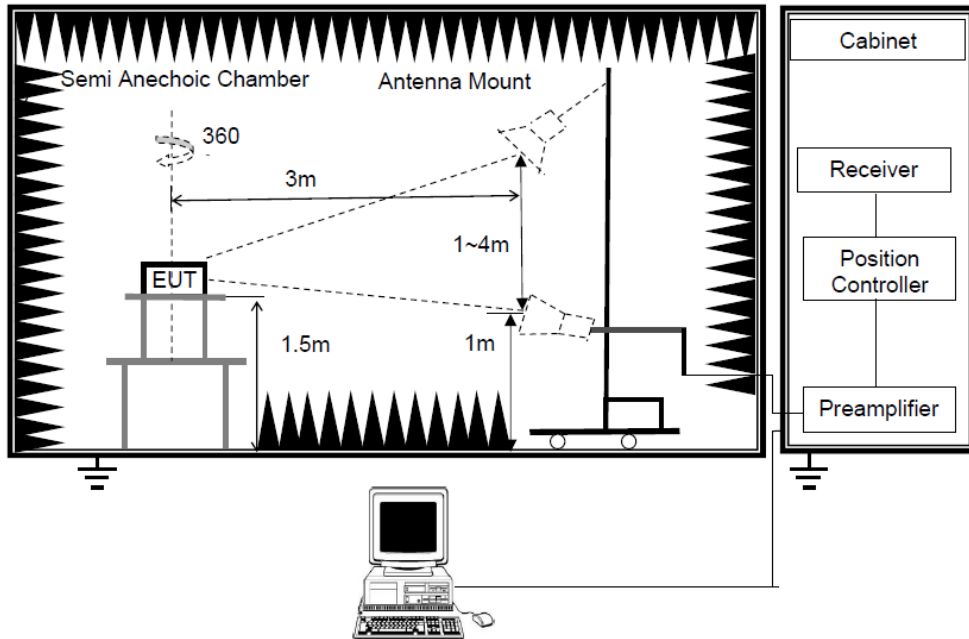

TEST ENVIRONMENT

Temperature	21.2°C	Relative Humidity	59.1%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	June 27, 2025	Test By	Mason Wang
-----------	---------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

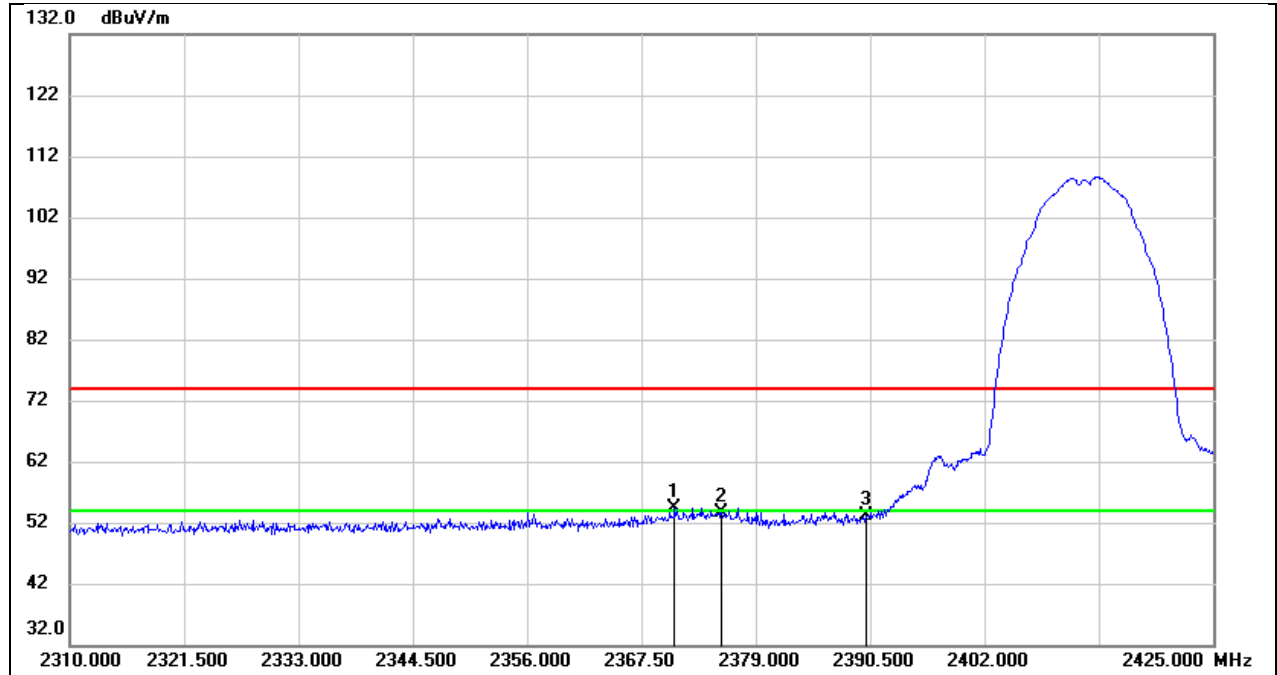


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.835	22.89	31.61	54.50	74.00	-19.50	peak
2	2375.435	22.10	31.62	53.72	74.00	-20.28	peak
3	2390.000	21.56	31.69	53.25	74.00	-20.75	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

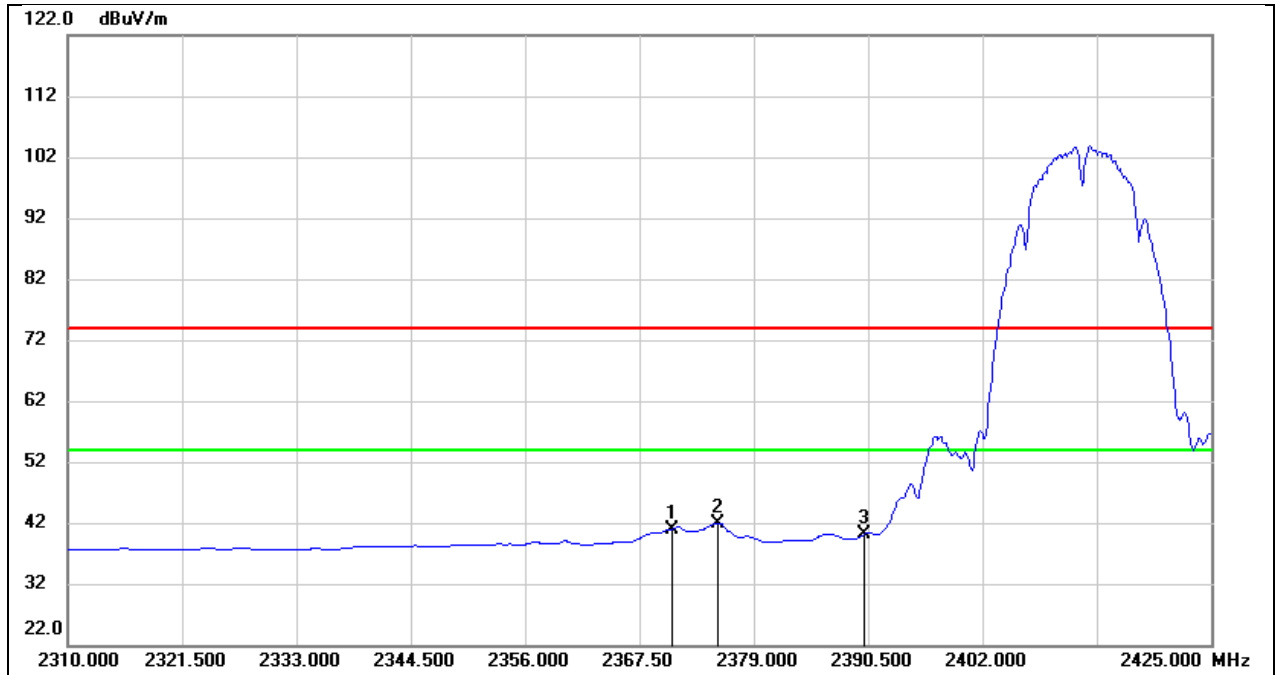


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2370.835	9.31	31.61	40.92	54.00	-13.08	AVG
2	2375.435	10.35	31.62	41.97	54.00	-12.03	AVG
3	2390.000	8.46	31.69	40.15	54.00	-13.85	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

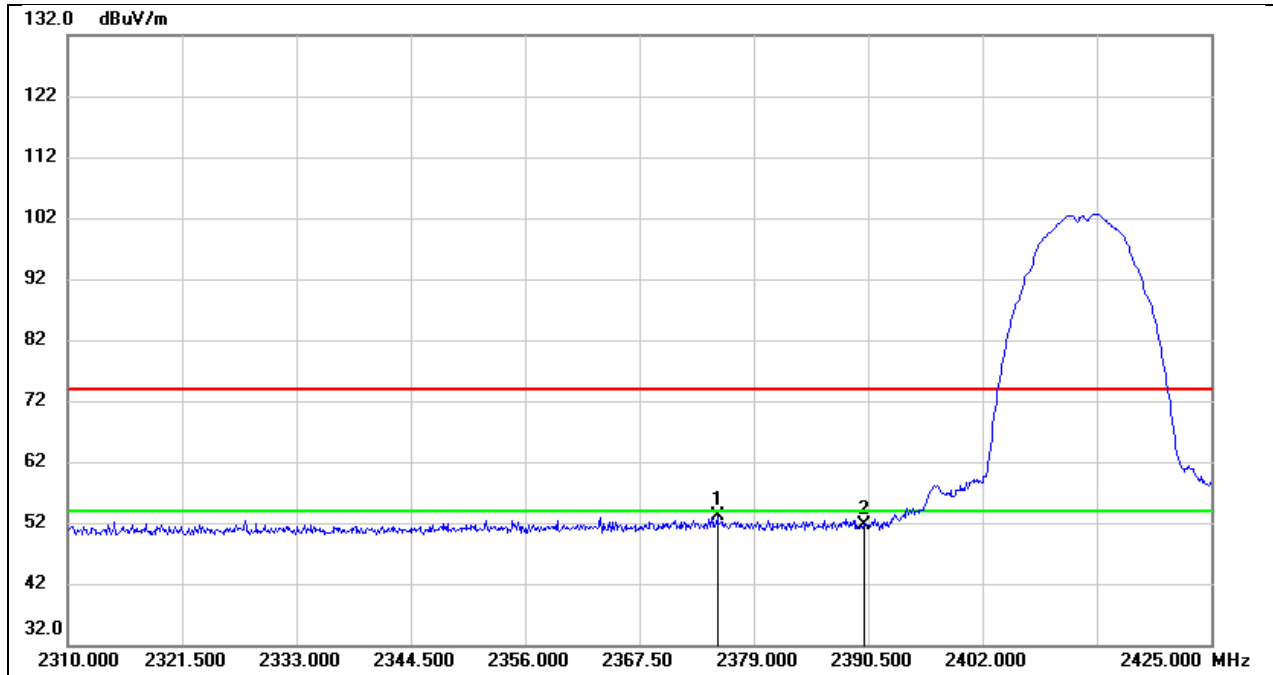


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.320	21.62	31.62	53.24	74.00	-20.76	peak
2	2390.000	19.86	31.69	51.55	74.00	-22.45	peak

Test Mode:	802.11b AV	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

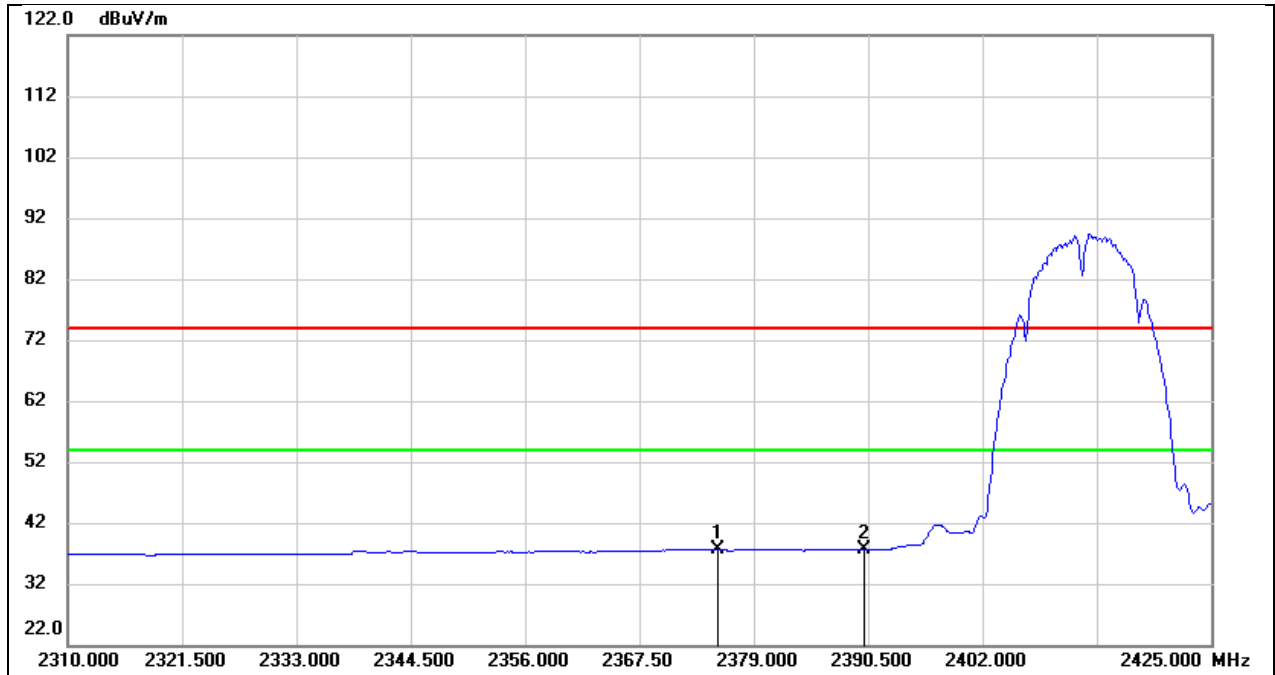


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.320	5.93	31.62	37.55	54.00	-16.45	AVG
2	2390.000	5.90	31.69	37.59	54.00	-16.41	AVG

Test Mode:	802.11b PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

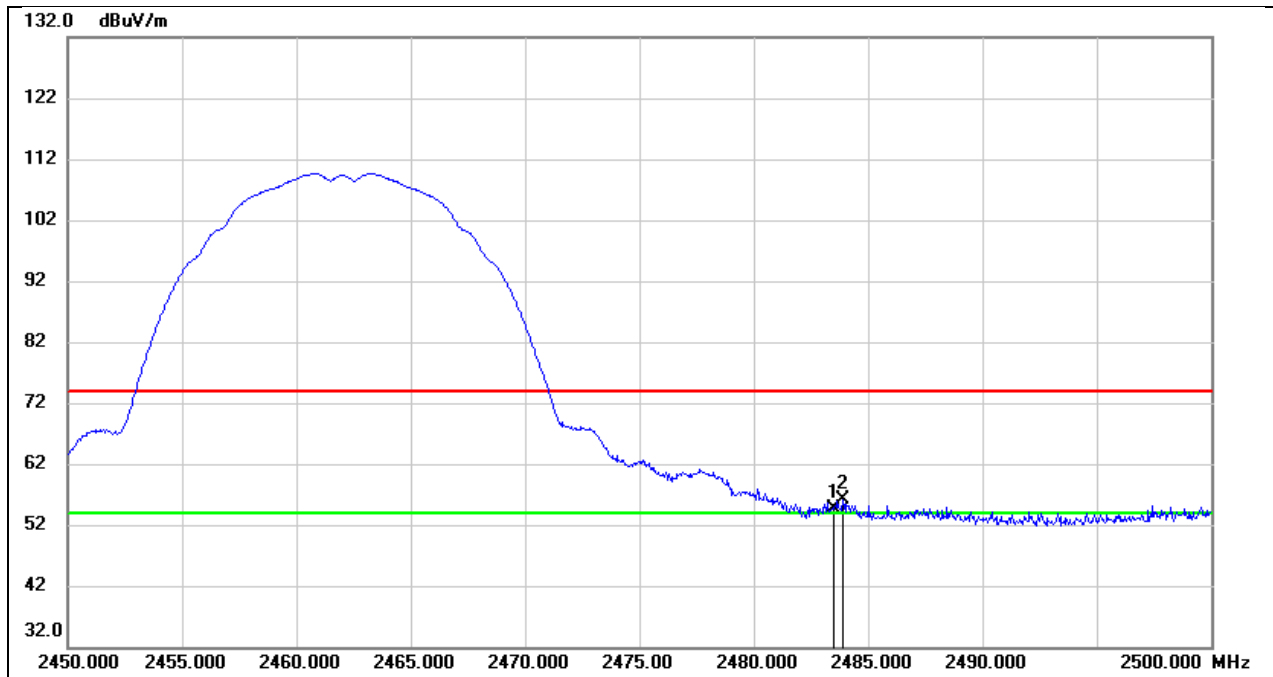


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	22.75	31.99	54.74	74.00	-19.26	peak
2	2483.900	24.08	31.99	56.07	74.00	-17.93	peak

Test Mode:	802.11b AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

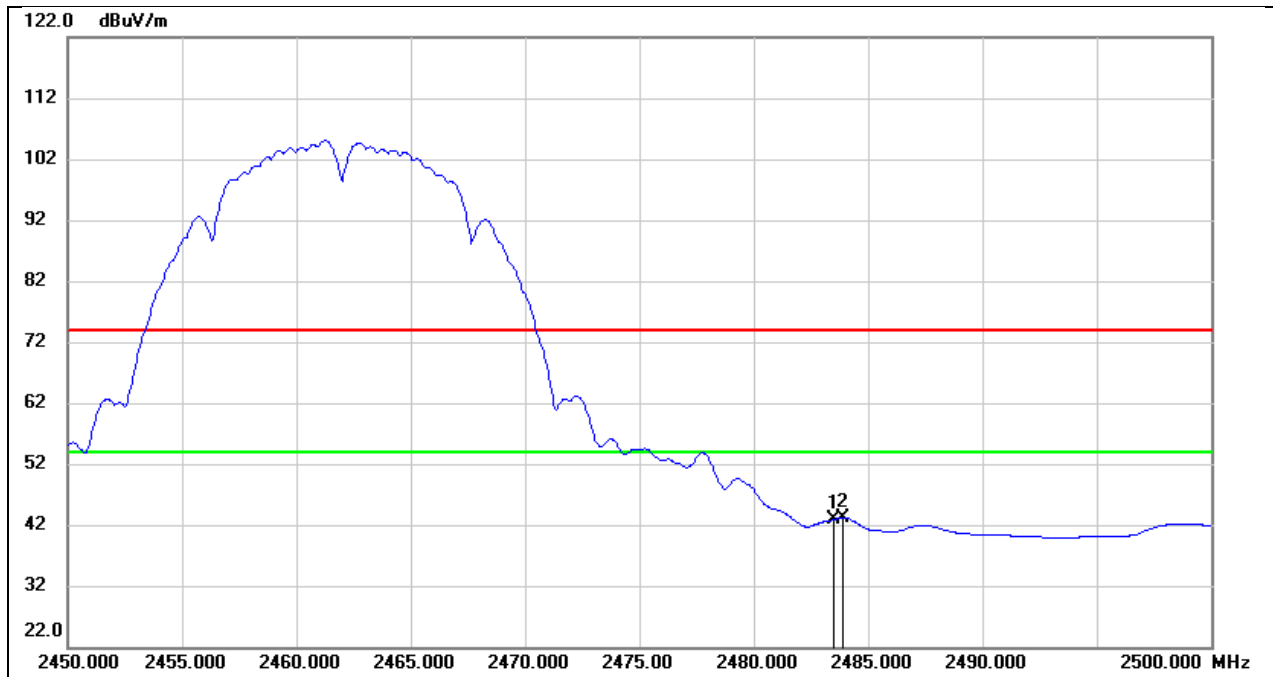


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.87	31.99	42.86	54.00	-11.14	AVG
2	2483.900	11.18	31.99	43.17	54.00	-10.83	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

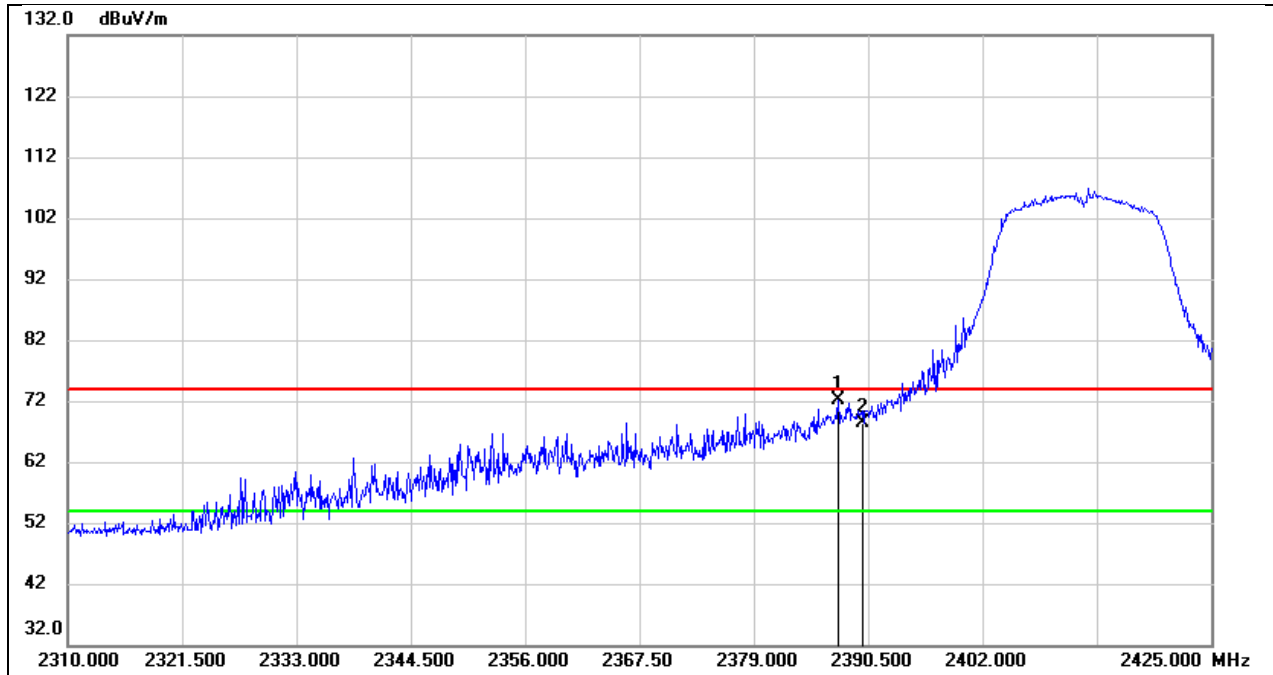


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.510	40.51	31.68	72.19	74.00	-1.81	peak
2	2390.000	36.77	31.69	68.46	74.00	-5.54	peak

Test Mode:	802.11g AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

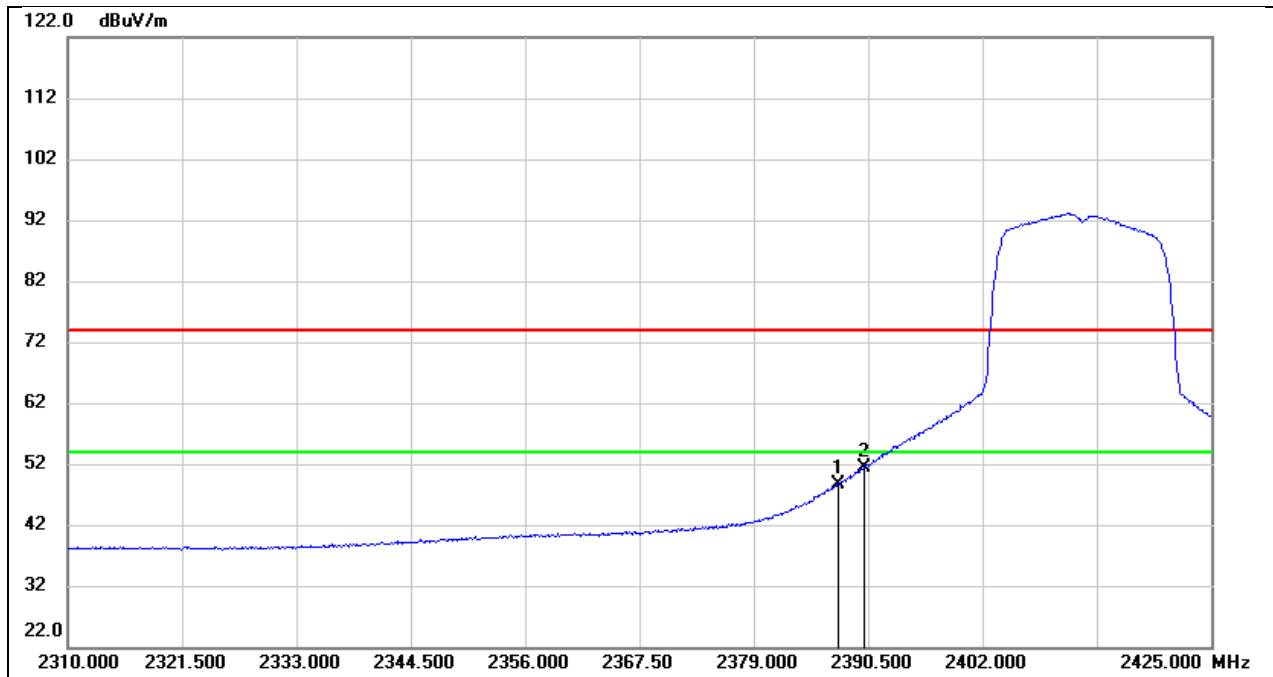


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.510	16.94	31.68	48.62	54.00	-5.38	AVG
2	2390.000	19.59	31.69	51.28	54.00	-2.72	AVG

Test Mode:	802.11g PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

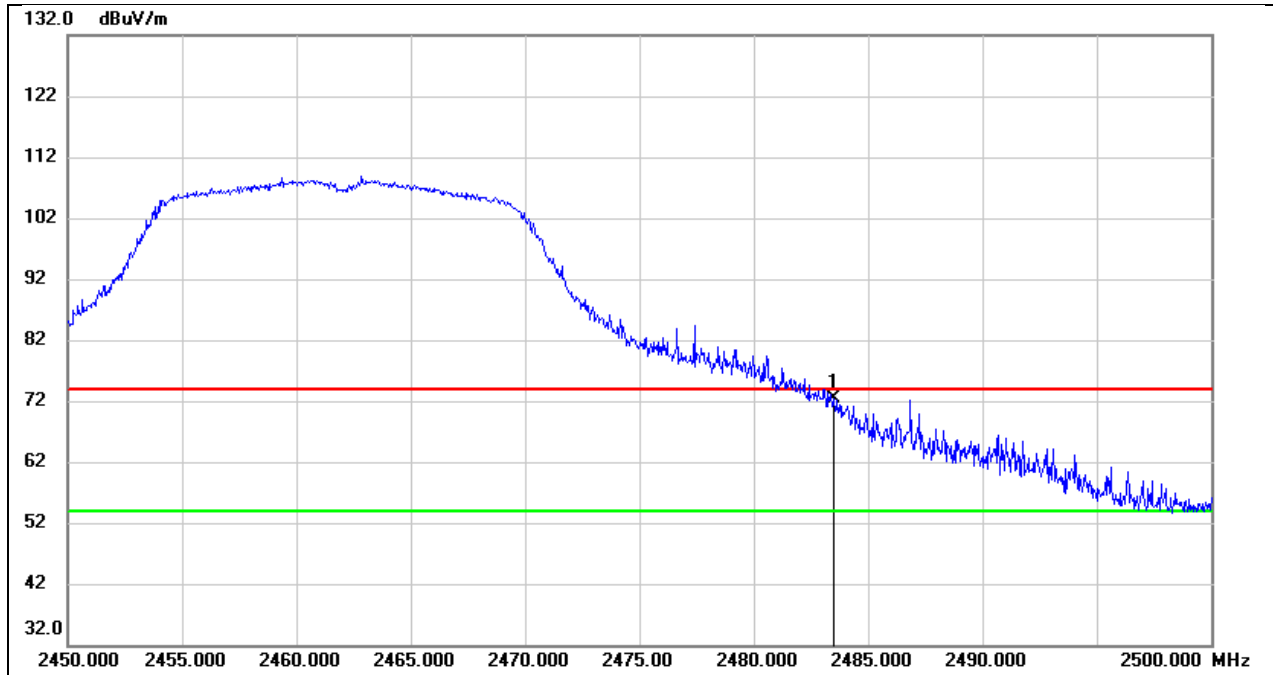


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	40.42	31.99	72.41	74.00	-1.59	peak

Test Mode:	802.11g AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

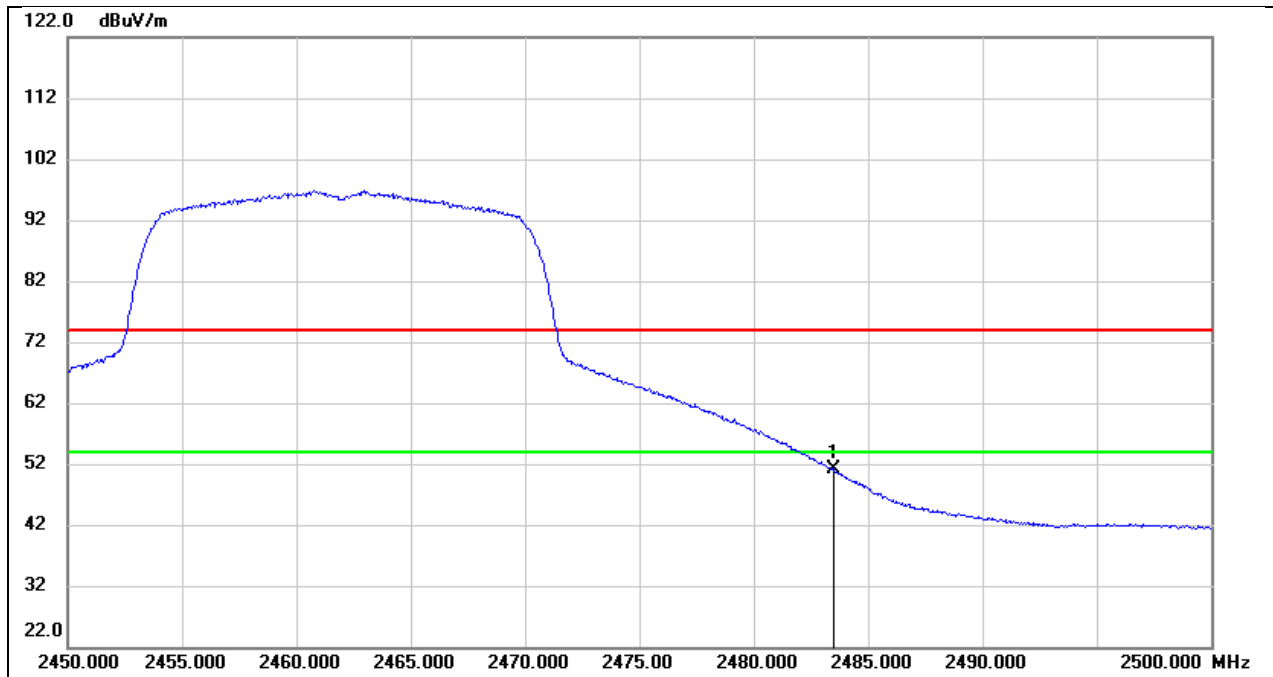


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.02	31.99	51.01	54.00	-2.99	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

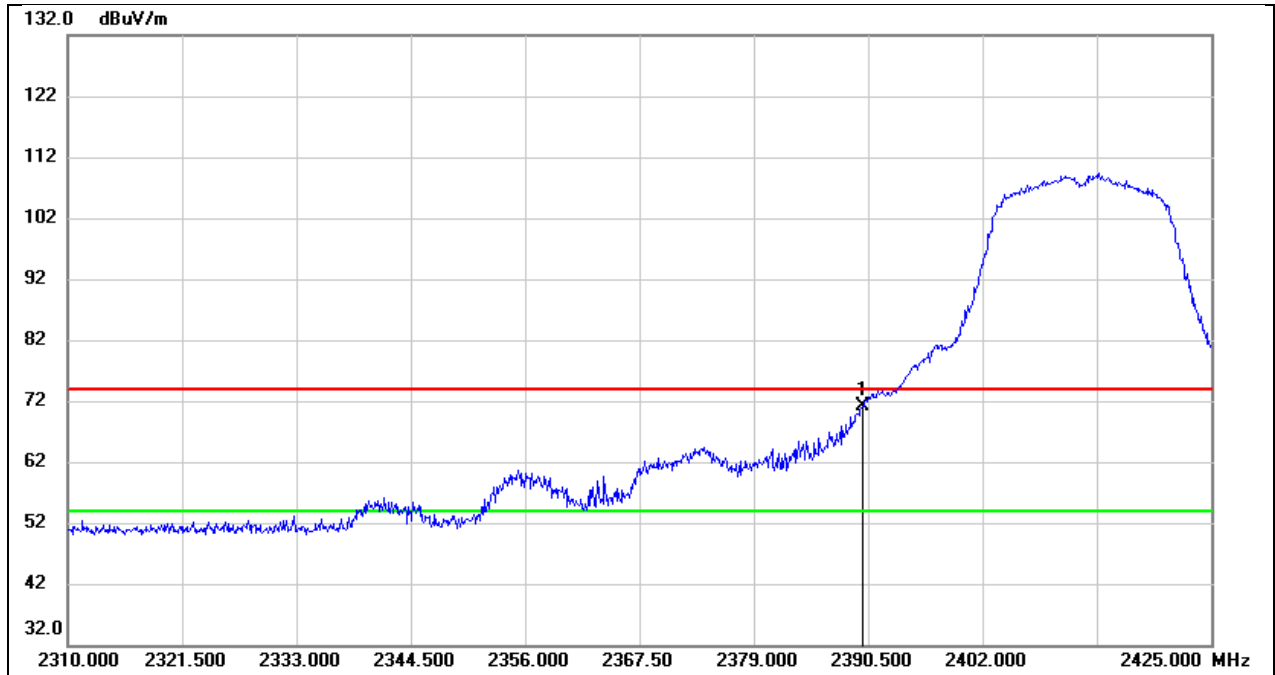


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	39.47	31.69	71.16	74.00	-2.84	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

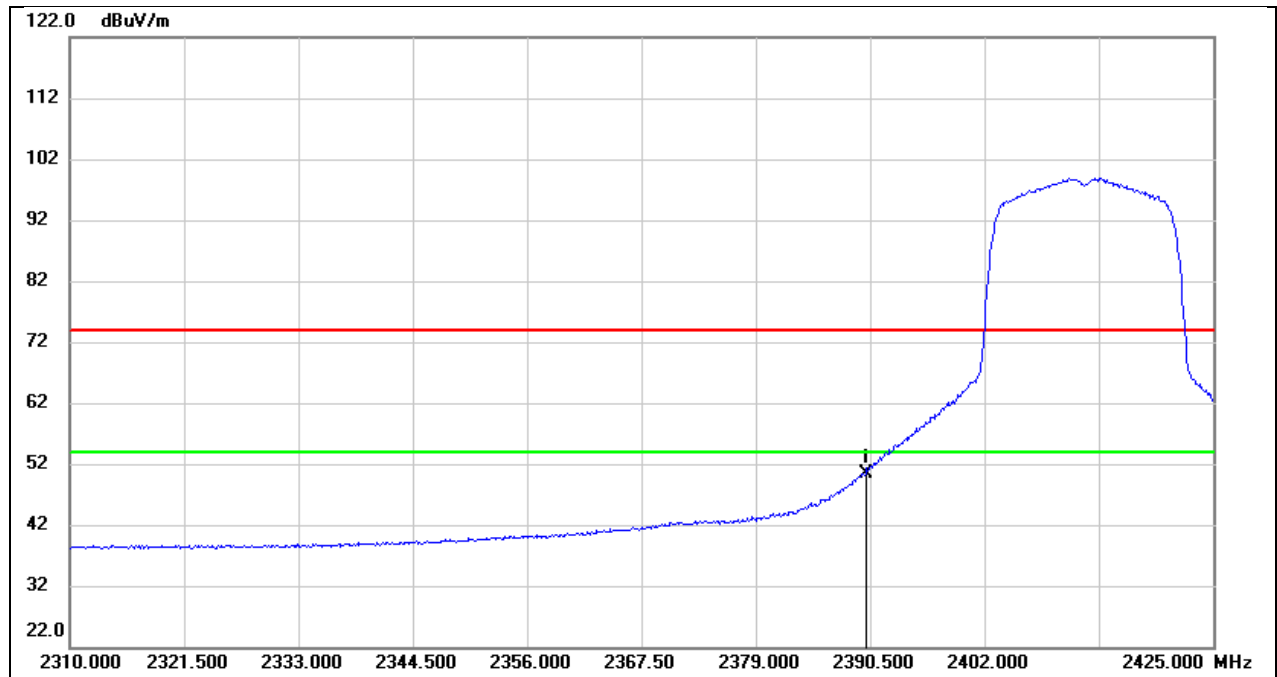


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	18.75	31.69	50.44	54.00	-3.56	AVG

Test Mode:	802.11n HT20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

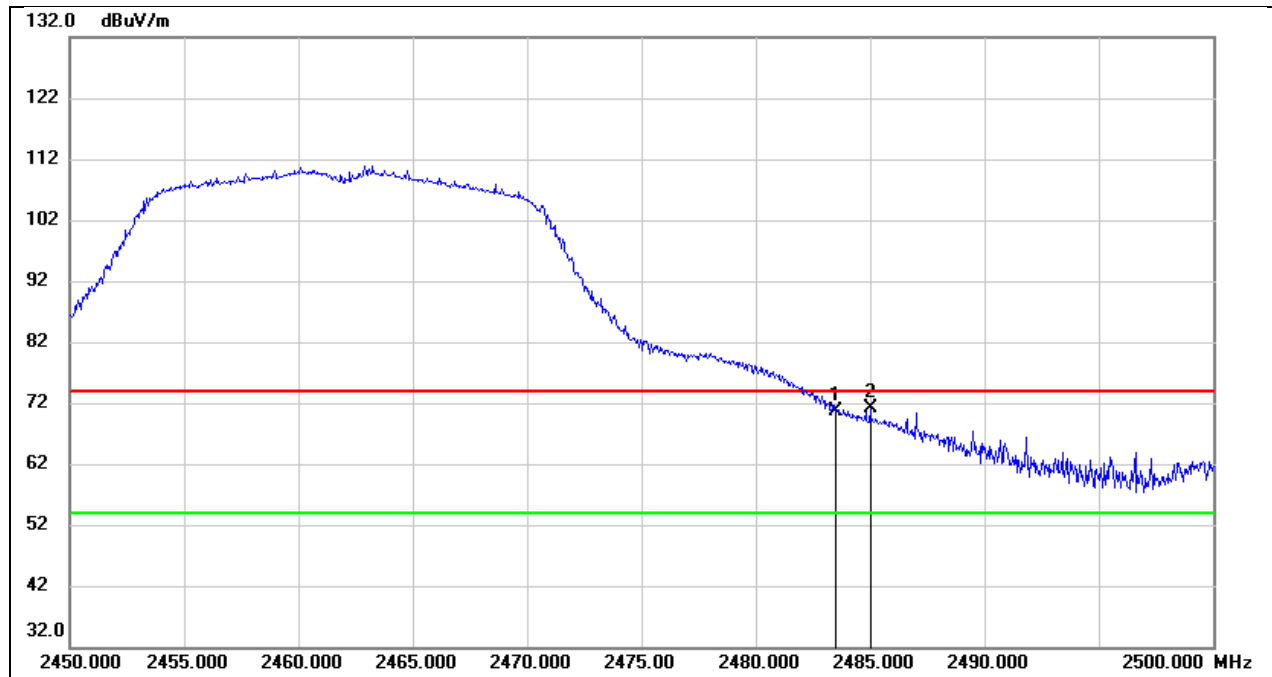


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	38.58	31.99	70.57	74.00	-3.43	peak
2	2485.000	39.02	31.99	71.01	74.00	-2.99	peak

Test Mode:	802.11n HT20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

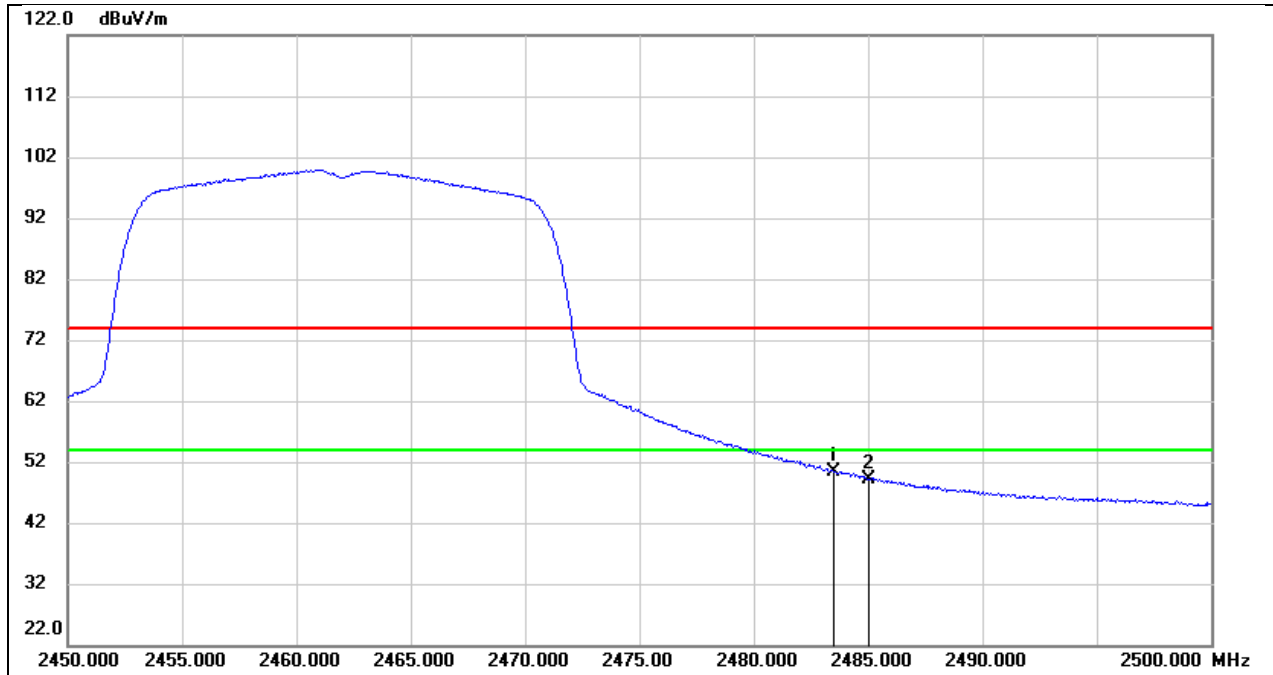


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.41	31.99	50.40	54.00	-3.60	AVG
2	2485.000	17.12	31.99	49.11	54.00	-4.89	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

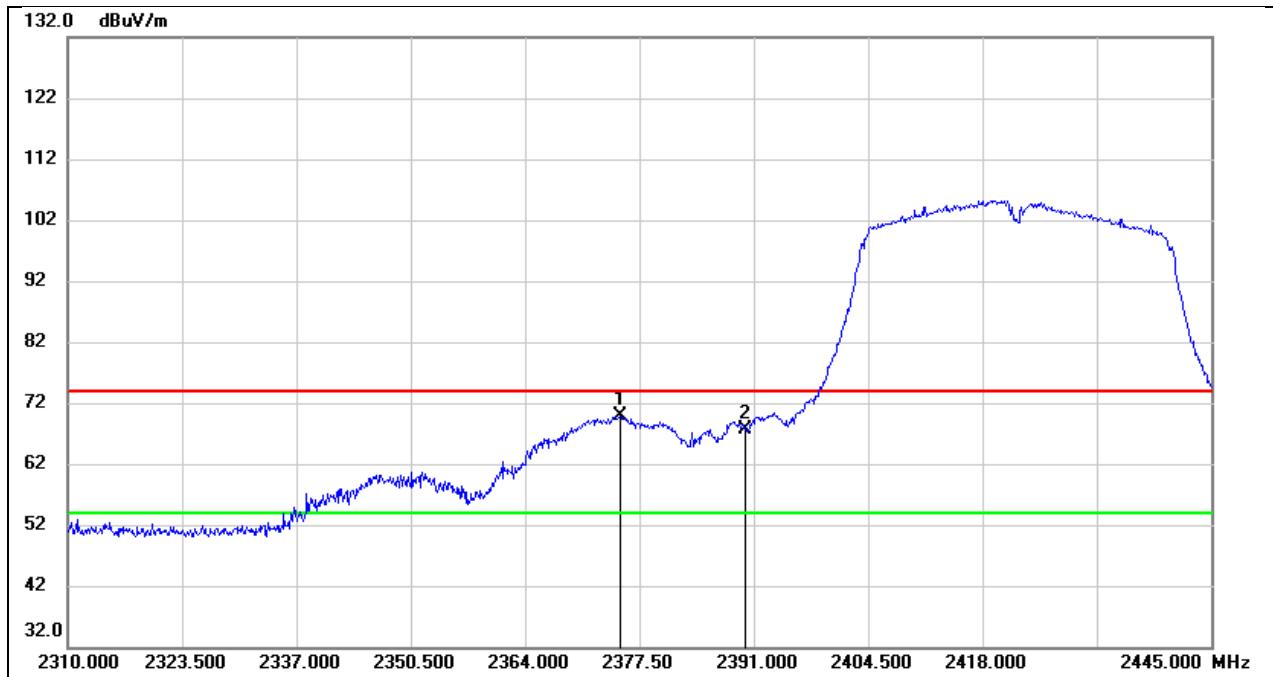


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.205	38.37	31.62	69.99	74.00	-4.01	peak
2	2390.000	35.88	31.69	67.57	74.00	-6.43	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

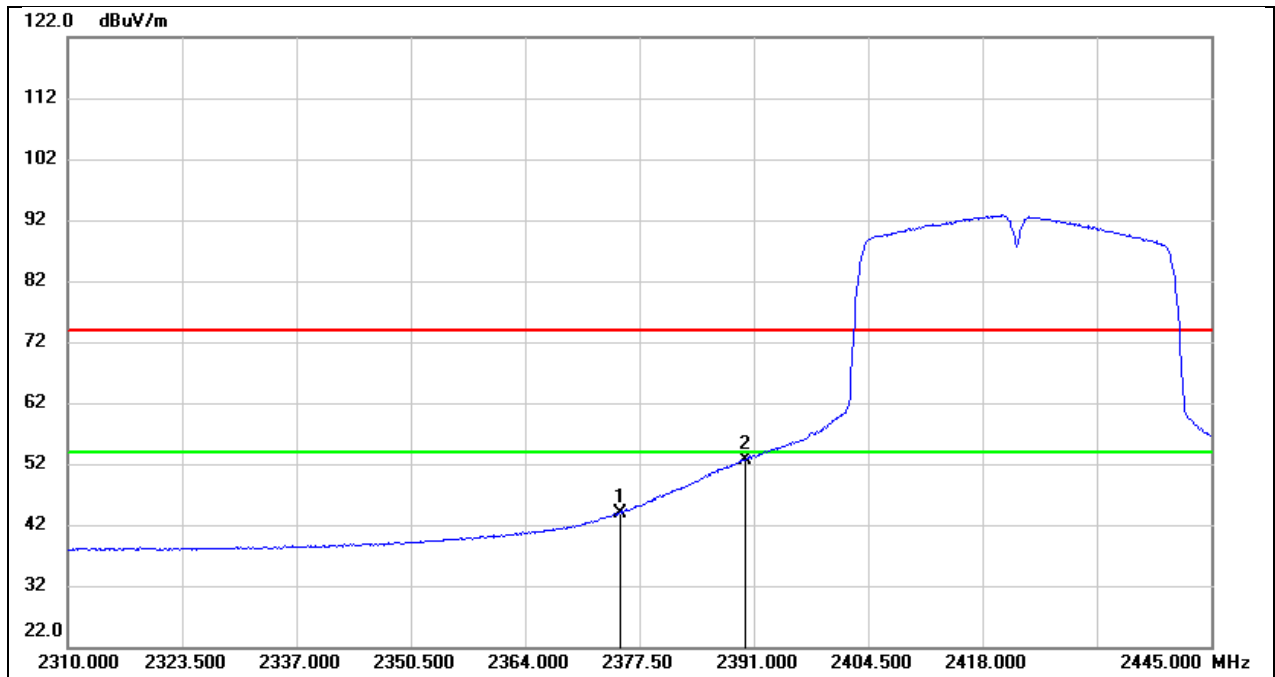


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.205	12.31	31.62	43.93	54.00	-10.07	AVG
2	2390.000	21.06	31.69	52.75	54.00	-1.25	AVG

Test Mode:	802.11n HT40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

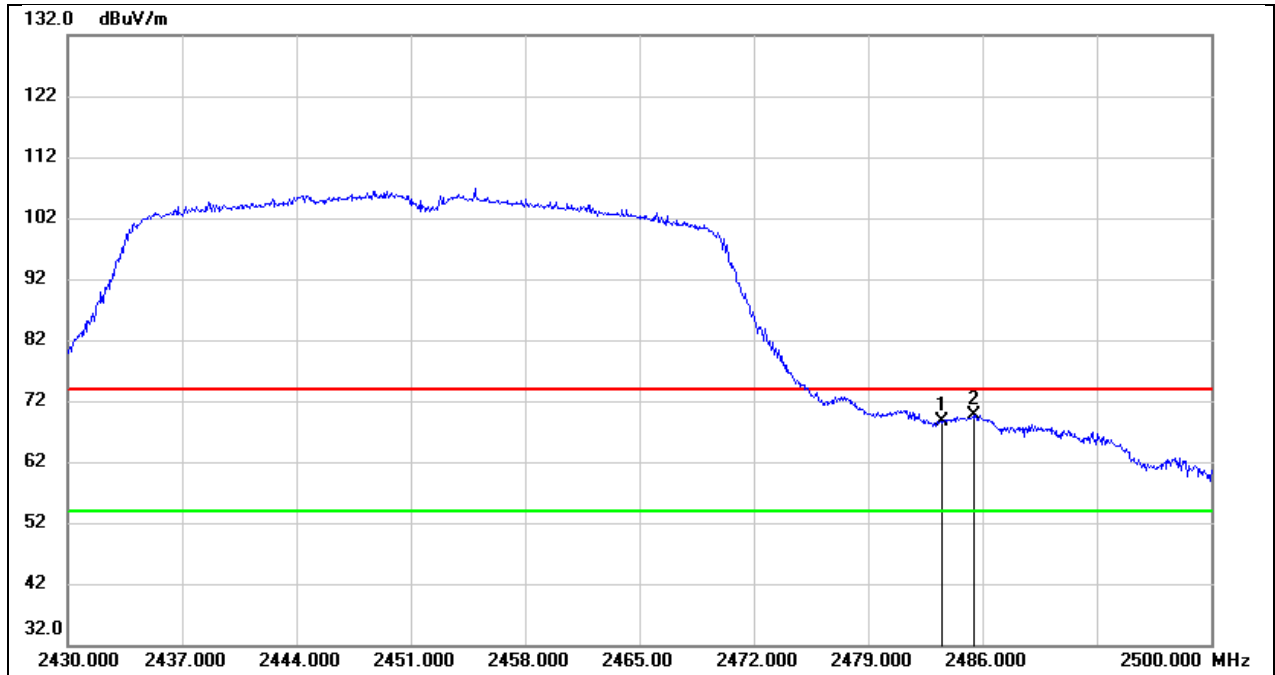


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	36.69	31.99	68.68	74.00	-5.32	peak
2	2485.510	37.74	32.00	69.74	74.00	-4.26	peak

Test Mode:	802.11n HT40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

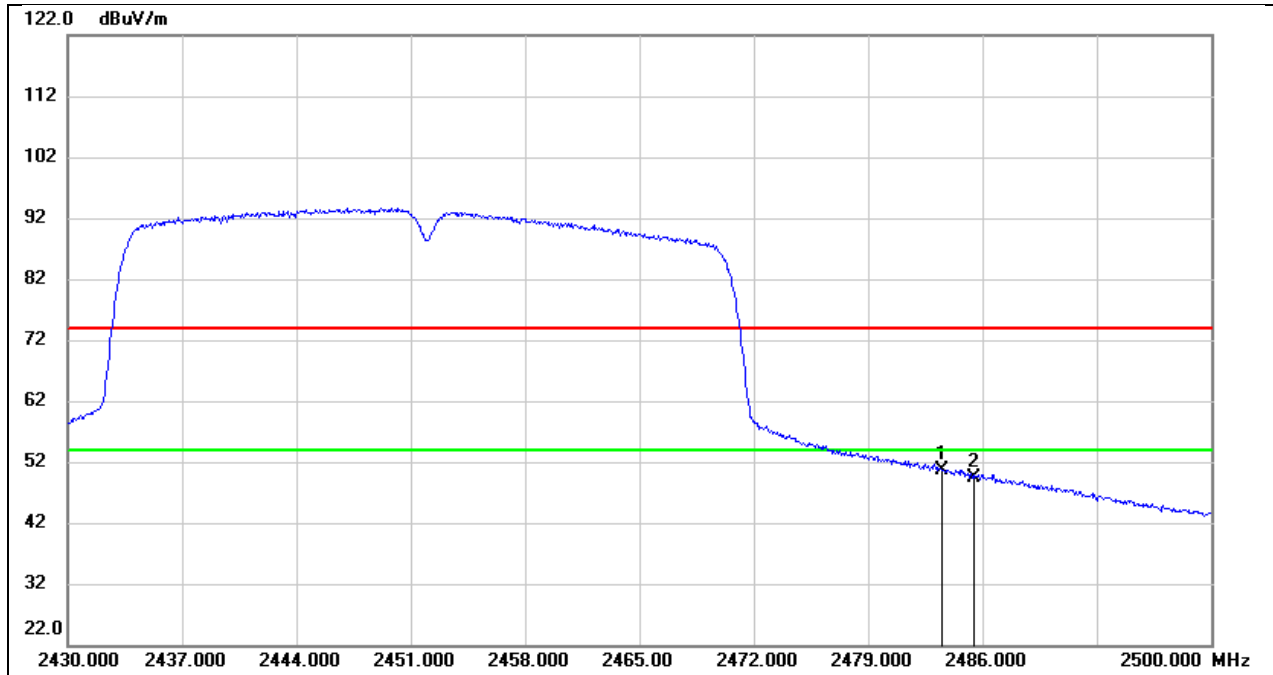


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.63	31.99	50.62	54.00	-3.38	AVG
2	2485.510	17.42	32.00	49.42	54.00	-4.58	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

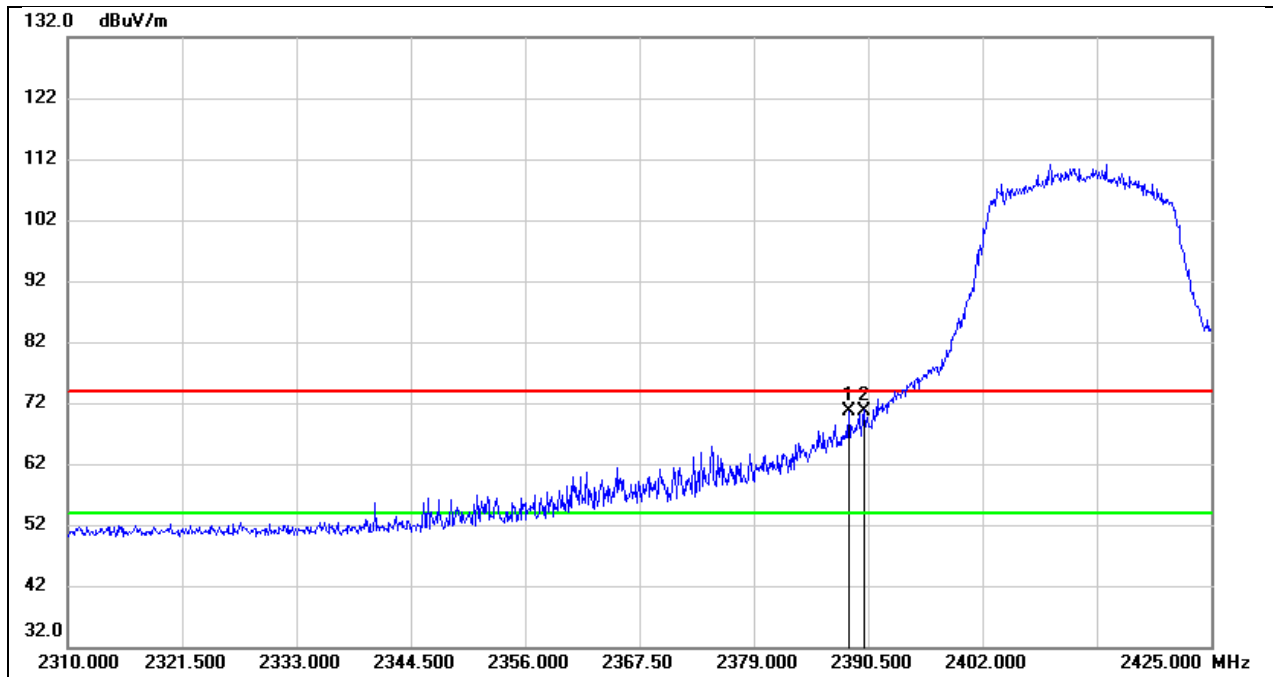


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.545	38.91	31.68	70.59	74.00	-3.41	peak
2	2390.000	39.06	31.69	70.75	74.00	-3.25	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

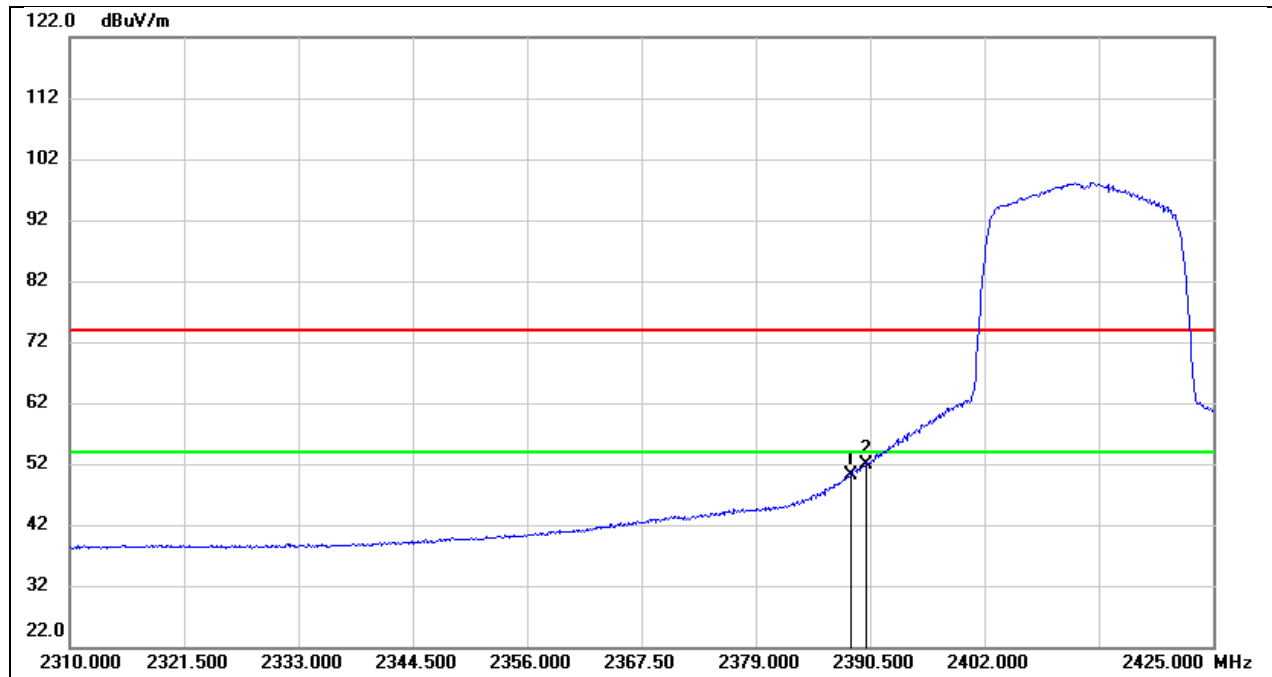


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.545	18.42	31.68	50.10	54.00	-3.90	AVG
2	2390.000	20.29	31.69	51.98	54.00	-2.02	AVG

Test Mode:	802.11ax HE20 PK	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

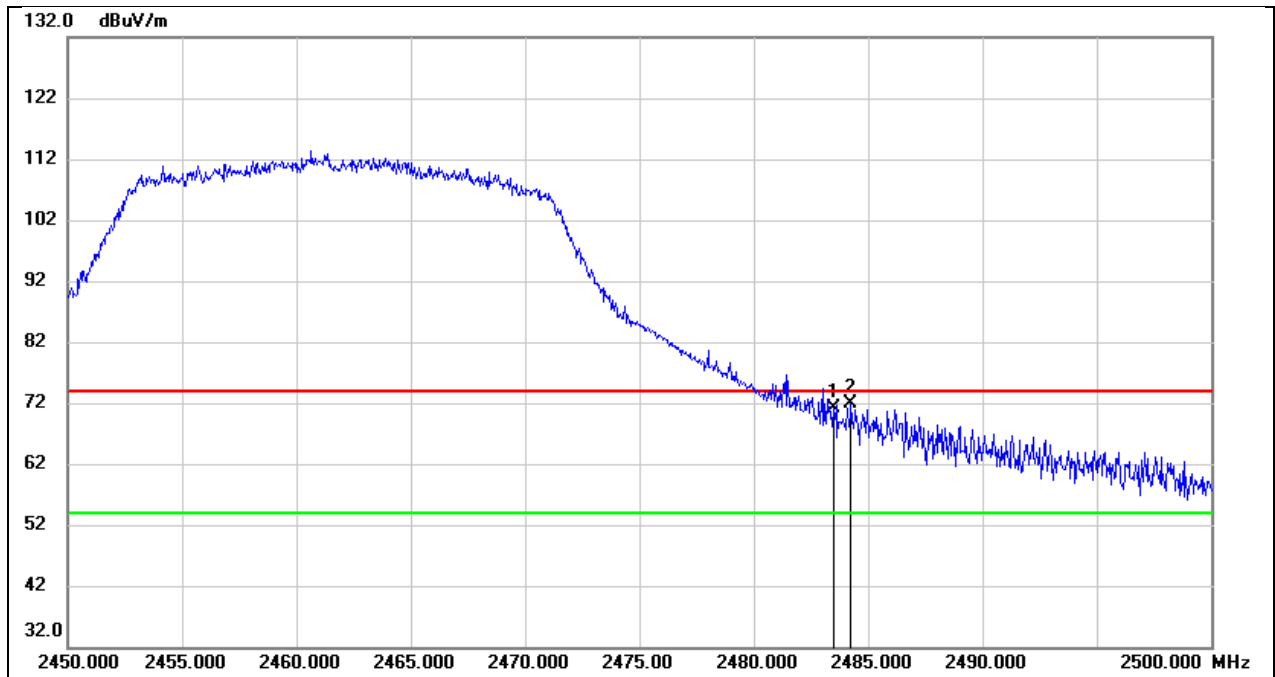


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.25	31.99	71.24	74.00	-2.76	peak
2	2484.250	39.85	31.99	71.84	74.00	-2.16	peak

Test Mode:	802.11ax HE20 AV	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

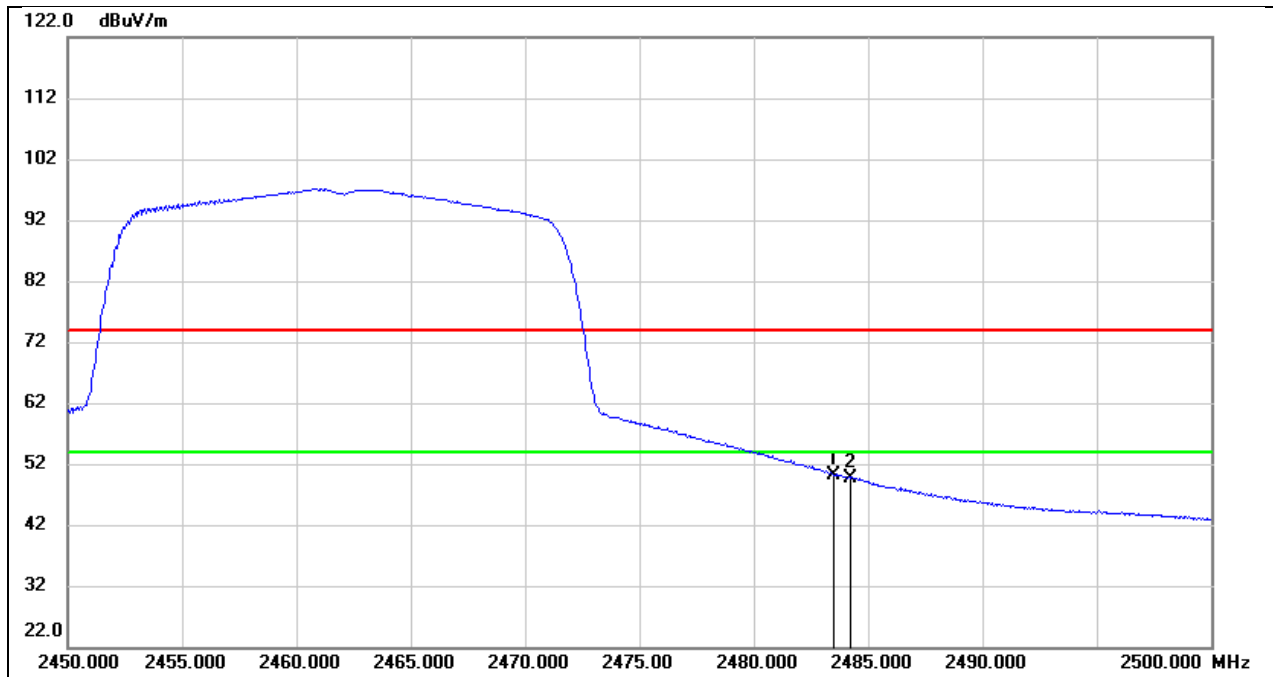


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.18	31.99	50.17	54.00	-3.83	AVG
2	2484.250	17.63	31.99	49.62	54.00	-4.38	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

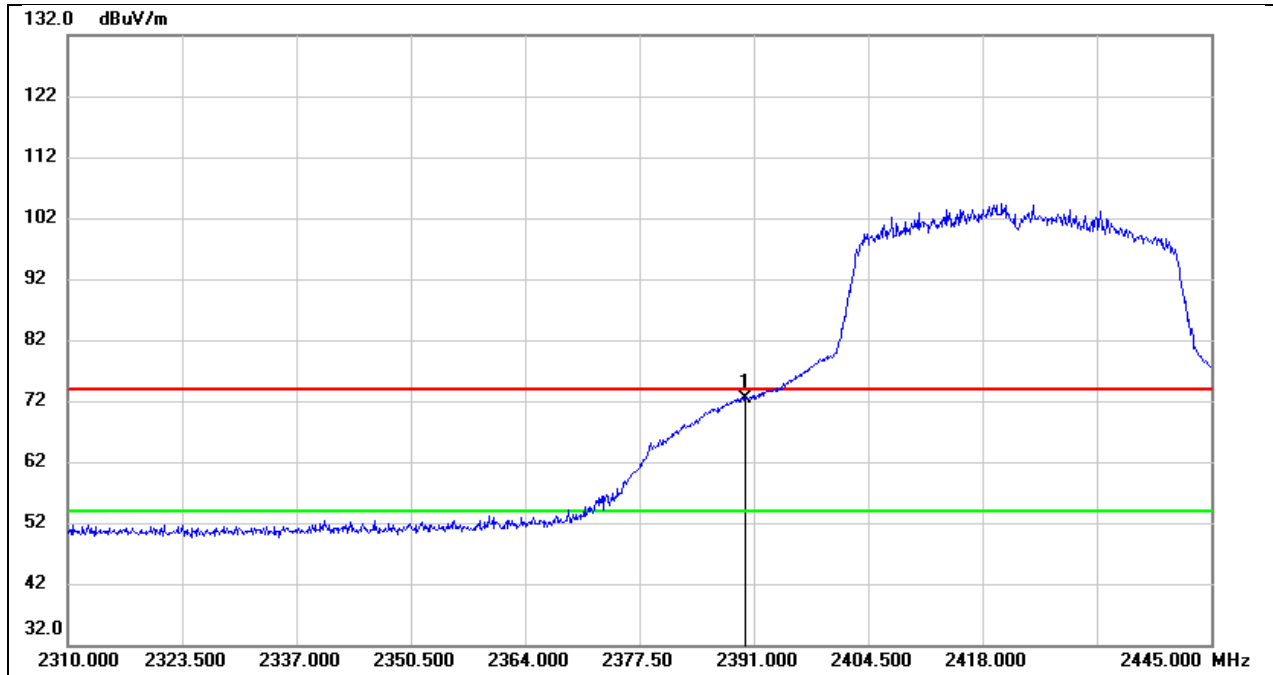


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	40.69	31.69	72.38	74.00	-1.62	peak

Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

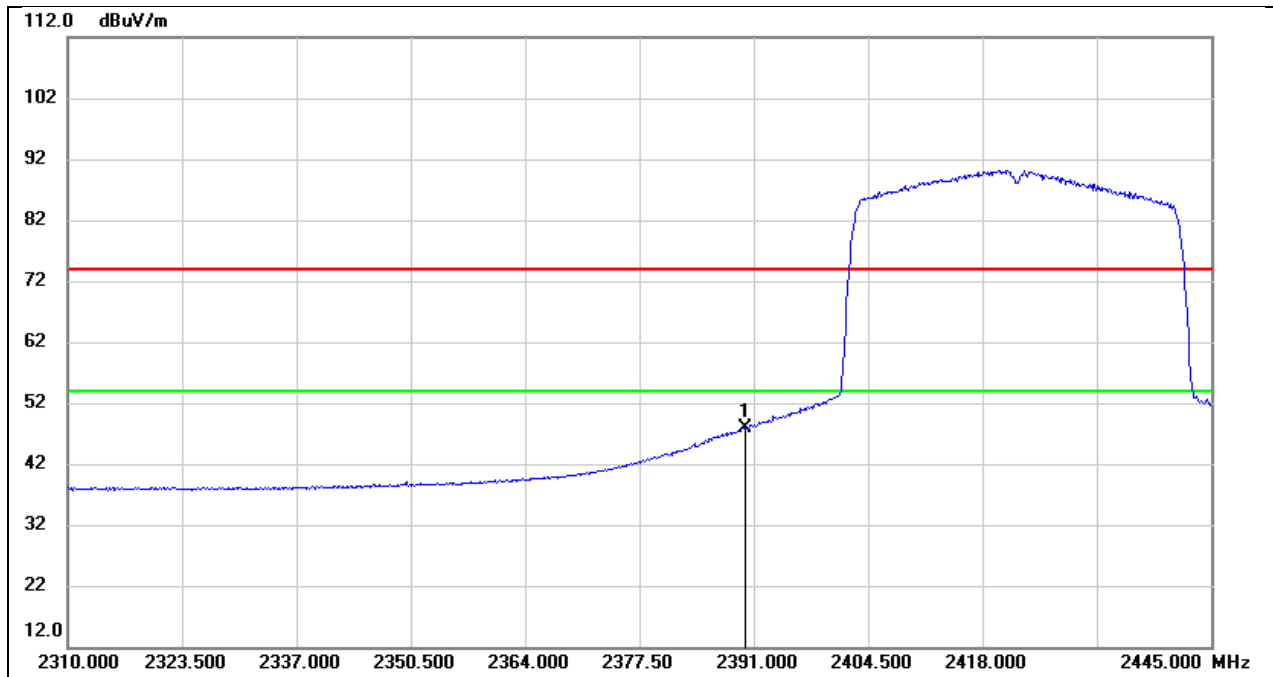


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.09	31.69	47.78	54.00	-6.22	AVG

Test Mode:	802.11ax HE40 PK	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

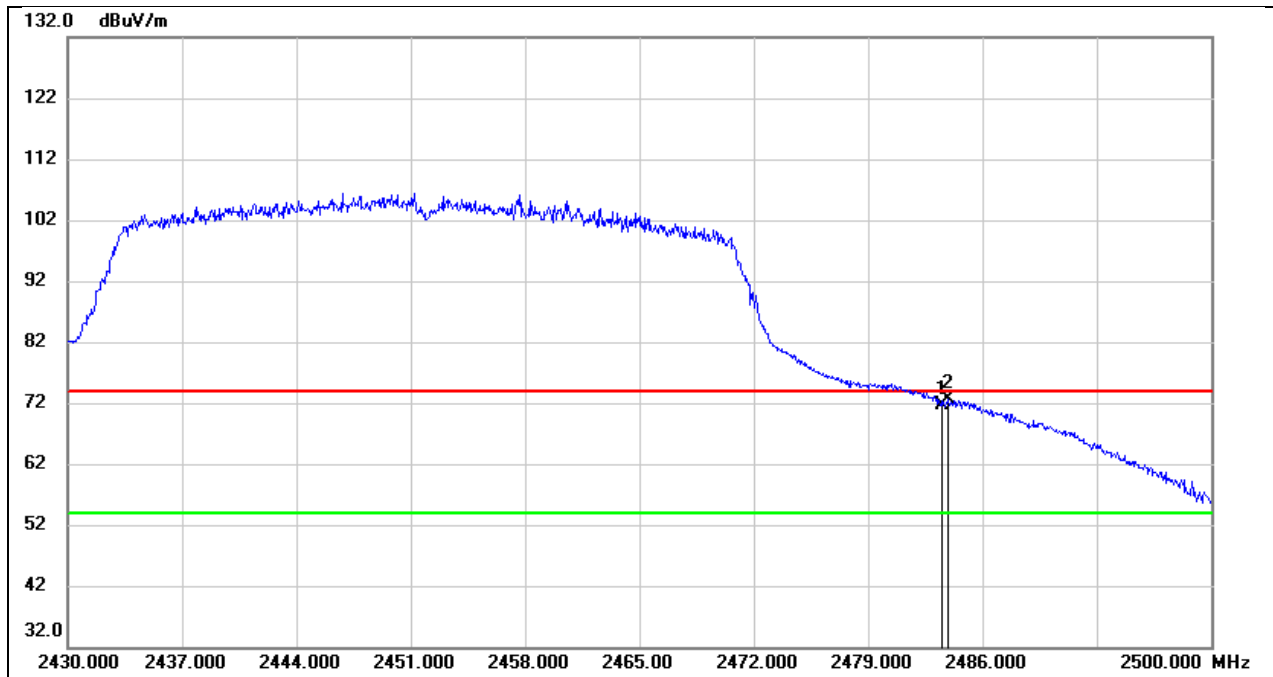

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	39.72	31.99	71.71	74.00	-2.29	peak
2	2483.900	40.53	31.99	72.52	74.00	-1.48	peak


Test Mode:	802.11ax HE40 AV	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

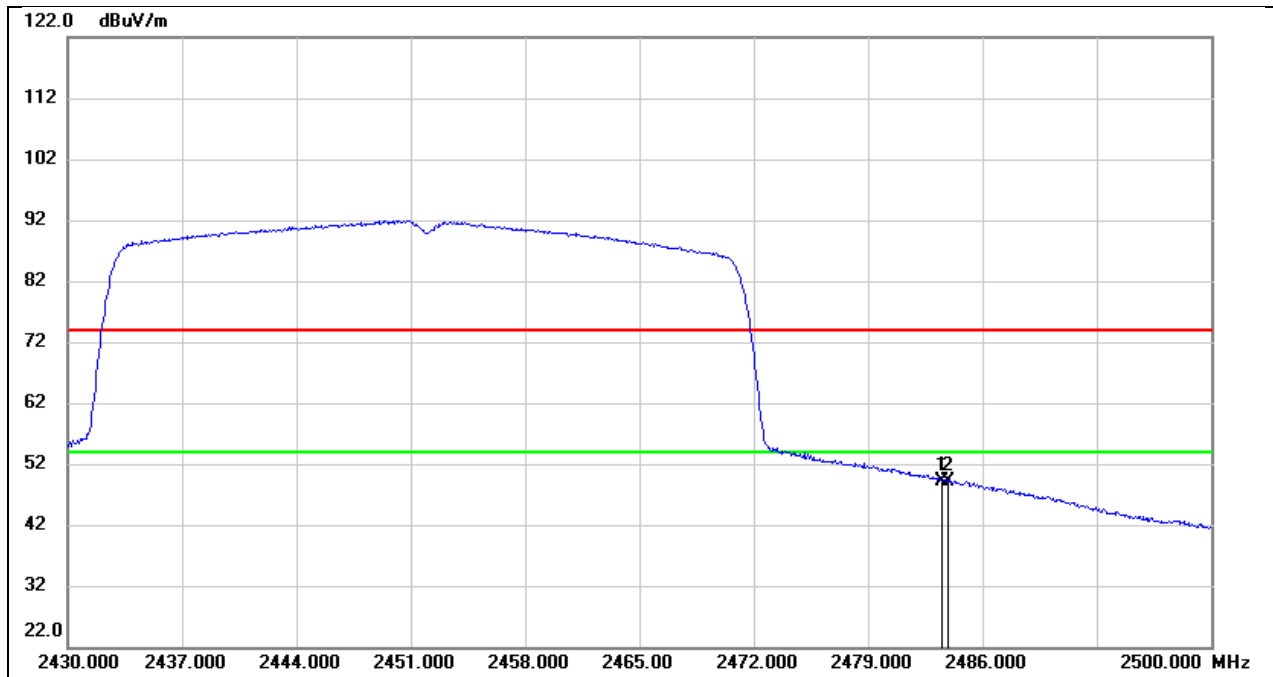

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.25	31.99	49.24	54.00	-4.76	AVG
2	2483.900	17.26	31.99	49.25	54.00	-4.75	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

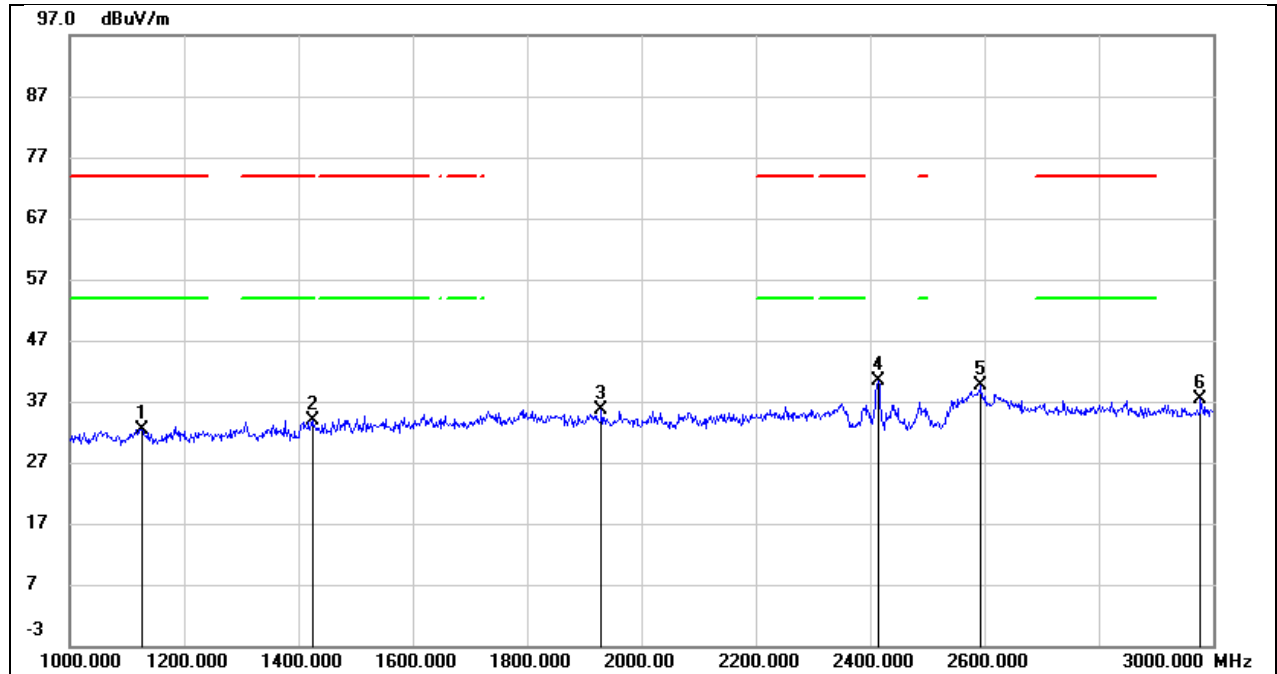


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1126.000	46.18	-13.75	32.43	74.00	-41.57	peak
2	1424.000	46.21	-12.31	33.90	74.00	-40.10	peak
3*	1930.000	45.82	-10.22	35.60	/	/	peak
4	2412.000	48.90	-8.57	40.33	/	/	Fundamental
5*	2594.000	47.37	-7.82	39.55	/	/	peak
6*	2978.000	43.74	-6.30	37.44	/	/	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

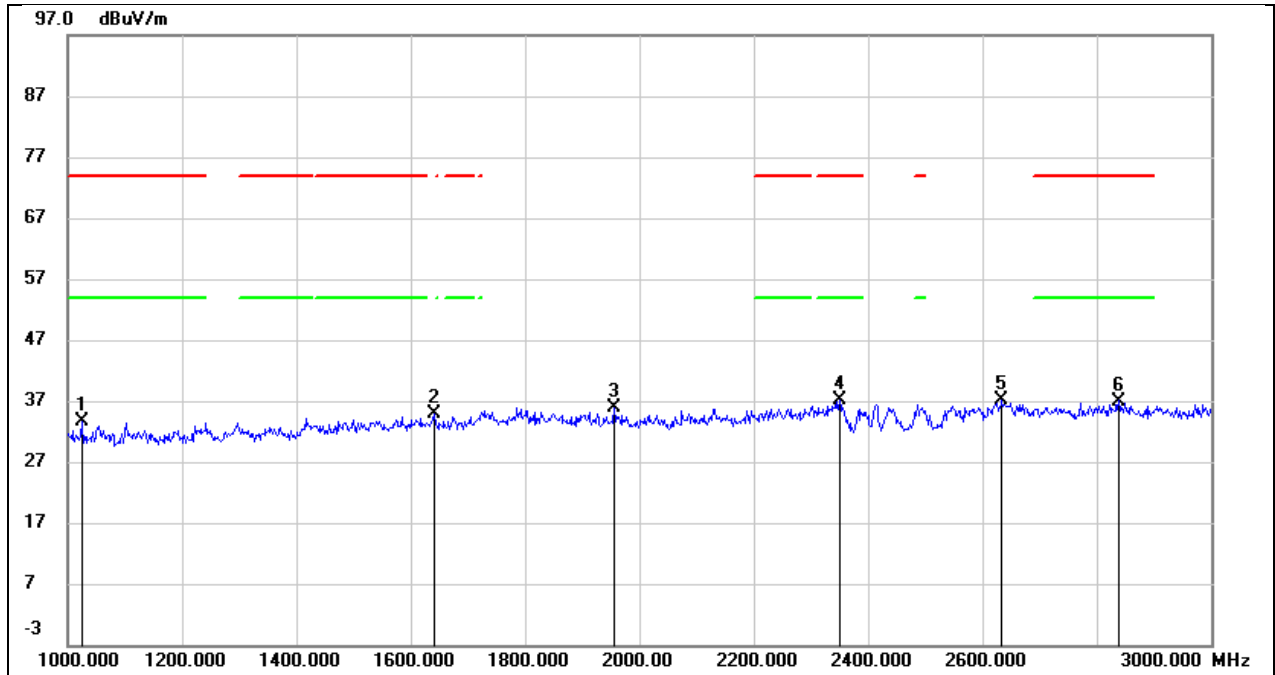


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1024.000	47.89	-14.23	33.66	74.00	-40.34	peak
2*	1642.000	46.00	-11.13	34.87	/	/	peak
3*	1956.000	46.24	-10.25	35.99	/	/	peak
4	2350.000	46.06	-8.84	37.22	74.00	-36.78	peak
5*	2634.000	44.73	-7.68	37.05	/	/	peak
6	2838.000	43.89	-6.89	37.00	74.00	-37.00	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

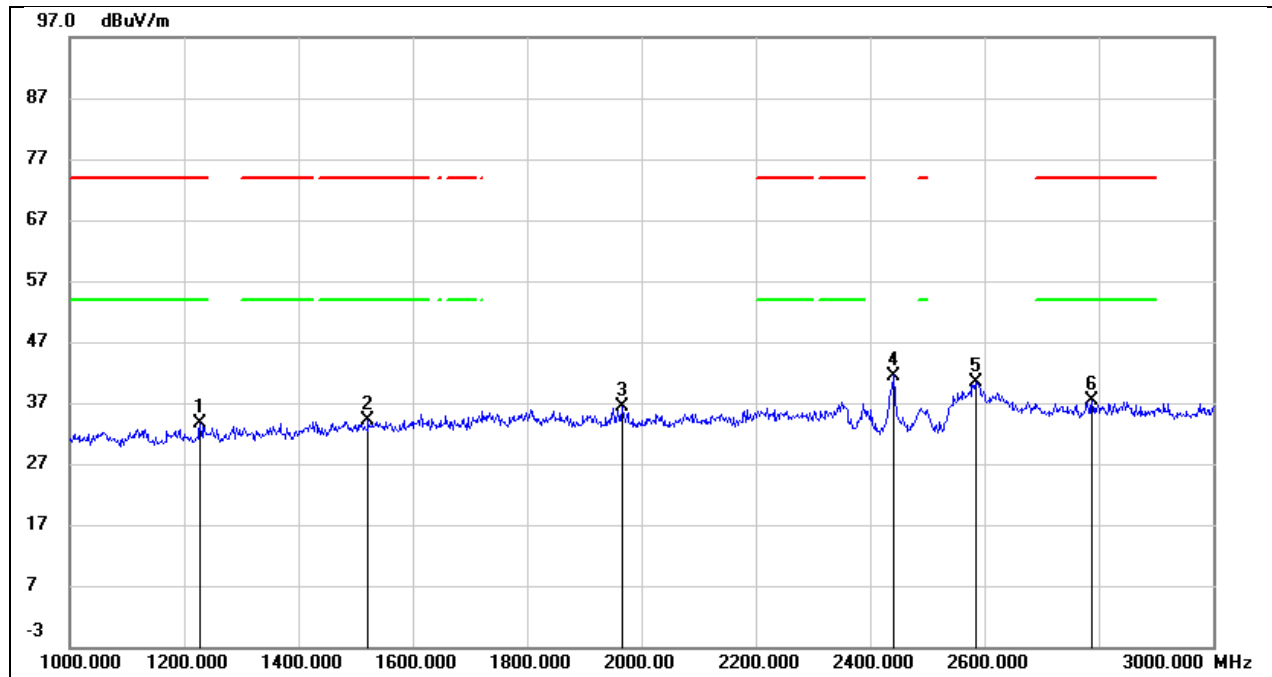


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1228.000	46.79	-13.27	33.52	74.00	-40.48	peak
2	1522.000	46.00	-11.78	34.22	74.00	-39.78	peak
3*	1966.000	46.58	-10.26	36.32	/	/	peak
4	2437.000	49.95	-8.45	41.50	/	/	Fundamental
5*	2584.000	48.16	-7.87	40.29	/	/	peak
6	2788.000	44.53	-7.09	37.44	74.00	-36.56	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

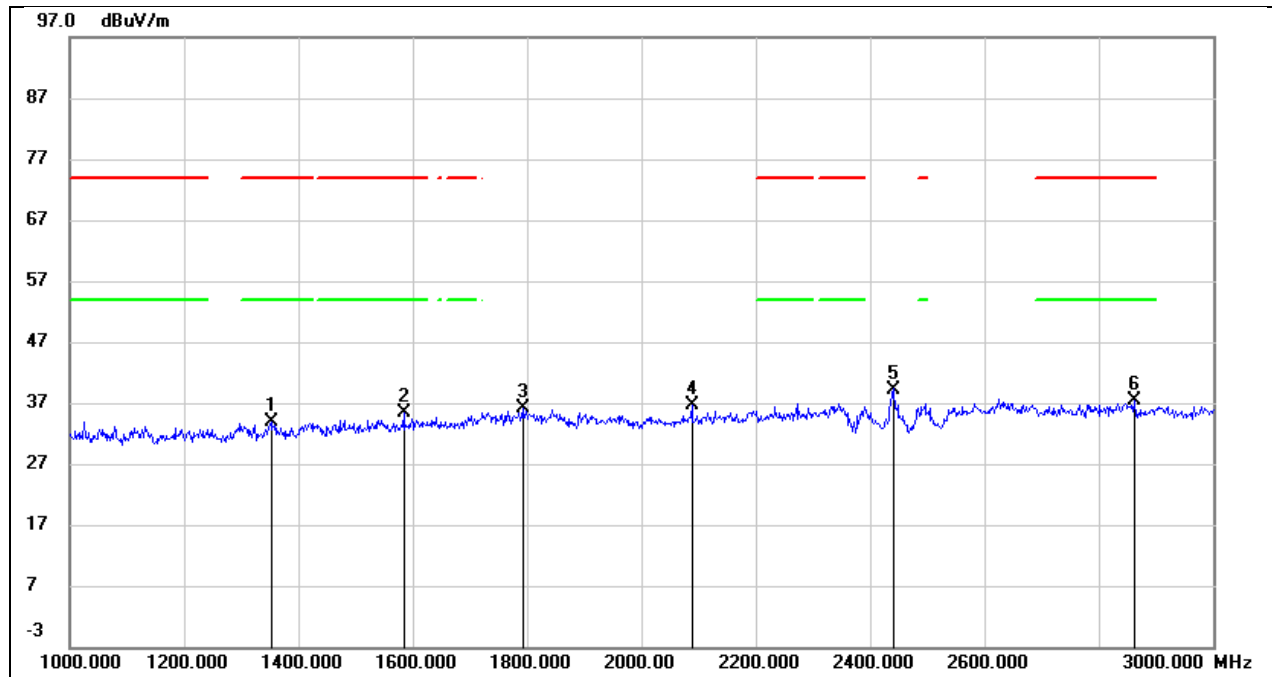


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1352.000	46.48	-12.67	33.81	74.00	-40.19	peak
2	1584.000	46.78	-11.49	35.29	74.00	-38.71	peak
3*	1792.000	46.32	-10.13	36.19	/	/	peak
4*	2088.000	46.54	-9.93	36.61	/	/	peak
5	2437.000	47.71	-8.46	39.25	/	/	Fundamental
6	2862.000	44.04	-6.78	37.26	74.00	-36.74	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

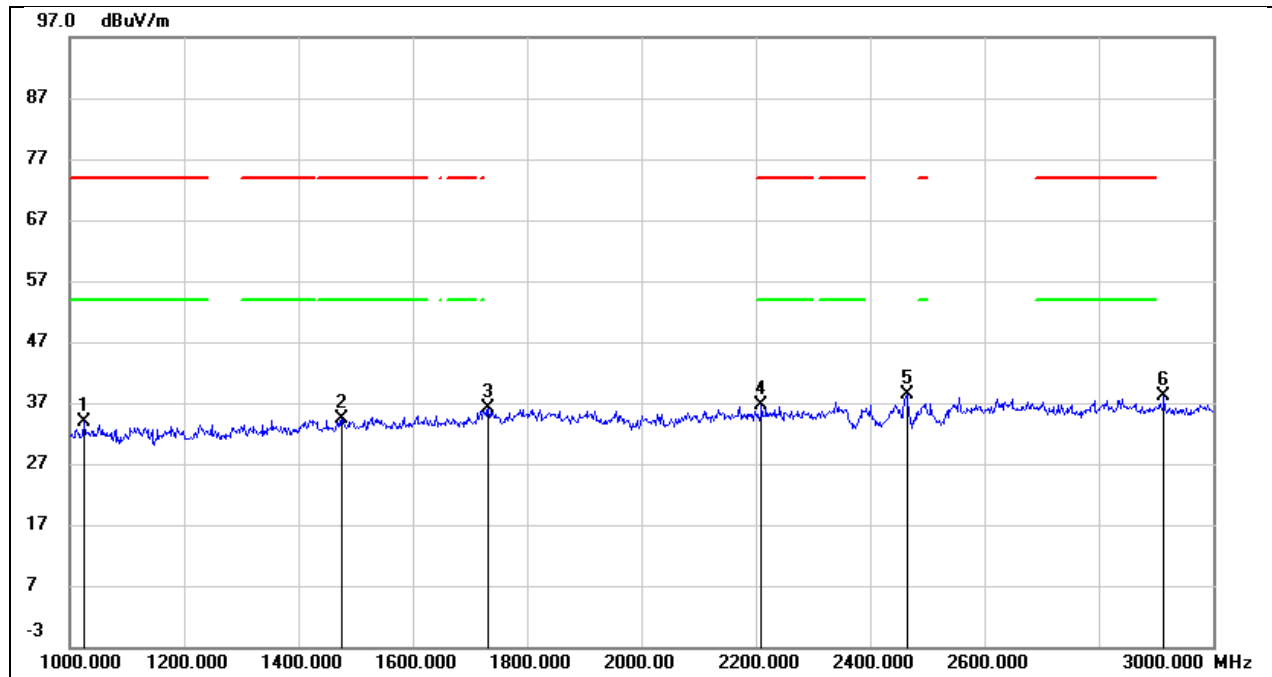

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1024.000	48.11	-14.23	33.88	74.00	-40.12	peak
2	1476.000	46.35	-12.01	34.34	74.00	-39.66	peak
3*	1732.000	46.66	-10.53	36.13	/	/	peak
4	2210.000	45.99	-9.42	36.57	74.00	-37.43	peak
5	2462.000	46.74	-8.36	38.38	/	/	Fundamental
6*	2914.000	44.78	-6.57	38.21	/	/	peak


Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 7.16V

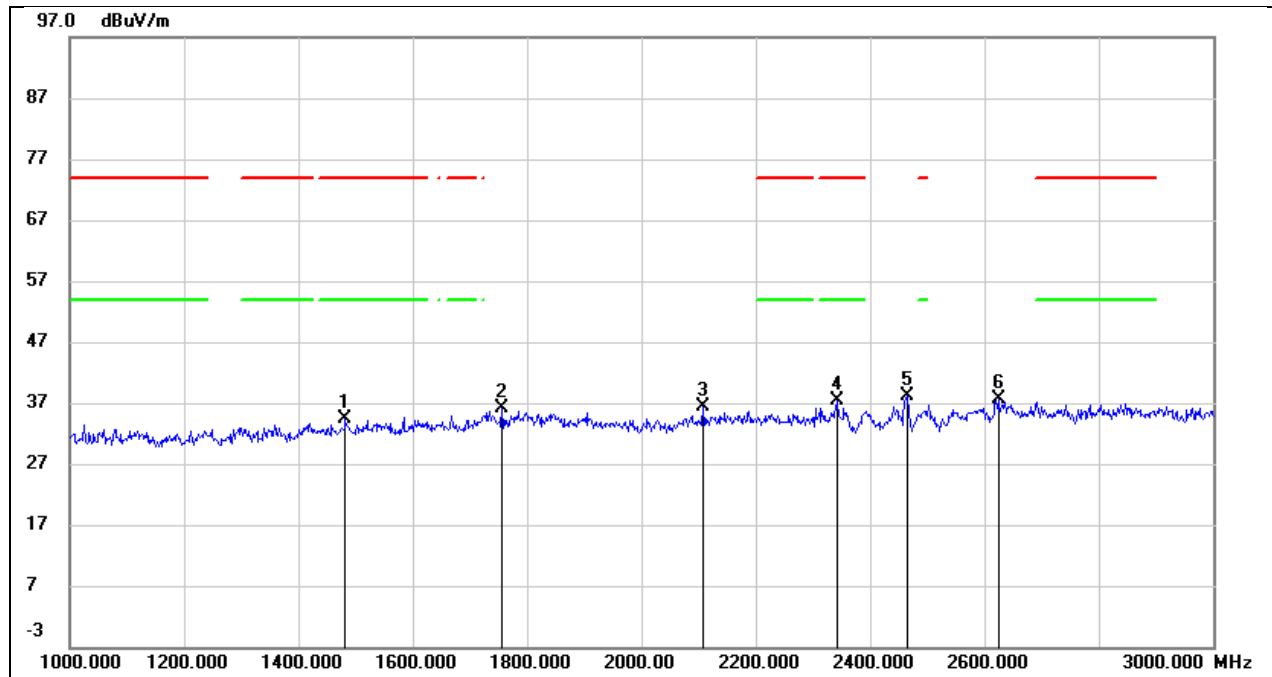

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1482.000	46.28	-11.98	34.30	74.00	-39.70	peak
2*	1756.000	46.57	-10.38	36.19	/	/	peak
3*	2108.000	46.19	-9.85	36.34	/	/	peak
4	2342.000	46.34	-8.87	37.47	74.00	-36.53	peak
5	2462.000	46.50	-8.35	38.15	/	/	Fundamental
6*	2624.000	45.39	-7.72	37.67	/	/	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

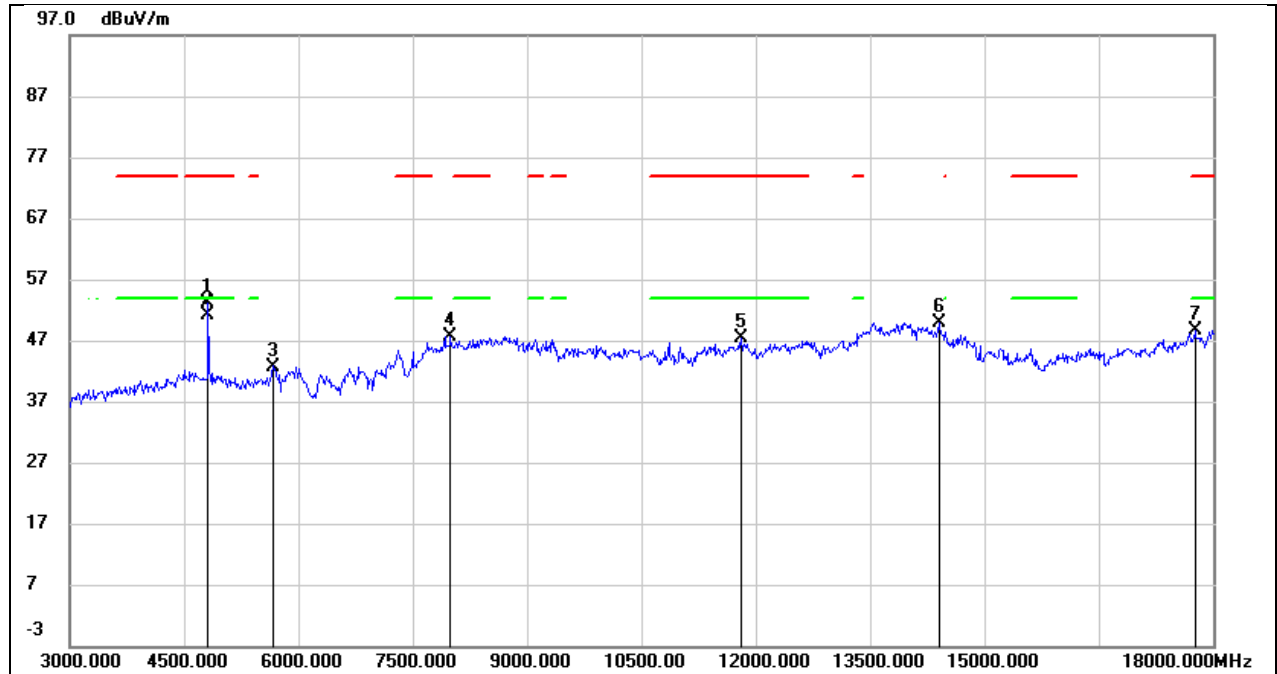


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	52.45	0.60	53.05	74.00	-20.95	peak
2	4815.000	50.61	0.60	51.21	54.00	-2.79	AVG
3*	5670.000	40.42	2.33	42.75	/	/	peak
4*	7995.000	39.54	8.12	47.66	/	/	peak
5	11805.000	28.87	18.45	47.32	74.00	-26.68	peak
6*	14400.000	27.67	22.27	49.94	/	/	peak
7	17760.000	22.10	26.54	48.64	74.00	-25.36	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

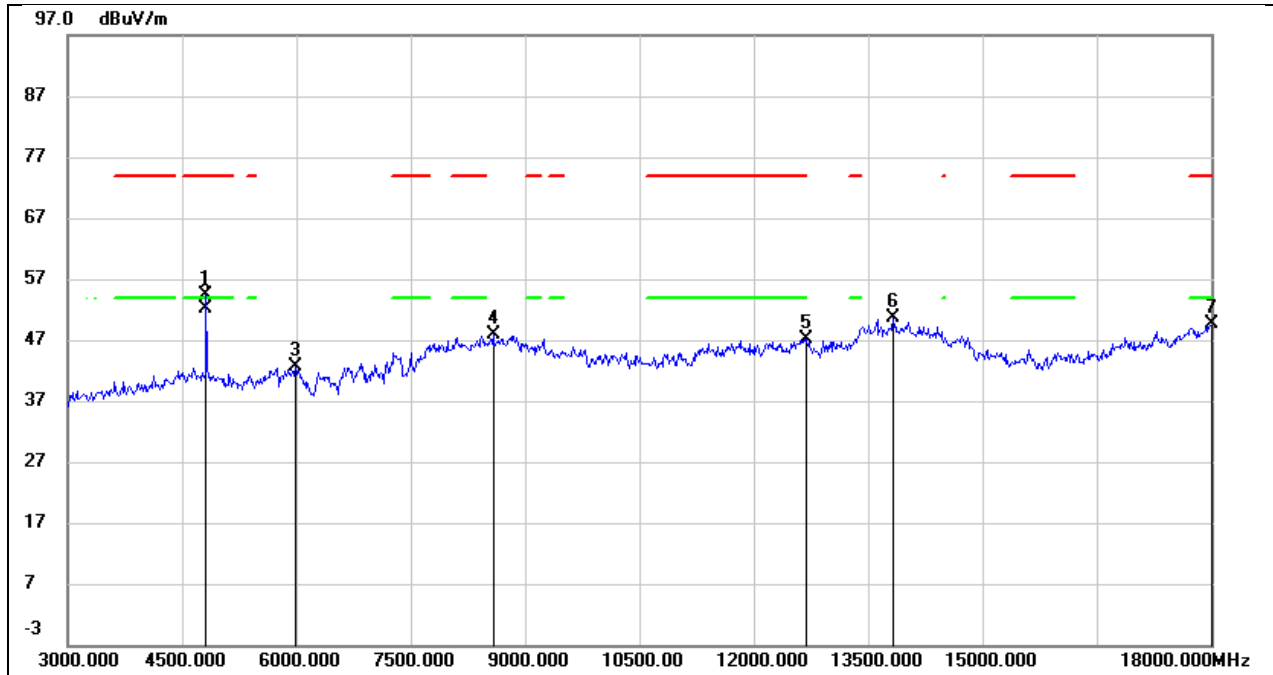


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	53.71	0.60	54.31	74.00	-19.69	peak
2	4815.000	51.52	0.60	52.12	54.00	-1.88	AVG
3*	5985.000	39.62	2.91	42.53	/	/	peak
4*	8580.000	38.73	9.24	47.97	/	/	peak
5	12690.000	27.34	19.85	47.19	74.00	-26.81	peak
6*	13830.000	27.14	23.39	50.53	/	/	peak
7	18000.000	21.18	28.54	49.72	74.00	-24.28	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

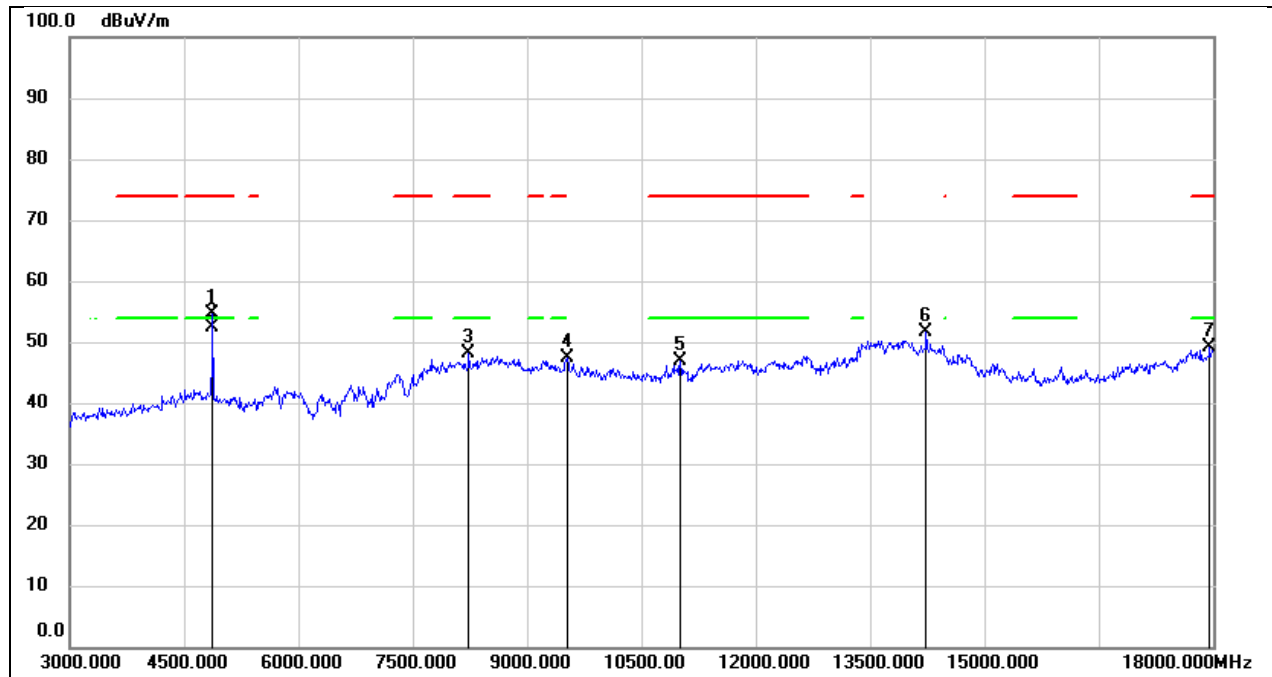


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	53.83	0.75	54.58	74.00	-19.42	peak
2	4875.000	51.64	0.75	52.39	54.00	-1.61	AVG
3	8235.000	39.56	8.66	48.22	74.00	-25.78	peak
4*	9525.000	35.13	12.32	47.45	/	/	peak
5	11010.000	30.59	16.40	46.99	74.00	-27.01	peak
6*	14235.000	28.48	23.27	51.75	/	/	peak
7	17955.000	20.94	28.14	49.08	74.00	-24.92	peak

Test Mode:	802.11b	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

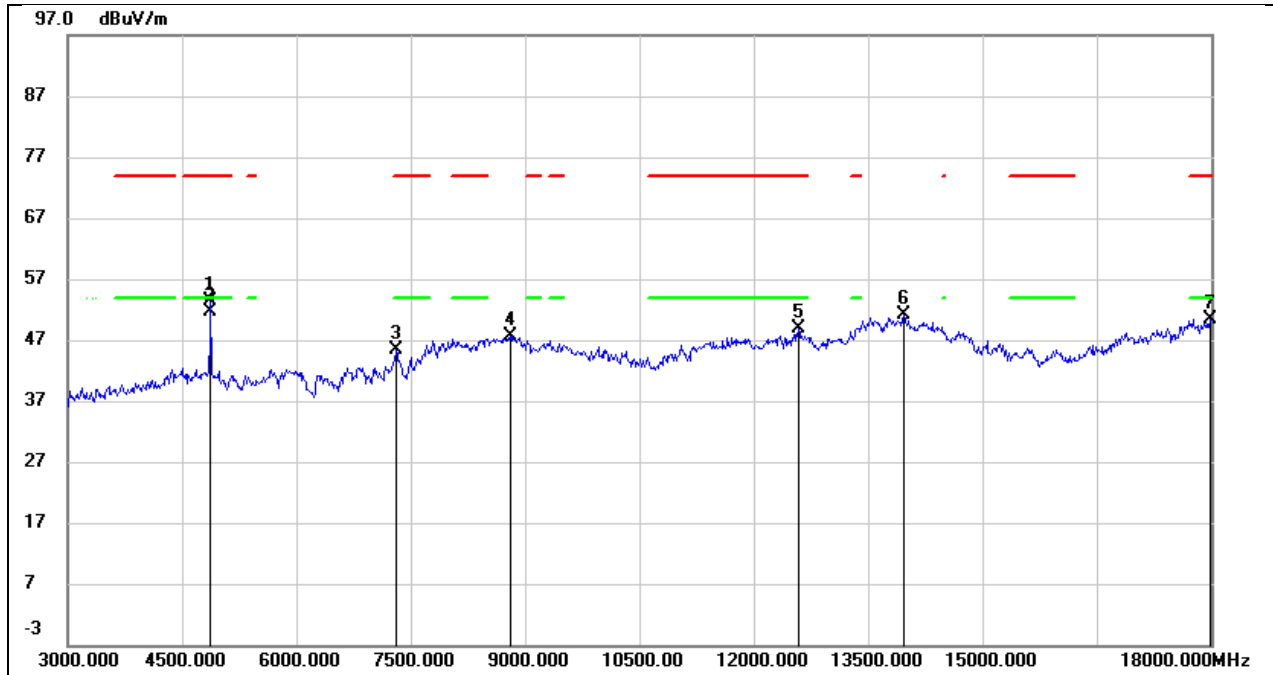


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	52.74	0.75	53.49	74.00	-20.51	peak
2	4875.000	50.78	0.75	51.53	54.00	-2.47	AVG
3	7305.000	38.41	6.88	45.29	74.00	-28.71	peak
4*	8805.000	38.14	9.51	47.65	/	/	peak
5	12585.000	29.15	19.69	48.84	74.00	-25.16	peak
6*	13965.000	27.20	23.96	51.16	/	/	peak
7	17985.000	22.06	28.41	50.47	74.00	-23.53	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

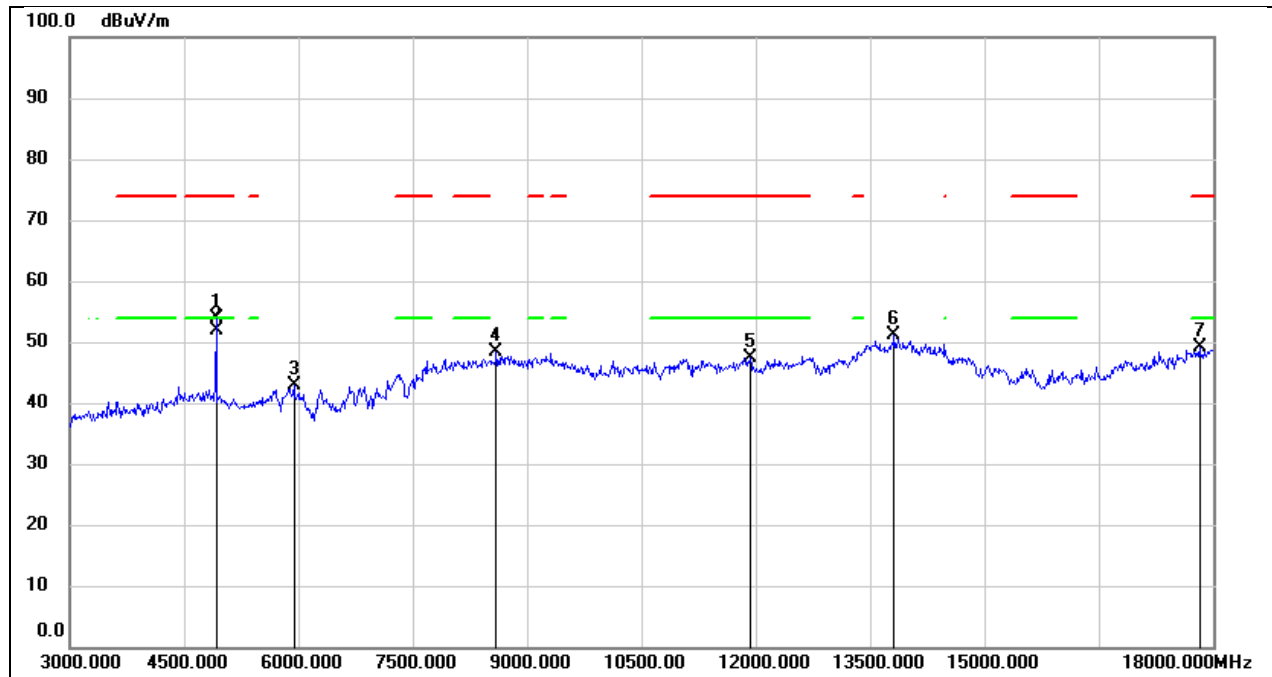


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	52.98	0.86	53.84	74.00	-20.16	peak
2	4920.000	50.90	0.86	51.76	54.00	-2.24	AVG
3*	5940.000	40.09	2.83	42.92	/	/	peak
4*	8595.000	39.05	9.27	48.32	/	/	peak
5	11925.000	28.66	18.68	47.34	74.00	-26.66	peak
6*	13815.000	27.79	23.34	51.13	/	/	peak
7	17820.000	22.10	26.95	49.05	74.00	-24.95	peak

Test Mode:	802.11b	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 7.16V

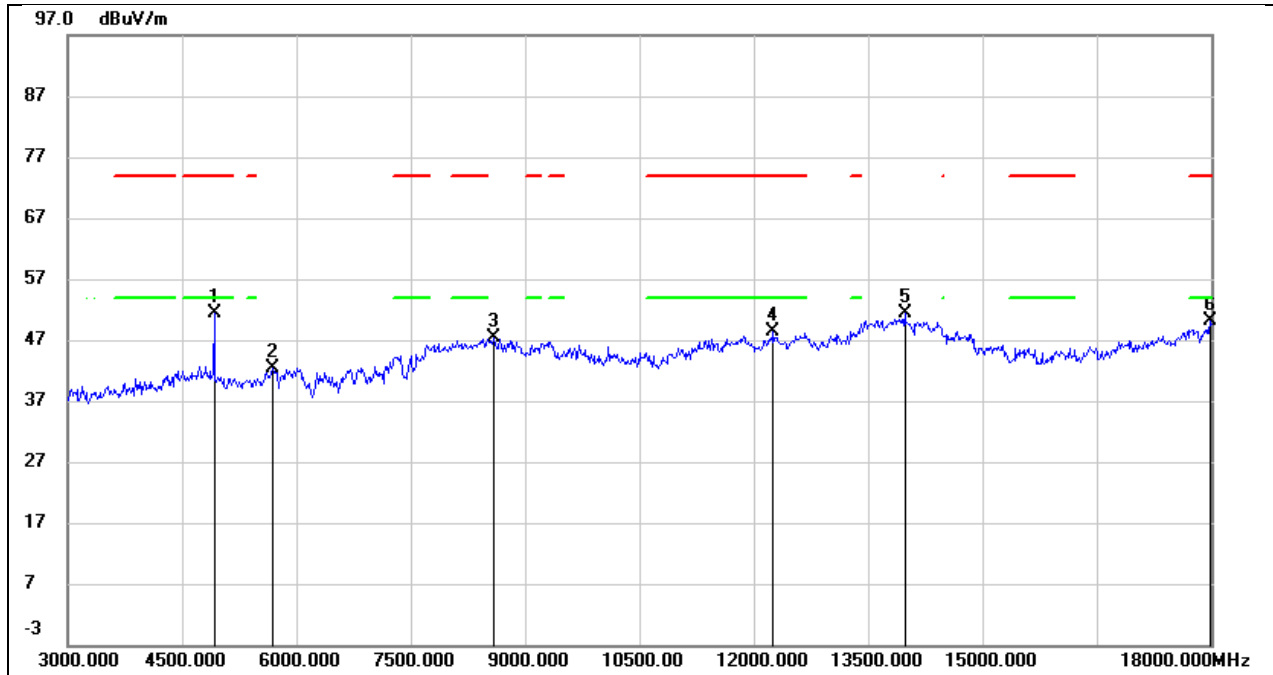


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.53	0.86	51.39	74.00	-22.61	peak
2*	5685.000	40.00	2.37	42.37	/	/	peak
3*	8595.000	38.07	9.27	47.34	/	/	peak
4	12255.000	29.07	19.26	48.33	74.00	-25.67	peak
5*	13980.000	27.43	24.01	51.44	/	/	peak
6	17985.000	21.73	28.41	50.14	74.00	-23.86	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

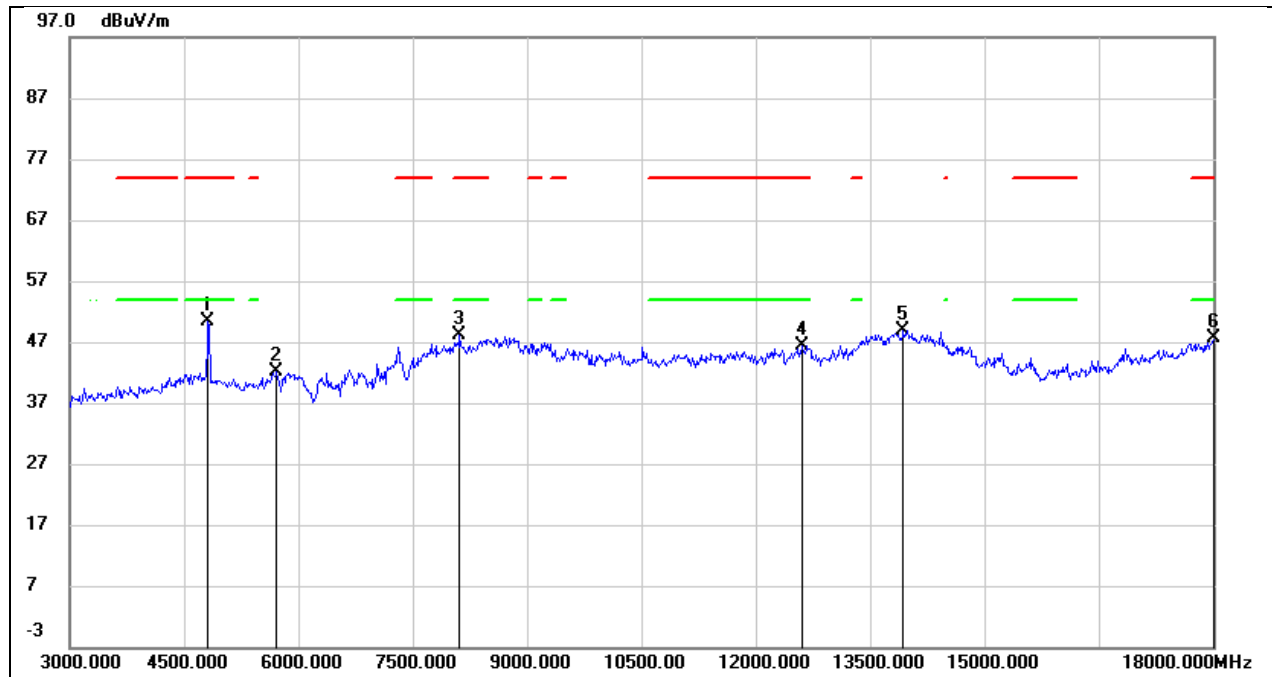


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	49.70	0.60	50.30	74.00	-23.70	peak
2*	5715.000	39.69	2.41	42.10	/	/	peak
3	8115.000	39.60	8.41	48.01	74.00	-25.99	peak
4	12615.000	26.67	19.72	46.39	74.00	-27.61	peak
5*	13935.000	25.16	23.83	48.99	/	/	peak
6	18000.000	19.05	28.54	47.59	74.00	-26.41	peak

Test Mode:	802.11g	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

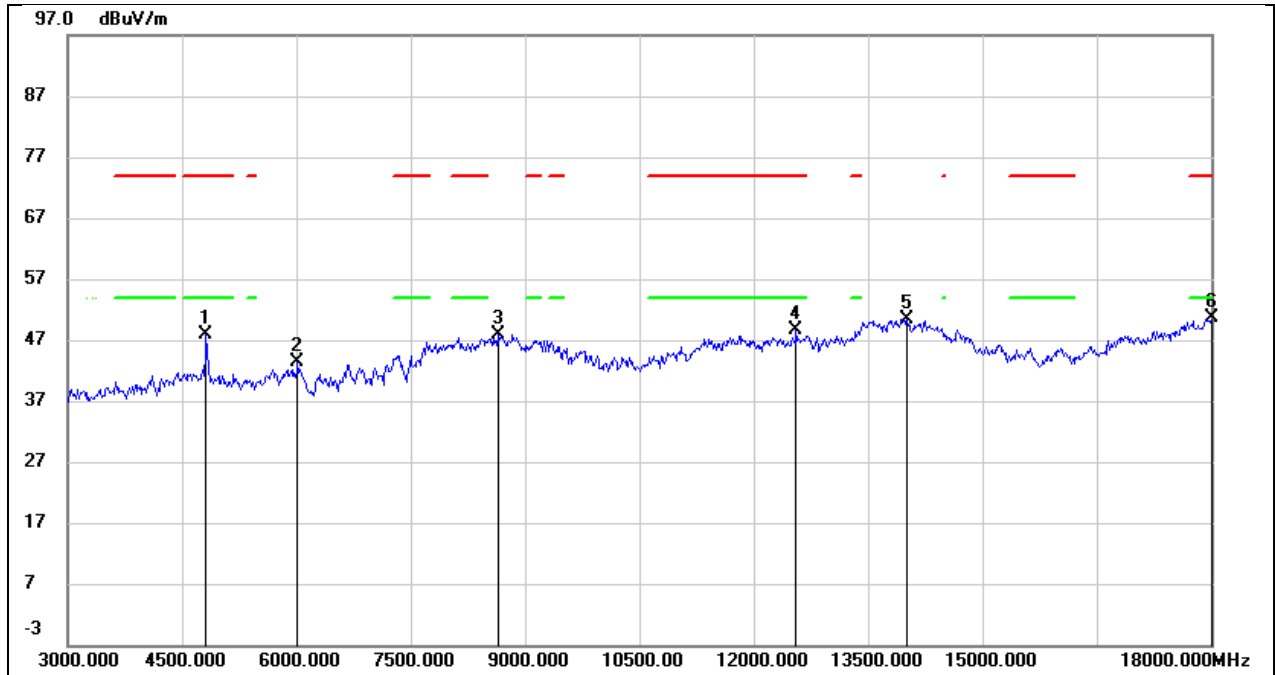


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	47.34	0.60	47.94	74.00	-26.06	peak
2*	6015.000	40.34	3.01	43.35	/	/	peak
3*	8640.000	38.49	9.33	47.82	/	/	peak
4	12555.000	28.91	19.69	48.60	74.00	-25.40	peak
5*	14010.000	26.38	24.07	50.45	/	/	peak
6	18000.000	22.08	28.54	50.62	74.00	-23.38	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

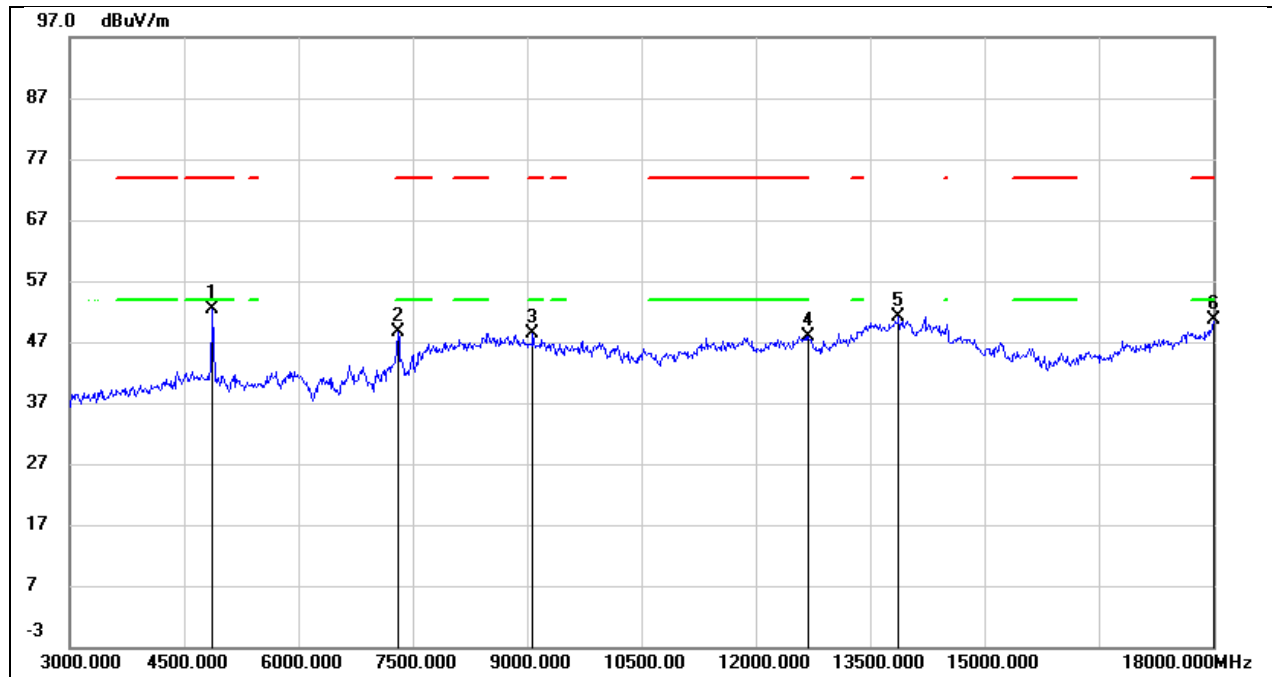


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.67	0.75	52.42	74.00	-21.58	peak
2	7305.000	41.70	6.88	48.58	74.00	-25.42	peak
3	9075.000	37.96	10.40	48.36	74.00	-25.64	peak
4	12690.000	28.01	19.85	47.86	74.00	-26.14	peak
5*	13875.000	27.51	23.59	51.10	/	/	peak
6	18000.000	22.05	28.54	50.59	74.00	-23.41	peak

Test Mode:	802.11g	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

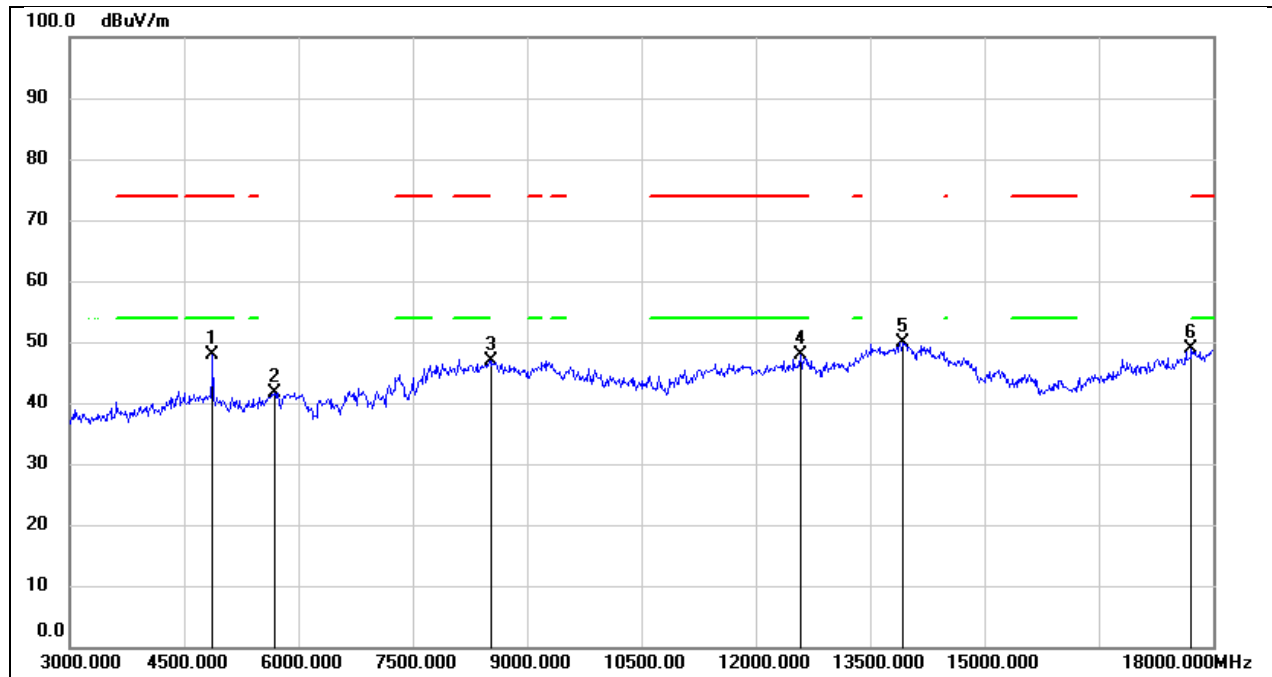


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	47.01	0.75	47.76	74.00	-26.24	peak
2*	5685.000	39.38	2.37	41.75	/	/	peak
3*	8520.000	37.84	9.07	46.91	/	/	peak
4	12585.000	28.27	19.69	47.96	74.00	-26.04	peak
5*	13935.000	26.15	23.83	49.98	/	/	peak
6	17715.000	22.50	26.28	48.78	74.00	-25.22	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

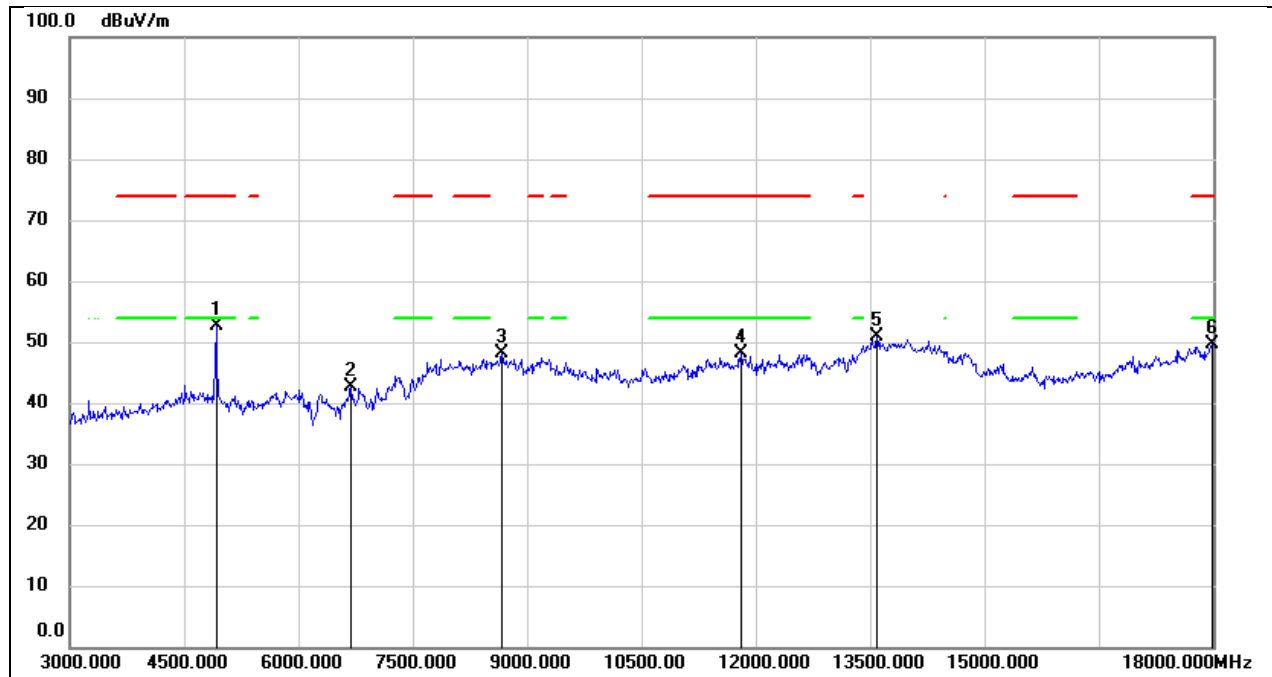


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	51.77	0.86	52.63	74.00	-21.37	peak
2*	6690.000	37.23	5.46	42.69	/	/	peak
3*	8670.000	38.82	9.37	48.19	/	/	peak
4	11805.000	29.60	18.45	48.05	74.00	-25.95	peak
5*	13590.000	27.88	22.98	50.86	/	/	peak
6	17985.000	21.29	28.41	49.70	74.00	-24.30	peak

Test Mode:	802.11g	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 7.16V

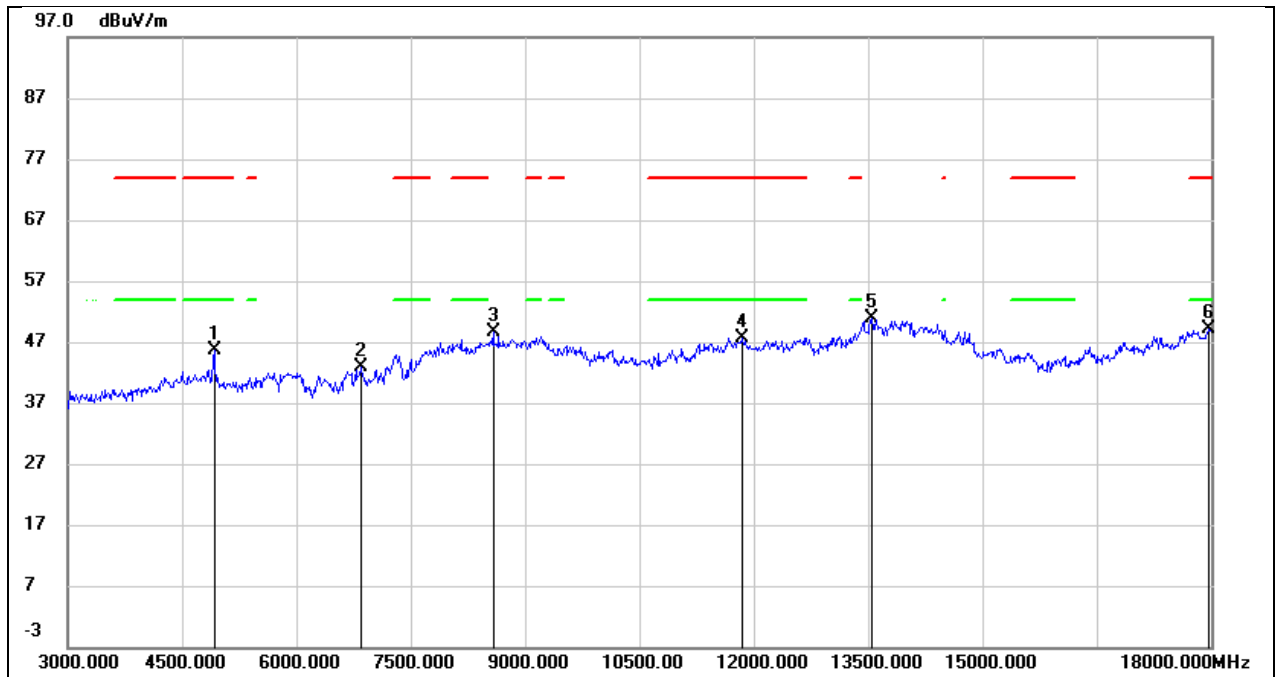


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	44.68	0.86	45.54	74.00	-28.46	peak
2*	6840.000	36.94	6.04	42.98	/	/	peak
3*	8580.000	39.27	9.24	48.51	/	/	peak
4	11850.000	29.13	18.53	47.66	74.00	-26.34	peak
5*	13545.000	28.03	22.91	50.94	/	/	peak
6	17970.000	20.75	28.27	49.02	74.00	-24.98	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

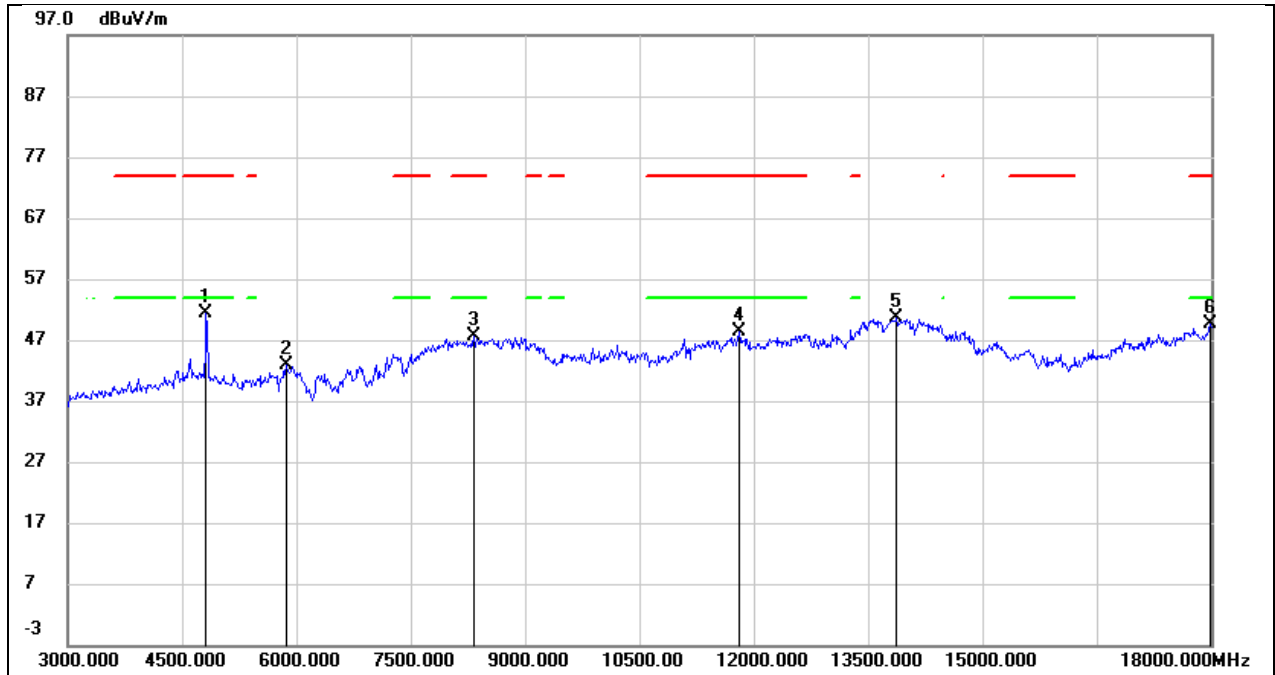


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	50.88	0.60	51.48	74.00	-22.52	peak
2*	5865.000	40.11	2.69	42.80	/	/	peak
3	8325.000	38.87	8.79	47.66	74.00	-26.34	peak
4	11805.000	29.86	18.45	48.31	74.00	-25.69	peak
5*	13875.000	27.14	23.59	50.73	/	/	peak
6	17985.000	21.25	28.41	49.66	74.00	-24.34	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

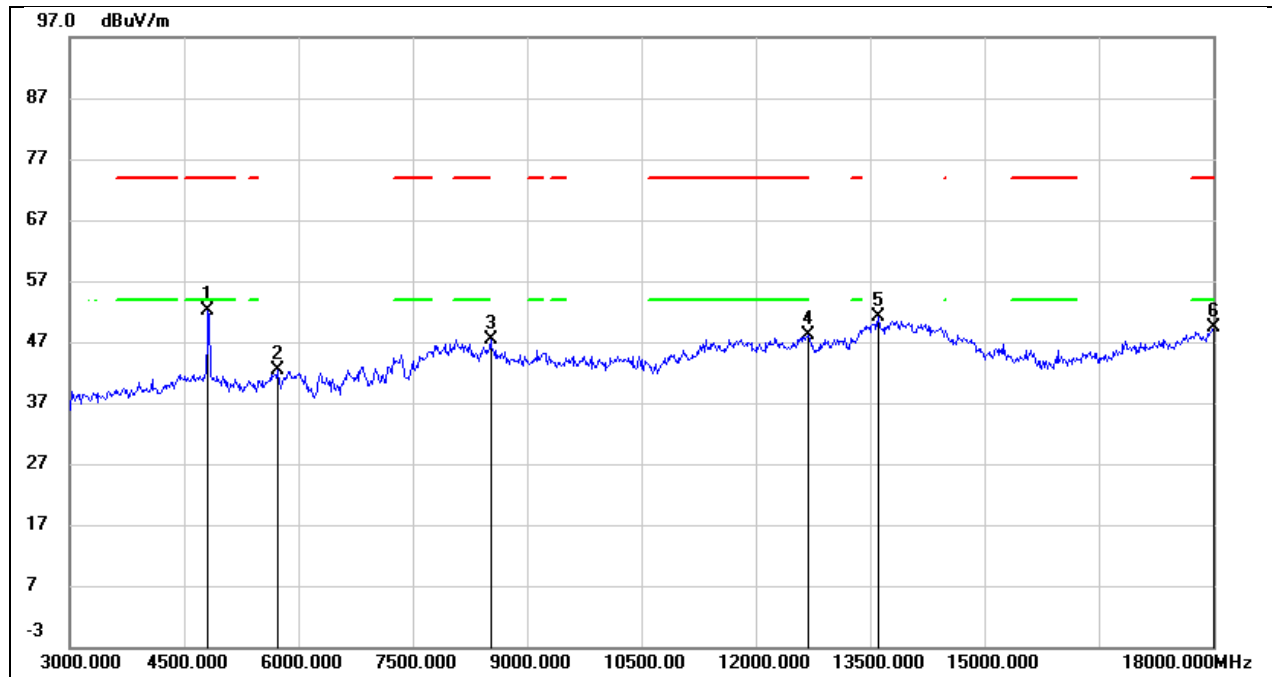


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	51.49	0.60	52.09	74.00	-21.91	peak
2*	5730.000	39.90	2.45	42.35	/	/	peak
3*	8520.000	38.34	9.07	47.41	/	/	peak
4	12690.000	28.16	19.85	48.01	74.00	-25.99	peak
5*	13605.000	28.17	23.01	51.18	/	/	peak
6	18000.000	20.87	28.54	49.41	74.00	-24.59	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

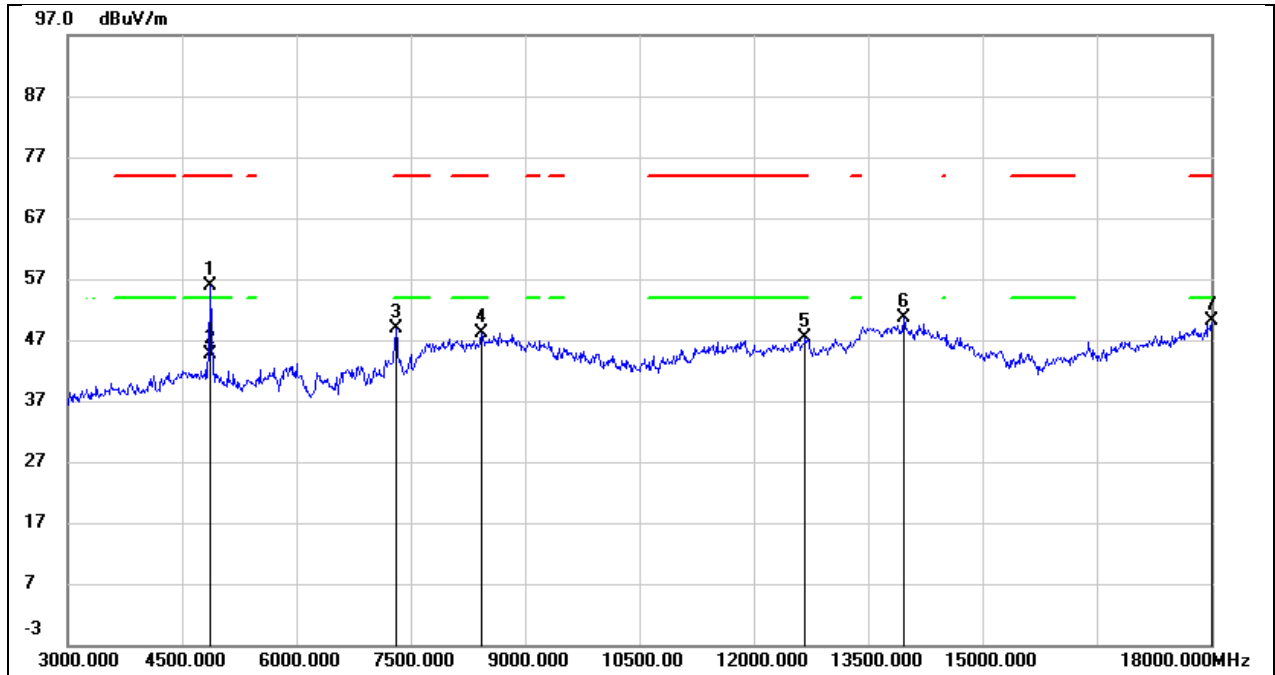


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	55.16	0.75	55.91	74.00	-18.09	peak
2	4875.000	43.77	0.75	44.52	54.00	-9.48	AVG
3	7305.000	42.00	6.88	48.88	74.00	-25.12	peak
4	8430.000	39.13	8.94	48.07	74.00	-25.93	peak
5	12675.000	27.43	19.83	47.26	74.00	-26.74	peak
6*	13965.000	26.61	23.96	50.57	/	/	peak
7	18000.000	21.57	28.54	50.11	74.00	-23.89	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

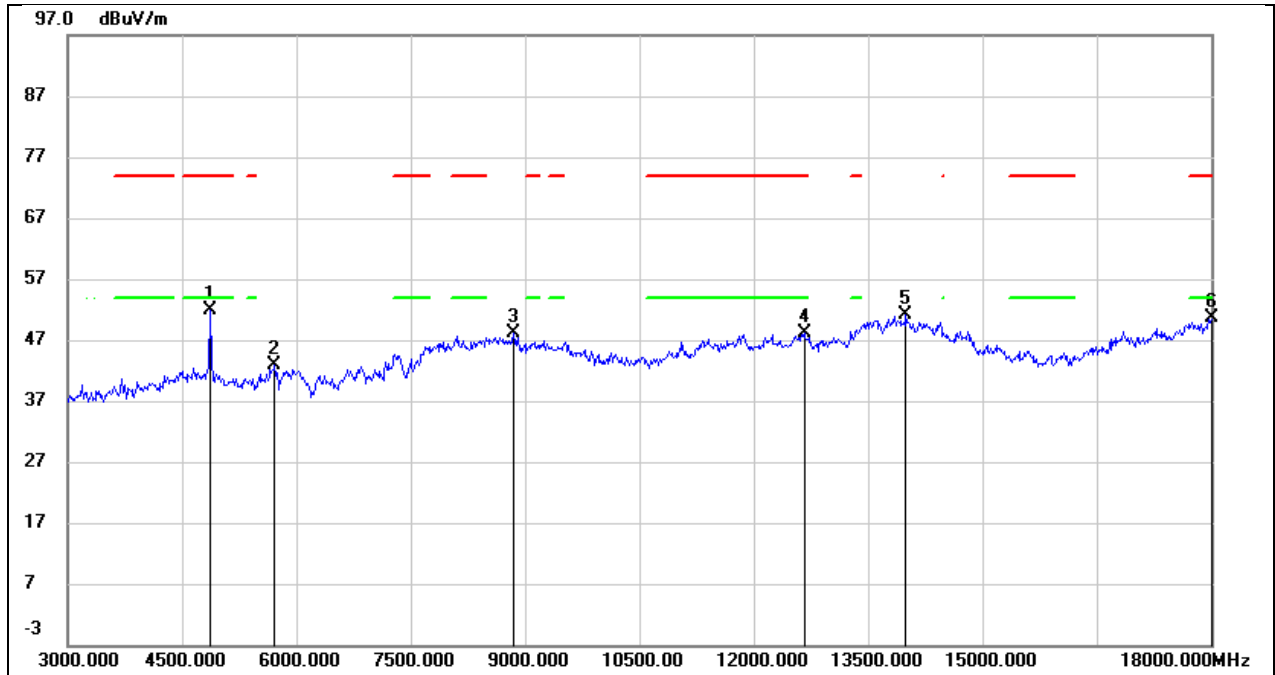


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.13	0.75	51.88	74.00	-22.12	peak
2*	5715.000	40.56	2.41	42.97	/	/	peak
3*	8850.000	38.40	9.65	48.05	/	/	peak
4	12660.000	28.28	19.80	48.08	74.00	-25.92	peak
5*	13995.000	27.17	24.08	51.25	/	/	peak
6	18000.000	22.17	28.54	50.71	74.00	-23.29	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

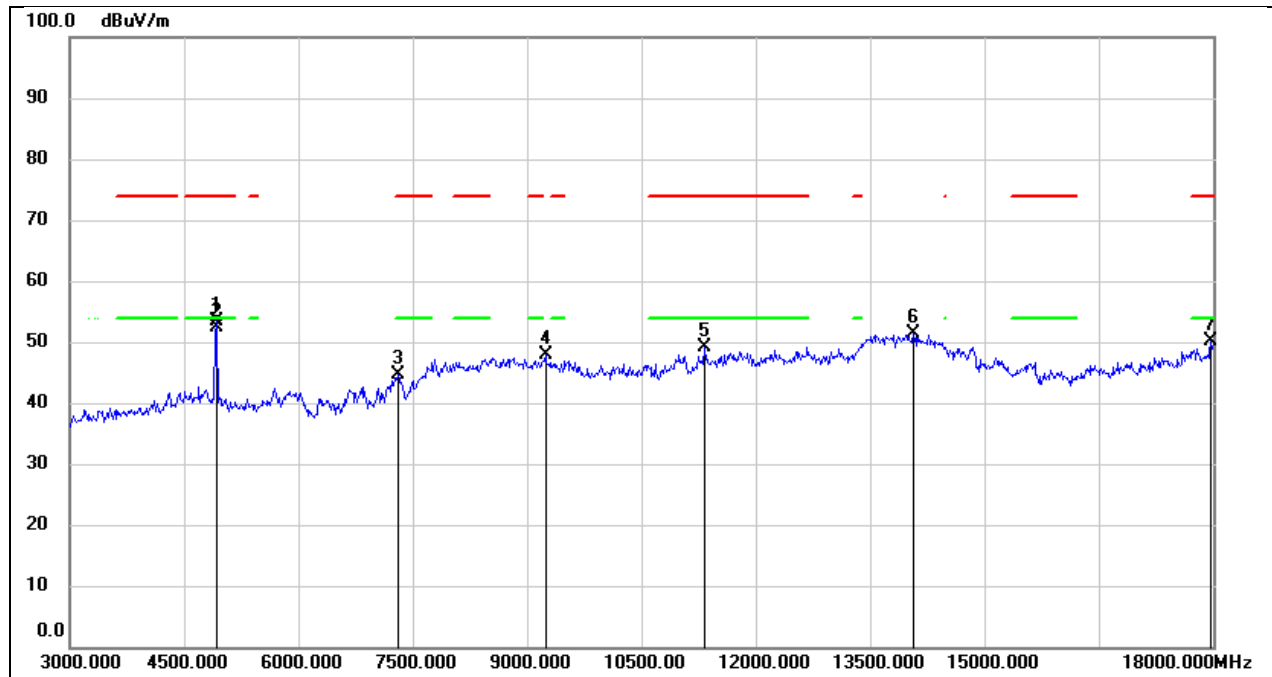


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	52.59	0.86	53.45	74.00	-20.55	peak
2	4920.000	51.62	0.86	52.48	54.00	-1.52	AVG
3	7305.000	37.71	6.88	44.59	74.00	-29.41	peak
4*	9240.000	36.78	11.11	47.89	/	/	peak
5	11325.000	31.68	17.38	49.06	74.00	-24.94	peak
6*	14070.000	27.38	23.89	51.27	/	/	peak
7	17970.000	21.87	28.27	50.14	74.00	-23.86	peak

Test Mode:	802.11n HT20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 7.16V

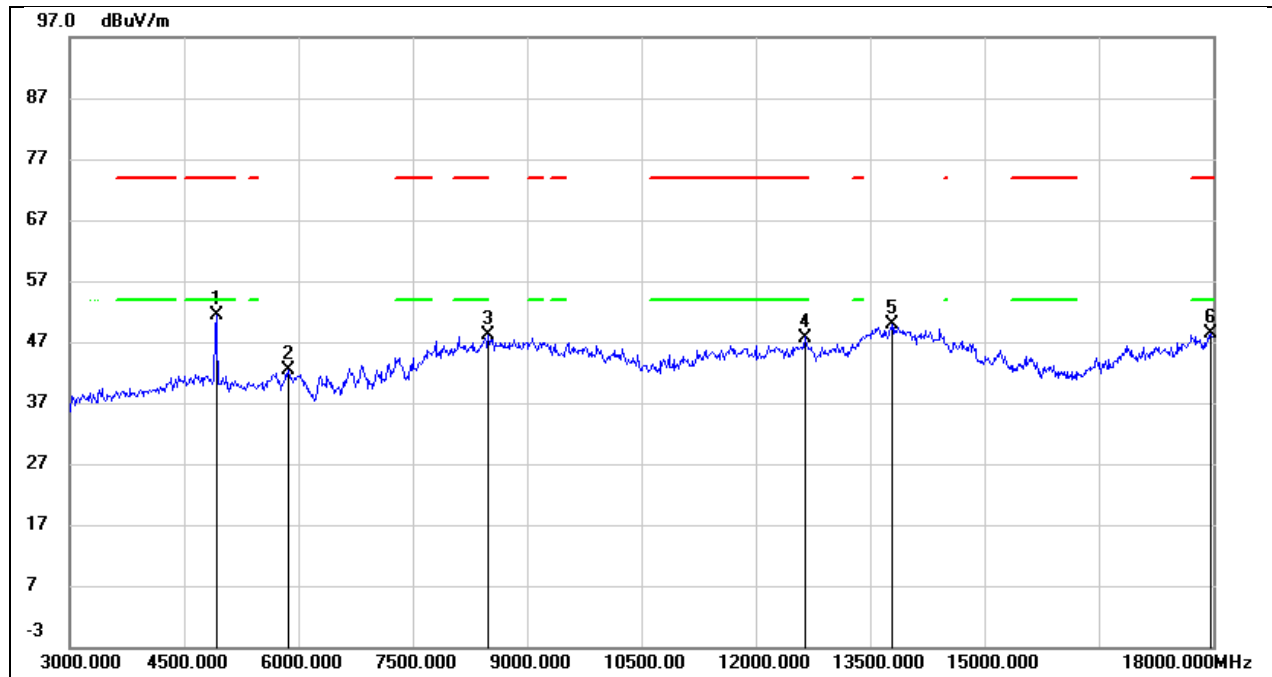


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	50.51	0.86	51.37	74.00	-22.63	peak
2*	5865.000	39.65	2.69	42.34	/	/	peak
3	8490.000	39.09	9.01	48.10	74.00	-25.90	peak
4	12645.000	27.97	19.78	47.75	74.00	-26.25	peak
5*	13785.000	26.56	23.24	49.80	/	/	peak
6	17970.000	20.15	28.27	48.42	74.00	-25.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

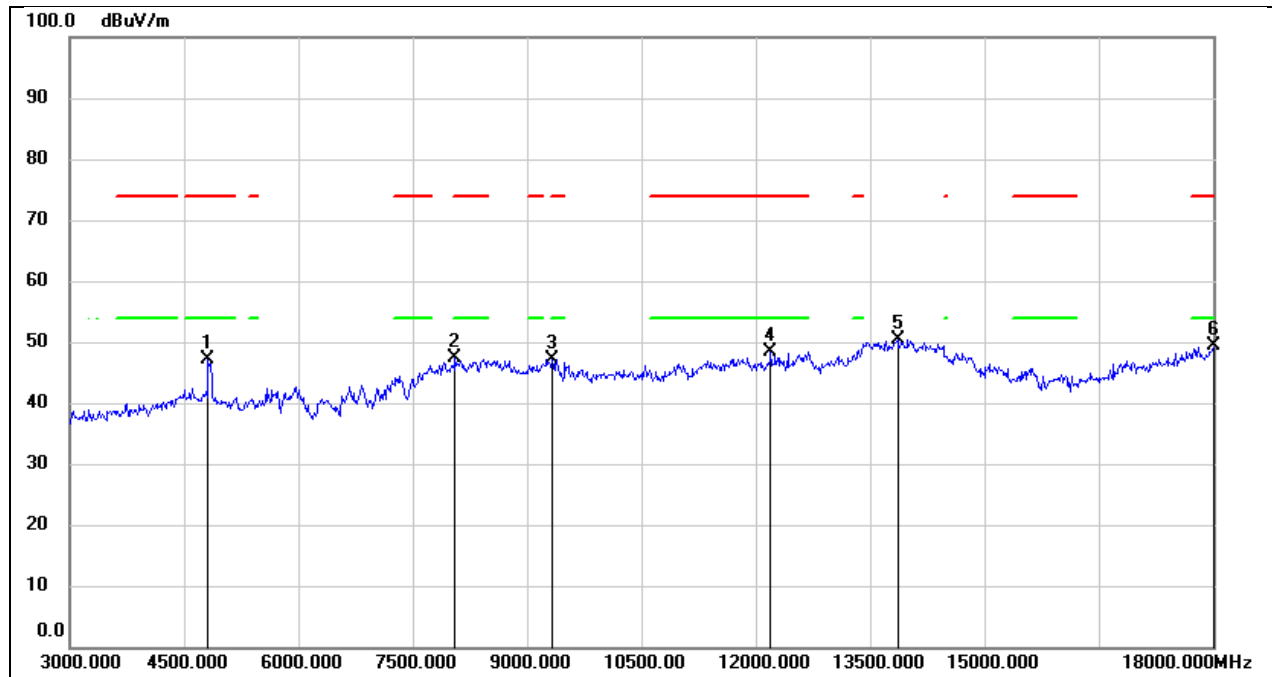


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	46.50	0.60	47.10	74.00	-26.90	peak
2	8055.000	39.14	8.27	47.41	74.00	-26.59	peak
3	9330.000	35.72	11.48	47.20	74.00	-26.80	peak
4	12195.000	29.36	19.10	48.46	74.00	-25.54	peak
5*	13860.000	26.97	23.52	50.49	/	/	peak
6	18000.000	20.80	28.54	49.34	74.00	-24.66	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 7.16V

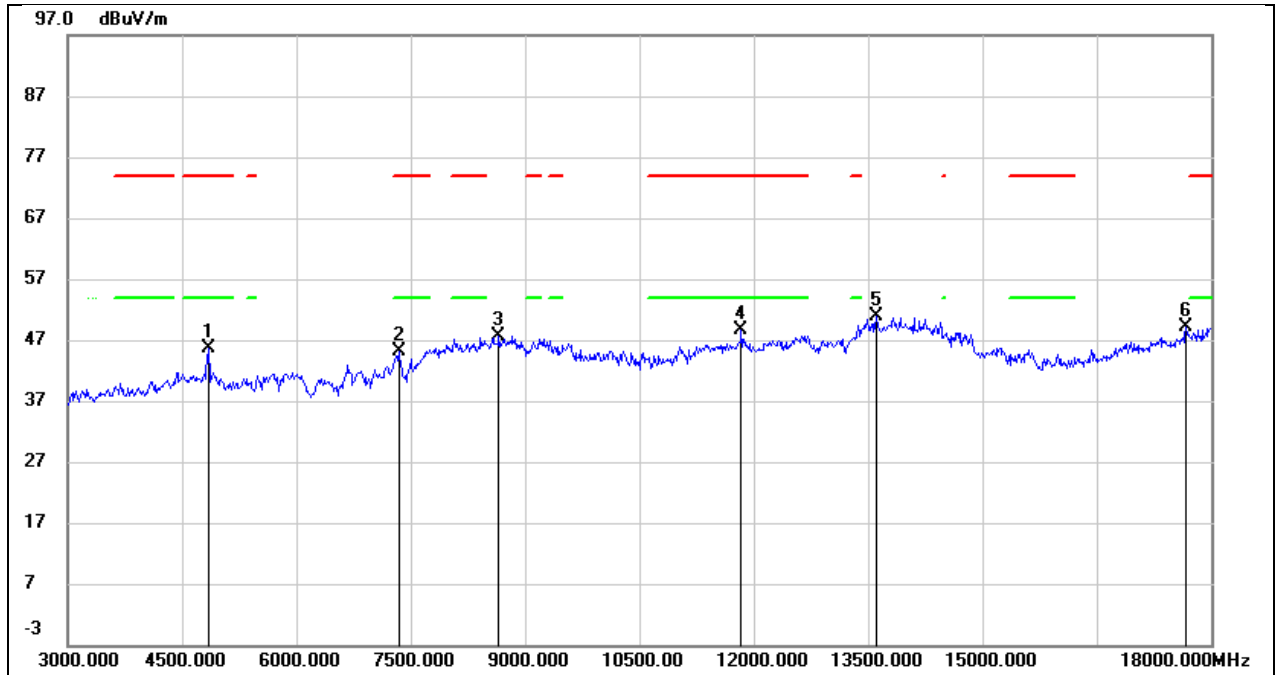


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	45.03	0.68	45.71	74.00	-28.29	peak
2	7350.000	38.16	6.91	45.07	74.00	-28.93	peak
3*	8655.000	38.18	9.34	47.52	/	/	peak
4	11835.000	30.22	18.51	48.73	74.00	-25.27	peak
5*	13605.000	27.94	23.01	50.95	/	/	peak
6*	17670.000	23.22	26.02	49.24	/	/	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

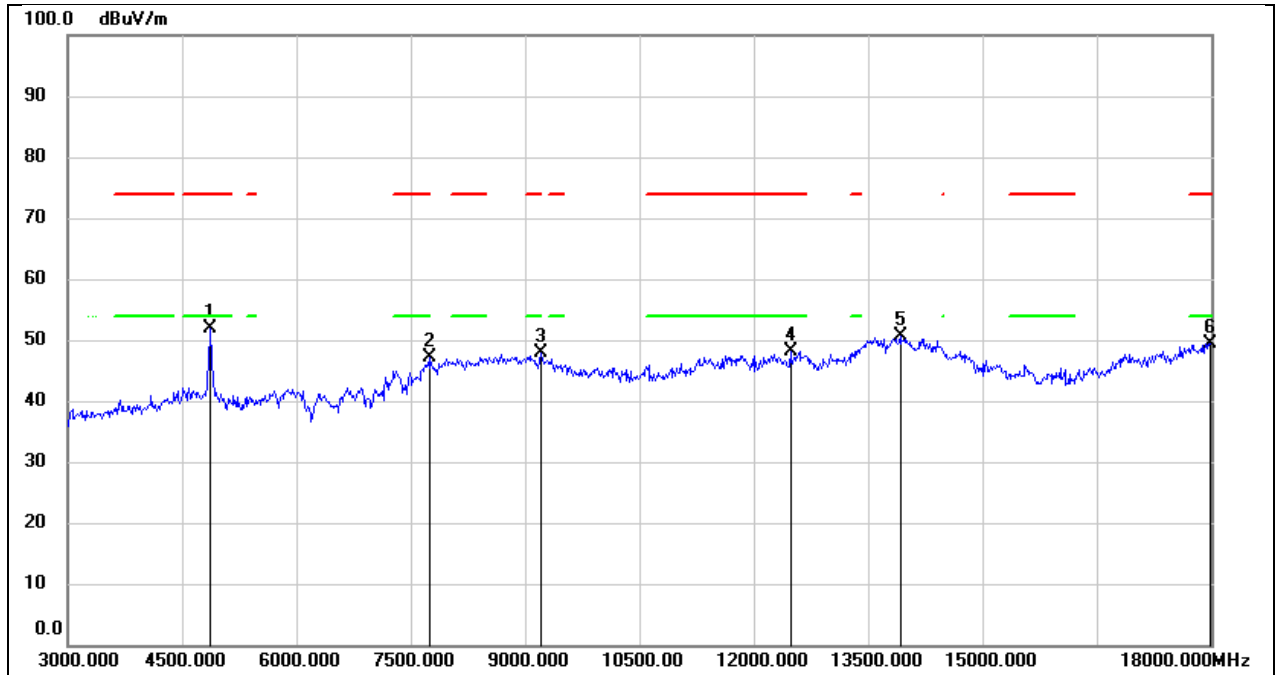


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.03	0.75	51.78	74.00	-22.22	peak
2*	7755.000	39.61	7.57	47.18	/	/	peak
3*	9210.000	36.81	10.98	47.79	/	/	peak
4	12480.000	28.43	19.69	48.12	74.00	-25.88	peak
5*	13920.000	26.88	23.77	50.65	/	/	peak
6	17985.000	21.01	28.41	49.42	74.00	-24.58	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

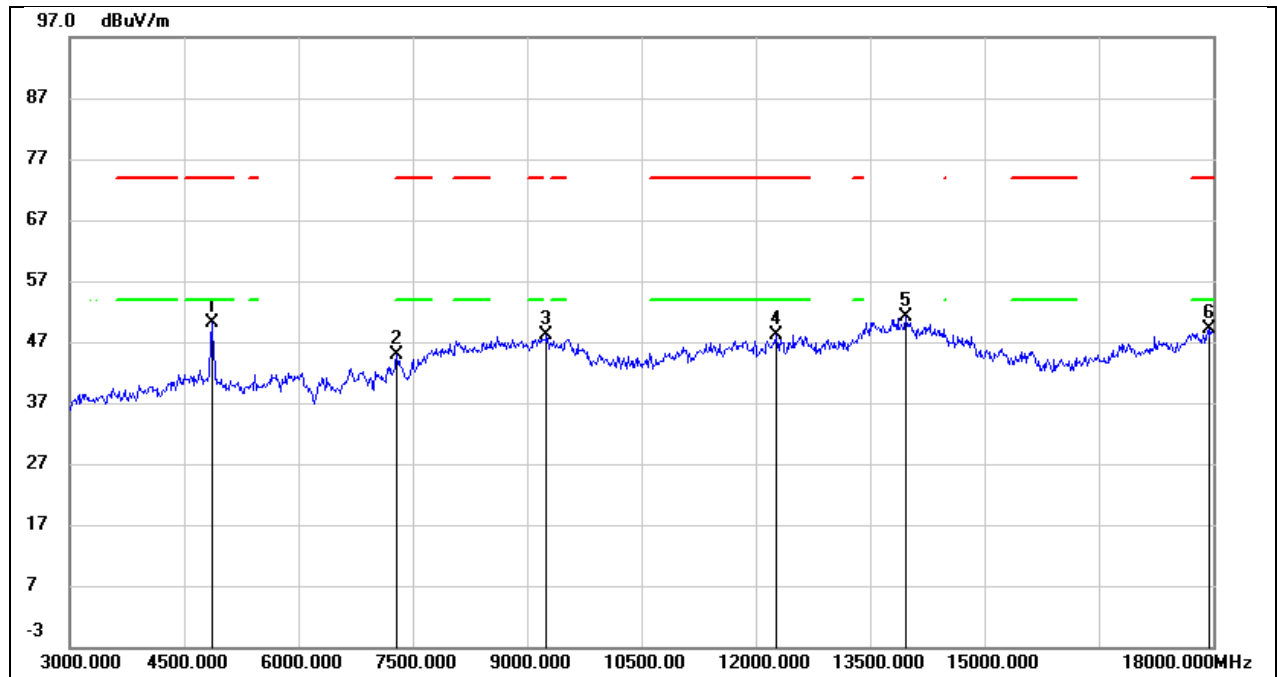


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	49.34	0.72	50.06	74.00	-23.94	peak
2	7290.000	38.00	6.88	44.88	74.00	-29.12	peak
3*	9255.000	36.88	11.17	48.05	/	/	peak
4	12270.000	28.81	19.28	48.09	74.00	-25.91	peak
5*	13965.000	27.20	23.96	51.16	/	/	peak
6	17940.000	21.11	28.02	49.13	74.00	-24.87	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

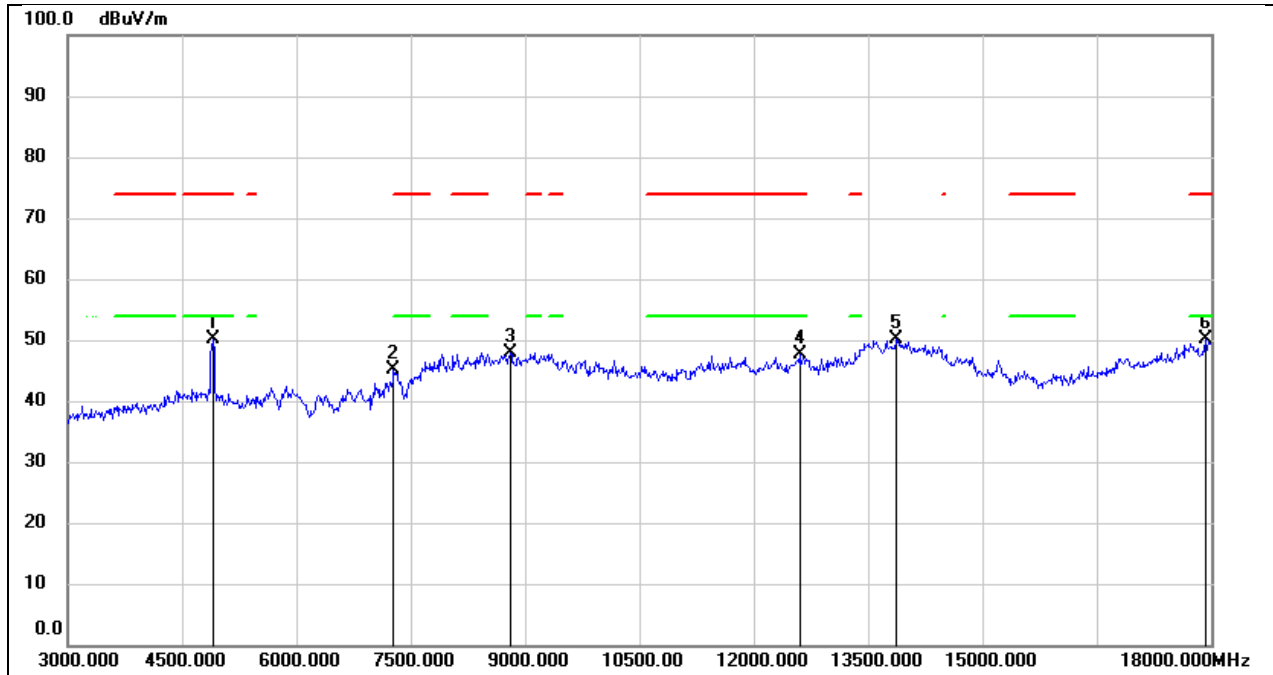


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	49.42	0.82	50.24	74.00	-23.76	peak
2	7275.000	38.15	6.88	45.03	74.00	-28.97	peak
3*	8805.000	38.48	9.51	47.99	/	/	peak
4	12600.000	27.90	19.69	47.59	74.00	-26.41	peak
5*	13875.000	26.58	23.59	50.17	/	/	peak
6	17925.000	22.31	27.87	50.18	74.00	-23.82	peak

Test Mode:	802.11n HT40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 7.16V

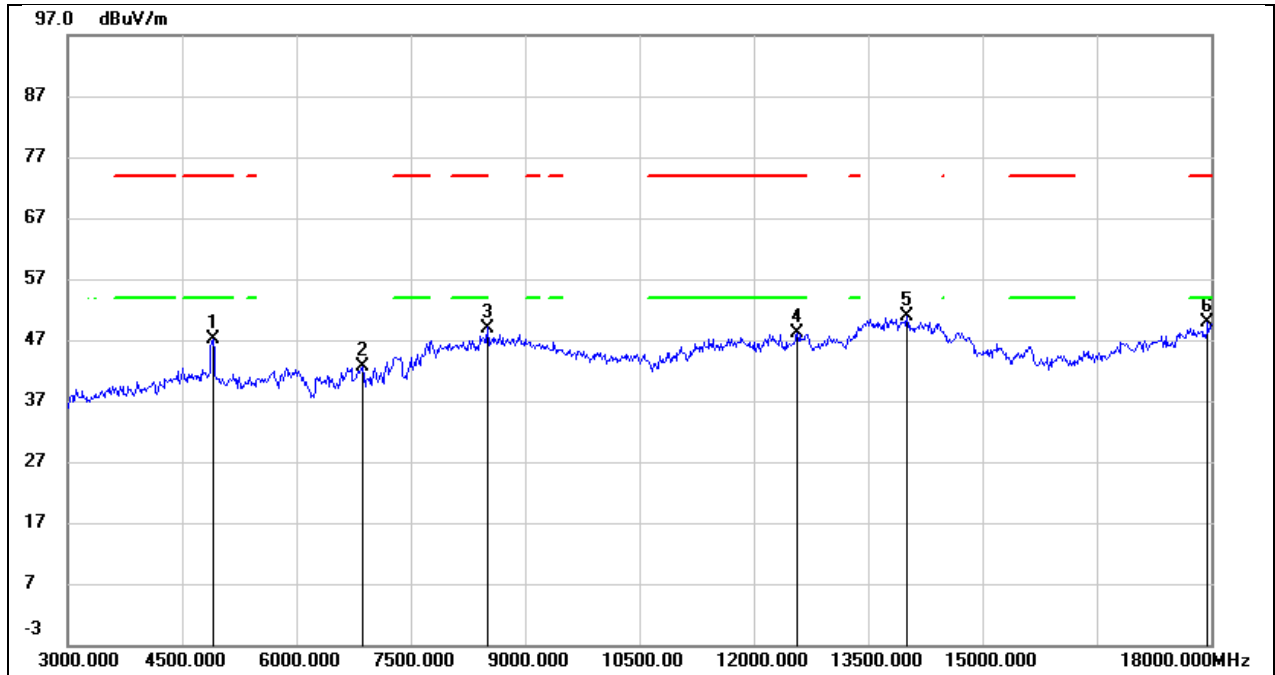


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	46.19	0.82	47.01	74.00	-26.99	peak
2*	6870.000	36.53	6.12	42.65	/	/	peak
3*	8505.000	39.97	9.03	49.00	/	/	peak
4	12570.000	28.38	19.68	48.06	74.00	-25.94	peak
5*	14010.000	26.70	24.07	50.77	/	/	peak
6	17955.000	21.82	28.14	49.96	74.00	-24.04	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

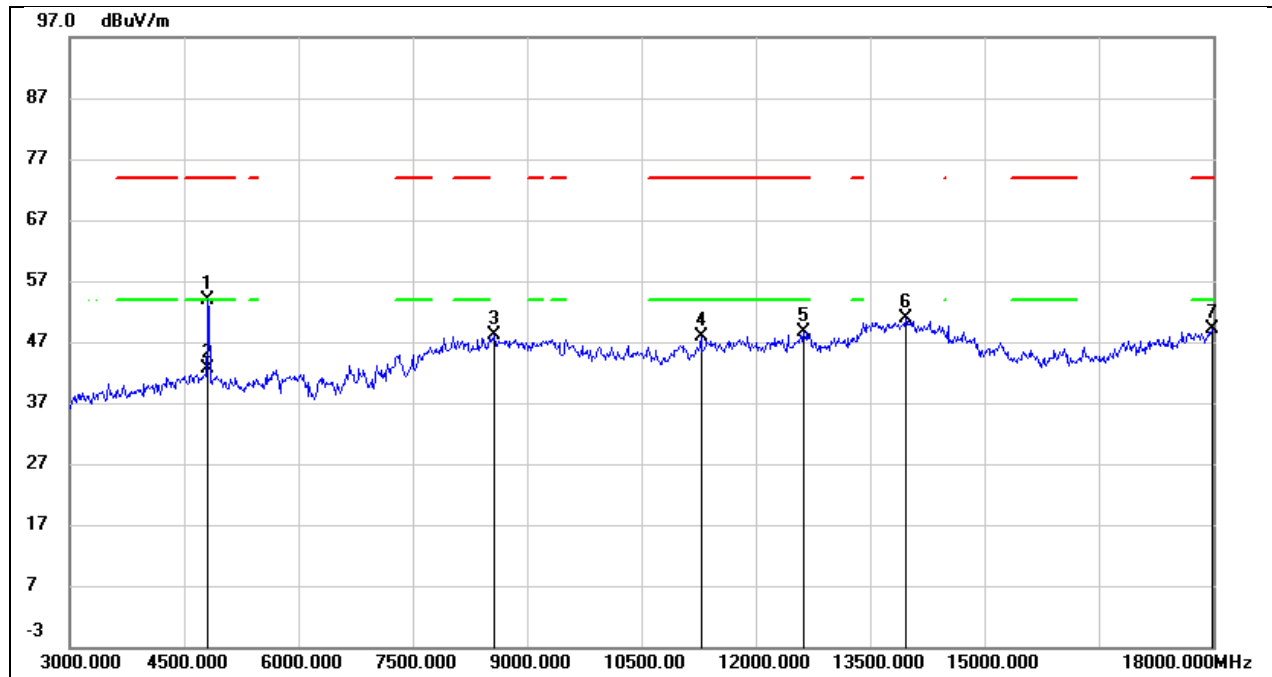


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	53.30	0.60	53.90	74.00	-20.10	peak
2	4815.000	42.05	0.60	42.65	54.00	-11.35	AVG
3*	8565.000	39.04	9.19	48.23	/	/	peak
4	11280.000	30.59	17.33	47.92	74.00	-26.08	peak
5	12630.000	28.87	19.75	48.62	74.00	-25.38	peak
6*	13965.000	26.82	23.96	50.78	/	/	peak
7	17985.000	20.73	28.41	49.14	74.00	-24.86	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

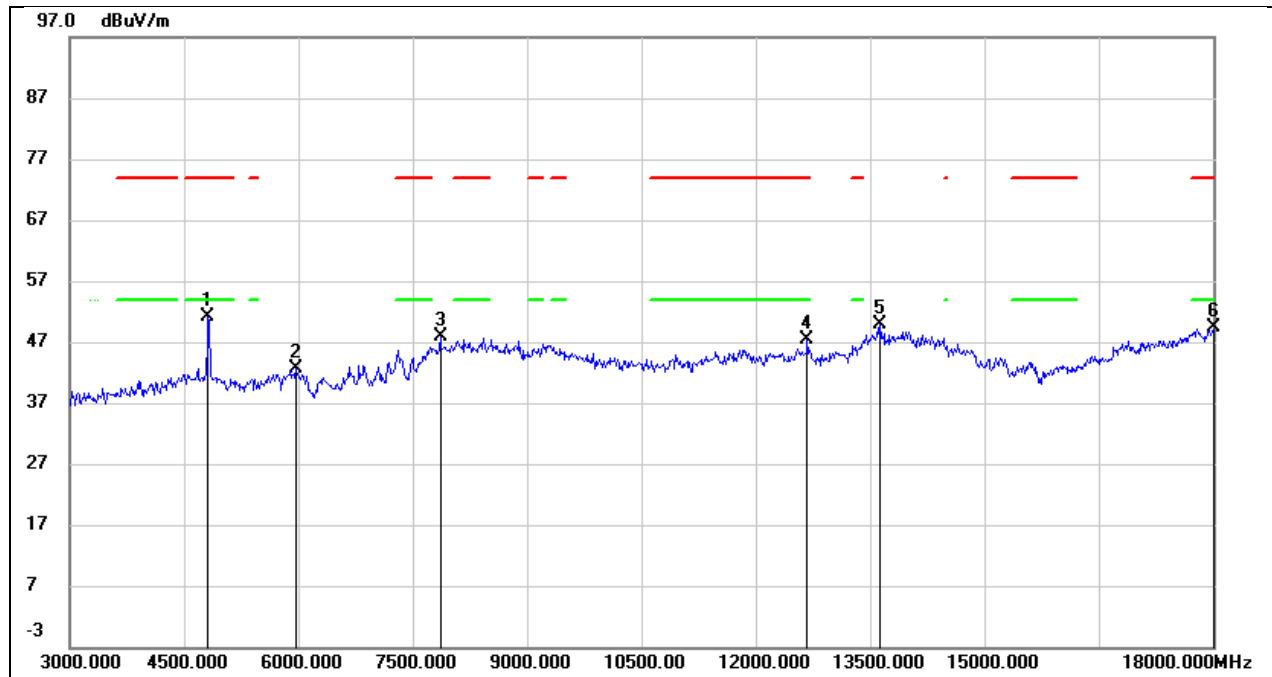


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4815.000	50.45	0.60	51.05	74.00	-22.95	peak
2*	5970.000	39.68	2.88	42.56	/	/	peak
3*	7860.000	40.01	7.79	47.80	/	/	peak
4	12675.000	27.43	19.83	47.26	74.00	-26.74	peak
5*	13635.000	26.93	23.05	49.98	/	/	peak
6	18000.000	20.77	28.54	49.31	74.00	-24.69	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

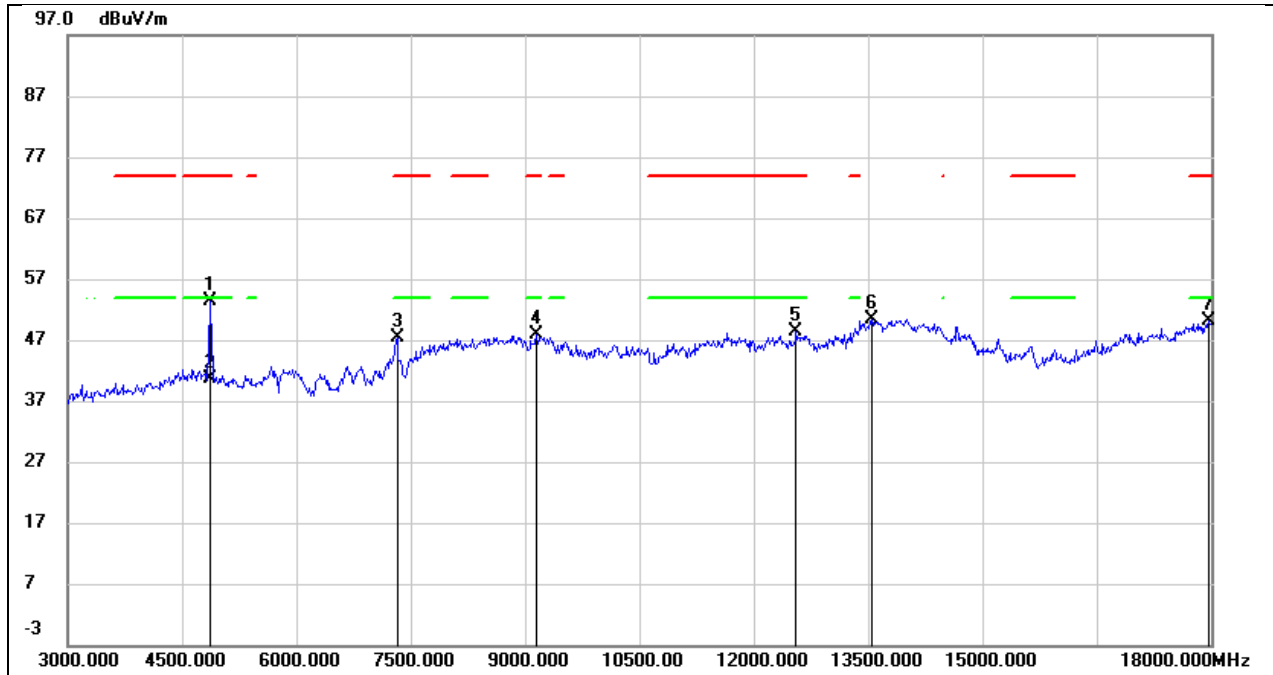


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	52.55	0.72	53.27	74.00	-20.73	peak
2	4860.000	39.93	0.72	40.65	54.00	-13.35	AVG
3	7320.000	40.47	6.89	47.36	74.00	-26.64	peak
4	9150.000	37.03	10.74	47.77	74.00	-26.23	peak
5	12555.000	28.58	19.69	48.27	74.00	-25.73	peak
6*	13545.000	27.52	22.91	50.43	/	/	peak
7	17970.000	21.74	28.27	50.01	74.00	-23.99	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

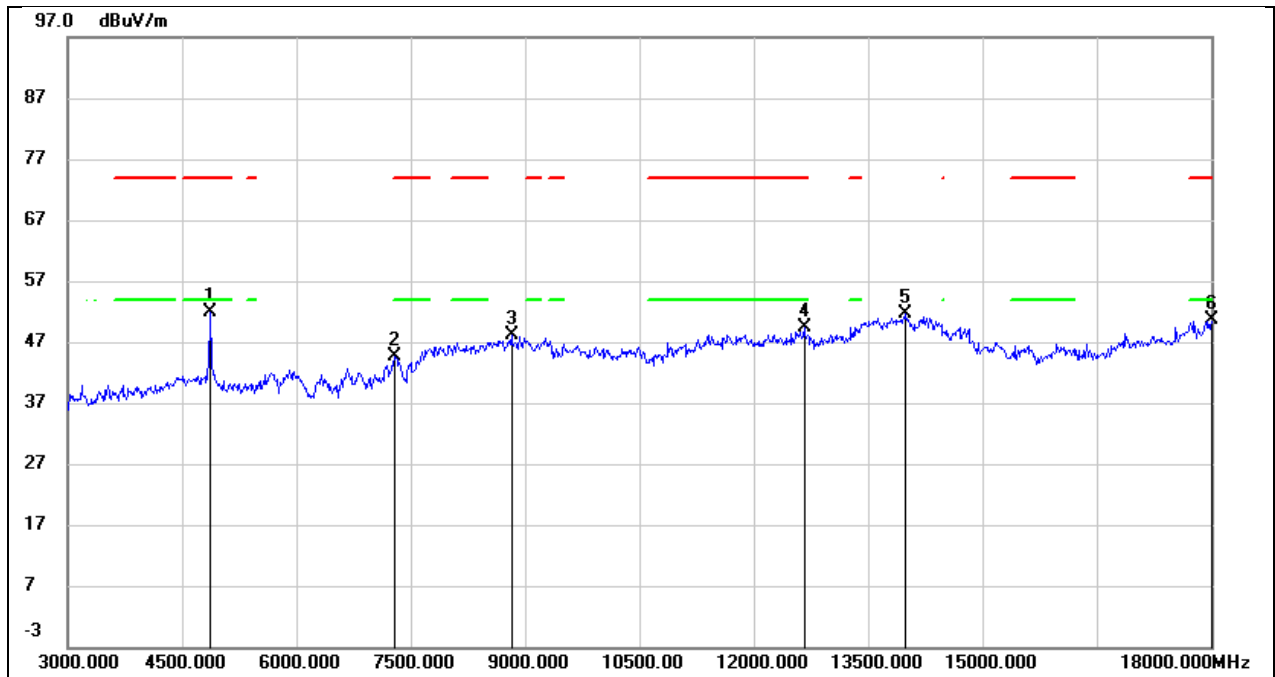


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	51.09	0.75	51.84	74.00	-22.16	peak
2	7290.000	37.71	6.88	44.59	74.00	-29.41	peak
3*	8820.000	38.46	9.56	48.02	/	/	peak
4	12660.000	29.67	19.80	49.47	74.00	-24.53	peak
5*	13995.000	27.46	24.08	51.54	/	/	peak
6	18000.000	22.08	28.54	50.62	74.00	-23.38	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Horizontal	Test Voltage:	DC 7.16V

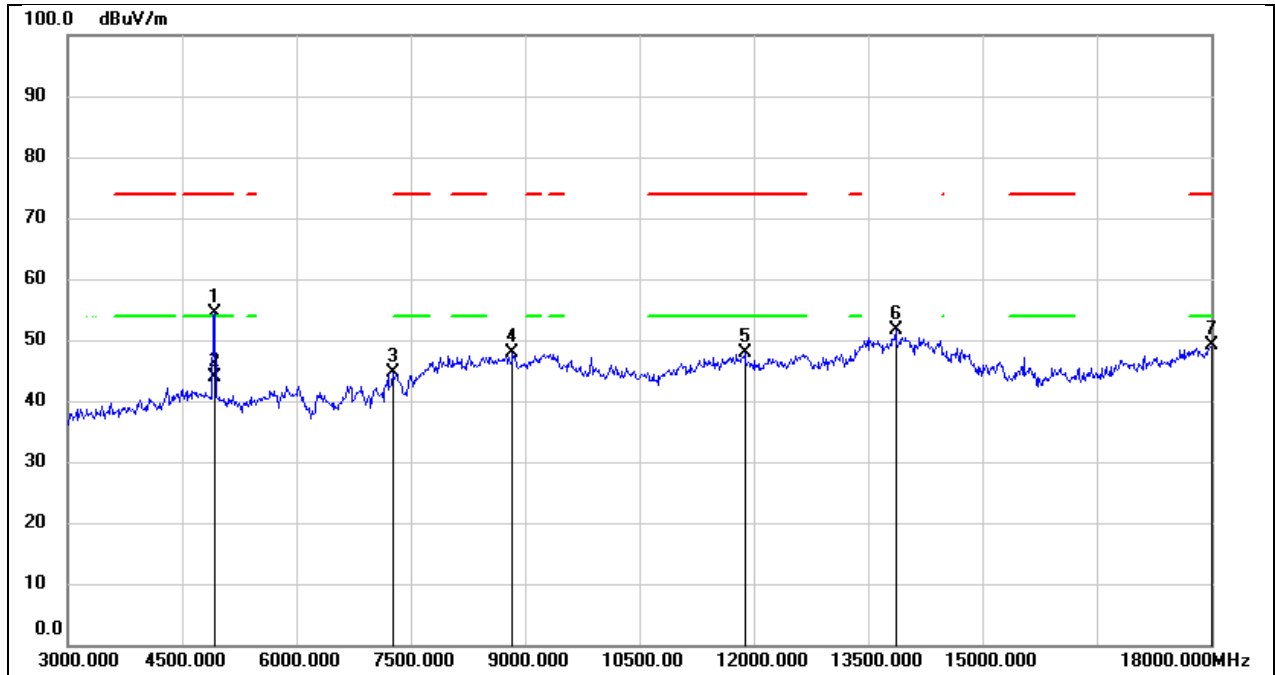


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	53.51	0.86	54.37	74.00	-19.63	peak
2	4920.000	43.11	0.86	43.97	54.00	-10.03	AVG
3	7260.000	37.77	6.87	44.64	74.00	-29.36	peak
4*	8835.000	38.17	9.60	47.77	/	/	peak
5	11880.000	29.17	18.59	47.76	74.00	-26.24	peak
6*	13860.000	28.01	23.52	51.53	/	/	peak
7	18000.000	20.57	28.54	49.11	74.00	-24.89	peak

Test Mode:	802.11ax HE20	Frequency(MHz):	2462
Polarity:	Vertical	Test Voltage:	DC 7.16V

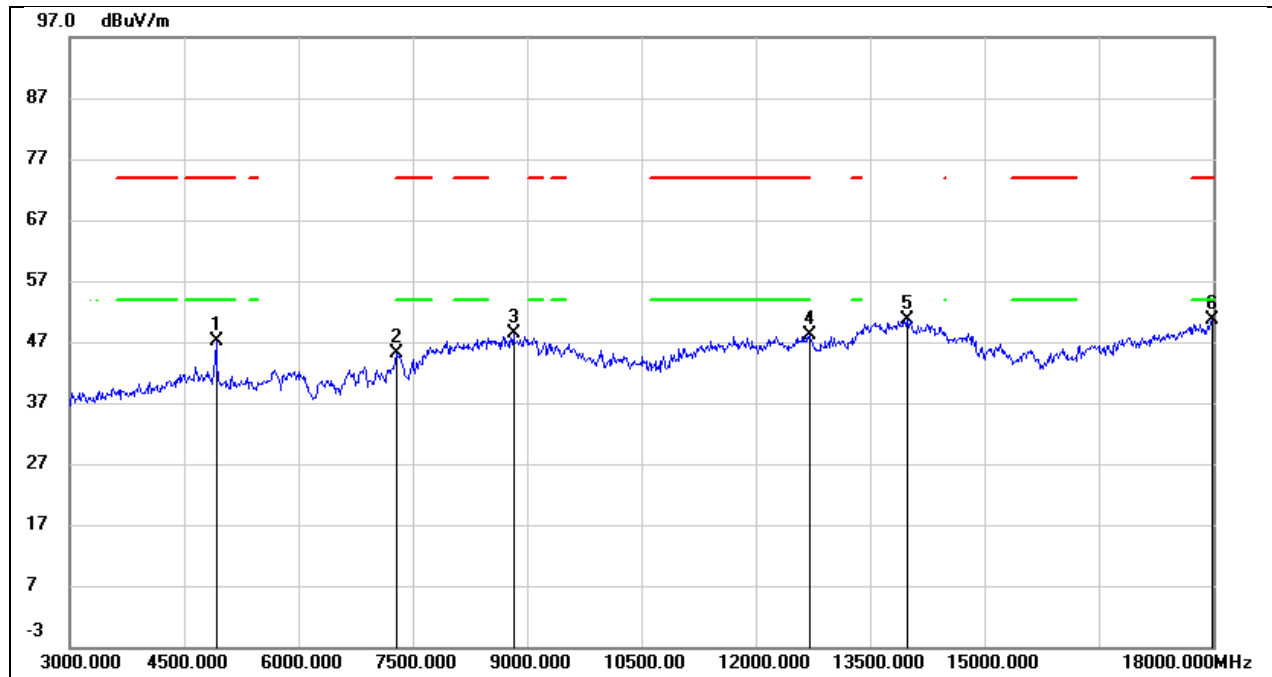


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4920.000	46.33	0.86	47.19	74.00	-26.81	peak
2	7290.000	38.26	6.88	45.14	74.00	-28.86	peak
3*	8820.000	38.81	9.56	48.37	/	/	peak
4*	12705.000	28.17	19.88	48.05	/	/	peak
5*	13980.000	26.73	24.01	50.74	/	/	peak
6	17985.000	22.10	28.41	50.51	74.00	-23.49	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Horizontal	Test Voltage:	DC 7.16V

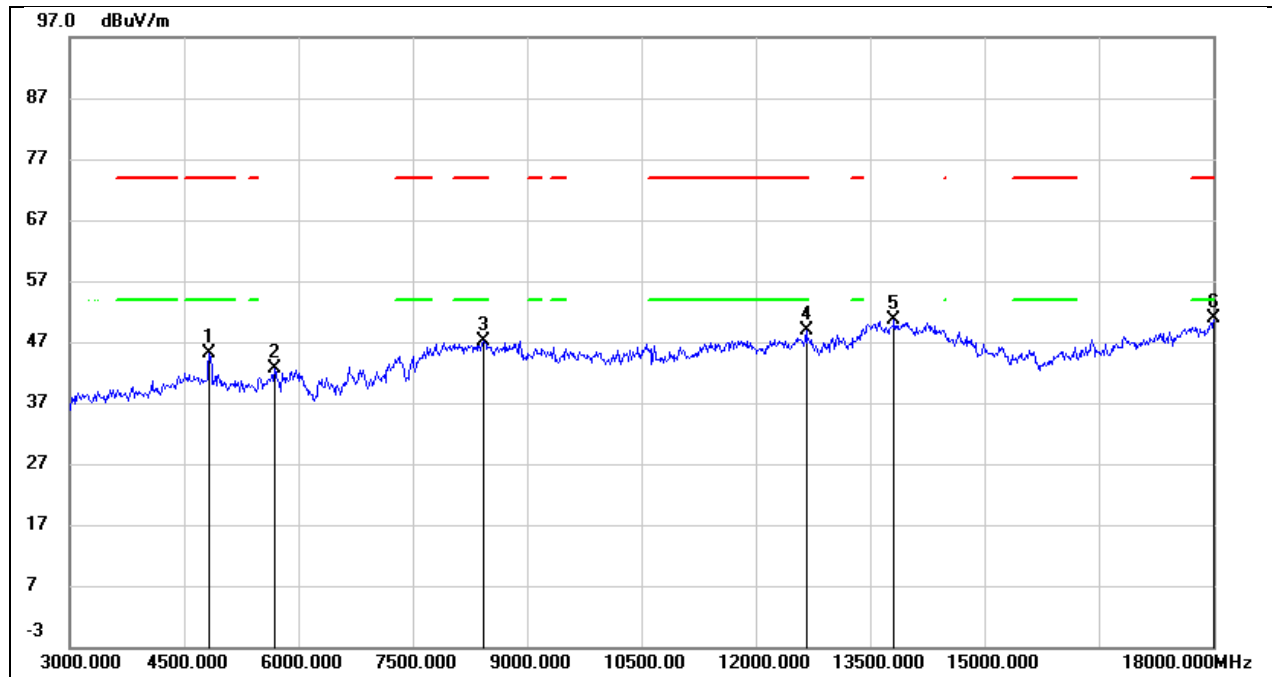


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4830.000	44.47	0.64	45.11	74.00	-28.89	peak
2*	5685.000	40.28	2.37	42.65	/	/	peak
3	8430.000	38.15	8.94	47.09	74.00	-26.91	peak
4	12660.000	28.96	19.80	48.76	74.00	-25.24	peak
5*	13815.000	27.40	23.34	50.74	/	/	peak
6	18000.000	22.23	28.54	50.77	74.00	-23.23	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2422
Polarity:	Vertical	Test Voltage:	DC 7.16V

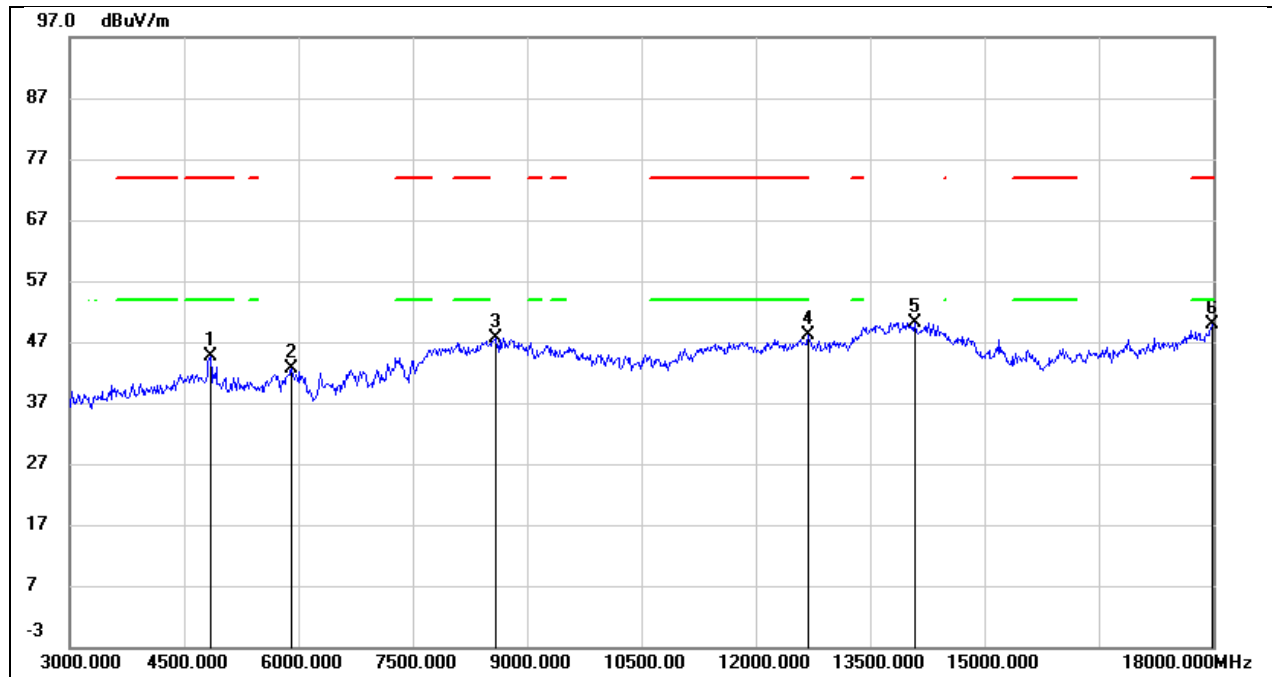


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4845.000	43.87	0.68	44.55	74.00	-29.45	peak
2*	5910.000	39.80	2.77	42.57	/	/	peak
3*	8580.000	38.46	9.24	47.70	/	/	peak
4	12690.000	28.20	19.85	48.05	74.00	-25.95	peak
5*	14085.000	26.41	23.84	50.25	/	/	peak
6	17985.000	21.52	28.41	49.93	74.00	-24.07	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Horizontal	Test Voltage:	DC 7.16V

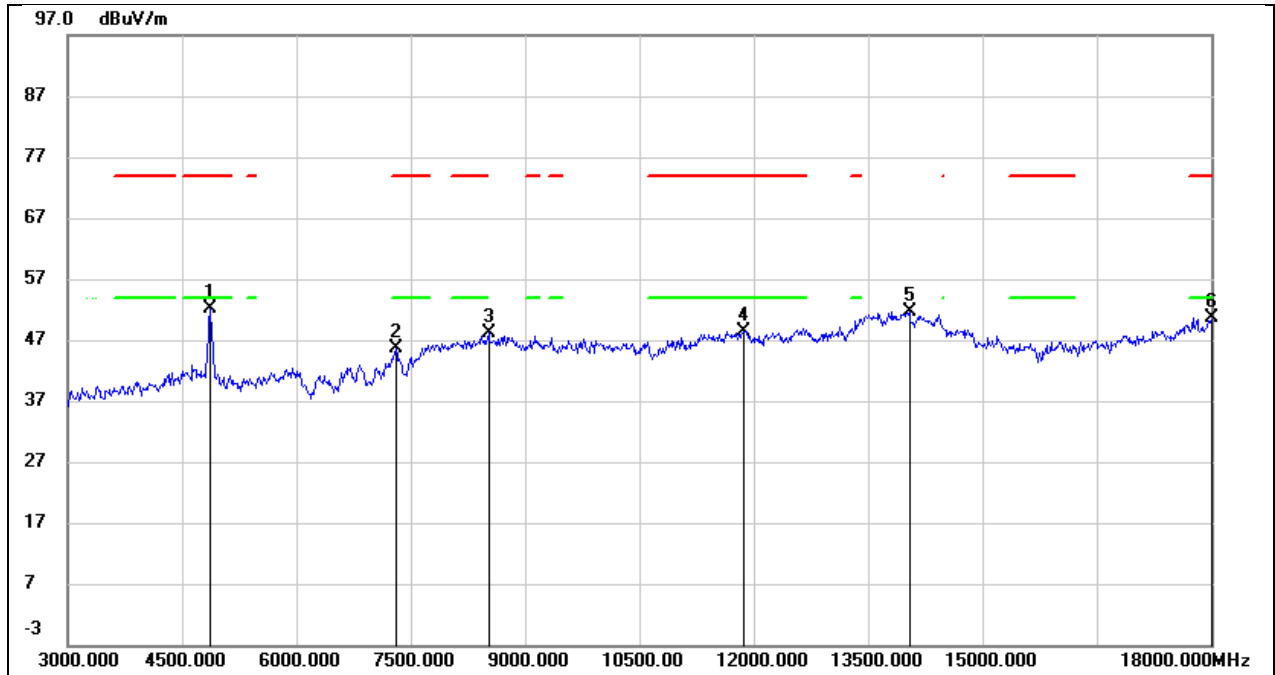


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	51.42	0.72	52.14	74.00	-21.86	peak
2	7305.000	38.72	6.88	45.60	74.00	-28.40	peak
3*	8520.000	39.01	9.07	48.08	/	/	peak
4	11865.000	29.92	18.57	48.49	74.00	-25.51	peak
5*	14040.000	27.73	23.97	51.70	/	/	peak
6	18000.000	22.17	28.54	50.71	74.00	-23.29	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2437
Polarity:	Vertical	Test Voltage:	DC 7.16V

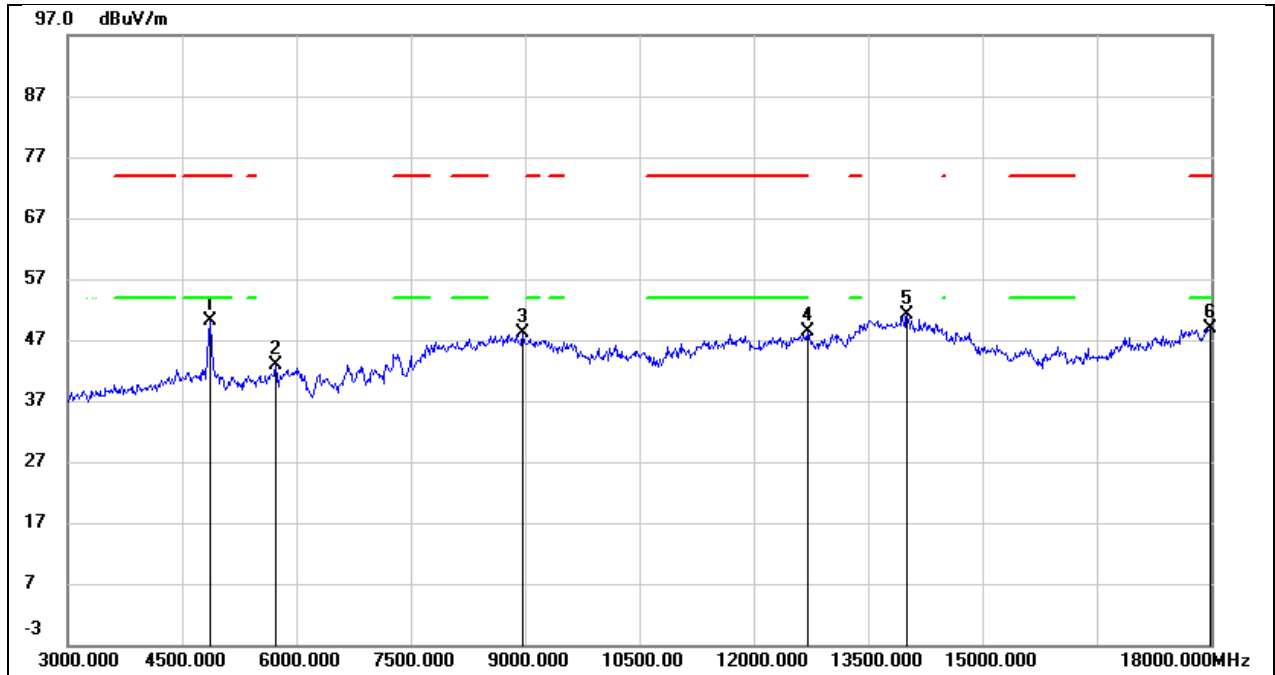


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	49.30	0.75	50.05	74.00	-23.95	peak
2*	5730.000	40.39	2.45	42.84	/	/	peak
3*	8970.000	38.04	9.99	48.03	/	/	peak
4*	12705.000	28.59	19.88	48.47	/	/	peak
5*	14010.000	27.06	24.07	51.13	/	/	peak
6	17985.000	20.57	28.41	48.98	74.00	-25.02	peak

Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Horizontal	Test Voltage:	DC 7.16V

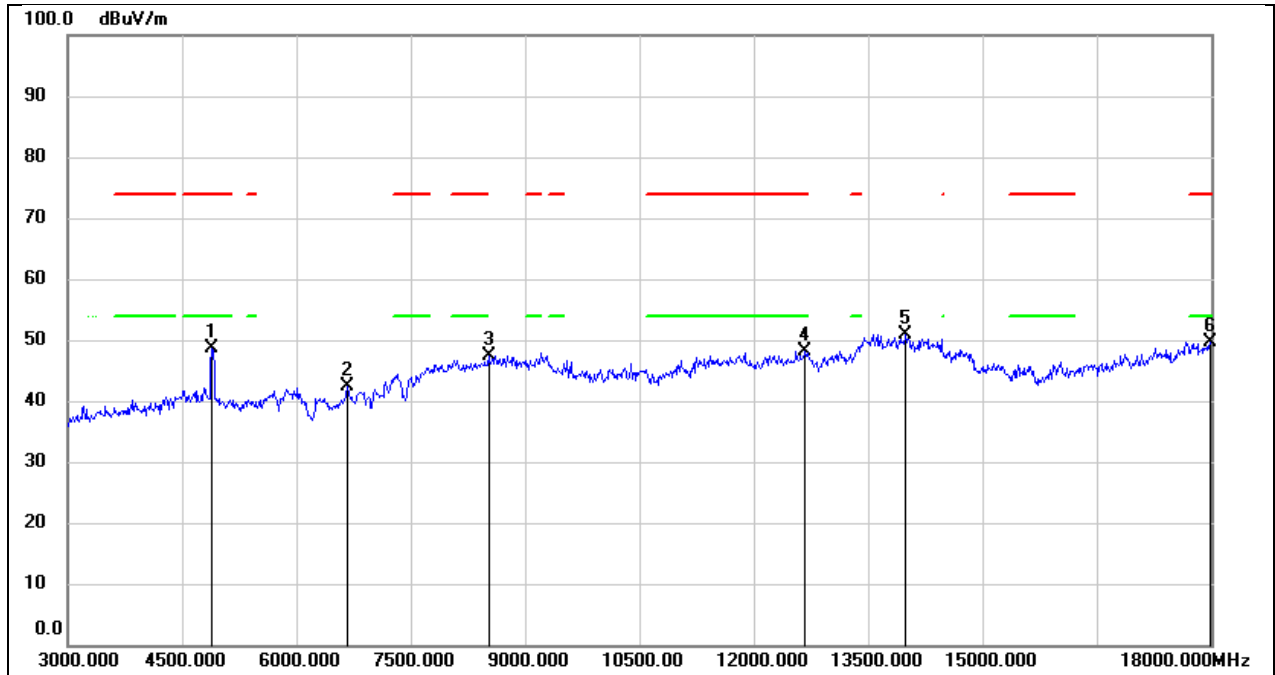

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4890.000	47.82	0.78	48.60	74.00	-25.40	peak
2*	6660.000	37.00	5.34	42.34	/	/	peak
3*	8520.000	38.43	9.07	47.50	/	/	peak
4	12675.000	28.41	19.83	48.24	74.00	-25.76	peak
5*	13995.000	26.80	24.08	50.88	/	/	peak
6	17985.000	21.14	28.41	49.55	74.00	-24.45	peak


Test Mode:	802.11ax HE40	Frequency(MHz):	2452
Polarity:	Vertical	Test Voltage:	DC 7.16V

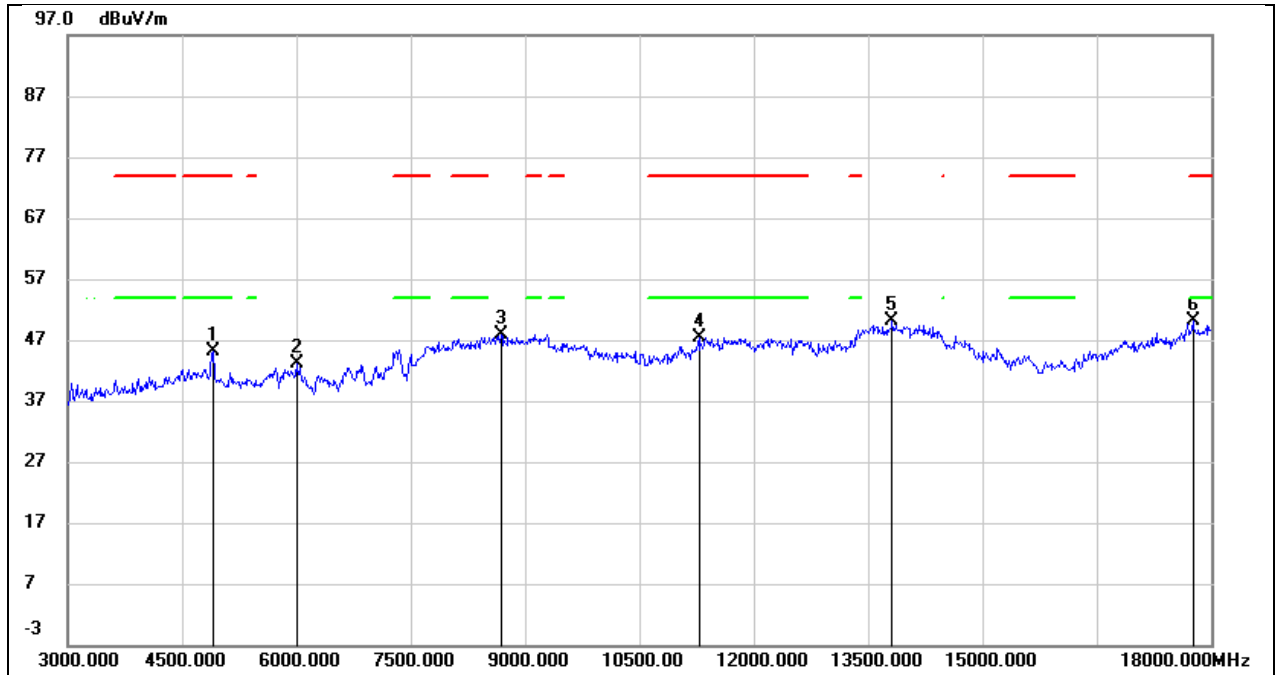

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4905.000	44.38	0.82	45.20	74.00	-28.80	peak
2*	6000.000	40.19	2.93	43.12	/	/	peak
3*	8685.000	38.55	9.37	47.92	/	/	peak
4	11280.000	30.08	17.33	47.41	74.00	-26.59	peak
5*	13815.000	26.89	23.34	50.23	/	/	peak
6	17760.000	23.59	26.54	50.13	74.00	-23.87	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

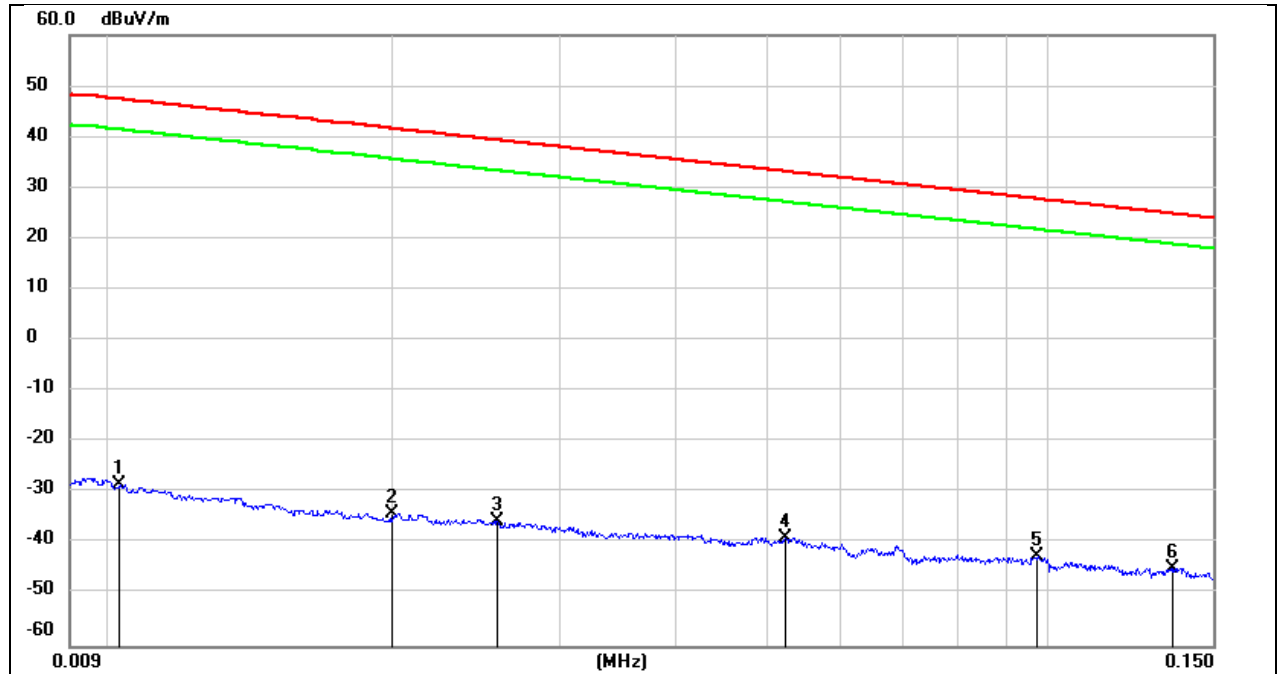


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.0102	73.05	-101.40	-28.35	47.43	-75.78	peak
2	0.0200	67.23	-101.34	-34.11	41.58	-75.69	peak
3	0.0258	65.96	-101.37	-35.41	39.37	-74.78	peak
4	0.0524	62.67	-101.49	-38.82	33.21	-72.03	peak
5	0.0974	59.27	-101.78	-42.51	27.83	-70.34	peak
6	0.1358	56.90	-101.68	-44.78	24.95	-69.73	peak

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

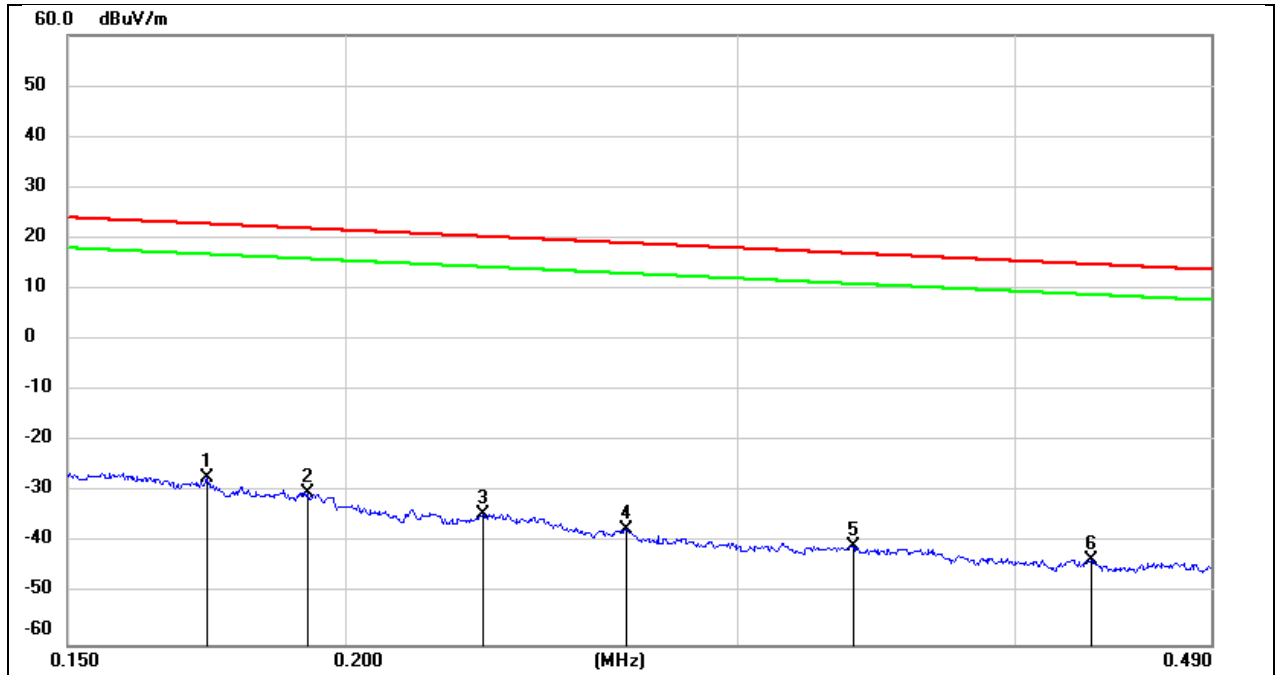

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.1733	74.42	-101.67	-27.25	22.83	-50.08	peak
2	0.1925	71.46	-101.70	-30.24	21.92	-52.16	peak
3	0.2305	67.44	-101.77	-34.33	20.35	-54.68	peak
4	0.2676	64.51	-101.82	-37.31	19.05	-56.36	peak
5	0.3382	61.23	-101.90	-40.67	17.02	-57.69	peak
6	0.4329	58.73	-101.99	-43.26	14.87	-58.13	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

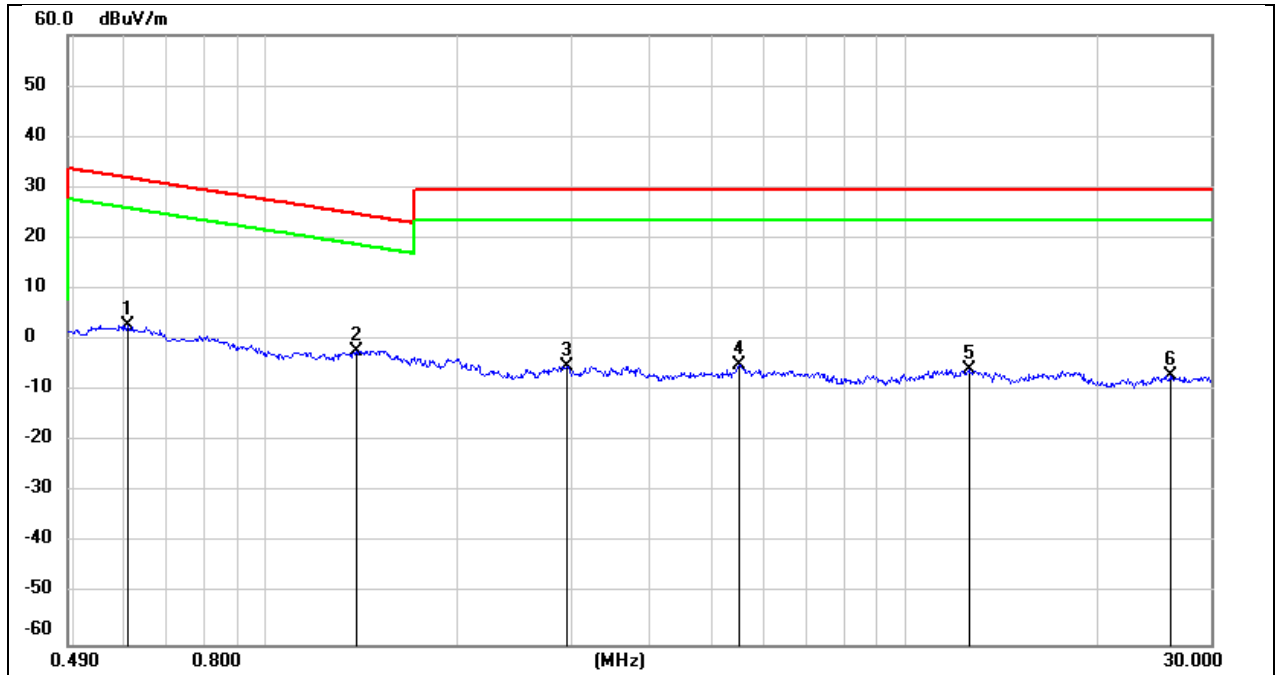

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.6094	64.99	-62.09	2.90	31.90	-29.00	peak
2	1.3810	59.97	-62.10	-2.13	24.80	-26.93	peak
3	2.9687	56.37	-61.59	-5.22	29.54	-34.76	peak
4	5.5066	56.39	-61.42	-5.03	29.54	-34.57	peak
5	12.5891	55.08	-60.91	-5.83	29.54	-35.37	peak
6	25.8978	53.26	-60.36	-7.10	29.54	-36.64	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

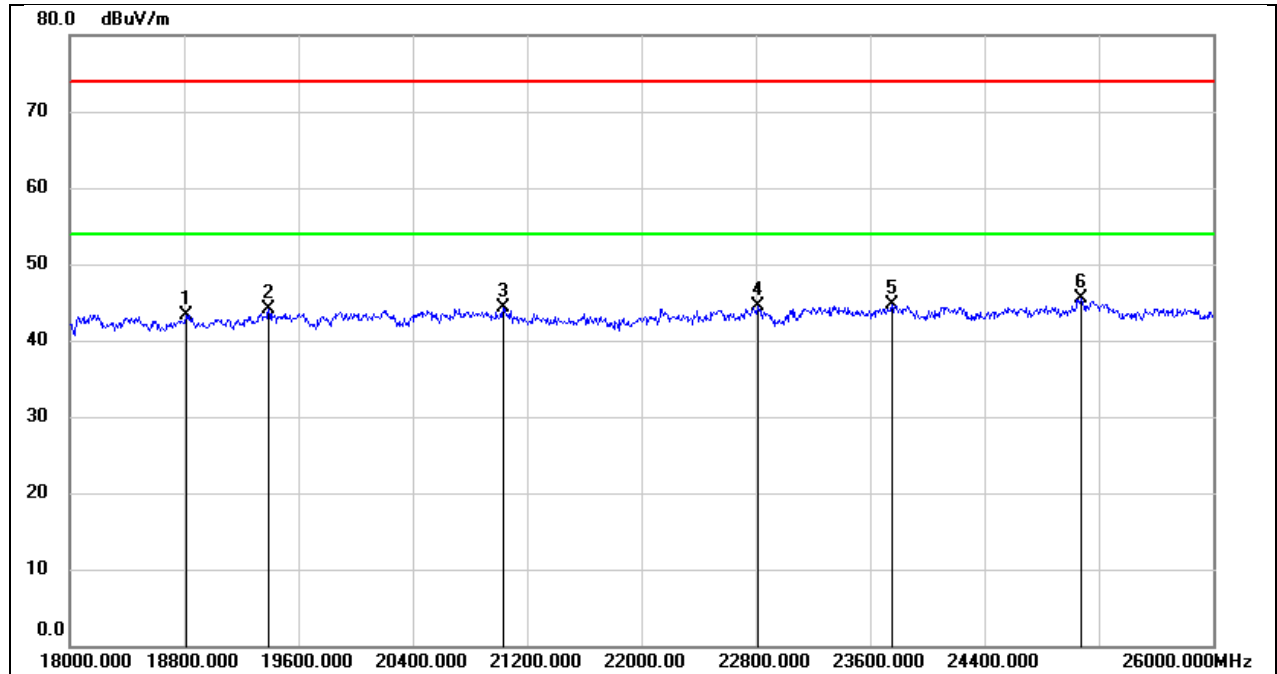

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18816.000	48.71	-5.38	43.33	74.00	-30.67	peak
2	19392.000	49.62	-5.57	44.05	74.00	-29.95	peak
3	21032.000	49.15	-4.87	44.28	74.00	-29.72	peak
4	22816.000	48.16	-3.63	44.53	74.00	-29.47	peak
5	23752.000	47.81	-3.19	44.62	74.00	-29.38	peak
6	25080.000	47.50	-1.96	45.54	74.00	-28.46	peak


Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

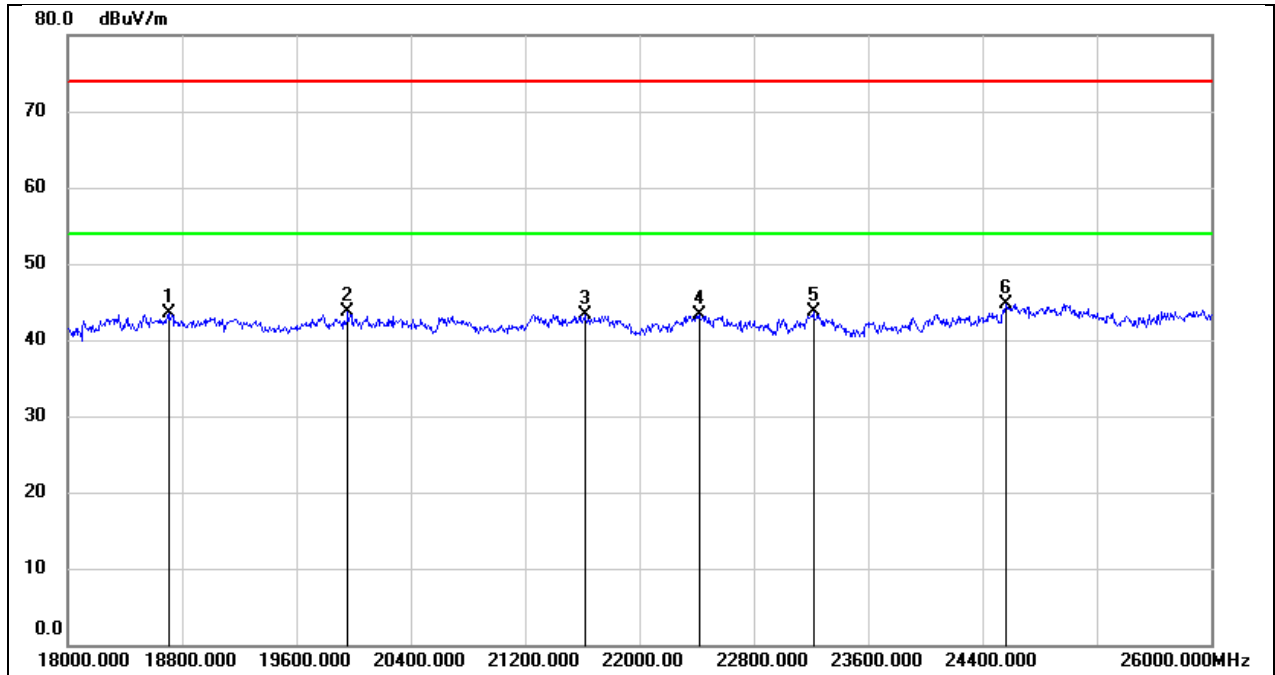

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18712.000	48.90	-5.40	43.50	74.00	-30.50	peak
2	19960.000	49.06	-5.42	43.64	74.00	-30.36	peak
3	21616.000	47.88	-4.53	43.35	74.00	-30.65	peak
4	22416.000	47.23	-4.00	43.23	74.00	-30.77	peak
5	23216.000	47.01	-3.38	43.63	74.00	-30.37	peak
6	24568.000	47.10	-2.33	44.77	74.00	-29.23	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Horizontal	Test Voltage:	DC 7.16V

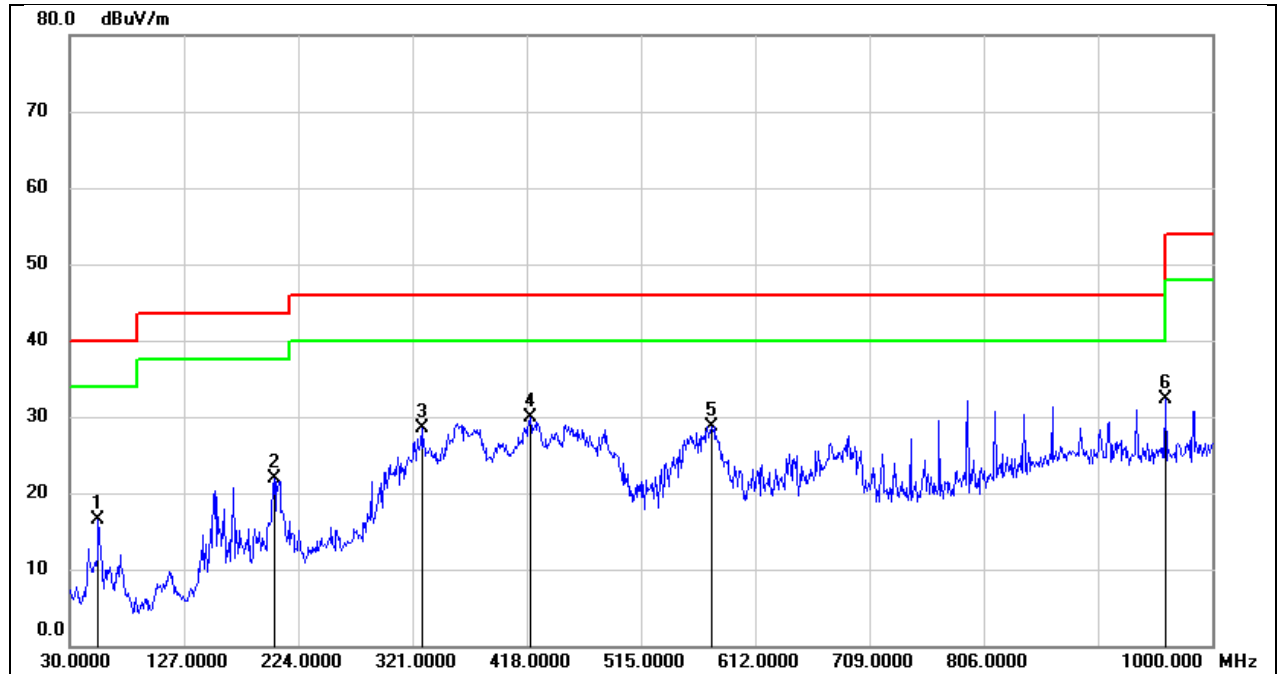

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2500	31.51	-15.02	16.49	40.00	-23.51	QP
2	203.6300	34.40	-12.44	21.96	43.50	-21.54	QP
3	328.7600	38.80	-10.37	28.43	46.00	-17.57	QP
4	420.9100	38.99	-8.99	30.00	46.00	-16.00	QP
5	575.1400	35.17	-6.38	28.79	46.00	-17.21	QP
6	960.2300	33.06	-0.69	32.37	54.00	-21.63	QP

Test Mode:	802.11b	Frequency(MHz):	2412
Polarity:	Vertical	Test Voltage:	DC 7.16V

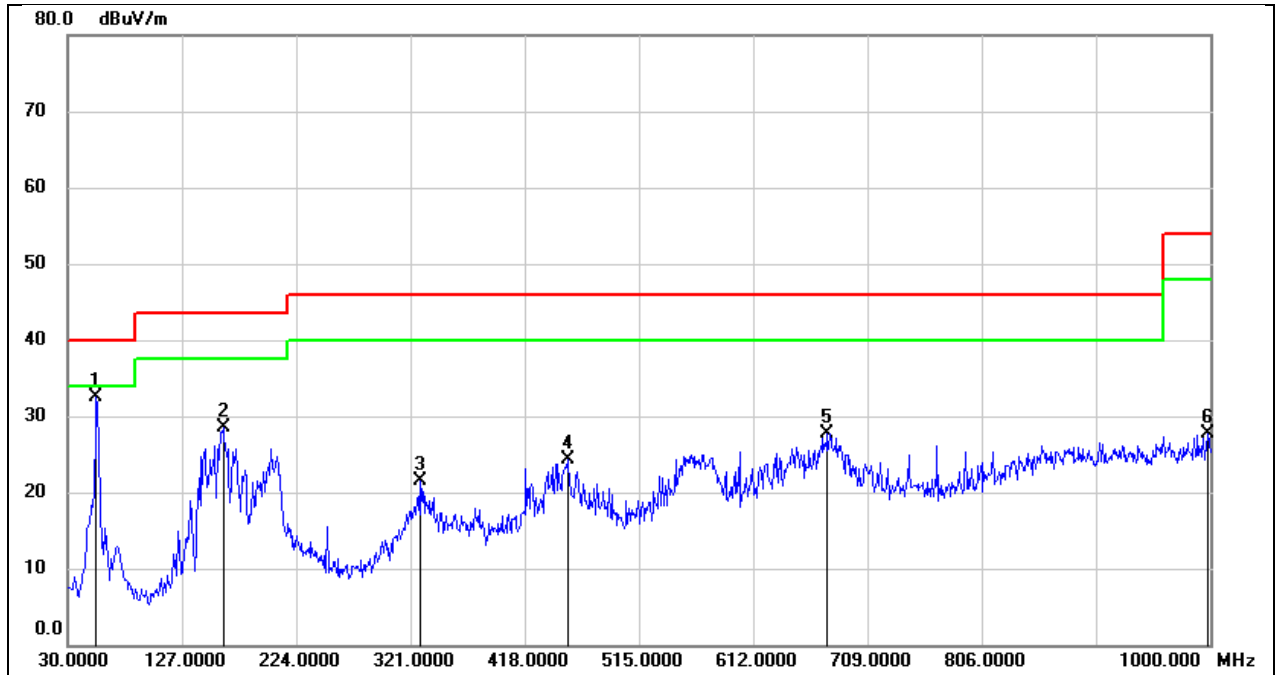

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	54.2500	47.52	-15.02	32.50	40.00	-7.50	QP
2	161.9200	41.14	-12.64	28.50	43.50	-15.00	QP
3	328.7600	31.95	-10.37	21.58	46.00	-24.42	QP
4	454.8600	32.44	-8.09	24.35	46.00	-21.65	QP
5	675.0500	32.67	-4.90	27.77	46.00	-18.23	QP
6	998.0600	27.84	-0.15	27.69	54.00	-26.31	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a)


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

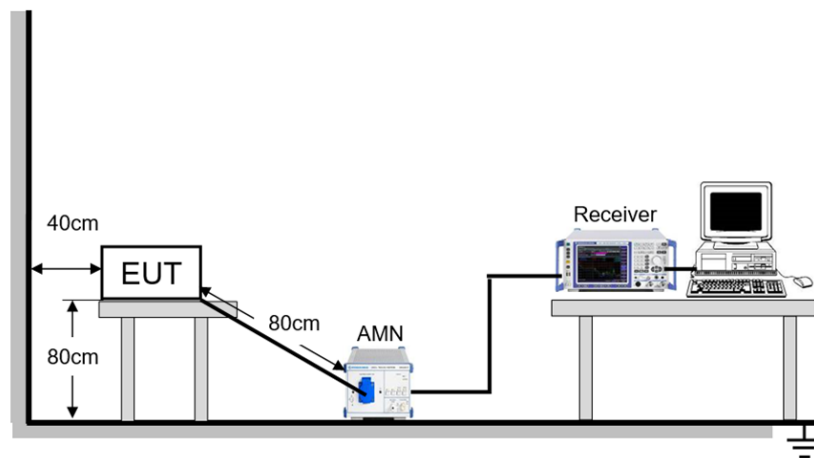

TEST ENVIRONMENT


Temperature	22.3°C	Relative Humidity	53.5%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 13, 2025	Test By	Deacon Tan
-----------	---------------	---------	------------

TEST RESULTS

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Line		

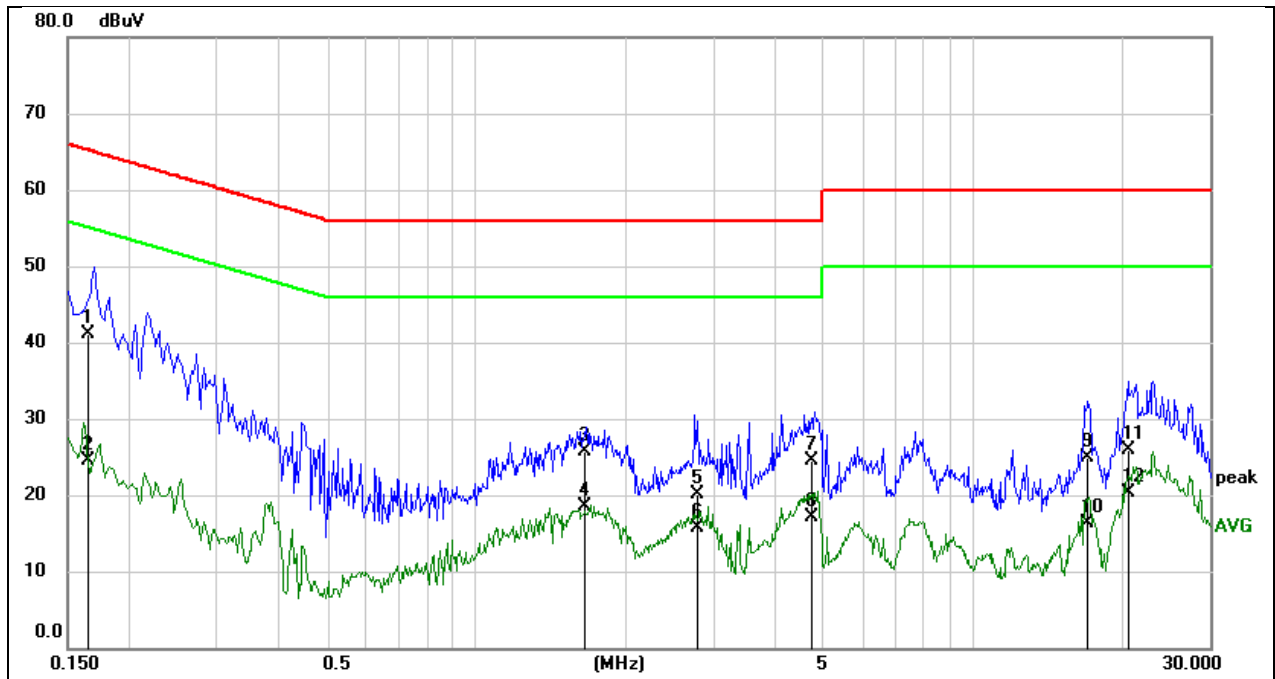


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1650	31.55	9.64	41.19	65.21	-24.02	QP
2	0.1650	14.82	9.64	24.46	55.21	-30.75	AVG
3	1.6424	16.09	9.64	25.73	56.00	-30.27	QP
4	1.6424	8.84	9.64	18.48	46.00	-27.52	AVG
5	2.7845	10.47	9.63	20.10	56.00	-35.90	QP
6	2.7845	5.99	9.63	15.62	46.00	-30.38	AVG
7	4.7468	14.89	9.65	24.54	56.00	-31.46	QP
8	4.7468	7.40	9.65	17.05	46.00	-28.95	AVG
9	17.1319	15.14	9.74	24.88	60.00	-35.12	QP
10	17.1319	6.64	9.74	16.38	50.00	-33.62	AVG
11	20.5547	16.20	9.73	25.93	60.00	-34.07	QP
12	20.5547	10.48	9.73	20.21	50.00	-29.79	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	802.11b	Frequency(MHz):	2412
Line:	Neutral		

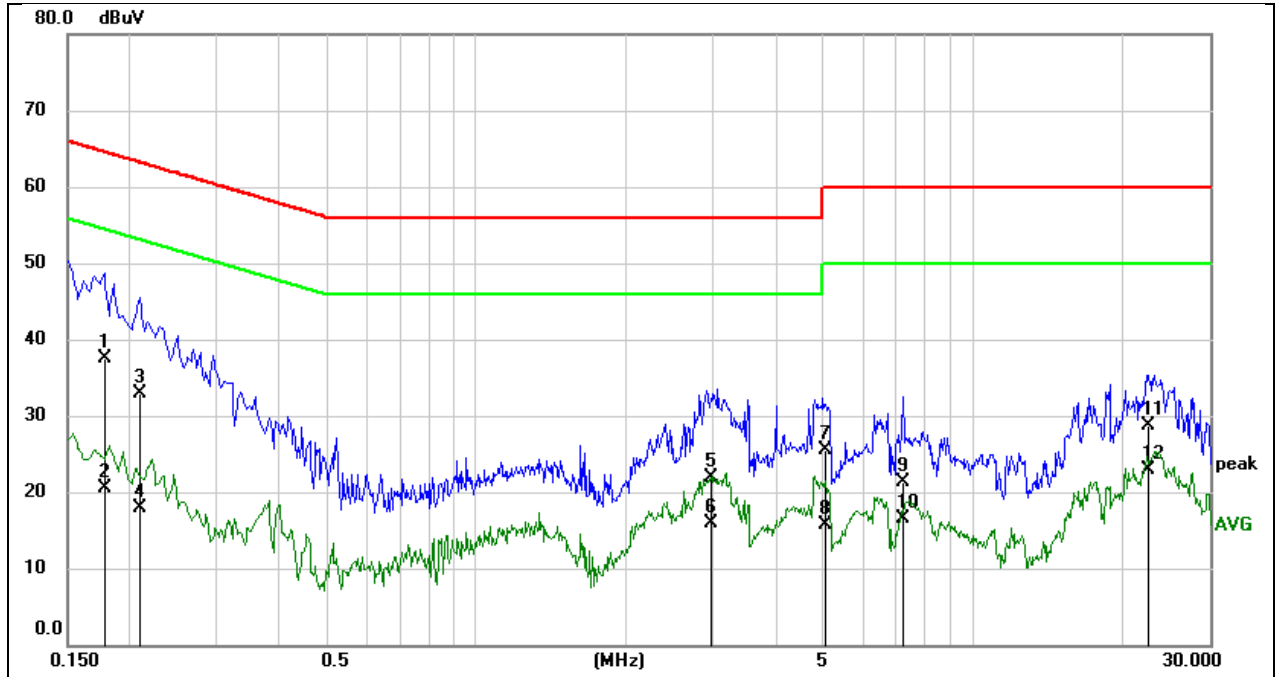

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1787	27.77	9.64	37.41	64.55	-27.14	QP
2	0.1787	10.94	9.64	20.58	54.55	-33.97	AVG
3	0.2091	23.33	9.64	32.97	63.24	-30.27	QP
4	0.2091	8.34	9.64	17.98	53.24	-35.26	AVG
5	2.9653	12.34	9.63	21.97	56.00	-34.03	QP
6	2.9653	6.22	9.63	15.85	46.00	-30.15	AVG
7	5.0452	15.90	9.66	25.56	60.00	-34.44	QP
8	5.0452	6.08	9.66	15.74	50.00	-34.26	AVG
9	7.2527	11.55	9.73	21.28	60.00	-38.72	QP
10	7.2527	6.72	9.73	16.45	50.00	-33.55	AVG
11	22.6124	19.01	9.72	28.73	60.00	-31.27	QP
12	22.6124	13.28	9.72	23.00	50.00	-27.00	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

11.1. APPENDIX A: DTS BANDWIDTH

11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant0	2412	8.520	2408.000	2416.520	≥ 0.5	PASS
	Ant1	2412	9.040	2407.480	2416.520	≥ 0.5	PASS
	Ant0	2437	8.040	2432.960	2441.000	≥ 0.5	PASS
	Ant1	2437	8.080	2432.960	2441.040	≥ 0.5	PASS
	Ant0	2462	8.040	2458.000	2466.040	≥ 0.5	PASS
	Ant1	2462	8.080	2457.960	2466.040	≥ 0.5	PASS
11G	Ant0	2412	14.400	2405.120	2419.520	≥ 0.5	PASS
	Ant1	2412	15.680	2403.840	2419.520	≥ 0.5	PASS
	Ant0	2437	14.680	2429.880	2444.560	≥ 0.5	PASS
	Ant1	2437	15.280	2429.240	2444.520	≥ 0.5	PASS
	Ant0	2462	16.000	2453.880	2469.880	≥ 0.5	PASS
	Ant1	2462	12.560	2454.480	2467.040	≥ 0.5	PASS
11N20MIMO	Ant0	2412	16.560	2403.240	2419.800	≥ 0.5	PASS
	Ant1	2412	12.840	2405.480	2418.320	≥ 0.5	PASS
	Ant0	2437	14.960	2429.560	2444.520	≥ 0.5	PASS
	Ant1	2437	15.080	2429.520	2444.600	≥ 0.5	PASS
	Ant0	2462	15.440	2454.160	2469.600	≥ 0.5	PASS
	Ant1	2462	15.080	2454.480	2469.560	≥ 0.5	PASS
11N40MIMO	Ant0	2422	34.960	2404.640	2439.600	≥ 0.5	PASS
	Ant1	2422	33.760	2404.480	2438.240	≥ 0.5	PASS
	Ant0	2437	33.840	2419.480	2453.320	≥ 0.5	PASS
	Ant1	2437	31.360	2419.480	2450.840	≥ 0.5	PASS
	Ant0	2452	35.040	2434.480	2469.520	≥ 0.5	PASS
	Ant1	2452	33.840	2434.480	2468.320	≥ 0.5	PASS
11AX20MIMO	Ant0	2412	12.600	2404.440	2417.040	≥ 0.5	PASS
	Ant1	2412	14.880	2404.640	2419.520	≥ 0.5	PASS
	Ant0	2437	15.520	2429.480	2445.000	≥ 0.5	PASS
	Ant1	2437	14.240	2430.280	2444.520	≥ 0.5	PASS
	Ant0	2462	13.120	2454.480	2467.600	≥ 0.5	PASS
	Ant1	2462	15.080	2454.520	2469.600	≥ 0.5	PASS
11AX40MIMO	Ant0	2422	33.840	2405.600	2439.440	≥ 0.5	PASS
	Ant1	2422	35.040	2404.480	2439.520	≥ 0.5	PASS
	Ant0	2437	35.040	2419.480	2454.520	≥ 0.5	PASS
	Ant1	2437	33.760	2419.480	2453.240	≥ 0.5	PASS
	Ant0	2452	33.840	2435.680	2469.520	≥ 0.5	PASS

	Ant1	2452	35.120	2434.400	2469.520	≥0.5	PASS
--	------	------	--------	----------	----------	------	------

11.1.2. Test Graphs





11B Ant1 2437




11B Ant0 2462



11B Ant1 2462



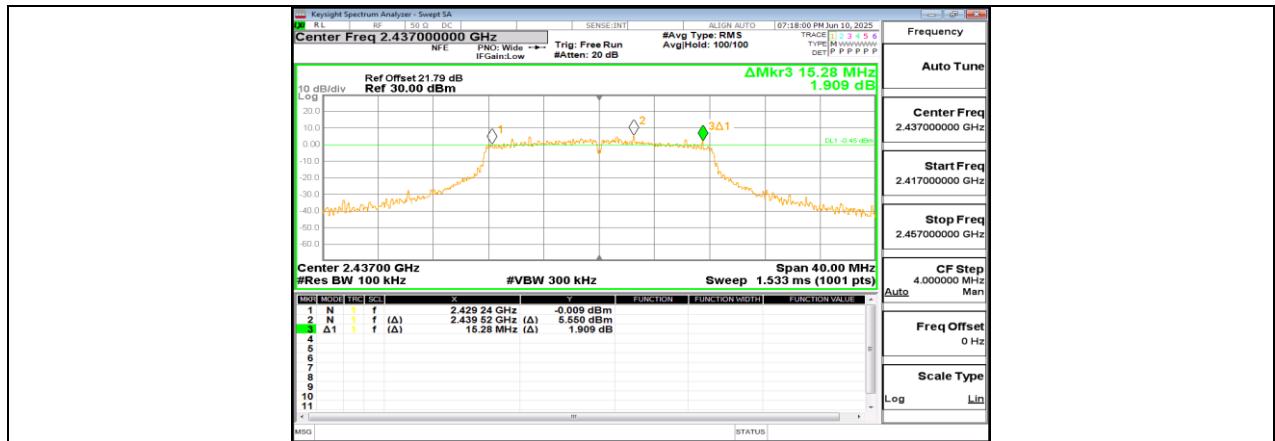


11G Ant1 2437



11G Ant0 2462



11G Ant1 2462

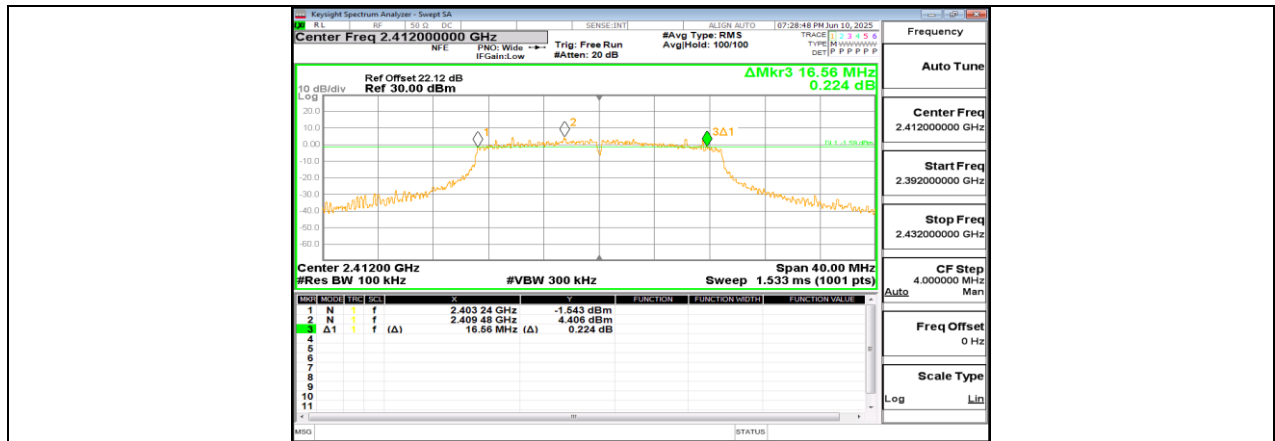


11N20MIMO Ant0 2412



11N20MIMO Ant1 2412



11N20MIMO Ant0 2437

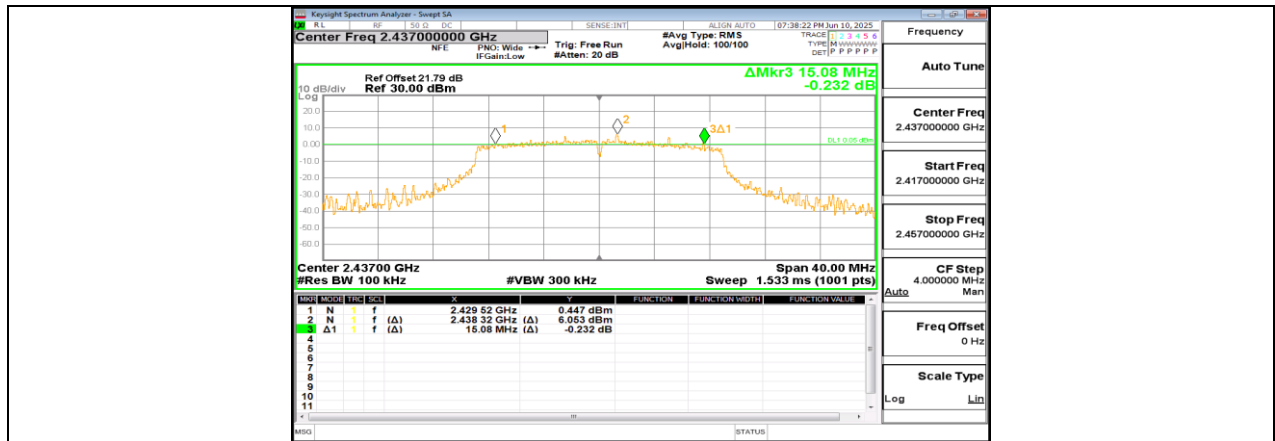

11N20MIMO Ant1 2437



11N20MIMO Ant0 2462



11N20MIMO Ant1 2462



11N40MIMO Ant0 2422




11N40MIMO Ant1 2422



11N40MIMO Ant0 2437



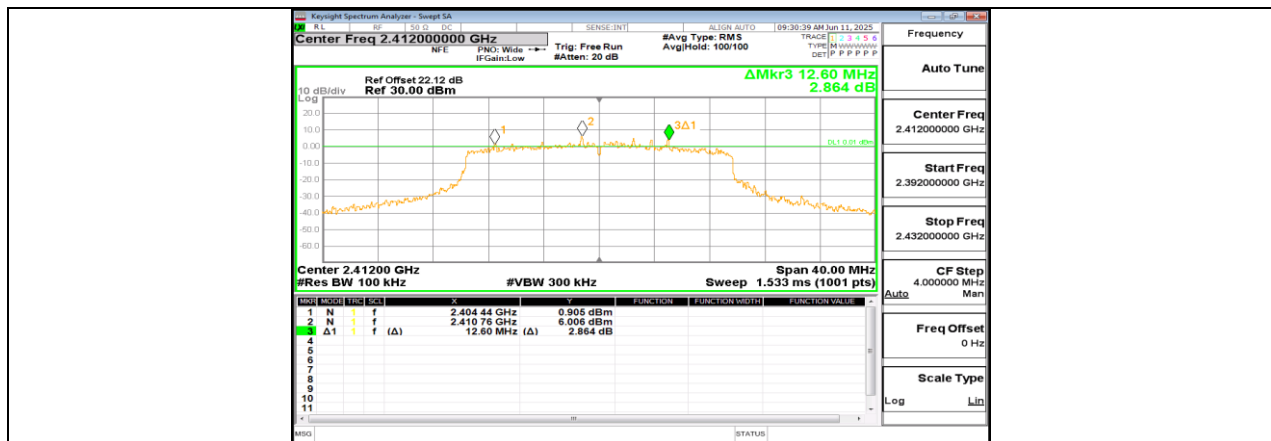

11AX20MIMO_Ant0_2412



11AX20MIMO_Ant1_2412



11AX20MIMO_Ant0_2437







11.2. APPENDIX B: OCCUPIED CHANNEL BANDWIDTH

11.2.1. Test Result

Test Mode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant0	2412	12.582	2405.6912	2418.2732	PASS
	Ant1	2412	12.476	2405.7432	2418.2192	PASS
	Ant0	2437	12.532	2430.7335	2443.2655	PASS
	Ant1	2437	12.417	2430.7844	2443.2014	PASS
	Ant0	2462	12.489	2455.7386	2468.2276	PASS
	Ant1	2462	12.364	2455.8092	2468.1732	PASS
11G	Ant0	2412	16.735	2403.5749	2420.3099	PASS
	Ant1	2412	16.790	2403.5426	2420.3326	PASS
	Ant0	2437	16.741	2428.5645	2445.3055	PASS
	Ant1	2437	16.740	2428.5535	2445.2935	PASS
	Ant0	2462	16.790	2453.5545	2470.3445	PASS
	Ant1	2462	16.787	2453.5789	2470.3659	PASS
11N20MIMO	Ant0	2412	17.873	2403.0006	2420.8736	PASS
	Ant1	2412	17.928	2402.9497	2420.8777	PASS
	Ant0	2437	17.907	2428.0280	2445.9350	PASS
	Ant1	2437	17.917	2427.9956	2445.9126	PASS
	Ant0	2462	17.946	2453.0028	2470.9488	PASS
	Ant1	2462	17.983	2453.0115	2470.9945	PASS
11N40MIMO	Ant0	2422	36.188	2403.7587	2439.9467	PASS
	Ant1	2422	36.225	2403.7437	2439.9687	PASS
	Ant0	2437	36.203	2418.8317	2455.0347	PASS
	Ant1	2437	36.332	2418.6300	2454.9620	PASS
	Ant0	2452	36.248	2433.8032	2470.0512	PASS
	Ant1	2452	36.400	2433.7025	2470.1025	PASS
11AX20MIMO	Ant0	2412	18.988	2402.4816	2421.4696	PASS
	Ant1	2412	18.924	2402.5008	2421.4248	PASS
	Ant0	2437	18.974	2427.5039	2446.4779	PASS
	Ant1	2437	18.954	2427.4989	2446.4529	PASS
	Ant0	2462	18.989	2452.5265	2471.5155	PASS
	Ant1	2462	18.981	2452.4797	2471.4607	PASS
11AX40MIMO	Ant0	2422	37.658	2403.0183	2440.6763	PASS
	Ant1	2422	37.550	2403.0435	2440.5935	PASS
	Ant0	2437	37.562	2418.0666	2455.6286	PASS
	Ant1	2437	37.715	2417.9886	2455.7036	PASS
	Ant0	2452	37.753	2432.9549	2470.7079	PASS
	Ant1	2452	37.617	2433.0275	2470.6445	PASS