

FCC PART 15.407
RSS-GEN, ISSUE 4, NOVEMBER 2014
RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-G1P1709
IC: 11805A-G1P1709

Report Type: Original Report	Product Name: DJI Goggles Racing Edition
Report Number: RDG170929005-00C	
Report Date: 2017-10-27	
Jerry Zhang	
Reviewed By:	EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	8
EXTERNAL CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.407 (f) & §1.1310 & §2.1093 , RSS-102 §4- RF EXPOSURE.....	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §15.203 ,RSS-GEN§8.3- ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.407 (b) (6) §15.207 (a) & RSS-Gen §8.8– CONDUCTED EMISSIONS	12
APPLICABLE STANDARD	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	12
CORRECTED AMPLITUDE & MARGIN CALCULATION	13
TEST EQUIPMENT LIST AND DETAILS.....	13
TEST PROCEDURE	13
TEST DATA	14
FCC §15.209, §15.205 , §15.407(b) & RSS-247 §6.2, RSS-GEN§8.10–UNWANTED EMISSION	16
APPLICABLE STANDARD	16
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA	20
FCC §15.407(a)& RSS-247 §6.2,RSS-Gen §6.6– EMISSION BANDWIDTH.....	25
APPLICABLE STANDARD	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE	25
TEST DATA	25
FCC §15.407(a) & RSS-247 §6.2– MAXIMUM CONDUCTED OUTPUT POWER.....	30
APPLICABLE STANDARD	30
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE	32

TEST DATA	33
FCC §15.407(a)& RSS-247 §6.2 - POWER SPECTRAL DENSITY	34
APPLICABLE STANDARD	34
TEST PROCEDURE	36
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	37
FCC §15.407(b)& RSS-247 §6.2 – OUT- OF-BAND EMISSIONS.....	40
APPLICABLE STANDARD	40
TEST PROCEDURE	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST DATA	42
FCC §15.407(g) – FREQUENCY STABILITY.....	45
APPLICABLE STANDARD	45
TEST PROCEDURE	45
TEST EQUIPMENT LIST AND DETAILS.....	45
TEST DATA	45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SZ DJI TECHNOLOGY CO., LTD*'s product, model number: **G1P (FCC ID: SS3- G1P1709, IC: 11805A-G1P1709)** (the "EUT") in this report was a *DJI Goggles Racing Edition*, the DJI Goggles Body was measured approximately: 195mm (L) x 155 mm (W) x 110 mm (H); headband (folded) was measured approximately: 255 mm (L) x 205 mm (W) x 92 mm (H), rated input voltage: DC3.8V Lithium Ion Polymer Rechargeable battery or DC5V~12V charging from adapter.

Adapter Information:

MODEL: QC18-US

INPUT: 100-240V~, 50/60Hz, 0.5A

OUTPUT: DC 5V, 3A/DC 9V, 2A/DC 12V, 1.5A

The measurement and test data of the Spurious Emissions in this report was gathered from production sample serial number: 170929005 (Assigned by BACL, Dongguan). The EUT was received on 2017-09-29.

Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communications Commission's rules. And RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC submissions with Part 15B JBP, FCC ID: SS3- G1P1709.

FCC submissions with Part 15C DTS, FCC ID: SS3- G1P1709.

ISED submissions with RSS-247 DTSs, IC: 11805A-G1P1709.

Part of system submissions with FCC ID: SS3-OAS11709, IC: 11805A-OAS11709.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices”. And RSS-247, Issue 2, February 2017, RSS-Gen Issue 4, November 2014 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61 dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~40GHz: 5.23 dB
Unwanted Emissions, Conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO 17025 by CNAS(Lab code: L5662). And accredited to ISO 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The device employed 1.4MHz and 10MHz modes.

For 1.4MHz mode, 60 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5728.5	31	5788.5
2	5730.5	32	5790.5
3	5732.5	33	5792.5
~	~	~	~
28	5782.5	58	5842.5
29	5784.5	59	5844.5
30	5786.5	60	5846.5

The device test with channel 1, 30, 60.

For 10MHz mode, 1 channel was provided to testing:

Channel	Frequency (MHz)
1	5736.5


EUT Exercise Software

The software “DjiSdrConsole_V1.2.7.36” was used for testing, which was provided by manufacturer. The maximum power with maximum duty cycle was configured by system default setting.


The duty cycle as below:

Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
1.4MHz	100	100	100
10MHz	100	100	100

1.4MHz

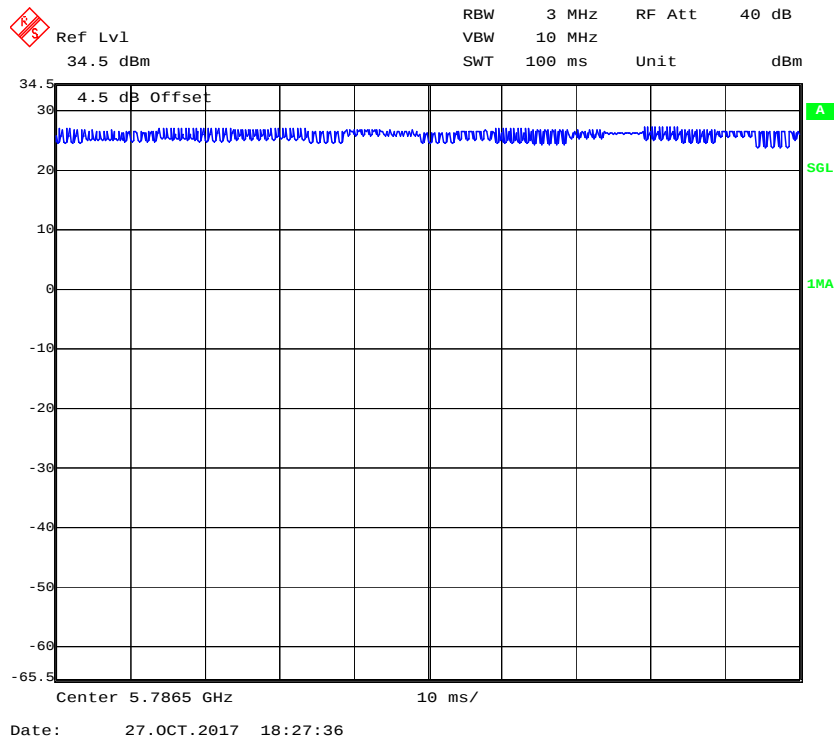

10MHz

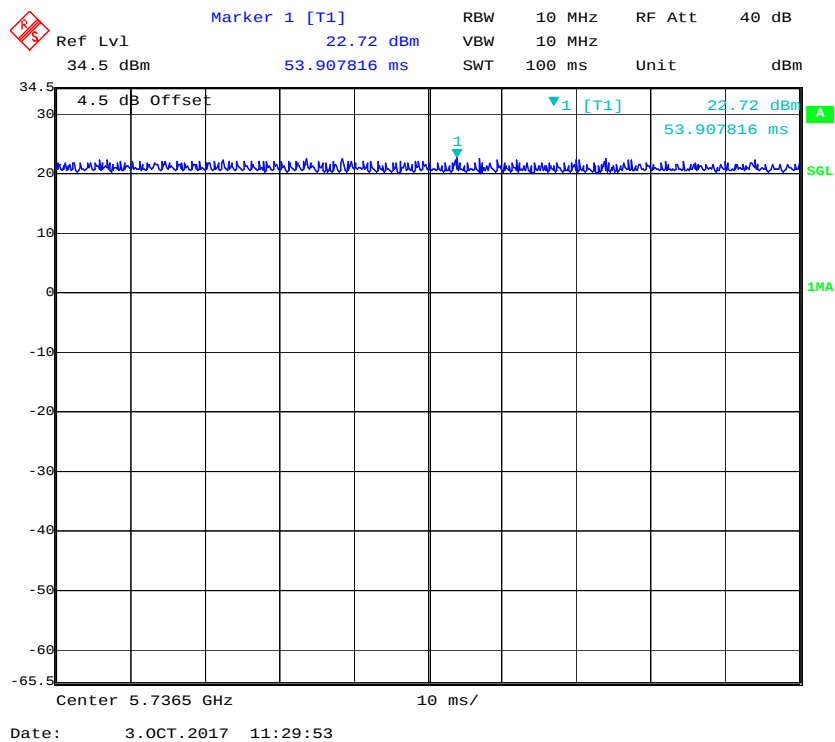


Equipment Modifications

No modification was made to the EUT.

External Cable

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	Yes	No	1.25	USB Port of adapter	EUT
Earphone Cable	no	No	1.2	Audio Port of EUT	Earphone

Block Diagram of Test Setup

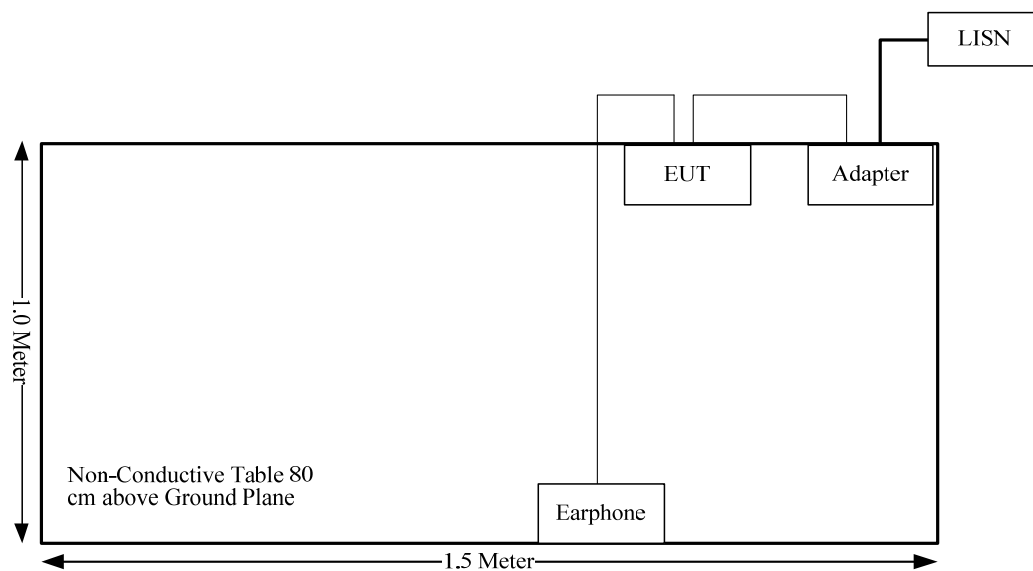

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093 RSS-102 §4	RF Exposure	Compliance
FCC§15.203 RSS-GEN§8.3	Antenna Requirement	Compliance
FCC§15.207 (a) RSS-Gen §8.8	AC Line Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b) RSS-247§6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b) (1),(2),(3),(4) RSS-247§6.2	Out Of Band Emissions	Compliance
FCC§15.407(a) RSS-247 §6.2 RSS-Gen§6.6	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 §6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a) RSS-247 §6.2	Power Spectral Density	Compliance
FCC§15.407(g)	Frequency stability	Compliance

FCC §15.407 (f) & §1.1310 & §2.1093 , RSS-102 §4- RF EXPOSURE**Applicable Standard**

According to subpart 15.407(f), §1.1310 and §2.1093.

According to RSS-102 §4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RDG170929005-20A for FCC and RDG170929005-20B for Canada ISED.

FCC §15.203 ,RSS-GEN§8.3- ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §8.3, The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.⁹ When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

User manuals for transmitters equipped with detachable antennas shall also contain the following notice in a conspicuous location:

This radio transmitter (identify the device by certification number or model number if Category II) has been approved by Industry Canada to operate with the antenna types listed below with the maximum permissible gain indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types approved for use with the transmitter, indicating the maximum permissible antenna gain (in dBi).

Antenna Connector Construction

The EUT has one internal antenna arrangement, and the antenna gain is 2.96 dBi in 5.8GHz band, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) & RSS-Gen §8.8– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6) & RSS-Gen §8.8.

EUT Setup

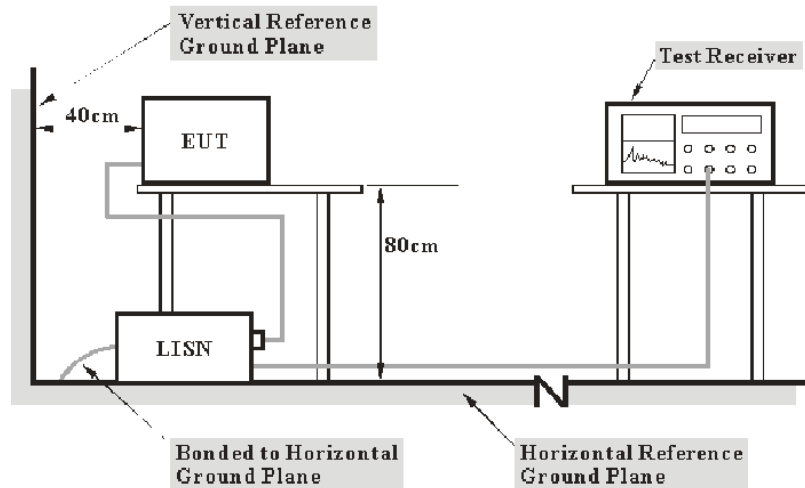

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 and RSS-Gen limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2016-12-08	2017-12-08
R&S	L.I.S.N	ESH2-Z5	892107/021	2017-09-01	2018-09-01
R&S	Two-line V-network	ENV 216	3560.6550.12	2016-12-08	2017-12-08
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
Unknown	Coaxial Cable	2m	Con-1	2017-09-01	2018-09-01

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.


Test Data**Environmental Conditions**

Temperature:	27.1 °C
Relative Humidity:	46 %
ATM Pressure:	100.6 kPa

The testing was performed by Gaochao Gong on 2017-09-29.


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

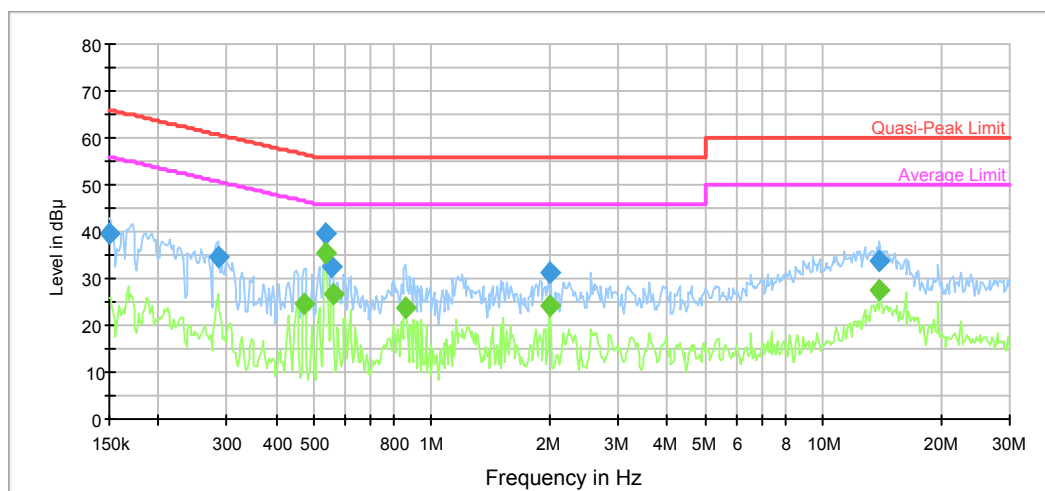

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.150000	39.5	9.000	L1	11.2	26.5	66.0	Compliance
0.283749	34.5	9.000	L1	10.2	26.2	60.7	Compliance
0.536756	39.7	9.000	L1	9.9	16.3	56.0	Compliance
0.554139	32.3	9.000	L1	9.9	23.7	56.0	Compliance
1.998778	31.2	9.000	L1	9.7	24.8	56.0	Compliance
13.968003	33.8	9.000	L1	9.9	26.2	60.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.472507	24.5	9.000	L1	9.9	22.0	46.5	Compliance
0.536756	35.3	9.000	L1	9.9	10.7	46.0	Compliance
0.558572	26.8	9.000	L1	9.9	19.2	46.0	Compliance
0.858911	23.9	9.000	L1	9.8	22.1	46.0	Compliance
1.998778	24.2	9.000	L1	9.7	21.8	46.0	Compliance
13.968003	27.3	9.000	L1	9.9	22.7	50.0	Compliance

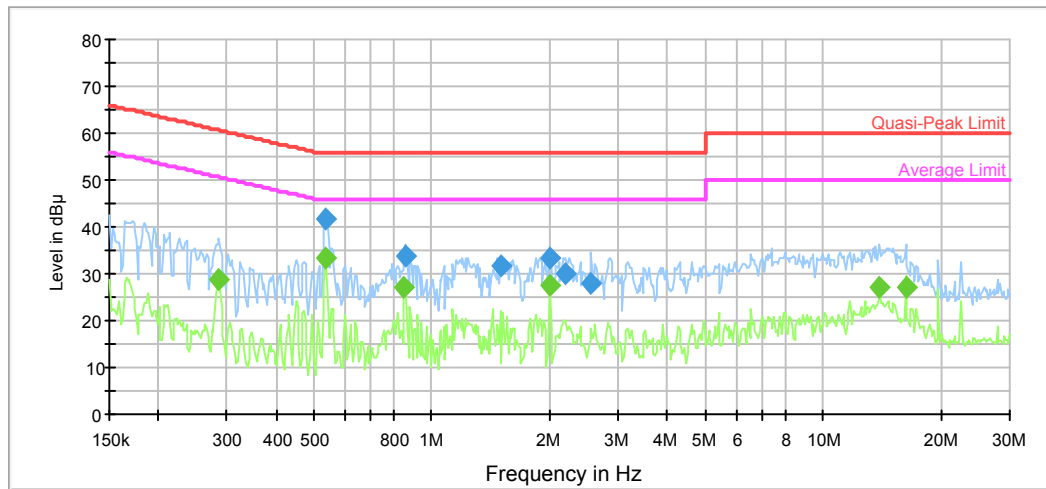AC120 V, 60 Hz, Neutral:

frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.536756	41.9	9.000	N	9.9	14.1	56.0	Compliance
0.858911	33.8	9.000	N	9.8	22.2	56.0	Compliance
1.500325	31.6	9.000	N	9.7	24.4	56.0	Compliance
1.998778	33.4	9.000	N	9.7	22.6	56.0	Compliance
2.199332	30.2	9.000	N	9.8	25.8	56.0	Compliance
2.558827	27.8	9.000	N	9.8	28.2	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.286019	28.6	9.000	N	10.2	22.0	50.6	Compliance
0.536756	33.3	9.000	N	9.9	12.7	46.0	Compliance
0.852094	26.9	9.000	N	9.8	19.1	46.0	Compliance
1.998778	27.5	9.000	N	9.7	18.5	46.0	Compliance
13.968003	27.0	9.000	N	9.9	23.0	50.0	Compliance
16.251162	27.2	9.000	N	10.0	22.8	50.0	Compliance

**FCC §15.209, §15.205 , §15.407(b) & RSS-247 §6.2, RSS-GEN§8.10–
UNWANTED EMISSION**

Applicable Standard

According to FCC §15.407; §15.209; §15.205;

(b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

According to RSS-247§6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency bands 5470-5600 MHz and 5650-5725 MHz:

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.


Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

EUT Setup

Below 1 GHz:

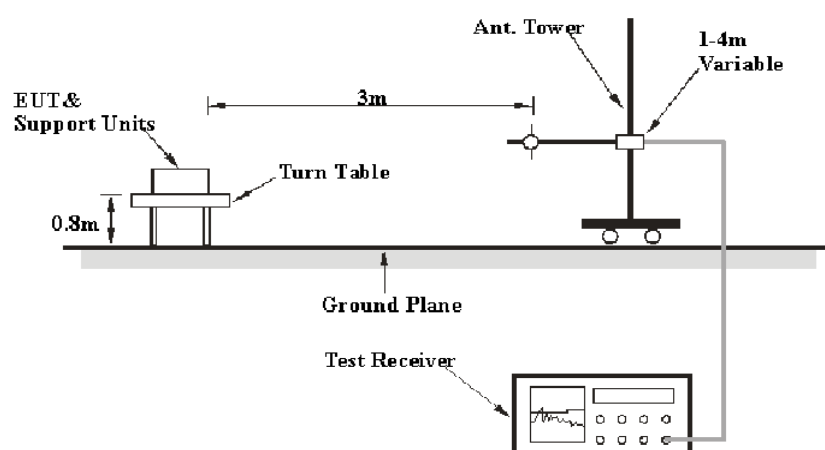

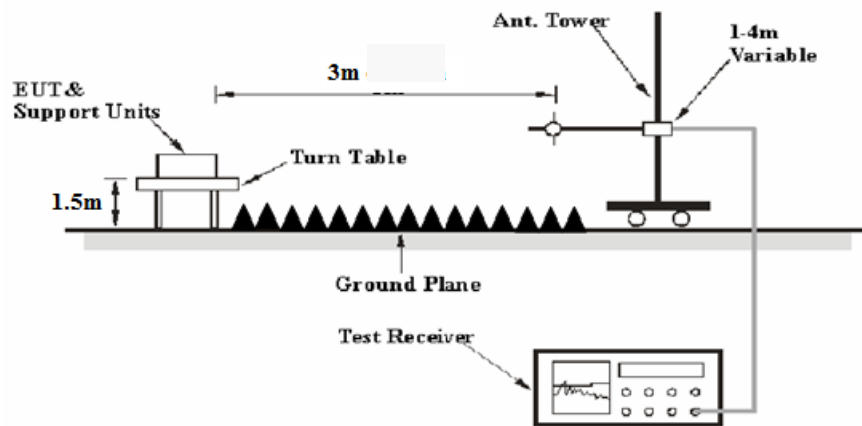Above 1 GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.407 and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Extrapolation result} - \text{Limit}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-09-01	2018-09-01
Sunol Sciences	Antenna	JB3	A060611-1	2014-11-06	2017-11-05
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
unknown	Coaxial Cable	4m	C0400/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	0.75m	C0075/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	10m	C1000/01	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2016-12-08	2017-12-08
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2017-06-16	2020-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
unknown	Coaxial Cable	8m	C0800/01	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	27.1 °C
Relative Humidity:	34 %
ATM Pressure:	100.5 kPa

The testing was performed by Steven Zuo on 2017-10-03.


Test Mode: Transmitting

1) 30MHz-1GHz(1.4MHz Middle channel was the worst):

Horizontal:

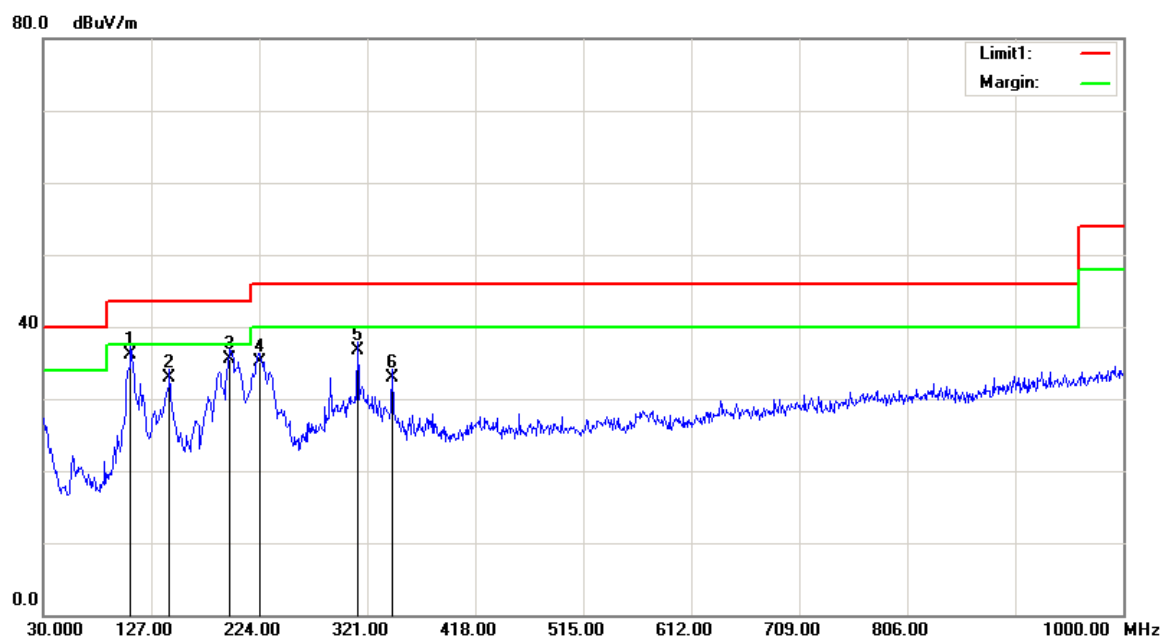

Frequency (MHz)	Receiver Reading (dBuV)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
108.5700	42.48	QP	-6.38	36.10	43.50	7.40
143.4900	39.36	QP	-6.36	33.00	43.50	10.50
197.8100	42.14	QP	-6.64	35.50	43.50	8.00
224.0000	42.00	QP	-6.80	35.20	46.00	10.80
312.2700	41.15	QP	-4.45	36.70	46.00	9.30
343.3100	36.41	QP	-3.41	33.00	46.00	13.00

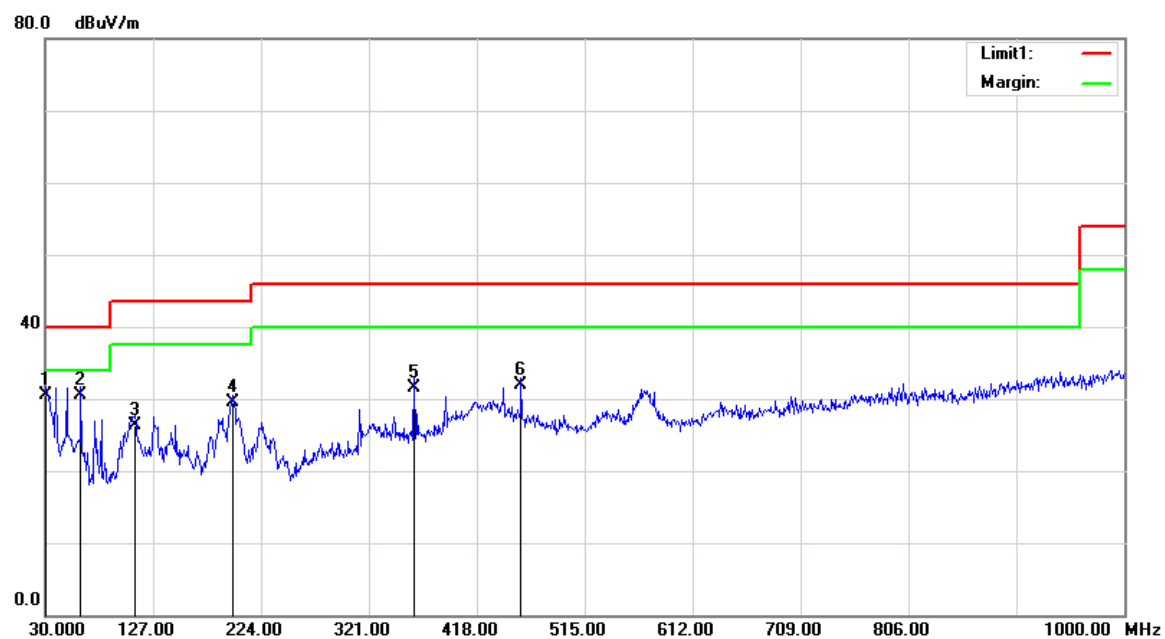Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Measurement	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	30.15	QP	0.35	30.50	40.00	9.50
62.0100	42.90	QP	-12.30	30.60	40.00	9.40
110.5100	32.43	QP	-6.03	26.40	43.50	17.10
198.7800	35.95	QP	-6.45	29.50	43.50	14.00
361.7400	34.50	QP	-2.90	31.60	46.00	14.40
457.7700	33.05	QP	-1.15	31.90	46.00	14.10

2) 1-40GHz:

1.4MHz

Frequency	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
(MHz)	Reading (dBμV)	Measurement (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel:5728.5 MHz									
5728.50	90.12	PK	H	34.19	3.69	0.00	121.98	N/A	N/A
5728.50	81.83	AV	H	34.19	3.69	0.00	113.69	N/A	N/A
5728.50	89.67	PK	V	34.19	3.69	0.00	121.53	N/A	N/A
5728.50	80.54	AV	V	34.19	3.69	0.00	112.40	N/A	N/A
5725.00	36.98	PK	H	34.19	3.69	0.00	68.84	122.20	53.36
5720.00	29.93	PK	H	34.19	3.69	0.00	61.79	110.80	49.01
5700.00	27.65	PK	H	34.18	3.68	0.00	59.49	105.20	45.71
5650.00	27.06	PK	H	34.16	3.63	0.00	58.83	68.20	9.37
11457.00	54.37	PK	H	38.96	6.59	37.33	56.57	74.00	17.43
11457.00	41.56	AV	H	38.96	6.59	37.33	43.76	54.00	10.24
17185.50	52.16	PK	H	41.28	8.77	38.64	57.55	74.00	16.45
17185.50	40.29	AV	H	41.28	8.77	38.64	45.68	54.00	8.32
8966.00	46.78	PK	H	37.68	5.47	36.94	46.97	74.00	27.03
8966.00	32.46	AV	H	37.68	5.47	36.94	32.65	54.00	21.35
Middle Channel:5786.5 MHz									
5786.50	90.16	PK	H	34.21	3.71	0.00	122.06	N/A	N/A
5786.50	81.58	AV	H	34.21	3.71	0.00	113.48	N/A	N/A
5786.50	89.54	PK	V	34.21	3.71	0.00	121.44	N/A	N/A
5786.50	80.57	AV	V	34.21	3.71	0.00	112.47	N/A	N/A
11573.00	54.23	PK	H	39.00	6.61	37.44	56.38	74.00	17.62
11573.00	41.39	AV	H	39.00	6.61	37.44	43.54	54.00	10.46
17359.50	52.06	PK	H	42.29	8.81	38.52	58.62	74.00	15.38
17359.50	40.15	AV	H	42.29	8.81	38.52	46.71	54.00	7.29
9855.00	46.75	PK	H	38.04	5.97	36.72	48.02	74.00	25.98
9855.00	32.44	AV	H	38.04	5.97	36.72	33.71	54.00	20.29
9677.00	45.72	PK	H	37.97	5.86	36.67	46.86	74.00	27.14
9677.00	31.65	AV	H	37.97	5.86	36.67	32.79	54.00	21.21
High Channel:5846.5 MHz									
5846.50	90.27	PK	H	34.24	3.75	0.00	122.24	N/A	N/A
5846.50	81.39	AV	H	34.24	3.75	0.00	113.36	N/A	N/A
5846.50	89.63	PK	V	34.24	3.75	0.00	121.60	N/A	N/A
5846.50	80.54	AV	V	34.24	3.75	0.00	112.51	N/A	N/A
5850.00	36.75	PK	H	34.24	3.75	0.00	68.72	122.20	53.48
5855.00	33.82	PK	H	34.24	3.75	0.00	65.79	110.80	45.01
5875.00	27.35	PK	H	34.25	3.77	0.00	59.35	105.20	45.85
5925.00	27.09	PK	H	34.27	3.80	0.00	59.14	68.20	9.06
11693.00	53.98	PK	H	39.00	6.65	37.58	56.03	74.00	17.97
11693.00	41.15	AV	H	39.00	6.65	37.58	43.20	54.00	10.80
17539.50	52.64	PK	H	43.34	8.85	38.38	60.43	74.00	13.57
17539.50	40.02	AV	H	43.34	8.85	38.38	47.81	54.00	6.19
8966.00	46.37	PK	H	37.68	5.47	36.94	46.56	74.00	27.44
8966.00	32.42	AV	H	37.68	5.47	36.94	32.61	54.00	21.39

10MHz

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Limit	Margin
(MHz)	Reading (dBμV)	Measurement (PK/QP/AV)	Polar (H/V)	Factor (dB)	(dB)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
5736.5MHz									
5736.50	76.65	PK	H	34.19	3.69	0.00	108.51	N/A	N/A
5736.50	67.83	AV	H	34.19	3.69	0.00	99.69	N/A	N/A
5736.50	75.37	PK	V	34.19	3.69	0.00	107.23	N/A	N/A
5736.50	66.54	AV	V	34.19	3.69	0.00	98.40	N/A	N/A
5725.00	29.48	PK	H	34.19	3.69	0.00	61.34	122.20	60.86
5720.00	26.93	PK	H	34.19	3.69	0.00	58.79	110.80	52.01
5700.00	27.35	PK	H	34.18	3.68	0.00	59.19	105.20	46.01
5650.00	27.13	PK	H	34.16	3.63	0.00	58.90	68.20	9.30
11473.00	54.79	PK	H	38.97	6.59	37.34	56.99	74.00	17.01
11473.00	41.35	AV	H	38.97	6.59	37.34	43.55	54.00	10.45
17209.50	52.64	PK	H	41.42	8.77	38.62	58.19	74.00	15.81
17209.50	40.52	AV	H	41.42	8.77	38.62	46.07	54.00	7.93
8966.00	46.83	PK	H	37.68	5.47	36.94	47.02	74.00	26.98
8966.00	32.37	AV	H	37.68	5.47	36.94	32.56	54.00	21.44

FCC §15.407(a)& RSS-247 §6.2,RSS-Gen §6.6– EMISSION BANDWIDTH**Applicable Standard**

15.407(a), RSS-247 §6.2 and RSS-Gen §6.6

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Attenuator	3dB	3dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Test Data**Environmental Conditions**

Temperature:	27.8~28.1 °C
Relative Humidity:	47~48 %
ATM Pressure:	100.2~100.8 kPa

The testing was performed by Sun Zhong on 2017-10-02 and 2017-10-25.

Test Result: Pass.


Please refer to the following tables and plots.

Test mode: Transmitting

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	6 dB Emission Bandwidth Limits (MHz)	99% Occupied Bandwidth (MHz)
1.4MHz	5728.5	1.136	≥0.5	1.166
	5786.5	1.160	≥0.5	1.118
	5846.5	1.130	≥0.5	1.166
10MHz	5736.5	9.058	≥0.5	8.938


**99% Occupied Bandwidth:
1.4MHz**

Low Channel

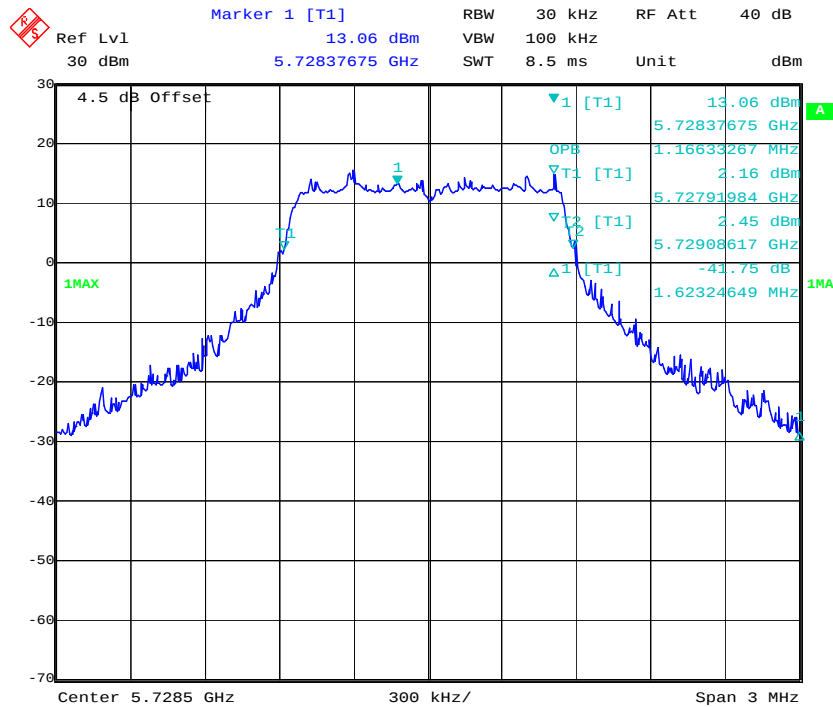


Date: 2.OCT.2017 16:39:54

Middle Channel

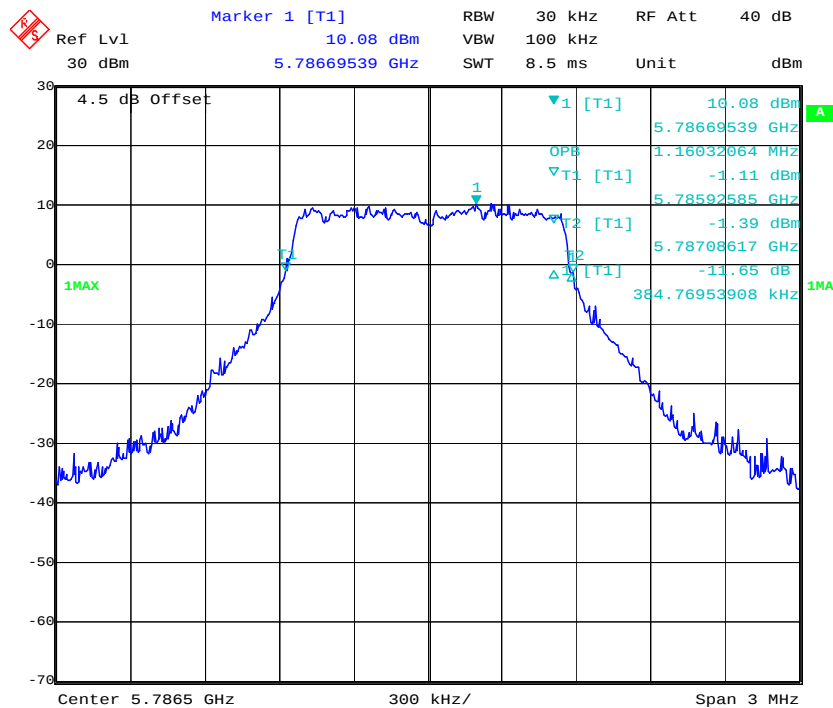


Date: 25.OCT.2017 22:44:34

High Channel

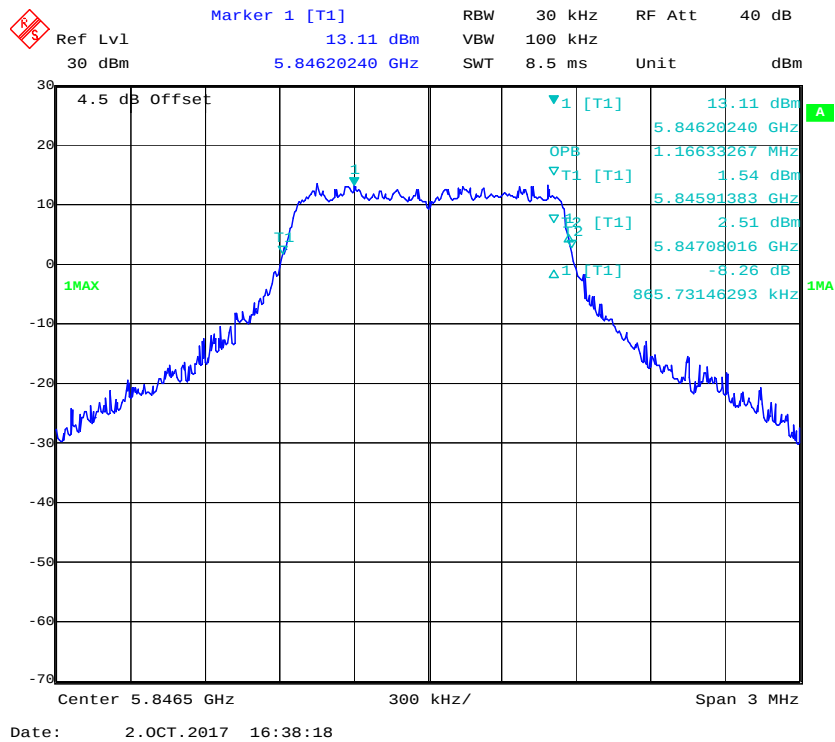


10MHz

/

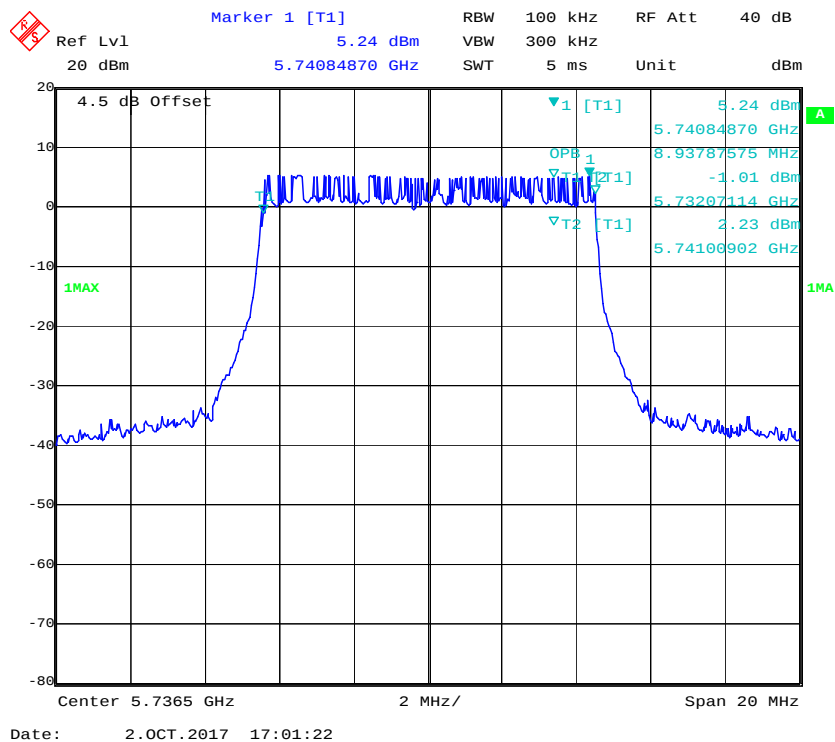


6dB Bandwidth:
1.4MHz


Low Channel

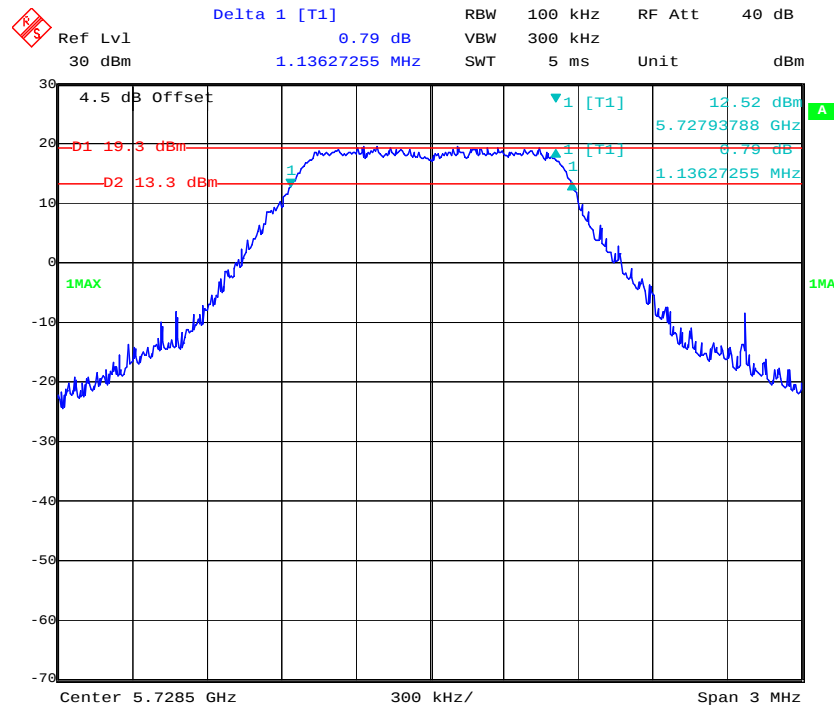


Middle Channel

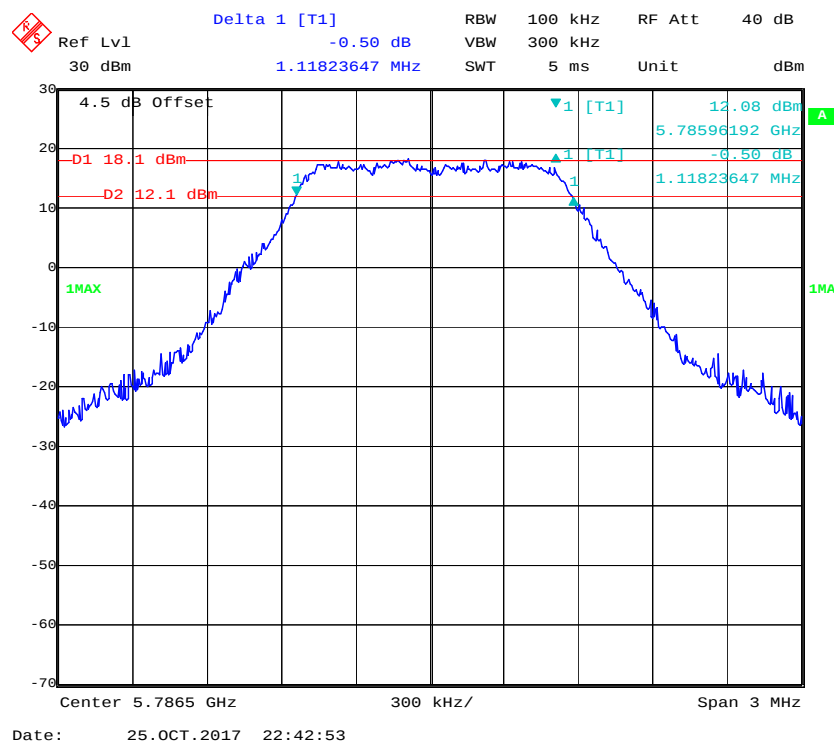

High Channel

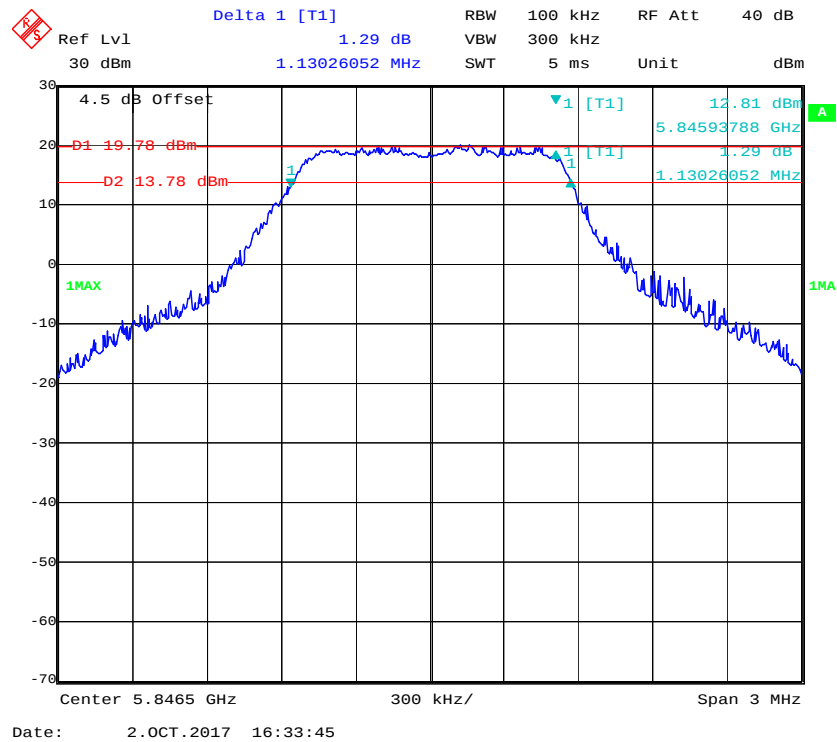

10MHZ

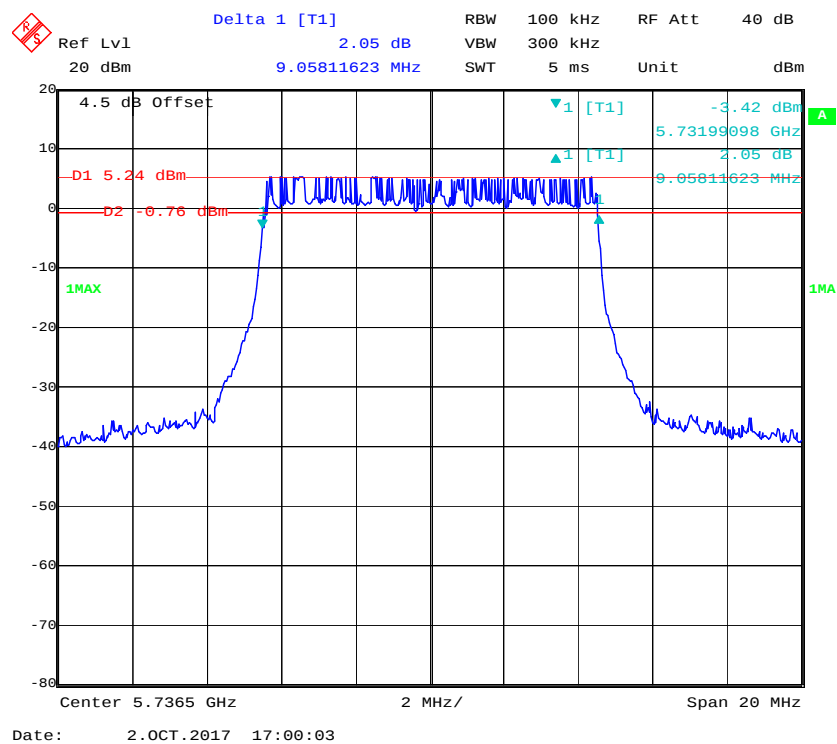

FCC §15.407(a) & RSS-247 §6.2– MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum

power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 §6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint³ systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2016-11-03	2017-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2016-11-03	2017-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2016-11-03	2017-11-03
Unknown	RF Attenuator	3dB	3dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Test Data**Environmental Conditions**

Temperature:	27.8 °C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Sun Zhong on 2017-10-02.

Test Mode: Transmitting

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)	Limit (dBm)	Result
1.4MHz	5728.5	20.66	30	PASS
	5786.5	20.22	30	PASS
	5846.5	20.45	30	PASS
10MHz	5736.5	11.37	30	PASS

FCC §15.407(a)& RSS-247 §6.2 - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint³ systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Attenuator	3dB	3dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.8~28.1 °C
Relative Humidity:	47~48 %
ATM Pressure:	100.2~100.8 kPa

The testing was performed by Sun Zhong on 2017-10-02 and 2017-10-25.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

Mode	Frequency (MHz)	Power Spectral Density (dBm/500kHz)	Limit (dBm/500kHz)
1.4MHz	5728.5	20.60	30
	5786.5	18.90	30
	5846.5	19.90	30
10MHz	5736.5	8.37	30


1.4MHz

Low Channel

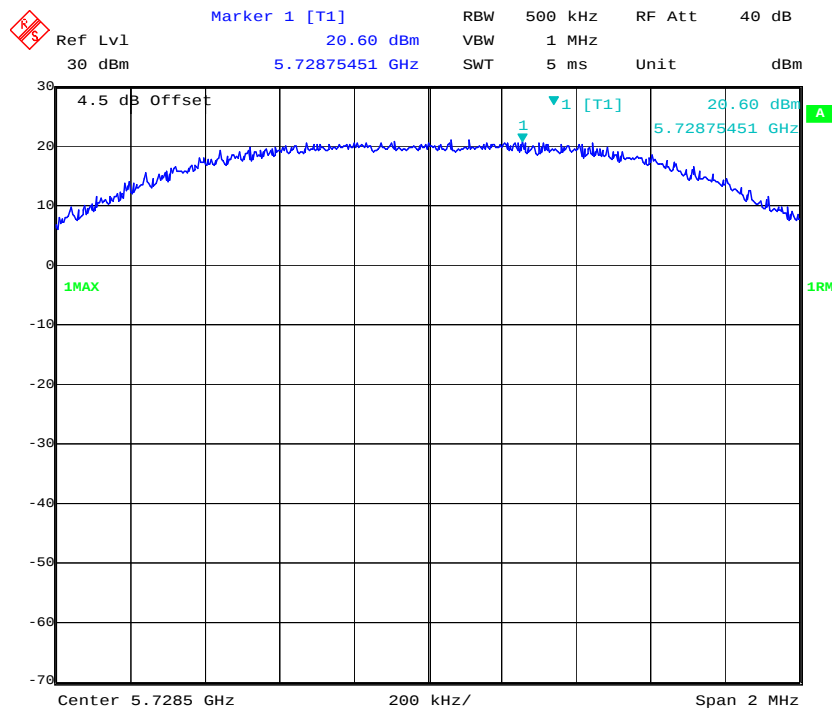


Date: 2.OCT.2017 16:49:13

Middle Channel

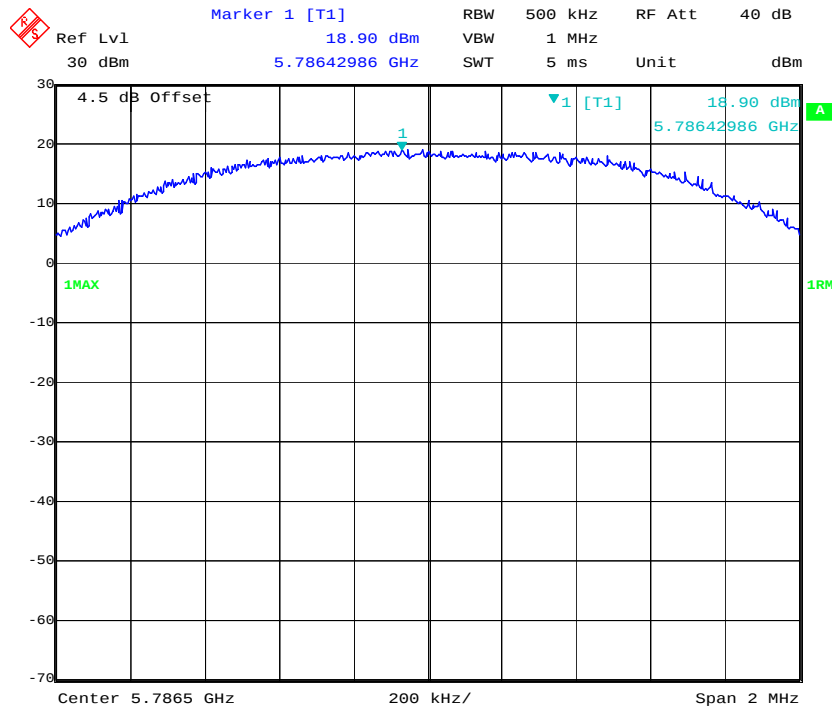


Date: 25.OCT.2017 23:08:12

High Channel

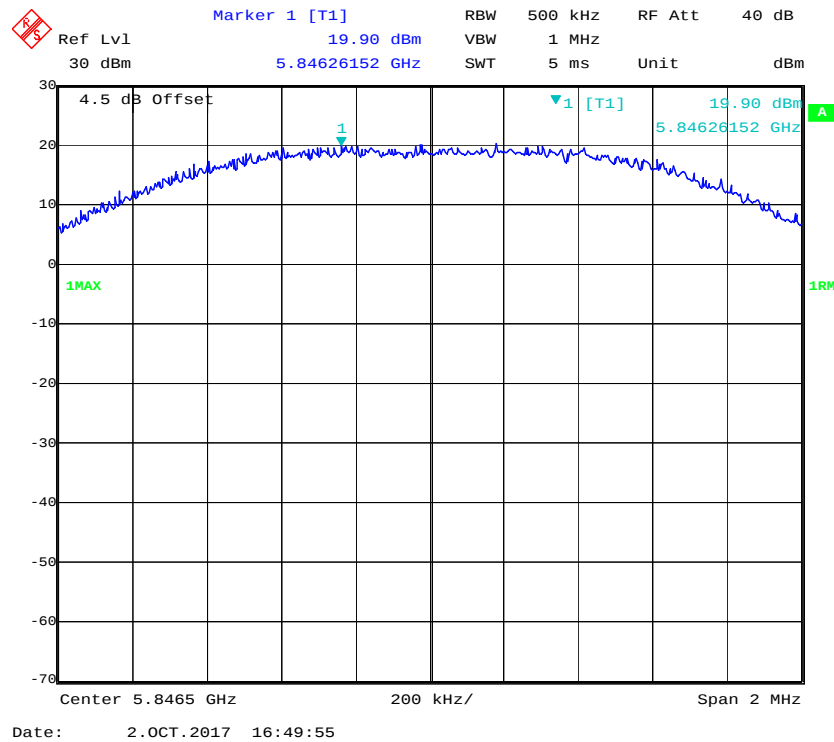

10MHz

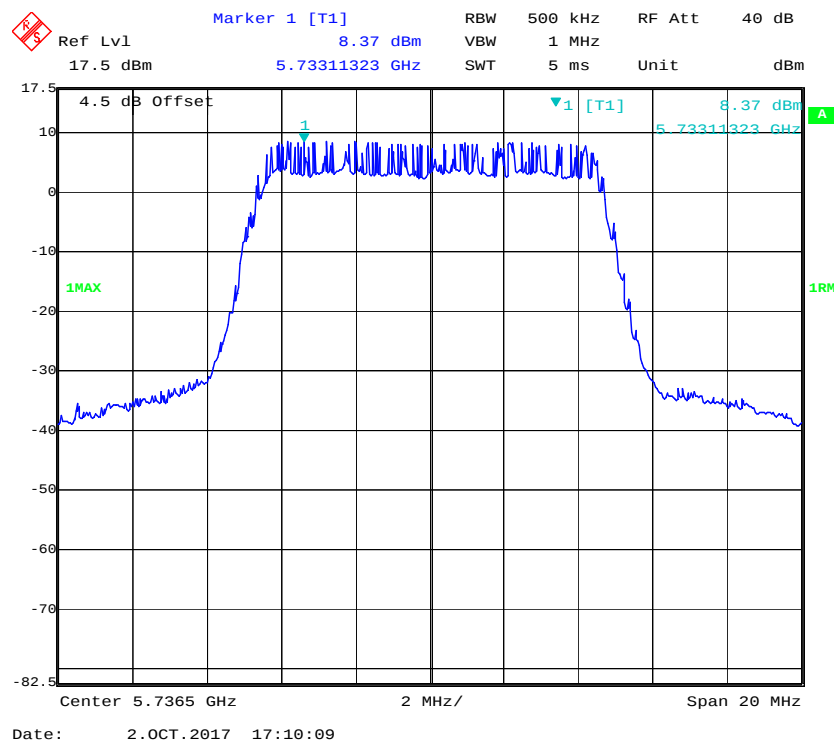

FCC §15.407(b)& RSS-247 §6.2 – OUT- OF-BAND EMISSIONS

Applicable Standard

FCC §15.407

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

According to RSS-247§6.2

Frequency band 5150-5250 MHz**6.2.1.2 Unwanted emission limits**

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz**6.2.2.2 Unwanted emission limits**

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency bands 5470-5600 MHz and 5650-5725 MHz:**6.2.3.2 Unwanted emission limits**

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz**6.2.4.2 Unwanted emission limits**

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.

Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.

Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Unknown	RF Attenuator	3dB	3dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.8 °C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa


The testing was performed by Sun Zhong on 2017-10-02.

Test Result: Pass.

The antenna gain was offset in the display. Please refer to the following plots.


1.4MHz:

Low Channel

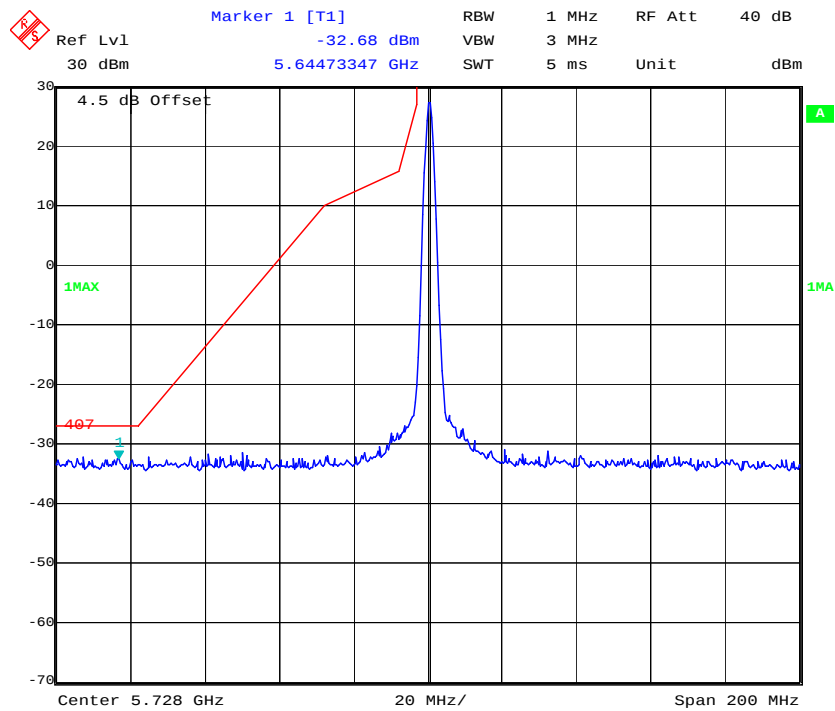


Date: 2.OCT.2017 17:28:19

High Channel

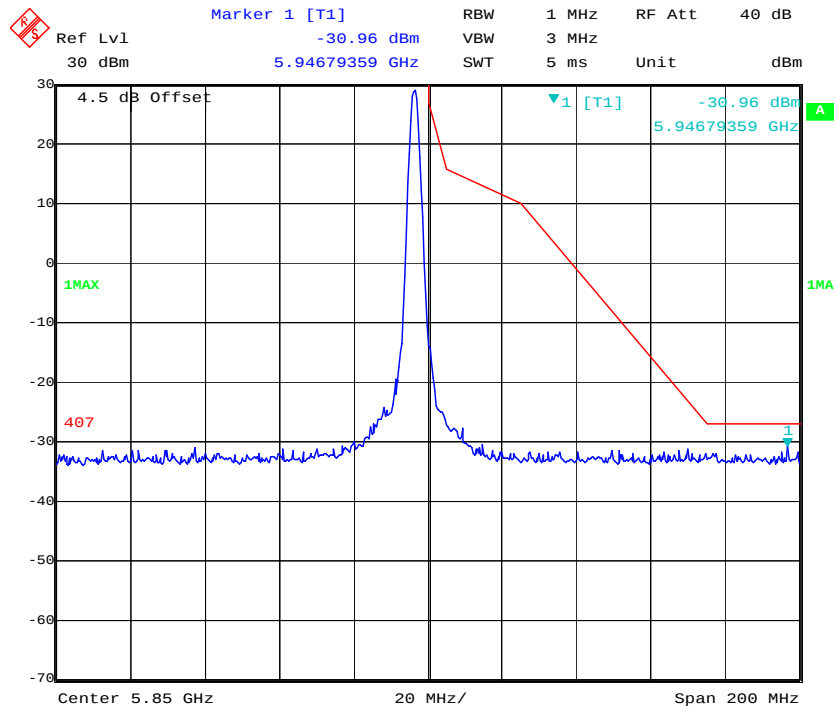

Date: 3.OCT.2017 18:09:27

10MHz:

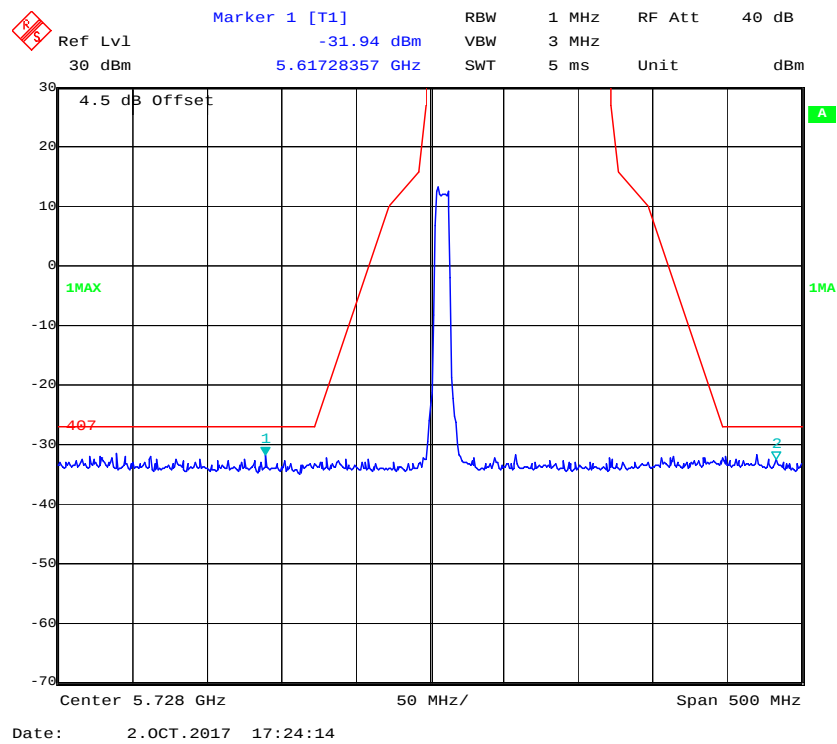

FCC §15.407(g) – FREQUENCY STABILITY**Applicable Standard**

FCC §15.407

(g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

Test Procedure

According to C63.10-2013 clause 6.8.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSIQ	831929/005	2017-08-31	2018-08-31
Dongzhixu	High Temperature Test Chamber	DP1000	201105083-4	2017-09-10	2018-09-10
UNI-T	Multimeter	UT39A	M130199938	2017-04-02	2018-04-02
Unknown	RF Attenuator	3dB	3dB-1	Each Time	/
Unknown	Coaxial Cable	0.1m	C-1	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	27.8 °C
Relative Humidity:	47 %
ATM Pressure:	100.8 kPa

The testing was performed by Sun Zhong on 2017-10-02.

Test mode: Transmitting

Test Result: Complaint

1.4MHz:

Temperature	Voltage	f_L at Low Test Channel	F_H at High Test Channel	Limit
°C	V_{DC}	MHz	MHz	
0	3.8	5727.924	5847.08	f_L and f_H Within 5725~5850MHz range
10		5727.92	5847.082	
20		5727.92	5847.08	
30		5727.922	5847.084	
40		5727.918	5847.081	
25	3.3	5727.919	5847.08	
25	4.2	5727.92	5847.082	

10MHz:

Temperature	Voltage	f_L at Low Test Channel	F_H at High Test Channel	Limit
°C	V_{DC}	MHz	MHz	
0	3.8	5732.072	5741.009	f_L and f_H Within 5725~5850MHz range
10		5732.071	5741.01	
20		5732.071	5741.009	
30		5732.07	5741.01	
40		5732.071	5741.009	
25	3.3	5732.072	5741.008	
25	4.2	5732.071	5741.01	

Note: the f_L and f_H determined by 99% Occupied bandwidth low edge at Low test channel and High edge at High test channel.

***** **END OF REPORT** *****