

Test Plot 1#:DTS 2.4G_5MHz_Back_0mm_Middle Channel_2017/05/04

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.983 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.373 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 8.152 V/m ; Power Drift = 0.06 dB
 Peak SAR (extrapolated) = 0.431 W/kg
SAR(1 g) = 0.232 W/kg ; SAR(10 g) = 0.135 W/kg
 Maximum value of SAR (measured) = 0.348 W/kg

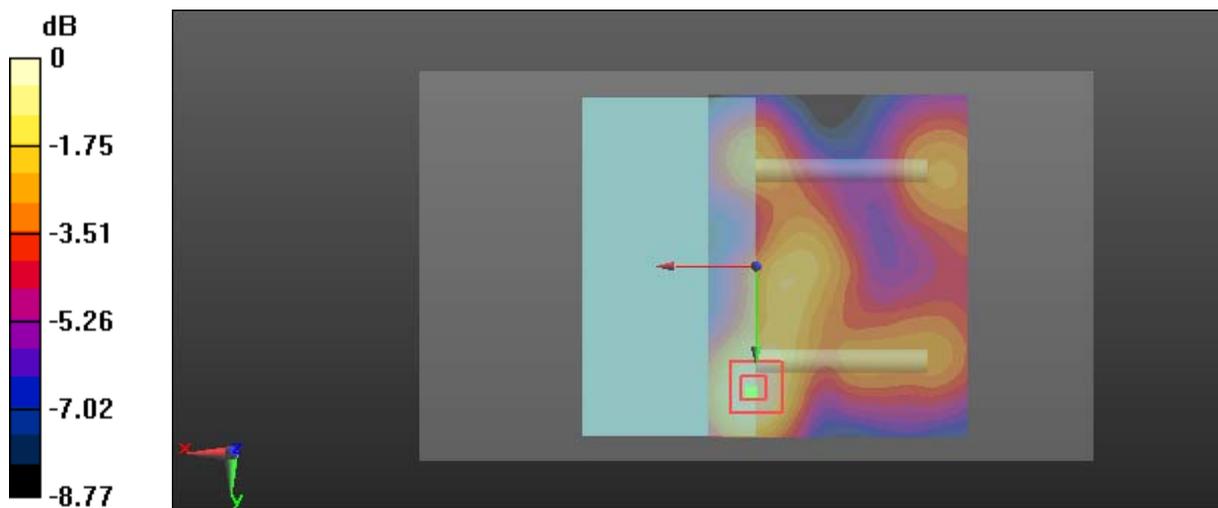

0 dB = 0.348 W/kg = -4.58 dBW/kg

Test Plot 2#:DTS 2.4G_5MHz_Back Antenna Fold_0mm_Middle Channel_2017/05/04**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 54.099$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.267 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.527 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.261 W/kg

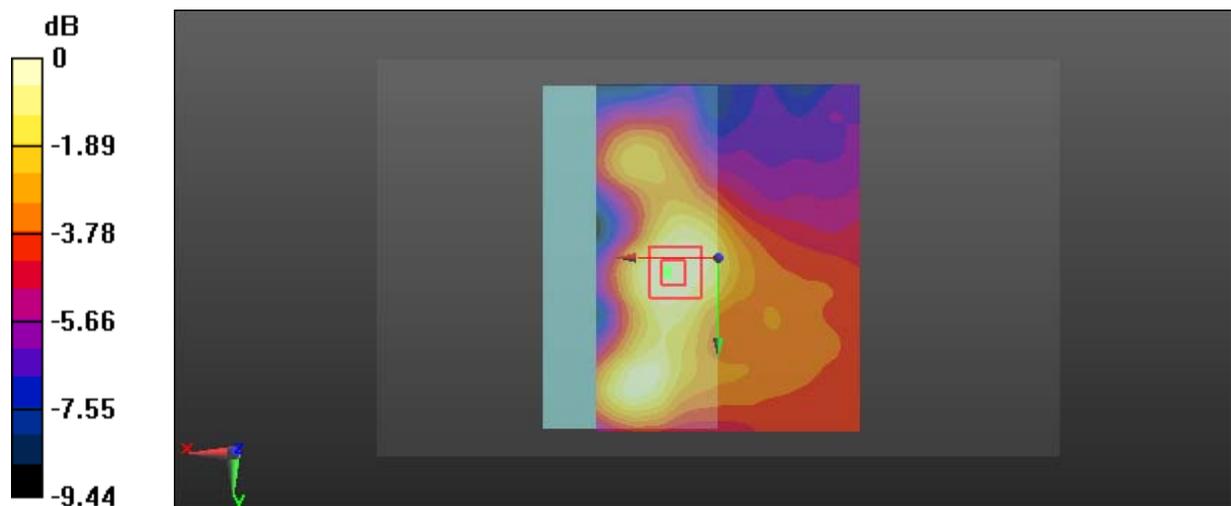

0 dB = 0.261 W/kg = -5.83 dBW/kg

Test Plot 3#:DTS 2.4G_5MHz_Front_0mm_Middle Channel_2017/05/04**DUT: C2; Type: GL100A; Serial: 17022600720**


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 54.099$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 9.95 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 3.482 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 11.0 W/kg
SAR(1 g) = 4.57 W/kg; SAR(10 g) = 1.78 W/kg
Maximum value of SAR (measured) = 8.14 W/kg

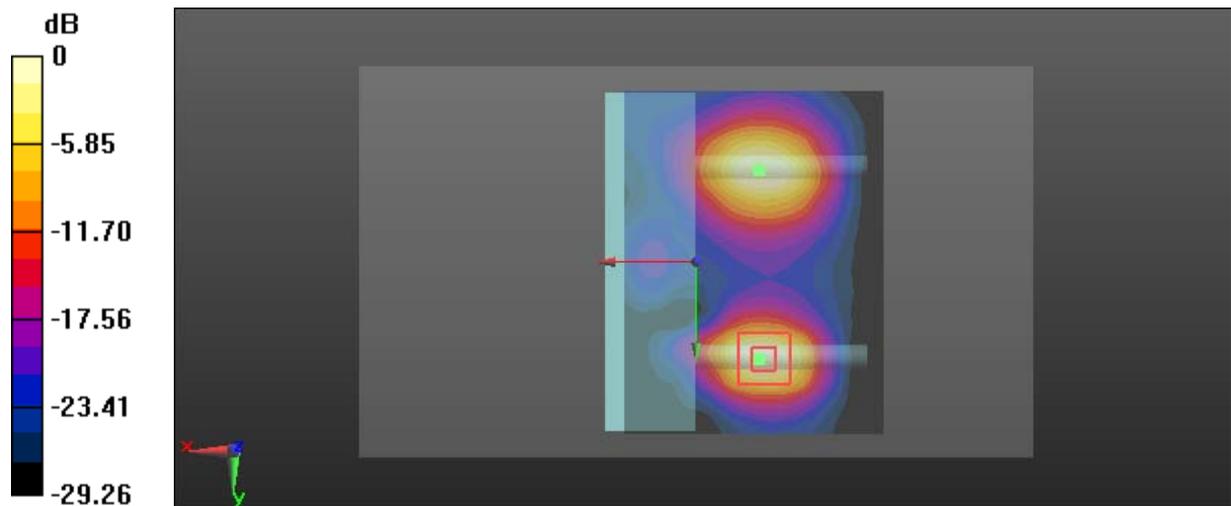

0 dB = 8.14 W/kg = 9.11 dBW/kg

Test Plot 4#:DTS 2.4G_5MHz_Top_0mm_Middle Channel_2017/05/04

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2437$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 54.099$; $\rho = 1000$ kg/m³
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.89 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 2.540 V/m; Power Drift = -0.08 dB
 Peak SAR (extrapolated) = 2.85 W/kg
SAR(1 g) = 1.33 W/kg; SAR(10 g) = 0.620 W/kg
 Maximum value of SAR (measured) = 2.20 W/kg

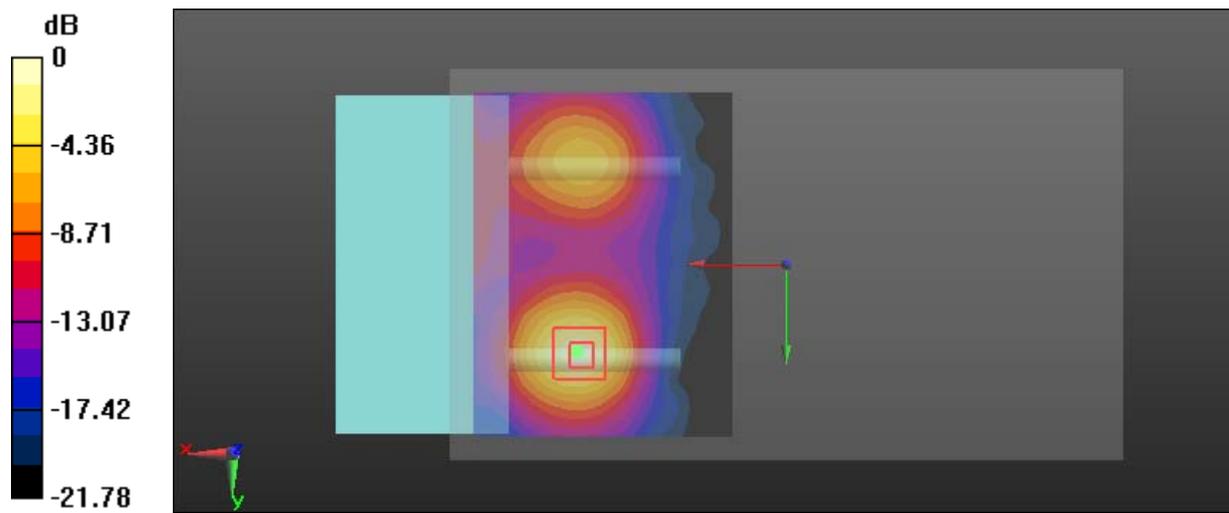

0 dB = 2.20 W/kg = 3.42 dBW/kg

Test Plot 5#:DTS 2.4G_5MHz_Back_10mm_Middle Channel_2017/05/26

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.951 \text{ S/m}$; $\epsilon_r = 52.112$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.213 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.023 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 0.281 W/kg
SAR(1 g) = 0.143 W/kg; SAR(10 g) = 0.083 W/kg
 Maximum value of SAR (interpolated) = 0.215 W/kg

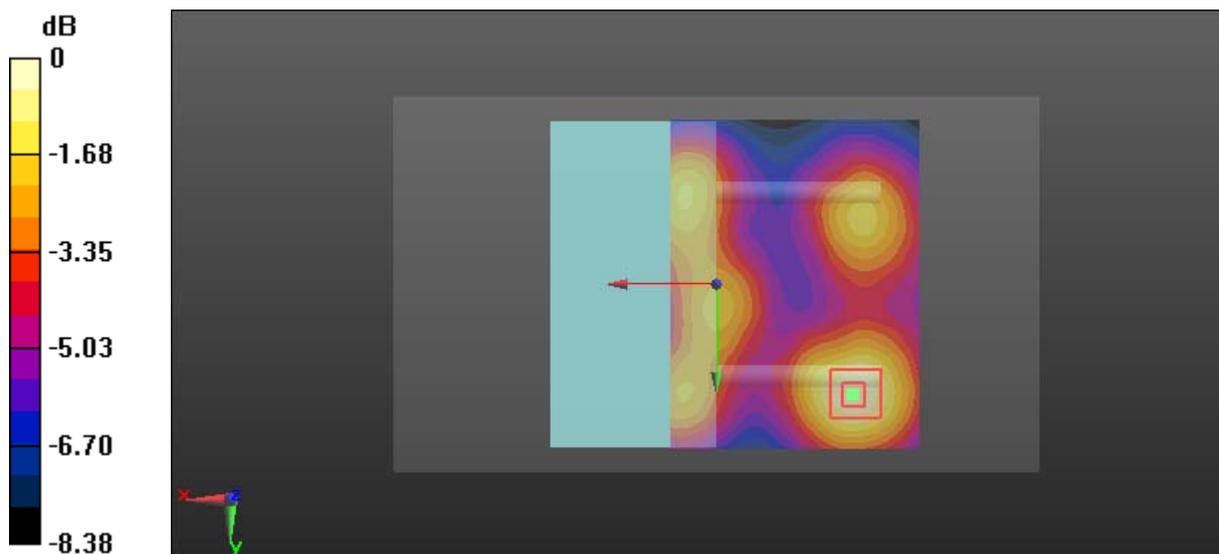

0 dB = 0.215 W/kg = -6.68 dBW/kg

Test Plot 6#:DTS 2.4G_5MHz_Back Antenna Fold_10mm_Middle Channel_2017/05/04

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.951 \text{ S/m}$; $\epsilon_r = 52.112$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.157 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 6.816 V/m; Power Drift = 0.18 dB
 Peak SAR (extrapolated) = 0.243 W/kg
SAR(1 g) = 0.117 W/kg; SAR(10 g) = 0.069 W/kg
 Maximum value of SAR (interpolated) = 0.163 W/kg

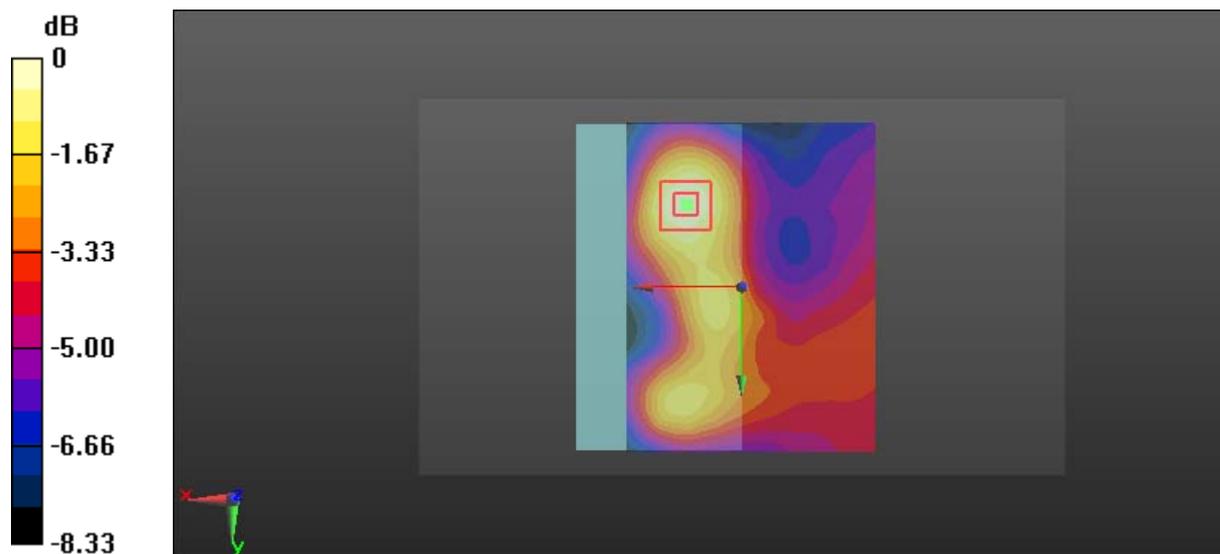

0 dB = 0.163 W/kg = -7.88 dBW/kg

Test Plot 7#:DTS 2.4G_5MHz_Front_10mm_Low Channel_2017/05/04**DUT: C2; Type: GL100A; Serial: 17022600720**


Communication System: DTS 2.4 GHz_5M; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 52.37$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.80 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 5.742 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 2.18 W/kg
SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.540 W/kg
Maximum value of SAR (measured) = 1.74 W/kg

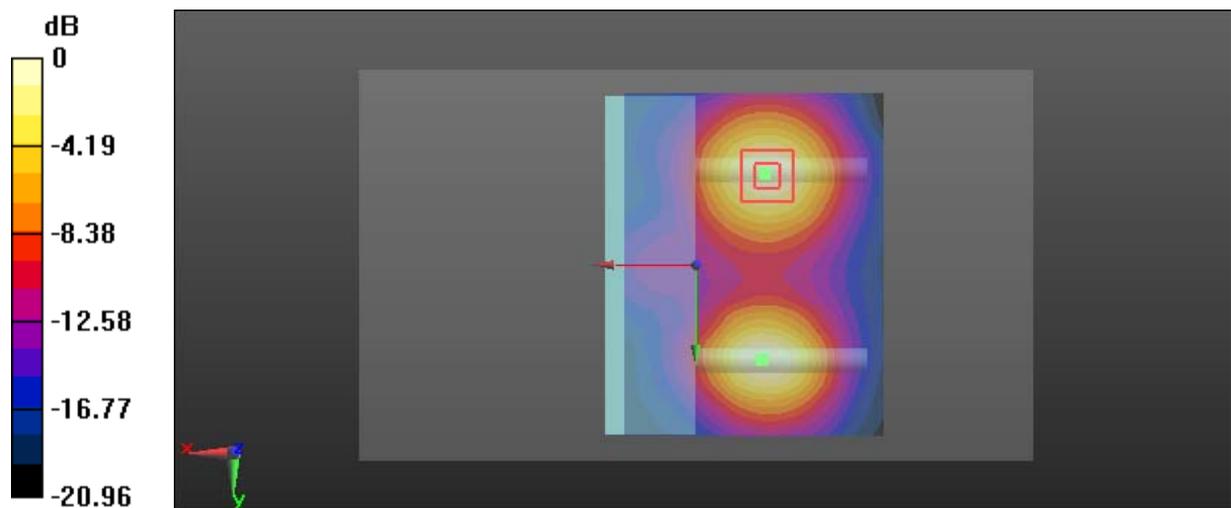

0 dB = 1.74 W/kg = 2.41 dBW/kg

Test Plot 8#:DTS 2.4G_5MHz_Front_10mm_Middle Channel_2017/05/04**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2437$ MHz; $\sigma = 1.983$ S/m; $\epsilon_r = 54.099$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.813 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.93 W/kg

SAR(1 g) = 0.967 W/kg; SAR(10 g) = 0.501 W/kg

Maximum value of SAR (measured) = 1.54 W/kg

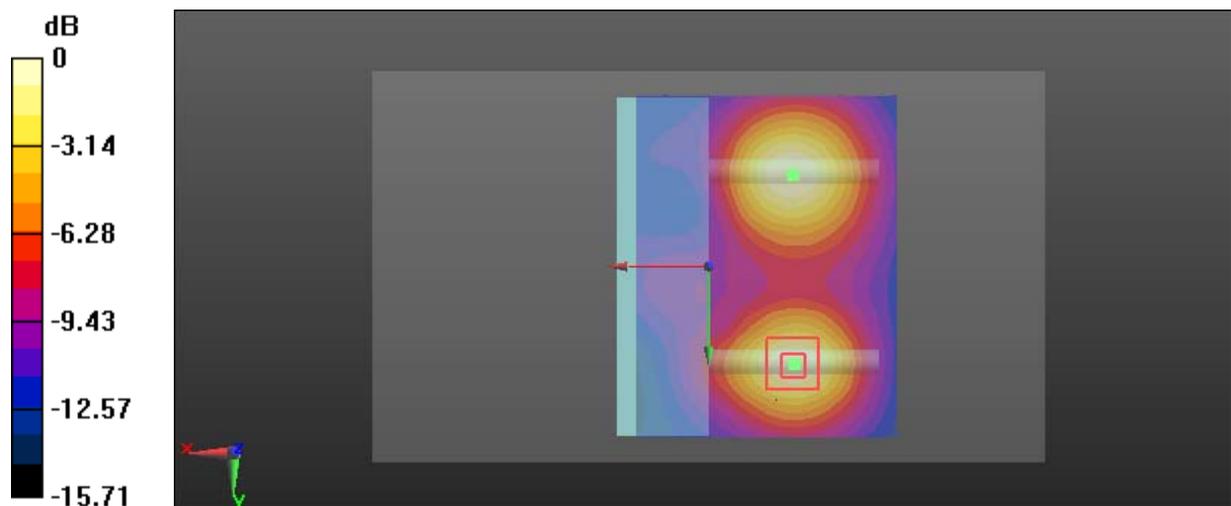

0 dB = 1.54 W/kg = 1.88 dBW/kg

Test Plot 9#:DTS 2.4G_5MHz_Front_10mm_High Channel_2017/05/04**DUT: C2; Type: GL100A; Serial: 17022600720**


Communication System: DTS 2.4 GHz_5M; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2462$ MHz; $\sigma = 1.937$ S/m; $\epsilon_r = 53.105$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: xxxx
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.58 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.959 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 1.95 W/kg
SAR(1 g) = 0.988 W/kg; SAR(10 g) = 0.528 W/kg
Maximum value of SAR (measured) = 1.56 W/kg

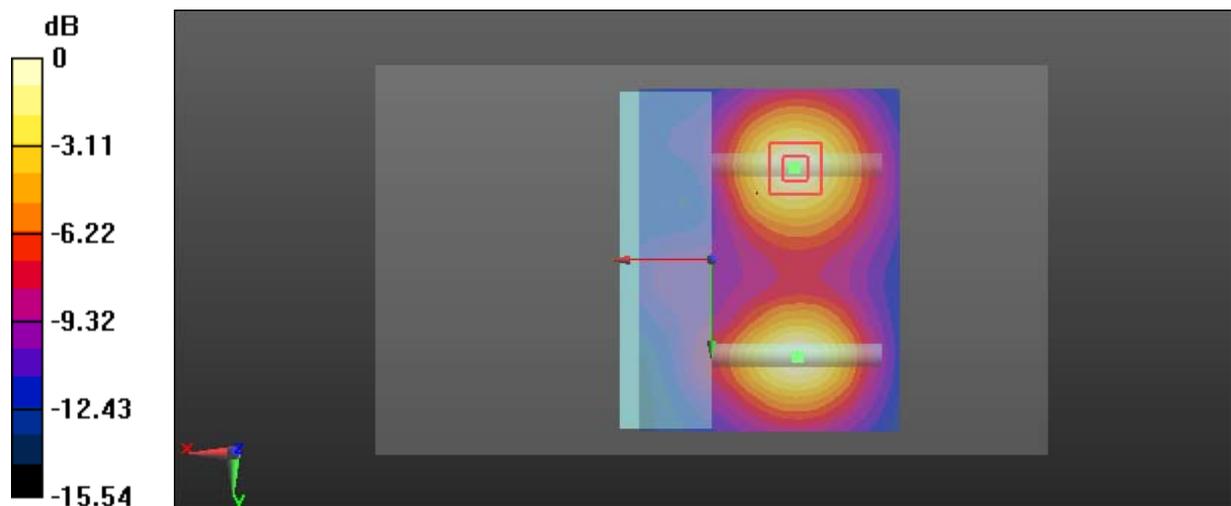

0 dB = 1.56 W/kg = 1.93 dBW/kg

Test Plot 10#:DTS 2.4G_5MHz_Top_10mm_Middle Channel_2017/05/04

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: DTS 2.4 GHz_5M; Frequency: 2437 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 2437 \text{ MHz}$; $\sigma = 1.983 \text{ S/m}$; $\epsilon_r = 54.099$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (91x121x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 2.483 V/m; Power Drift = -0.19 dB
 Peak SAR (extrapolated) = 1.28 W/kg
SAR(1 g) = 0.644 W/kg; SAR(10 g) = 0.343 W/kg
 Maximum value of SAR (measured) = 1.02 W/kg

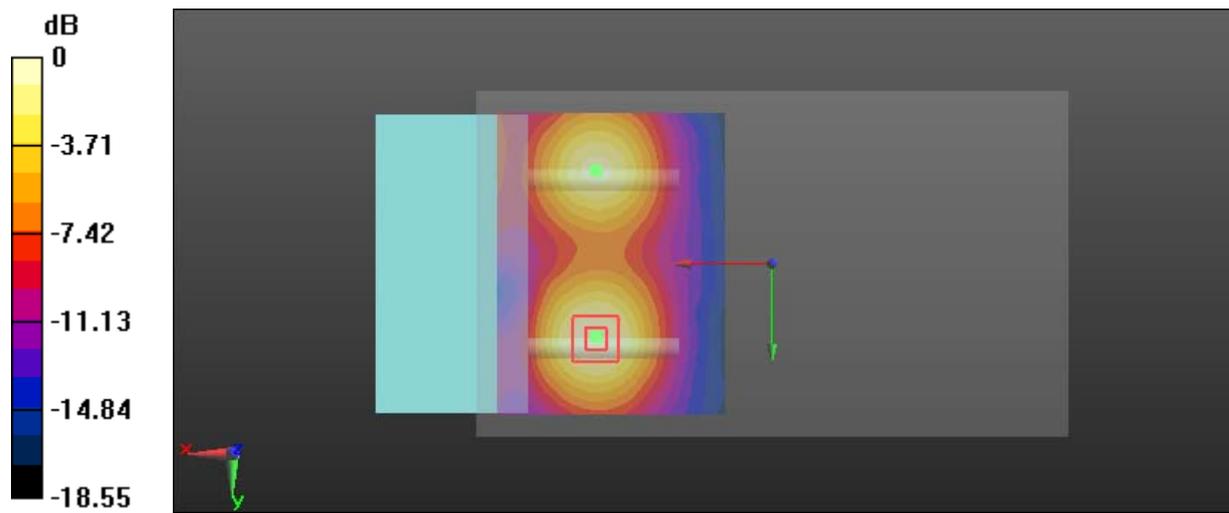

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Plot 11#:NII 5.8 GHz_5M_Back_0mm_Middle Channel_2017/05/02

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.114 \text{ S/m}$; $\epsilon_r = 48.537$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.11 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 5.184 V/m; Power Drift = -0.06 dB
 Peak SAR (extrapolated) = 3.32 W/kg
SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.505 W/kg
 Maximum value of SAR (measured) = 2.10 W/kg

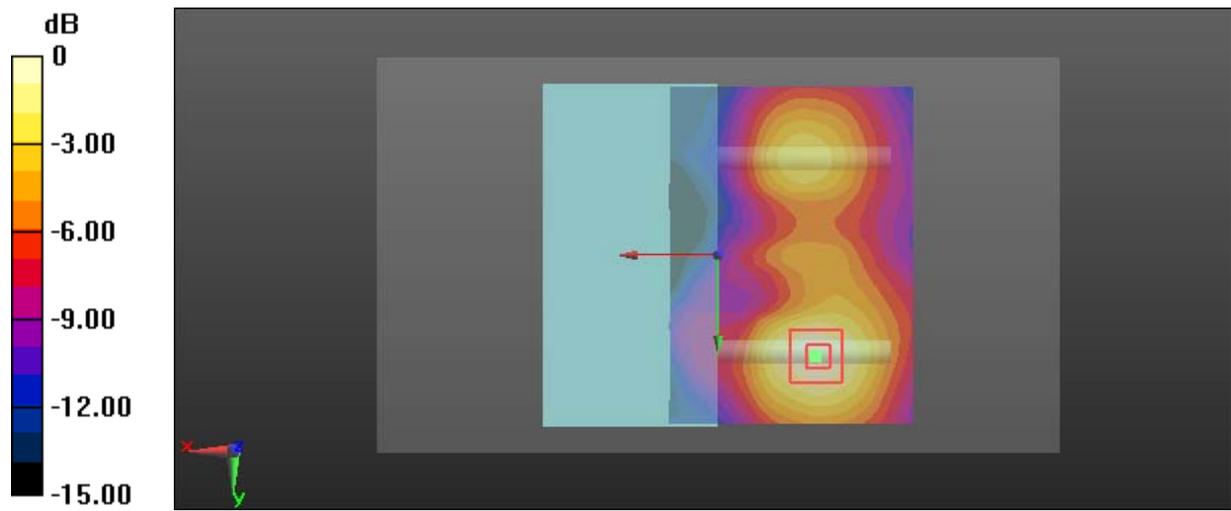

0 dB = 2.10 W/kg = 3.22 dBW/kg

Test Plot 12#:NII 5.8 GHz_5M_Back Antenna Fold_0mm_Middle Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 48.537$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.310 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.949 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.530 W/kg

SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.308 W/kg

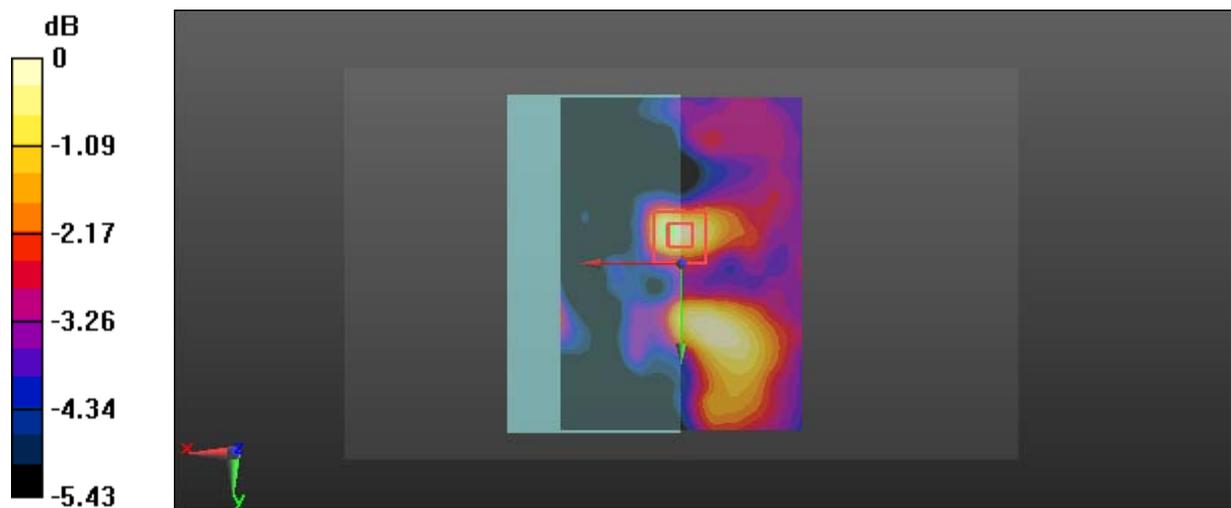

0 dB = 0.308 W/kg = -5.11 dBW/kg

Test Plot 13#:NII 5.8 GHz_5M_Front_0mm_Low Channel_2017/05/02

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: NII 5.8 GHz_5M; Frequency: 5745 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.108 \text{ S/m}$; $\epsilon_r = 48.669$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 23.9 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 2.908 V/m; Power Drift = 0.12 dB
 Peak SAR (extrapolated) = 38.2 W/kg
SAR(1 g) = 9.12 W/kg; SAR(10 g) = 2.53 W/kg
 Maximum value of SAR (measured) = 23.2 W/kg

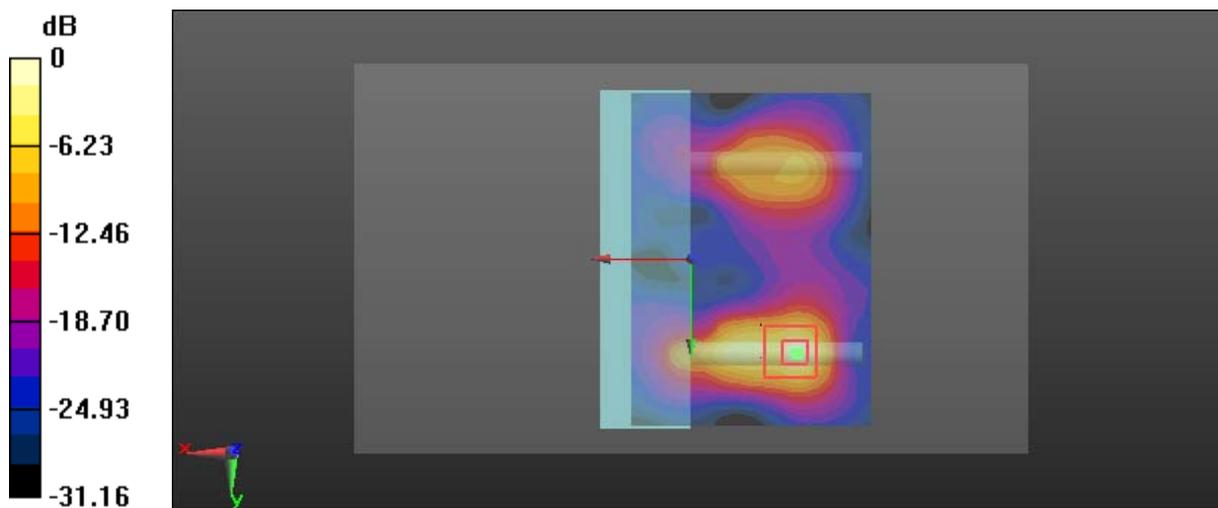

0 dB = 23.2 W/kg = 13.65 dBW/kg

Test Plot 14#:NII 5.8 GHz_5M_Front_0mm_Middle Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 48.537$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 22.4 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.352 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 36.1 W/kg

SAR(1 g) = 8.85 W/kg; SAR(10 g) = 2.49 W/kg

Maximum value of SAR (measured) = 22.3 W/kg

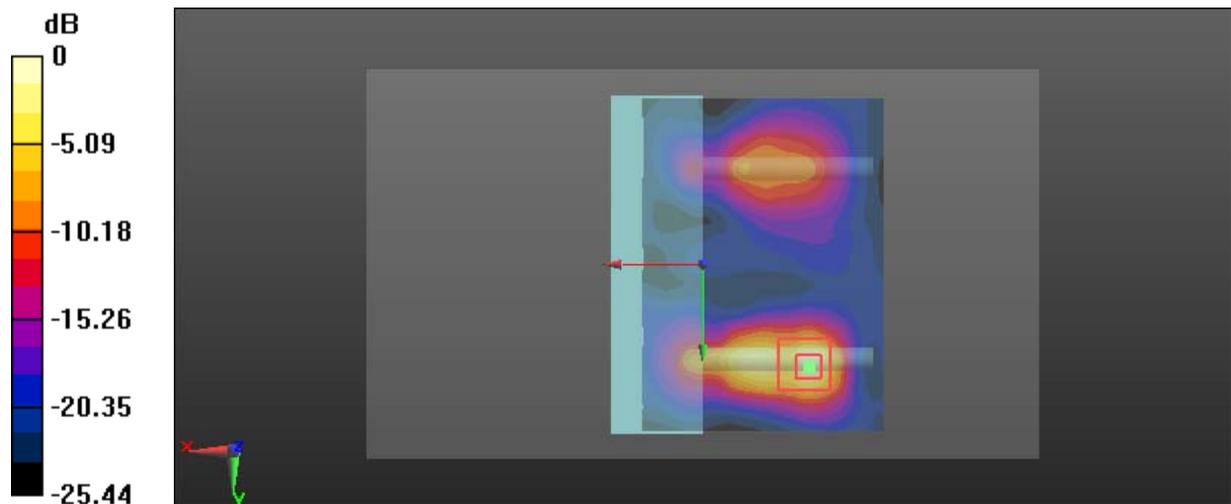

0 dB = 22.3 W/kg = 13.48 dBW/kg

Test Plot 15#:NII 5.8 GHz_5M_Front_0mm_High Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5825 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.228$ S/m; $\epsilon_r = 48.391$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 22.9 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.172 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 37.8 W/kg

SAR(1 g) = 9.14 W/kg; SAR(10 g) = 2.57 W/kg

Maximum value of SAR (measured) = 23.1 W/kg

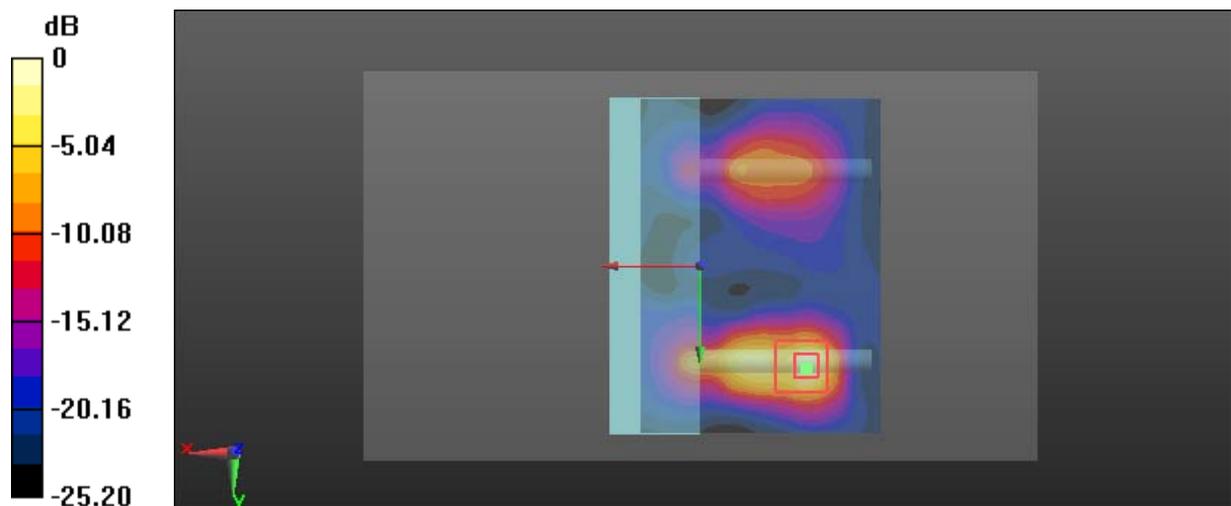

0 dB = 23.1 W/kg = 13.64 dBW/kg

Test Plot 16#:NII 5.8 GHz_5M_Top_0mm_Middle Channel_2017/05/02

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 6.114 \text{ S/m}$; $\epsilon_r = 48.537$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 7.89 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 4.098 V/m; Power Drift = -0.11 dB
 Peak SAR (extrapolated) = 13.7 W/kg
SAR(1 g) = 3.29 W/kg; SAR(10 g) = 1.04 W/kg
 Maximum value of SAR (measured) = 8.02 W/kg

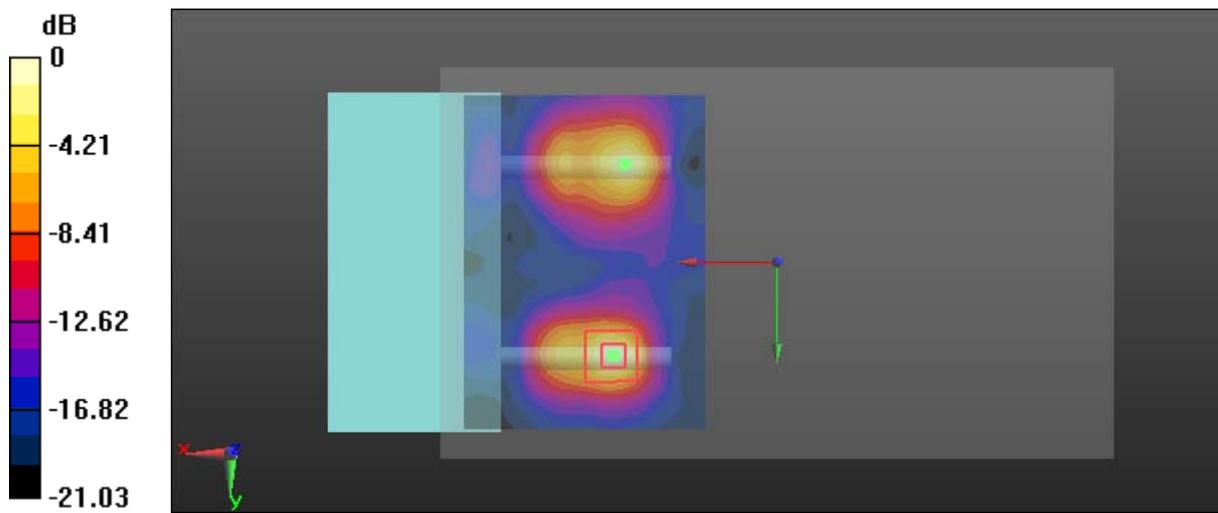

0 dB = 8.02 W/kg = 9.04 dBW/kg

Test Plot 17#:NII 5.8 GHz_5M_Back_10mm_Middle Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 48.537$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.37 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.590 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.295 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

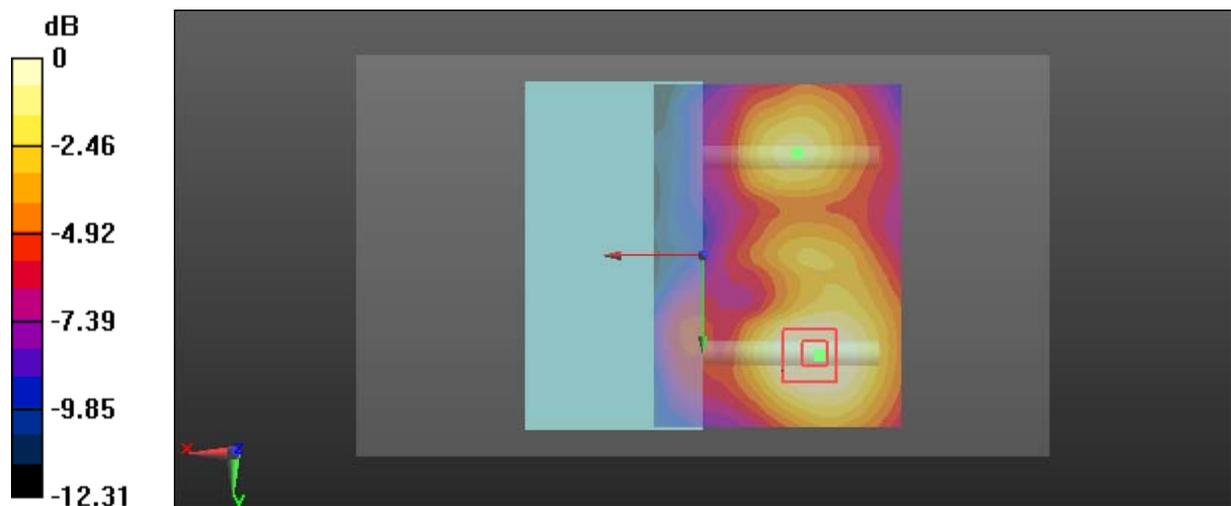

0 dB = 1.17 W/kg = 0.68 dBW/kg

Test Plot 18#:NII 5.8 GHz_5M_Back Antenna Fold_10mm_Middle Channel_2017/05/25**DUT: C2; Type: GL100A; Serial: 17022600720**


Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5785$ MHz; $\sigma = 5.991$ S/m; $\epsilon_r = 47.412$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.229 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
Reference Value = 4.823 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 0.310 W/kg
SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.048 W/kg
Maximum value of SAR (interpolated) = 0.235 W/kg

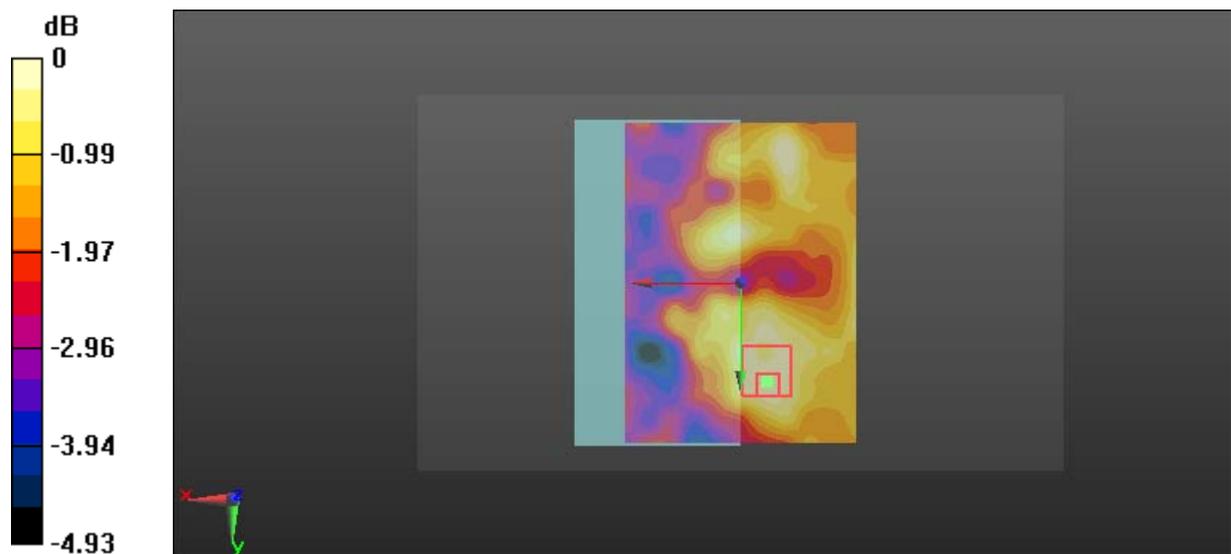

0 dB = 0.235 W/kg = -6.29 dBW/kg

Test Plot 19#:NII 5.8 GHz_5M_Front_10mm_Low Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 6.108$ S/m; $\epsilon_r = 48.669$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.10 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.893 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 4.42 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.567 W/kg

Maximum value of SAR (measured) = 2.77 W/kg

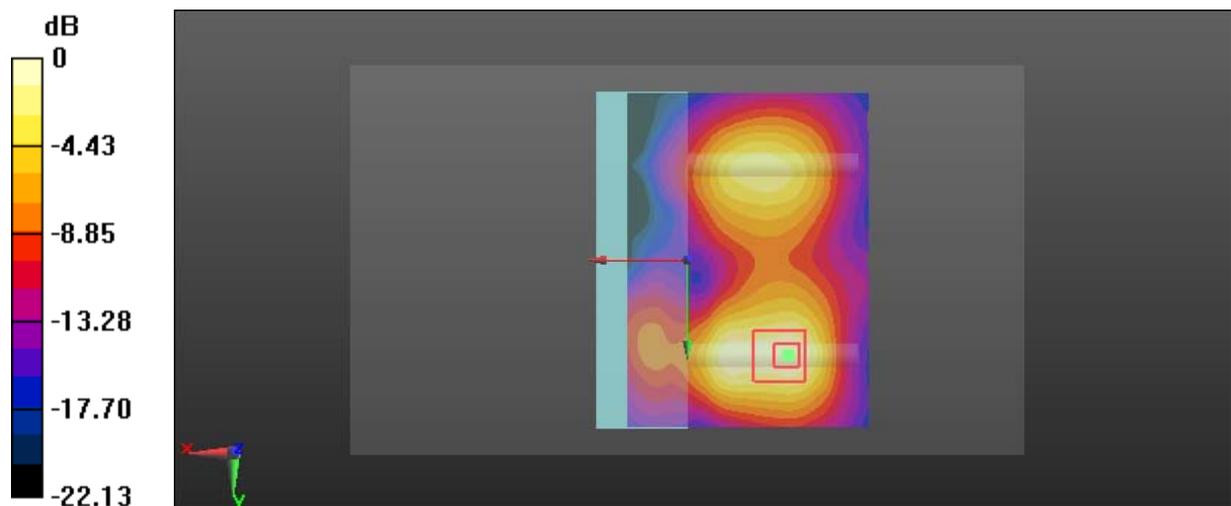

0 dB = 2.77 W/kg = 4.42 dBW/kg

Test Plot 20#:NII 5.8 GHz_5M_Front_10mm_Middle Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 48.537$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.66 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.153 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 4.24 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.587 W/kg

Maximum value of SAR (measured) = 2.60 W/kg

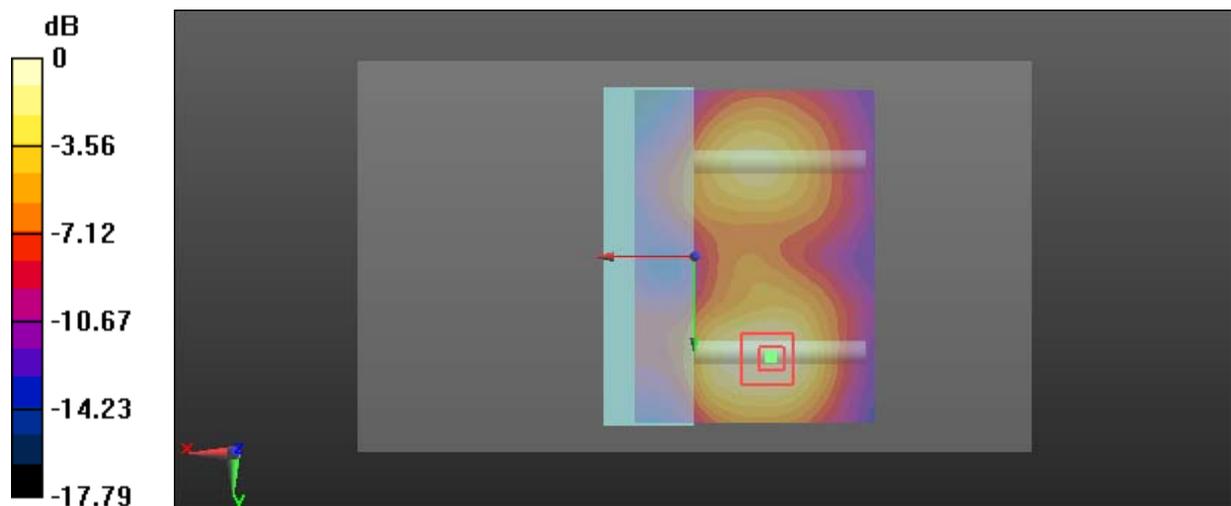

0 dB = 2.60 W/kg = 4.15 dBW/kg

Test Plot 21#:NII 5.8 GHz_5M_Front_10mm_High Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**

Communication System: NII 5.8 GHz_5M; Frequency: 5825 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 6.228$ S/m; $\epsilon_r = 48.391$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.56 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.769 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.28 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.578 W/kg

Maximum value of SAR (measured) = 2.62 W/kg

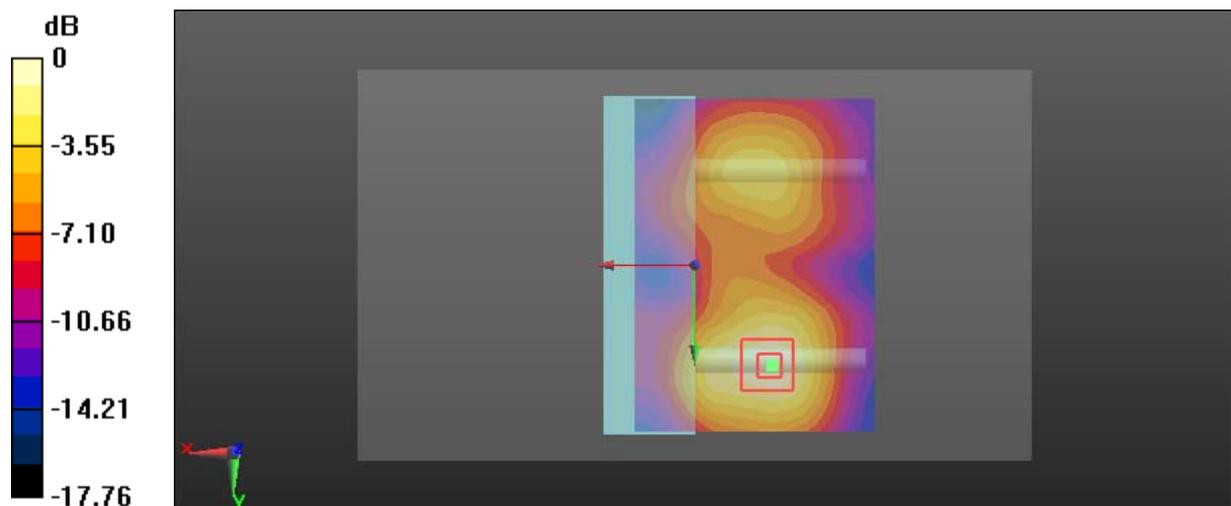

0 dB = 2.62 W/kg = 4.18 dBW/kg

Test Plot 22#:NII 5.8 GHz_5M_Top_10mm_Low Channel_2017/05/02

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: NII 5.8 GHz_5M; Frequency: 5745 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 6.108 \text{ S/m}$; $\epsilon_r = 48.669$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.25 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.718 V/m; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 3.78 W/kg
SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.527 W/kg
 Maximum value of SAR (measured) = 2.29 W/kg

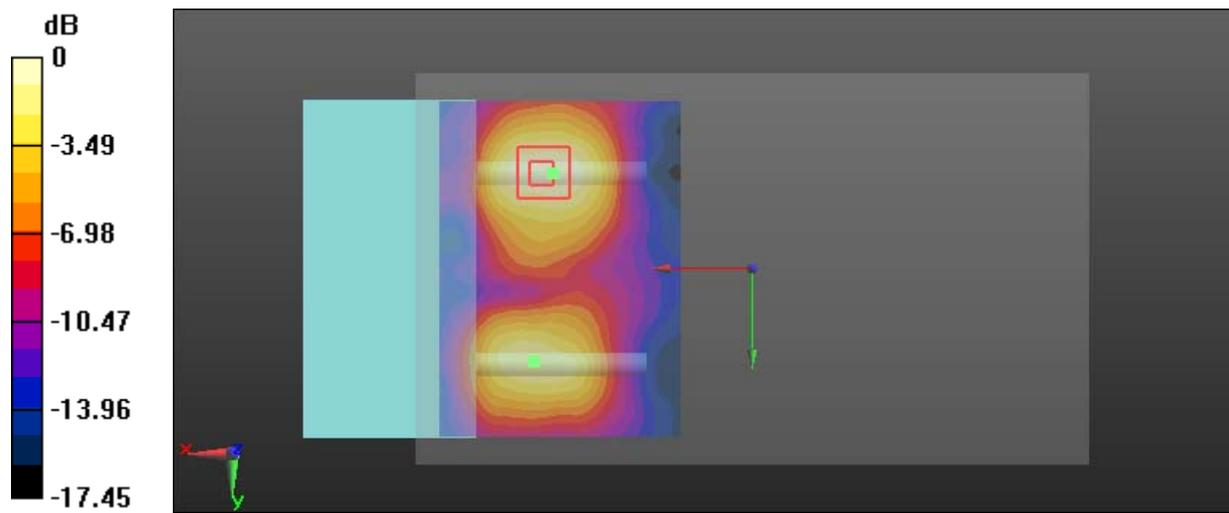

0 dB = 2.29 W/kg = 3.60 dBW/kg

Test Plot 23#:NII 5.8 GHz_5M_Top_10mm_Middle Channel_2017/05/02**DUT: C2; Type: GL100A; Serial: 17022600720**


Communication System: NII 5.8 GHz_5M; Frequency: 5785 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5785$ MHz; $\sigma = 6.114$ S/m; $\epsilon_r = 48.537$; $\rho = 1000$ kg/m³
Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.42 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm
Reference Value = 3.716 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 4.02 W/kg
SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.516 W/kg
Maximum value of SAR (measured) = 2.40 W/kg

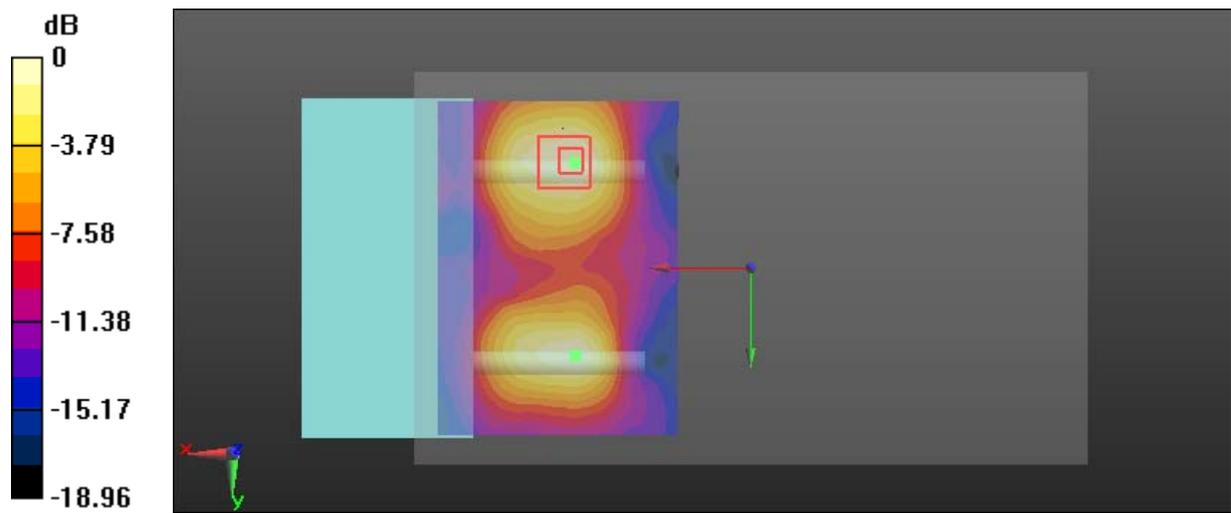

0 dB = 2.40 W/kg = 3.80 dBW/kg

Test Plot 24#:NII 5.8 GHz_5M_Top_10mm_High Channel_2017/05/02

DUT: C2; Type: GL100A; Serial: 17022600720


Communication System: NII 5.8 GHz_5M; Frequency: 5825 MHz;Duty Cycle: 1:1
 Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 6.228 \text{ S/m}$; $\epsilon_r = 48.391$; $\rho = 1000 \text{ kg/m}^3$
 Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (101x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$
 Maximum value of SAR (interpolated) = 2.57 W/kg

Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$
 Reference Value = 3.383 V/m; Power Drift = -0.12 dB
 Peak SAR (extrapolated) = 4.03 W/kg
SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.452 W/kg
 Maximum value of SAR (measured) = 2.01 W/kg

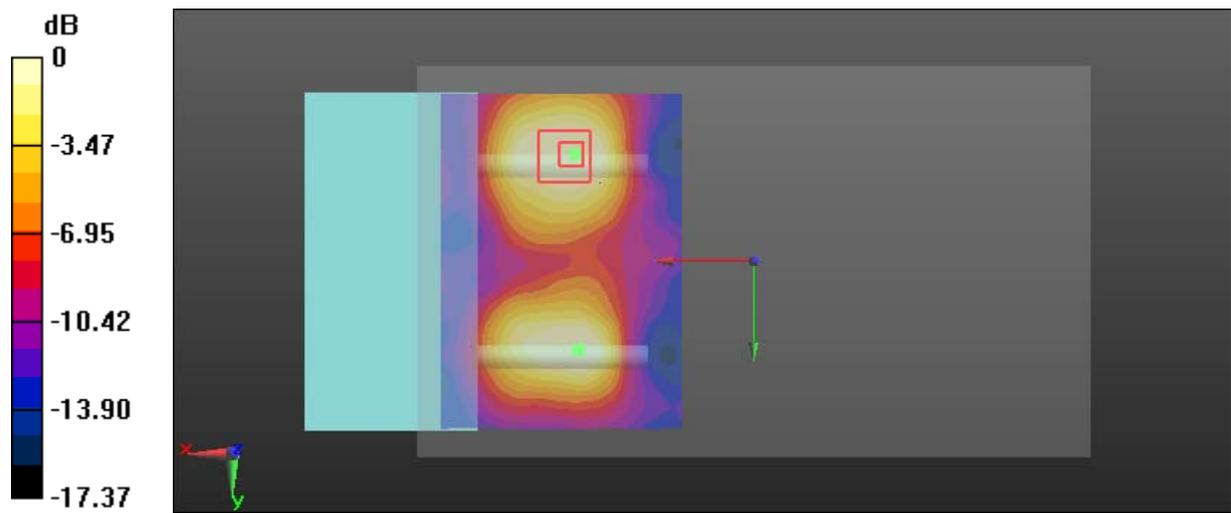

0 dB = 2.01 W/kg = 3.03 dBW/kg