



## FCC PART 15.407

## TEST REPORT

For

### SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,  
Nanshan, Shenzhen, Guangdong, China

**FCC ID: SS3-GL6D10A1609**

<b>Report Type:</b> Original Report	<b>Product Type:</b> C1
<b>Report Number:</b>	RDG160813008-00B
<b>Report Date:</b>	2016-09-24
<b>Reviewed By:</b>	Allen Qiao RF Engineer <i>Allen Qiao</i>
<b>Approved By:</b>	Sula Huang RF Leader <i>Sula Huang</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp.(Dongguan). This report may contain data or test methods that are not covered by the NVLAP accreditation scope and shall be marked with an asterisk "\*" and noted.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION.....</b>	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE .....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY .....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
EQUIPMENT MODIFICATIONS .....	8
SUPPORT EQUIPMENT LIST AND DETAILS .....	8
EXTERNAL CABLE.....	8
BLOCK DIAGRAM OF TEST SETUP .....	9
<b>SUMMARY OF TEST RESULTS .....</b>	<b>11</b>
<b>FCC §15.407 (f) &amp; §1.1310 &amp; §2.1093- RF EXPOSURE .....</b>	<b>12</b>
APPLICABLE STANDARD .....	12
TEST RESULT .....	12
<b>FCC §15.203 – ANTENNA REQUIREMENT .....</b>	<b>13</b>
APPLICABLE STANDARD .....	13
ANTENNA CONNECTOR CONSTRUCTION .....	13
<b>§15.207 (a) – CONDUCTED EMISSIONS.....</b>	<b>14</b>
APPLICABLE STANDARD .....	14
MEASUREMENT UNCERTAINTY.....	14
EUT SETUP.....	14
EMI TEST RECEIVER SETUP.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST PROCEDURE .....	16
TEST DATA .....	16
<b>FCC §15.209, §15.205 &amp; §15.407(b) (1) (6) (7) –UNWANTED EMISSION.....</b>	<b>19</b>
APPLICABLE STANDARD .....	19
MEASUREMENT UNCERTAINTY .....	20
EUT SETUP .....	20
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....	21
TEST PROCEDURE .....	21
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST DATA .....	23
<b>FCC §15.407(a) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH .....</b>	<b>32</b>
APPLICABLE STANDARD .....	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE .....	32
TEST DATA .....	32
<b>FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....</b>	<b>40</b>
APPLICABLE STANDARD .....	40

TEST EQUIPMENT LIST AND DETAILS.....	41
TEST PROCEDURE .....	41
TEST DATA .....	41
<b>FCC §15.407(a) - POWER SPECTRAL DENSITY .....</b>	<b>43</b>
APPLICABLE STANDARD .....	43
TEST PROCEDURE .....	44
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST DATA .....	44

FEMVAL

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *SZ DJI TECHNOLOGY CO., LTD*'s product, model number: *GL6D10A* (FCC ID: *SS3-GL6D10A1609*) (the "EUT") in this report was a *CI*, which was measured approximately: 16 cm (L) x 16.5 cm (W) x 8.3 cm (H), rated input voltage: DC 7.4V from lithium battery, or DC 26.1V from adapter.

#### Adapter Information:

MODEL: *IN2C180*

INPUT: *100-240V~2.5A, 50-60Hz*

OUTPUT: *26.1V, 6.9A (Total)*

*\* All measurement and test data in this report was gathered from production sample serial number: 160813008 (Assigned by BACL Dongguan). The EUT was received on 2016-08-13.*

### Objective

This type approval report is prepared on behalf of *SZ DJI TECHNOLOGY CO., LTD* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

### Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS submissions with FCC ID: *SS3-GL6D10A1609*.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

For 5.8GHz band, the device employed LB mode, 10MHz Wideband mode, and 802.11a/n ht20 modes

For LB mode, 42 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5727	22	5775.3
2	5729.3	23	5777.6
...	...	...	...
...	...	...	...
...	...	41	5819
21	5773	42	5821.3

For 10MHz Wideband mode, 5 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5745	4	5805
2	5765	5	5825
3	5785	/	/

For 802.11a, and 802.11n20 modes, 5 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785	/	/

### EUT Exercise Software

The software “DJI-RF Certification” was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

For 802.11a/n mode and 10MHz mode, the maximum power was as below setting, the power setting was provided by the manufacturer:

Antenna 0&1				
Test Mode	Test Software Version	DJI-RF Certification		
		Test Frequency(MHz)	5745	5785
802.11a	Data Rate	6Mbps	6Mbps	6Mbps
	Power Level Setting	19	19	19
HT20	Data Rate	MCS0	MCS0	MCS0
	Power Level Setting	19	19	19
10MHz	Power Level Setting	19	19	19

For LB mode, the maximum power was configured by system default setting. The default setting level as below:

Antenna 0					
Test Software Version	DJI-RF Certification				
Frequency (MHz)	5727	5729.3	5731.6~5816.7	5819	5821.3
Power Level Setting	23	25	26	25	23


All test items performed at Low, Middle and High Channel, and for difference power level setting configured by software(LB mode),output power, radiation bandedge test with additional channels according to the power setting and power test results.

The software configured maximum duty cycle as below:

Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle (%)
LB	3.08	14.1	21.84
10MHz	3.10	3.14	98.73
802.11a	1.74	1.80	96.67
802.11n ht20	1.58	1.60	98.75


The minimum transmission duration(T) is 3.08ms in LB mode, 3.10ms in 10MHz mode, 1.74ms in 802.11a mode, and 1.58ms in 802.11n mode.

**LB mode**

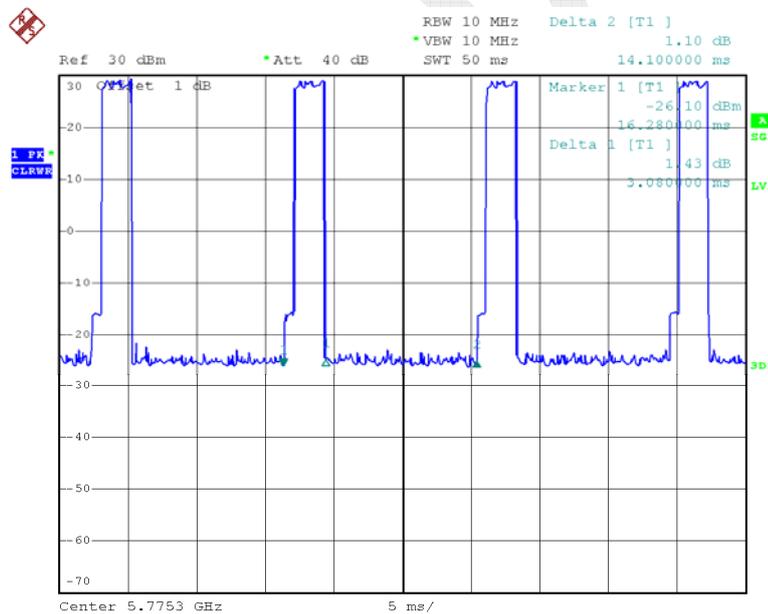


Date: 22.SEP.2016 14:34:08

### 10MHz Mode

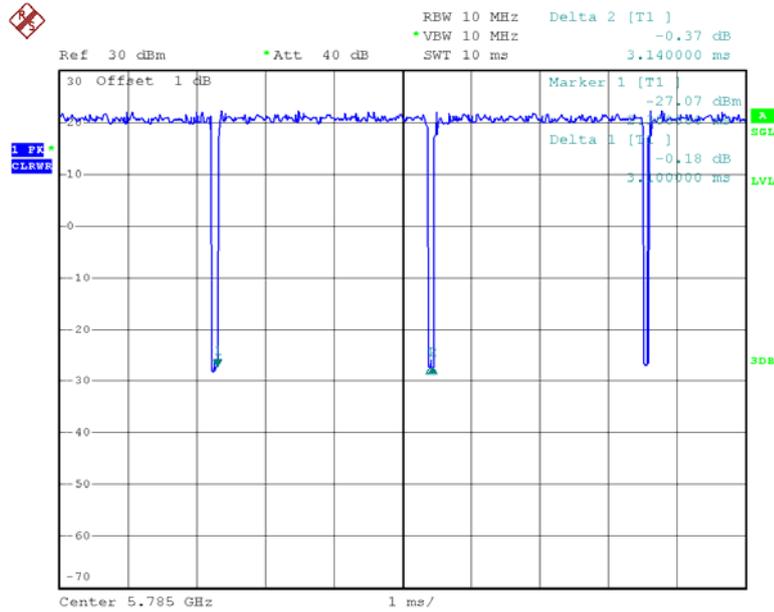


Date: 22.SEP.2016 14:24:39

### 802.11a mode

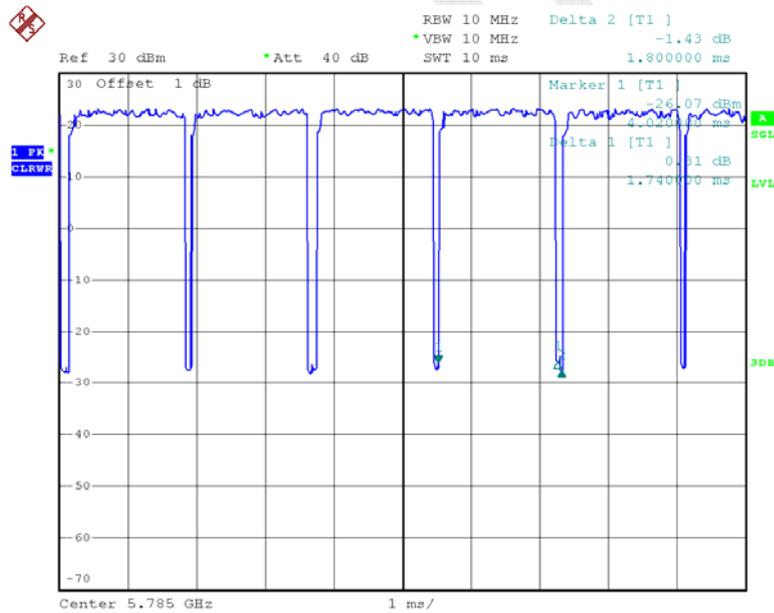

Date: 27.SEP.2016 15:49:28

**802.11n20 mode**

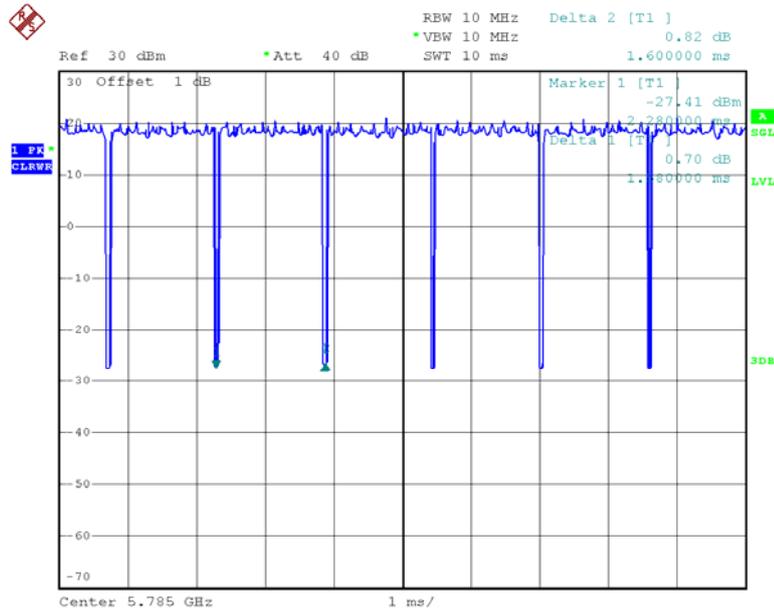

Date: 22.SEP.2016 14:28:07

**Equipment Modifications**

No modification was made to the EUT.

**Support Equipment List and Details**


Manufacturer	Description	Model	Serial Number
DJI	INSPIRE 2 CHARGER HUB	IN2CH	/

**External Cable**


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC cable	Yes	Yes	1	Adapter	Battery & Remote

### Block Diagram of Test Setup


AC Line Conducted Test:

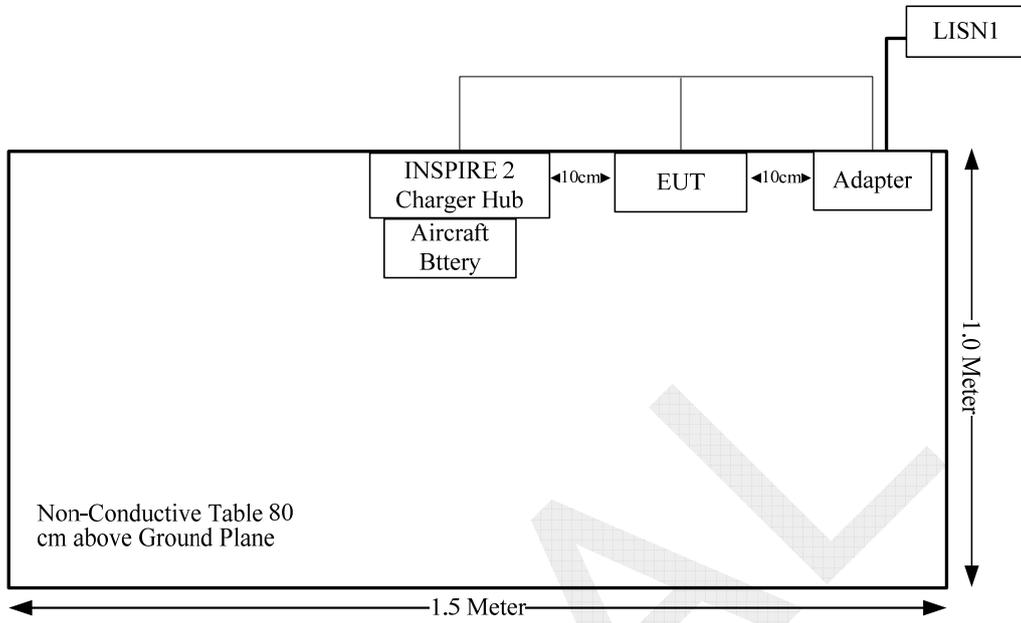

Radiation test below 1GHz:

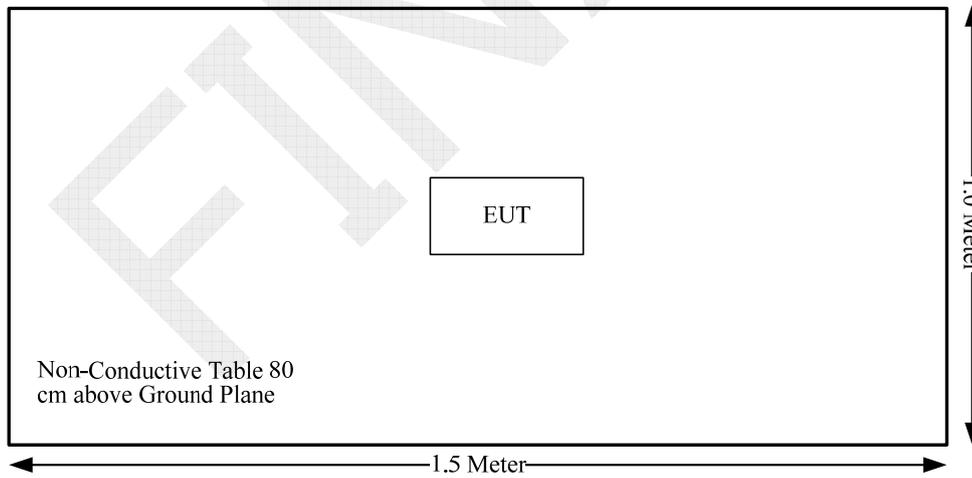

Radiation test above 1GHz:

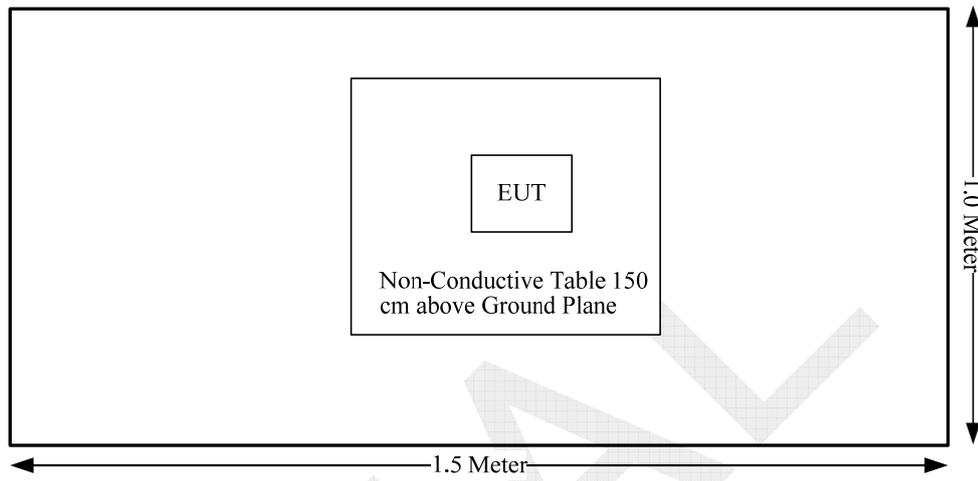

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 & §15.407(b) (1),(6),(7)	Undesirable Emission& Restricted Bands	Compliance
§15.407(b) (1),(2),(3),(4)	Out Of Band Emissions	Compliance
§15.407(a)	6 dB Bandwidth	Compliance
§15.407(a)(1),	Conducted Transmitter Output Power	Compliance
§15.407 (a)(1),(5)	Power Spectral Density	Compliance

---

## **FCC §15.407 (f) & §1.1310 & §2.1093- RF EXPOSURE**

---

### **Applicable Standard**

According to subpart 15.407(f), §1.1310 and §2.1093.

### **Test Result**

Compliant, please refer to the SAR report: RDG160813008-20A.

FEMVAL

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT has 2 internal antennas arrangement for 802.11b/g/n and 10MHz mode, and the antennas gain are [4.0dBi@2.4GHz](#), 5.0 dBi@5GHz, 2 un-detachable external antenna for LB, one for Transmitting, one for receiving, the antenna gain is 2.8dBi@ 2.4GHz band, 4.21 dBi @ 5.8GHz band, that fulfill the requirement of the item. Please refer to the internal photos.

**Result:** Compliance.

**§15.207 (a) – CONDUCTED EMISSIONS**

**Applicable Standard**

FCC §15.207(a)

**Measurement Uncertainty**

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:


- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.

Based on CISPR 16-4-2: 2011, measurement uncertainty of conducted disturbance at mains port using AMN at Bay Area Compliance Laboratories Corp. (Dongguan) is 3.12 dB (150 kHz to 30 MHz).

Table 1 – Values of  $U_{cispr}$

Measurement	$U_{cispr}$
Conducted disturbance at mains port using AMN (150 kHz to 30 MHz)	3.4 dB

**EUT Setup**

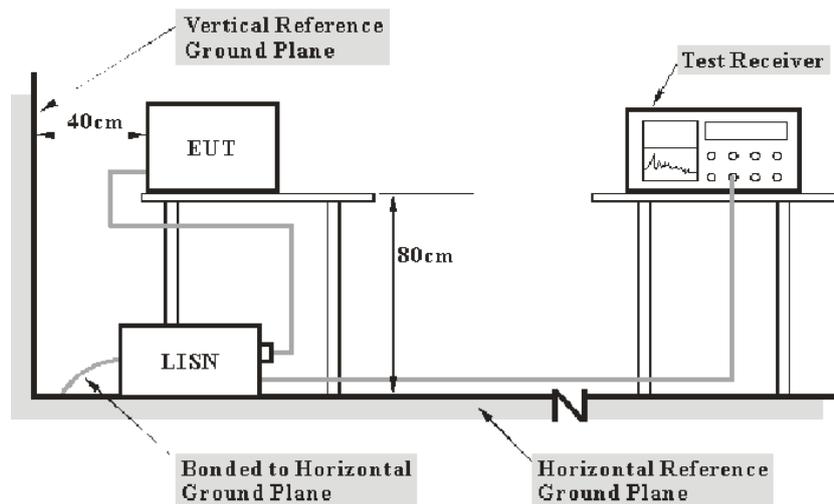

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

$V_C$  (cord. Reading): corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN

$C_f$ : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCS 30	830245/006	2015-12-10	2016-12-09
R&S	L.I.S.N	ESH2-Z5	892107/021	2016-09-01	2017-08-31
R&S	Two-line V-network	ENV 216	3560.6550.12	2015-11-26	2016-11-25
N/A	Coaxial Cable	1.8m	N/A	2016-09-01	2017-09-01
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

During the conducted emission test, the adapter was connected to the first LISN and the other support equipments were connected to the outlet of the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Data

### Environmental Conditions

<b>Temperature:</b>	29.6 °C
<b>Relative Humidity:</b>	49%
<b>ATM Pressure:</b>	100 kPa


*The testing was performed by David Huang on 2016-09-22.*

*Test Mode: Transmitting,*

*Test Result: Compliance, please refer to the below data and plots.*

Test Mode: Charging


AC120V, 60Hz, Line:

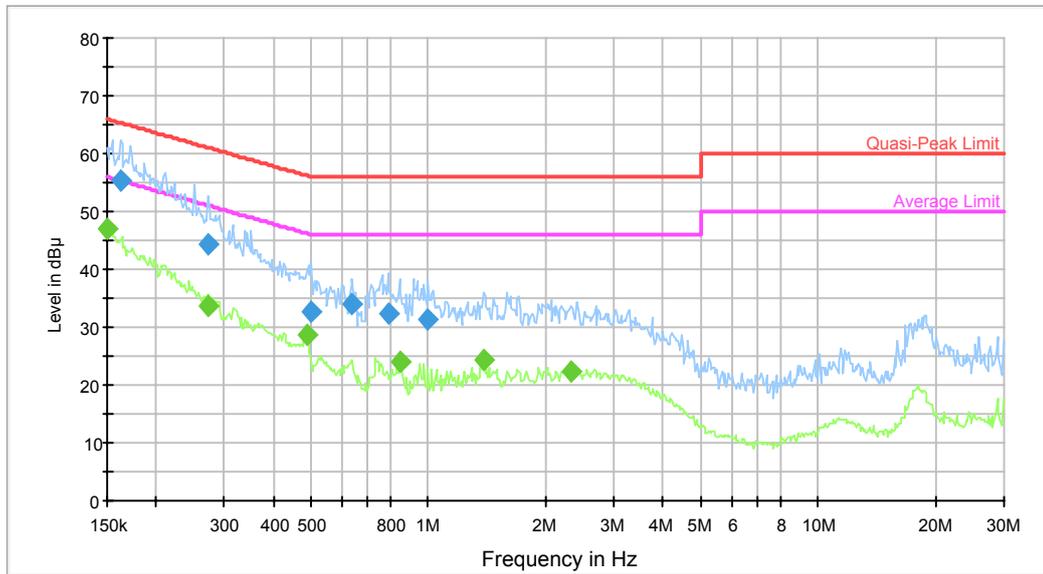

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)	Comment
0.162441	55.5	9.000	L1	9.7	9.8	65.3	Compliance
0.272666	44.5	9.000	L1	9.6	16.5	61.0	Compliance
0.499611	32.6	9.000	L1	9.7	23.4	56.0	Compliance
0.639600	34.1	9.000	L1	9.7	21.9	56.0	Compliance
0.786832	32.3	9.000	L1	9.7	23.7	56.0	Compliance
0.999305	31.2	9.000	L1	9.7	24.8	56.0	Compliance

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)	Comment
0.150000	47.1	9.000	L1	9.7	8.9	56.0	Compliance
0.272666	33.8	9.000	L1	9.6	17.2	51.0	Compliance
0.487810	28.7	9.000	L1	9.7	17.5	46.2	Compliance
0.852094	24.1	9.000	L1	9.7	21.9	46.0	Compliance
1.385415	24.3	9.000	L1	9.7	21.7	46.0	Compliance
2.325491	22.4	9.000	L1	9.7	23.6	46.0	Compliance

**AC120V, 60Hz, Neutral:**

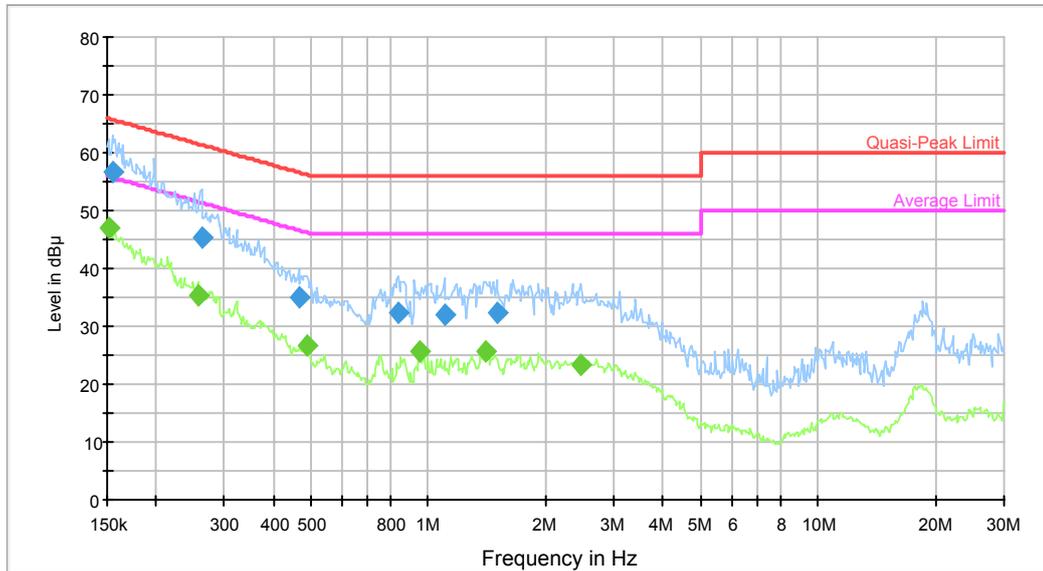

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.154858	56.8	9.000	N	9.6	8.9	65.7	Compliance
0.262017	45.3	9.000	N	9.6	16.1	61.4	Compliance
0.465037	35.0	9.000	N	9.6	21.6	56.6	Compliance
0.838622	32.4	9.000	N	9.6	23.6	56.0	Compliance
1.099574	31.9	9.000	N	9.7	24.1	56.0	Compliance
1.500325	32.2	9.000	N	9.7	23.8	56.0	Compliance

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)	Comment
0.151200	47.0	9.000	N	9.6	8.9	55.9	Compliance
0.255827	35.5	9.000	N	9.6	16.1	51.6	Compliance
0.487810	26.8	9.000	N	9.6	19.4	46.2	Compliance
0.952654	25.7	9.000	N	9.7	20.3	46.0	Compliance
1.407671	25.7	9.000	N	9.7	20.3	46.0	Compliance
2.458886	23.4	9.000	N	9.7	22.6	46.0	Compliance

**FCC §15.209, §15.205 & §15.407(b) (1) (6) (7) –UNWANTED EMISSION****Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

### Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If  $U_{lab}$  is less than or equal to  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If  $U_{lab}$  is greater than  $U_{cispr}$  of Table 1, then:

- compliance is deemed to occur if no measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by  $(U_{lab} - U_{cispr})$ , exceeds the disturbance limit.


Based on CISPR 16-4-2: 2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is: 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical; 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical; 1G~6GHz: 4.45 dB, 6G~18GHz: 5.23 dB.

Table 1 – Values of  $U_{cispr}$


Measurement	$U_{cispr}$
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

### EUT Setup

Below 1 GHz:

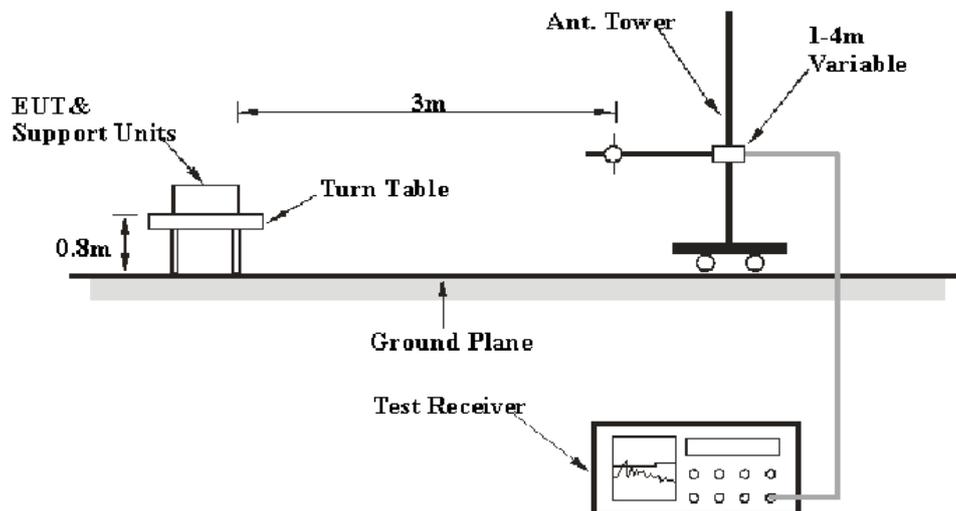

**Above 1 GHz:**

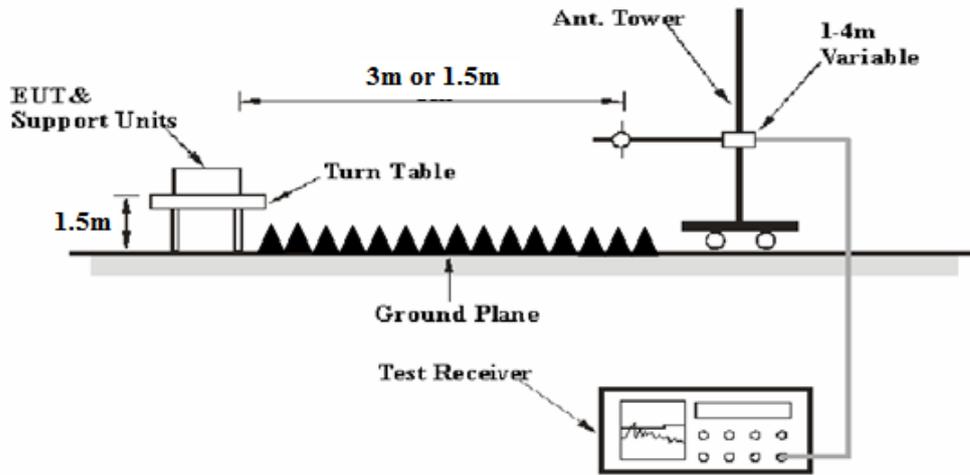

The radiated emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

**Test Procedure**

During the radiated emission test, the adapter was connected to the first AC floor outlet and the other support equipments were connected to the second AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r02, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor =  $20 \log(\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB

Extrapolation result = Corrected Amplitude (dB $\mu$ V/m) - distance extrapolation factor (6dB)

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2016-09-01	2017-09-01
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2016-09-01	2017-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2015-11-23	2016-11-22
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2016-02-19	2017-02-19
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
N/A	Coaxial Cable	14m	N/A	2016-05-06	2017-05-06
N/A	Coaxial Cable	8m	N/A	2016-05-06	2017-05-06
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	N/A	2016-05-06	2017-05-06
Agilent	Spectrum Analyzer	8564E	3943A01781	2016-05-08	2017-05-08
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2016-09-06	2017-09-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	28.9 °C
<b>Relative Humidity:</b>	39 %
<b>ATM Pressure:</b>	100.9 kPa

*The testing was performed by Meixiang Chen on 2016-09-21.*


*Test Mode: Transmitting*

FEMVAL

**1) Below 1GHz**


(Pretest all modes,5.8G LB middle channel+2.4G 802.11b high channel was the worst)

**Horizontal:**

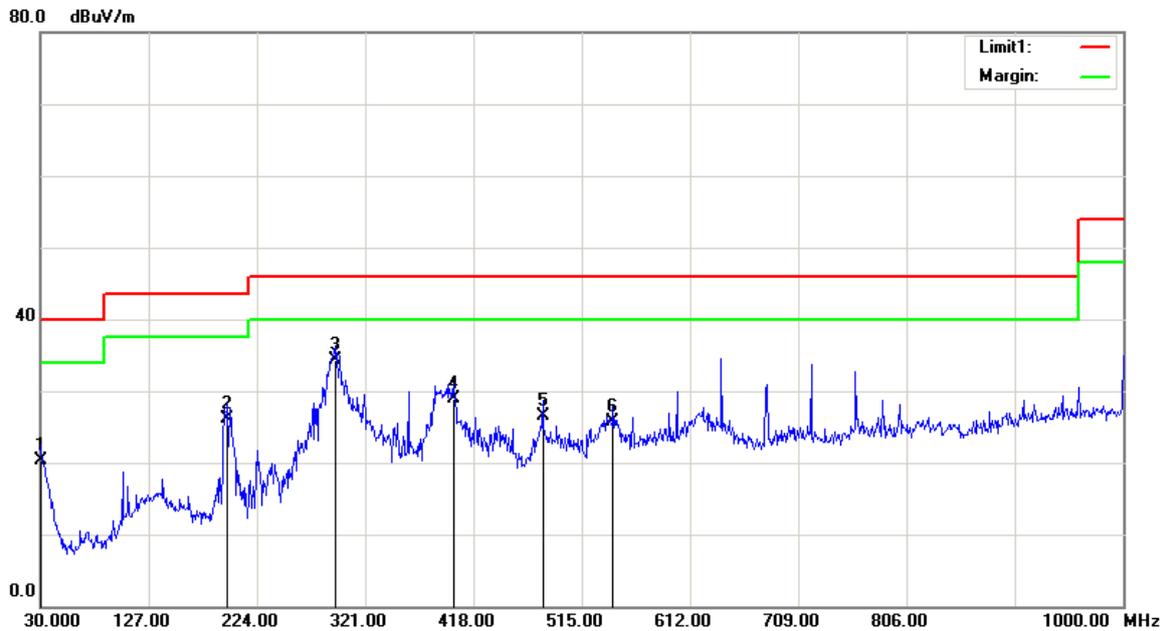

Frequency (MHz)	Receiver Reading (dBμV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	19.37	QP	1.03	20.40	40.00	19.60
197.8100	33.96	QP	-7.76	26.20	43.50	17.30
294.8100	40.29	QP	-5.99	34.30	46.00	11.70
400.5400	32.69	QP	-3.69	29.00	46.00	17.00
480.0800	27.98	QP	-1.38	26.60	46.00	19.40
543.1300	26.76	QP	-0.96	25.80	46.00	20.20

Vertical:

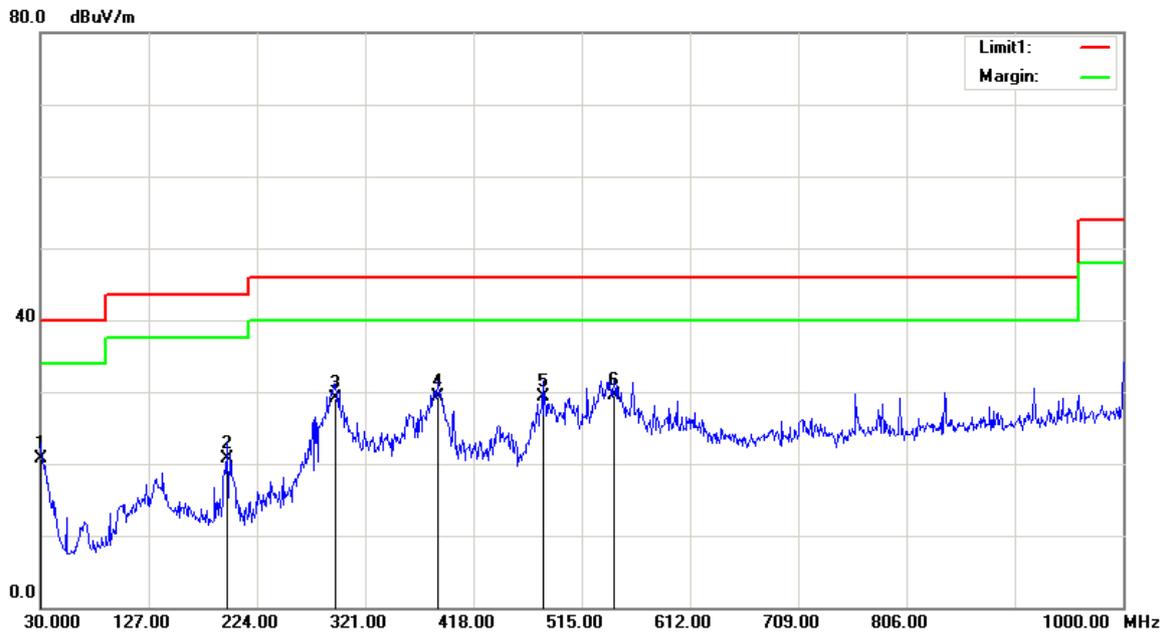

Frequency (MHz)	Receiver Reading (dBμV)	Detector (PK/QP/Ave)	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	19.77	QP	1.03	20.80	40.00	19.20
197.8100	28.56	QP	-7.76	20.80	43.50	22.70
293.8400	35.10	QP	-6.00	29.10	46.00	16.90
385.9900	33.57	QP	-4.17	29.40	46.00	16.60
480.0800	30.78	QP	-1.38	29.40	46.00	16.60
544.1000	30.55	QP	-0.95	29.60	46.00	16.40

2) 1GHz-40GHz(Test performed at 3.0m distance EUT to antenna)

802.11a mode:

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
<b>frequency: 5745 MHz</b>									
5745	73.77	PK	H	32.15	5.53	0.00	111.45	N/A	N/A
5745	63.81	AV	H	32.15	5.53	0.00	101.49	N/A	N/A
5745	77.93	PK	V	32.15	5.53	0.00	115.61	N/A	N/A
5745	67.43	AV	V	32.15	5.53	0.00	105.11	N/A	N/A
5725	44.38	PK	V	32.15	5.60	0.00	82.13	122.20	40.07
5720	35.69	PK	V	32.14	5.61	0.00	73.44	110.80	37.36
5700	27.41	PK	V	32.14	5.68	0.00	65.23	105.20	39.97
5650	26.44	PK	V	32.13	5.28	0.00	63.85	68.20	4.35
11490	30.74	PK	V	37.89	8.94	26.14	51.43	74.00	22.57
11490	19.65	AV	V	37.89	8.94	26.14	40.34	54.00	13.66
17235	33.49	PK	V	40.91	13.69	25.63	62.46	74.00	11.54
17235	20.57	AV	V	40.91	13.69	25.63	49.54	54.00	4.46
3192	35.84	PK	V	27.81	6.22	27.38	42.49	74.00	31.51
3192	23.51	AV	V	27.81	6.22	27.38	30.16	54.00	23.84
4919	38.54	PK	V	30.89	5.33	27.43	47.33	74.00	26.67
4919	26.13	AV	V	30.89	5.33	27.43	34.92	54.00	19.08
<b>frequency: 5785 MHz</b>									
5785	74.79	PK	H	32.16	5.47	0.00	112.42	N/A	N/A
5785	65.15	AV	H	32.16	5.47	0.00	102.78	N/A	N/A
5785	77.83	PK	V	32.16	5.47	0.00	115.46	N/A	N/A
5785	68.02	AV	V	32.16	5.47	0.00	105.65	N/A	N/A
11570	30.58	PK	V	37.90	8.92	26.07	51.33	74.00	22.67
11570	18.66	AV	V	37.90	8.92	26.07	39.41	54.00	14.59
17355	33.74	PK	V	41.63	12.99	25.63	62.73	74.00	11.27
17355	21.25	AV	V	41.63	12.99	25.63	50.24	54.00	3.76
3185	36.88	PK	V	27.79	6.35	27.38	43.64	74.00	30.36
3185	24.17	AV	V	27.79	6.35	27.38	30.93	54.00	23.07
4931	39.12	PK	V	30.92	5.35	27.43	47.96	74.00	26.04
4931	25.98	AV	V	30.92	5.35	27.43	34.82	54.00	19.18
<b>frequency: 5825 MHz</b>									
5825	74.65	PK	H	32.17	5.75	0.00	112.57	N/A	N/A
5825	65.01	AV	H	32.17	5.75	0.00	102.93	N/A	N/A
5825	77.67	PK	V	32.17	5.75	0.00	115.59	N/A	N/A
5825	67.83	AV	V	32.17	5.75	0.00	105.75	N/A	N/A
5850	30.35	PK	V	32.17	6.05	0.00	68.57	122.20	53.63
5855	30.48	PK	V	32.17	6.03	0.00	68.68	110.80	42.12
5875	26.83	PK	V	32.18	5.97	0.00	64.98	105.20	40.22
5925	26.81	PK	V	32.19	5.96	0.00	64.96	68.20	3.24
11650	30.35	PK	V	37.90	8.90	25.75	51.40	74.00	22.60
11650	18.96	AV	V	37.90	8.90	25.75	40.01	54.00	13.99
17475	34.09	PK	V	42.35	12.30	25.39	63.35	74.00	10.65
17475	21.85	AV	V	42.35	12.30	25.39	51.11	54.00	2.89
3190	35.03	PK	V	27.81	6.26	27.38	41.72	74.00	32.28
3190	22.97	AV	V	27.81	6.26	27.38	29.66	54.00	24.34
4930	39.93	PK	V	30.92	5.35	27.43	48.77	74.00	25.23
4930	26.87	AV	V	30.92	5.35	27.43	35.71	54.00	18.29

802.11n ht20 mode:

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
<b>frequency: 5745 MHz</b>									
5745	73.34	PK	H	32.15	5.53	0.00	111.02	N/A	N/A
5745	64.18	AV	H	32.15	5.53	0.00	101.86	N/A	N/A
5745	76.59	PK	V	32.15	5.53	0.00	114.27	N/A	N/A
5745	67.56	AV	V	32.15	5.53	0.00	105.24	N/A	N/A
5725	50.37	PK	V	32.15	5.60	0.00	88.12	122.20	34.08
5720	38.47	PK	V	32.14	5.61	0.00	76.22	110.80	34.58
5700	29.01	PK	V	32.14	5.68	0.00	66.83	105.20	38.37
5650	26.36	PK	V	32.13	5.28	0.00	63.77	68.20	4.43
11490	30.64	PK	V	37.89	8.94	26.14	51.33	74.00	22.67
11490	21.41	AV	V	37.89	8.94	26.14	42.10	54.00	11.90
17235	33.02	PK	V	40.91	13.69	25.63	61.99	74.00	12.01
17235	20.96	AV	V	40.91	13.69	25.63	49.93	54.00	4.07
3535	33.47	PK	V	28.88	4.51	27.25	39.61	74.00	34.39
3535	21.02	AV	V	28.88	4.51	27.25	27.16	54.00	26.84
4915	37.12	PK	V	30.88	5.33	27.43	45.90	74.00	28.10
4915	24.91	AV	V	30.88	5.33	27.43	33.69	54.00	20.31
<b>frequency: 5785 MHz</b>									
5785	74.42	PK	H	32.16	5.47	0.00	112.05	N/A	N/A
5785	65.32	AV	H	32.16	5.47	0.00	102.95	N/A	N/A
5785	76.84	PK	V	32.16	5.47	0.00	114.47	N/A	N/A
5785	67.94	AV	V	32.16	5.47	0.00	105.57	N/A	N/A
11570	30.16	PK	V	37.90	8.92	26.07	50.91	74.00	23.09
11570	19.55	AV	V	37.90	8.92	26.07	40.30	54.00	13.70
17355	33.18	PK	V	41.63	12.99	25.63	62.17	74.00	11.83
17355	20.65	AV	V	41.63	12.99	25.63	49.64	54.00	4.36
3190	35.83	PK	V	27.81	6.26	27.38	42.52	74.00	31.48
3190	23.17	AV	V	27.81	6.26	27.38	29.86	54.00	24.14
4930	38.15	PK	V	30.92	5.35	27.43	46.99	74.00	27.01
4930	25.74	AV	V	30.92	5.35	27.43	34.58	54.00	19.42
<b>frequency: 5825 MHz</b>									
5825	74.21	PK	H	32.17	5.75	0.00	112.13	N/A	N/A
5825	65.12	AV	H	32.17	5.75	0.00	103.04	N/A	N/A
5825	76.65	PK	V	32.17	5.75	0.00	114.57	N/A	N/A
5825	67.80	AV	V	32.17	5.75	0.00	105.72	N/A	N/A
5850	36.88	PK	V	32.17	6.05	0.00	75.10	122.20	47.10
5855	31.79	PK	V	32.17	6.03	0.00	69.99	110.80	40.81
5875	26.91	PK	V	32.18	5.97	0.00	65.06	105.20	40.14
5925	26.91	PK	V	32.19	5.96	0.00	65.06	68.20	3.14
11650	30.47	PK	V	37.90	8.90	25.75	51.52	74.00	22.48
11650	19.22	AV	V	37.90	8.90	25.75	40.27	54.00	13.73
17475	33.93	PK	V	42.35	12.30	25.39	63.19	74.00	10.81
17475	21.28	AV	V	42.35	12.30	25.39	50.54	54.00	3.46
3192	36.11	PK	V	27.81	6.22	27.38	42.76	74.00	31.24
3192	23.85	AV	V	27.81	6.22	27.38	30.50	54.00	23.50
4930	37.11	PK	V	30.92	5.35	27.43	45.95	74.00	28.05
4930	24.62	AV	V	30.92	5.35	27.43	33.46	54.00	20.54

10MHz

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
<b>frequency: 5745 MHz</b>									
5745	78.62	PK	H	32.15	5.53	0.00	116.30	N/A	N/A
5745	67.28	AV	H	32.15	5.53	0.00	104.96	N/A	N/A
5745	80.47	PK	V	32.15	5.53	0.00	118.15	N/A	N/A
5745	69.93	AV	V	32.15	5.53	0.00	107.61	N/A	N/A
5725	35.26	PK	V	32.15	5.60	0.00	73.01	122.20	49.19
5720	27.05	PK	V	32.14	5.61	0.00	64.80	110.80	46.00
5700	27.17	PK	V	32.14	5.68	0.00	64.99	105.20	40.21
5650	26.80	PK	V	32.13	5.28	0.00	64.21	68.20	3.99
11490	30.86	PK	V	37.89	8.94	26.14	51.55	74.00	22.45
11490	20.17	AV	V	37.89	8.94	26.14	40.86	54.00	13.14
17235	33.20	PK	V	40.91	13.69	25.63	62.17	74.00	11.83
17235	20.95	AV	V	40.91	13.69	25.63	49.92	54.00	4.08
3205	36.97	PK	V	27.86	6.10	27.37	43.56	74.00	30.44
3205	23.85	AV	V	27.86	6.10	27.37	30.44	54.00	23.56
4930	36.36	PK	V	30.92	5.35	27.43	45.20	74.00	28.80
4930	24.11	AV	V	30.92	5.35	27.43	32.95	54.00	21.05
<b>frequency: 5785MHz</b>									
5785	79.31	PK	H	32.16	5.47	0.00	116.94	N/A	N/A
5785	68.90	AV	H	32.16	5.47	0.00	106.53	N/A	N/A
5785	81.17	PK	V	32.16	5.47	0.00	118.80	N/A	N/A
5785	70.61	AV	V	32.16	5.47	0.00	108.24	N/A	N/A
11570	31.28	PK	V	37.90	8.92	26.07	52.03	74.00	21.97
11570	19.68	AV	V	37.90	8.92	26.07	40.43	54.00	13.57
17355	33.99	PK	V	41.63	12.99	25.63	62.98	74.00	11.02
17355	21.57	AV	V	41.63	12.99	25.63	50.56	54.00	3.44
3205	34.39	PK	V	27.86	6.10	27.37	40.98	74.00	33.02
3205	21.09	AV	V	27.86	6.10	27.37	27.68	54.00	26.32
4930	37.82	PK	V	30.92	5.35	27.43	46.66	74.00	27.34
4930	24.95	AV	V	30.92	5.35	27.43	33.79	54.00	20.21
<b>frequency: 5821.3 MHz</b>									
5825	79.11	PK	H	32.17	5.75	0.00	117.03	N/A	N/A
5825	68.72	AV	H	32.17	5.75	0.00	106.64	N/A	N/A
5825	80.95	PK	V	32.17	5.75	0.00	118.87	N/A	N/A
5825	70.47	AV	V	32.17	5.75	0.00	108.39	N/A	N/A
5850	26.79	PK	V	32.17	6.05	0.00	65.01	122.20	57.19
5855	26.13	PK	V	32.17	6.03	0.00	64.33	110.80	46.47
5875	25.85	PK	V	32.18	5.97	0.00	64.00	105.20	41.20
5925	26.53	PK	V	32.19	5.96	0.00	64.68	68.20	3.52
11650	30.62	PK	V	37.90	8.90	25.75	51.67	74.00	22.33
11650	20.11	AV	V	37.90	8.90	25.75	41.16	54.00	12.84
17475	33.52	PK	V	42.35	12.30	25.39	62.78	74.00	11.22
17475	21.32	AV	V	42.35	12.30	25.39	50.58	54.00	3.42
2590	39.59	PK	V	26.13	4.38	27.42	42.68	74.00	31.32
2590	24.68	AV	V	26.13	4.38	27.42	27.77	54.00	26.23
4915	38.84	PK	V	30.88	5.33	27.43	47.62	74.00	26.38
4915	26.41	AV	V	30.88	5.33	27.43	35.19	54.00	18.81

LB 5.8G

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
<b>frequency: 5727 MHz</b>									
5727	76.08	PK	H	32.15	5.59	0.00	113.82	N/A	N/A
5727	52.82	AV	H	32.15	5.59	0.00	90.56	N/A	N/A
5727	85.37	PK	V	32.15	5.59	0.00	123.11	N/A	N/A
5727	62.24	AV	V	32.15	5.59	0.00	99.98	N/A	N/A
5725	53.21	PK	V	32.15	5.60	0.00	90.96	122.20	31.24
5720	29.15	PK	V	32.14	5.61	0.00	66.90	110.80	43.90
5700	26.96	PK	V	32.14	5.68	0.00	64.78	105.20	40.42
5650	26.43	PK	V	32.13	5.28	0.00	63.84	68.20	4.36
11454	30.73	PK	V	37.85	8.89	26.17	51.30	74.00	22.70
11454	19.66	AV	V	37.85	8.89	26.17	40.23	54.00	13.77
17181	33.67	PK	V	40.59	14.00	25.58	62.68	74.00	11.32
17181	21.14	AV	V	40.59	14.00	25.58	50.15	54.00	3.85
3205	35.00	PK	V	27.86	6.10	27.37	41.59	74.00	32.41
3205	22.57	AV	V	27.86	6.10	27.37	29.16	54.00	24.84
4570	33.28	PK	V	29.98	5.11	27.26	41.11	74.00	32.89
4570	20.68	AV	V	29.98	5.11	27.26	28.51	54.00	25.49
<b>frequency: 5775.3MHz</b>									
5775.3	79.14	PK	H	32.16	5.48	0.00	116.78	N/A	N/A
5775.3	56.84	AV	H	32.16	5.48	0.00	94.48	N/A	N/A
5775.3	88.50	PK	V	32.16	5.48	0.00	126.14	N/A	N/A
5775.3	66.74	AV	V	32.16	5.48	0.00	104.38	N/A	N/A
11550.6	30.44	PK	V	37.90	8.93	26.09	51.18	74.00	22.82
11550.6	19.55	AV	V	37.90	8.93	26.09	40.29	54.00	13.71
17325.9	33.21	PK	V	41.46	13.16	25.63	62.20	74.00	11.80
17325.9	20.58	AV	V	41.46	13.16	25.63	49.57	54.00	4.43
3205	34.01	PK	V	27.86	6.10	27.37	40.60	74.00	33.40
3205	21.65	AV	V	27.86	6.10	27.37	28.24	54.00	25.76
4585	33.23	PK	V	30.02	5.33	27.30	41.28	74.00	32.72
4585	20.52	AV	V	30.02	5.33	27.30	28.57	54.00	25.43
<b>frequency: 5821.3 MHz</b>									
5821.3	76.84	PK	H	32.16	5.71	0.00	114.71	N/A	N/A
5821.3	54.21	AV	H	32.16	5.71	0.00	92.08	N/A	N/A
5821.3	86.74	PK	V	32.16	5.71	0.00	124.61	N/A	N/A
5821.3	65.67	AV	V	32.16	5.71	0.00	103.54	N/A	N/A
5850	26.29	PK	V	32.17	6.05	0.00	64.51	122.20	57.69
5855	25.76	PK	V	32.17	6.03	0.00	63.96	110.80	46.84
5875	25.78	PK	V	32.18	5.97	0.00	63.93	105.20	41.27
5925	25.74	PK	V	32.19	5.96	0.00	63.89	68.20	4.31
11642.6	30.18	PK	V	37.90	8.90	25.79	51.19	74.00	22.81
11642.6	19.11	AV	V	37.90	8.90	25.79	40.12	54.00	13.88
17463.9	33.95	PK	V	42.28	12.36	25.43	63.16	74.00	10.84
17463.9	21.52	AV	V	42.28	12.36	25.43	50.73	54.00	3.27
3625	33.54	PK	V	29.08	4.58	27.28	39.92	74.00	34.08
3625	21.41	AV	V	29.08	4.58	27.28	27.79	54.00	26.21
4570	34.57	PK	V	29.98	5.11	27.26	42.40	74.00	31.60
4570	22.41	AV	V	29.98	5.11	27.26	30.24	54.00	23.76

Frequency MHz	Receiver		Rx Antenna		Cable loss dB	Amplifier Gain dB	Corrected Amplitude dBµV/m	Limit dBµV/m	Margin dB
	Reading dBµV	Detector PK/QP/AV	Polar H/V	Factor dB(1/m)					
<b>Additional test frequency: 5729.3 MHz</b>									
5729.3	87.31	PK	V	32.15	5.58	0.00	125.04	N/A	N/A
5729.3	63.47	AV	V	32.15	5.58	0.00	101.20	N/A	N/A
5725	33.41	PK	V	32.15	5.60	0.00	71.16	122.20	51.04
5720	27.02	PK	V	32.14	5.61	0.00	64.77	110.80	46.03
5700	26.40	PK	V	32.14	5.68	0.00	64.22	105.20	40.98
5650	26.11	PK	V	32.13	5.28	0.00	63.52	68.20	4.68
<b>Additional test frequency: 5731.6 MHz</b>									
5731.6	89.87	PK	V	32.15	5.57	0.00	127.59	N/A	N/A
5731.6	66.65	AV	V	32.15	5.57	0.00	104.37	N/A	N/A
5725	27.07	PK	V	32.15	5.60	0.00	64.82	122.20	57.38
5720	26.58	PK	V	32.14	5.61	0.00	64.33	110.80	46.47
5700	25.70	PK	V	32.14	5.68	0.00	63.52	105.20	41.68
5650	26.82	PK	V	32.13	5.28	0.00	64.23	68.20	3.97
<b>Additional test frequency: 5816.7 MHz</b>									
5816.7	88.96	PK	V	32.16	5.65	0.00	126.77	N/A	N/A
5816.7	67.02	AV	V	32.16	5.65	0.00	104.83	N/A	N/A
5850	27.45	PK	V	32.17	6.05	0.00	65.67	122.20	56.53
5855	25.72	PK	V	32.17	6.03	0.00	63.92	110.80	46.88
5875	25.94	PK	V	32.18	5.97	0.00	64.09	105.20	41.11
5925	26.11	PK	V	32.19	5.96	0.00	64.26	68.20	3.94
<b>Additional test frequency: 5819 MHz</b>									
5819	88.09	PK	V	32.16	5.68	0.00	125.93	N/A	N/A
5819	66.36	AV	V	32.16	5.68	0.00	104.20	N/A	N/A
5850	29.79	PK	V	32.17	6.05	0.00	68.01	122.20	54.19
5855	29.22	PK	V	32.17	6.03	0.00	67.42	110.80	43.38
5875	26.63	PK	V	32.18	5.97	0.00	64.78	105.20	40.42
5925	26.25	PK	V	32.19	5.96	0.00	64.40	68.20	3.80

**Transmitting Simultaneously:**

(Pretest all modes,5.8G LB middle channel+2.4G 802.11b high channel was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
1134	42.3	PK	H	22.65	3.03	26.70	41.28	74.00	32.72
1134	28.74	AV	H	22.65	3.03	26.70	27.72	54.00	26.28
1132.67	42.95	PK	V	22.64	3.03	26.70	41.92	74.00	32.08
1132.67	28.74	AV	V	22.64	3.03	26.70	27.71	54.00	26.29
3336.73	45.92	PK	H	28.28	4.88	27.25	51.83	74.00	22.17
3336.73	37.59	AV	H	28.28	4.88	27.25	43.50	54.00	10.50
3336.33	55.62	PK	V	28.28	4.89	27.25	61.54	74.00	12.46
3336.33	46.62	AV	V	28.28	4.89	27.25	52.54	54.00	1.46
3249.25	42.1	PK	H	28.00	6.31	27.33	49.08	74.00	24.92
3249.25	39.28	AV	H	28.00	6.31	27.33	46.26	54.00	7.74
3249.28	38.73	PK	V	28.00	6.31	27.33	45.71	74.00	28.29
3249.28	33.91	AV	V	28.00	6.31	27.33	40.89	54.00	13.11

**FCC §15.407(a) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**

**Applicable Standard**

15.407(a)

**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
R&S	Test Receiver	ESPI	100120	2015-12-10	2016-12-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

**Test Procedure**

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r02

**Test Data**

**Environmental Conditions**

<b>Temperature:</b>	28.9 °C
<b>Relative Humidity:</b>	39 %
<b>ATM Pressure:</b>	100.9 kPa

*The testing was performed by Kira Liu on 2016-09-21.*

**Test Result:** Pass.


Please refer to the following tables and plots.

Test mode: Transmitting (Test was performed at chain 0)

5725MHz-5850MHz:


Mode	Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Result
802.11a	Low	5745	16.4	PASS
	Middle	5785	16.48	PASS
	High	5825	16.48	PASS
802.11n20	Low	5745	16.16	PASS
	Middle	5785	17.2	PASS
	High	5825	16.96	PASS
10MHz	Low	5745	8.96	PASS
	Middle	5785	8.92	PASS
	High	5825	8.88	PASS
LB	Low	5727	1.176	PASS
	Middle	5775.3	1.152	PASS
	High	5821.3	1.176	PASS

### 802.11a Low Channel

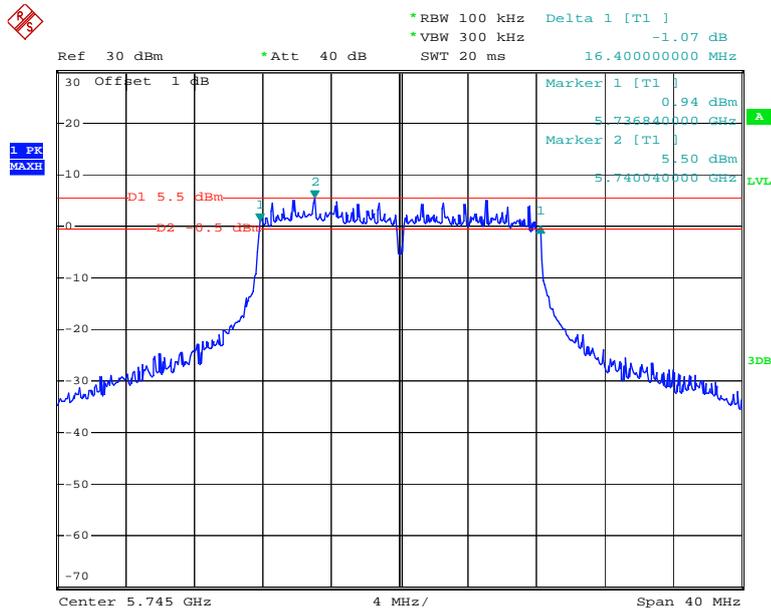


Date: 21.SEP.2016 14:09:53

### 802.11a Middle Channel

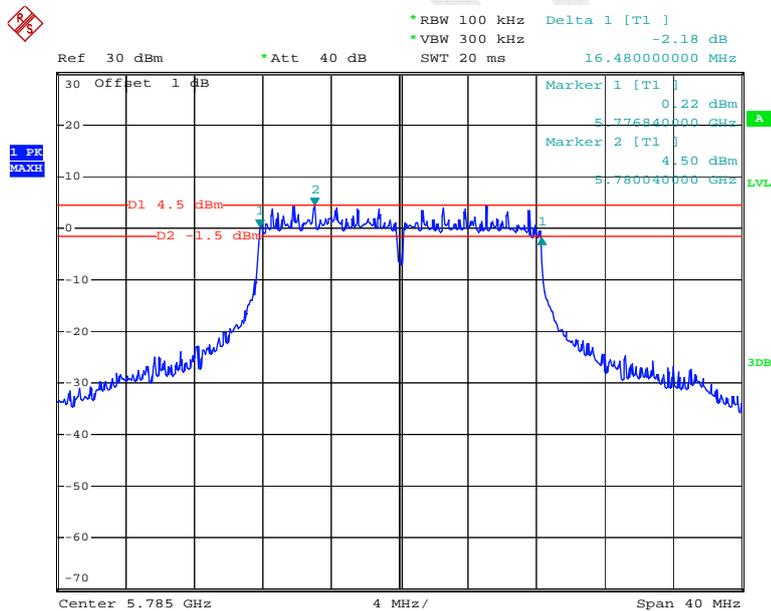


Date: 21.SEP.2016 14:08:12

### 802.11a High Channel

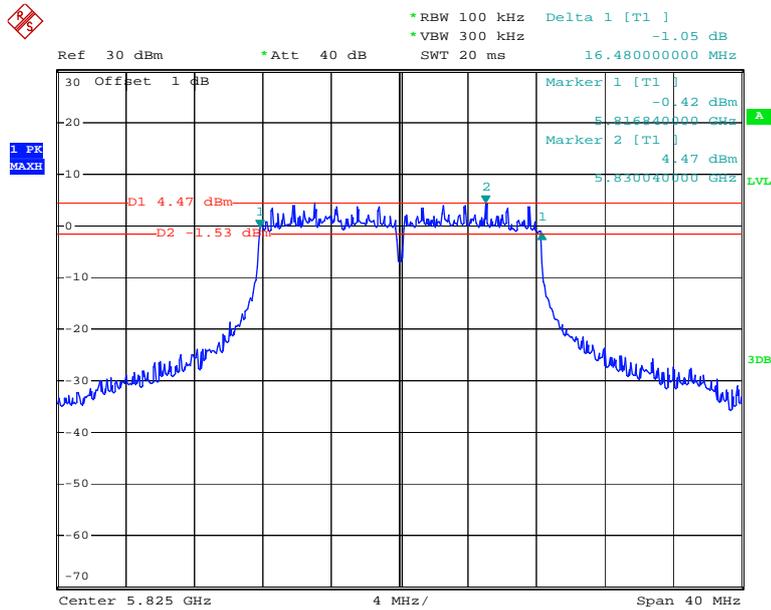


Date: 21.SEP.2016 14:06:29

### 802.11n ht20 Low Channel

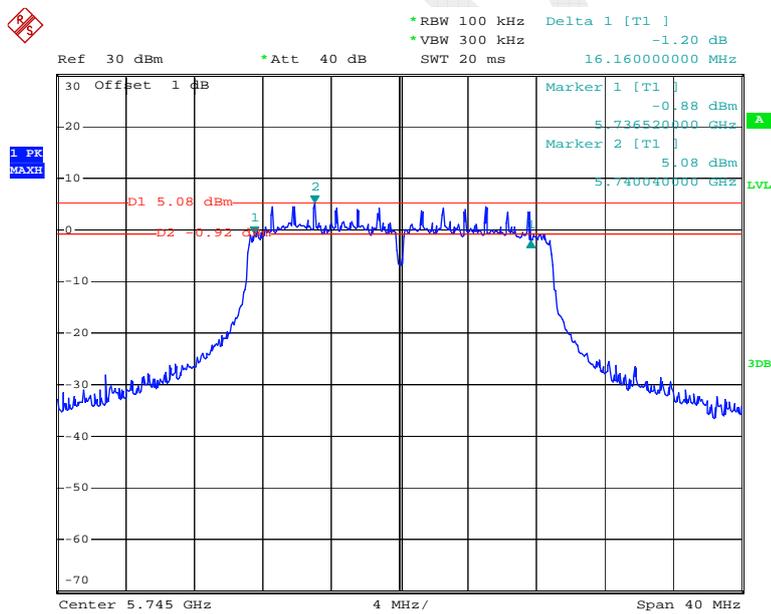


Date: 21.SEP.2016 14:00:49

### 802.11n ht20 Middle Channel

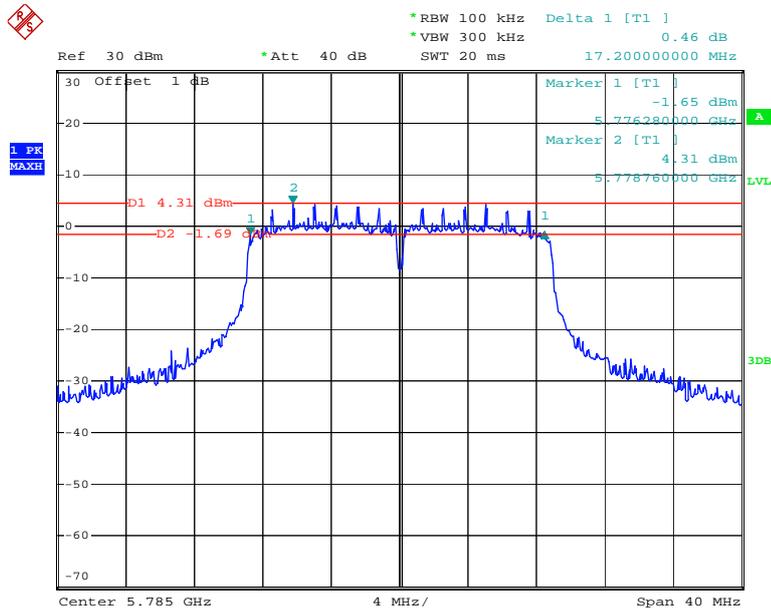


Date: 21.SEP.2016 14:02:39

### 802.11n ht20 High Channel

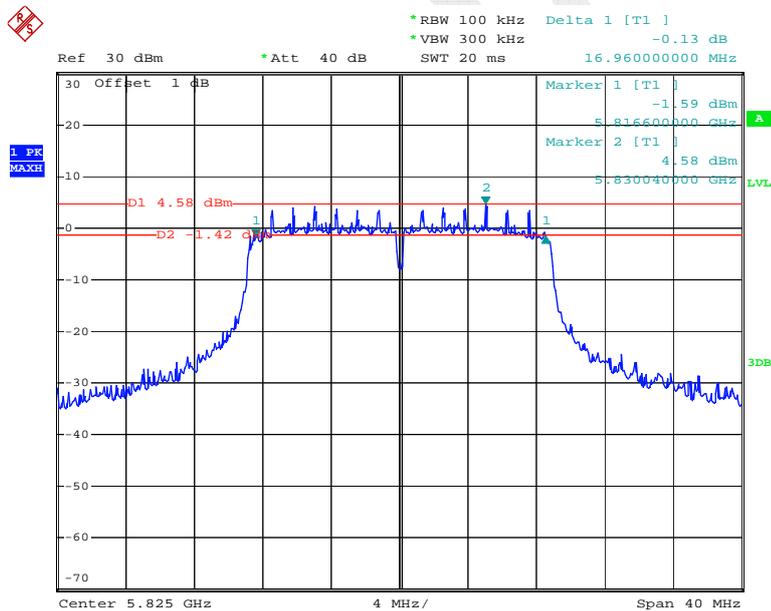


Date: 21.SEP.2016 14:04:43

### 10 MHz, Low Channel

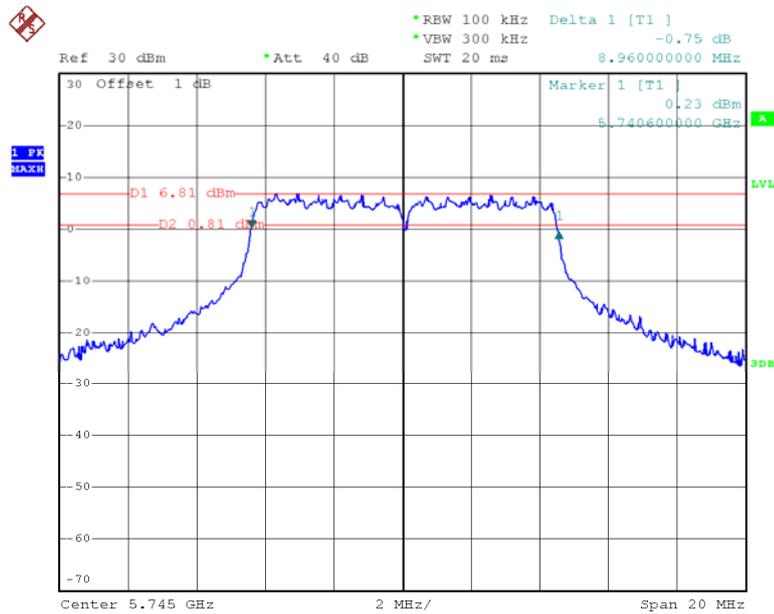


Date: 21.SEP.2016 15:48:40

### 10 MHz, Middle Channel

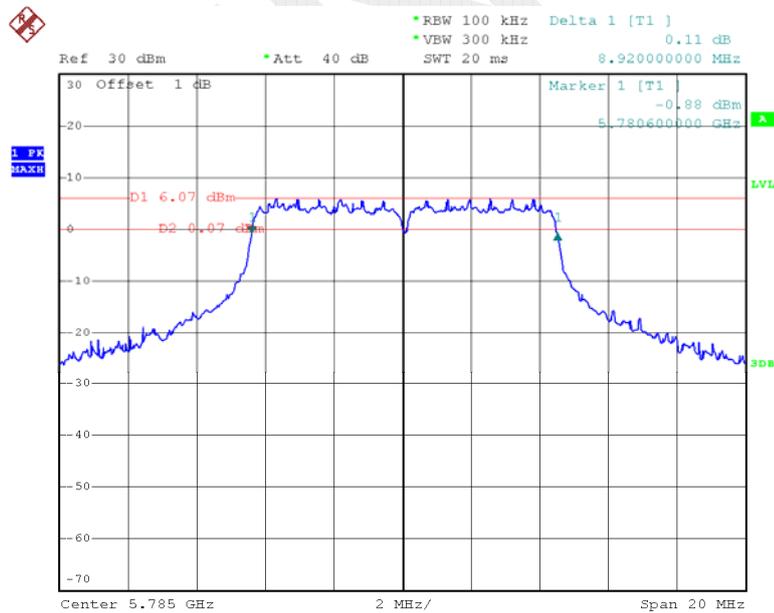


Date: 21.SEP.2016 15:46:15

### 10 MHz, High Channel

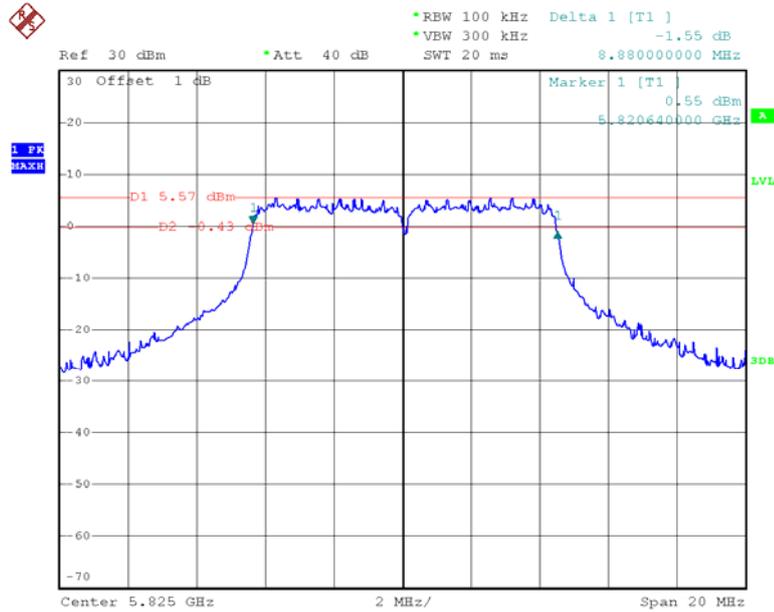


Date: 21.SEP.2016 15:45:00

### LB, Low Channel

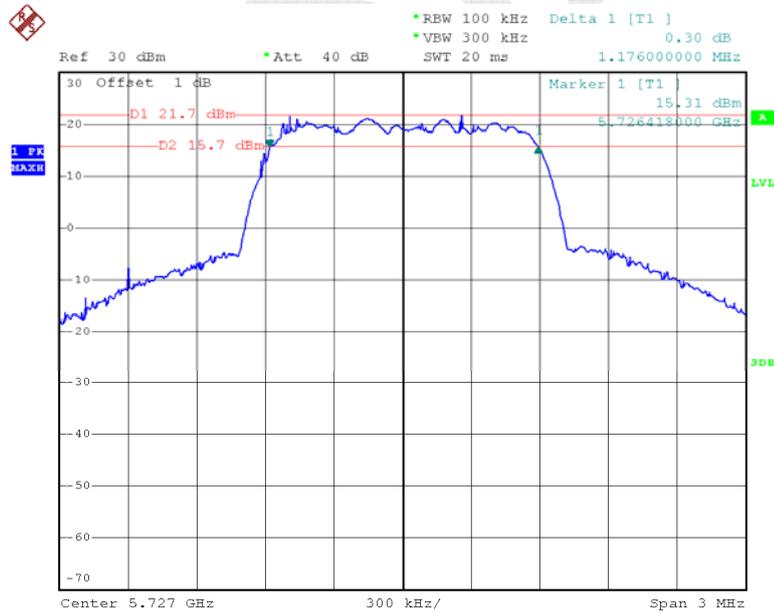


Date: 21.SEP.2016 16:37:07

### LB,Middle Channel

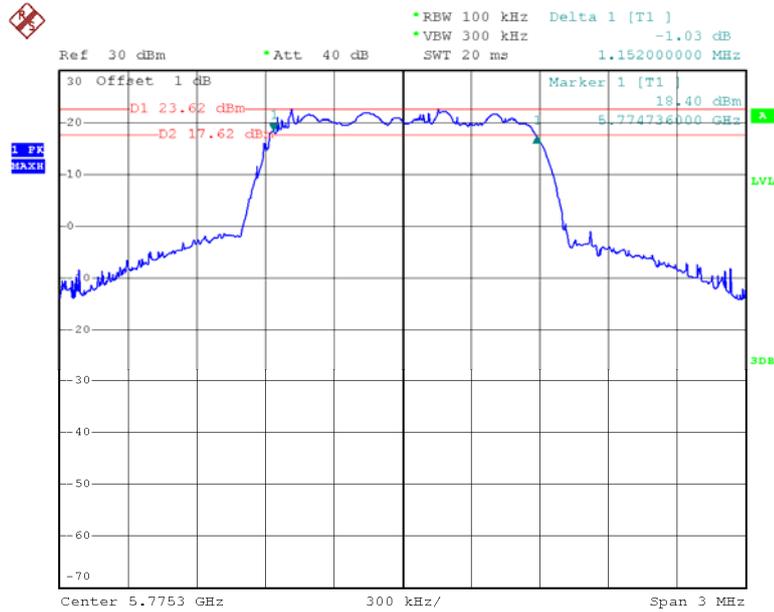

Date: 21.SEP.2016 16:38:44

### LB,High Channel

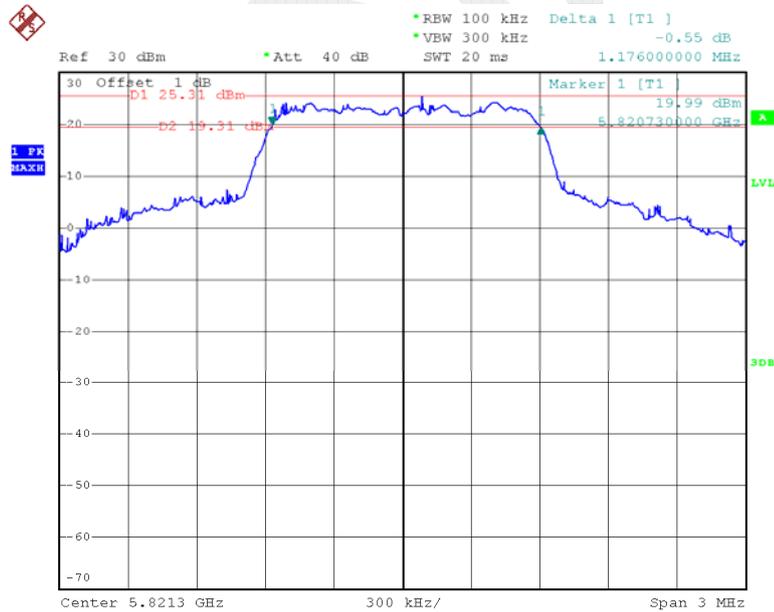

Date: 21.SEP.2016 16:39:49

---

**FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER**

---

**Applicable Standard**

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r02

### Test Data

#### Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	39 %
ATM Pressure:	100.9kPa

*The testing was performed by Kira Liu on 2016-09-21.*

Test Mode: Transmitting

Mode	Frequency (MHz)	Maximum Conducted Output Power (dBm)		Total (dBm)	Limits (dBm)	Result
		Chain 0	Chain 1			
802.11a	5745	18.61	18.59	21.61	30	PASS
	5785	18.22	18.48	21.36	30	PASS
	5825	18.33	18.43	21.39	30	PASS
802.11n20	5745	18.26	18.61	21.45	30	PASS
	5785	18.16	18.19	21.19	30	PASS
	5825	18.27	18.46	21.38	30	PASS
10MHz	5745	18.21	18.39	21.31	30	PASS
	5785	18.11	18.15	21.14	30	PASS
	5825	18.08	18.34	21.22	30	PASS
LB	5727	21.43	/	/	30	PASS
	5729.3	22.59	/	/	30	PASS
	5731.6	23.75	/	/	30	PASS
	5775.3	23.81	/	/	30	PASS
	5819	23.77	/	/	30	PASS
	5821.3	23.57	/	/	30	PASS
	5821.3	23.78	/	/	30	PASS

Note: For 802.11a/n and 10MHz mode, the device employed Cyclic Delay Diversity (CDD) for MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

So:

Directional gain = GANT + Array Gain = 5.0dBi < 6dBi

## **FCC §15.407(a) - POWER SPECTRAL DENSITY**

### **Applicable Standard**

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

### Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v01r02

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2015-11-23	2016-11-22
R&S	Test Receiver	ESPI	100120	2015-12-10	2016-12-09
N/A	Coaxial Cable	0.1m	N/A	2016-05-06	2017-05-06
E-Microwave	DC Blocking	EMDCB-00036	0E01201047	2016-05-06	2017-05-06

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	28.9 °C
<b>Relative Humidity:</b>	39 %
<b>ATM Pressure:</b>	100.9kPa

*The testing was performed by Kira Liu on 2016-09-21  
Test Mode: Transmitting*

*Test Result: Compliance. Please refer to the following table and plot.*

Mode	Channel	Frequency MHz	PSD (dBm/300kHz)		Total (dBm/500kHz)	Limit (dBm/500kHz)
			Chain 0	Chain 1		
802.11a	Low	5745	3.00	1.91	7.72	28
	Middle	5785	1.72	1.52	6.85	28
	High	5825	1.19	1.82	6.75	28
802.11n20	Low	5745	1.57	2.19	7.12	28
	Middle	5785	1.27	1.31	6.52	28
	High	5825	1.18	1.55	6.6	28
10MHz	Low	5745	4.98	4.53	9.99	28
	Middle	5785	4.05	3.73	9.12	28
	High	5825	4.3	3.53	9.16	28
LB	Low	5727	19.94	/	22.16	30
	Middle	5775.3	21.6	/	23.82	30
	High	5821.3	23.98	/	26.2	30

Note: the device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO modes and 10MHz mode, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:  
 Array Gain =  $10 \log(\text{NANT}/\text{NSS})$  dB.

So:


$$\text{Directional gain} = \text{GANT} + \text{Array Gain} = 5.0 + 10 \cdot \log(2) = 8 \text{ dBi}$$

The Power density Limits was reduce 2dB

The measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10 \log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 kHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.


5725MHz-5850MHz:  
Chain 0:

### 802.11a Low Channel

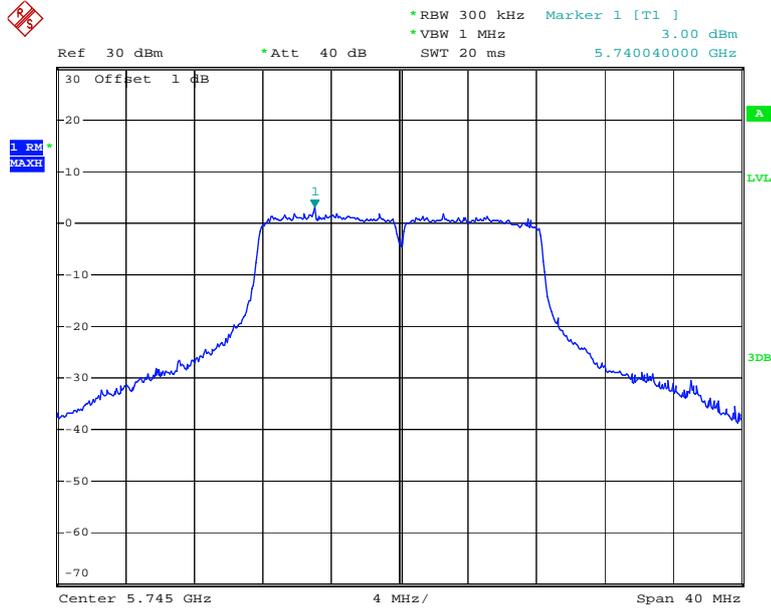


Date: 21.SEP.2016 14:10:31

### 802.11a Middle Channel

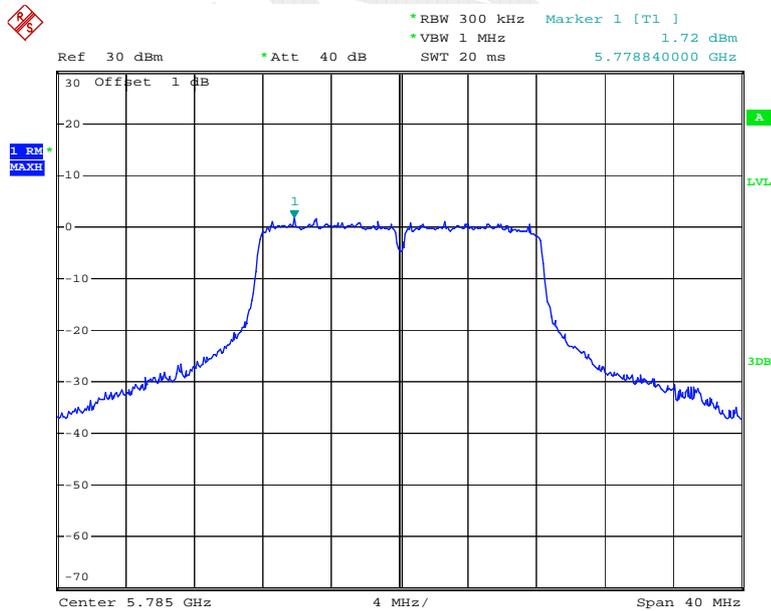


Date: 21.SEP.2016 14:08:53

### 802.11a High Channel

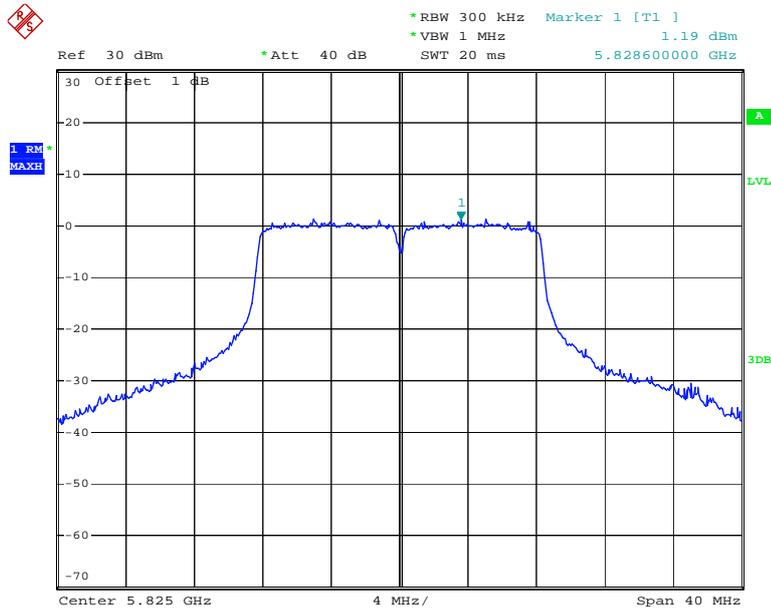


Date: 21.SEP.2016 14:07:11

### 802.11n ht20 Low Channel

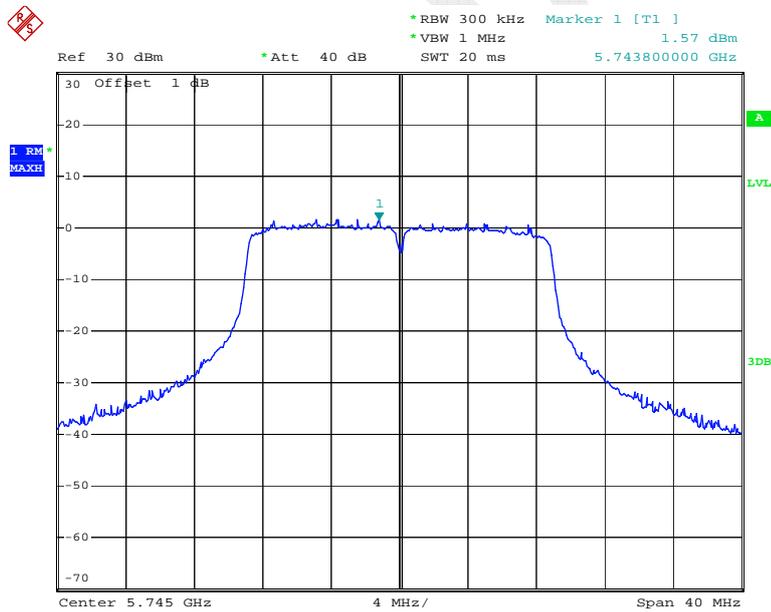


Date: 21.SEP.2016 14:01:31

### 802.11n ht20 Middle Channel

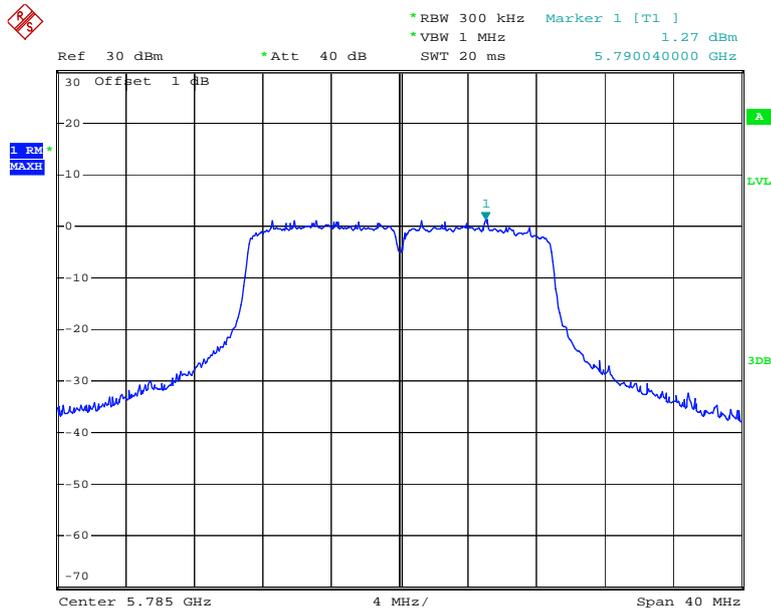


Date: 21.SEP.2016 14:03:22

### 802.11n ht20 High Channel

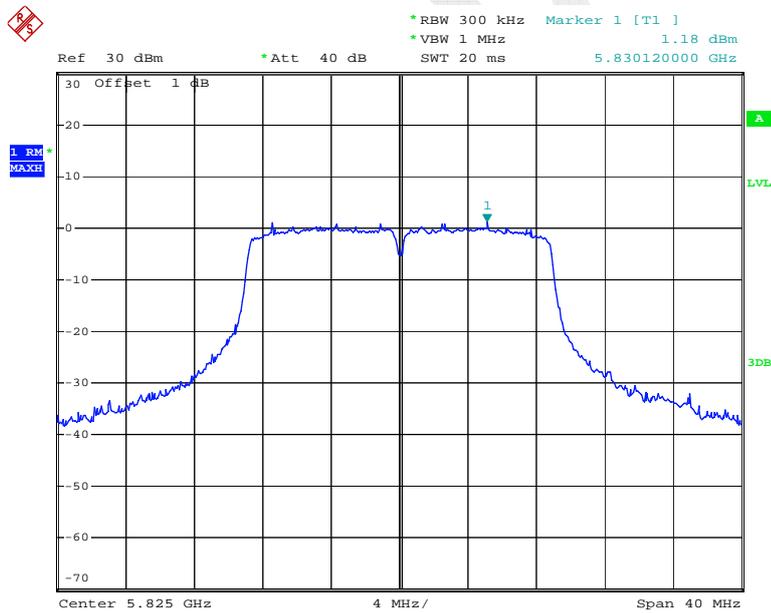


Date: 21.SEP.2016 14:05:26

### 10M, Low Channel

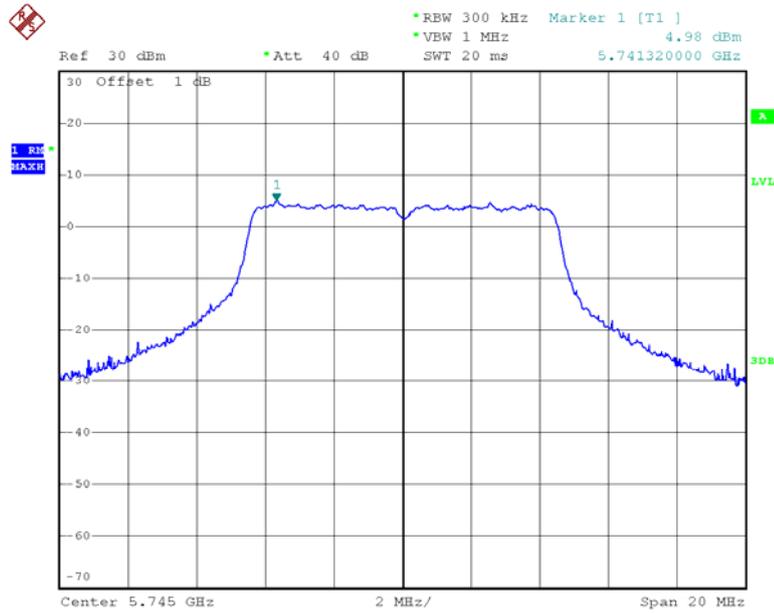


Date: 21.SEP.2016 15:42:26

### 10M, Middle Channel

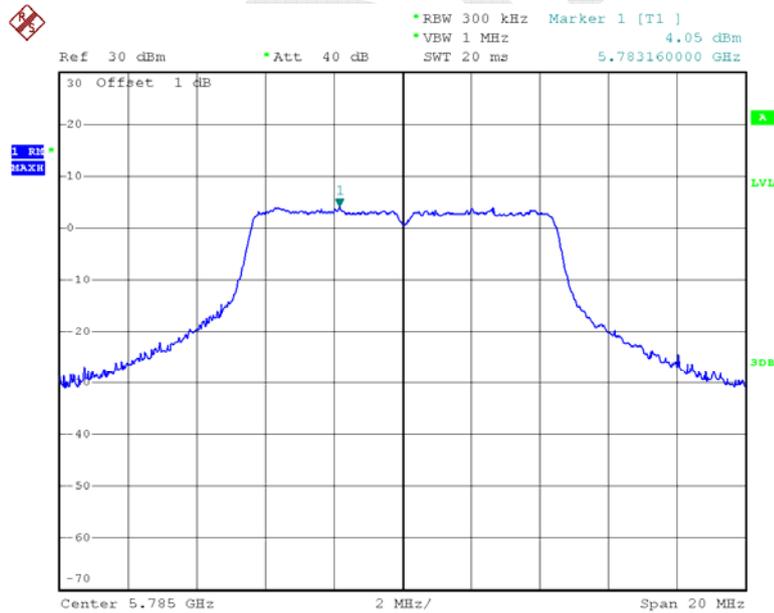

Date: 21.SEP.2016 15:42:42


### 10M,High Channel

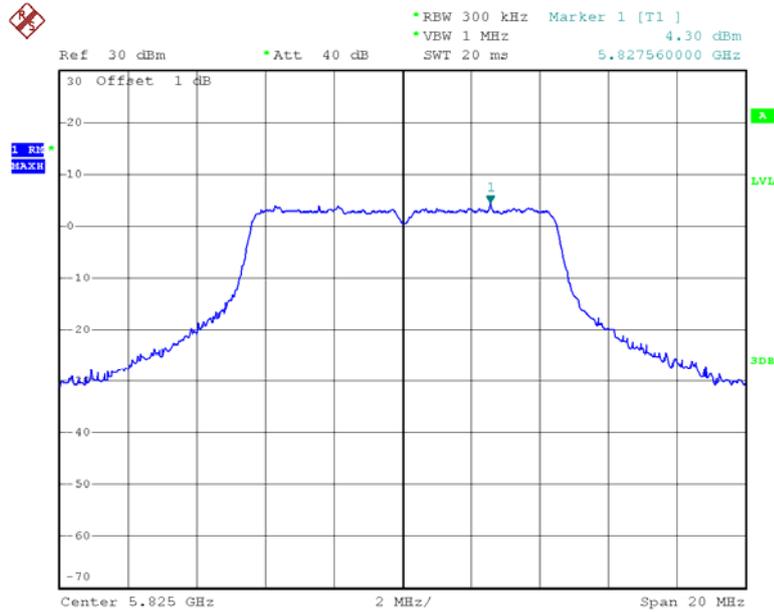

Date: 21.SEP.2016 15:42:55


### Chain 1:

### 802.11a Low Channel

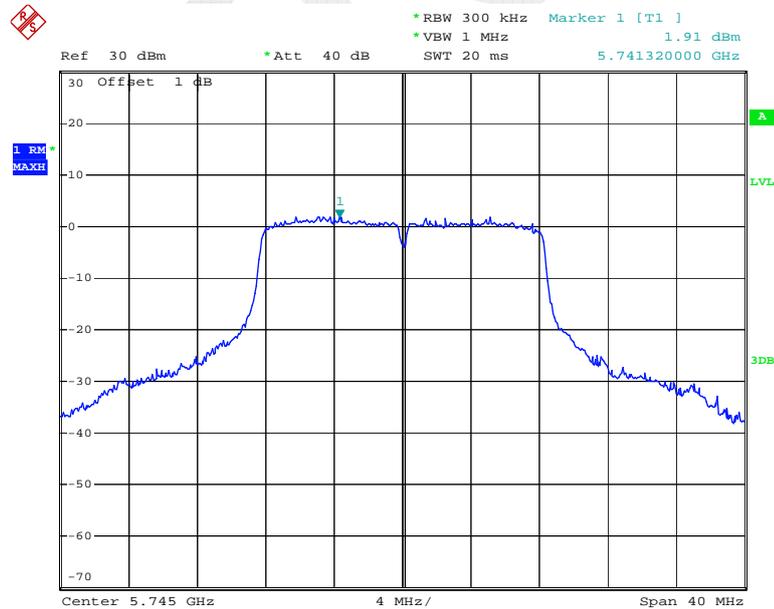


Date: 21.SEP.2016 13:49:30

### 802.11a Middle Channel

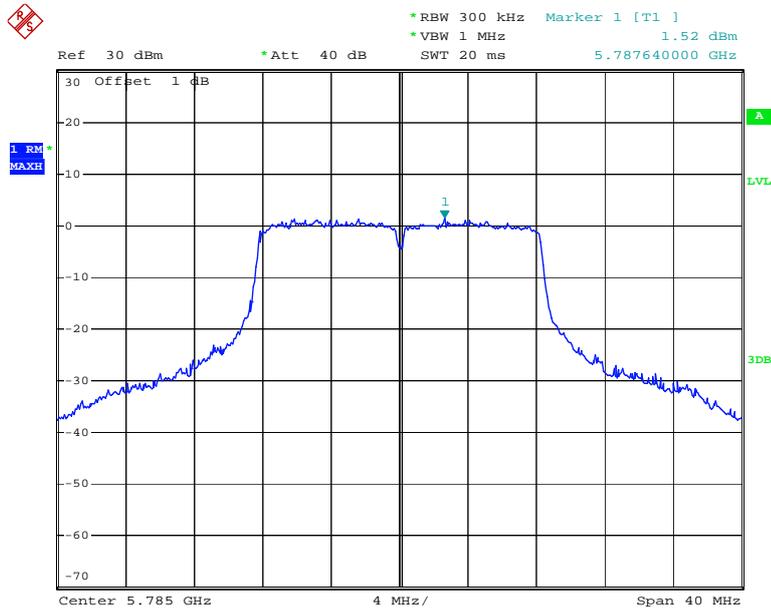


Date: 21.SEP.2016 13:52:08

### 802.11a High Channel

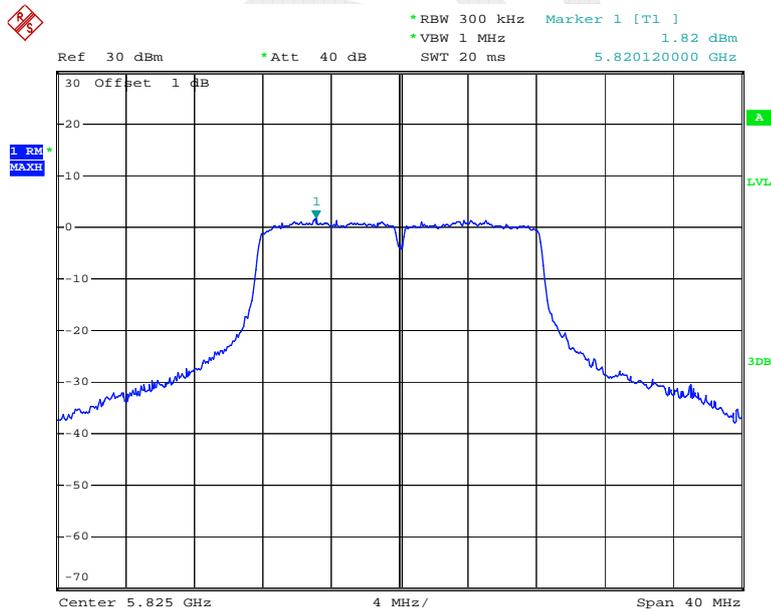


Date: 21.SEP.2016 13:53:55

### 802.11n ht20 Low Channel

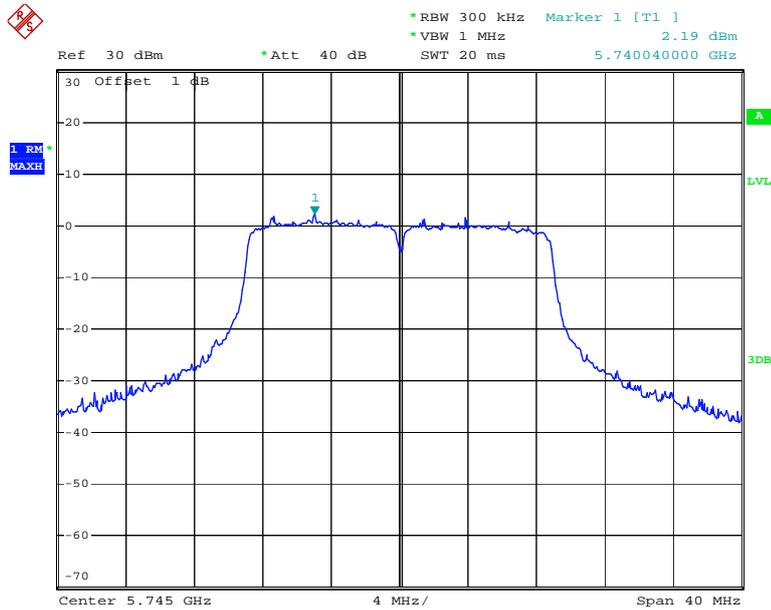


Date: 21.SEP.2016 13:59:21

### 802.11n ht20 Middle Channel

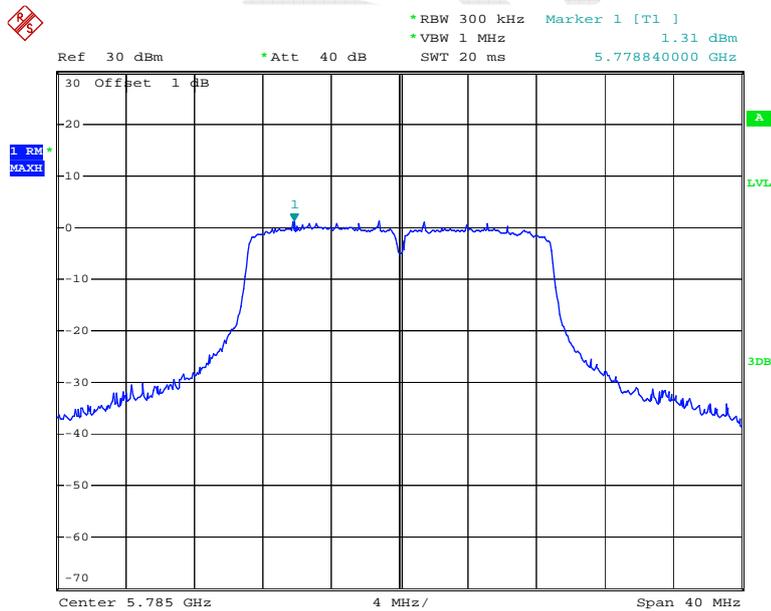


Date: 21.SEP.2016 13:57:40

### 802.11n ht20 High Channel

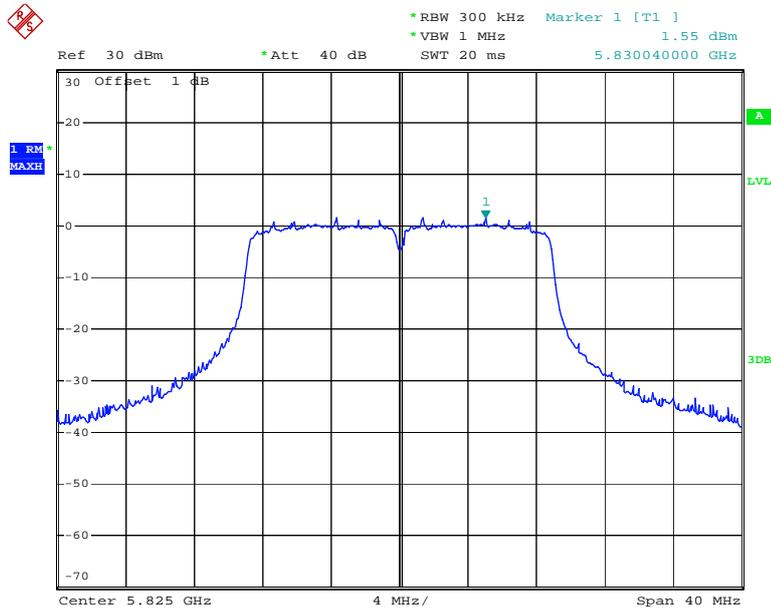


Date: 21.SEP.2016 13:55:51

### 10MHz, Low Channel

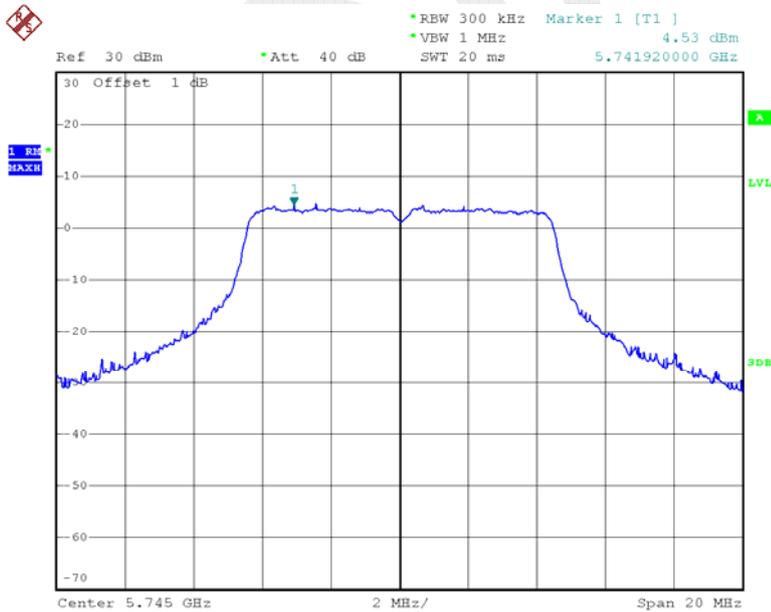


Date: 21.SEP.2016 15:40:32

### 10MHz,Middle Channel

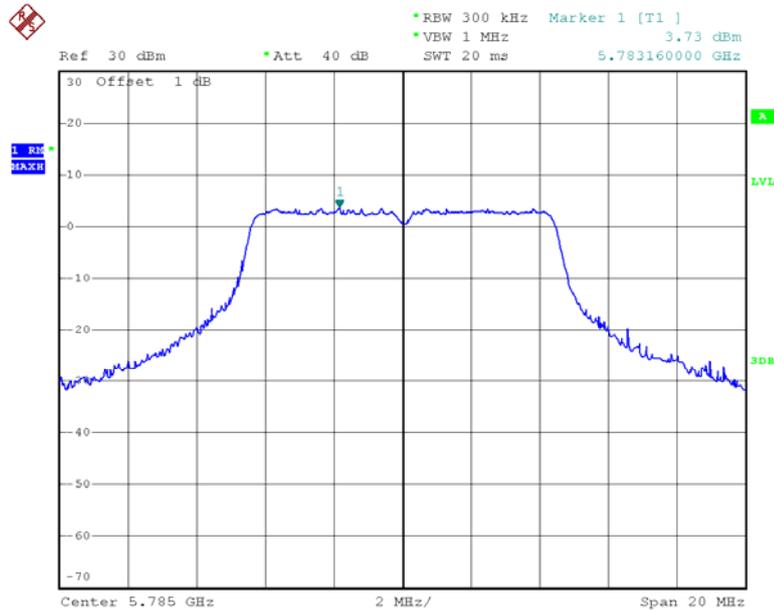


Date: 21.SEP.2016 15:39:54

### 10MHz,High Channel

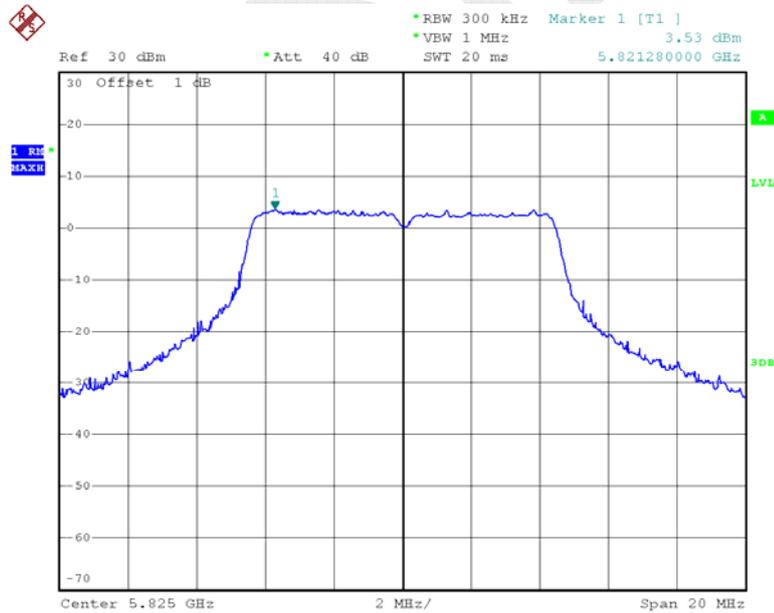


Date: 21.SEP.2016 15:40:13

### LB,Low Channel

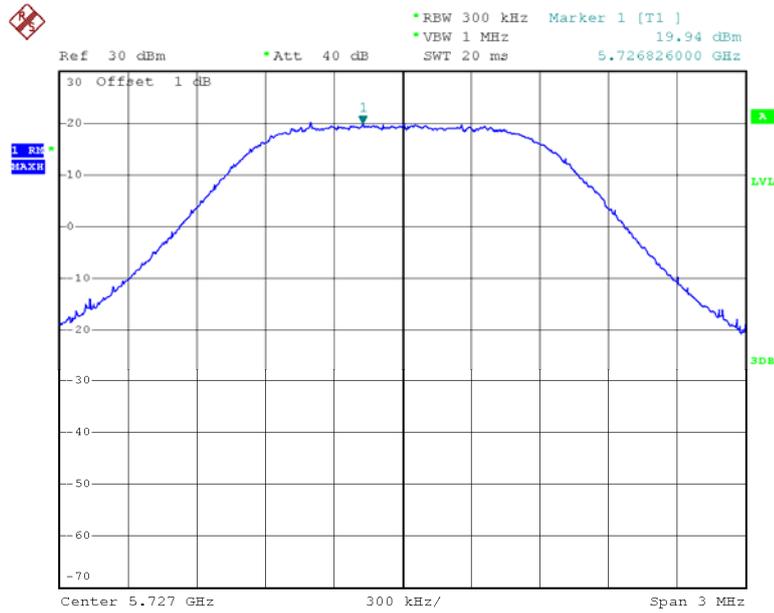


Date: 23.SEP.2016 13:43:49

### LB, Middle Channel

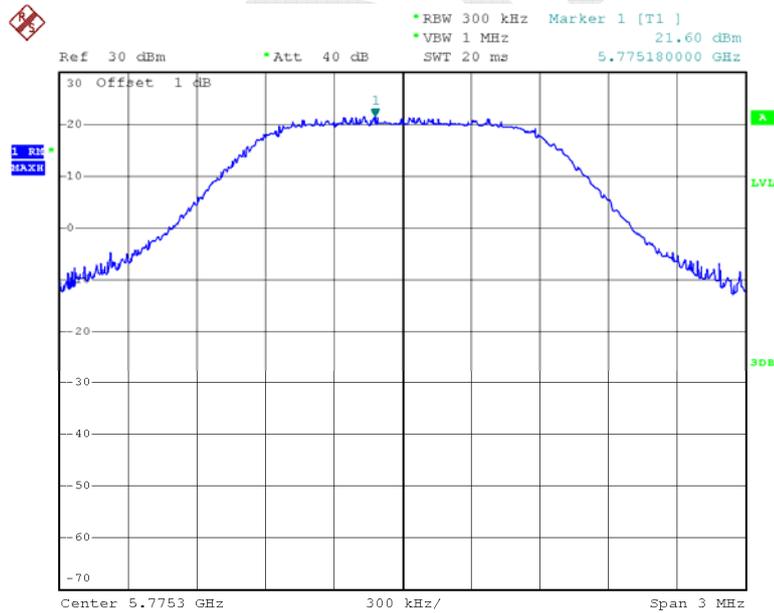

Date: 23.SEP.2016 13:44:14

### LB,High Channel

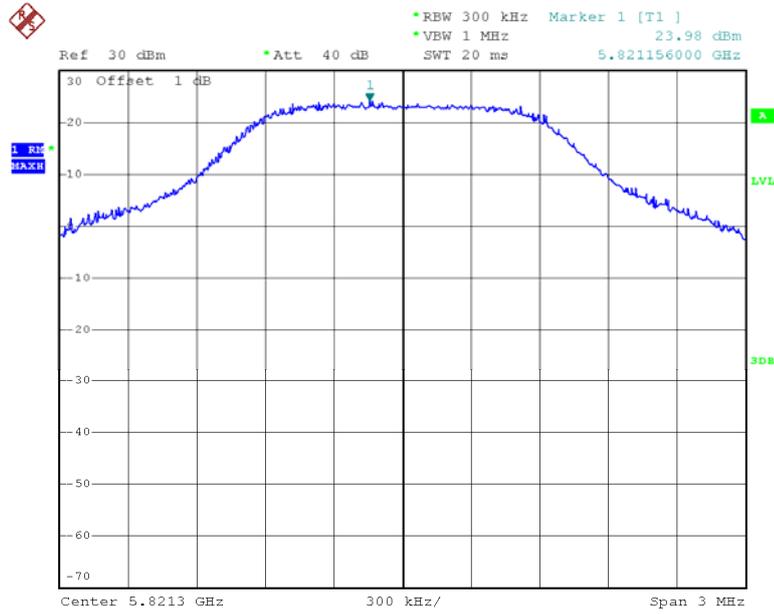

Date: 23.SEP.2016 13:45:45

\*\*\*\*\* END OF REPORT \*\*\*\*\*