

Test Plot 1#: LB 2.4G_Handheld Right_Middle_0mm_2017/07/08**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: 2.4G LB; Frequency: 2441.4 MHz; Duty Cycle: 1:6.45

Medium parameters used: $f = 2441.4$ MHz; $\sigma = 1.894$ S/m; $\epsilon_r = 53.256$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (151x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.081 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.392 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.145 W/kg

SAR(1 g) = 0.03 W/kg; SAR(10 g) = 0.02 W/kg

Maximum value of SAR (measured) = 0.05 W/kg

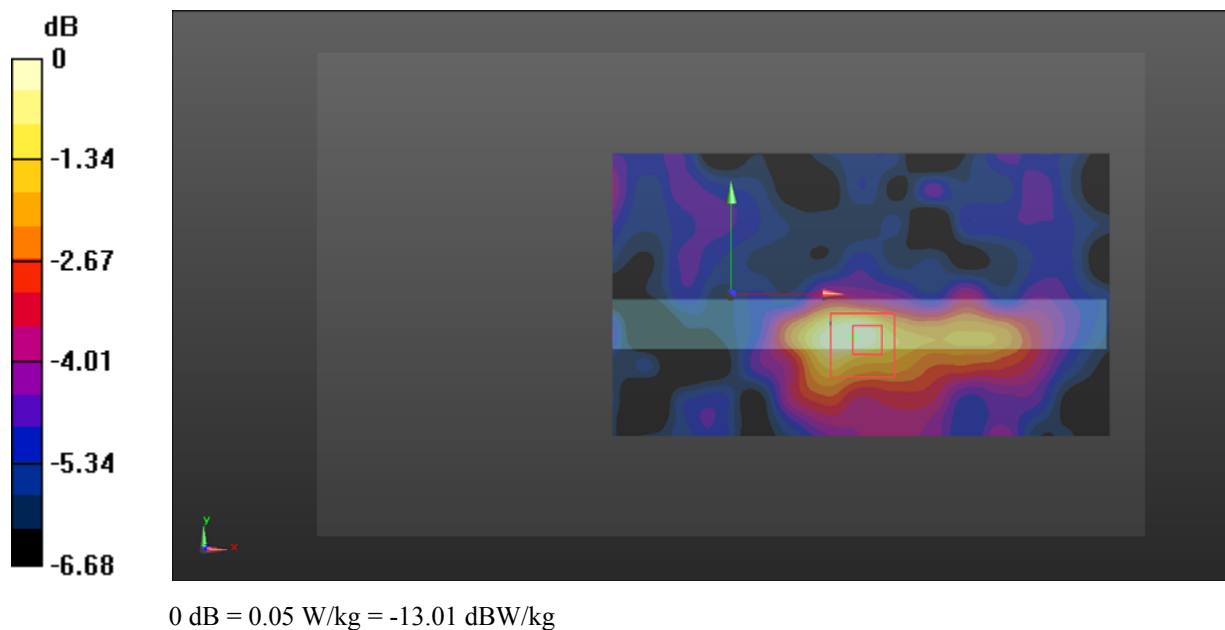

Test Plot 2#: LB 5.8G_ Handheld Right_Middle_0mm_2017/07/08**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: 5.8G LB; Frequency: 5775.3 MHz; Duty Cycle: 1:6.76

Medium parameters used: $f = 5775.3$ MHz; $\sigma = 5.883$ S/m; $\epsilon_r = 49.531$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (181x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.137 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.802 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.290 W/kg

SAR(1 g) = 0.12 W/kg; SAR(10 g) = 0.07 W/kg

Maximum value of SAR (measured) = 0.160 W/kg

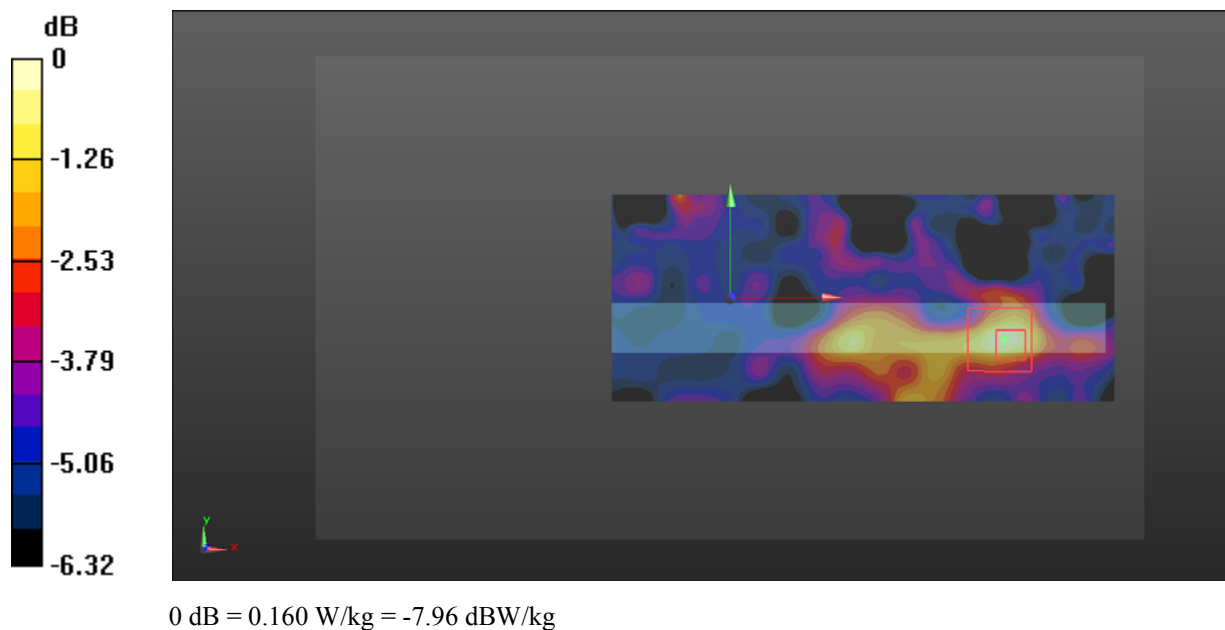

Test Plot 3#: WLAN 2.4G_Handheld-Top_Middle_0mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: DTS 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 54.415$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.452 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.193 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.629 W/kg

SAR(1 g) = 0.289 W/kg; SAR(10 g) = 0.140 W/kg

Maximum value of SAR (measured) = 0.492 W/kg

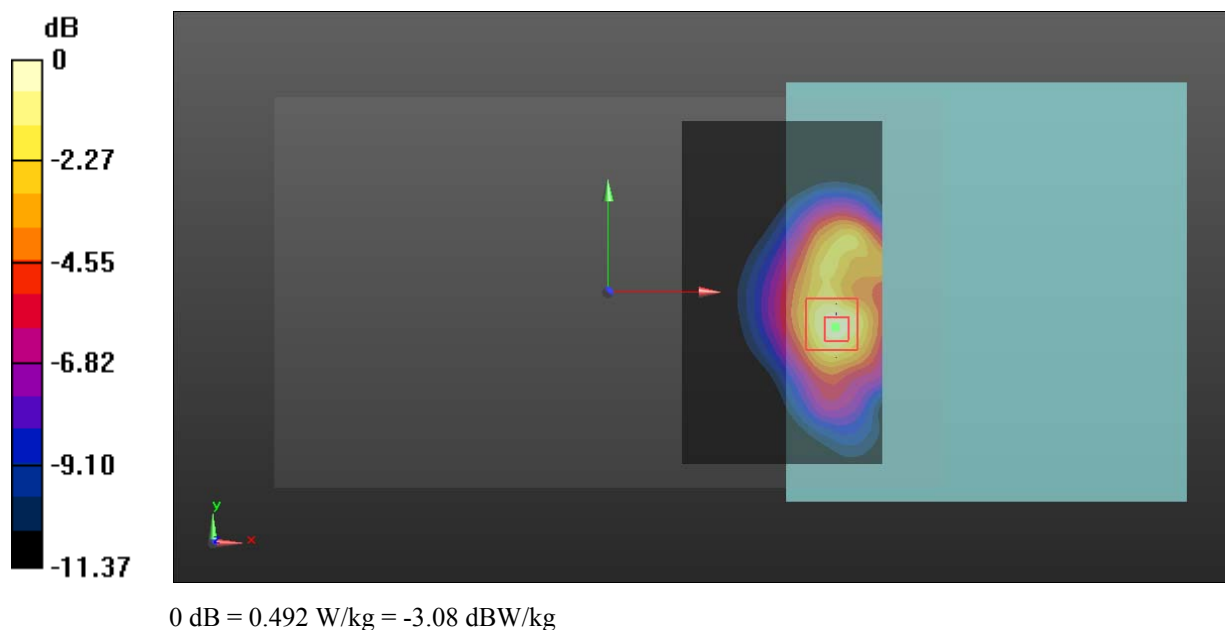

Test Plot 4#: WLAN 2.4G_Close to Body-Top_Middle_10mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: DTS 2.4 GHz; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2437$ MHz; $\sigma = 1.879$ S/m; $\epsilon_r = 54.415$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(7.67, 7.67, 7.67); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (71x121x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.732 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 0.195 W/kg

SAR(1 g) = 0.099 W/kg; SAR(10 g) = 0.056 W/kg

Maximum value of SAR (measured) = 0.151 W/kg

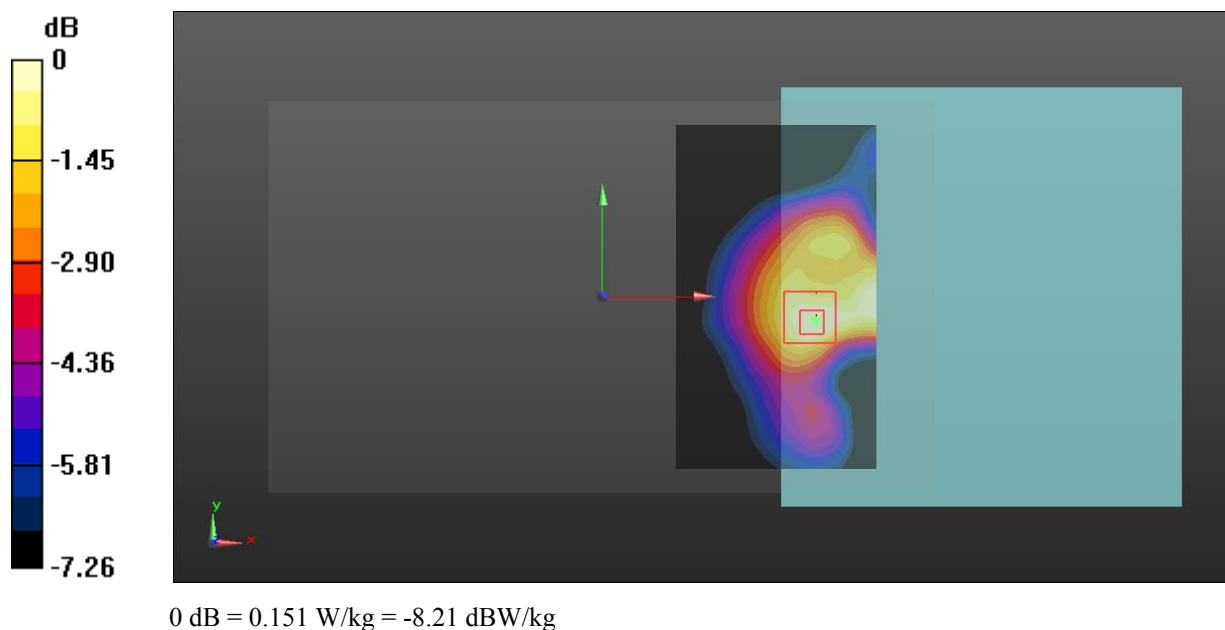

Test Plot 5#: NII 5.8G_Handheld-Top_Middle_0mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: NII 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.779$ S/m; $\epsilon_r = 48.753$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 11.2 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.942 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 18.0 W/kg

SAR(1 g) = 4.46 W/kg; SAR(10 g) = 1.32 W/kg

Maximum value of SAR (measured) = 10.9 W/kg

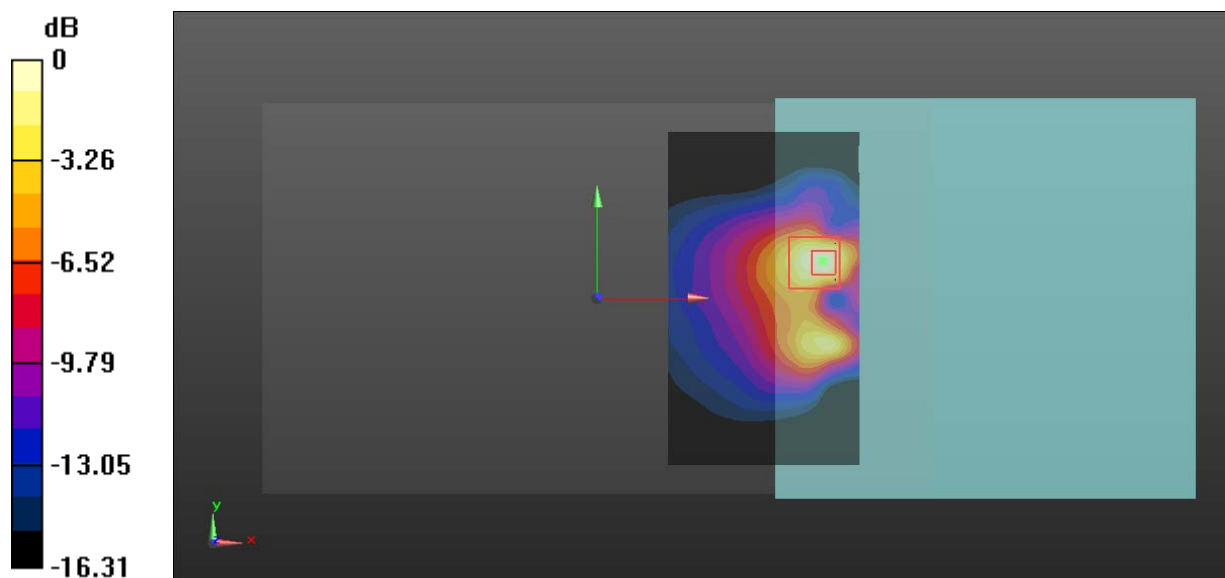

0 dB = 10.9 W/kg = 10.37 dBW/kg

Test Plot 6#: NII 5.8G_Close to Body-Top_Low_10mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: NII 5.8 GHz; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.763$ S/m; $\epsilon_r = 48.765$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x141x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 1.88 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=2$ mm

Reference Value = 4.828 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.35 W/kg

SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.509 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

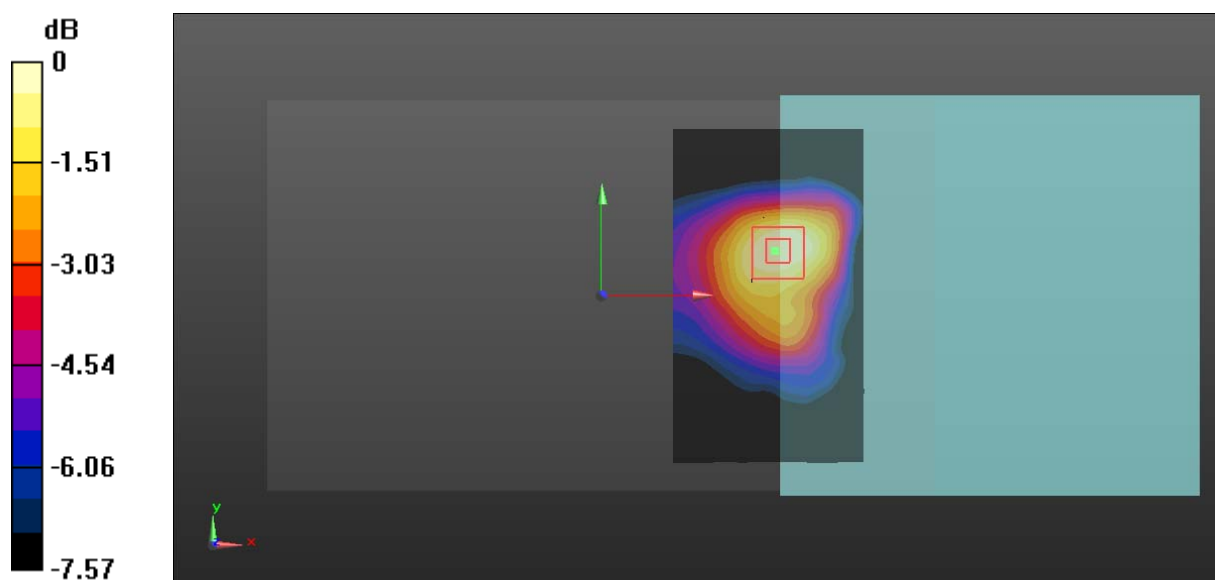

0 dB = 1.96 W/kg = 2.92 dBW/kg

Test Plot 7#: NII 5.8G_Close to Body-Top_Middle_10mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**


Communication System: NII 5.8 GHz; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.779 \text{ S/m}$; $\epsilon_r = 48.753$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

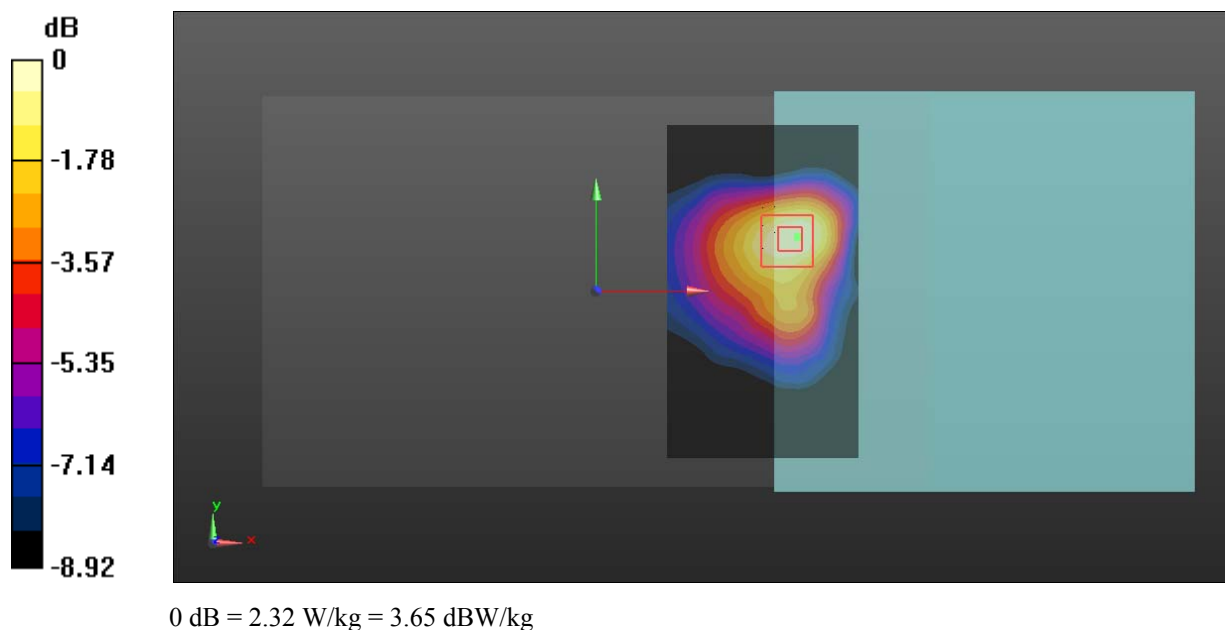Area Scan (81x141x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 2.13 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 4.310 V/m ; Power Drift = 0.12 dB Peak SAR (extrapolated) = 3.55 W/kg **SAR(1 g) = 1.12 W/kg ; SAR(10 g) = 0.515 W/kg** Maximum value of SAR (measured) = 2.32 W/kg 

Test Plot 8#: NII 5.8G_Close to Body-Top_High_10mm_2017/08/27**DUT: Cendence; Type: GL800A; Serial: 17070700220**

Communication System: NII 5.8 GHz; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.806$ S/m; $\epsilon_r = 48.853$; $\rho = 1000$ kg/m³

Phantom section: Center Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7441; ConvF(4.48, 4.48, 4.48); Calibrated: 2016/11/15;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn379; Calibrated: 2016/10/4
- Phantom: Triple Flat Phantom 5.1C; Type: QD 000 P51 CA; Serial: 1130
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (81x141x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.27 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 4.130 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 3.82 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.527 W/kg

Maximum value of SAR (measured) = 2.33 W/kg

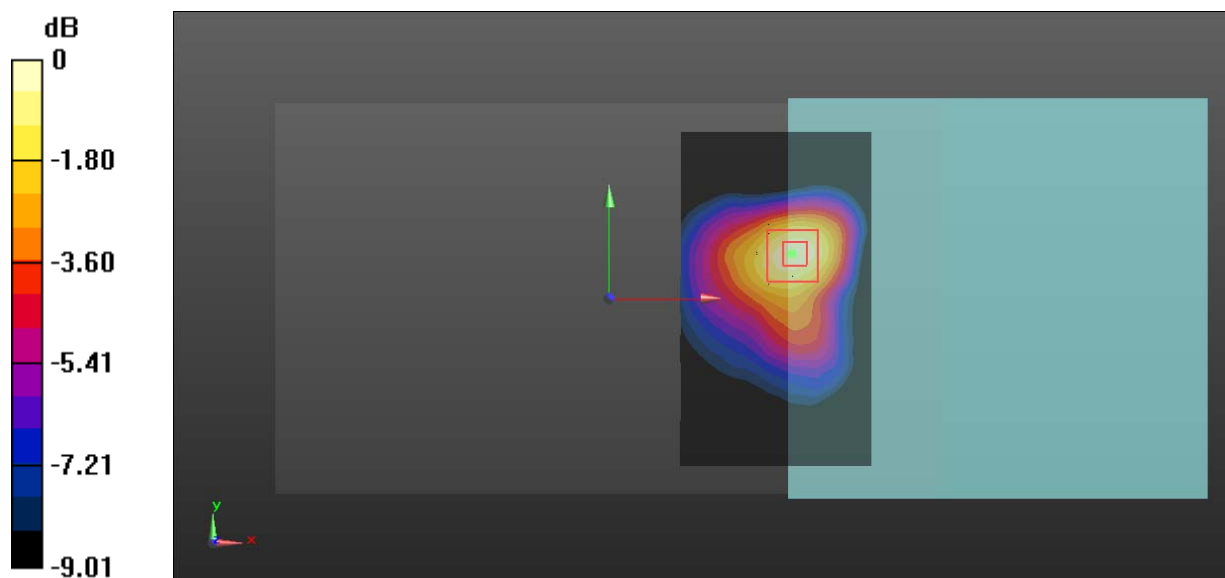

0 dB = 2.33 W/kg = 3.67 dBW/kg