



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019

RSS-247, ISSUE 2, FEBRUARY 2017

TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-M3001910

IC: 11805A-M3001910

Report Type: Original Report	Product Name: Matrice 300 RTK
Report Number: RDG191226014-00A	
Report Date: 2020-02-28	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
DECLARATIONS	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	7
EQUIPMENT MODIFICATIONS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	12
APPLICABLE STANDARD	12
RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION	13
APPLICABLE STANDARD	13
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.209, §15.205 & §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS.....	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	17
TEST PROCEDURE	17
CORRECTED AMPLITUDE & MARGIN CALCULATION	17
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	18
FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) &RSS-GEN CLAUSE 6.7–6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	36
APPLICABLE STANDARD	36
TEST PROCEDURE	37
TEST EQUIPMENT LIST AND DETAILS.....	37
TEST DATA	37
FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D - MAXIMUM PEAK CONDUCTED OUTPUT POWER	55
APPLICABLE STANDARD	55
TEST PROCEDURE	55
TEST EQUIPMENT LIST AND DETAILS.....	55
TEST DATA	56
FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58

TEST EQUIPMENT LIST AND DETAILS.....	59
TEST DATA	59
FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY	70
APPLICABLE STANDARD	70
TEST PROCEDURE	70
TEST EQUIPMENT LIST AND DETAILS.....	70
TEST DATA	70

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Matrice 300 RTK
EUT Model:	M300
Operation Frequency:	1.4M: 2403.5-2477.5 MHz 3M: 2405.5-2474.5 MHz 10M: 2405.5-2477.5 MHz 20M: 2410.5-2472.5 MHz 40M: 2420.5-2462.5 MHz
Maximum Peak Output Power (Conducted):	1.4M: 26.78 dBm 3M: 26.76 dBm 10M: 26.45 dBm 20M: 22.54 dBm 40M: 12.80 dBm
Modulation Type:	OFDM
Rated Input Voltage:	52.8Vdc from battery
Serial Number:	RDG191226014-RF-S4
EUT Received Date:	2020.12.25
EUT Received Status:	Good

Objective

This report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine the compliance of the EUT with FCC Rules Part 15-Subpart C, section 15.203, 15.205, 15.209 and 15.247 rules, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15E NII submissions with FCC ID: SS3-M3001910

RSS-247 submissions with IC: 11805A-M3001910

Part of system submissions with FCC ID: SS3-RM500E1910, IC: 11805A-RM500E1910.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And 558074 D01 15.247 Meas Guidance v05r02, RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The EUT has 2 antennas, for 1.4MHz, 3MHz modes, the system configure 1T1R depending on better performance by the system automatically recognizes.

For 1.4M mode, 38 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403.5	20	2441.5
2	2405.5	...	...
...	...	...	...
...	...	...	...
...	...	37	2475.5
19	2439.5	38	2477.5

3channels were tested: 2403.5MHz, 2441.5MHz and 2477.5MHz

For 3M mode, 24 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405.5	13	2441.5
2	2408.5	...	...
...	...	...	...
...	...	...	...
...	...	23	2471.5
12	2438.5	24	2474.5

3channels were tested: 2405.5MHz, 2441.5MHz and 2474.5MHz

For 10MHz, 20MHz, 40MHz modes, All modes support SISO and MIMO. All test item test with SISO and MIMO mode except bandwidth test.

For 10M mode, 73 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2405.5	38	2442.5
2	2406.5	...	...
...	...	...	...
...	...	72	2476.5
..	...	73	2477.5
37	2441.5	/	/

For 20M mode, 63 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2410.5	33	2442.5
2	2411.5	...	...
...	...	...	...
...	...	62	2471.5
..	...	63	2472.5
32	2441.5	/	/

For 40M mode, 43 channels are provided for testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2420.5	23	2442.5
2	2421.5	...	...
...	...	...	...
...	...	42	2461.5
..	...	43	2462.5
22	2441.5	/	/

EUT Exercise Software

The software “DjiSdrConsole.exe” was used for testing, which was provided by manufacturer.

For 1.4M and 3M modes, the maximum power was configured as below table, that provided by the manufacturer:


Mode	Channel	Frequency (MHz)	Power Level Setting	
			Chain 0	Chain 1
1.4M	Low	2403.5	11	10
	Middle	2441.5	10	10
	High	2477.5	9	9
3M	Low	2405.5	11	10
	Middle	2441.5	11	10
	High	2474.5	11	10

For 10M/20M,40M modes, the power was configured as default setting. Per pretest the conducted output power, the power in difference power level, all test items performed at Low, Middle and High Channel, except Conducted Output Power pretest all channel and reported the channels power with 3dBc different, conducted bandedge test with all channels have difference power level with maximum power.

The maximum duty cycle as following table:


Test mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
1.4M	100	100	100
3M	100	100	100
10M	100	100	100
20M	100	100	100
40M	100	100	100

1.4M

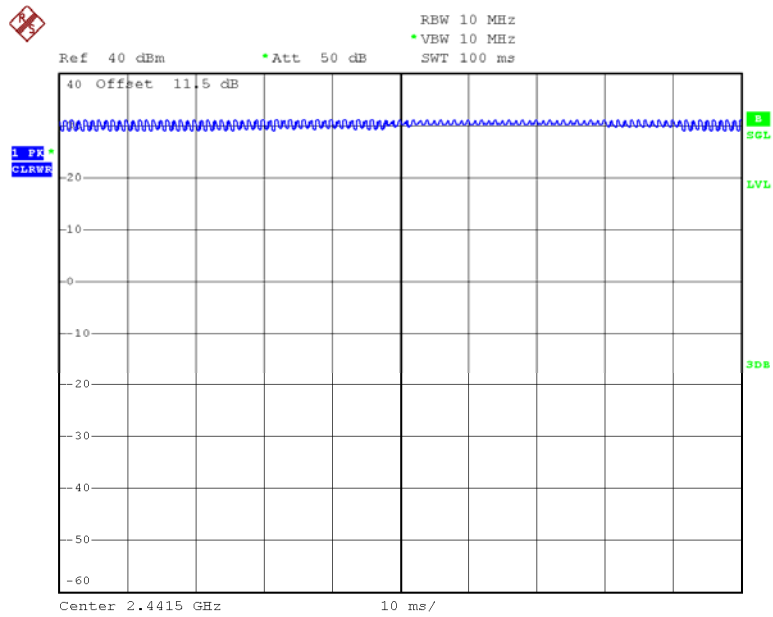


Date: 16.JAN.2020 10:25:55

3M

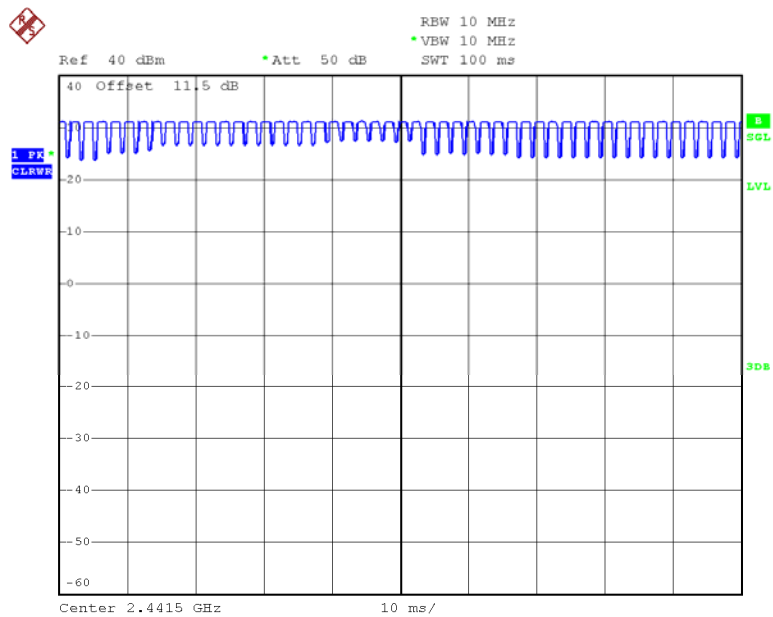


Date: 16.JAN.2020 10:26:28

10M

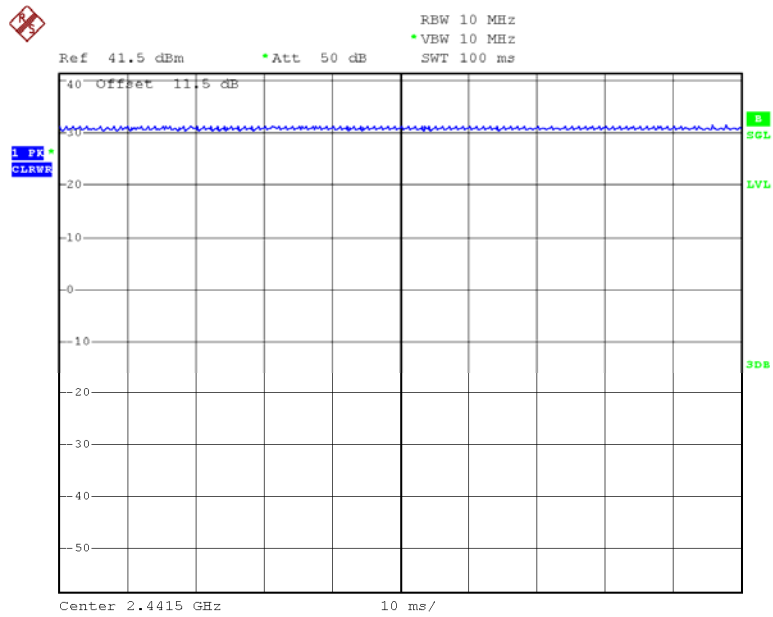


Date: 16.JAN.2020 10:13:23

20M

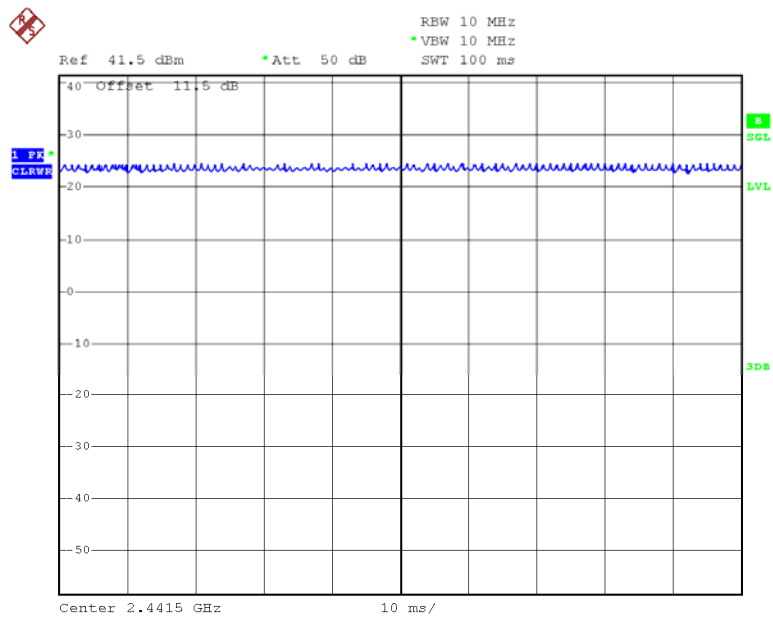

Date: 16.JAN.2020 10:13:59

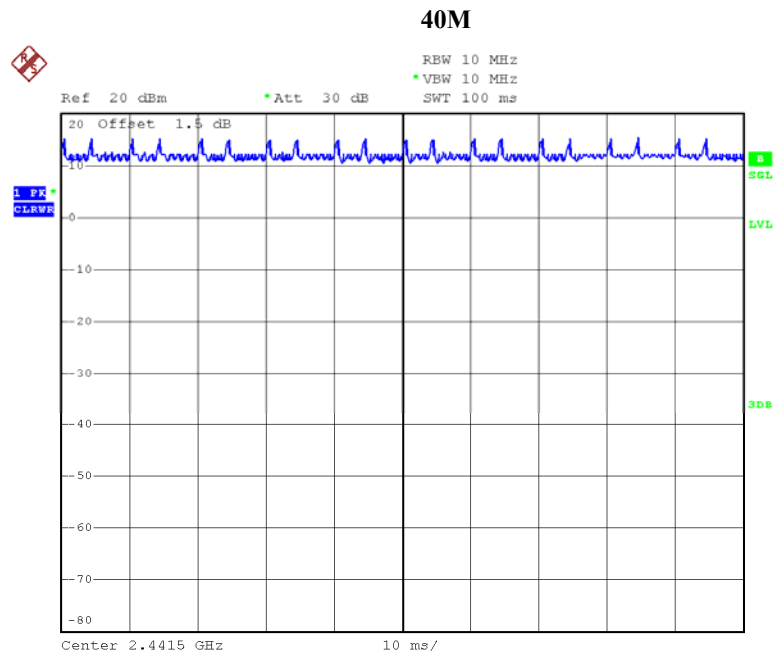


Date: 21.JAN.2020 14:48:14

Equipment Modifications

No modification was made to the EUT.

Block Diagram of Test Setup

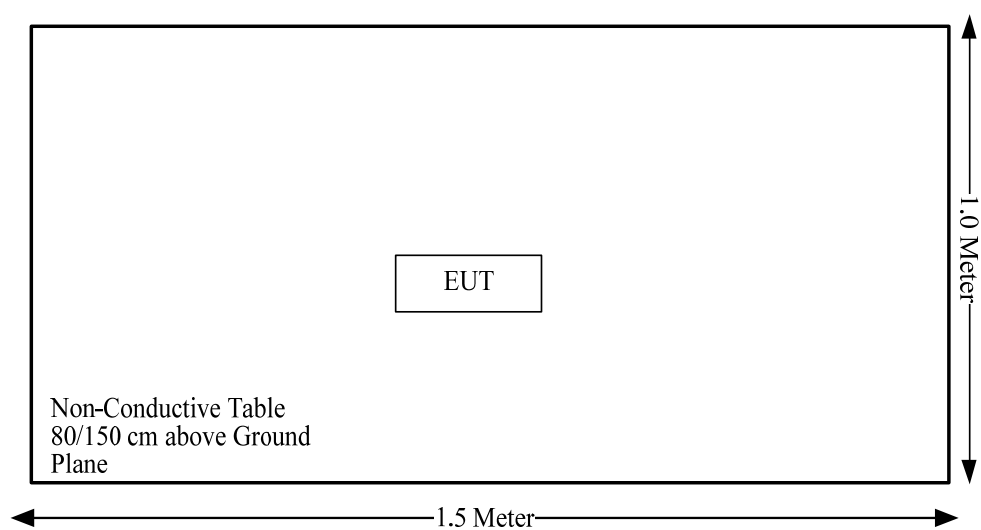

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.247 (i) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
RSS-102 Clause 2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliance
FCC §15.203, RSS-GEN Clause 6.8	Antenna Requirement	Compliance
FCC §15.207 (a); RSS-Gen Clause 8.8	AC Line Conducted Emissions	Not Applicable
FCC §15.205, §15.209, §15.247(d); RSS-247 Clause 5.5 RSS-Gen Clause 8.10	Spurious Emissions	Compliance
FCC §15.247 (a)(2); RSS-247 Clause 5.2 a) RSS-Gen Clause 6.7	6 dB Bandwidth and 99% Occupied Bandwidth	Compliance
FCC §15.247(b)(3); RSS-247 Clause 5.4 d)	Maximum Conducted Output Power	Compliance
FCC §15.247(d); RSS-247 Clause 5.5	100 kHz Bandwidth of Frequency Band Edge	Compliance
FCC §15.247(e) RSS-247 Clause 5.2 b)	Power Spectral Density	Compliance

Not Applicable: the device was powered by battery when operation.

FCC §15.247 (i) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
1.4M	2403.5-2477.5	2.32	1.71	27	501.19	20.00	0.17	1.0
3M	2405.5-2474.5	2.32	1.71	27	501.19	20.00	0.17	1.0
10M	2405.5-2477.5	2.32	1.71	27	501.19	20.00	0.17	1.0
20M	2410.5-2472.5	2.32	1.71	23	199.53	20.00	0.07	1.0
40M	2420.5-2462.5	2.32	1.71	13	19.95	20.00	0.01	1.0

Note:

The Max. Target Power including Tolerance was declared by manufacturer.

None of these 2.4GHz band or 5.8GHz band modes can transmit Simultaneously.

Result: The device meet FCC MPE at 20 cm distance

RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION

Applicable Standard

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $4.49/f^{0.5}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain	Conducted output power including Tune-up Tolerance	EIRP		Exemption limits (W)
		(dBi)	(dBm)	(dBm)	(W)	
1.4M	2403.5-2477.5	2.32	27	29.32	0.86	5.35
3M	2405.5-2474.5	2.32	27	29.32	0.86	5.36
10M	2405.5-2477.5	2.32	27	29.32	0.86	5.36
20M	2410.5-2472.5	2.32	23	25.32	0.34	5.36
40M	2420.5-2462.5	2.32	13	15.32	0.03	5.38

Note:

The Max. Target Power including Tolerance was declared by manufacturer.

None of these 2.4GHz band or 5.8GHz band modes can transmit Simultaneously.

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

Result: Compliance

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal PCB antenna arrangement , fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Chain	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
0	PCB	50	2.32 dBi/2.4~2.5GHz 2.44 dBi/5.15~5.85GHz
1	PCB	50	2.32 dBi/2.4~2.5GHz 2.44 dBi/5.15~5.85GHz

Result: Compliance.


FCC §15.209, §15.205 & §15.247(d), RSS-247 CLAUSE 5.5, RSS-GEN CLAUSE 8.10 - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205; RSS-247 §5.5, RSS-GEN §8.10.

EUT Setup

Below 1GHz:

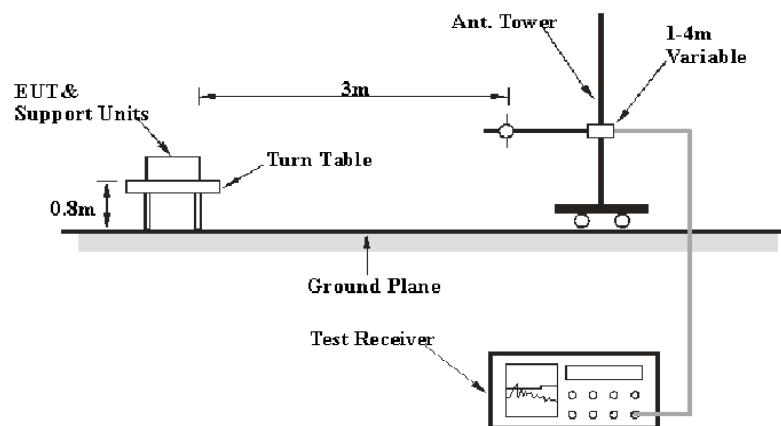

Above 1GHz:

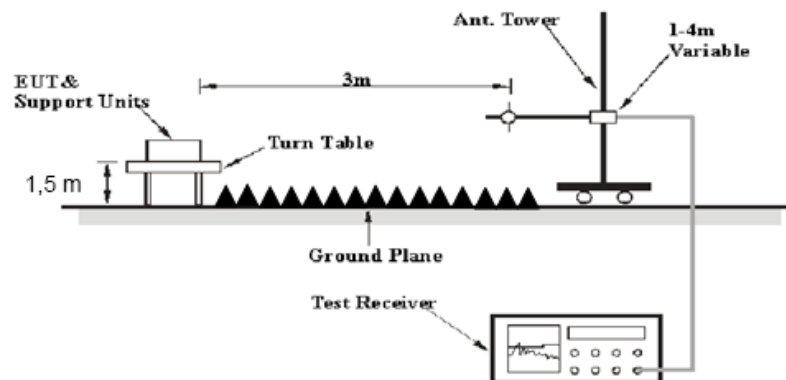

The radiated emission Below 1GHz tests were performed in the 3 meters chamber A, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.247 and RSS-247, RSS-Gen limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 25GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
AV	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation Below 1GHz					
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Radiation Above 1GHz					
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5-S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.6~25.0°C
Relative Humidity:	41~43%
ATM Pressure:	101.7~102.4kPa


* The testing was performed by Vern Shen on 2020-01-08 & 2020-02-12.

Test Result: Compliance, please Refer to the following data


Test Mode: Transmitting

1) 30MHz-1GHz(3M mode chain 1 middle channel was the worst)

Horizontal:

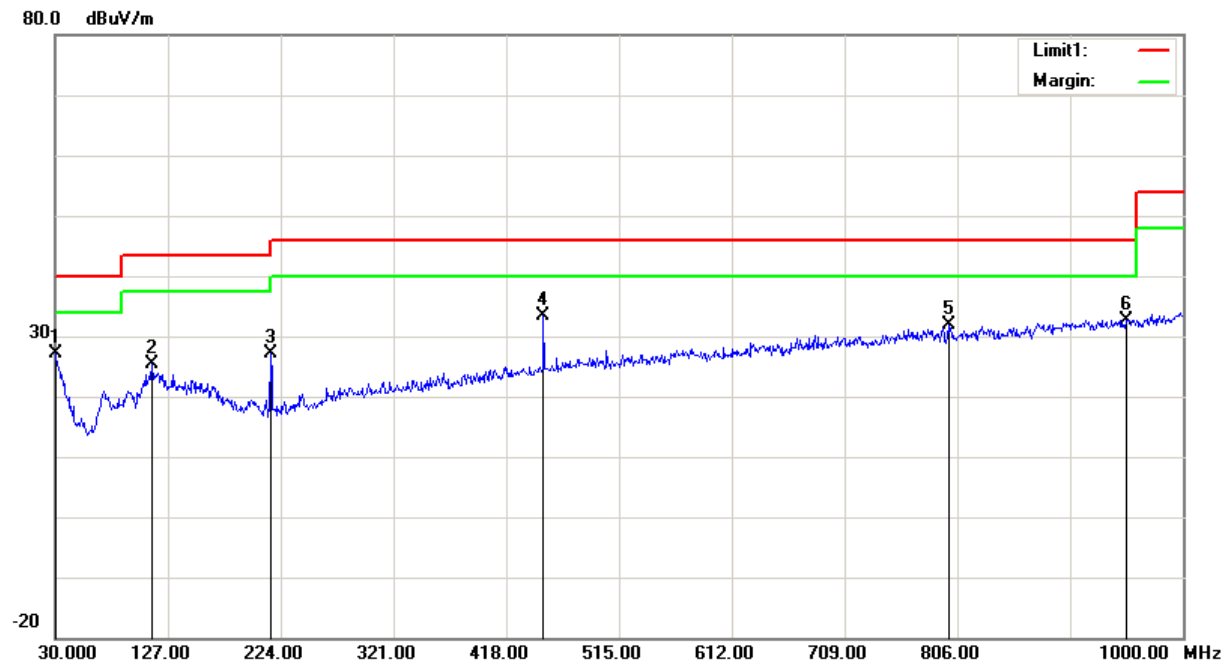

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.0000	25.37	peak	1.72	27.09	40.00	12.91
113.4200	30.95	peak	-5.55	25.40	43.50	18.10
215.2700	34.30	peak	-7.20	27.10	43.50	16.40
450.0100	34.51	peak	-1.17	33.34	46.00	12.66
798.2400	27.42	peak	4.37	31.79	46.00	14.21
951.5000	31.86	peak	0.85	32.71	46.00	13.29

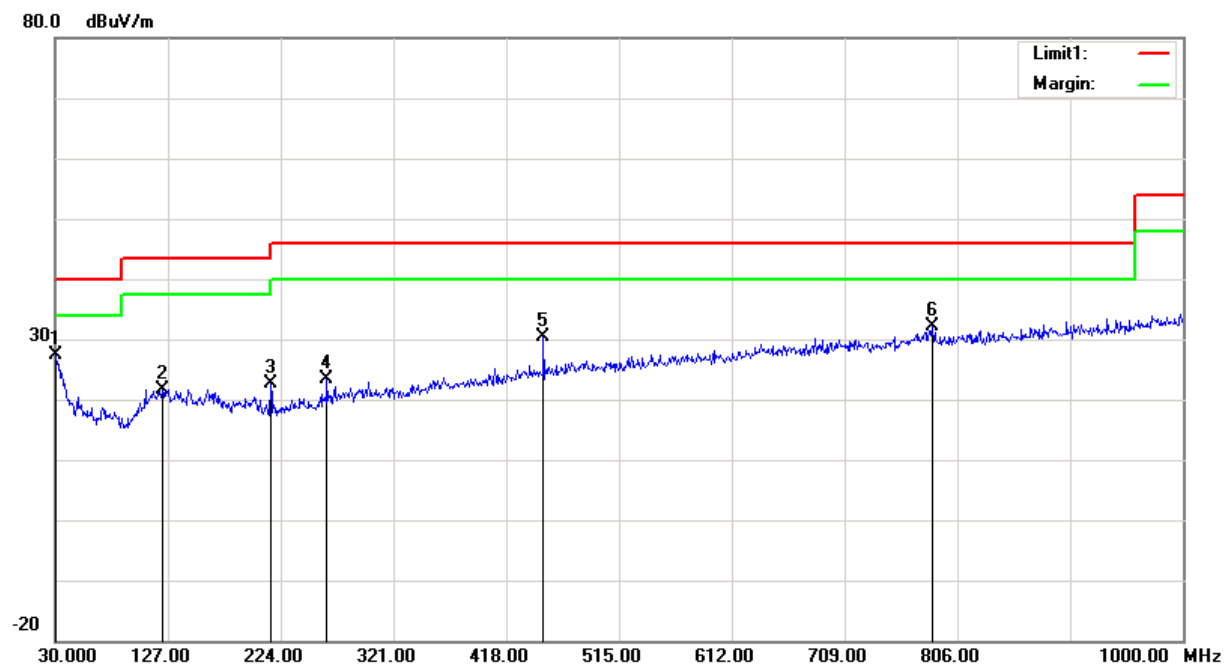Vertical:

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	26.42	peak	0.91	27.33	40.00	12.67
122.1500	26.24	peak	-4.57	21.67	43.50	21.83
215.2700	29.80	peak	-7.20	22.60	43.50	20.90
263.7700	27.90	peak	-4.63	23.27	46.00	22.73
450.0100	31.44	peak	-1.17	30.27	46.00	15.73
784.6600	27.81	peak	4.39	32.20	46.00	13.80

2) 1-25GHz:
1.4M Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2403.5 MHz									
2403.50	89.42	PK	H	28.11	1.80	0.00	119.33	N/A	N/A
2403.50	80.33	AV	H	28.11	1.80	0.00	110.24	N/A	N/A
2403.50	95.43	PK	V	28.11	1.80	0.00	125.34	N/A	N/A
2403.50	85.49	AV	V	28.11	1.80	0.00	115.40	N/A	N/A
2390.00	30.34	PK	V	28.08	1.80	0.00	60.22	74.00	13.78
2390.00	19.08	AV	V	28.08	1.80	0.00	48.96	54.00	5.04
4807.00	48.24	PK	V	32.91	3.17	25.60	58.72	74.00	15.28
4807.00	31.05	AV	V	32.91	3.17	25.60	41.53	54.00	12.47
7210.50	39.60	PK	V	35.75	4.81	25.61	54.55	74.00	19.45
7210.50	23.65	AV	V	35.75	4.81	25.61	38.60	54.00	15.40
Middle Channel: 2441.5 MHz									
2441.50	90.05	PK	H	28.18	1.82	0.00	120.05	N/A	N/A
2441.50	80.45	AV	H	28.18	1.82	0.00	110.45	N/A	N/A
2441.50	96.14	PK	V	28.18	1.82	0.00	126.14	N/A	N/A
2441.50	86.27	AV	V	28.18	1.82	0.00	116.27	N/A	N/A
4883.00	48.68	PK	V	33.07	3.28	25.66	59.37	74.00	14.63
4883.00	31.60	AV	V	33.07	3.28	25.66	42.29	54.00	11.71
7324.50	40.50	PK	V	36.04	4.62	25.73	55.43	74.00	18.57
7324.50	22.30	AV	V	36.04	4.62	25.73	37.23	54.00	16.77
High Channel: 2477.5 MHz									
2477.50	90.56	PK	H	28.26	1.84	0.00	120.66	N/A	N/A
2477.50	80.12	AV	H	28.26	1.84	0.00	110.22	N/A	N/A
2477.50	96.01	PK	V	28.26	1.84	0.00	126.11	N/A	N/A
2477.50	86.55	AV	V	28.26	1.84	0.00	116.65	N/A	N/A
2483.50	36.79	PK	V	28.27	1.84	0.00	66.90	74.00	7.10
2483.50	20.97	AV	V	28.27	1.84	0.00	51.08	54.00	2.92
4955.00	48.95	PK	V	33.21	3.23	25.63	59.76	74.00	14.24
4955.00	30.89	AV	V	33.21	3.23	25.63	41.70	54.00	12.30
7432.50	41.04	PK	V	36.32	4.43	25.84	55.95	74.00	18.05
7432.50	23.94	AV	V	36.32	4.43	25.84	38.85	54.00	15.15

1.4M Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2403.5 MHz									
2403.50	89.09	PK	H	28.11	1.80	0.00	119.00	N/A	N/A
2403.50	80.24	AV	H	28.11	1.80	0.00	110.15	N/A	N/A
2403.50	96.47	PK	V	28.11	1.80	0.00	126.38	N/A	N/A
2403.50	85.60	AV	V	28.11	1.80	0.00	115.51	N/A	N/A
2390.00	32.88	PK	V	28.08	1.80	0.00	62.76	74.00	11.24
2390.00	20.83	AV	V	28.08	1.80	0.00	50.71	54.00	3.29
4807.00	49.10	PK	V	32.91	3.17	25.60	59.58	74.00	14.42
4807.00	31.62	AV	V	32.91	3.17	25.60	42.10	54.00	11.90
7210.50	39.19	PK	V	35.75	4.81	25.61	54.14	74.00	19.86
7210.50	22.97	AV	V	35.75	4.81	25.61	37.92	54.00	16.08
Middle Channel: 2441.5 MHz									
2441.50	90.12	PK	H	28.18	1.82	0.00	120.12	N/A	N/A
2441.50	80.63	AV	H	28.18	1.82	0.00	110.63	N/A	N/A
2441.50	96.20	PK	V	28.18	1.82	0.00	126.20	N/A	N/A
2441.50	86.32	AV	V	28.18	1.82	0.00	116.32	N/A	N/A
4883.00	48.61	PK	V	33.07	3.28	25.66	59.30	74.00	14.70
4883.00	31.92	AV	V	33.07	3.28	25.66	42.61	54.00	11.39
7324.50	38.50	PK	V	36.04	4.62	25.73	53.43	74.00	20.57
7324.50	22.64	AV	V	36.04	4.62	25.73	37.57	54.00	16.43
High Channel: 2477.5 MHz									
2477.50	89.79	PK	H	28.26	1.84	0.00	119.89	N/A	N/A
2477.50	80.26	AV	H	28.26	1.84	0.00	110.36	N/A	N/A
2477.50	94.44	PK	V	28.26	1.84	0.00	124.54	N/A	N/A
2477.50	85.36	AV	V	28.26	1.84	0.00	115.46	N/A	N/A
2483.50	31.56	PK	V	28.27	1.84	0.00	61.67	74.00	12.33
2483.50	20.30	AV	V	28.27	1.84	0.00	50.41	54.00	3.59
4955.00	48.97	PK	V	33.21	3.23	25.63	59.78	74.00	14.22
4955.00	30.93	AV	V	33.21	3.23	25.63	41.74	54.00	12.26
7432.50	41.20	PK	V	36.32	4.43	25.84	56.11	74.00	17.89
7432.50	24.00	AV	V	36.32	4.43	25.84	38.91	54.00	15.09

3M Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2405.5 MHz									
2405.50	90.22	PK	H	28.11	1.80	0.00	120.13	N/A	N/A
2405.50	75.84	AV	H	28.11	1.80	0.00	105.75	N/A	N/A
2405.50	95.48	PK	V	28.11	1.80	0.00	125.39	N/A	N/A
2405.50	80.58	AV	V	28.11	1.80	0.00	110.49	N/A	N/A
2390.00	31.80	PK	V	28.08	1.80	0.00	61.68	74.00	12.32
2390.00	20.21	AV	V	28.08	1.80	0.00	50.09	54.00	3.91
4811.00	47.57	PK	V	32.92	3.18	25.61	58.06	74.00	15.94
4811.00	31.27	AV	V	32.92	3.18	25.61	41.76	54.00	12.24
7216.50	38.31	PK	V	35.76	4.80	25.62	53.25	74.00	20.75
7216.50	23.48	AV	V	35.76	4.80	25.62	38.42	54.00	15.58
Middle Channel: 2441.5 MHz									
2441.50	89.50	PK	H	28.18	1.82	0.00	119.50	N/A	N/A
2441.50	75.10	AV	H	28.18	1.82	0.00	105.10	N/A	N/A
2441.50	95.81	PK	V	28.18	1.82	0.00	125.81	N/A	N/A
2441.50	79.44	AV	V	28.18	1.82	0.00	109.44	N/A	N/A
4883.00	47.58	PK	V	33.07	3.28	25.66	58.27	74.00	15.73
4883.00	31.41	AV	V	33.07	3.28	25.66	42.10	54.00	11.90
7324.50	40.14	PK	V	36.04	4.62	25.73	55.07	74.00	18.93
7324.50	23.81	AV	V	36.04	4.62	25.73	38.74	54.00	15.26
High Channel: 2474.5 MHz									
2474.50	88.29	PK	H	28.25	1.84	0.00	118.38	N/A	N/A
2474.50	74.14	AV	H	28.25	1.84	0.00	104.23	N/A	N/A
2474.50	94.57	PK	V	28.25	1.84	0.00	124.66	N/A	N/A
2474.50	77.01	AV	V	28.25	1.84	0.00	107.10	N/A	N/A
2483.50	38.66	PK	V	28.27	1.84	0.00	68.77	74.00	5.23
2483.50	21.00	AV	V	28.27	1.84	0.00	51.11	54.00	2.89
4949.00	47.51	PK	V	33.20	3.24	25.64	58.31	74.00	15.69
4949.00	31.64	AV	V	33.20	3.24	25.64	42.44	54.00	11.56
7423.50	40.02	PK	V	36.30	4.44	25.83	54.93	74.00	19.07
7423.50	23.79	AV	V	36.30	4.44	25.83	38.70	54.00	15.30

3M Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2405.5 MHz									
2405.50	89.87	PK	H	28.11	1.80	0.00	119.78	N/A	N/A
2405.50	74.54	AV	H	28.11	1.80	0.00	104.45	N/A	N/A
2405.50	95.52	PK	V	28.11	1.80	0.00	125.43	N/A	N/A
2405.50	79.46	AV	V	28.11	1.80	0.00	109.37	N/A	N/A
2390.00	32.09	PK	V	28.08	1.80	0.00	61.97	74.00	12.03
2390.00	19.05	AV	V	28.08	1.80	0.00	48.93	54.00	5.07
4811.00	47.44	PK	V	32.92	3.18	25.61	57.93	74.00	16.07
4811.00	31.04	AV	V	32.92	3.18	25.61	41.53	54.00	12.47
7216.50	38.10	PK	V	35.76	4.80	25.62	53.04	74.00	20.96
7216.50	21.40	AV	V	35.76	4.80	25.62	36.34	54.00	17.66
Middle Channel: 2441.5 MHz									
2441.50	90.40	PK	H	28.18	1.82	0.00	120.40	N/A	N/A
2441.50	75.01	AV	H	28.18	1.82	0.00	105.01	N/A	N/A
2441.50	95.39	PK	V	28.18	1.82	0.00	125.39	N/A	N/A
2441.50	79.45	AV	V	28.18	1.82	0.00	109.45	N/A	N/A
4883.00	48.70	PK	V	33.07	3.28	25.66	59.39	74.00	14.61
4883.00	32.17	AV	V	33.07	3.28	25.66	42.86	54.00	11.14
7324.50	40.20	PK	V	36.04	4.62	25.73	55.13	74.00	18.87
7324.50	23.70	AV	V	36.04	4.62	25.73	38.63	54.00	15.37
High Channel: 2474.5 MHz									
2474.50	87.58	PK	H	28.25	1.84	0.00	117.67	N/A	N/A
2474.50	72.78	AV	H	28.25	1.84	0.00	102.87	N/A	N/A
2474.50	94.64	PK	V	28.25	1.84	0.00	124.73	N/A	N/A
2474.50	78.61	AV	V	28.25	1.84	0.00	108.70	N/A	N/A
2483.50	39.67	PK	V	28.27	1.84	0.00	69.78	74.00	4.22
2483.50	20.69	AV	V	28.27	1.84	0.00	50.80	54.00	3.20
4949.00	49.81	PK	V	33.20	3.24	25.64	60.61	74.00	13.39
4949.00	33.12	AV	V	33.20	3.24	25.64	43.92	54.00	10.08
7423.50	40.23	PK	V	36.30	4.44	25.83	55.14	74.00	18.86
7423.50	23.76	AV	V	36.30	4.44	25.83	38.67	54.00	15.33

10M Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2405.5 MHz									
2405.50	71.24	PK	H	28.11	1.80	0.00	101.15	N/A	N/A
2405.50	59.18	AV	H	28.11	1.80	0.00	89.09	N/A	N/A
2405.50	77.01	PK	V	28.11	1.80	0.00	106.92	N/A	N/A
2405.50	64.52	AV	V	28.11	1.80	0.00	94.43	N/A	N/A
2390.00	25.60	PK	V	28.08	1.80	0.00	55.48	74.00	18.52
2390.00	13.67	AV	V	28.08	1.80	0.00	43.55	54.00	10.45
4811.00	37.64	PK	V	32.92	3.18	25.61	48.13	74.00	25.87
4811.00	22.17	AV	V	32.92	3.18	25.61	32.66	54.00	21.34
7216.50	36.87	PK	V	35.76	4.80	25.62	51.81	74.00	22.19
7216.50	21.70	AV	V	35.76	4.80	25.62	36.64	54.00	17.36
Middle Channel: 2441.5 MHz									
2441.50	84.96	PK	H	28.18	1.82	0.00	114.96	N/A	N/A
2441.50	73.56	AV	H	28.18	1.82	0.00	103.56	N/A	N/A
2441.50	91.96	PK	V	28.18	1.82	0.00	121.96	N/A	N/A
2441.50	80.34	AV	V	28.18	1.82	0.00	110.34	N/A	N/A
4883.00	38.43	PK	V	33.07	3.28	25.66	49.12	74.00	24.88
4883.00	28.10	AV	V	33.07	3.28	25.66	38.79	54.00	15.21
7324.50	36.10	PK	V	36.04	4.62	25.73	51.03	74.00	22.97
7324.50	22.60	AV	V	36.04	4.62	25.73	37.53	54.00	16.47
High Channel: 2477.5 MHz									
2477.50	70.76	PK	H	28.26	1.84	0.00	100.86	N/A	N/A
2477.50	58.78	AV	H	28.26	1.84	0.00	88.88	N/A	N/A
2477.50	77.22	PK	V	28.26	1.84	0.00	107.32	N/A	N/A
2477.50	64.44	AV	V	28.26	1.84	0.00	94.54	N/A	N/A
2483.50	36.14	PK	V	28.27	1.84	0.00	66.25	74.00	7.75
2483.50	18.55	AV	V	28.27	1.84	0.00	48.66	54.00	5.34
4955.00	35.93	PK	V	33.21	3.23	25.63	46.74	74.00	27.26
4955.00	21.41	AV	V	33.21	3.23	25.63	32.22	54.00	21.78
7432.50	36.87	PK	V	36.32	4.43	25.84	51.78	74.00	22.22
7432.50	22.36	AV	V	36.32	4.43	25.84	37.27	54.00	16.73

10M Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2405.5 MHz									
2405.50	71.34	PK	H	28.11	1.80	0.00	101.25	N/A	N/A
2405.50	59.27	AV	H	28.11	1.80	0.00	89.18	N/A	N/A
2405.50	77.90	PK	V	28.11	1.80	0.00	107.81	N/A	N/A
2405.50	64.70	AV	V	28.11	1.80	0.00	94.61	N/A	N/A
2390.00	26.39	PK	V	28.08	1.80	0.00	56.27	74.00	17.73
2390.00	14.00	AV	V	28.08	1.80	0.00	43.88	54.00	10.12
4811.00	36.42	PK	V	32.92	3.18	25.61	46.91	74.00	27.09
4811.00	22.11	AV	V	32.92	3.18	25.61	32.60	54.00	21.40
7216.50	36.41	PK	V	35.76	4.80	25.62	51.35	74.00	22.65
7216.50	22.04	AV	V	35.76	4.80	25.62	36.98	54.00	17.02
Middle Channel: 2441.5 MHz									
2441.50	85.00	PK	H	28.18	1.82	0.00	115.00	N/A	N/A
2441.50	73.78	AV	H	28.18	1.82	0.00	103.78	N/A	N/A
2441.50	92.06	PK	V	28.18	1.82	0.00	122.06	N/A	N/A
2441.50	80.74	AV	V	28.18	1.82	0.00	110.74	N/A	N/A
4883.00	38.66	PK	V	33.07	3.28	25.66	49.35	74.00	24.65
4883.00	28.68	AV	V	33.07	3.28	25.66	39.37	54.00	14.63
7324.50	36.45	PK	V	36.04	4.62	25.73	51.38	74.00	22.62
7324.50	22.13	AV	V	36.04	4.62	25.73	37.06	54.00	16.94
High Channel: 2477.5 MHz									
2477.50	69.71	PK	H	28.26	1.84	0.00	99.81	N/A	N/A
2477.50	58.14	AV	H	28.26	1.84	0.00	88.24	N/A	N/A
2477.50	76.42	PK	V	28.26	1.84	0.00	106.52	N/A	N/A
2477.50	64.31	AV	V	28.26	1.84	0.00	94.41	N/A	N/A
2483.50	31.89	PK	V	28.27	1.84	0.00	62.00	74.00	12.00
2483.50	18.23	AV	V	28.27	1.84	0.00	48.34	54.00	5.66
4955.00	36.54	PK	V	33.21	3.23	25.63	47.35	74.00	26.65
4955.00	22.10	AV	V	33.21	3.23	25.63	32.91	54.00	21.09
7432.50	35.71	PK	V	36.32	4.43	25.84	50.62	74.00	23.38
7432.50	22.00	AV	V	36.32	4.43	25.84	36.91	54.00	17.09

10M Chain 0+1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2405.5 MHz									
2405.50	70.88	PK	H	28.11	1.80	0.00	100.79	N/A	N/A
2405.50	55.64	AV	H	28.11	1.80	0.00	85.55	N/A	N/A
2405.50	78.37	PK	V	28.11	1.80	0.00	108.28	N/A	N/A
2405.50	63.40	AV	V	28.11	1.80	0.00	93.31	N/A	N/A
2390.00	26.96	PK	V	28.08	1.80	0.00	56.84	74.00	17.16
2390.00	14.09	AV	V	28.08	1.80	0.00	43.97	54.00	10.03
4811.00	36.31	PK	V	32.92	3.18	25.61	46.80	74.00	27.20
4811.00	29.14	AV	V	32.92	3.18	25.61	39.63	54.00	14.37
7216.50	35.71	PK	V	35.76	4.80	25.62	50.65	74.00	23.35
7216.50	21.87	AV	V	35.76	4.80	25.62	36.81	54.00	17.19
Middle Channel: 2441.5 MHz									
2441.50	84.67	PK	H	28.18	1.82	0.00	114.67	N/A	N/A
2441.50	70.39	AV	H	28.18	1.82	0.00	100.39	N/A	N/A
2441.50	91.47	PK	V	28.18	1.82	0.00	121.47	N/A	N/A
2441.50	77.50	AV	V	28.18	1.82	0.00	107.50	N/A	N/A
4883.00	38.02	PK	V	33.07	3.28	25.66	48.71	74.00	25.29
4883.00	31.97	AV	V	33.07	3.28	25.66	42.66	54.00	11.34
7324.50	36.77	PK	V	36.04	4.62	25.73	51.70	74.00	22.30
7324.50	22.48	AV	V	36.04	4.62	25.73	37.41	54.00	16.59
High Channel: 2477.5 MHz									
2477.50	70.35	PK	H	28.26	1.84	0.00	100.45	N/A	N/A
2477.50	55.24	AV	H	28.26	1.84	0.00	85.34	N/A	N/A
2477.50	77.13	PK	V	28.26	1.84	0.00	107.23	N/A	N/A
2477.50	63.40	AV	V	28.26	1.84	0.00	93.50	N/A	N/A
2483.50	31.43	PK	V	28.27	1.84	0.00	61.54	74.00	12.46
2483.50	16.63	AV	V	28.27	1.84	0.00	46.74	54.00	7.26
4955.00	35.60	PK	V	33.21	3.23	25.63	46.41	74.00	27.59
4955.00	21.24	AV	V	33.21	3.23	25.63	32.05	54.00	21.95
7432.50	35.14	PK	V	36.32	4.43	25.84	50.05	74.00	23.95
7432.50	22.17	AV	V	36.32	4.43	25.84	37.08	54.00	16.92

20M Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2410.5 MHz									
2410.50	68.72	PK	H	28.12	1.81	0.00	98.65	N/A	N/A
2410.50	53.68	AV	H	28.12	1.81	0.00	83.61	N/A	N/A
2410.50	75.50	PK	V	28.12	1.81	0.00	105.43	N/A	N/A
2410.50	60.91	AV	V	28.12	1.81	0.00	90.84	N/A	N/A
2390.00	25.93	PK	V	28.08	1.80	0.00	55.81	74.00	18.19
2390.00	14.32	AV	V	28.08	1.80	0.00	44.20	54.00	9.80
4821.00	36.10	PK	V	32.94	3.19	25.61	46.62	74.00	27.38
4821.00	21.70	AV	V	32.94	3.19	25.61	32.22	54.00	21.78
7231.50	36.11	PK	V	35.80	4.78	25.63	51.06	74.00	22.94
7231.50	22.70	AV	V	35.80	4.78	25.63	37.65	54.00	16.35
Middle Channel: 2441.5 MHz									
2441.50	76.82	PK	H	28.18	1.82	0.00	106.82	N/A	N/A
2441.50	69.14	AV	H	28.18	1.82	0.00	99.14	N/A	N/A
2441.50	83.08	PK	V	28.18	1.82	0.00	113.08	N/A	N/A
2441.50	68.56	AV	V	28.18	1.82	0.00	98.56	N/A	N/A
4883.00	37.54	PK	V	33.07	3.28	25.66	48.23	74.00	25.77
4883.00	24.70	AV	V	33.07	3.28	25.66	35.39	54.00	18.61
7324.50	36.10	PK	V	36.04	4.62	25.73	51.03	74.00	22.97
7324.50	22.17	AV	V	36.04	4.62	25.73	37.10	54.00	16.90
High Channel: 2472.5 MHz									
2472.50	66.88	PK	H	28.25	1.84	0.00	96.97	N/A	N/A
2472.50	51.59	AV	H	28.25	1.84	0.00	81.68	N/A	N/A
2472.50	75.46	PK	V	28.25	1.84	0.00	105.55	N/A	N/A
2472.50	61.48	AV	V	28.25	1.84	0.00	91.57	N/A	N/A
2483.50	38.76	PK	V	28.27	1.84	0.00	68.87	74.00	5.13
2483.50	19.88	AV	V	28.27	1.84	0.00	49.99	54.00	4.01
4945.00	35.70	PK	V	33.19	3.25	25.64	46.50	74.00	27.50
4945.00	21.10	AV	V	33.19	3.25	25.64	31.90	54.00	22.10
7417.50	36.10	PK	V	36.29	4.45	25.82	51.02	74.00	22.98
7417.50	22.04	AV	V	36.29	4.45	25.82	36.96	54.00	17.04

20M Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2410.5 MHz									
2410.50	70.35	PK	H	28.12	1.81	0.00	100.28	N/A	N/A
2410.50	54.28	AV	H	28.12	1.81	0.00	84.21	N/A	N/A
2410.50	75.61	PK	V	28.12	1.81	0.00	105.54	N/A	N/A
2410.50	61.17	AV	V	28.12	1.81	0.00	91.10	N/A	N/A
2390.00	25.96	PK	V	28.08	1.80	0.00	55.84	74.00	18.16
2390.00	14.65	AV	V	28.08	1.80	0.00	44.53	54.00	9.47
4821.00	36.10	PK	V	32.94	3.19	25.61	46.62	74.00	27.38
4821.00	22.10	AV	V	32.94	3.19	25.61	32.62	54.00	21.38
7231.50	35.70	PK	V	35.80	4.78	25.63	50.65	74.00	23.35
7231.50	21.30	AV	V	35.80	4.78	25.63	36.25	54.00	17.75
Middle Channel: 2441.5 MHz									
2441.50	76.89	PK	H	28.18	1.82	0.00	106.89	N/A	N/A
2441.50	62.00	AV	H	28.18	1.82	0.00	92.00	N/A	N/A
2441.50	84.28	PK	V	28.18	1.82	0.00	114.28	N/A	N/A
2441.50	68.57	AV	V	28.18	1.82	0.00	98.57	N/A	N/A
4883.00	37.51	PK	V	33.07	3.28	25.66	48.20	74.00	25.80
4883.00	24.97	AV	V	33.07	3.28	25.66	35.66	54.00	18.34
7324.50	35.70	PK	V	36.04	4.62	25.73	50.63	74.00	23.37
7324.50	21.70	AV	V	36.04	4.62	25.73	36.63	54.00	17.37
High Channel: 2472.5 MHz									
2472.50	67.87	PK	H	28.25	1.84	0.00	97.96	N/A	N/A
2472.50	52.10	AV	H	28.25	1.84	0.00	82.19	N/A	N/A
2472.50	75.54	PK	V	28.25	1.84	0.00	105.63	N/A	N/A
2472.50	61.30	AV	V	28.25	1.84	0.00	91.39	N/A	N/A
2483.50	25.71	PK	V	28.27	1.84	0.00	55.82	74.00	18.18
2483.50	14.67	AV	V	28.27	1.84	0.00	44.78	54.00	9.22
4945.00	35.40	PK	V	33.19	3.25	25.64	46.20	74.00	27.80
4945.00	22.03	AV	V	33.19	3.25	25.64	32.83	54.00	21.17
7417.50	35.60	PK	V	36.29	4.45	25.82	50.52	74.00	23.48
7417.50	22.02	AV	V	36.29	4.45	25.82	36.94	54.00	17.06

20M Chain 0+1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2410.5 MHz									
2410.50	68.43	PK	H	28.12	1.81	0.00	98.36	N/A	N/A
2410.50	53.80	AV	H	28.12	1.81	0.00	83.73	N/A	N/A
2410.50	76.79	PK	V	28.12	1.81	0.00	106.72	N/A	N/A
2410.50	61.55	AV	V	28.12	1.81	0.00	91.48	N/A	N/A
2390.00	26.76	PK	V	28.08	1.80	0.00	56.64	74.00	17.36
2390.00	14.00	AV	V	28.08	1.80	0.00	43.88	54.00	10.12
4821.00	35.14	PK	V	32.94	3.19	25.61	45.66	74.00	28.34
4821.00	28.14	AV	V	32.94	3.19	25.61	38.66	54.00	15.34
7231.50	36.50	PK	V	35.80	4.78	25.63	51.45	74.00	22.55
7231.50	22.17	AV	V	35.80	4.78	25.63	37.12	54.00	16.88
Middle Channel: 2441.5 MHz									
2441.50	80.08	PK	H	28.18	1.82	0.00	110.08	N/A	N/A
2441.50	64.76	AV	H	28.18	1.82	0.00	94.76	N/A	N/A
2441.50	86.41	PK	V	28.18	1.82	0.00	116.41	N/A	N/A
2441.50	71.52	AV	V	28.18	1.82	0.00	101.52	N/A	N/A
4883.00	37.20	PK	V	33.07	3.28	25.66	47.89	74.00	26.11
4883.00	28.74	AV	V	33.07	3.28	25.66	39.43	54.00	14.57
7324.50	36.40	PK	V	36.04	4.62	25.73	51.33	74.00	22.67
7324.50	22.17	AV	V	36.04	4.62	25.73	37.10	54.00	16.90
High Channel: 2472.5 MHz									
2472.50	64.59	PK	H	28.25	1.84	0.00	94.68	N/A	N/A
2472.50	49.46	AV	H	28.25	1.84	0.00	79.55	N/A	N/A
2472.50	68.90	PK	V	28.25	1.84	0.00	98.99	N/A	N/A
2472.50	54.00	AV	V	28.25	1.84	0.00	84.09	N/A	N/A
2483.50	32.16	PK	V	28.27	1.84	0.00	62.27	74.00	11.73
2483.50	16.62	AV	V	28.27	1.84	0.00	46.73	54.00	7.27
4945.00	35.92	PK	V	33.19	3.25	25.64	46.72	74.00	27.28
4945.00	21.71	AV	V	33.19	3.25	25.64	32.51	54.00	21.49
7417.50	35.78	PK	V	36.29	4.45	25.82	50.70	74.00	23.30
7417.50	21.17	AV	V	36.29	4.45	25.82	36.09	54.00	17.91

40M Chain 0:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2420.5 MHz									
2420.50	66.50	PK	H	28.14	1.81	0.00	96.45	N/A	N/A
2420.50	50.65	AV	H	28.14	1.81	0.00	80.60	N/A	N/A
2420.50	73.16	PK	V	28.14	1.81	0.00	103.11	N/A	N/A
2420.50	57.85	AV	V	28.14	1.81	0.00	87.80	N/A	N/A
2390.00	28.07	PK	V	28.08	1.80	0.00	57.95	74.00	16.05
2390.00	14.82	AV	V	28.08	1.80	0.00	44.70	54.00	9.30
4841.00	35.67	PK	V	32.98	3.22	25.63	46.24	74.00	27.76
4841.00	22.30	AV	V	32.98	3.22	25.63	32.87	54.00	21.13
7261.50	36.07	PK	V	35.88	4.72	25.66	51.01	74.00	22.99
7261.50	22.14	AV	V	35.88	4.72	25.66	37.08	54.00	16.92
Middle Channel: 2441.5 MHz									
2441.50	66.71	PK	H	28.18	1.82	0.00	96.71	N/A	N/A
2441.50	51.00	AV	H	28.18	1.82	0.00	81.00	N/A	N/A
2441.50	73.91	PK	V	28.18	1.82	0.00	103.91	N/A	N/A
2441.50	57.97	AV	V	28.18	1.82	0.00	87.97	N/A	N/A
4883.00	37.61	PK	V	33.07	3.28	25.66	48.30	74.00	25.70
4883.00	24.70	AV	V	33.07	3.28	25.66	35.39	54.00	18.61
7324.50	35.10	PK	V	36.04	4.62	25.73	50.03	74.00	23.97
7324.50	22.17	AV	V	36.04	4.62	25.73	37.10	54.00	16.90
High Channel: 2462.5 MHz									
2462.50	61.70	PK	H	28.23	1.83	0.00	91.76	N/A	N/A
2462.50	47.78	AV	H	28.23	1.83	0.00	77.84	N/A	N/A
2462.50	67.67	PK	V	28.23	1.83	0.00	97.73	N/A	N/A
2462.50	53.19	AV	V	28.23	1.83	0.00	83.25	N/A	N/A
2483.50	31.84	PK	V	28.27	1.84	0.00	61.95	74.00	12.05
2483.50	14.95	AV	V	28.27	1.84	0.00	45.06	54.00	8.94
4925.00	36.41	PK	V	33.15	3.27	25.65	47.18	74.00	26.82
4925.00	21.71	AV	V	33.15	3.27	25.65	32.48	54.00	21.52
7387.50	35.78	PK	V	36.21	4.51	25.79	50.71	74.00	23.29
7387.50	22.60	AV	V	36.21	4.51	25.79	37.53	54.00	16.47




40M Chain 1:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2420.5 MHz									
2420.50	66.50	PK	H	28.14	1.81	0.00	96.45	N/A	N/A
2420.50	50.65	AV	H	28.14	1.81	0.00	80.60	N/A	N/A
2420.50	73.16	PK	V	28.14	1.81	0.00	103.11	N/A	N/A
2420.50	57.85	AV	V	28.14	1.81	0.00	87.80	N/A	N/A
2390.00	28.07	PK	V	28.08	1.80	0.00	57.95	74.00	16.05
2390.00	14.82	AV	V	28.08	1.80	0.00	44.70	54.00	9.30
4841.00	36.71	PK	V	32.98	3.22	25.63	47.28	74.00	26.72
4841.00	22.20	AV	V	32.98	3.22	25.63	32.77	54.00	21.23
7261.50	36.10	PK	V	35.88	4.72	25.66	51.04	74.00	22.96
7261.50	21.40	AV	V	35.88	4.72	25.66	36.34	54.00	17.66
Middle Channel: 2441.5 MHz									
2441.50	67.10	PK	H	28.18	1.82	0.00	97.10	N/A	N/A
2441.50	52.31	AV	H	28.18	1.82	0.00	82.31	N/A	N/A
2441.50	74.85	PK	V	28.18	1.82	0.00	104.85	N/A	N/A
2441.50	58.40	AV	V	28.18	1.82	0.00	88.40	N/A	N/A
4883.00	37.26	PK	V	33.07	3.28	25.66	47.95	74.00	26.05
4883.00	24.60	AV	V	33.07	3.28	25.66	35.29	54.00	18.71
7324.50	36.03	PK	V	36.04	4.62	25.73	50.96	74.00	23.04
7324.50	22.10	AV	V	36.04	4.62	25.73	37.03	54.00	16.97
High Channel: 2462.5 MHz									
2462.50	60.24	PK	H	28.23	1.83	0.00	90.30	N/A	N/A
2462.50	47.00	AV	H	28.23	1.83	0.00	77.06	N/A	N/A
2462.50	66.89	PK	V	28.23	1.83	0.00	96.95	N/A	N/A
2462.50	51.81	AV	V	28.23	1.83	0.00	81.87	N/A	N/A
2483.50	30.17	PK	V	28.27	1.84	0.00	60.28	74.00	13.72
2483.50	14.50	AV	V	28.27	1.84	0.00	44.61	54.00	9.39
4925.00	35.21	PK	V	33.15	3.27	25.65	45.98	74.00	28.02
4925.00	21.01	AV	V	33.15	3.27	25.65	31.78	54.00	22.22
7387.50	36.10	PK	V	36.21	4.51	25.79	51.03	74.00	22.97
7387.50	22.36	AV	V	36.21	4.51	25.79	37.29	54.00	16.71

40M Chain 0+1:




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)					
Low Channel: 2420.5 MHz									
2420.50	65.68	PK	H	28.14	1.81	0.00	95.63	N/A	N/A
2420.50	50.68	AV	H	28.14	1.81	0.00	80.63	N/A	N/A
2420.50	72.96	PK	V	28.14	1.81	0.00	102.91	N/A	N/A
2420.50	58.82	AV	V	28.14	1.81	0.00	88.77	N/A	N/A
2390.00	27.91	PK	V	28.08	1.80	0.00	57.79	74.00	16.21
2390.00	14.43	AV	V	28.08	1.80	0.00	44.31	54.00	9.69
4841.00	35.22	PK	V	32.98	3.22	25.63	45.79	74.00	28.21
4841.00	28.40	AV	V	32.98	3.22	25.63	38.97	54.00	15.03
7261.50	35.14	PK	V	35.88	4.72	25.66	50.08	74.00	23.92
7261.50	21.77	AV	V	35.88	4.72	25.66	36.71	54.00	17.29
Middle Channel: 2441.5 MHz									
2441.50	66.48	PK	H	28.18	1.82	0.00	96.48	N/A	N/A
2441.50	52.00	AV	H	28.18	1.82	0.00	82.00	N/A	N/A
2441.50	73.74	PK	V	28.18	1.82	0.00	103.74	N/A	N/A
2441.50	58.83	AV	V	28.18	1.82	0.00	88.83	N/A	N/A
4883.00	37.19	PK	V	33.07	3.28	25.66	47.88	74.00	26.12
4883.00	30.17	AV	V	33.07	3.28	25.66	40.86	54.00	13.14
7324.50	36.04	PK	V	36.04	4.62	25.73	50.97	74.00	23.03
7324.50	22.95	AV	V	36.04	4.62	25.73	37.88	54.00	16.12
High Channel: 2462.5 MHz									
2462.50	61.24	PK	H	28.23	1.83	0.00	91.30	N/A	N/A
2462.50	46.86	AV	H	28.23	1.83	0.00	76.92	N/A	N/A
2462.50	67.54	PK	V	28.23	1.83	0.00	97.60	N/A	N/A
2462.50	52.91	AV	V	28.23	1.83	0.00	82.97	N/A	N/A
2483.50	26.89	PK	V	28.27	1.84	0.00	57.00	74.00	17.00
2483.50	16.00	AV	V	28.27	1.84	0.00	46.11	54.00	7.89
4925.00	35.70	PK	V	33.15	3.27	25.65	46.47	74.00	27.53
4925.00	28.71	AV	V	33.15	3.27	25.65	39.48	54.00	14.52
7387.50	35.67	PK	V	36.21	4.51	25.79	50.60	74.00	23.40
7387.50	22.10	AV	V	36.21	4.51	25.79	37.03	54.00	16.97

Test plots (3M Chain 1middle channel was the worst):
Horizontal:

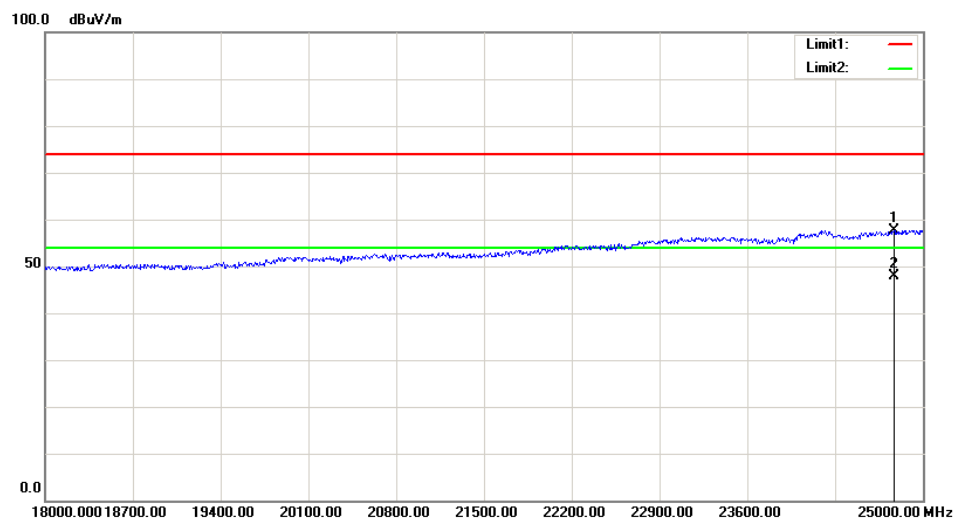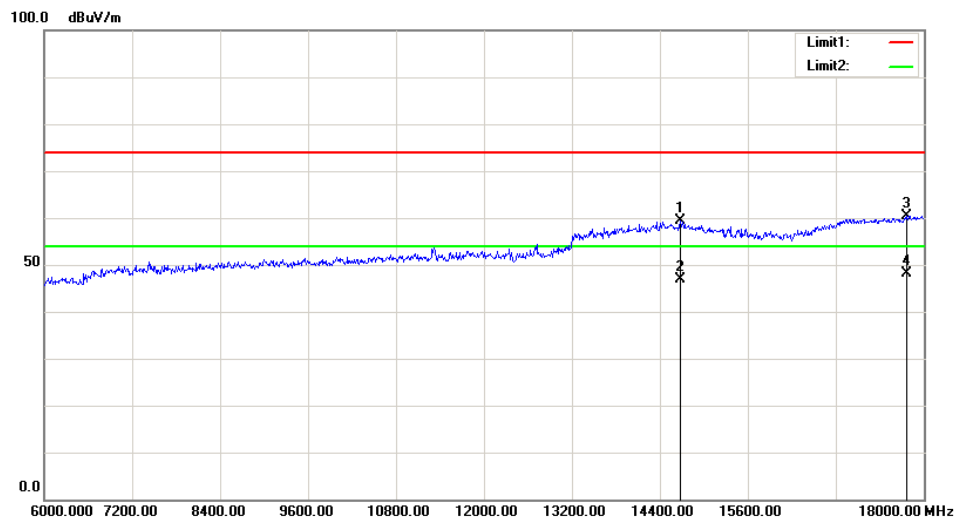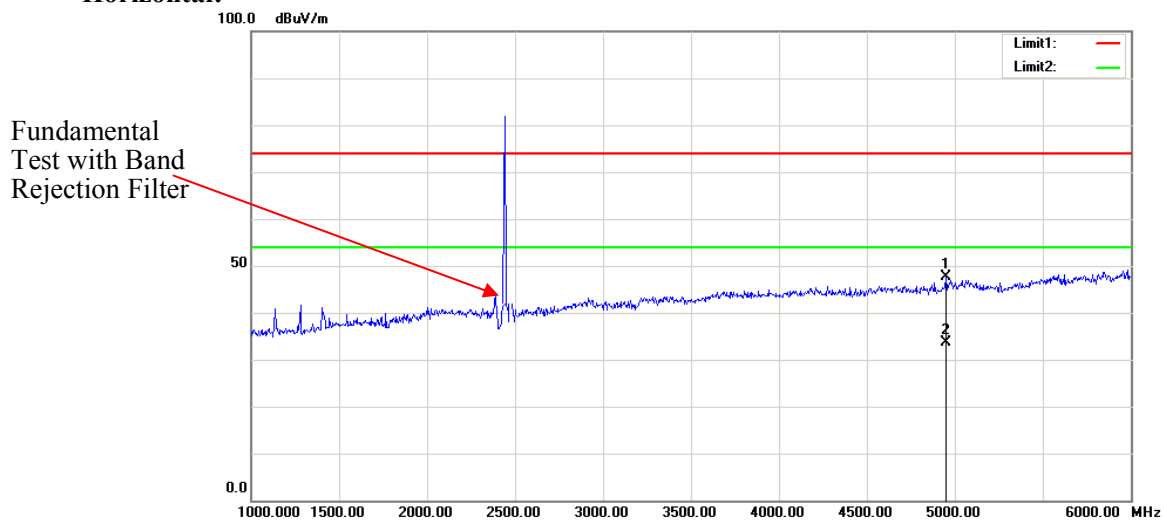

Vertical:

Fundamental
Test with Band
Rejection Filter

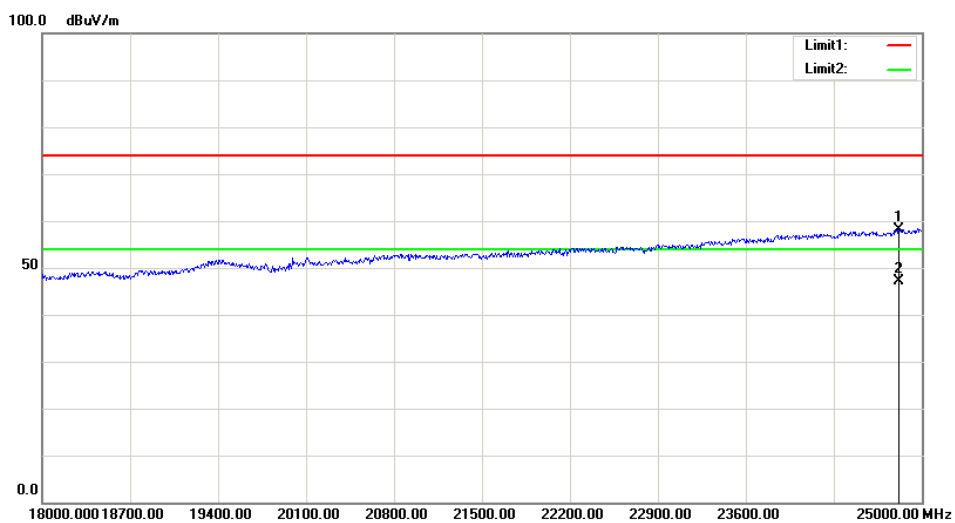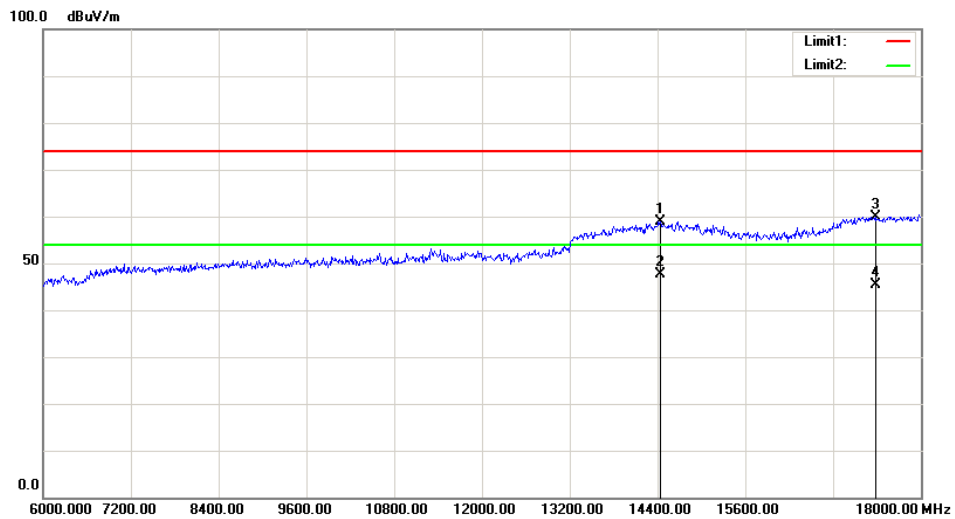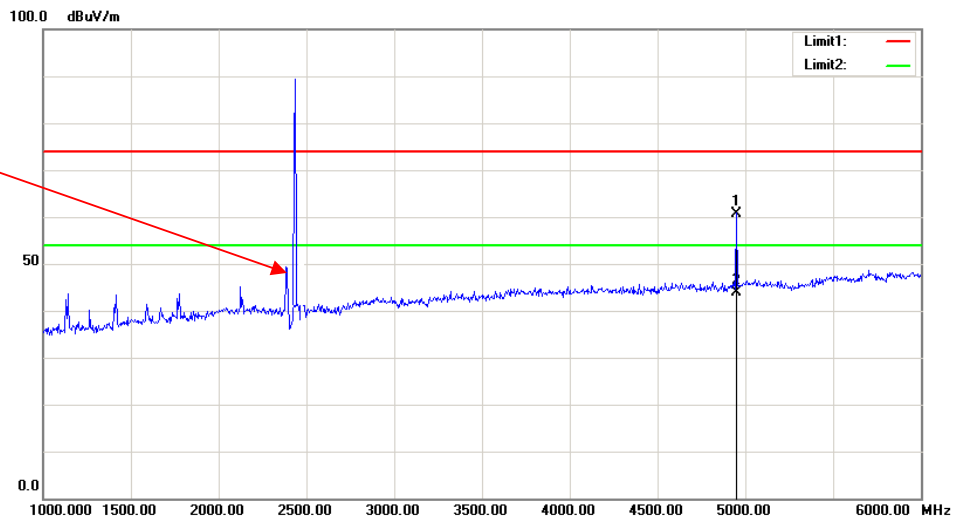

FCC §15.247(a) (2), RSS-247 CLAUSE 5.2 a) & RSS-GEN CLAUSE 6.7 – 6 dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

Applicable Standard

According to FCC §15.247(a) (2)

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

According to RSS-247 §5.2 a)

The minimum 6 dB bandwidth shall be 500 kHz.

According to RSS-Gen §6.7

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

In some cases, the “x dB bandwidth” is required, which is defined as the frequency range between two points, one at the lowest frequency below and one at the highest frequency above the carrier frequency, at which the maximum power level of the transmitted emission is attenuated x dB below the maximum in-band power level of the modulated signal, where the two points are on the outskirts of the in-band emission.

The following conditions shall be observed for measuring the occupied bandwidth and x dB bandwidth:


- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / x dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / x dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	19.7~21.6°C
Relative Humidity:	36~47%
ATM Pressure:	101.6~102.2kPa

* The testing was performed by Lily Xie from 2020-01-16 to 2020-01-21.


Test Mode: Transmitting(Test only performed at chain 0)

Test Result: Compliance. Please refer to the following table and plots.

Mode	Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	6 dB Bandwidth Limit (MHz)
1.4M	Low	2403.5	1.086	1.182	≥0.5
	Middle	2441.5	1.092	1.170	
	High	2477.5	1.086	1.176	
3M	Low	2405.5	2.196	2.196	
	Middle	2441.5	2.196	2.184	
	High	2474.5	2.188	2.196	
10M	Low	2405.5	9.040	8.920	
	Middle	2441.5	9.040	8.960	
	High	2477.5	9.040	8.920	
20M	Low	2410.5	18.080	17.840	
	Middle	2441.5	18.000	17.680	
	High	2472.5	18.000	17.840	
40M	Low	2420.5	36.000	35.680	
	Middle	2441.5	35.840	35.360	
	High	2462.5	36.000	35.360	


6dB Bandwidth:

1.4M Low Channel

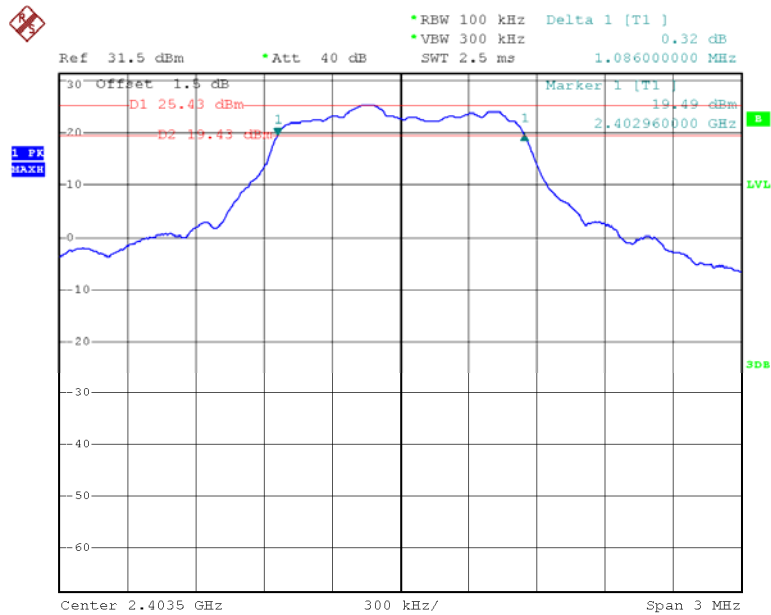


Date: 15.JAN.2020 16:56:59


1.4M Middle Channel

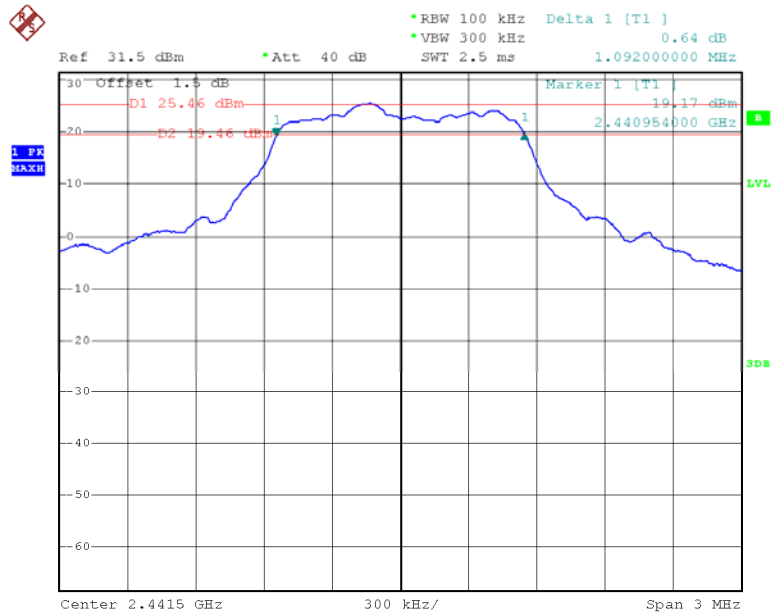

Date: 15.JAN.2020 16:58:25

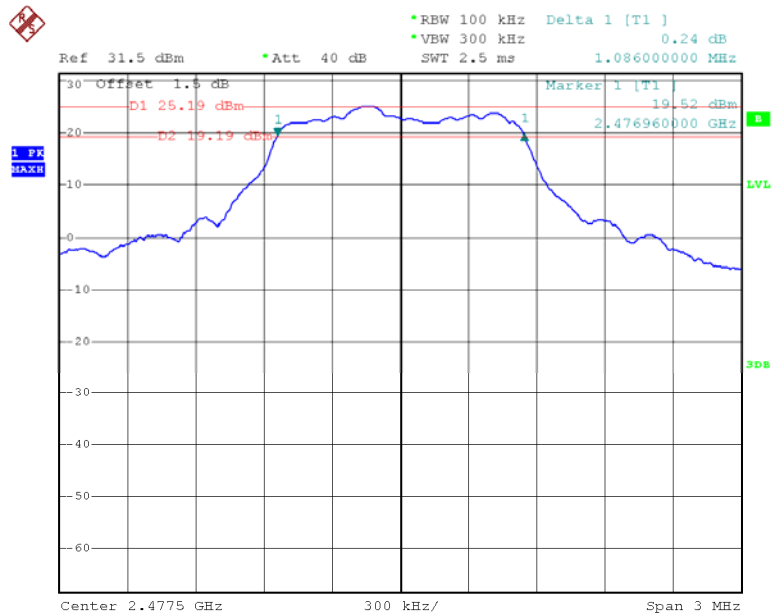
1.4M High Channel

Date: 15.JAN.2020 16:59:29

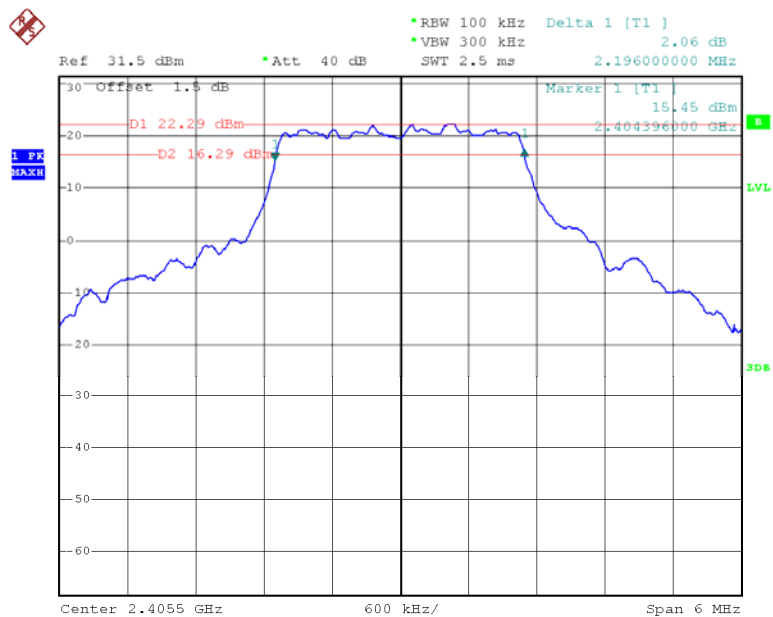3M Low Channel


Date: 15.JAN.2020 19:11:41

3M Middle Channel

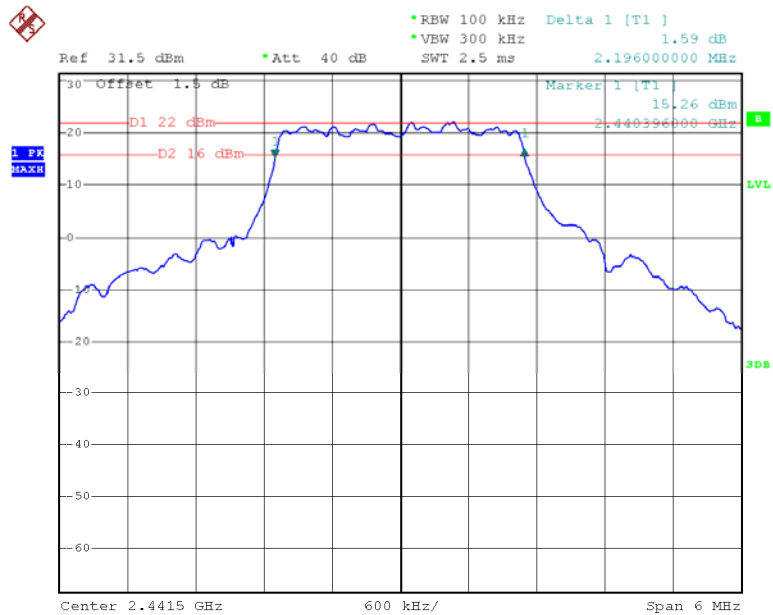


Date: 15.JAN.2020 19:13:17


3M High Channel

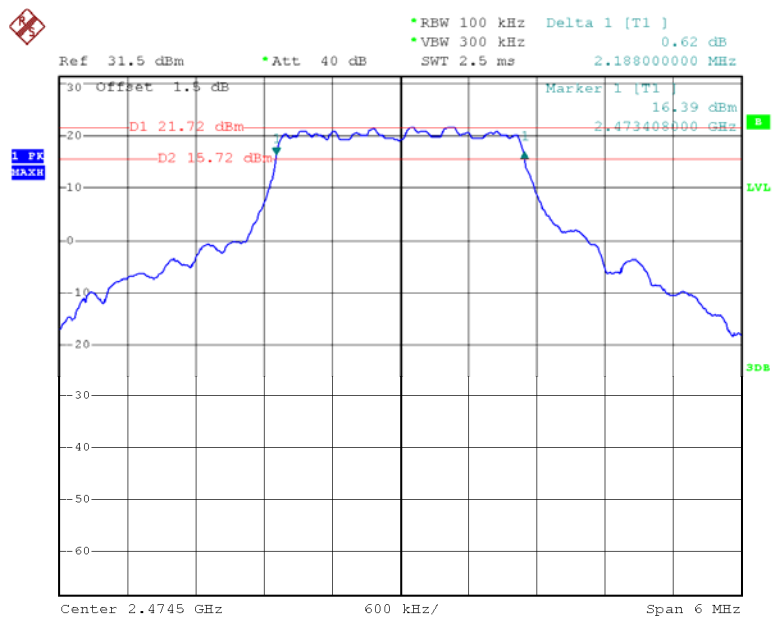


Date: 15.JAN.2020 19:18:08

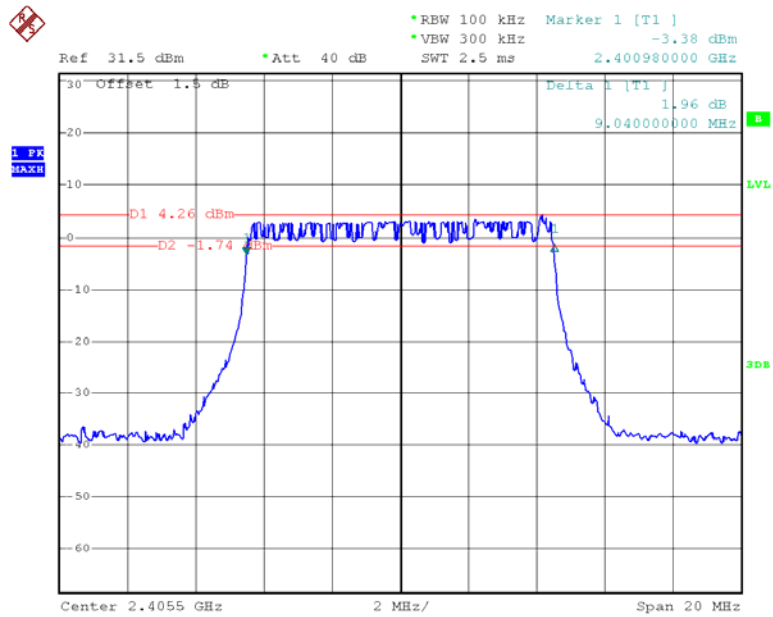10M Low Channel


Date: 15.JAN.2020 19:19:24

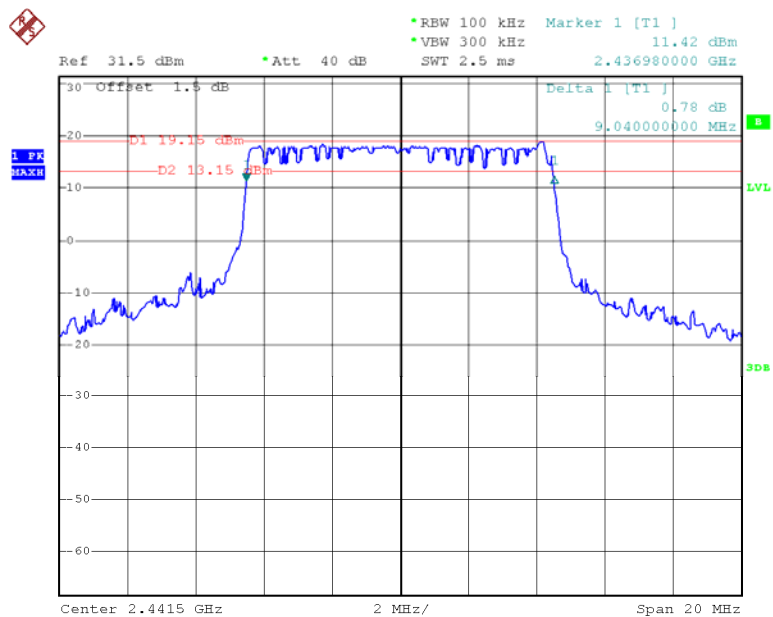10M Middle Channel


Date: 15.JAN.2020 19:23:51

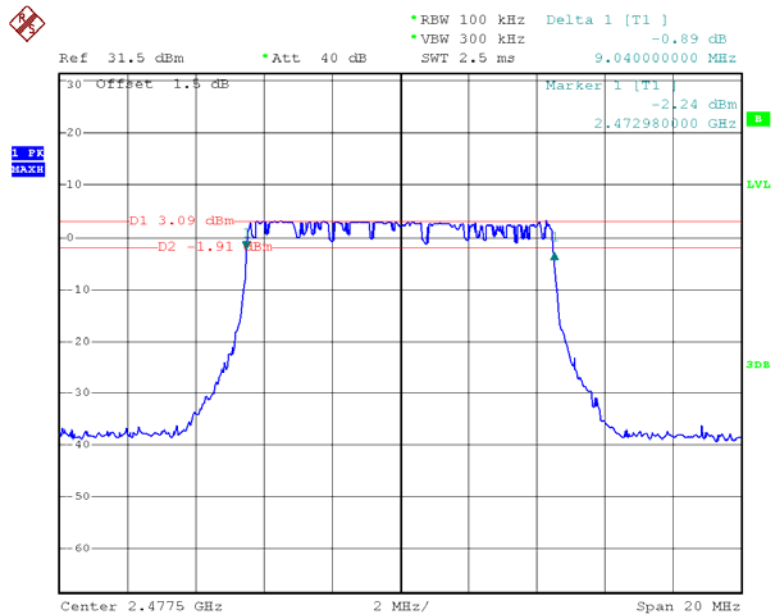10M High Channel


Date: 15.JAN.2020 19:25:28

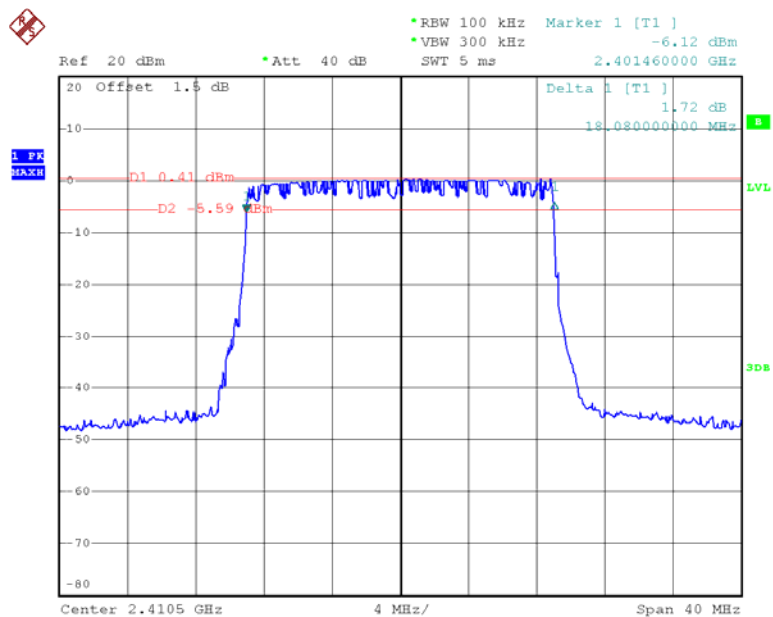20M Low Channel


Date: 15.JAN.2020 19:32:11

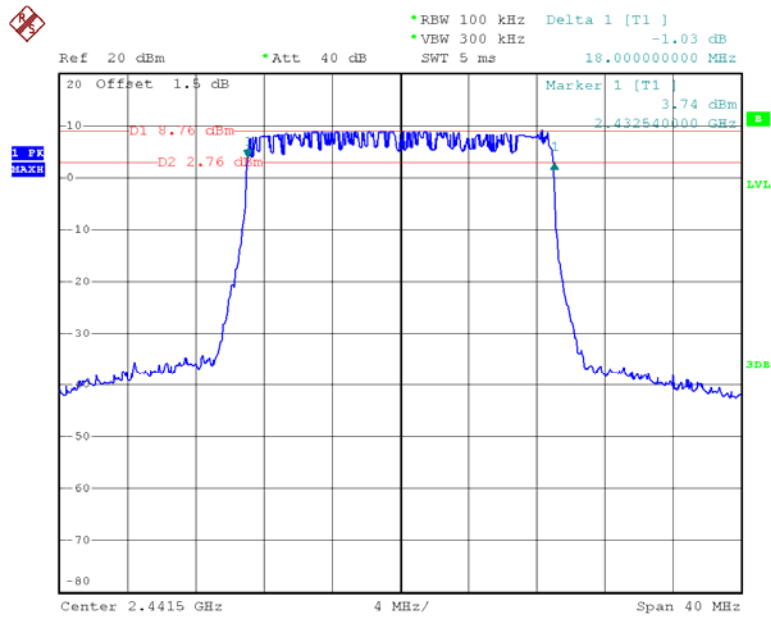20M Middle Channel


Date: 15.JAN.2020 19:35:34

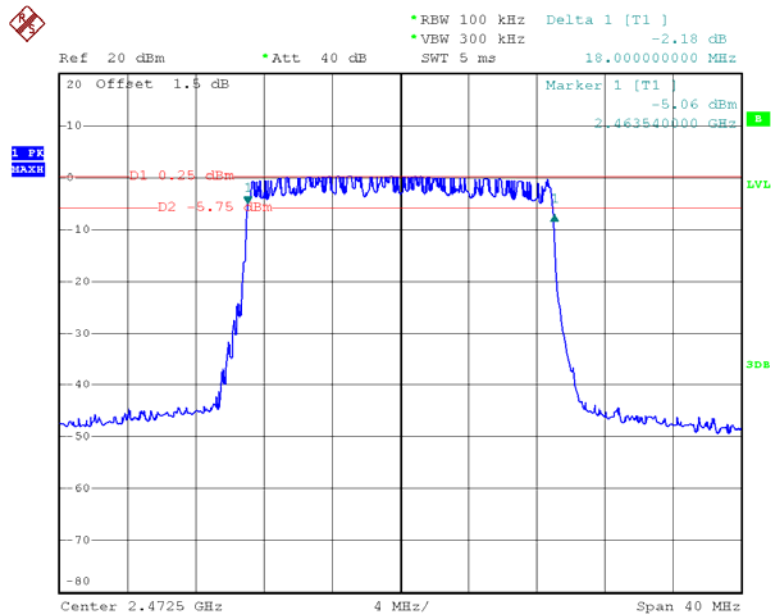20M High Channel

Date: 15.JAN.2020 19:39:39

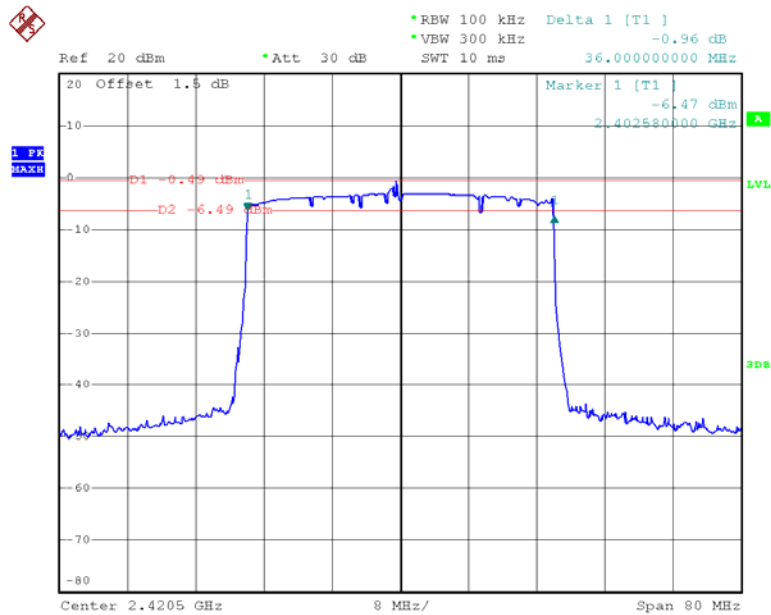
40M Low Channel

Date: 21.JAN.2020 13:26:02

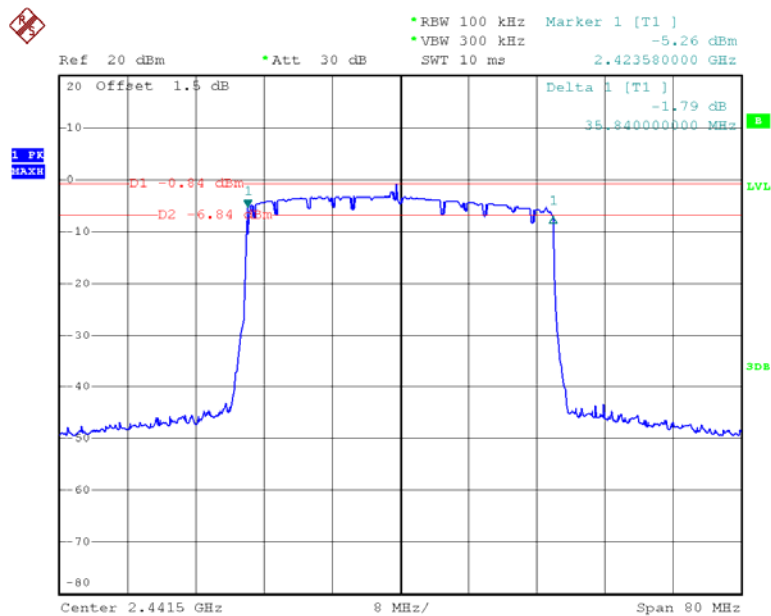
40M Middle Channel

Date: 21.JAN.2020 13:40:43


40M High Channel

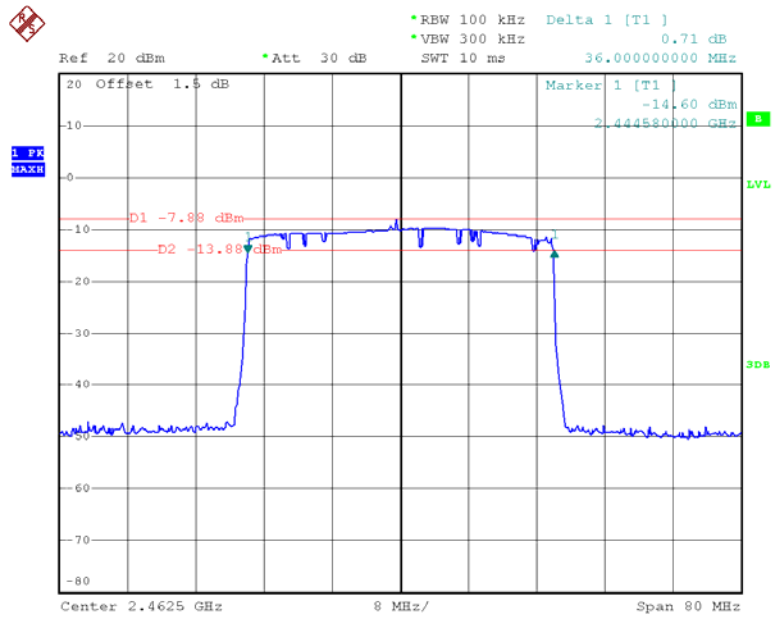


Date: 21.JAN.2020 13:50:22

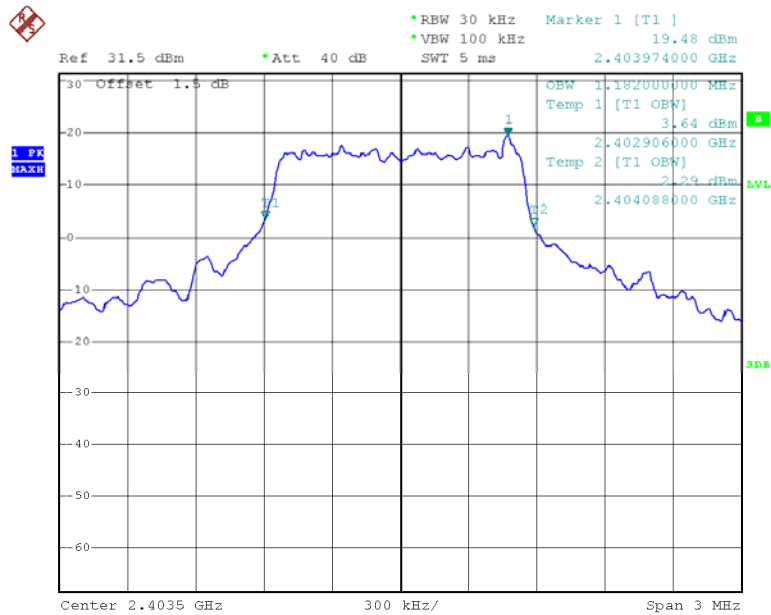99% Occupied Bandwidth:**1.4M Low Channel**


Date: 16.JAN.2020 09:21:32

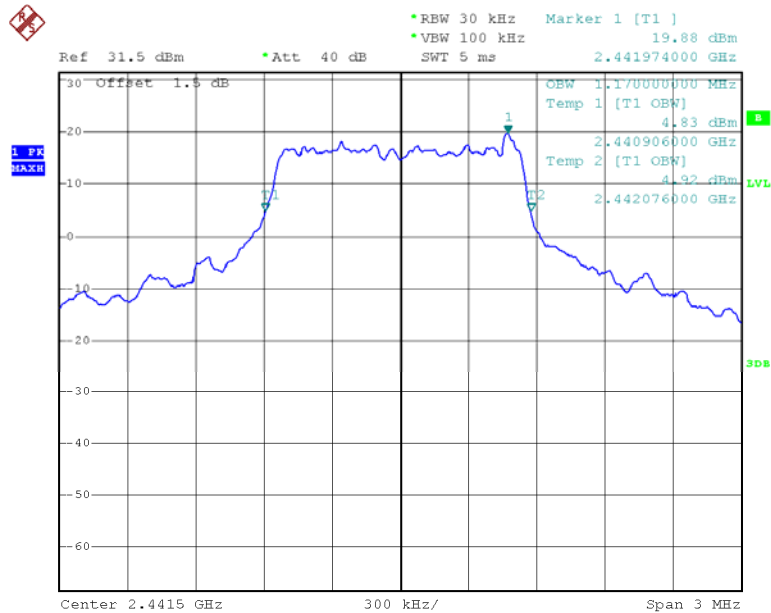1.4M Middle Channel


Date: 16.JAN.2020 09:22:47

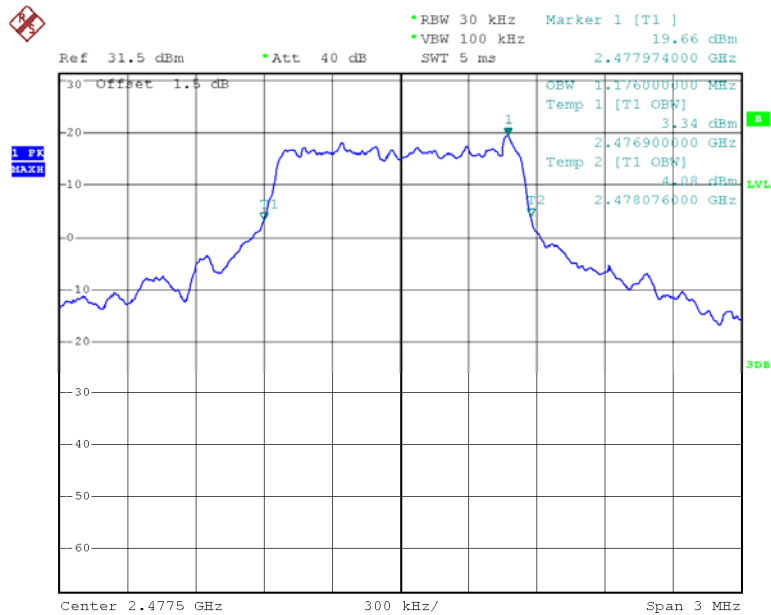1.4M High Channel


Date: 16.JAN.2020 09:25:52

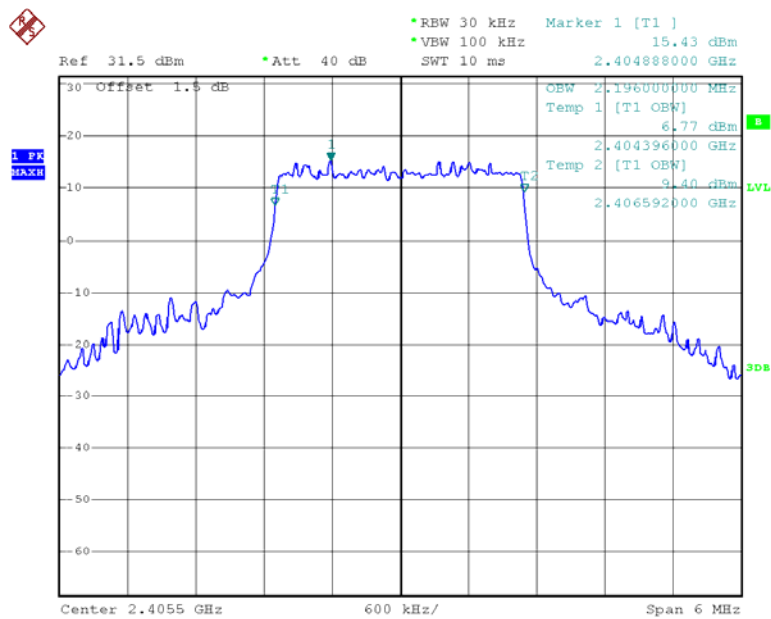3M Low Channel

Date: 16.JAN.2020 09:32:11

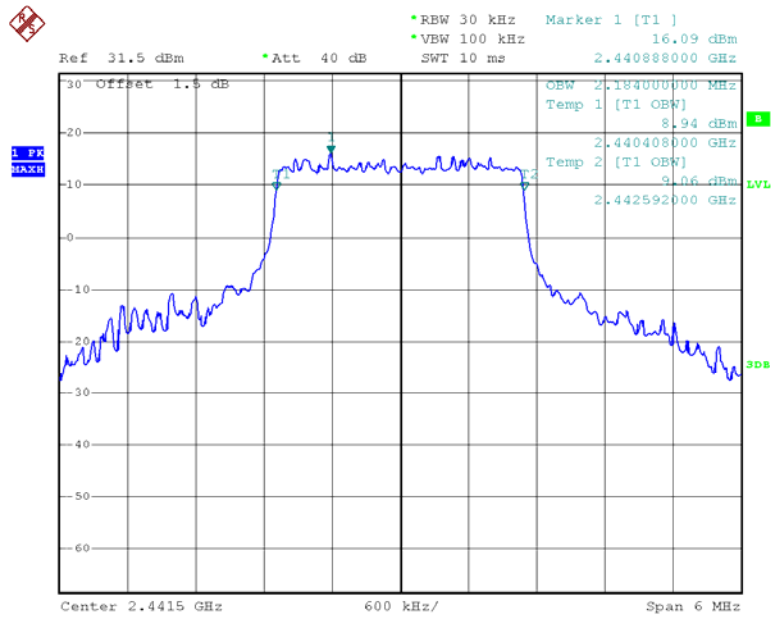
3M Middle Channel

Date: 16.JAN.2020 09:33:41

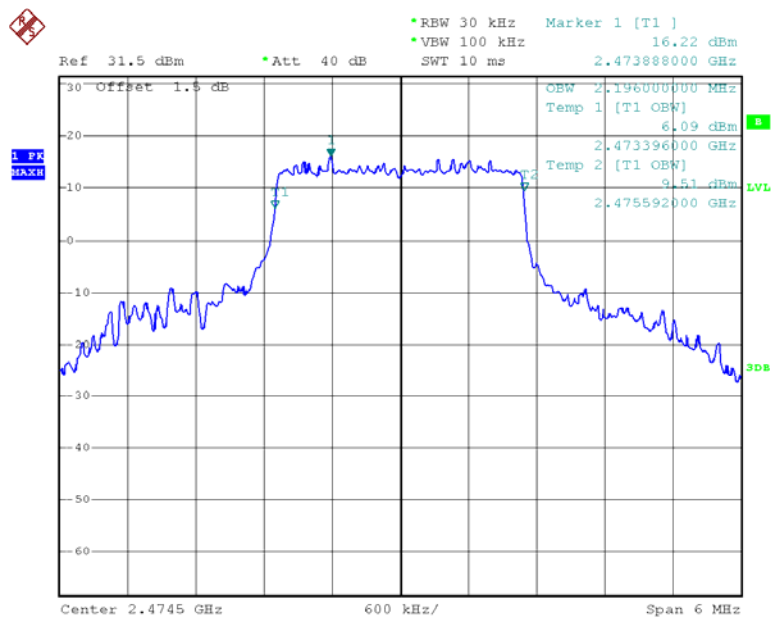3M High Channel


Date: 16.JAN.2020 09:38:48

10M Low Channel

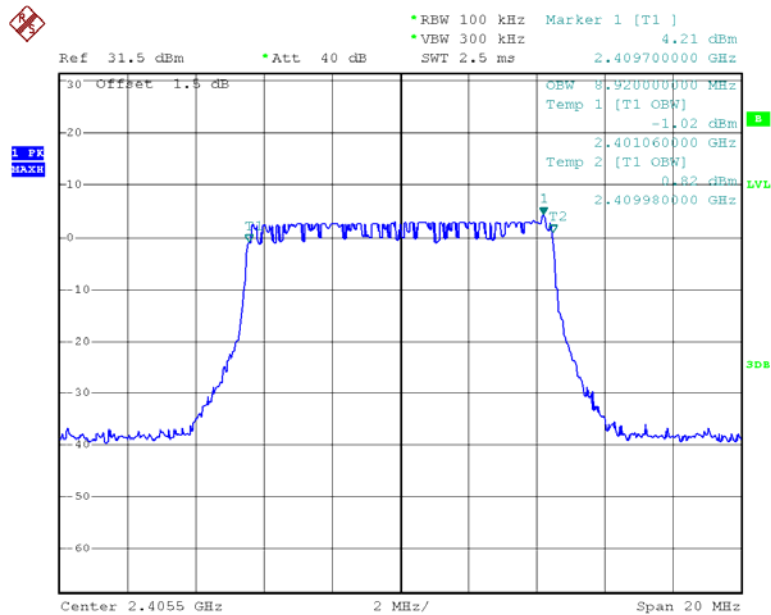


Date: 16.JAN.2020 09:41:11


10M Middle Channel

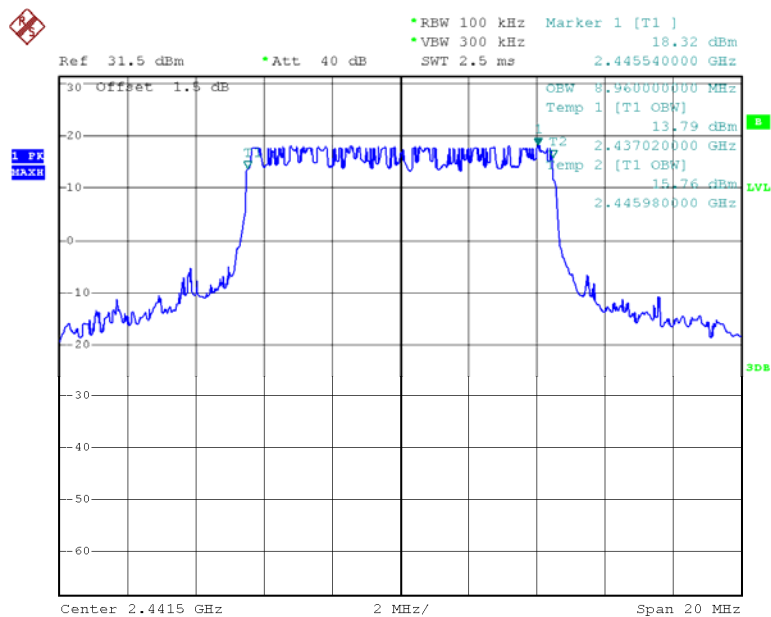


Date: 16.JAN.2020 09:43:12

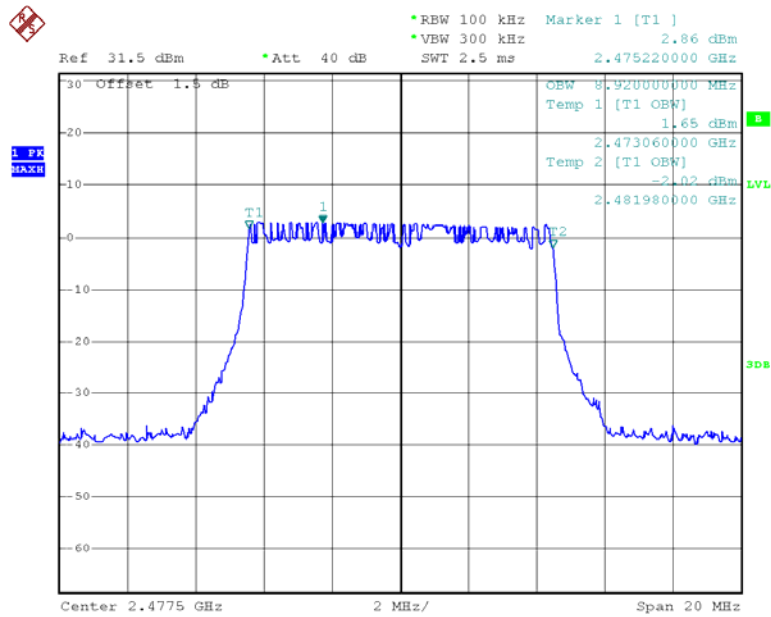10M High Channel


Date: 16.JAN.2020 09:44:51

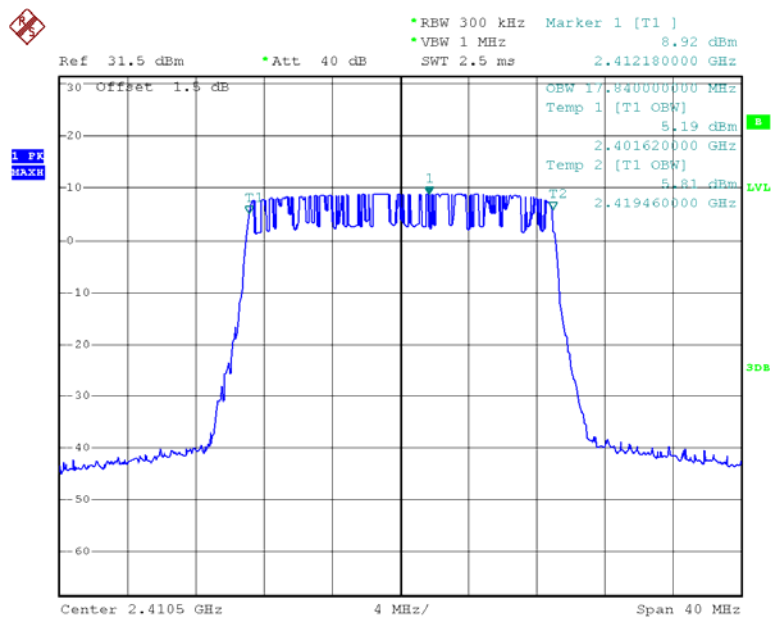20M Low Channel


Date: 16.JAN.2020 09:48:52

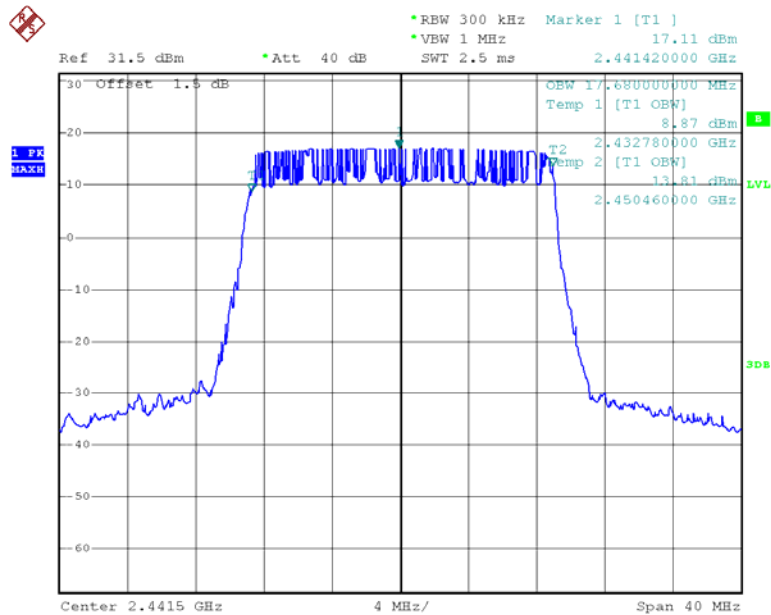20M Middle Channel


Date: 16.JAN.2020 09:52:50

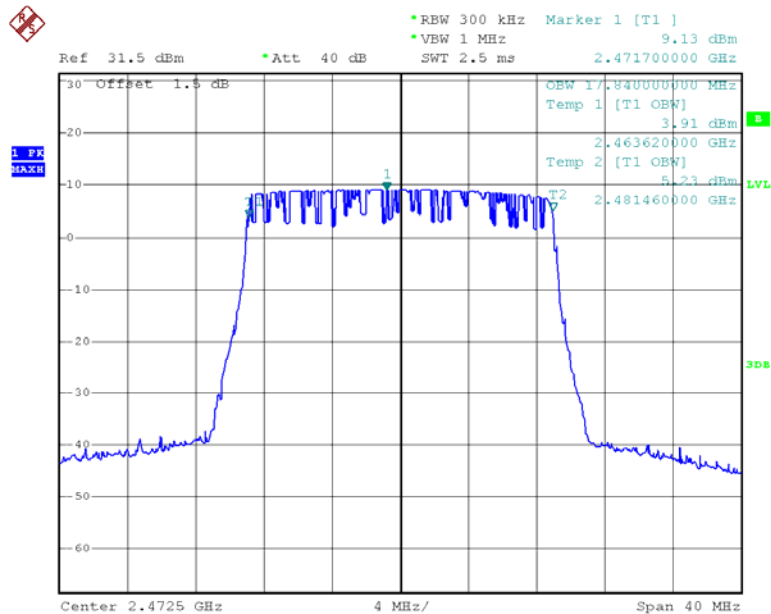20M High Channel

Date: 16.JAN.2020 09:58:26

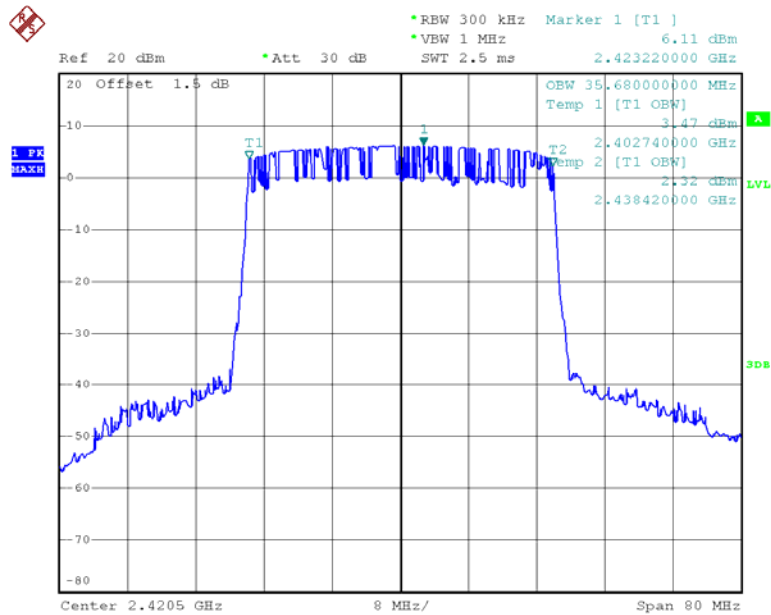
40M Low Channel

Date: 21.JAN.2020 13:35:36

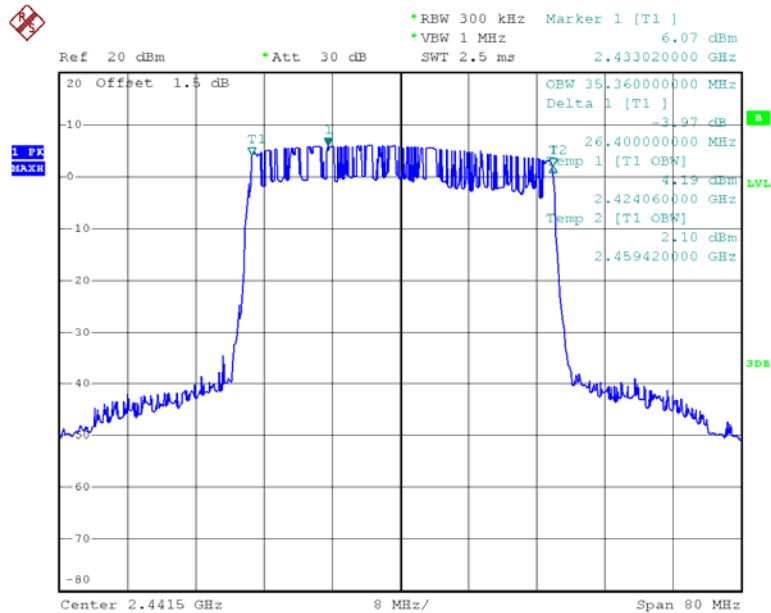40M Middle Channel

Date: 21.JAN.2020 13:44:40

40M High Channel

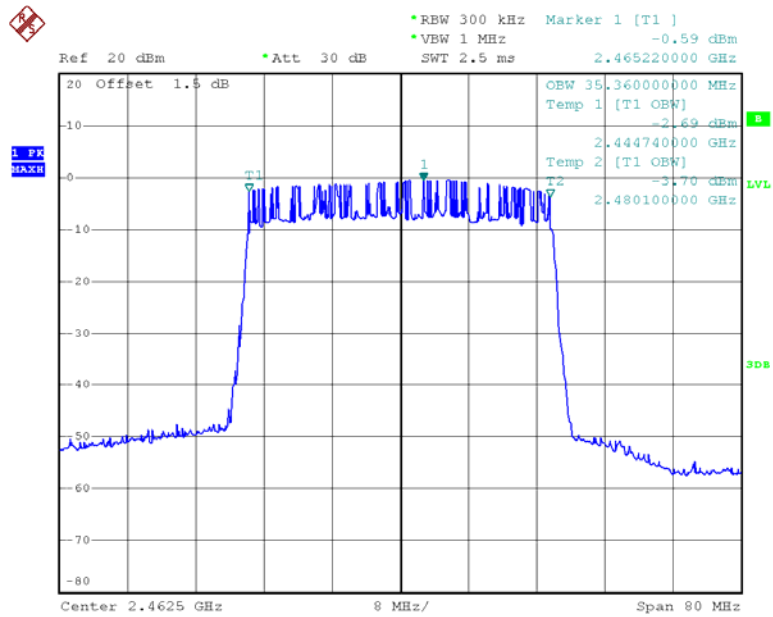

Date: 21.JAN.2020 13:55:17

FCC §15.247(b) (3) , RSS-247 CLAUSE 5.4 D - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard


According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

According to RSS-247§5.4 d) For DTSs employing digital modulation techniques operating in the bands 902-928 MHz and 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W. Except as provided in Section 5.4(e), the e.i.r.p. shall not exceed 4 W.

As an alternative to a peak power measurement, compliance can be based on a measurement of the maximum conducted output power. The maximum conducted output power is the total transmit power delivered to all antennas and antenna elements, averaged across all symbols in the signalling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or transmitting at a reduced power level. If multiple modes of operation are implemented, the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
3. Add a correction factor to the display.
4. Set the power meter to test average output power, record the result as average power.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	/
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	19.7~21.6°C
Relative Humidity:	36~47%
ATM Pressure:	101.6~102.2kPa

* The testing was performed by Lily Xie from 2020-01-16 to 2020-01-21.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table.

SISO Mode:

Mode	Test Frequency (MHz)	Conducted Average Output Power (dBm)		
		Chain 0	Chain 1	Limit
1.4M	2403.5	26.78	26.74	30
	2441.5	26.75	26.59	
	2477.5	26.76	26.74	
3M	2405.5	26.41	26.83	
	2441.5	26.59	26.48	
	2474.5	26.25	26.76	
10M	2405.5	11.04	11.96	
	2408.5	14.25	14.99	
	2414.5	17.29	17.61	
	2420.5	20.27	20.37	
	2423.5	22.36	22.35	
	2425.5	24.48	24.43	
	2441.5	26.24	26.45	
	2449.5	24.94	24.45	
	2452.5	22.54	22.76	
	2456.5	20.53	20.81	
	2462.5	17.69	17.81	
	2468.5	14.22	14.68	
20M	2477.5	11.09	11.62	
	2410.5	11.11	11.81	
	2417.5	11.22	11.95	
	2424.5	14.48	14.49	
	2431.5	17.32	17.46	
	2435.5	20.31	20.26	
	2437.5	22.46	22.38	
	2441.5	19.18	19.12	
	2448.5	15.42	15.24	
	2453.5	13.79	13.62	
40M	2472.5	11.02	11.56	
	2420.5	10.77	10.36	
	2441.5	12.35	12.28	
	2452.5	10.79	10.22	
	2453.5	4.84	4.16	
	2462.5	4.74	4.06	

MIMO mode:

Mode	Test Frequency (MHz)	Conducted Average Output Power (dBm)			Limit
		Chain 0	Chain 1	Total	
10M	2405.5	8.21	8.62	11.43	30
	2408.5	11.49	11.63	14.57	
	2414.5	14.32	14.69	17.52	
	2420.5	17.76	18.36	21.08	
	2423.5	19.53	19.28	22.42	
	2425.5	21.56	21.21	24.40	
	2441.5	22.65	23.59	26.16	
	2449.5	22.18	21.17	24.71	
	2452.5	19.44	19.04	22.25	
	2456.5	17.12	17.56	20.36	
	2462.5	14.22	14.56	17.40	
	2468.5	11.32	11.91	14.64	
	2477.5	8.39	8.23	11.32	
20M	2410.5	7.82	8.47	11.17	
	2417.5	8.33	8.75	11.56	
	2424.5	11.7	12.59	15.18	
	2431.5	14.89	15.08	18.00	
	2435.5	17.46	17.43	20.46	
	2437.5	17.12	17.89	20.53	
	2441.5	19.78	19.27	22.54	
	2448.5	14.34	12.28	16.44	
	2453.5	10.43	11.45	13.98	
40M	2472.5	7.55	8.32	10.96	
	2420.5	7.48	6.97	10.24	
	2441.5	9.99	9.58	12.80	
	2452.5	7.79	6.54	10.22	
	2453.5	4.32	3.79	7.07	
	2462.5	4.15	3.59	6.89	

Note: the test performed at antenna port, the antenna gain is 2.32dBi, meet the EIRP limit of ISSED. the duty cycle factor have been calculated into average power result.

FCC §15.247(d), RSS-247 CLAUSE 5.5 – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

According to FCC§15.247(d):In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to RSS-247 Clause 5.5:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	19.7~21.6°C
Relative Humidity:	36~47%
ATM Pressure:	101.6~102.2kPa


* The testing was performed by Lily Xie from 2020-01-16 to 2020-01-21.

Test mode: Transmitting


Note: for 10/20/40M mode, this test item was tested with all channels have difference power level with maximum power, and reported Low/High/Worst channel in the report, more detail plots can be refer to the Raw data Annex A.

Only SISO mode was tested since larger power than MIMO mode.


Test Result: Compliance. Please refer to following plots.

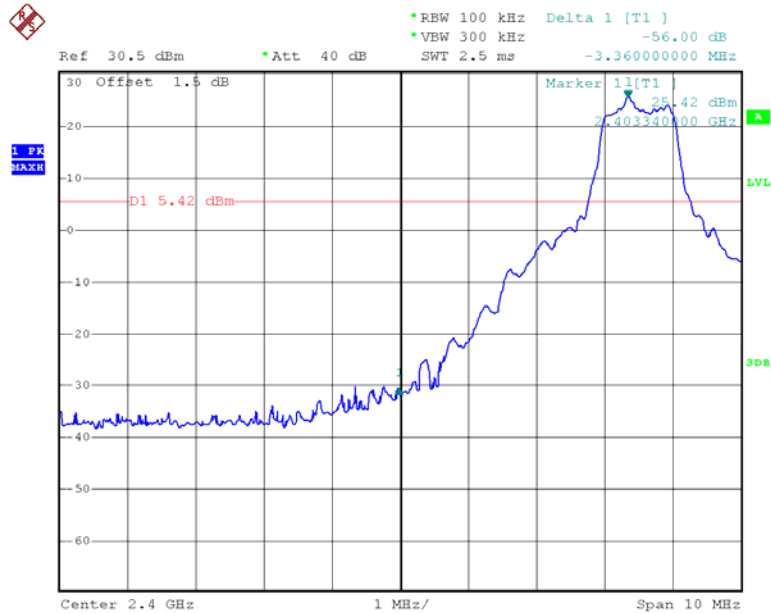**1.4M:
Chain 0:****Band Edge, Left Side**


Date: 15.JAN.2020 16:54:31

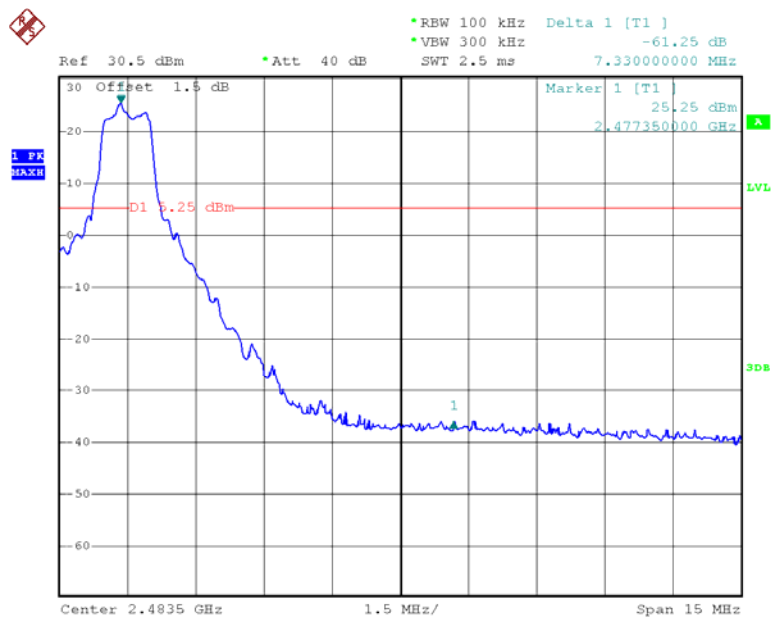Band Edge, Right Side

Date: 15.JAN.2020 17:00:46

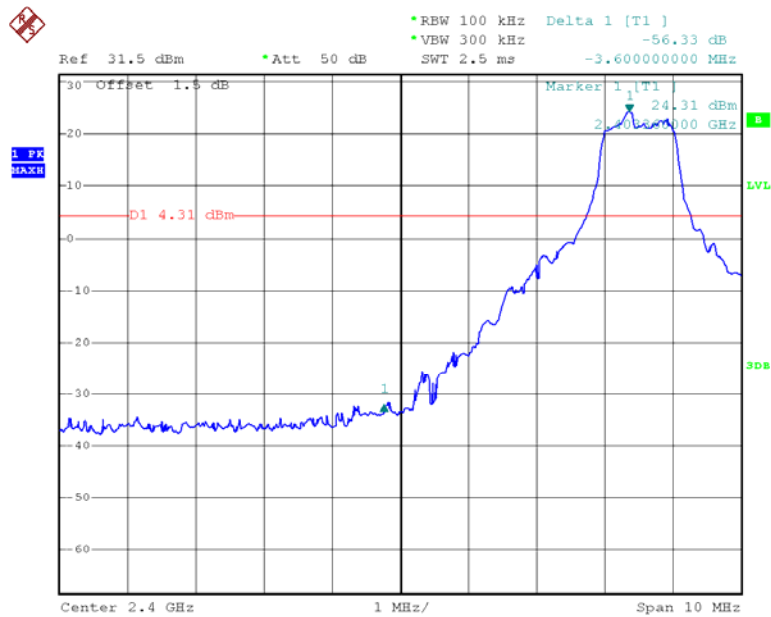Chain 1:**Band Edge, Left Side**


Date: 16.JAN.2020 11:57:49

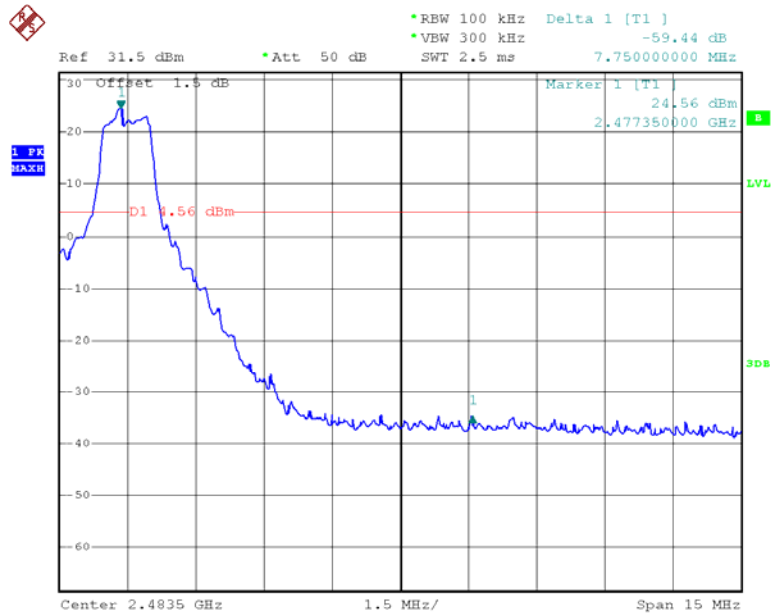Band Edge, Right Side

Date: 16.JAN.2020 11:59:44


**3M:
Chain 0:**

Band Edge, Left Side

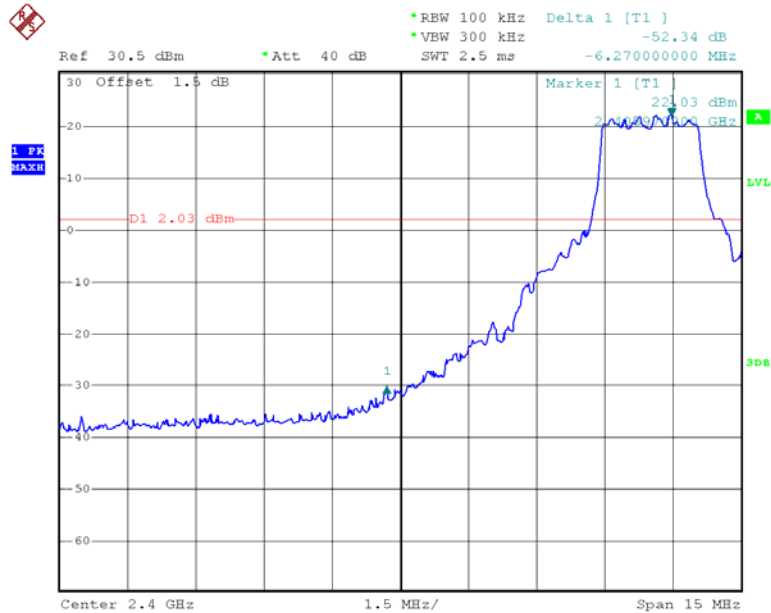


Date: 15.JAN.2020 19:12:17


Band Edge, Right Side

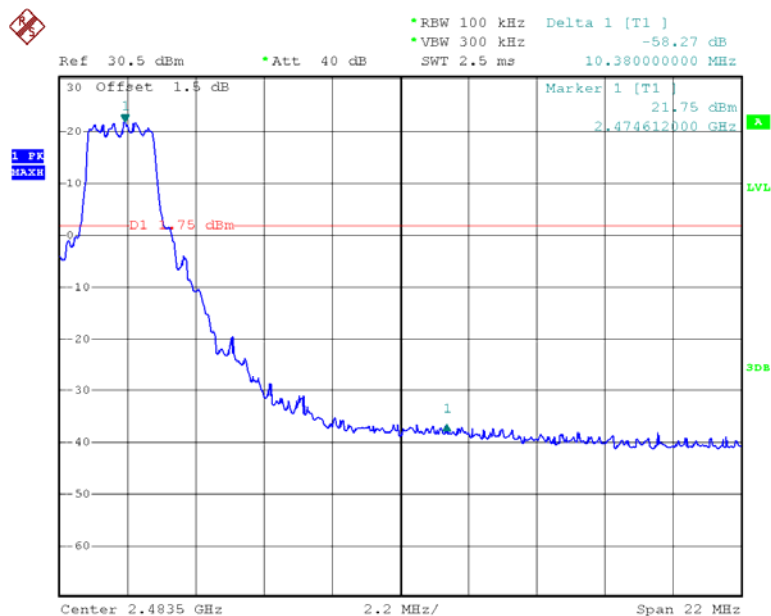

Date: 15.JAN.2020 19:17:18

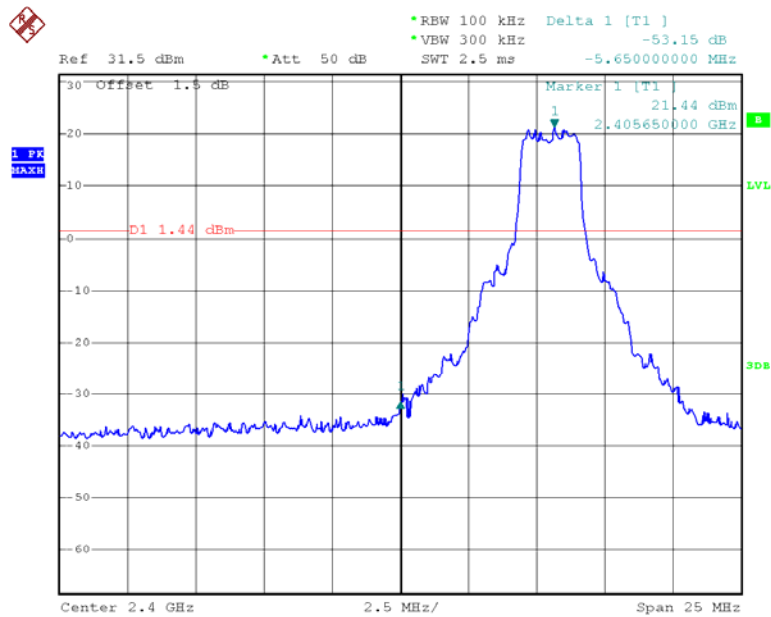Chain 1:**Band Edge, Left Side**


Date: 16.JAN.2020 11:56:47

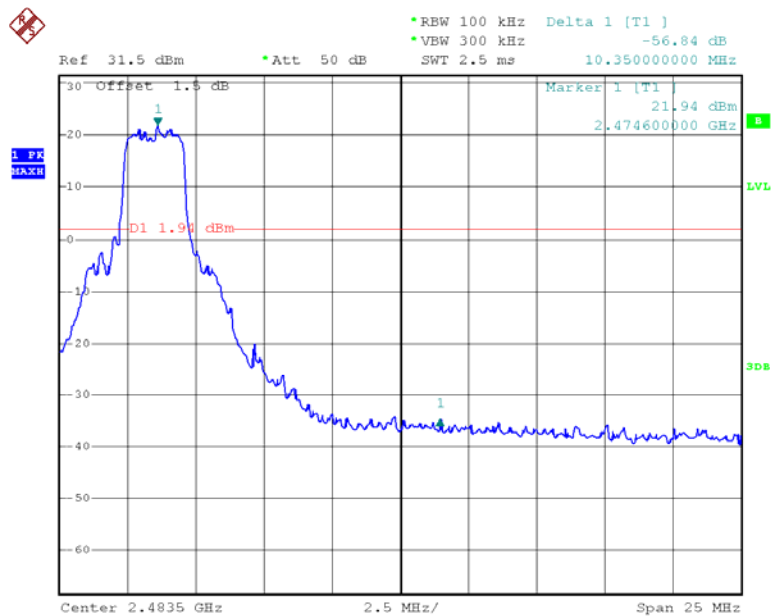Band Edge, Right Side

Date: 16.JAN.2020 11:54:42


10M mode:
Chain 0:

Band Edge, Left Side

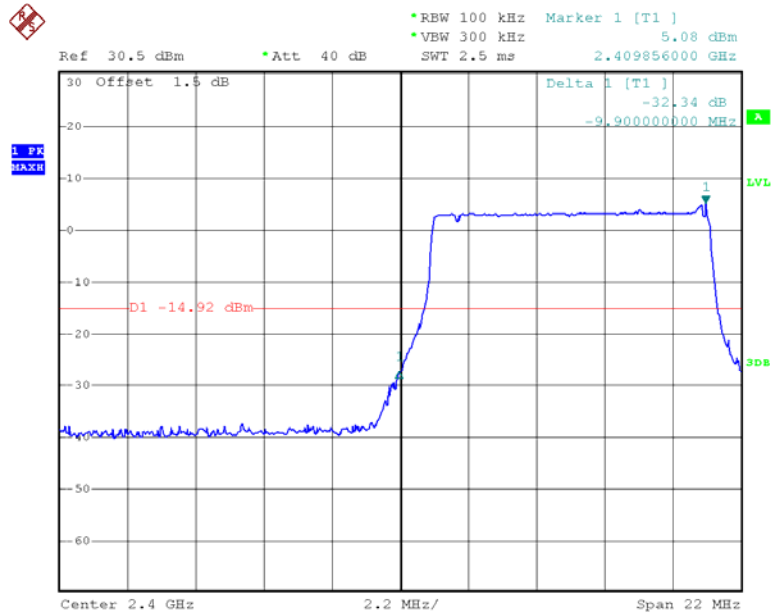

Date: 15.JAN.2020 19:22:24


Band Edge, Right Side

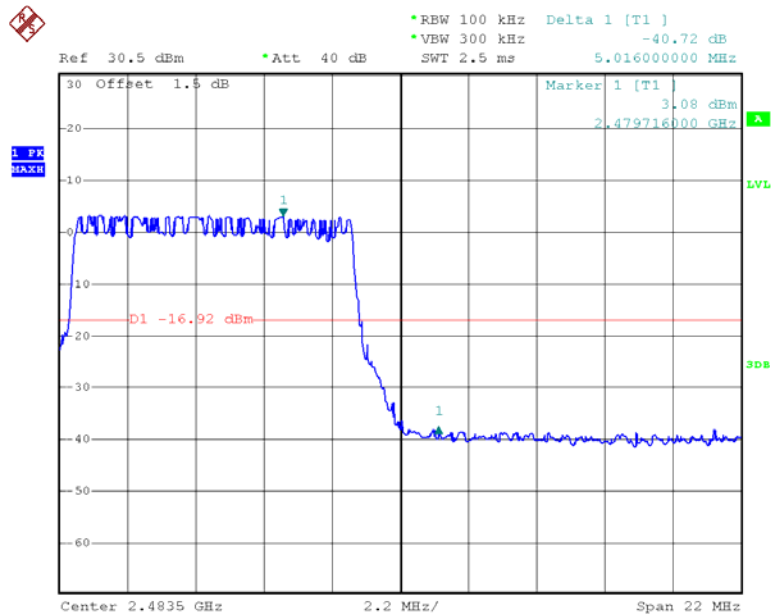

Date: 15.JAN.2020 19:26:29


Chain 1:

Band Edge, Left Side

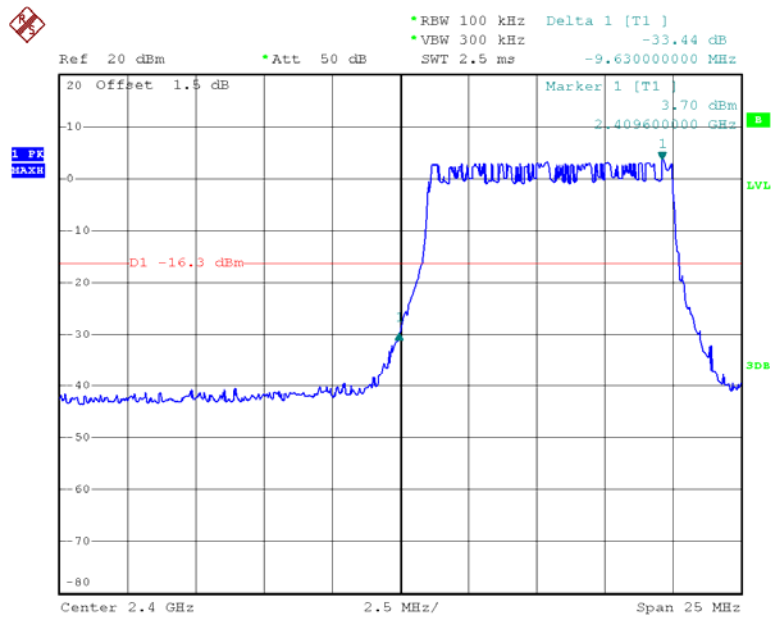

Date: 16.JAN.2020 11:49:32


Band Edge, Right Side

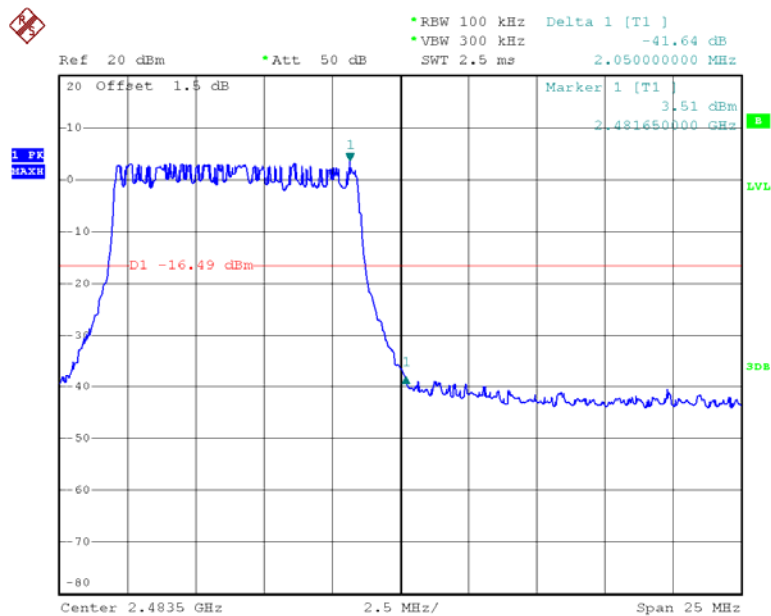

Date: 16.JAN.2020 11:53:25


20M Mode:
Chain 0:

Band Edge, Left Side

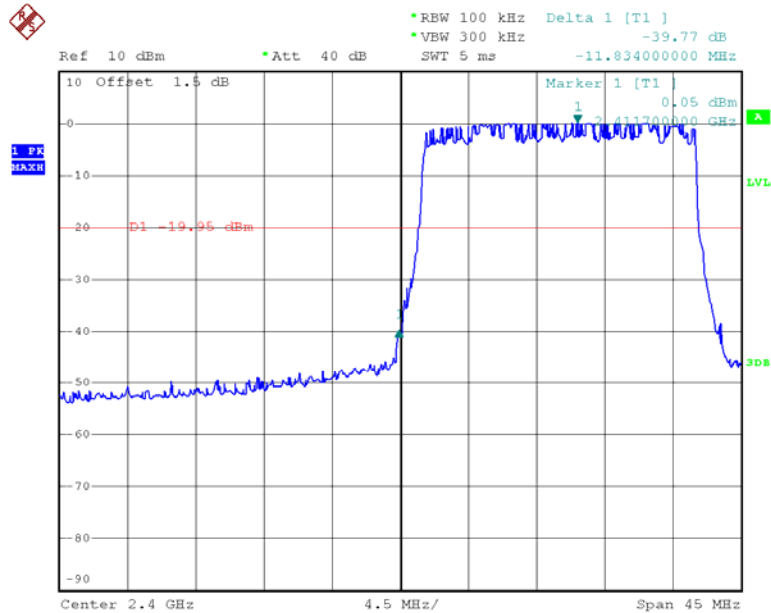

Date: 15.JAN.2020 19:32:52


Band Edge, Right Side

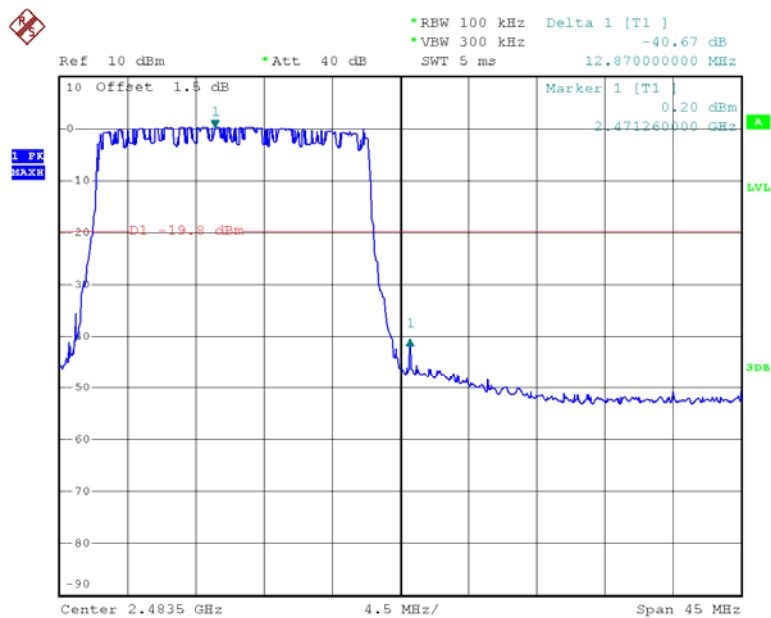

Date: 15.JAN.2020 19:38:58


Chain 1:

Band Edge, Left Side

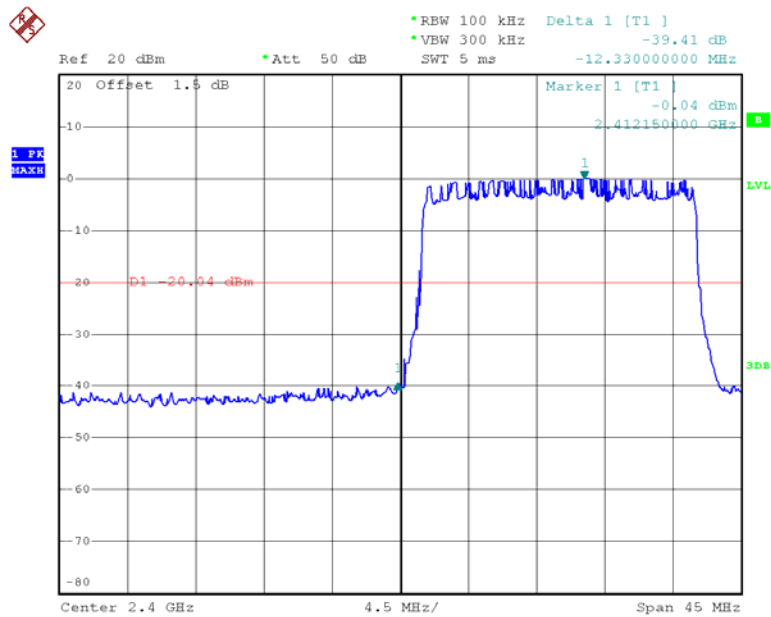

Date: 16.JAN.2020 11:48:15


Band Edge, Right Side

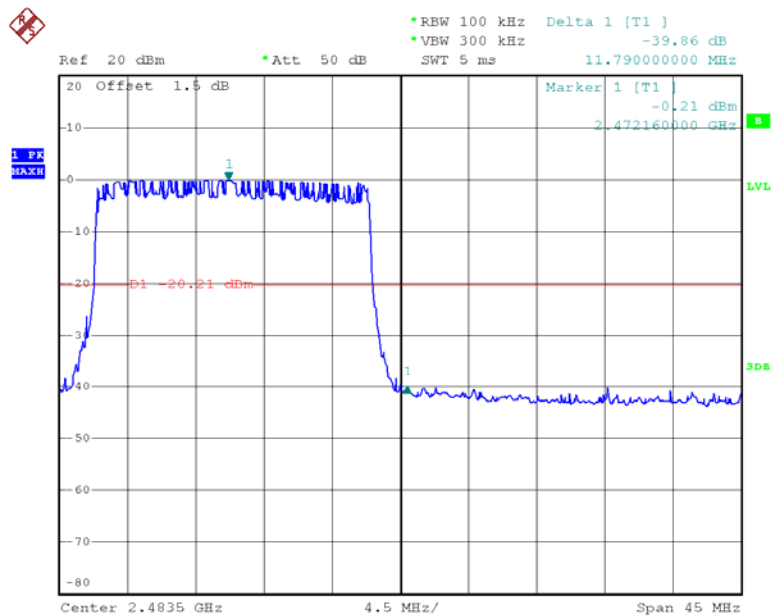

Date: 16.JAN.2020 11:40:44


40M Mode:
Chain 0:

Band Edge, Left Side

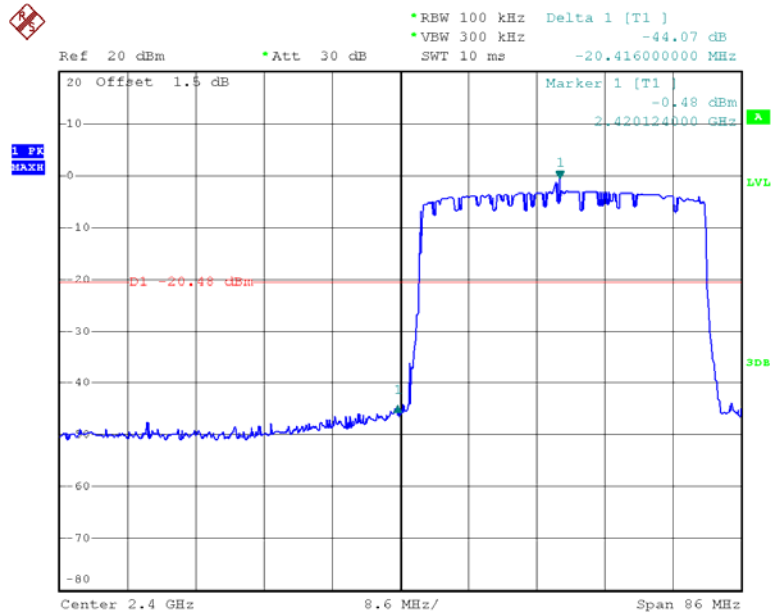


Date: 21.JAN.2020 13:27:38


Band Edge, Right Side

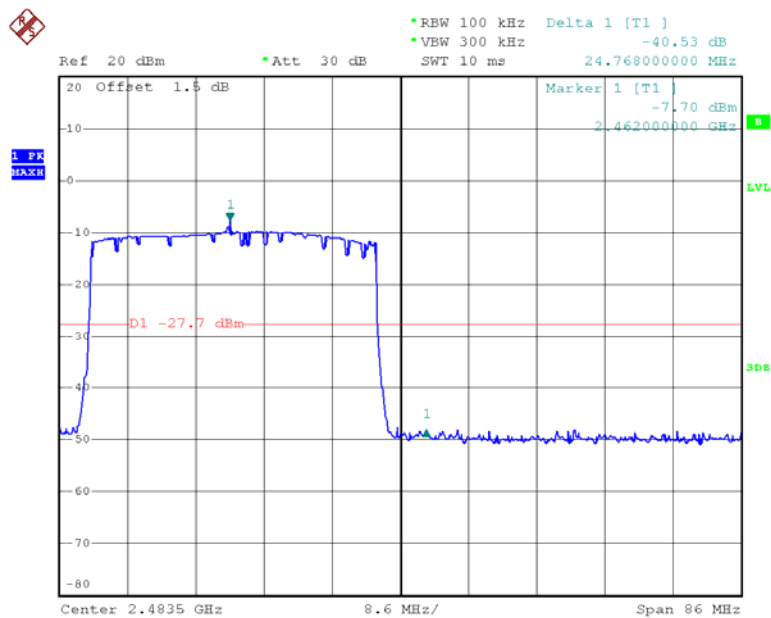

Date: 21.JAN.2020 13:53:17

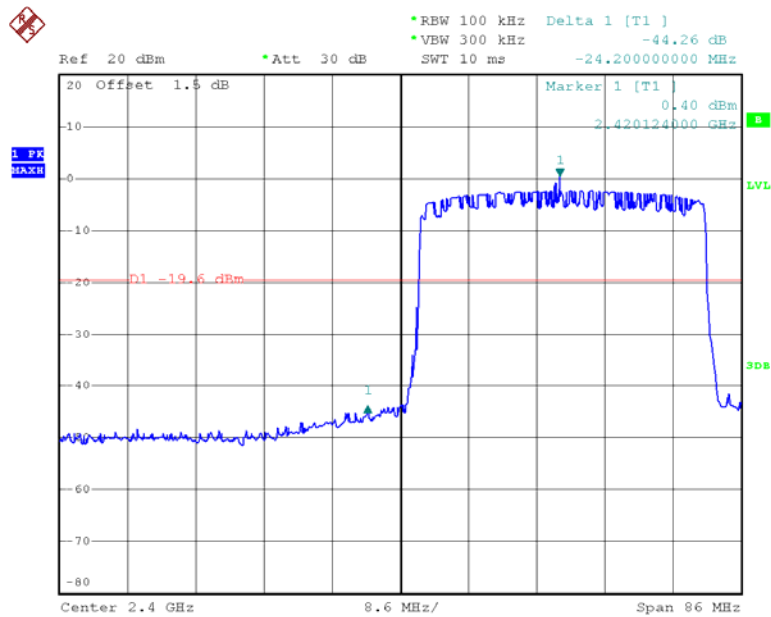Chain 1:**Band Edge, Left Side**

Date: 21.JAN.2020 14:18:24

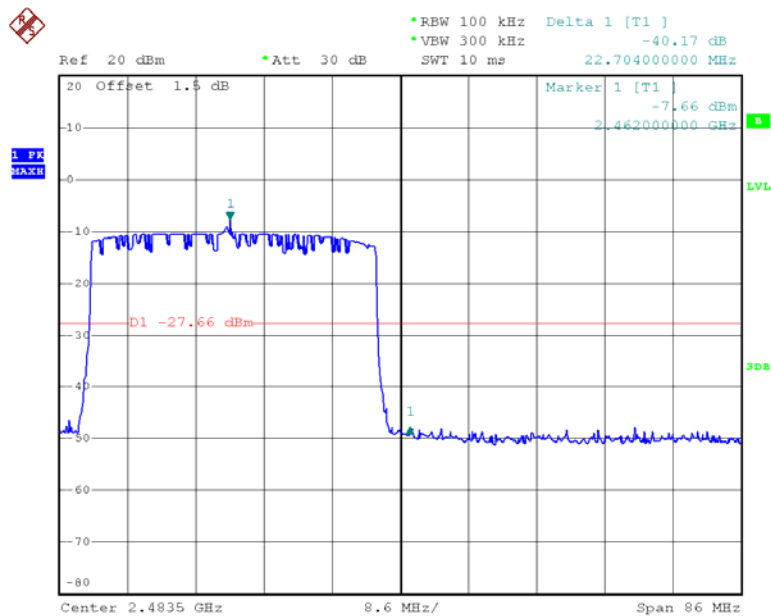Band Edge, Right Side

Date: 21.JAN.2020 13:58:12

FCC §15.247(e), RSS-247 CLAUSE 5.2 B - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

According to RSS-247 §5.2 b):

- b) The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of section 5.4(d), (i.e. the power spectral density shall be determined using the same method as is used to determine the conducted output power).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41010012	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	19.7~21.6°C
Relative Humidity:	36~47%
ATM Pressure:	101.6~102.2kPa

* The testing was performed by Lily Xie from 2020-01-16 to 2020-01-21.

Test Result: Compliance, Please refer to the following table and plots

Test Mode: Transmitting

SISO mode:


Mode	Channel	Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/3kHz)		
			Chain 0	Chain 1	Limit
1.4M	Low	2403.5	7.78	7.56	≤8
	Middle	2441.5	7.79	7.23	
	High	2477.5	7.68	7.58	
3M	Low	2405.5	2.19	3.31	
	Middle	2441.5	2.49	3.22	
	High	2474.5	2.88	3.33	
10M	Low	2405.5	-20.93	-20.30	
	Middle	2441.5	-5.58	-6.09	
	High	2477.5	-21.12	-20.37	
20M	Low	2410.5	-24.31	-24.48	
	Middle	2441.5	-15.91	-16.92	
	High	2472.5	-24.40	-24.71	
40M	Low	2420.5	-28.19	-27.63	
	Middle	2441.5	-26.17	-26.51	
	High	2462.5	-33.33	-34.27	

MIMO mode:

Mode	Channel	Frequency (MHz)	Maximum Conducted Power Spectral Density (dBm/3kHz)			Limit
			Chain 0	Chain 1	Total	
10M	Low	2405.5	-23.05	-22.22	-19.60	≤8
	Middle	2441.5	-8.34	-8.27	-5.29	
	High	2477.5	-23.76	-23.23	-20.48	
20M	Low	2410.5	-27.04	-26.80	-23.91	
	Middle	2441.5	-17.66	-17.12	-14.37	
	High	2472.5	-26.93	-26.80	-23.85	
40M	Low	2420.5	-30.36	-31.20	-27.75	
	Middle	2441.5	-28.66	-30.01	-26.27	
	High	2462.5	-35.42	-38.50	-33.68	


Chain 0: 1.4M

Power Spectral Density Low Channel

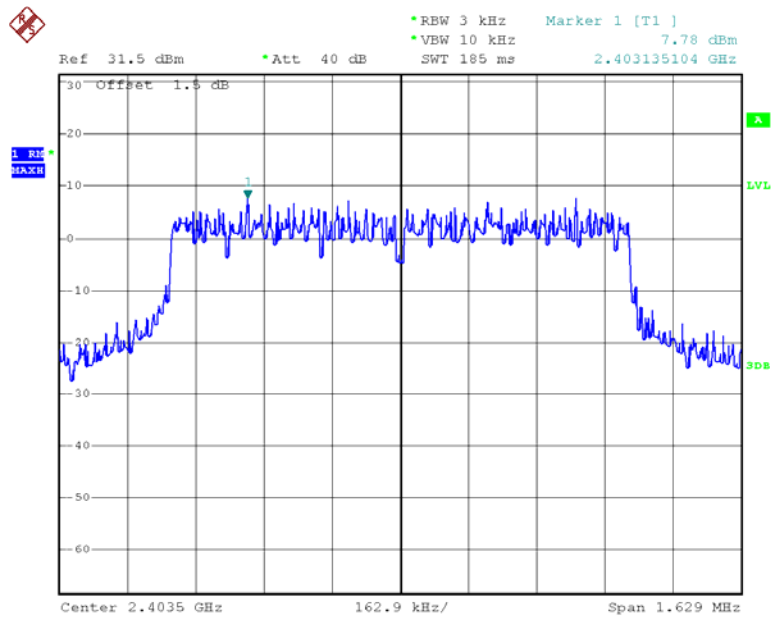


Date: 16.JAN.2020 13:28:48

Power Spectral Density Middle Channel

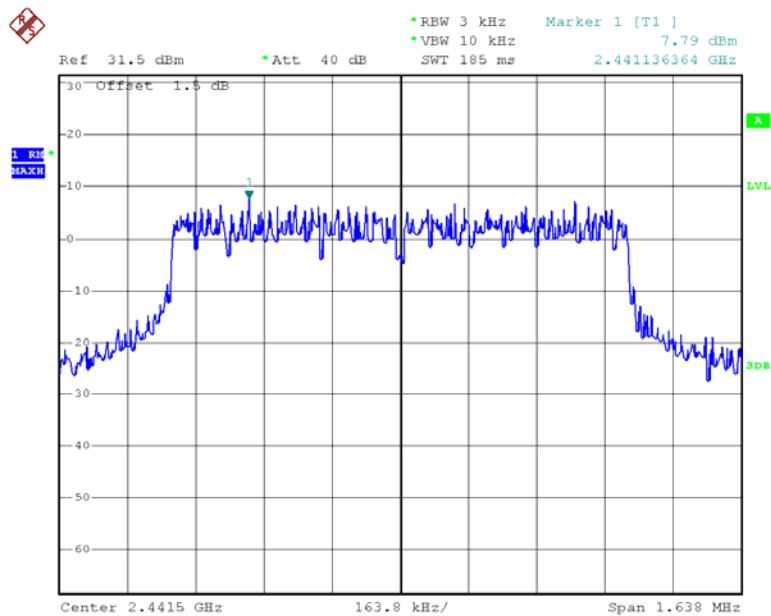

Date: 16.JAN.2020 13:29:34


Power Spectral Density High Channel

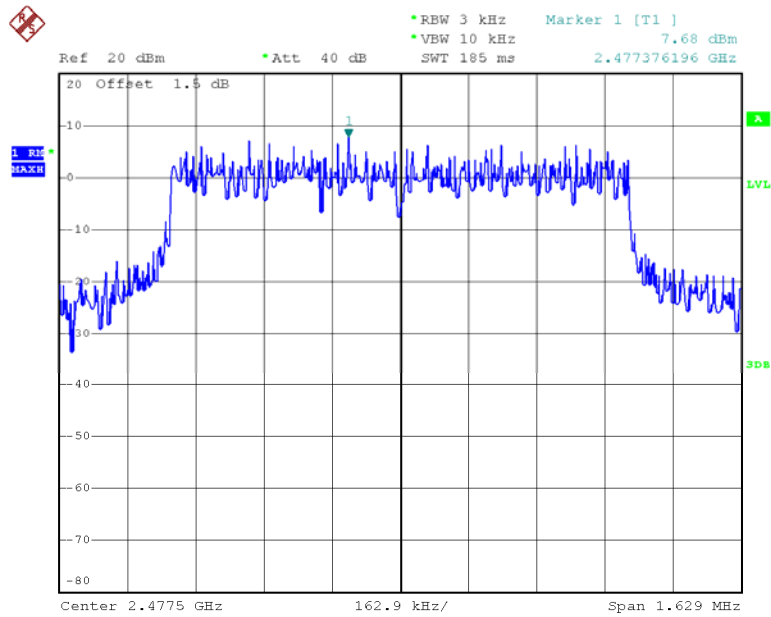

Date: 16.JAN.2020 15:21:20


3M:

Power Spectral Density Low Channel

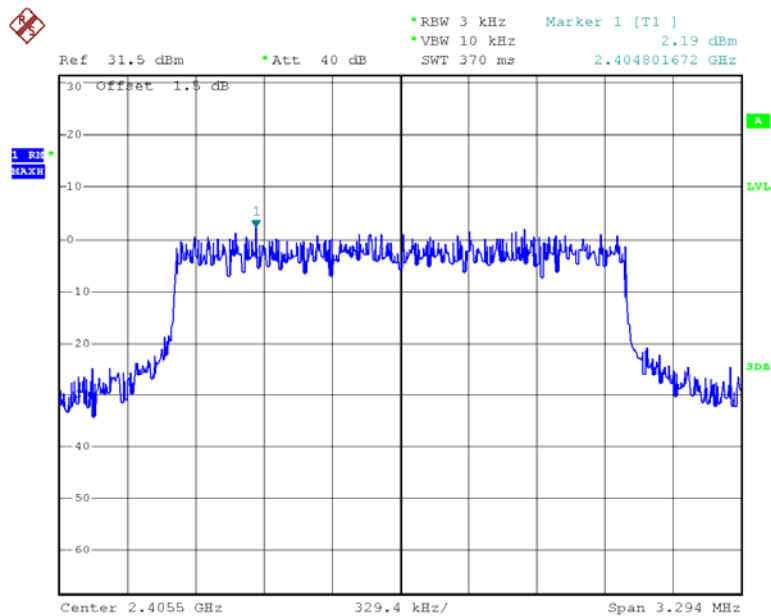


Date: 16.JAN.2020 13:31:41

Power Spectral Density Middle Channel

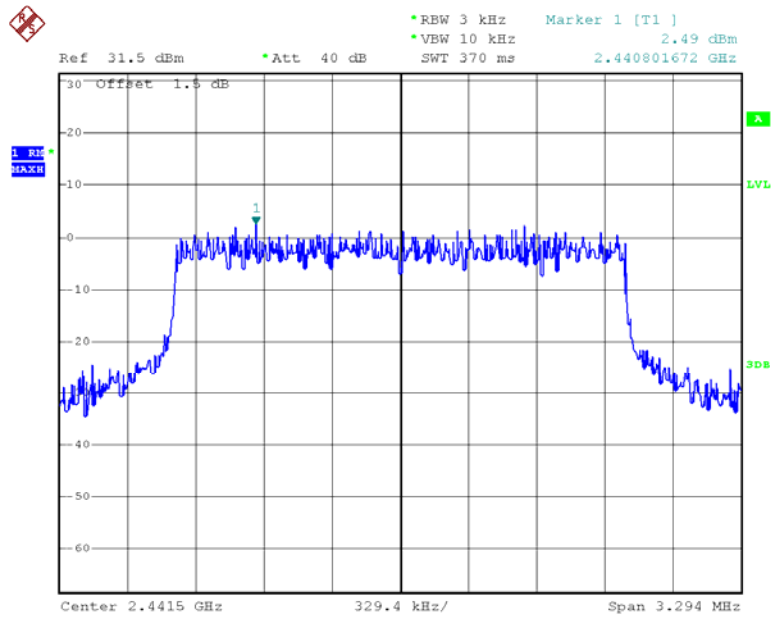

Date: 16.JAN.2020 13:32:14


Power Spectral Density High Channel

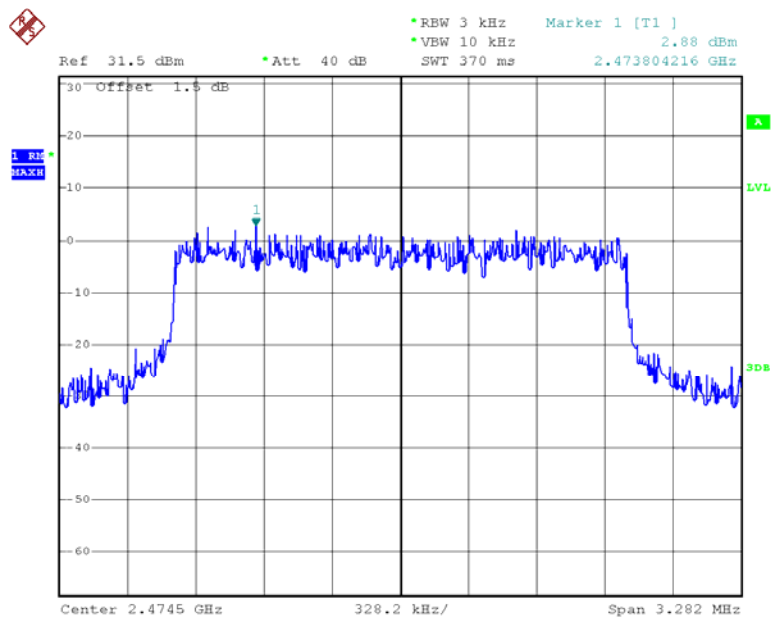

Date: 16.JAN.2020 13:38:42


10M:

Power Spectral Density Low Channel

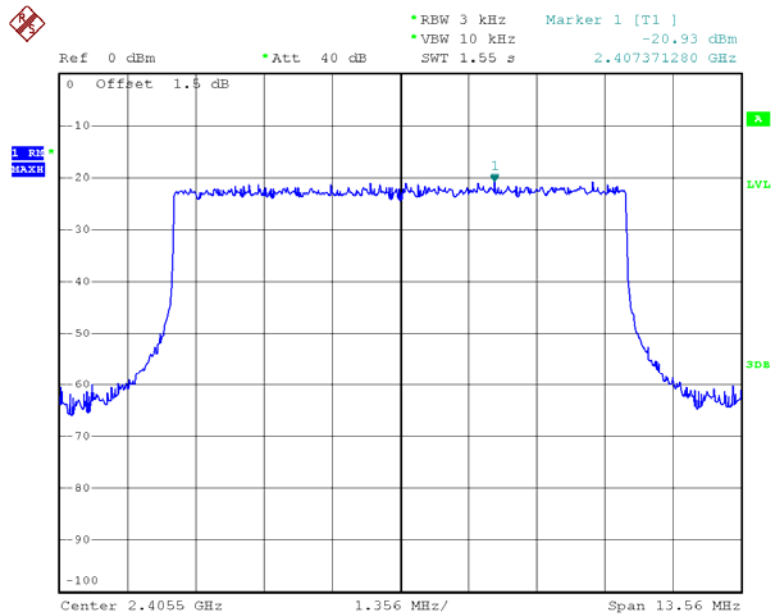


Date: 16.JAN.2020 13:39:40

Power Spectral Density Middle Channel

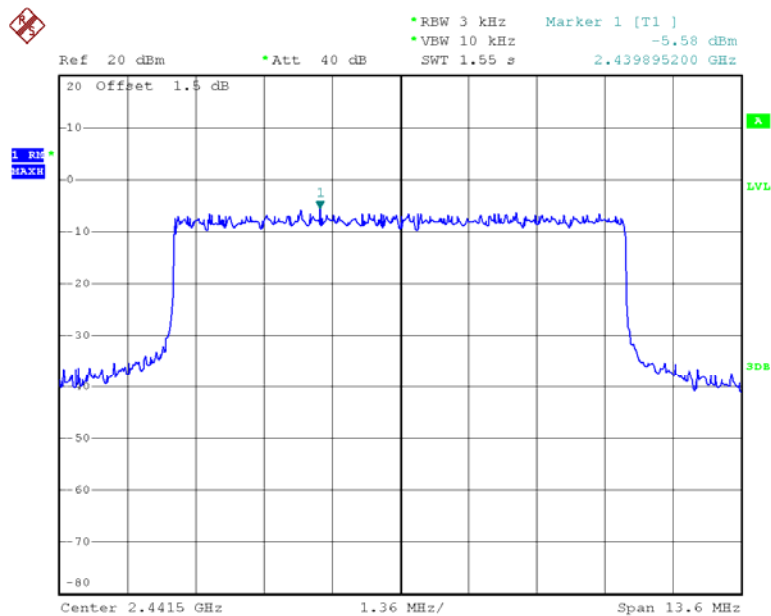

Date: 16.JAN.2020 13:40:25


Power Spectral Density High Channel

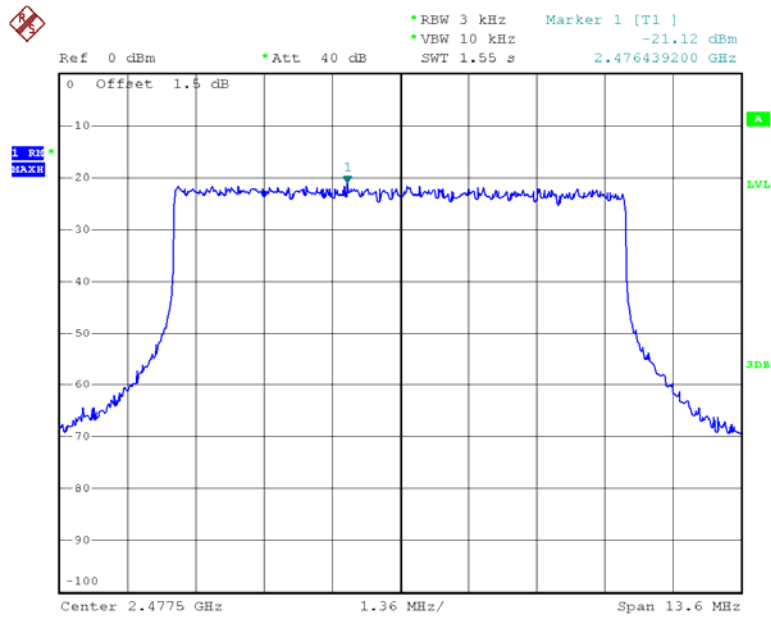

Date: 16.JAN.2020 13:41:03


20M:

Power Spectral Density Low Channel

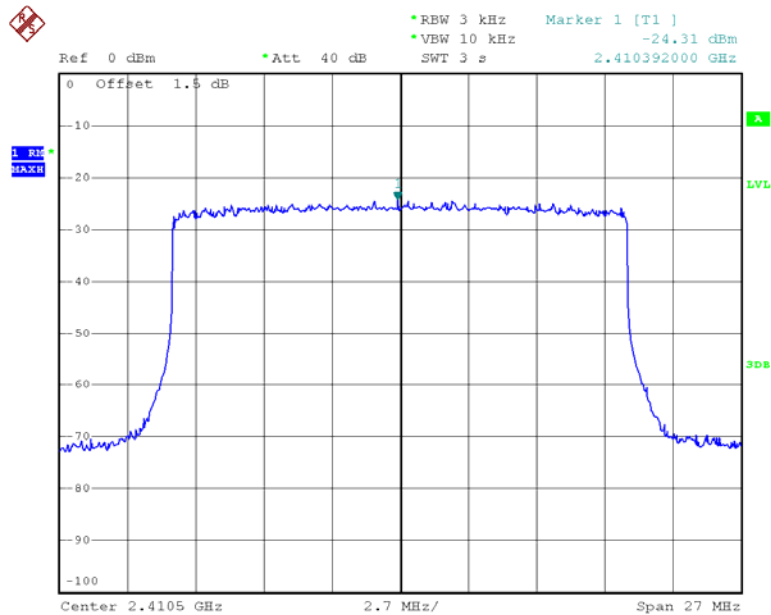


Date: 16.JAN.2020 13:42:43

Power Spectral Density Middle Channel

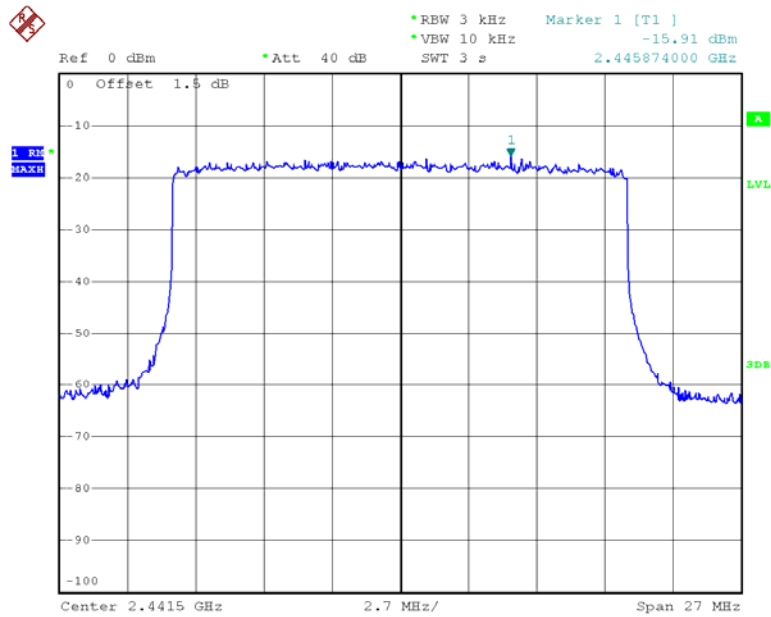

Date: 16.JAN.2020 13:43:17


Power Spectral Density High Channel

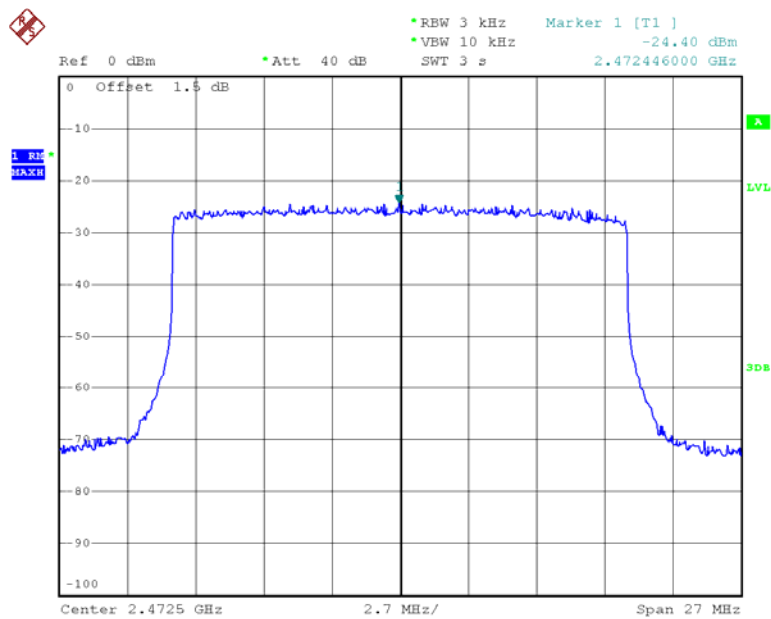

Date: 16.JAN.2020 13:44:25


40M:

Power Spectral Density Low Channel

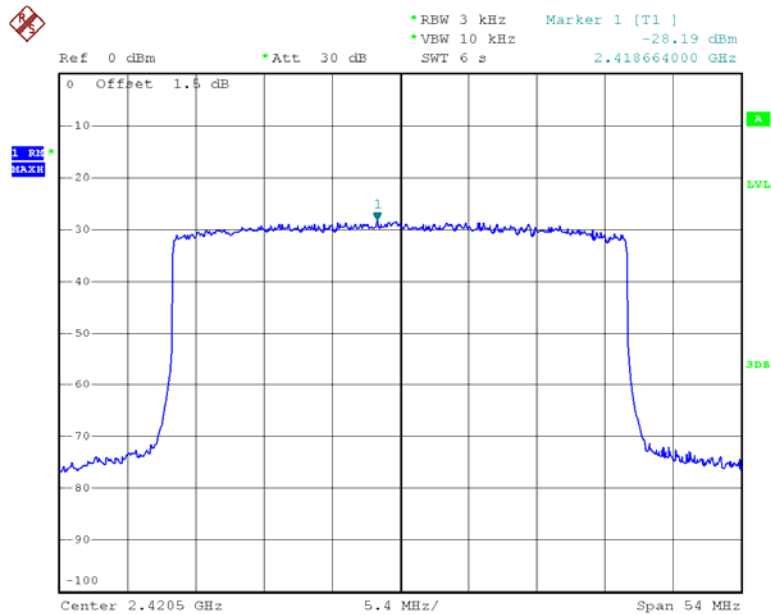


Date: 21.JAN.2020 13:37:16

Power Spectral Density Middle Channel

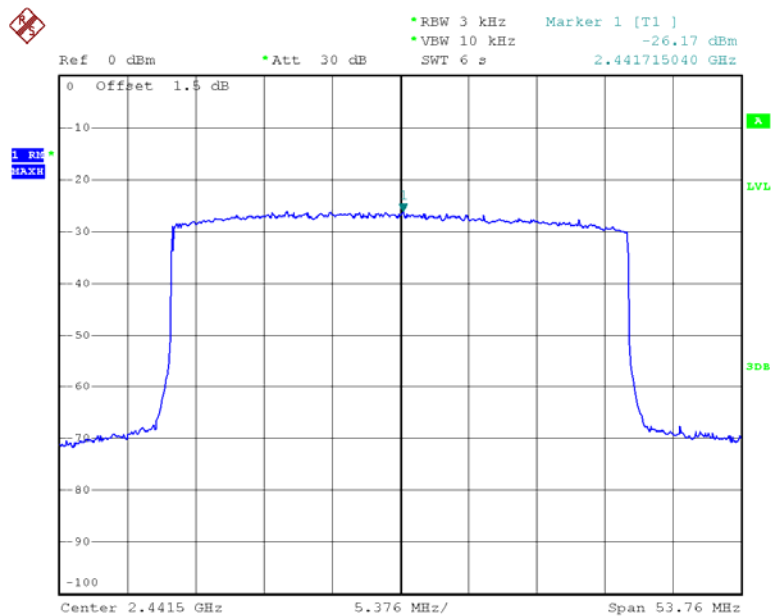

Date: 21.JAN.2020 14:23:08


Power Spectral Density High Channel

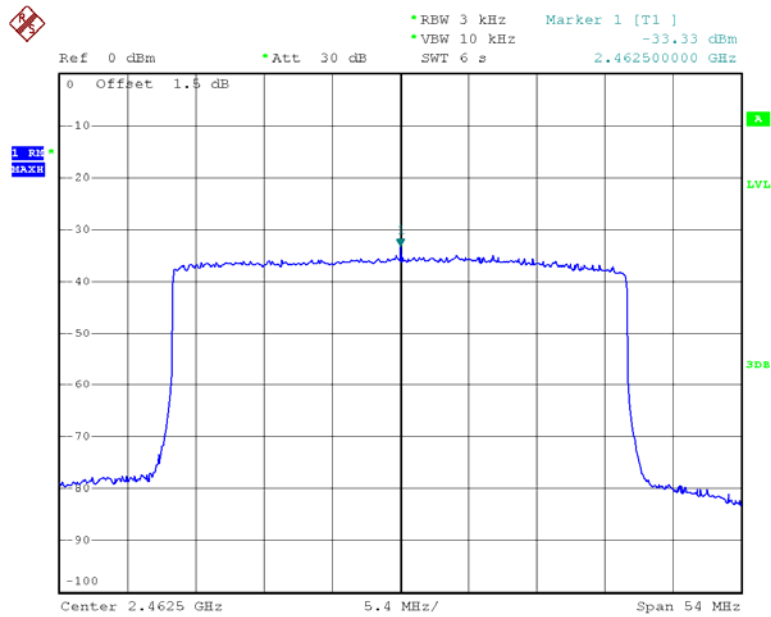

Date: 21.JAN.2020 13:51:27


Chain 1: 1.4M

Power Spectral Density Low Channel

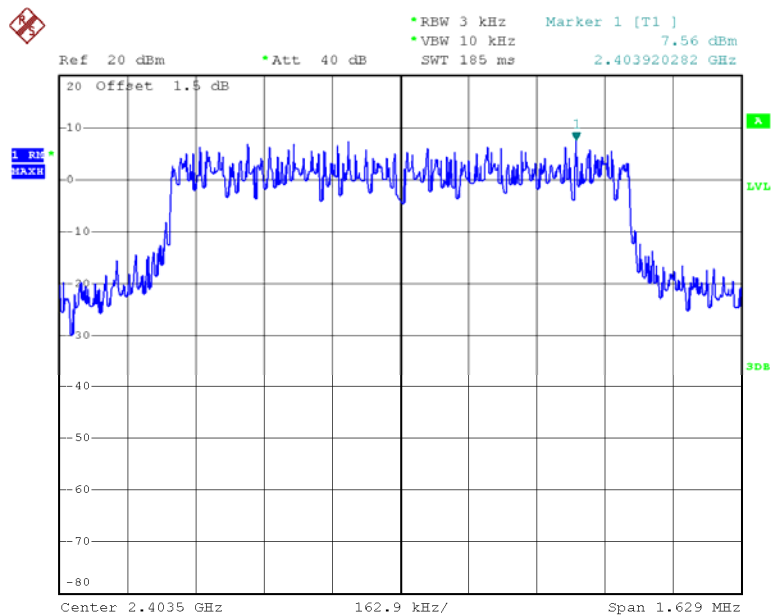


Date: 16.JAN.2020 15:23:39

Power Spectral Density Middle Channel

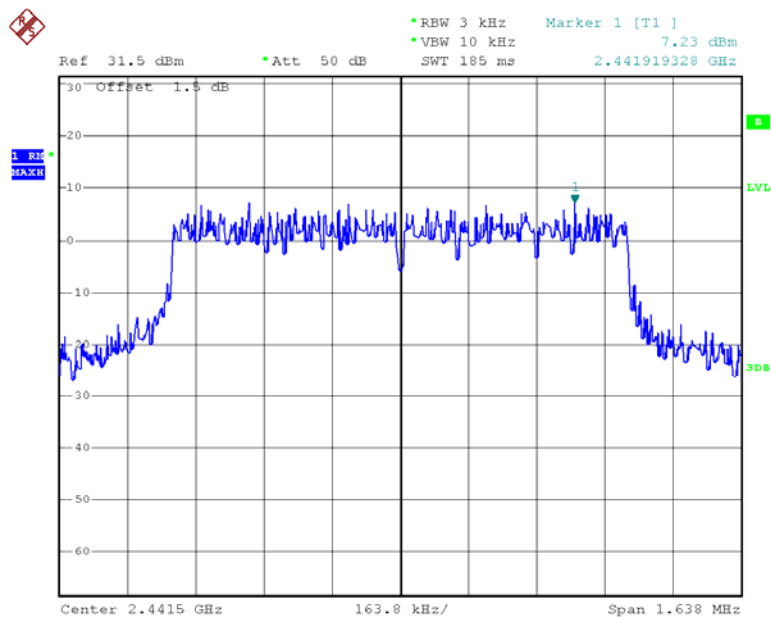

Date: 16.JAN.2020 11:06:46


Power Spectral Density High Channel

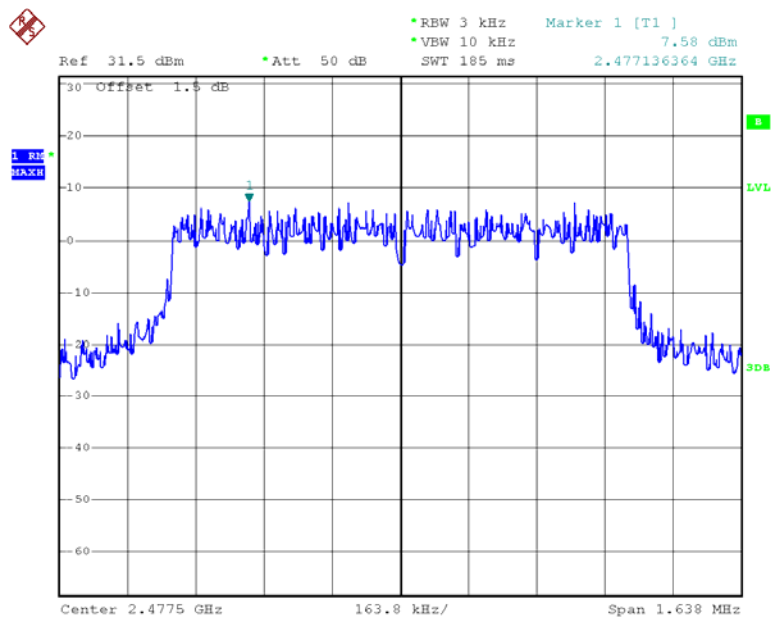

Date: 16.JAN.2020 11:08:20


3M:

Power Spectral Density Low Channel

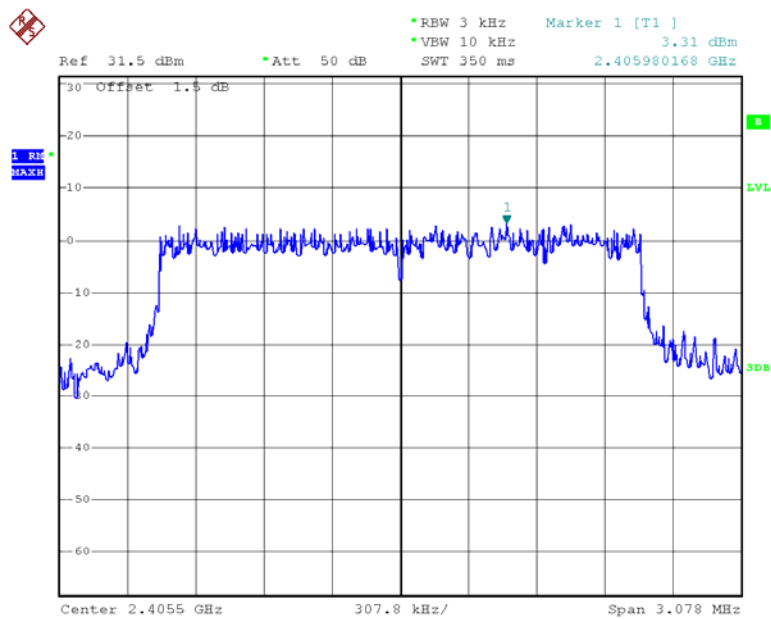


Date: 16.JAN.2020 11:10:16

Power Spectral Density Middle Channel

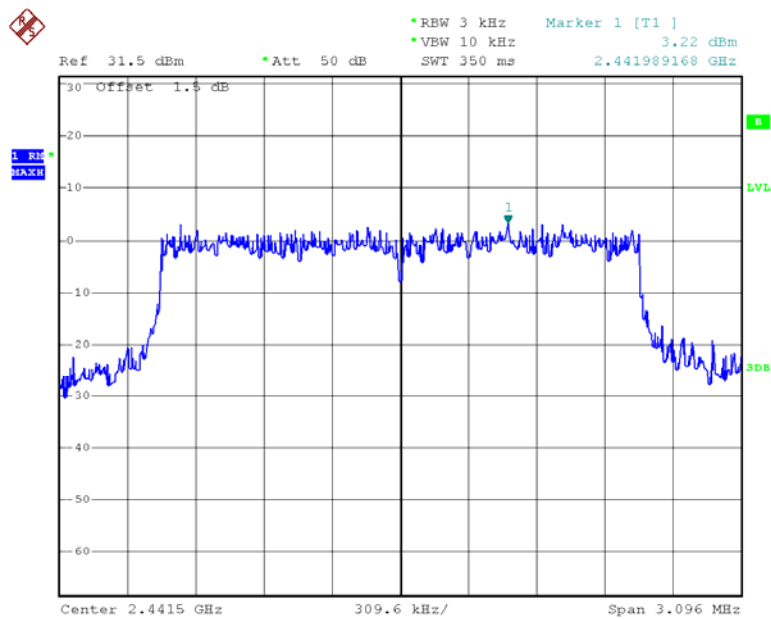

Date: 16.JAN.2020 11:11:48


Power Spectral Density High Channel

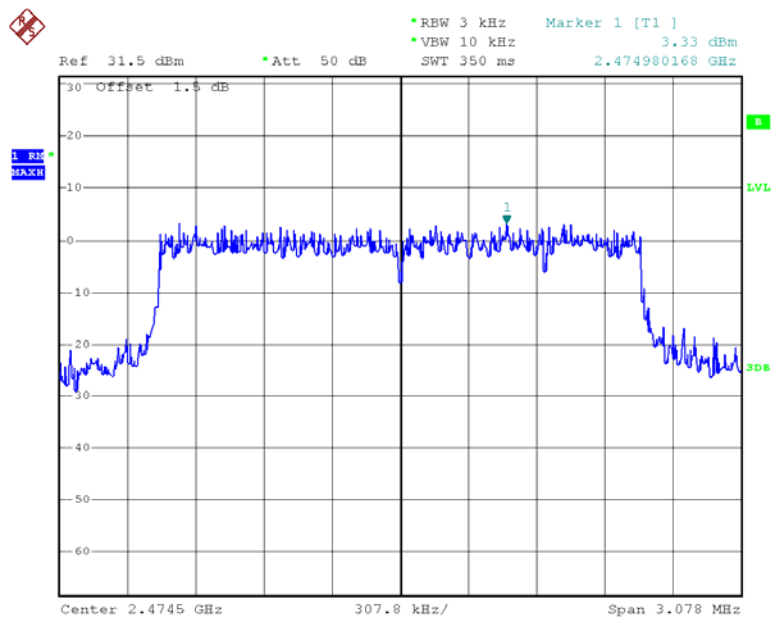

Date: 16.JAN.2020 11:19:39


10M:

Power Spectral Density Low Channel

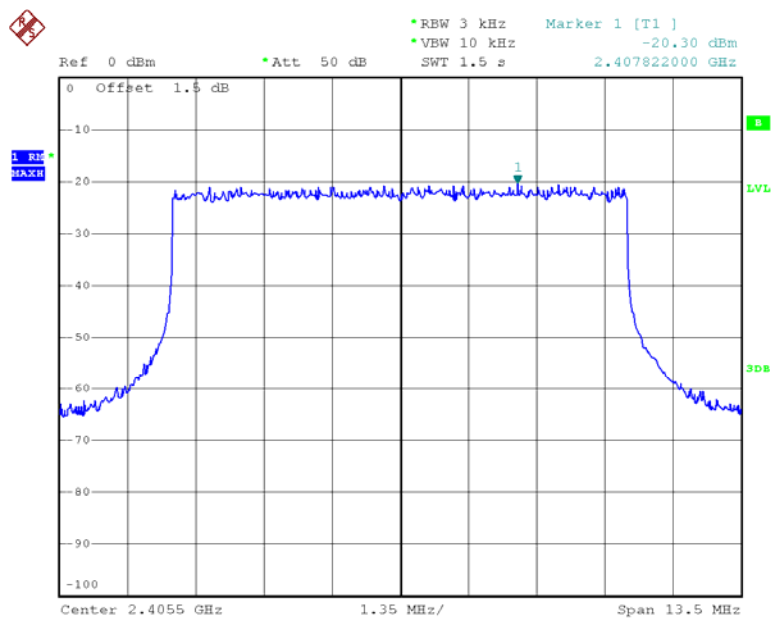


Date: 16.JAN.2020 11:21:43

Power Spectral Density Middle Channel

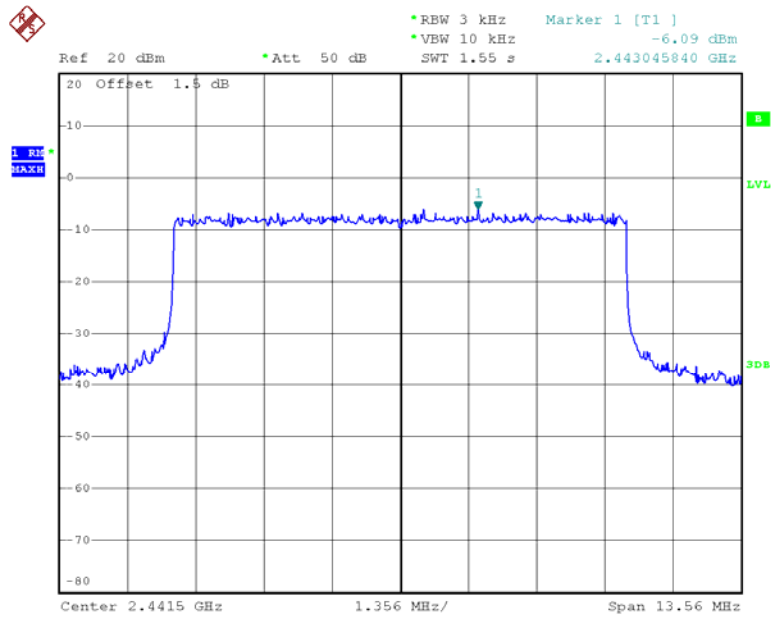

Date: 16.JAN.2020 11:24:28


Power Spectral Density High Channel

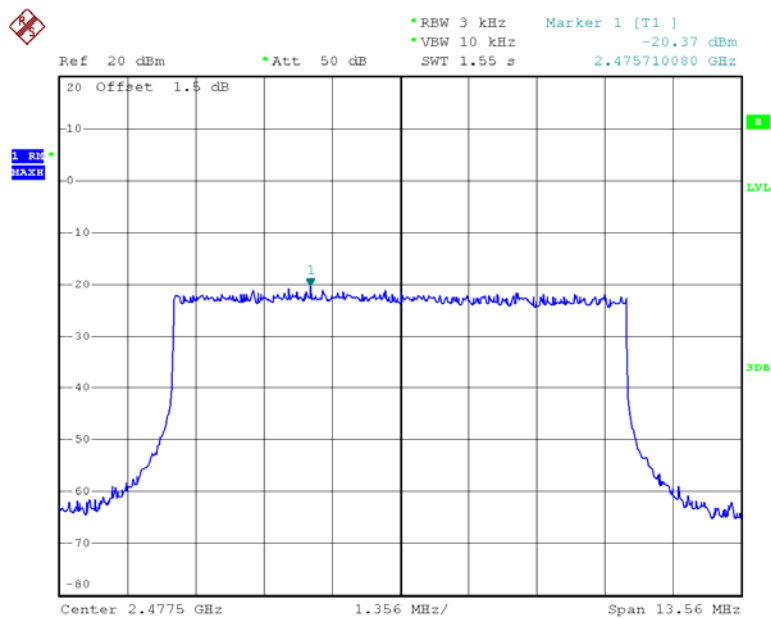

Date: 16.JAN.2020 11:27:00


20M:

Power Spectral Density Low Channel

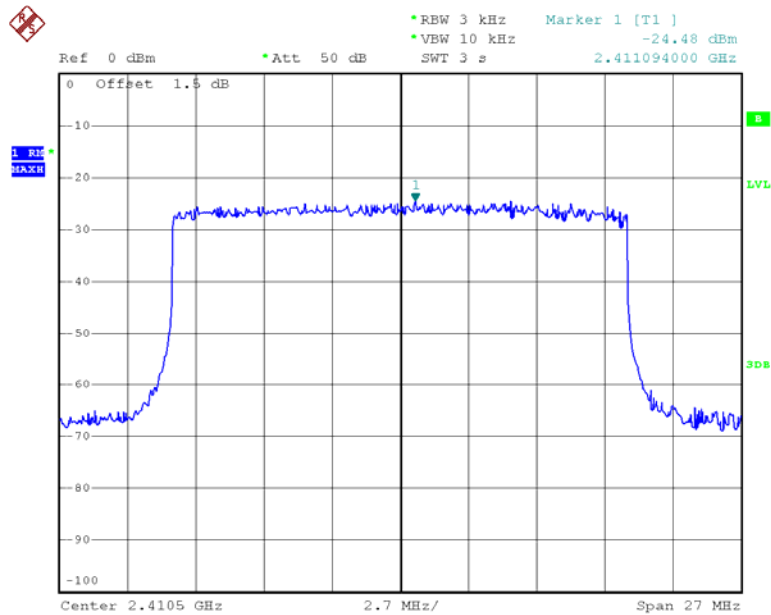


Date: 16.JAN.2020 11:32:22

Power Spectral Density Middle Channel

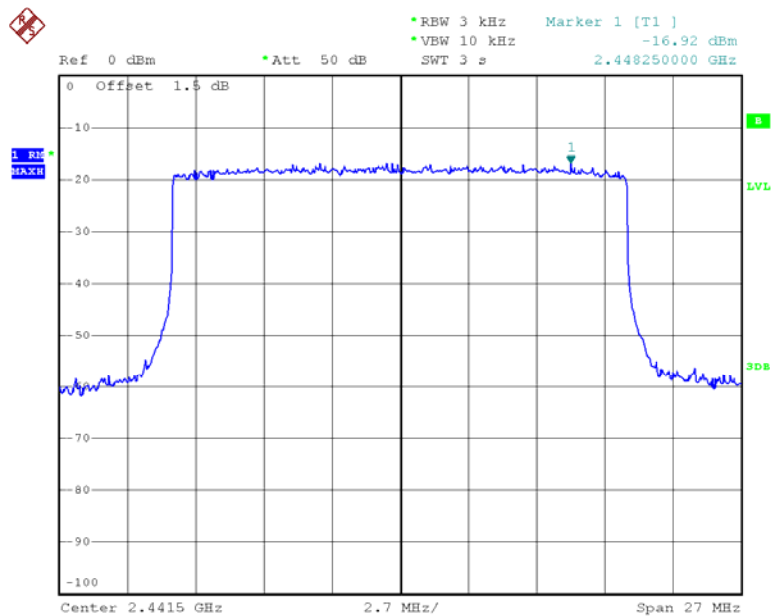

Date: 16.JAN.2020 11:33:44


Power Spectral Density High Channel

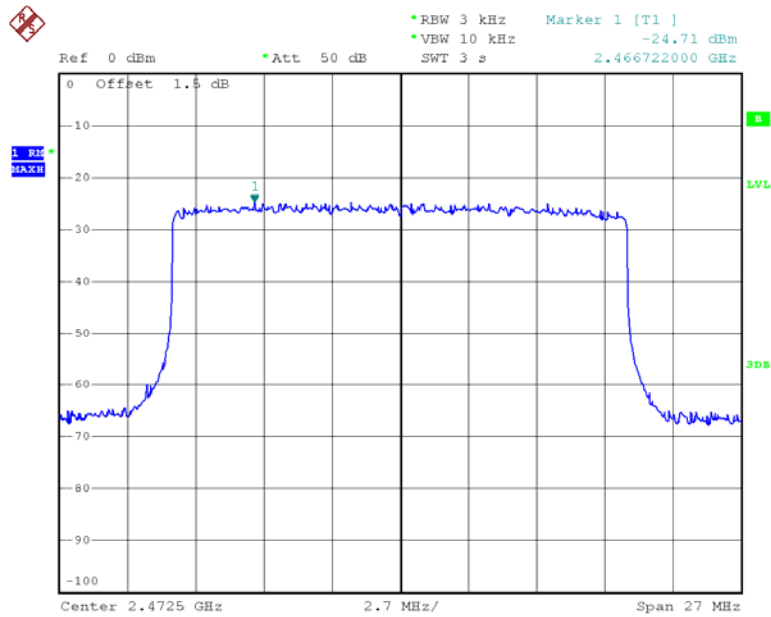

Date: 16.JAN.2020 11:37:51


40M:

Power Spectral Density Low Channel

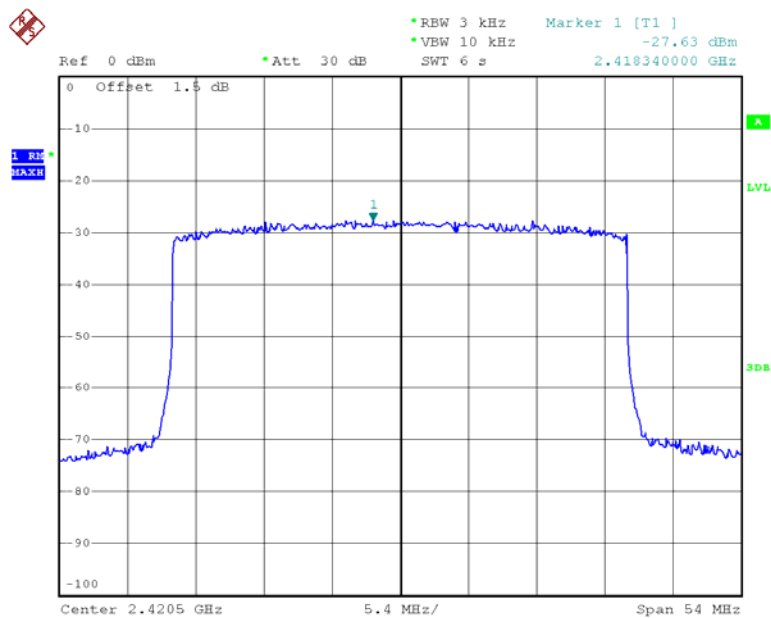


Date: 21.JAN.2020 14:17:23

Power Spectral Density Middle Channel

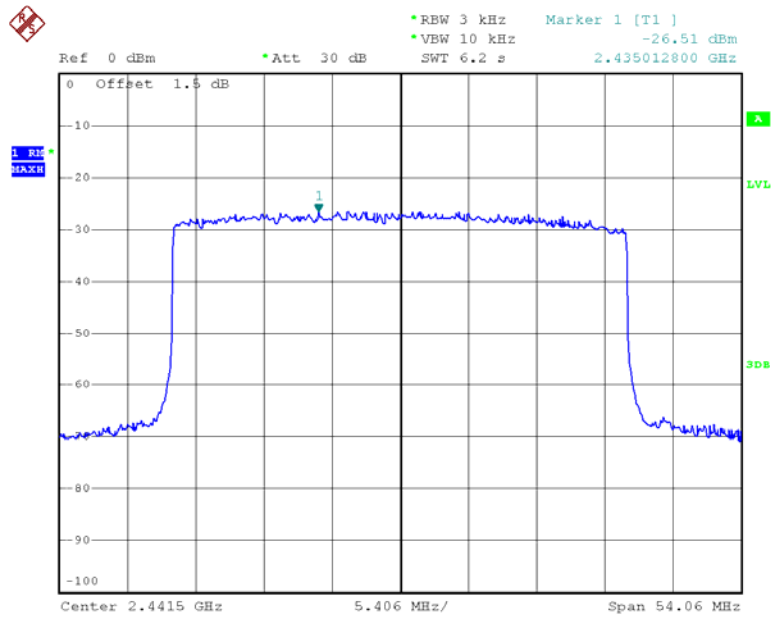

Date: 21.JAN.2020 14:10:41


Power Spectral Density High Channel

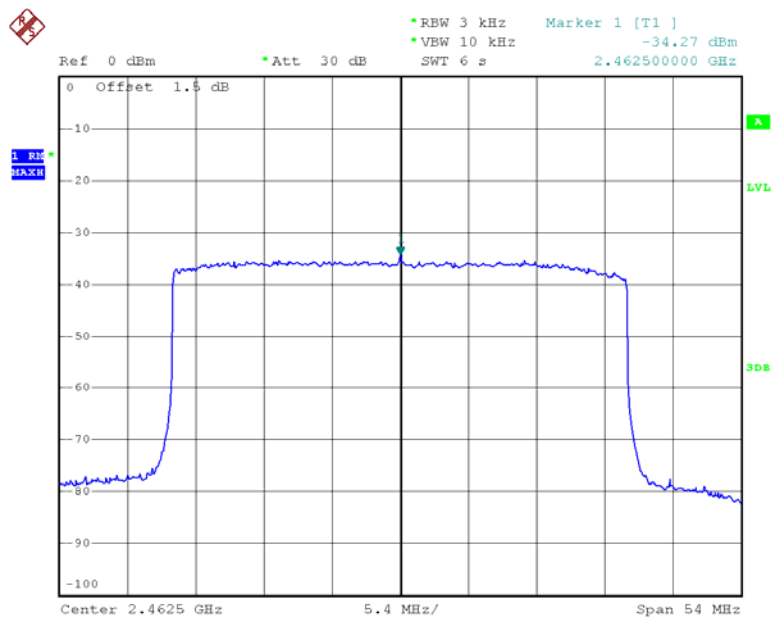

Date: 21.JAN.2020 14:01:24


MIMO mode:
Chain 0, 10M:

Power Spectral Density Low Channel

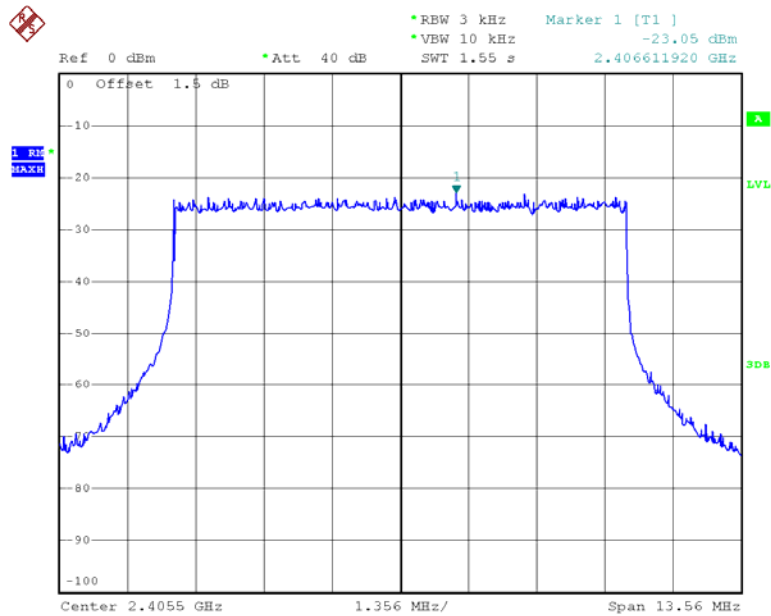


Date: 17.JAN.2020 11:05:31

Power Spectral Density Middle Channel

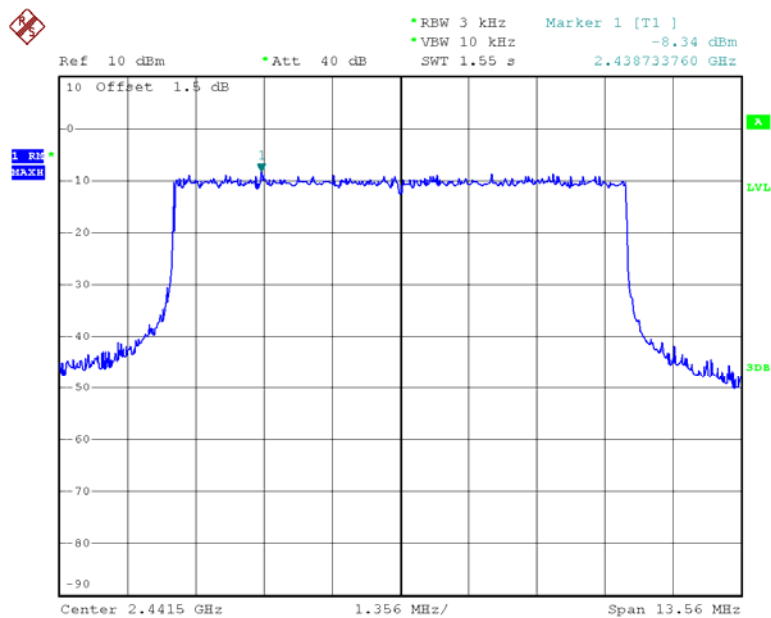

Date: 17.JAN.2020 11:09:18


Power Spectral Density High Channel

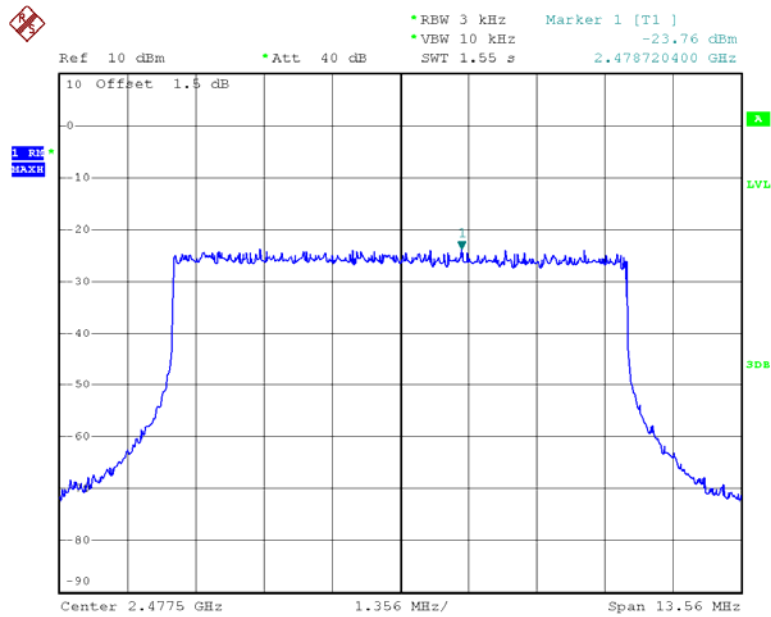


Date: 17.JAN.2020 11:12:45

20M:


Power Spectral Density Low Channel

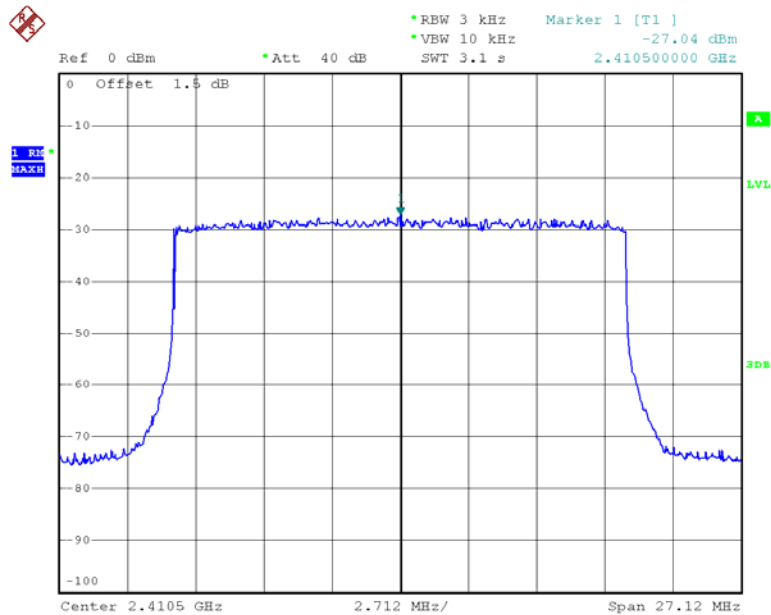

Date: 17.JAN.2020 11:14:10

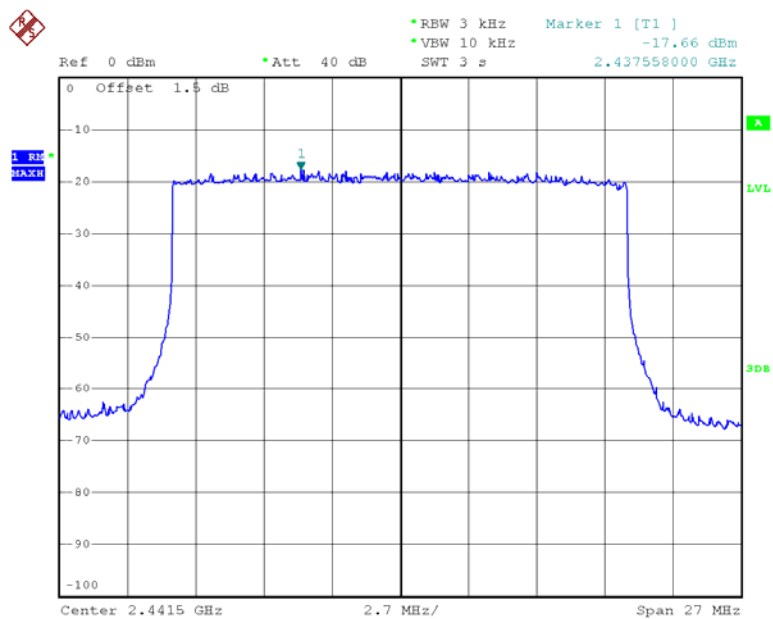Power Spectral Density Middle Channel


Date: 17.JAN.2020 11:20:33

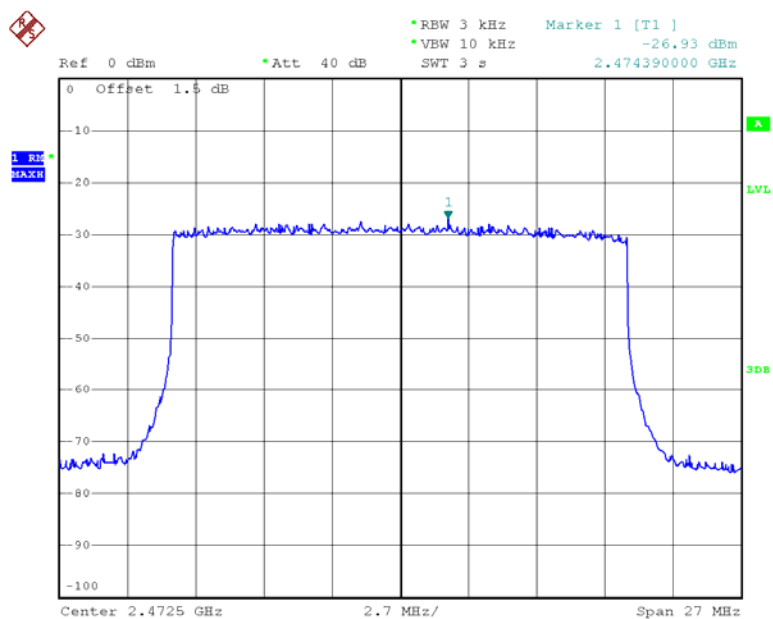Power Spectral Density High Channel

Date: 17.JAN.2020 11:23:34


40M:

Power Spectral Density Low Channel

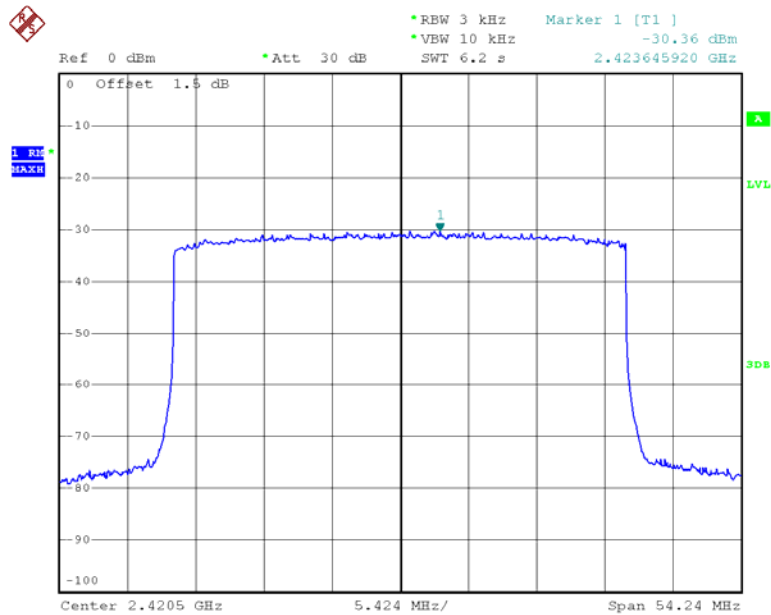


Date: 21.JAN.2020 14:34:09


Power Spectral Density Middle Channel

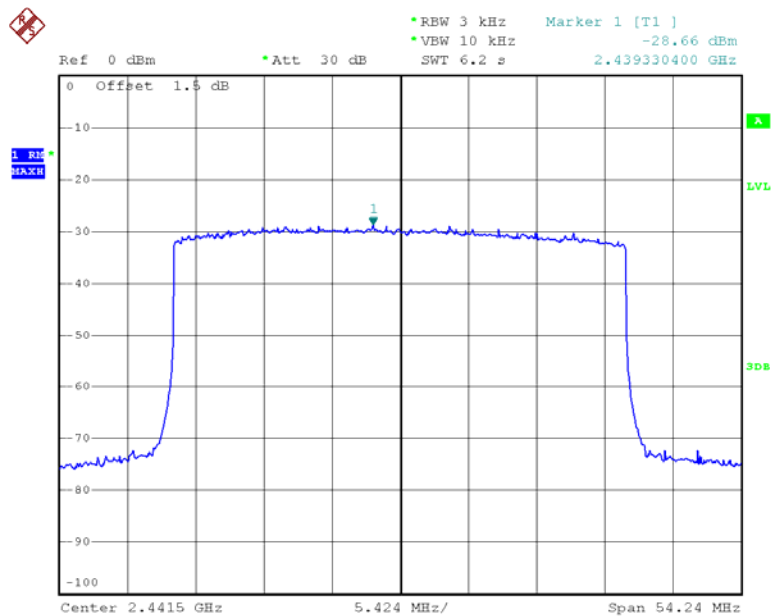

Date: 21.JAN.2020 14:38:36

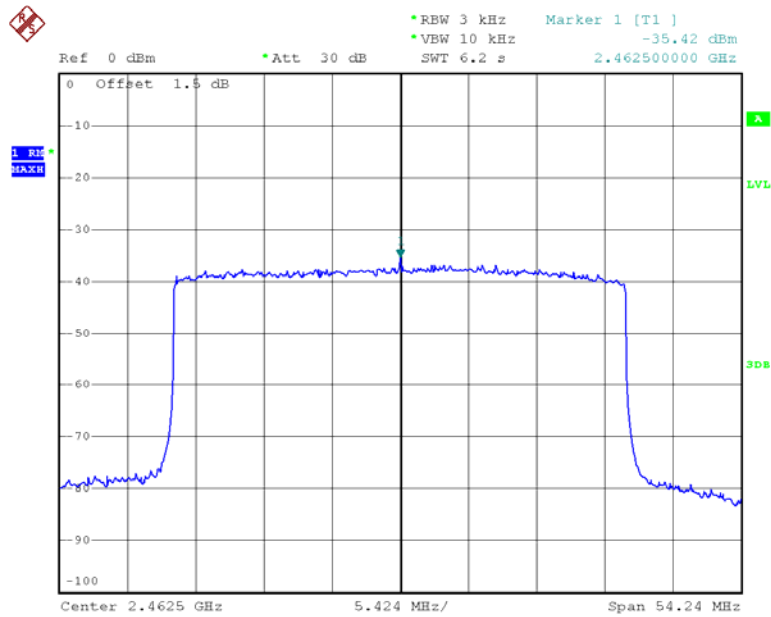
Power Spectral Density High Channel

Date: 21.JAN.2020 14:52:02

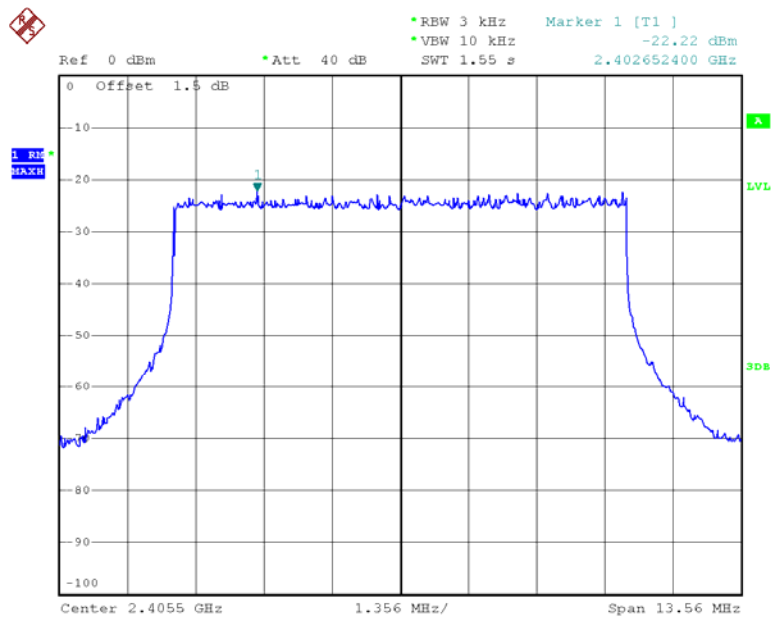Chain 1, 10M:**Power Spectral Density Low Channel**


Date: 17.JAN.2020 11:01:09

Power Spectral Density Middle Channel

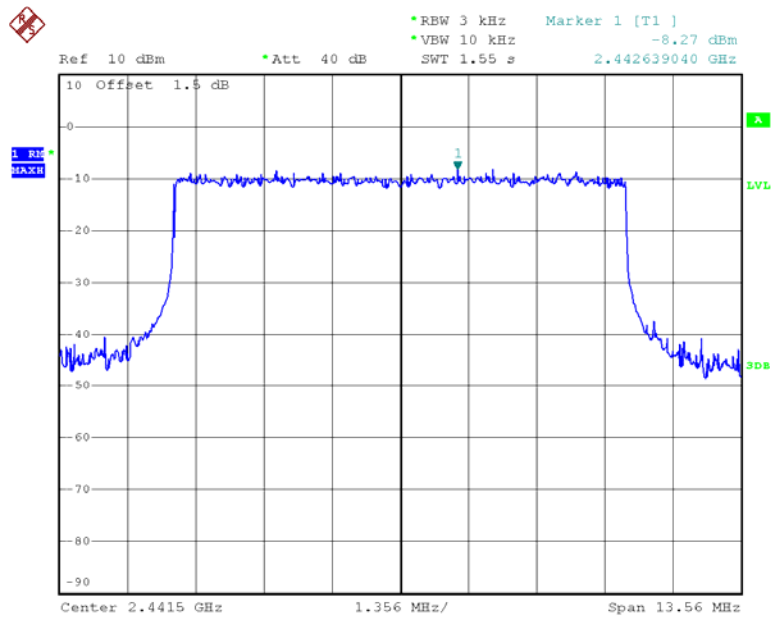

Date: 17.JAN.2020 11:10:03


Power Spectral Density High Channel

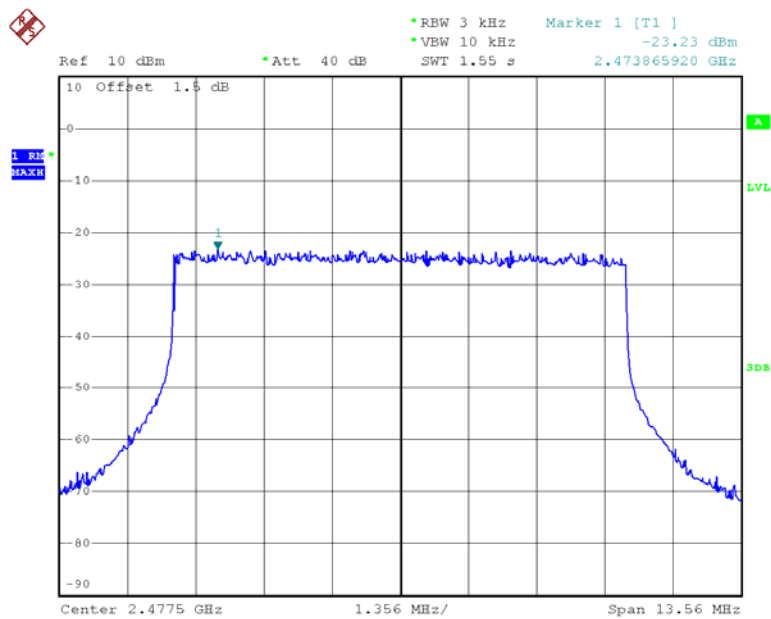

Date: 17.JAN.2020 11:10:44


20M:

Power Spectral Density Low Channel

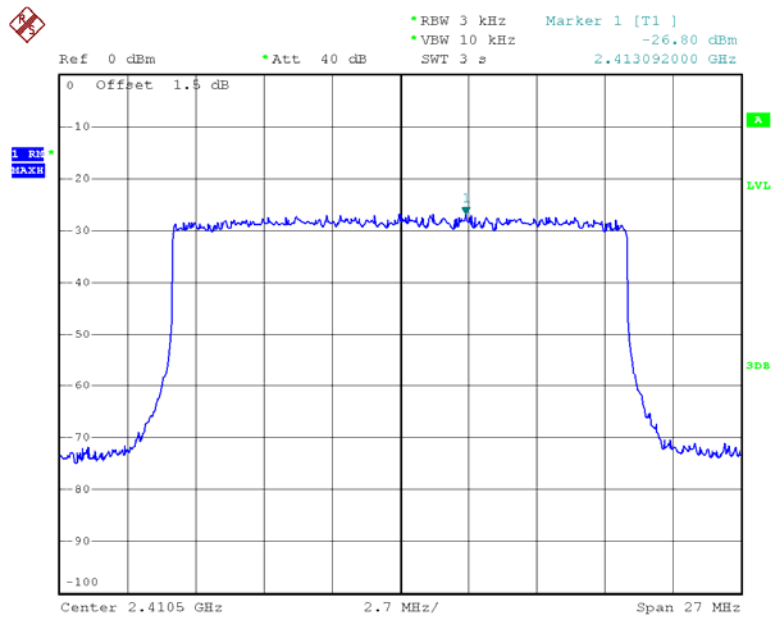


Date: 17.JAN.2020 11:15:59

Power Spectral Density Middle Channel

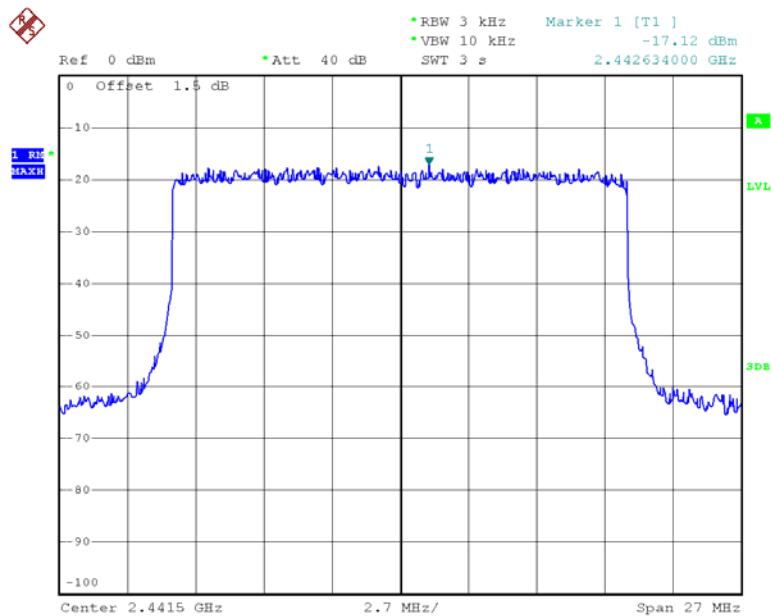


Date: 17.JAN.2020 11:21:51

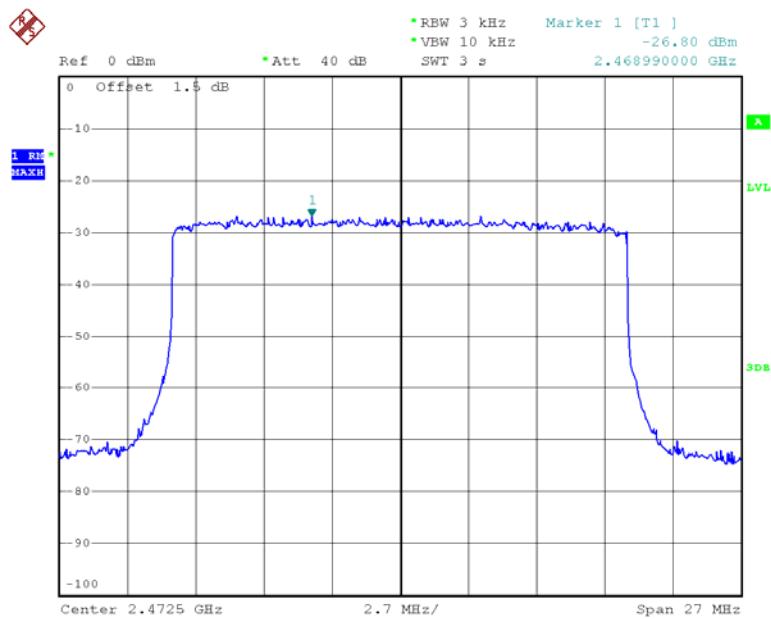Power Spectral Density High Channel


Date: 17.JAN.2020 11:23:00

40M:

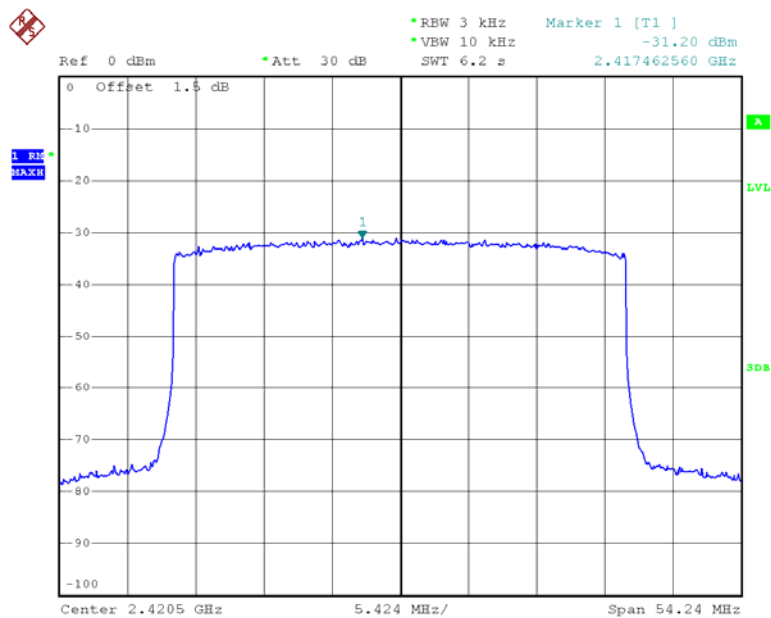Power Spectral Density Low Channel


Date: 21.JAN.2020 15:09:39

Power Spectral Density Middle Channel

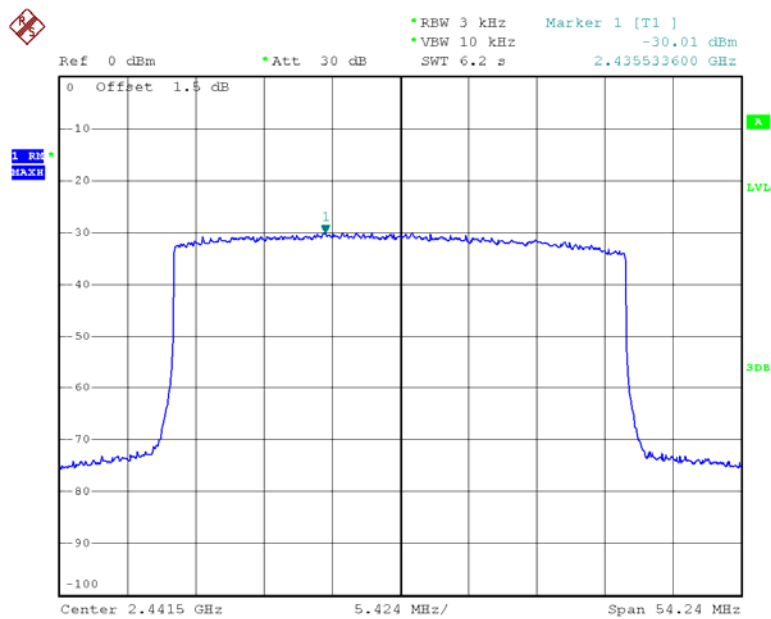

Date: 21.JAN.2020 15:02:54

Power Spectral Density High Channel

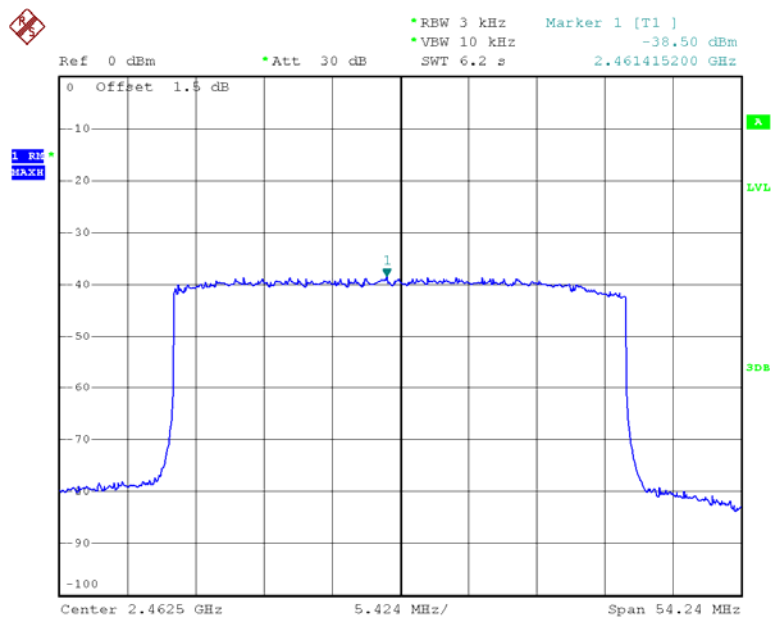

Date: 21.JAN.2020 14:57:51

***** END OF REPORT *****