

Prüfbericht-Nr.: <i>Test report no.:</i>	CN25OLMA 003	Auftrags-Nr.: <i>Order no.:</i>	168564243	Seite 1 von 19 Page 1 of 19
Kunden-Referenz-Nr.: <i>Client reference no.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2025-07-11	
Auftraggeber: <i>Client:</i>	SZ DJI TECHNOLOGY CO., LTD Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.			
Prüfgegenstand: <i>Test item:</i>	DJI Mavic 3E/DJI Mavic 3T/DJI Mavic 3M /DJI Mavic 3T Advanced			
Bezeichnung / Typ-Nr.: <i>Identification / Type no.:</i>	M3E/M3T/M3M/M3TA (Trademark: DJI)			
Auftrags-Inhalt: <i>Order content:</i>	Test Report			
Prüfgrundlage: <i>Test specification:</i>	CFR47 FCC Part 15: Subpart E Section 15.407			
Wareneingangsdatum: <i>Date of sample receipt:</i>	2025-07-15	Refer to photo document		
Prüfmuster-Nr.: <i>Test sample no.:</i>	A004047061-001~006			
Prüfzeitraum: <i>Testing period:</i>	2025-07-15 - 2025-08-15			
Ort der Prüfung: <i>Place of testing:</i>	Refer to section 2.1			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von: <i>tested by:</i>	x <u>Bell Hu</u>		genehmigt von: <i>authorized by:</i>	x <u>Jonathan Li</u>
Datum: <i>Date:</i>	2025-08-25	<small>Signed by: Bell Hu</small>	Ausstellungsdatum: <i>Issue date:</i>	2025-08-25
Stellung / Position:	Sachverständige(r)/Expert		Stellung / Position:	Sachverständige(r)/Expert
Sonstiges / Other:	This report is based on original report CN22SRMQ 008 for below changes under Class 2 permissive change: 1. Add the model number (M3TA) and product name (DJI Mavic 3T Advanced) 2. Change the infrared camera gimbal module in new model. Since the changes do not affect RF characteristics, only the radiated spurious emissions below 1 GHz were evaluated.			
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>	Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>			
<small>* Legende:</small>	<small>P(ass) = entspricht o.g. Prüfgrundlage(n)</small>	<small>F(ail) = entspricht nicht o.g. Prüfgrundlage(n)</small>	<small>N/A = nicht anwendbar</small>	<small>N/T = nicht getestet</small>
<small>* Legend:</small>	<small>P(ass) = passed a.m. test specification(s)</small>	<small>F(ail) = failed a.m. test specification(s)</small>	<small>N/A = not applicable</small>	<small>N/T = not tested</small>
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>				

Prüfbericht-Nr.: CN25OLMA 003
Test report no.:

Seite 2 von 19
Page 2 of 19

Anmerkungen
Remarks

- | | |
|----------|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.
Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p> |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature</p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.
Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.
Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p> |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p> |

Prüfbericht - Nr.: CN25OLMA 003
Test Report No.:

Seite 3 von 19
Page 3 of 19

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT
RESULT: Pass

5.1.2 RADIATED SPURIOUS EMISSION
RESULT: Pass

TABLE OF CONTENTS

1.	GENERAL REMARKS.....	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	6
2.1	TEST FACILITIES.....	6
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	UNCERTAINTY OF MEASUREMENT	7
2.6	LOCATION OF ORIGINAL DATA.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE.....	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES	13
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	13
3.5	SUBMITTED DOCUMENTS	13
4.	TEST SET-UP AND OPERATION MODES	14
4.1	PRINCIPLE OF CONFIGURATION SELECTION	14
4.2	TEST OPERATION	14
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....	14
4.4	COUNTERMEASURES TO ACHIEVE ERM COMPLIANCE.....	14
4.5	TEST SETUP DIAGRAM	15
5.	TEST RESULTS.....	16
5.1	RADIO TEST REQUIREMENT & TEST SUITES (5GHZ BANDS).....	16
5.1.1	<i>Antenna Requirement.....</i>	<i>16</i>
5.1.2	<i>Radiated Spurious Emission</i>	<i>17</i>
6.	PHOTOGRAPHS OF THE TEST SET-UP	19
7.	LIST OF TABLES	19

Prüfbericht - Nr.: CN25OLMA 003
Test Report No.:

Seite 5 von 19
Page 5 of 19

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:
Appendix A: Photographs of the Test Set-up

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

2-3F, 101 & 102, No.2, Nuclear Power Industrial Park, Fuming Community, Fucheng Street, Longhua District, Shenzhen 518000, People's Republic of China

FCC Accreditation Designation No.: CN1260
 ISED Wireless Device Testing Laboratory: 25069
 A2LA Certificate Number: 5162.01

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Unwanted Emission Testing (TS9975)				
Equipment	Manufacturer	Model	Serial No.	Cal. until
EMI Test Receiver	R&S	ESR 7	102021	28.09.2025
Signal Analyzer	R&S	FSV 40	101439	28.09.2025
System Controller Interface	R&S	SCI-100	S10010038	N/A
Filterbank	R&S	Wlan	100759	28.09.2025
OSP	R&S	OSP 120	102040	N/A
Pre-amplifier	R&S	SCU08F1	08320031	28.09.2025
Amplifier	R&S	SCU-18F	180070	28.09.2025
Amplifier	R&S	SCU40A	100475	28.09.2025
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	27.09.2026
Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	27.09.2026
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	27.09.2026
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	27.09.2026
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	13.09.2027

2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Uncertainty of Measurement

The value of the measurement uncertainty of each parameter is listed as below:

Table 2: Measurement Uncertainty

Parameter	Uncertainty (k=2)
Occupied Channel Bandwidth	± 2.08 %
RF output power, conducted	± 0.99 dB
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	± 4.17 dB

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

3. General Product Information

3.1 Product Function and Intended Use

The **EUT** (Equipment Under Test) is an aircraft. It supports 2.4GHz SDR, 5.2GHz SDR (not applicable for IC market), 5.8GHz SDR and GNSS functions.

*remark: SDR means specific defined radio, and cannot changes radio specification via software/firmware by end-users.

Note: When the EUT is charged, other functions cannot be used.

This report is based on original report CN22ZMGO 006 for below changes:

1. Add the model number (M3TA) and product name (DJI Mavic 3T Advanced)
2. Change the infrared camera gimbal module in new model.

Since the changes do not affect RF characteristics, only the radiated spurious emissions below 1 GHz were evaluated.

For details refer to the User Manual, Technical Description and Circuit Diagram.

3.2 Ratings and System Details

Table 3: Technical Specification

General Information of EUT	Value
Kind of Equipment	DJI Mavic 3E/DJI Mavic 3T/DJI Mavic 3M /DJI Mavic 3T Advanced
Type Designation	M3E/M3T/M3M/M3TA
FCC ID	SS3-M3E2206
Operating Temperature Range	-10°C ~ 40 °C
Operating Voltage	AC 100-240V, 50/60Hz input via AC/DC adapter or Battery operated (DC 15.4V)
Testing Voltage	Fully charged battery
Radiofrequency operating mode	1) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth 2) 5.2GHz SDR: operating within 5150-5250MHz, supports 10MHz/20MHz/40MHz Bandwidth 3) 5.8GHz SDR: operating within 5725-5850MHz, supports 1.4MHz/3MHz/10MHz/20MHz/40MHz Bandwidth 4) GNSS (receiver): operating within 1559-1610MHz
Technical Specification of 5.1GHz SDR	
Operating Frequency	5156-5245MHz for 10MHz Bandwidth 5161-5240MHz for 20MHz Bandwidth 5170-5230MHz for 40MHz Bandwidth
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM)
Channel Number	90 channels for 10MHz Bandwidth 80 channels for 20MHz Bandwidth 61 channels for 40MHz Bandwidth
Channel Separation	1MHz for 10MHz Bandwidth 1MHz for 20MHz Bandwidth 1MHz for 40MHz Bandwidth
Antenna Type	Integral Antenna
Antenna Number	4 Integral Antennas assembled, only SISO and 2X2MIMO

Prüfbericht - Nr.: CN25OLMA 003
Test Report No.:Seite 9 von 19
Page 9 of 19

	<p>modes supported.</p> <p>1Tx1Rx for SISO mode (ANT0 or ANT1 or ANT2 or ANT3) 2Tx2Rx for MIMO mode (ANT0+ANT1 or ANT0+ANT3 or ANT2+ANT1 or ANT2+ANT3)</p> <p>As for MIMO mode, The Directional gain = $G_{ANT} + 10 \log(N_{ANT})$ dBi, G_{ANT} is the highest antenna gain among all antennas.</p>
Antenna Gain	<p>3.0 dBi for Ant 0 & Ant 3 1.0 dBi for Ant 1 & Ant 2</p>
The type of wideband data transmission equipment	Non-FHSS

Table 4: RF Channel and Frequency of 5.1GHz SDR

5.1GHz 10MHzBandwidth (5156-5245MHz)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5156	31	5186	61	5216
2	5157	32	5187	62	5217
3	5158	33	5188	63	5218
4	5159	34	5189	64	5219
5	5160	35	5190	65	5220
6	5161	36	5191	66	5221
7	5162	37	5192	67	5222
8	5163	38	5193	68	5223
9	5164	39	5194	69	5224
10	5165	40	5195	70	5225
11	5166	41	5196	71	5226
12	5167	42	5197	72	5227
13	5168	43	5198	73	5228
14	5169	44	5199	74	5229
15	5170	45	5200	75	5230
16	5171	46	5201	76	5231
17	5172	47	5202	77	5232
18	5173	48	5203	78	5233
19	5174	49	5204	79	5234
20	5175	50	5205	80	5235
21	5176	51	5206	81	5236
22	5177	52	5207	82	5237
23	5178	53	5208	83	5238
24	5179	54	5209	84	5239
25	5180	55	5210	85	5240
26	5181	56	5211	86	5241
27	5182	57	5212	87	5242
28	5183	58	5213	88	5243
29	5184	59	5214	89	5244
30	5185	60	5215	90	5245

5.1GHz 20MHz Bandwidth (5161-5240MHz)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5161	28	5188	55	5215
2	5162	29	5189	56	5216
3	5163	30	5190	57	5217
4	5164	31	5191	58	5218
5	5165	32	5192	59	5219
6	5166	33	5193	60	5220
7	5167	34	5194	61	5221
8	5168	35	5195	62	5222
9	5169	36	5196	63	5223
10	5170	37	5197	64	5224
11	5171	38	5198	65	5225
12	5172	39	5199	66	5226
13	5173	40	5200	67	5227
14	5174	41	5201	68	5228
15	5175	42	5202	69	5229
16	5176	43	5203	70	5230
17	5177	44	5204	71	5231
18	5178	45	5205	72	5232
19	5179	46	5206	73	5233
20	5180	47	5207	74	5234
21	5181	48	5208	75	5235
22	5182	49	5209	76	5236
23	5183	50	5210	77	5237
24	5184	51	5211	78	5238
25	5185	52	5212	79	5239
26	5186	53	5213	80	5240
27	5187	54	5214	/	/

5.1GHz 40MHz Bandwidth (5170-5230MHz)					
RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)	RF Channel	Frequency (MHz)
1	5170	22	5191	43	5212
2	5171	23	5192	44	5213
3	5172	24	5193	45	5214
4	5173	25	5194	46	5215
5	5174	26	5195	47	5216
6	5175	27	5196	48	5217
7	5176	28	5197	49	5218
8	5177	29	5198	50	5219
9	5178	30	5199	51	5220
10	5179	31	5200	52	5221
11	5180	32	5201	53	5222
12	5181	33	5202	54	5223
13	5182	34	5203	55	5224
14	5183	35	5204	56	5225
15	5184	36	5205	57	5226
16	5185	37	5206	58	5227
17	5186	38	5207	59	5228
18	5187	39	5208	60	5229
19	5188	40	5209	61	5230
20	5189	41	5210	/	/
21	5190	42	5211	/	/

3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 5.1GHz SDR wireless transmitting mode
 - 1) Low Channel
 - 2) Middle Channel
 - 3) High Channel
- B. On, Normal Operation
- C. Off

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- Application Form
- Block Diagram
- User Manual
- ID Label and Location Info

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

Radio Spectrum: The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation

Test operation refers to test setup in chapter 5. All tests were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on M3TA in this report.

4.3 Special Accessories and Auxiliary Equipment

Table 5: List of Accessories and Auxiliary Equipment


Description	Manufacturer	Model	S/N
Laptop	Lenovo	T480	PF-16A6N8
Remote Control	DJI	RM510B	5YSZK66001003D

4.4 Countermeasures to Achieve ERM Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF). No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

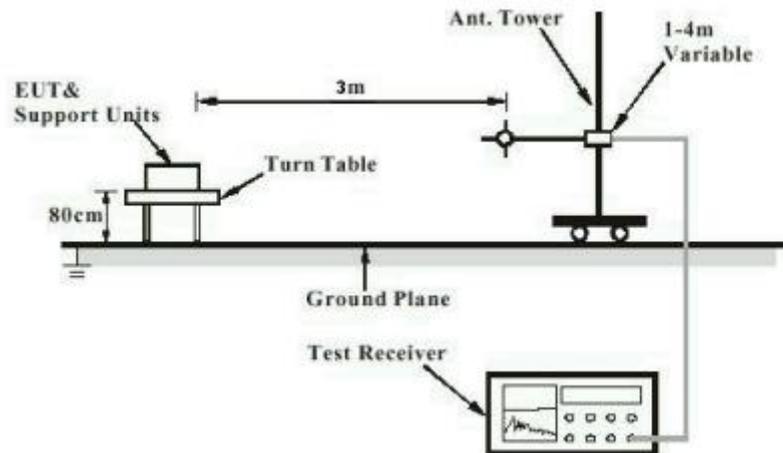

5. Test Results

5.1 Radio Test Requirement & Test Suites (5GHz Bands)

5.1.1 Antenna Requirement

RESULT:

Pass

Test Specification

Test standard : FCC Part 15.203

According to the manufacturer declared, the EUT has Integral Antennas, permanent attached and no consideration of replacement. Details as listed on section 3.2 table 2.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

5.1.2 Radiated Spurious Emission**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
Basic standard : ANSI C63.10:2013

Limits :

- For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p.

- For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- Restricted Bands meet the requirement of 15.209 limit

Kind of test site :
3m Semi-Anechoic Chamber (below 1GHz)
3m Anechoic Chamber (above 1GHz)


Test Setup

Date of testing : 2025-07-22 to 2025-07-30
Input voltage : Fully charged battery
Operation mode : A
Test channel : Low / Middle / High
Ambient temperature : 23 °C
Relative humidity : 48 %
Atmospheric pressure : 101 kPa

Since the changes do not affect RF characteristics, only the radiated spurious emissions below 1 GHz were evaluated.

Below 1GHz:
EUT Information

EUT Name:	DJI Mavic 3T Advanced
Model:	M3TA
Test Mode:	5.1GHz SDR
Order No/Sample No:	A004047061-001
Test Voltage::	Battery
Remark:	Temp 23 Humi:56%
Test Standard:	FCC 15.407
Tested By:	Kei Zhang
Reviewed By:	Terry Yin
Level:	

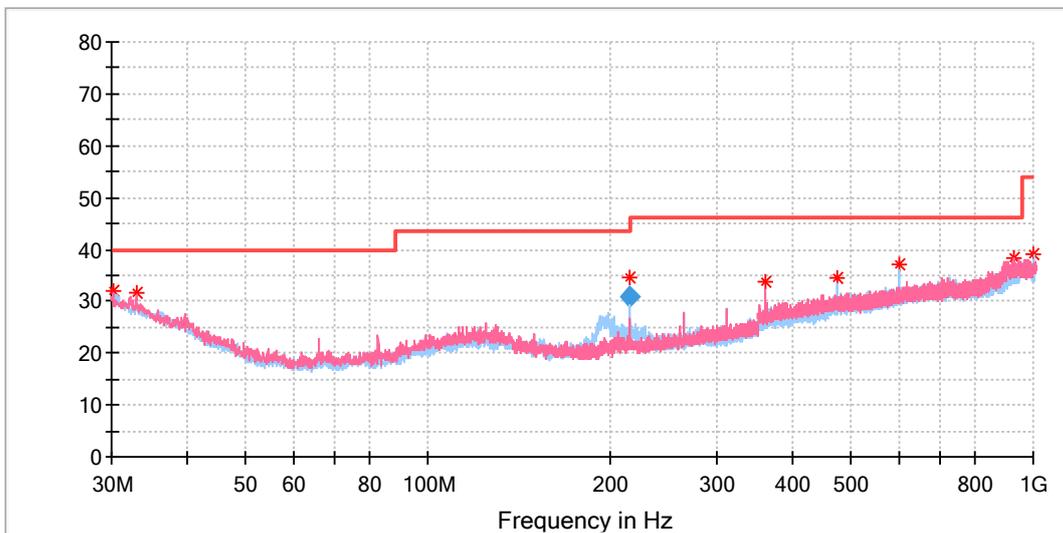
Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
30.215556	32.06	40.00	7.94	100.0	V	217.0	-4.2
32.910000	31.4	40.00	8.6	100.0	V	231.0	-5.7
216.010556	34.74	43.50	8.76	200.0	H	102.0	-12.4
360.015556	33.69	46.00	12.31	200.0	H	226.0	-7.7
475.014444	34.54	46.00	11.46	200.0	H	276.0	-5.2
599.982778	37.31	46.00	8.69	100.0	H	248.0	-3.2
929.944444	38.64	46.00	7.36	200.0	V	346.0	3.8
1000.000000	39.3	54.00	14.7	100.0	H	260.0	1.2

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
216.010556	30.94	46.00	15.06	1000.0	120.000	200.0	H	102.0	-12.4

6. Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix A.

7. List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification	8
Table 4: RF Channel and Frequency of 5.1GHz SDR.....	10
Table 5: List of Accessories and Auxiliary Equipment.....	14