

Test Plot 1#: 5.8GHz_5M_Handheld Right_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.203 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.123 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.433 W/kg

SAR(1 g) = 0.080 W/kg; SAR(10 g) = 0.035 W/kg

Maximum value of SAR (measured) = 0.213 W/kg

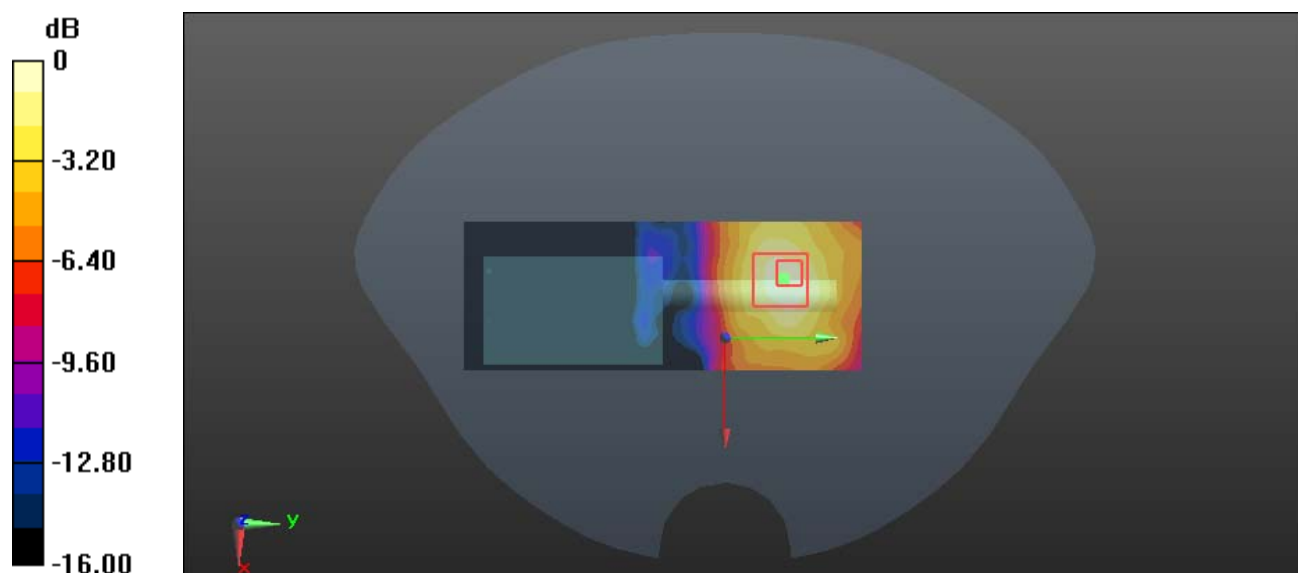

0 dB = 0.213 W/kg = -6.72 dBW/kg

Test Plot 2#: 5.8GHz_5M_Handheld Back_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.538 W/kg


Zoom Scan (8x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 0.6170 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.219 W/kg; SAR(10 g) = 0.089 W/kg

Maximum value of SAR (measured) = 0.547 W/kg

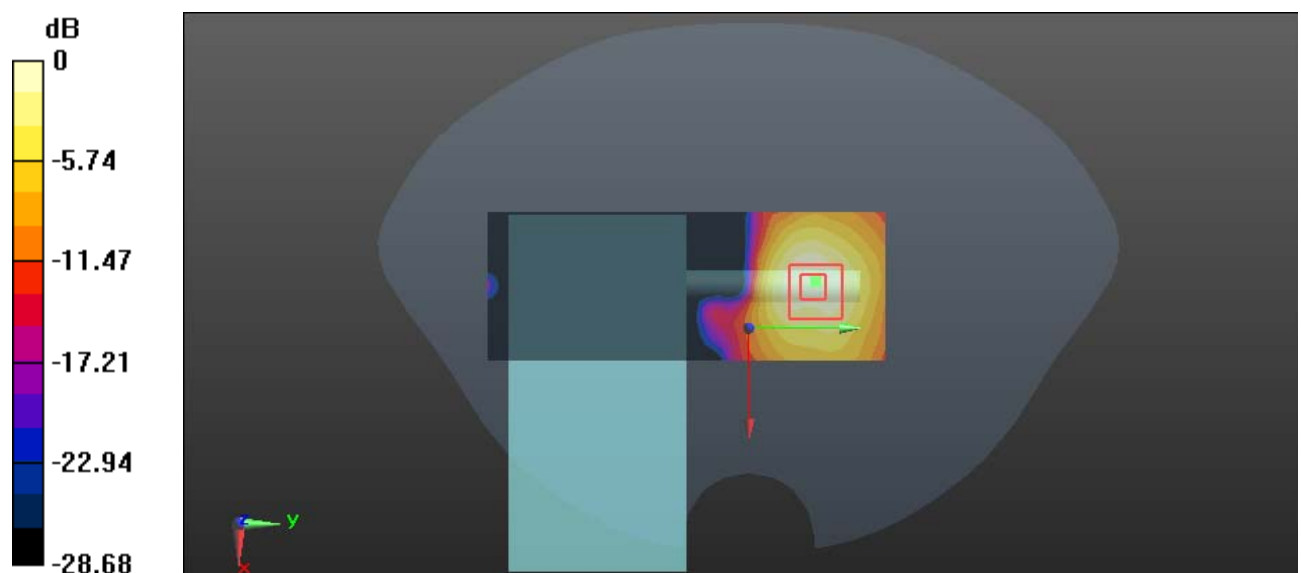

0 dB = 0.547 W/kg = -2.62 dBW/kg

Test Plot 3#: 5.8GHz_5M_Handheld Front_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.933 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.795 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 1.41 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.127 W/kg

Maximum value of SAR (measured) = 0.811 W/kg

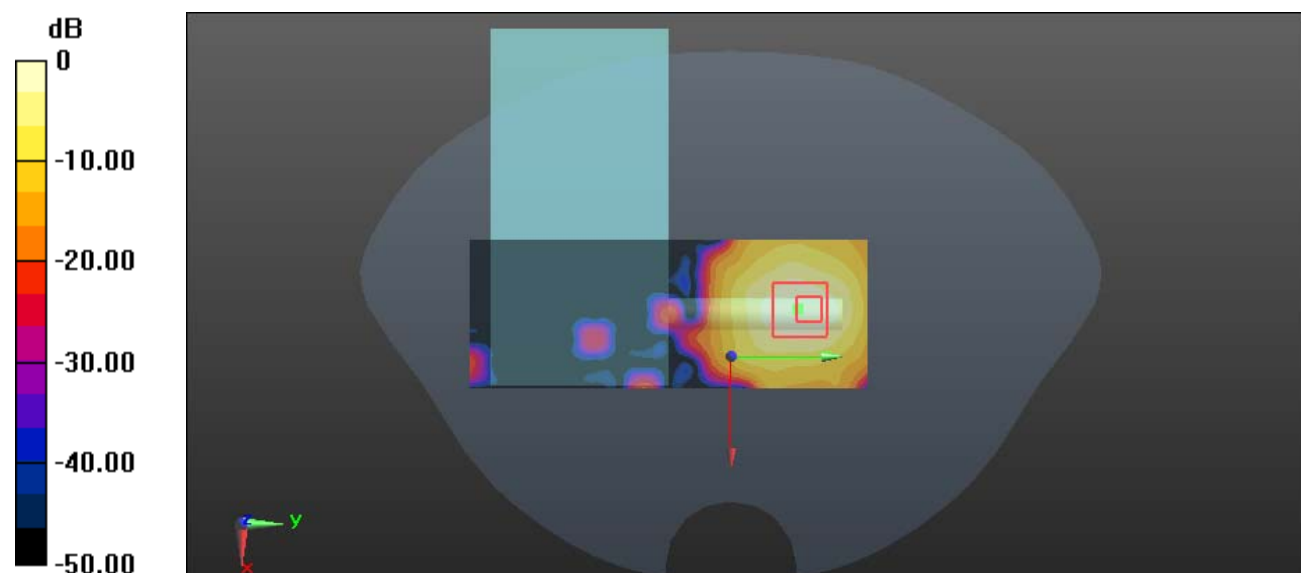

0 dB = 0.811 W/kg = -0.91 dBW/kg

Test Plot 4#: 5.8GHz_5M_Handheld Top_Low**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5745 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.339$ S/m; $\epsilon_r = 34.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.08 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.616 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 2.92 W/kg

SAR(1 g) = 0.679 W/kg; SAR(10 g) = 0.260 W/kg

Maximum value of SAR (measured) = 1.71 W/kg

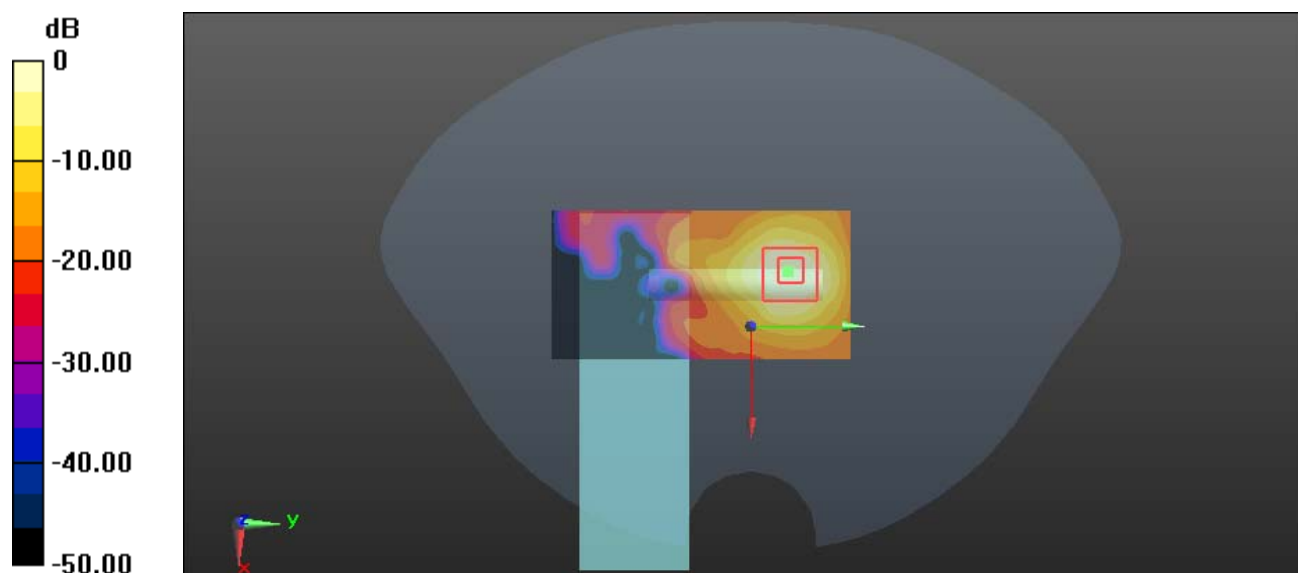

0 dB = 1.71 W/kg = 2.33 dBW/kg

Test Plot 5#: 5.8GHz_5M_Handheld Top_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.59 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 8.671 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 3.95 W/kg

SAR(1 g) = 0.672 W/kg; SAR(10 g) = 0.236 W/kg

Maximum value of SAR (measured) = 1.91 W/kg

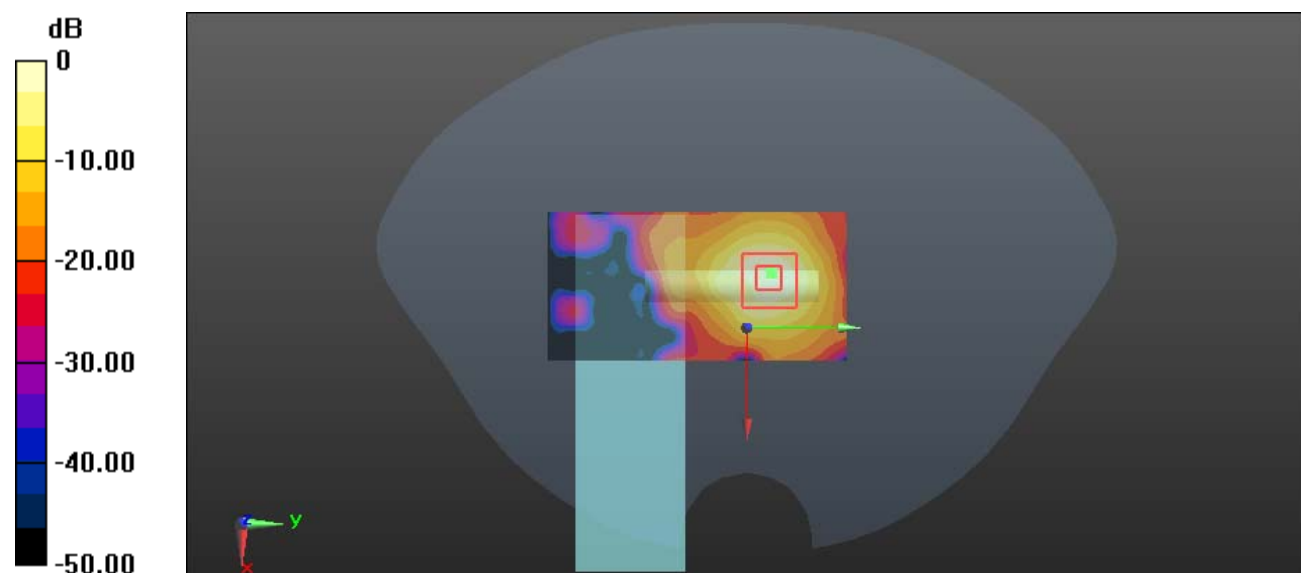

0 dB = 1.91 W/kg = 2.81 dBW/kg

Test Plot 6#: 5.8GHz_5M_Handheld Top_High**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5825 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.426$ S/m; $\epsilon_r = 34.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.99 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 9.322 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 0.877 W/kg; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 2.20 W/kg

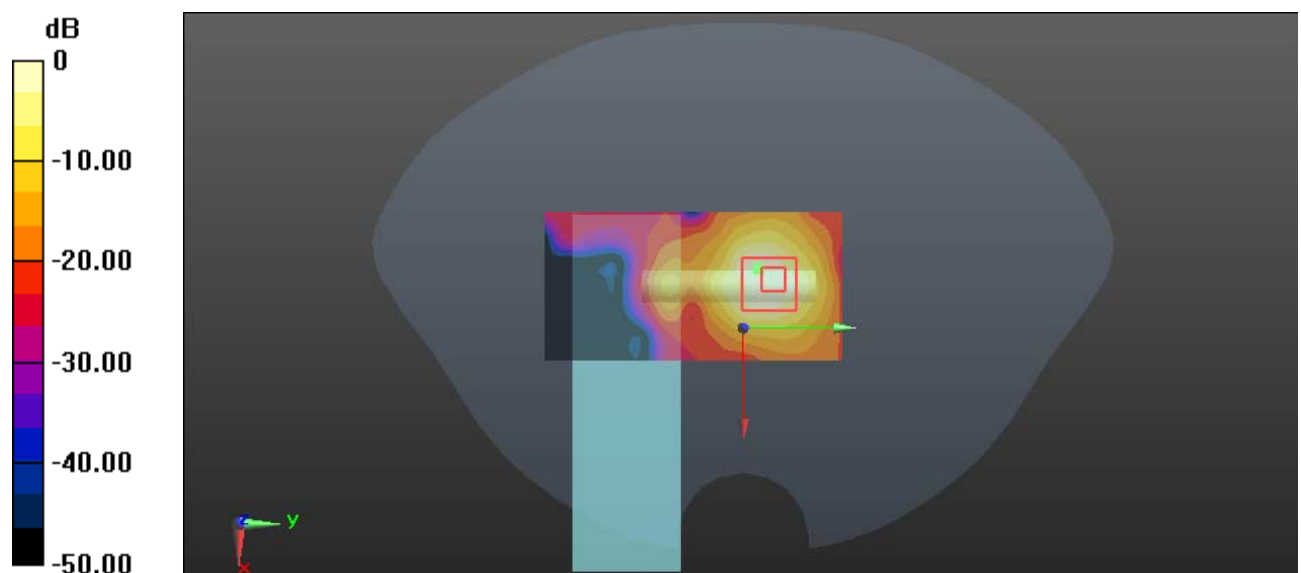

0 dB = 2.20 W/kg = 3.42 dBW/kg

Test Plot 7#: 5.8GHz_20M_Handheld Top_High**DUT: C2; Type: MR1SS5; Serial: 19052601120**


Communication System: 5.8GHz_20M; Frequency: 5785 MHz; Duty Cycle: 1:7

Medium parameters used: $f = 5785 \text{ MHz}$; $\sigma = 5.371 \text{ S/m}$; $\epsilon_r = 34.399$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

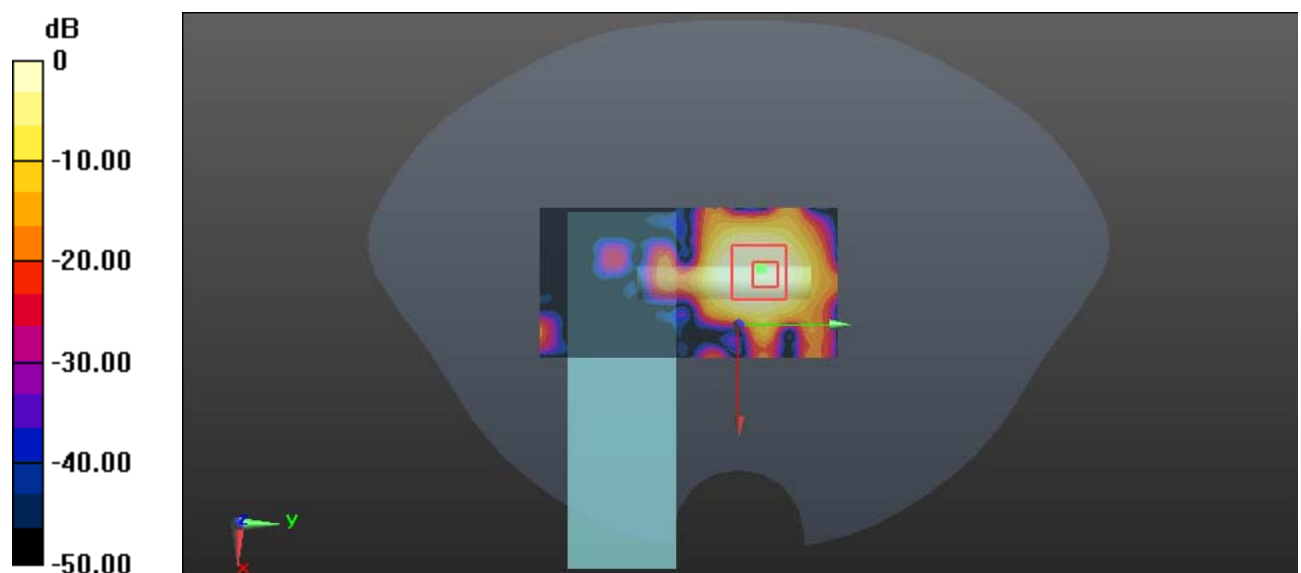Area Scan (121x61x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$ Maximum value of SAR (interpolated) = 0.726 W/kg **Zoom Scan (7x7x6)/Cube 0:** Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=2\text{mm}$ Reference Value = 5.496 V/m ; Power Drift = 0.19 dB Peak SAR (extrapolated) = 0.873 W/kg **SAR(1 g) = 0.237 W/kg ; SAR(10 g) = 0.091 W/kg** Maximum value of SAR (measured) = 0.541 W/kg 0 dB = 0.541 W/kg = -2.67 dBW/kg

Test Plot 8#: 5.8GHz_40M_Handheld Top_Low**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_40M; Frequency: 5755 MHz; Duty Cycle: 1:9.2

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.348$ S/m; $\epsilon_r = 34.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.370 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.783 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.573 W/kg

SAR(1 g) = 0.148 W/kg; SAR(10 g) = 0.048 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

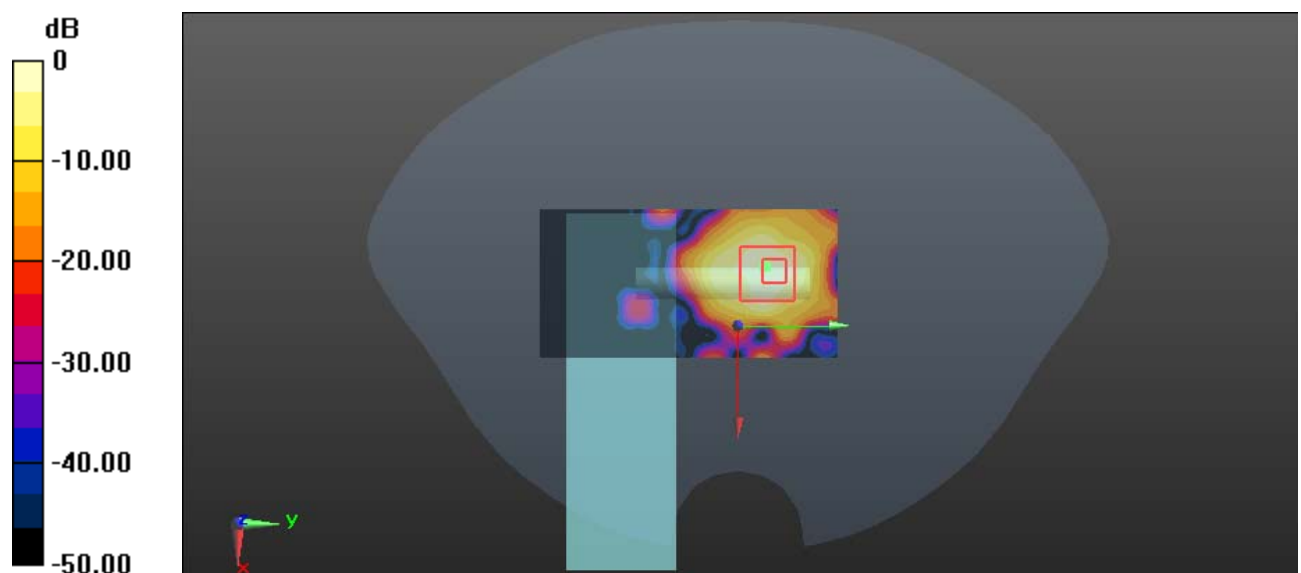

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Plot 9#: 5.8GHz_5M_Close to Body Right_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.115 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 1.302 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.231 W/kg

SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.122 W/kg

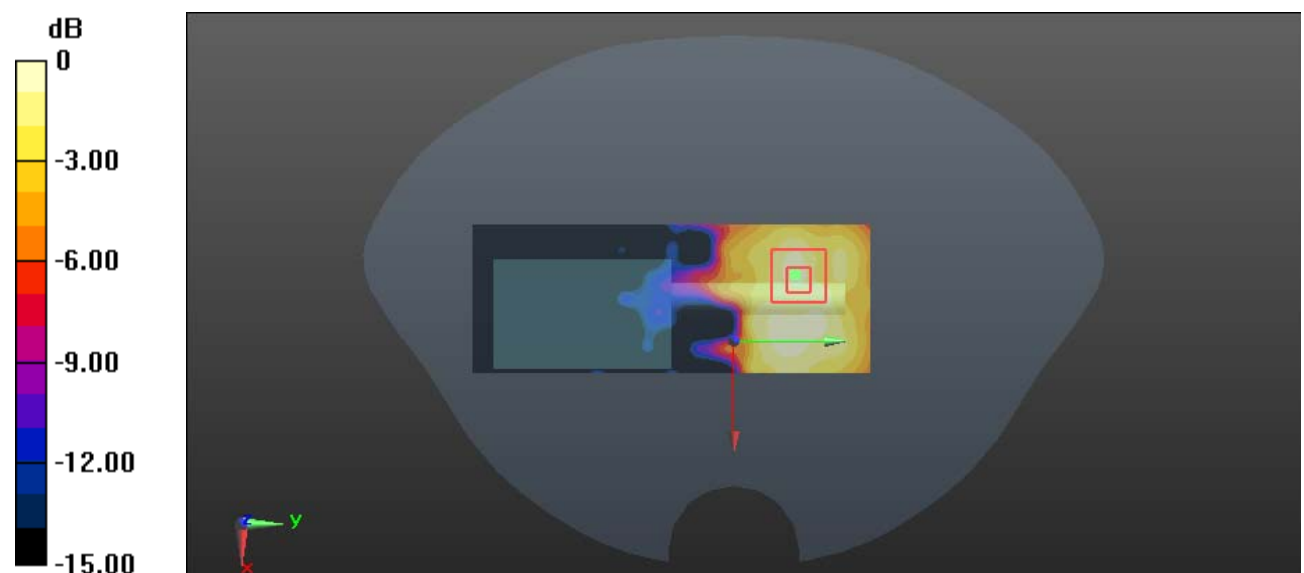

0 dB = 0.122 W/kg = -9.14 dBW/kg

Test Plot 10#: 5.8GHz_5M_Close to Body Back_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.441 W/kg


Zoom Scan (8x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.093 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.69 W/kg

SAR(1 g) = 0.212 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

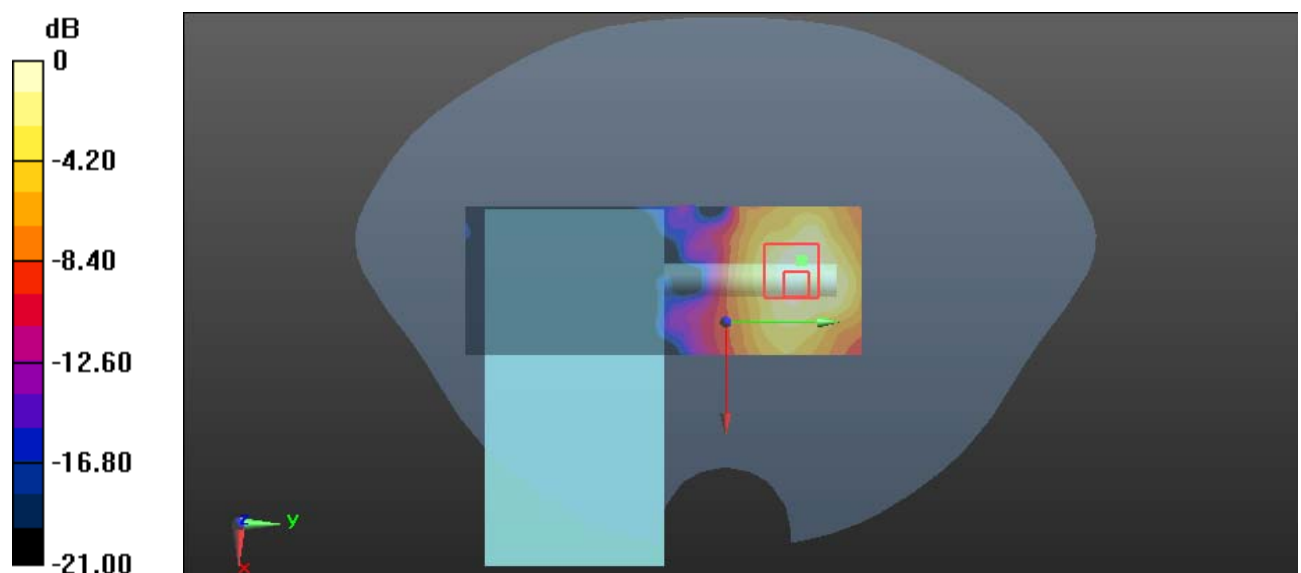

0 dB = 0.482 W/kg = -3.17 dBW/kg

Test Plot 11#: 5.8GHz_5M_Close to Body Front_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (161x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.599 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.543 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.44 W/kg

SAR(1 g) = 0.233 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.624 W/kg

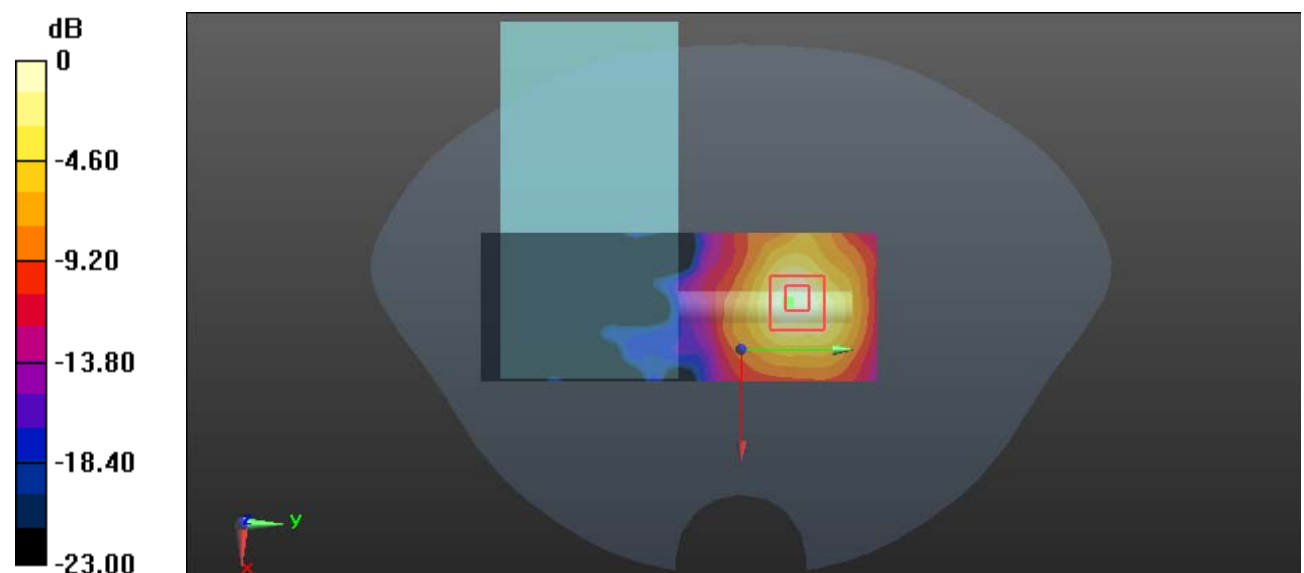

0 dB = 0.624 W/kg = -2.05 dBW/kg

Test Plot 12#: 5.8GHz_5M_Close to Body Top_Low**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5745 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5745$ MHz; $\sigma = 5.339$ S/m; $\epsilon_r = 34.539$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.551 W/kg


Zoom Scan (7x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 5.269 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.253 W/kg; SAR(10 g) = 0.101 W/kg

Maximum value of SAR (measured) = 0.599 W/kg

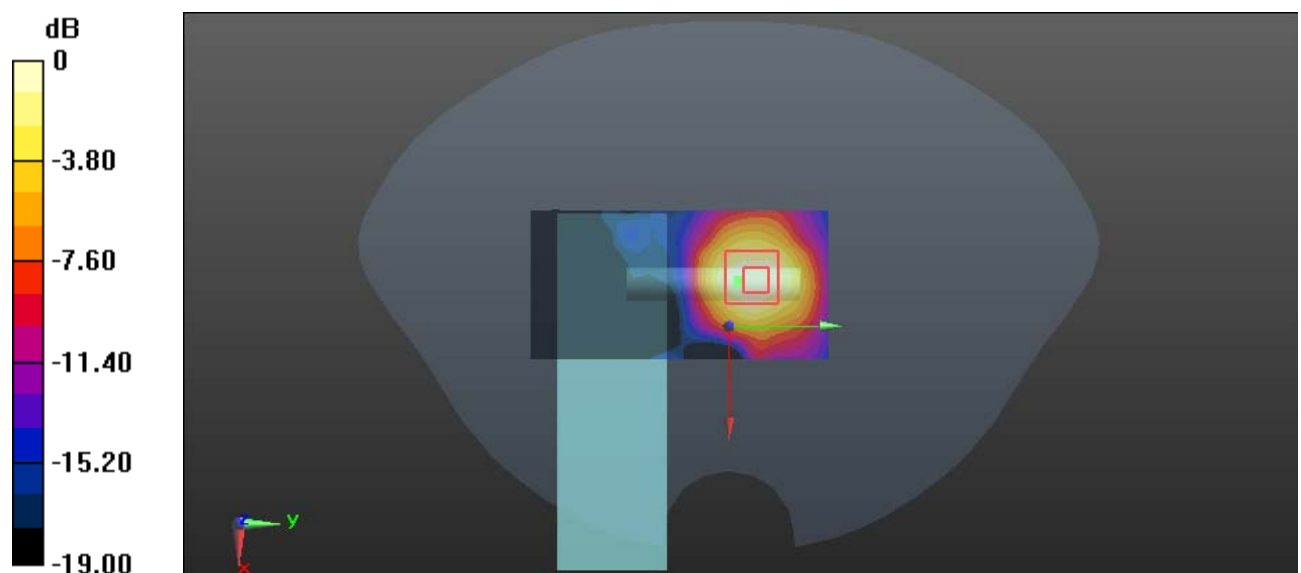

0 dB = 0.599 W/kg = -2.23 dBW/kg

Test Plot 13#: 5.8GHz_5M_Close to Body Top_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5785 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.681 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 6.827 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.249 W/kg; SAR(10 g) = 0.095 W/kg

Maximum value of SAR (measured) = 0.623 W/kg

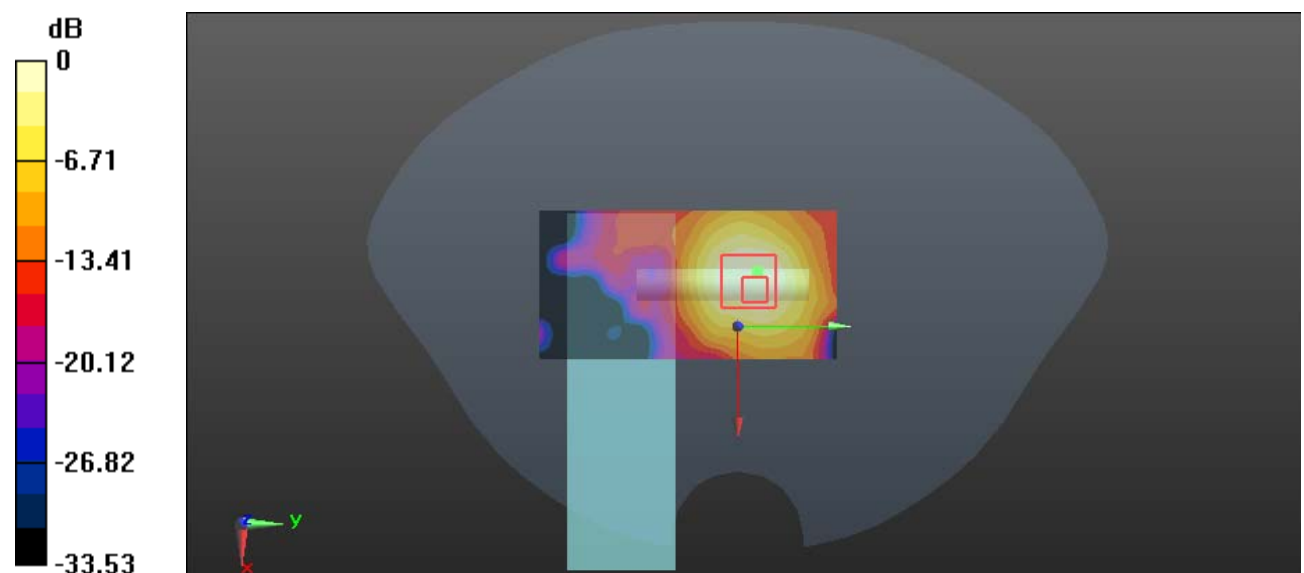

0 dB = 0.623 W/kg = -2.06 dBW/kg

Test Plot 14#: 5.8GHz_5M_Close to Body Top_High**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_5M; Frequency: 5825 MHz; Duty Cycle: 1:7.5

Medium parameters used: $f = 5825$ MHz; $\sigma = 5.426$ S/m; $\epsilon_r = 34.265$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.685 W/kg


Zoom Scan (7x7x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 7.453 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.20 W/kg

SAR(1 g) = 0.290 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.695 W/kg

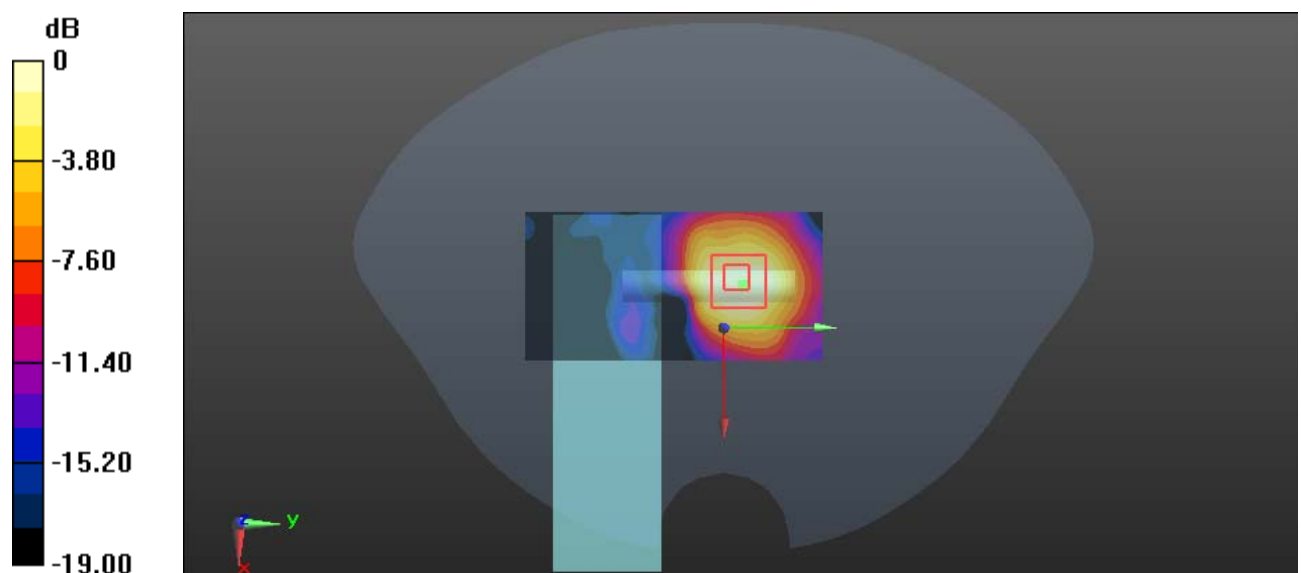

0 dB = 0.695 W/kg = -1.58 dBW/kg

Test Plot 15#: 5.8GHz_20M_Close to Body Top_Middle**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_20M; Frequency: 5785 MHz; Duty Cycle: 1:7

Medium parameters used: $f = 5785$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 34.399$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.269 W/kg


Zoom Scan (7x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 3.425 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.271 W/kg

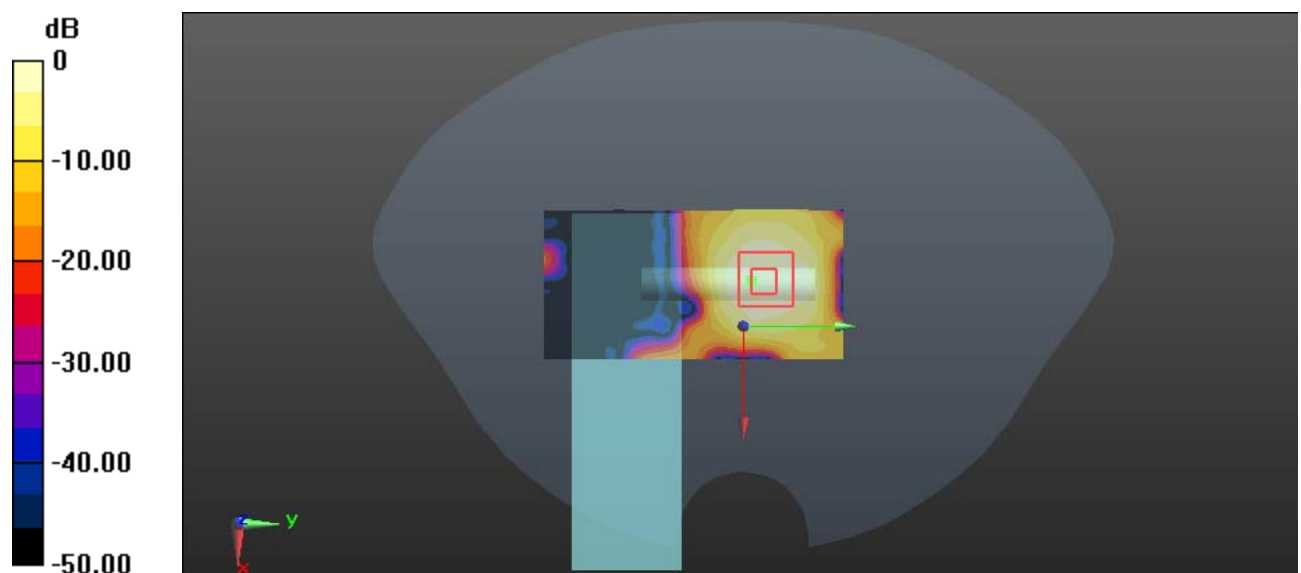

0 dB = 0.271 W/kg = -5.67 dBW/kg

Test Plot 16#: 5.8GHz_40M_Close to Body Top_Low**DUT: C2; Type: MR1SS5; Serial: 19052601120**

Communication System: 5.8GHz_40M; Frequency: 5755 MHz; Duty Cycle: 1:9.2

Medium parameters used: $f = 5755$ MHz; $\sigma = 5.348$ S/m; $\epsilon_r = 34.508$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.68, 4.68, 4.68); Calibrated: 2018/9/30;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn772; Calibrated: 2018/9/28
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: 1412
- Measurement SW: DASY52, Version 52.8 (8);

Area Scan (121x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.130 W/kg


Zoom Scan (7x8x6)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=2mm

Reference Value = 2.285 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 0.294 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.021 W/kg

Maximum value of SAR (measured) = 0.170 W/kg

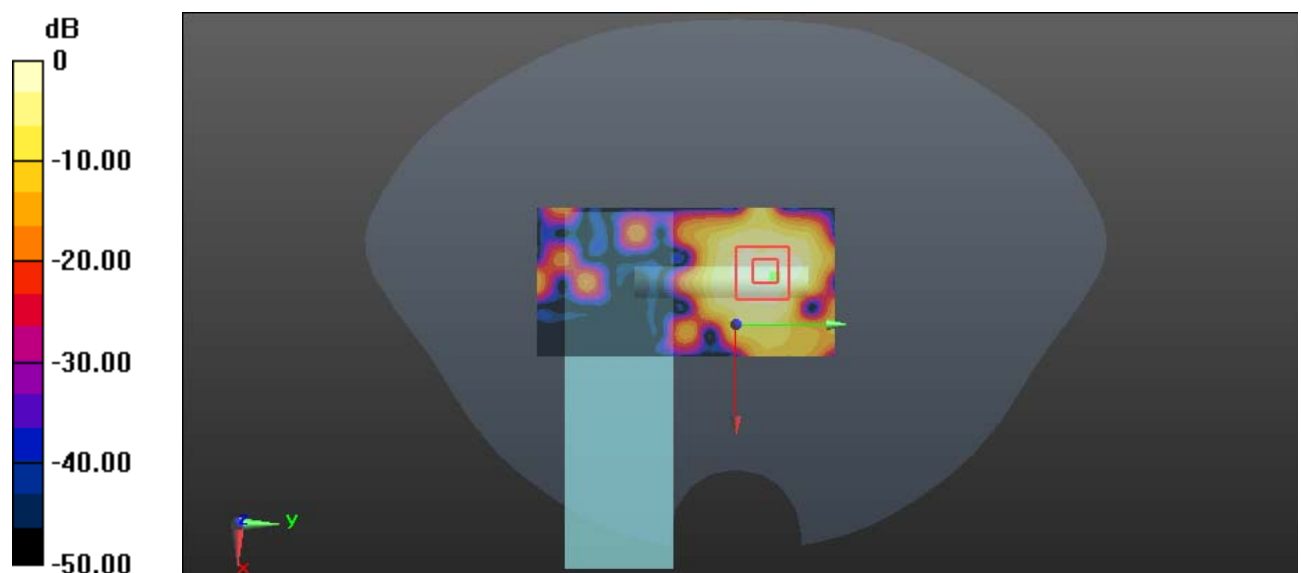

0 dB = 0.170 W/kg = -7.70 dBW/kg