



**FCC PART 15.407**  
**RSS-GEN, ISSUE 5, APRIL 2018**  
**RSS-247, ISSUE 2, FEBRUARY 2017**  
**TEST REPORT**

For

**SZ DJI TECHNOLOGY CO., LTD**

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,  
Nanshan, Shenzhen, Guangdong, China

**FCC ID: SS3-MT1SS51905**  
**IC:11805A-MT1SS51905**

<b>Report Type:</b> Original Report	<b>Product Name:</b> Mavic Mini
<b>Report Number:</b>	<u>RDG190526002-00B</u>
<b>Report Date:</b>	<u>2019-06-21</u>
<b>Reviewed By:</b>	Jerry Zhang EMC Manager
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*\*”.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION</b> .....	<b>4</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>6</b>
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	8
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	8
BLOCK DIAGRAM OF TEST SETUP.....	9
<b>SUMMARY OF TEST RESULTS</b> .....	<b>10</b>
<b>FCC §15.407 (f) &amp; §1.1310 &amp; §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)</b> .....	<b>11</b>
APPLICABLE STANDARD.....	11
<b>RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION</b> .....	<b>12</b>
APPLICABLE STANDARD.....	12
<b>FCC §15.203&amp; RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT</b> .....	<b>13</b>
APPLICABLE STANDARD.....	13
ANTENNA CONNECTOR CONSTRUCTION.....	14
<b>FCC §15.209, §15.205 , §15.407(b) &amp;RSS-247 §6.2, RSS-GEN§8.10 –UNWANTED EMISSION</b> .....	<b>15</b>
APPLICABLE STANDARD.....	15
EUT SETUP.....	17
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	18
TEST PROCEDURE.....	19
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	19
TEST EQUIPMENT LIST AND DETAILS.....	20
TEST DATA.....	21
<b>FCC §15.407(a)(e) &amp; RSS-247 §6.2,RSS-Gen §6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH</b> .....	<b>32</b>
APPLICABLE STANDARD.....	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE.....	32
TEST DATA.....	32
<b>FCC §15.407(a) &amp; RSS-247 §6.2 –MAXIMUM CONDUCTED OUTPUT POWER</b> .....	<b>42</b>
APPLICABLE STANDARD.....	42
TEST EQUIPMENT LIST AND DETAILS.....	44
TEST PROCEDURE.....	44
TEST DATA.....	45
<b>FCC §15.407(a)&amp; RSS-247 §6.2- POWER SPECTRAL DENSITY</b> .....	<b>46</b>
APPLICABLE STANDARD.....	46

TEST PROCEDURE .....48  
TEST EQUIPMENT LIST AND DETAILS.....48  
TEST DATA .....49

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		Mavic Mini
<b>EUT Model:</b>		MT1SS5
<b>Operation Frequency:</b>		5745-5825(5/20 MHz mode) 5755-5795 MHz(40 MHz mode)
<b>Maximum Peak Output Power (Conducted):</b>		23.98 dBm
<b>Modulation Type:</b>		OFDM
<b>Rated Input Voltage:</b>		DC7.2V from Battery
<b>Adapter Information</b>	<b>Model:</b>	QC18-US
	<b>Input:</b>	100-240V~ 50/60Hz ,0.5A
	<b>Output:</b>	5V 3A/9V 2A/12V 1.5A
<b>External Dimension:</b>		169.7mm(L)*125.1mm(W)* 54.9mm(H)
<b>Serial Number:</b>		190526002
<b>EUT Received Date:</b>		2019-05-29

*Note: Both the adapter and battery have two manufacturer; Battery #1 was used in test.*

### Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules. And RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

### Related Submittal(s)/Grant(s)

FCC Part 15B JBP submissions with FCC ID: SS3-MT1SS51905.  
Part of system submissions with FCC ID: SS3-MR1SS51905.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, April 2018 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

### Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The device employs 5 channels for 5MHz mode and 20MHz mode, 2 channels for 40 MHz mode as below:

5MHz/20MHz mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5745	4	5805
2	5765	5	5825
3	5785	/	/

40MHz mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5755	2	5795

The devices have two antenna chains can transmission, but only supports SISO mode.

### EUT Exercise Software


The software “Certification.exe” was used for testing, which was provided by manufacturer. The maximum power was configured as below table, that provided by the manufacturer:

Mode	Test Frequency (MHz)	Power level Setting	
		Chain 0	Chain 1
5 MHz	5745	25	24
	5785	25	25
	5825	25	24
20 MHz	5745	25	23
	5785	26	24
	5825	25	25
40 MHz	5755	14	14
	5795	15	14

The duty cycle as below:


Mode	T <sub>on</sub> (ms)	T <sub>on+off</sub> (ms)	Duty Cycle(x) (%)
5 MHz	100	100	100
20 MHz	100	100	100
40 MHz	100	100	100

### 5 MHz Mode

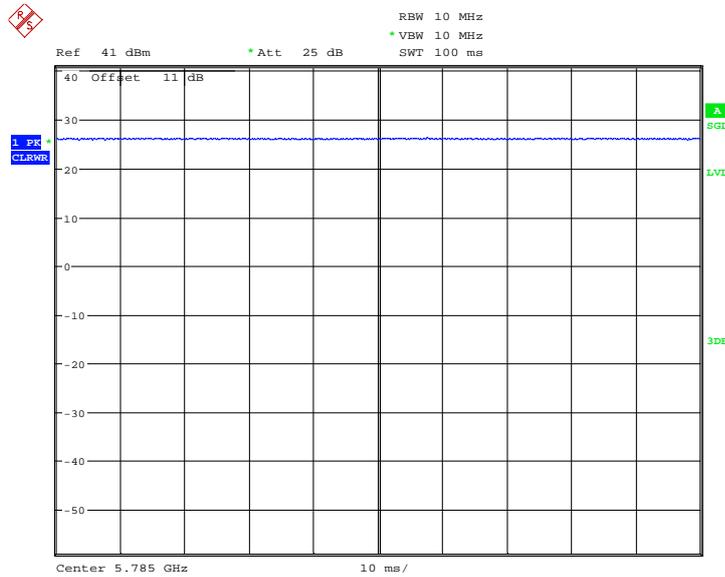


Date: 11.JUN.2019 09:38:58

### 20 MHz Mode

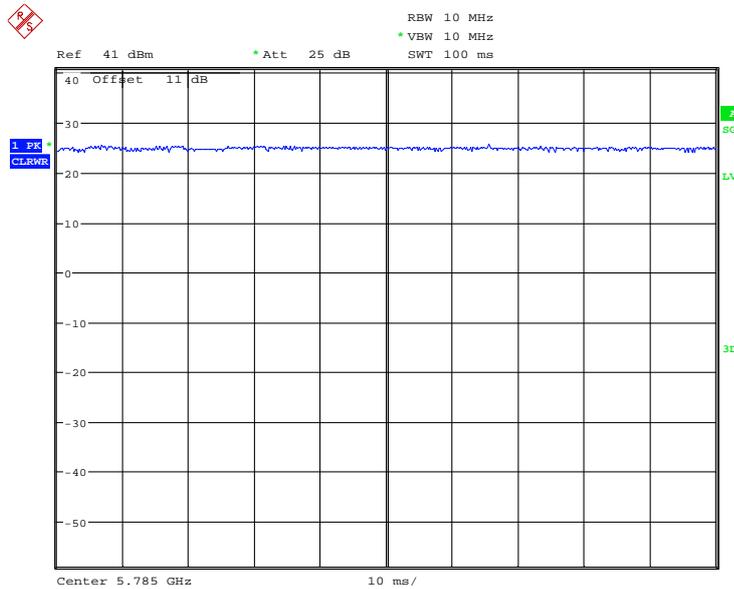

Date: 11.JUN.2019 09:40:25

**40 MHz Mode**

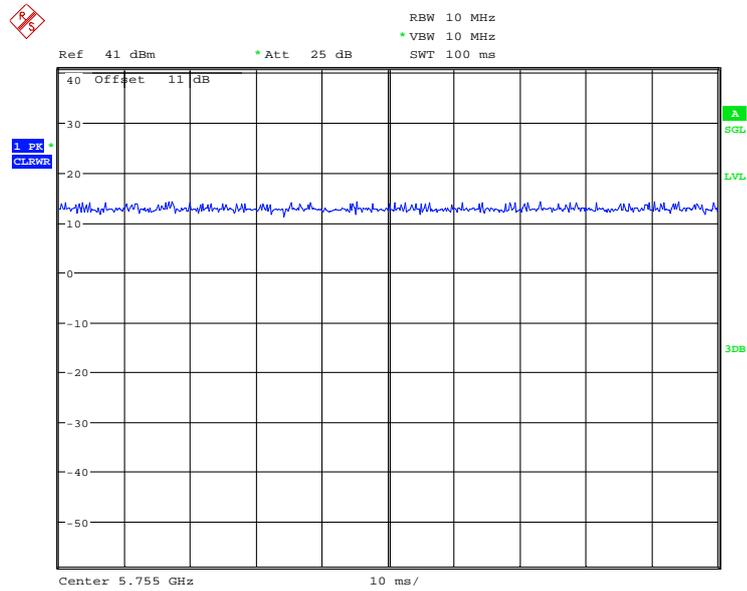

Date: 11.JUN.2019 09:41:22


**Equipment Modifications**

No modification was made to the EUT.

**Local Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
Kingston	SD Card	4G	/

### Block Diagram of Test Setup

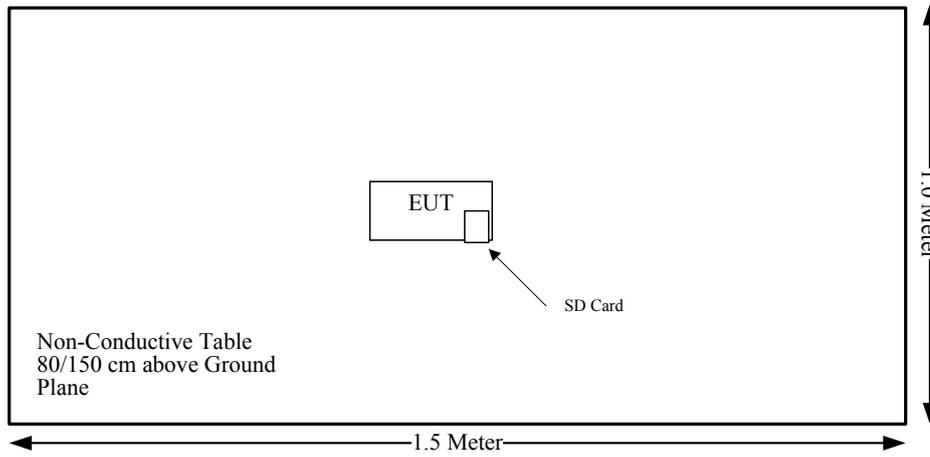

## SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
RSS-102 Clause 2.5.2	Exemption Limits For Routine Evaluation-RF Exposure Evaluation	Compliance
FCC§15.203, RSS-GEN§6.8	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a), RSS-Gen §8.8	Conducted Emissions	Not Applicable*
FCC§15.205& §15.209 &§15.407(b), RSS-247§6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(a) (e), RSS-247 §6.2 RSS-Gen§6.7	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 §6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a), RSS-247 §6.2	Power Spectral Density	Compliance

**Note:**

Not Applicable\*: The EUT was powered by battery.

**FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

**Calculation formula:**

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

**Calculated Data:**

Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm <sup>2</sup> )	MPE Limit (mW/cm <sup>2</sup> )
	(dBi)	(numeric)	(dBm)	(mW)			
5745-5825	4	2.51	24	251	20.00	0.13	1.0

Note 1: the Max. Target Power including Tolerance was declared by manufacturer.

**Result: Compliance,** The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥20 cm.

## **RSS-102 § 2.5.2 - EXEMPTION LIMITS FOR ROUTINE EVALUATION – RF EXPOSURE EVALUATION**

### Applicable Standard

According to RSS-102 § (2.5.2):

RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows:

- below 20 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 1 W (adjusted for tune-up tolerance);
- at or above 20 MHz and below 48 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $4.49/f^{0.5}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 48 MHz and below 300 MHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 0.6 W (adjusted for tune-up tolerance);
- at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than  $1.31 \times 10^{-2} f^{0.6834}$  W (adjusted for tune-up tolerance), where  $f$  is in MHz;
- at or above 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than 5 W (adjusted for tune-up tolerance).

In these cases, the information contained in the RF exposure technical brief may be limited to information that demonstrates how the e.i.r.p. was derived.

### Calculated Data:

The maximum power including tune-up tolerance is 24dBm@ 5.8 GHz band, the maximum antenna gain is 4.0 dBi, so the maximum e.r.i.p. is 28 dBm (0.631W)

Exemption from Routine Evaluation Limit is:

$$1.31 \times 10^{-2} f^{0.6834} = 1.31 \times 10^{-2} \times 5.825^{0.6834} = 4.903 > 1.585W$$

So the device is compliance exemption from Routine Evaluation Limits –RF exposure Evaluation.

**Result:** Compliance

## **FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT**

### **Applicable Standard**

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen §6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

**Antenna Connector Construction**

The EUT has two external antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
PCB	50	4.0 dBi/5.725~5.85GHz

**Result:** Compliance.

---

**FCC §15.209, §15.205 , §15.407(b) &RSS-247 §6.2, RSS-GEN§8.10 –  
UNWANTED EMISSION**

---

**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of  $-27$  dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of  $-27$  dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to RSS-247§6.2

### **Frequency band 5150-5250 MHz**

#### **6.2.1.2 Unwanted emission limits**

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.2 Unwanted emission limits**

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

### **Frequency bands 5470-5600 MHz and 5650-5725 MHz:**

#### **6.2.3.2 Unwanted emission limits**

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

## Frequency band 5725-5850 MHz

### 6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

## EUT Setup

### Below 1 GHz:

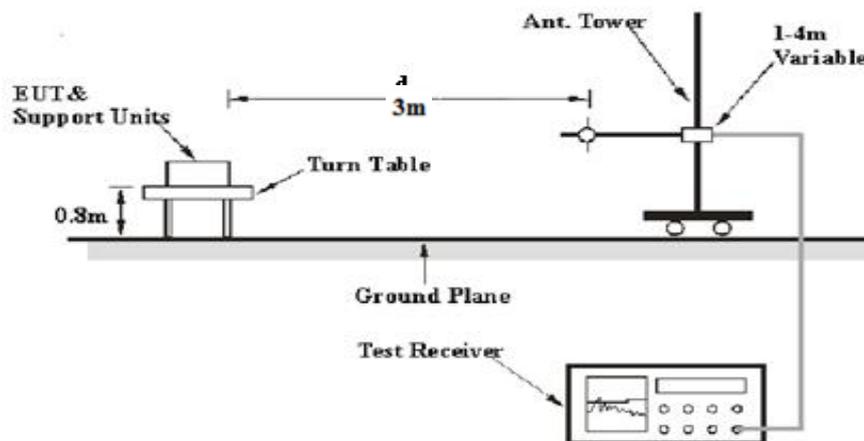

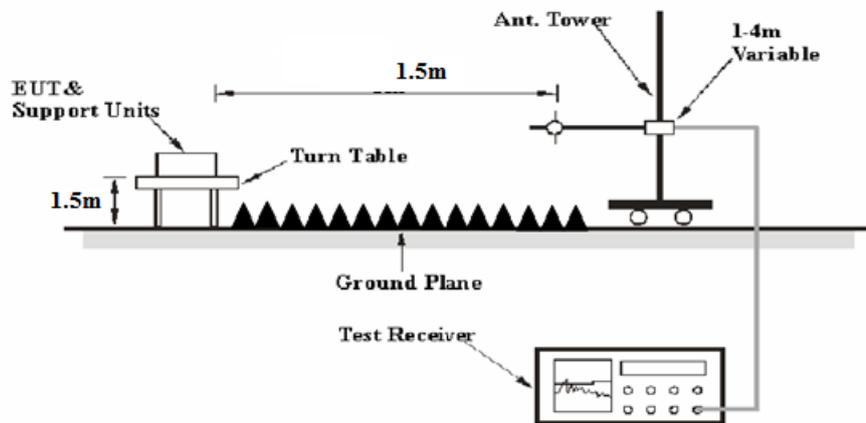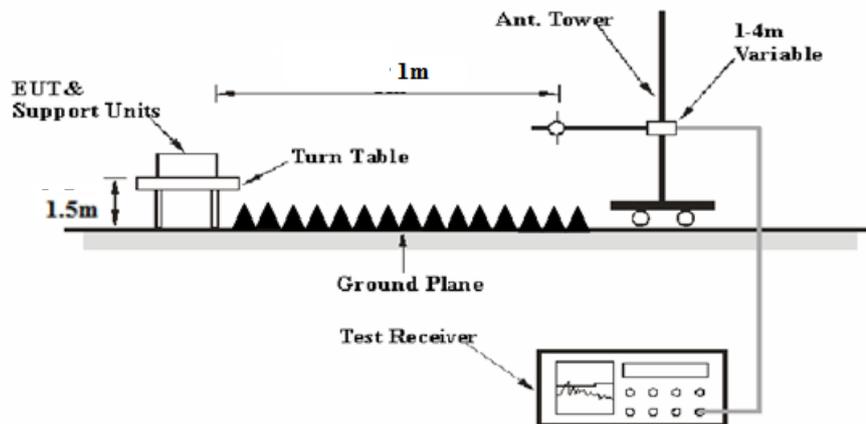**1-26.5 GHz:****26.5-40 GHz:**

The radiated emission Below 1GHz tests were performed in the 10 meters chamber test site, above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

**EMI Test Receiver & Spectrum Analyzer Setup**

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as:  $E [dB\mu V/m] = EIRP[dBm] + 95.2$ , for  $d = 3$  meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$  dB= 6.02 dB  
or

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]}/\text{test distance [1m]})$  dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

### Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

Corrected Amplitude

= Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain-Distance extrapolation factor

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit- Corrected Amplitude

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2019-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2018-09-24	2019-09-24
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2019-05-06	2020-05-06
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data**

**Environmental Conditions**


<b>Temperature:</b>	22.6~24°C
<b>Relative Humidity:</b>	51~55 %
<b>ATM Pressure:</b>	100.1kPa

\* The testing was performed by Tyler Pan and Neil Liao on 2019-06-05.

Test Mode: Transmitting


1) Below 1GHz(Chain 0 20MHz mode Middle channel was the worst):

**Horizontal**

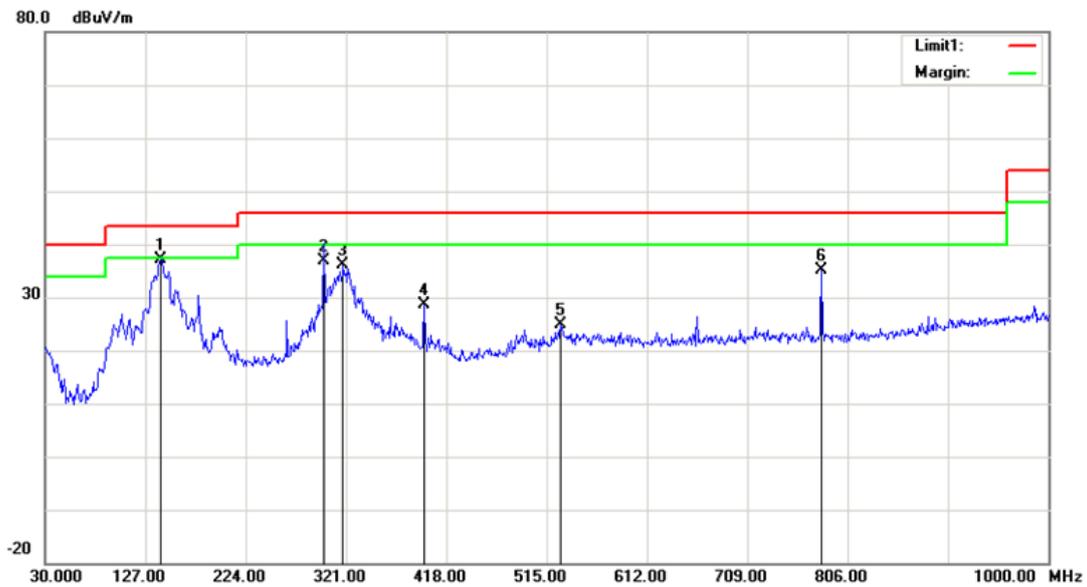

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
141.5500	49.86	peak	-12.71	37.15	43.50	6.35
299.6600	47.73	QP	-10.83	36.90	46.00	9.10
318.0900	46.54	peak	-10.31	36.23	46.00	9.77
396.6600	36.83	peak	-8.24	28.59	46.00	17.41
528.5800	29.88	peak	-5.10	24.78	46.00	21.22
780.7800	36.08	peak	-0.87	35.21	46.00	10.79

**Vertical**

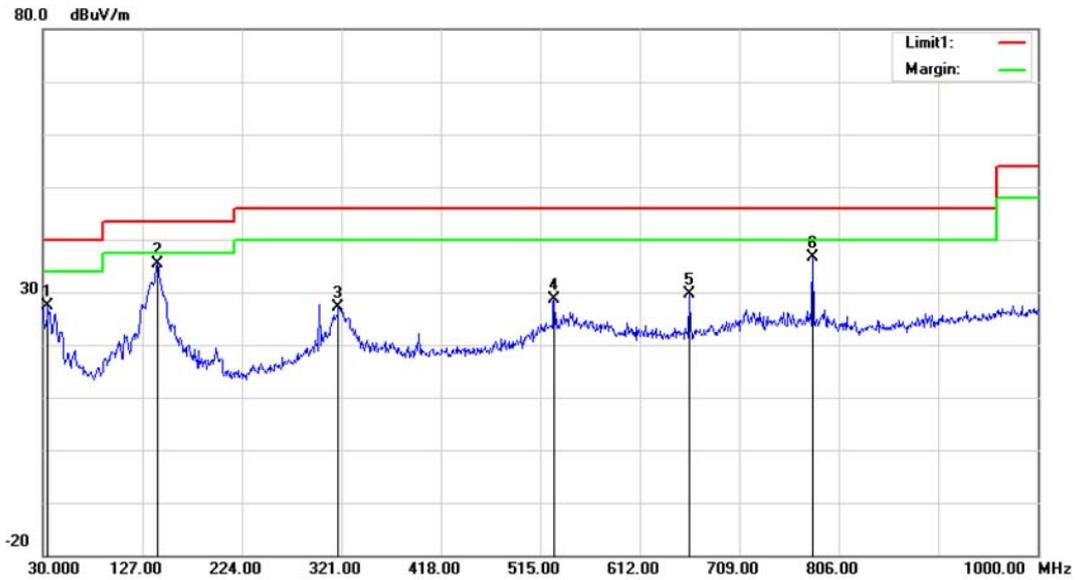

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
34.8500	37.68	peak	-10.33	27.35	40.00	12.65
141.5500	47.99	peak	-12.71	35.28	43.50	8.22
318.0900	37.36	peak	-10.31	27.05	46.00	18.95
528.5800	33.66	peak	-5.10	28.56	46.00	17.44
660.5000	32.13	peak	-2.45	29.68	46.00	16.32
780.7800	37.53	peak	-0.87	36.66	46.00	9.34

**2) 1GHz-40GHz:  
Chain 0, 5MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	82.74	PK	H	31.44	4.96	0.00	119.14	113.12	N/A	N/A
5745.00	73.20	AV	H	31.44	4.96	0.00	109.60	103.58	N/A	N/A
5745.00	90.19	PK	V	31.44	4.96	0.00	126.59	120.57	N/A	N/A
5745.00	80.48	AV	V	31.44	4.96	0.00	116.88	110.86	N/A	N/A
5725.00	35.72	PK	V	31.42	4.96	0.00	72.10	66.08	122.20	56.12
5720.00	28.65	PK	V	31.41	4.96	0.00	65.02	59.00	110.80	51.80
5700.00	28.53	PK	V	31.38	4.97	0.00	64.88	58.86	105.20	46.34
5650.00	28.38	PK	V	31.31	4.95	0.00	64.64	58.62	68.20	9.58
11490.00	39.60	PK	V	38.29	6.98	26.57	58.30	52.28	74.00	21.72
11490.00	25.40	AV	V	38.29	6.98	26.57	44.10	38.08	54.00	15.92
17235.00	35.87	PK	V	41.02	9.01	25.11	60.79	54.77	68.20	13.43
Middle Channel: 5785 MHz										
5785.00	82.97	PK	H	31.50	4.94	0.00	119.41	113.39	N/A	N/A
5785.00	73.94	AV	H	31.50	4.94	0.00	110.38	104.36	N/A	N/A
5785.00	90.31	PK	V	31.50	4.94	0.00	126.75	120.73	N/A	N/A
5785.00	80.70	AV	V	31.50	4.94	0.00	117.14	111.12	N/A	N/A
11570.00	38.24	PK	V	38.36	6.98	26.97	56.61	50.59	74.00	23.41
11570.00	24.97	AV	V	38.36	6.98	26.97	43.34	37.32	54.00	16.68
17355.00	35.19	PK	V	41.28	9.04	25.16	60.35	54.33	68.20	13.87
High Channel: 5825 MHz										
5825.00	82.84	PK	H	31.56	4.94	0.00	119.34	113.32	N/A	N/A
5825.00	73.47	AV	H	31.56	4.94	0.00	109.97	103.95	N/A	N/A
5825.00	89.55	PK	V	31.56	4.94	0.00	126.05	120.03	N/A	N/A
5825.00	79.75	AV	V	31.56	4.94	0.00	116.25	110.23	N/A	N/A
5850.00	30.29	PK	V	31.59	4.95	0.00	66.83	60.81	122.20	61.39
5855.00	30.08	PK	V	31.60	4.95	0.00	66.63	60.61	110.80	50.19
5875.00	29.86	PK	V	31.63	4.95	0.00	66.44	60.42	105.20	44.78
5925.00	29.78	PK	V	31.70	4.95	0.00	66.43	60.41	68.20	7.79
11650.00	38.76	PK	V	38.42	6.99	26.84	57.33	51.31	74.00	22.69
11650.00	25.36	AV	V	38.42	6.99	26.84	43.93	37.91	54.00	16.09
17475.00	35.60	PK	V	41.55	9.06	24.55	61.66	55.64	68.20	12.56

**Chain 0, 20MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	77.52	PK	H	31.44	4.96	0.00	113.92	107.9	N/A	N/A
5745.00	67.41	AV	H	31.44	4.96	0.00	103.81	97.79	N/A	N/A
5745.00	85.37	PK	V	31.44	4.96	0.00	121.77	115.75	N/A	N/A
5745.00	74.95	AV	V	31.44	4.96	0.00	111.35	105.33	N/A	N/A
5725.00	62.20	PK	V	31.42	4.96	0.00	98.58	92.56	122.20	29.64
5720.00	52.59	PK	V	31.41	4.96	0.00	88.96	82.94	110.80	27.86
5700.00	43.45	PK	V	31.38	4.97	0.00	79.80	73.78	105.20	31.42
5650.00	31.57	PK	V	31.31	4.95	0.00	67.83	61.81	68.20	6.39
11490.00	37.06	PK	V	38.29	6.98	26.57	55.76	49.74	74.00	24.26
11490.00	24.12	AV	V	38.29	6.98	26.57	42.82	36.8	54.00	17.20
17235.00	35.87	PK	V	41.02	9.01	25.11	60.79	54.77	68.20	13.43
Middle Channel: 5785 MHz										
5785.00	77.45	PK	H	31.50	4.94	0.00	113.89	107.87	N/A	N/A
5785.00	67.41	AV	H	31.50	4.94	0.00	103.85	97.83	N/A	N/A
5785.00	85.38	PK	V	31.50	4.94	0.00	121.82	115.8	N/A	N/A
5785.00	75.96	AV	V	31.50	4.94	0.00	112.40	106.38	N/A	N/A
11570.00	37.41	PK	V	38.36	6.98	26.97	55.78	49.76	74.00	24.24
11570.00	25.30	AV	V	38.36	6.98	26.97	43.67	37.65	54.00	16.35
17355.00	36.87	PK	V	41.28	9.04	25.16	62.03	56.01	68.20	12.19
High Channel: 5825 MHz										
5825.00	77.57	PK	H	31.56	4.94	0.00	114.07	108.05	N/A	N/A
5825.00	67.26	AV	H	31.56	4.94	0.00	103.76	97.74	N/A	N/A
5825.00	83.94	PK	V	31.56	4.94	0.00	120.44	114.42	N/A	N/A
5825.00	74.13	AV	V	31.56	4.94	0.00	110.63	104.61	N/A	N/A
5850.00	49.64	PK	V	31.59	4.95	0.00	86.18	80.16	122.20	42.04
5855.00	45.01	PK	V	31.60	4.95	0.00	81.56	75.54	110.80	35.26
5875.00	34.47	PK	V	31.63	4.95	0.00	71.05	65.03	105.20	40.17
5925.00	30.95	PK	V	31.70	4.95	0.00	67.60	61.58	68.20	6.62
11650.00	37.59	PK	V	38.42	6.99	26.84	56.16	50.14	74.00	23.86
11650.00	24.15	AV	V	38.42	6.99	26.84	42.72	36.695	54.00	17.31
17475.00	35.14	PK	V	41.55	9.06	24.55	61.20	55.18	68.20	13.02

**Chain 0, 40MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	64.16	PK	H	31.46	4.95	0.00	100.57	94.55	N/A	N/A
5755.00	54.46	AV	H	31.46	4.95	0.00	90.87	84.85	N/A	N/A
5755.00	71.62	PK	V	31.46	4.95	0.00	108.03	102.01	N/A	N/A
5755.00	61.55	AV	V	31.46	4.95	0.00	97.96	91.94	N/A	N/A
5725.00	39.95	PK	V	31.42	4.96	0.00	76.33	70.31	122.20	51.89
5720.00	33.72	PK	V	31.41	4.96	0.00	70.09	64.07	110.80	46.73
5700.00	29.89	PK	V	31.38	4.97	0.00	66.24	60.22	105.20	44.98
5650.00	30.00	PK	V	31.31	4.95	0.00	66.26	60.24	68.20	7.96
11510.00	37.10	PK	V	38.31	6.98	26.58	55.81	49.79	74.00	24.21
11510.00	24.70	AV	V	38.31	6.98	26.58	43.41	37.39	54.00	16.61
17265.00	35.70	PK	V	41.08	9.02	24.84	60.96	54.94	68.20	13.26
High Channel: 5825 MHz										
5795.00	63.62	PK	H	31.51	4.94	0.00	100.07	94.05	N/A	N/A
5795.00	53.54	AV	H	31.51	4.94	0.00	89.99	83.97	N/A	N/A
5795.00	70.76	PK	V	31.51	4.94	0.00	107.21	101.19	N/A	N/A
5795.00	60.70	AV	V	31.51	4.94	0.00	97.15	91.13	N/A	N/A
5850.00	29.75	PK	V	31.59	4.95	0.00	66.29	60.27	122.20	61.93
5855.00	30.52	PK	V	31.60	4.95	0.00	67.07	61.05	110.80	49.75
5875.00	30.54	PK	V	31.63	4.95	0.00	67.12	61.1	105.20	44.10
5925.00	30.92	PK	V	31.70	4.95	0.00	67.57	61.55	68.20	6.65
11590.00	37.64	PK	V	38.37	6.99	27.10	55.90	49.88	74.00	24.12
11590.00	24.10	AV	V	38.37	6.99	27.10	42.36	36.34	54.00	17.66
17385.00	35.60	PK	V	41.35	9.04	25.51	60.48	54.46	68.20	13.74

**Chain 1, 5MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	82.76	PK	H	31.44	4.96	0.00	119.16	113.14	N/A	N/A
5745.00	73.92	AV	H	31.44	4.96	0.00	110.32	104.3	N/A	N/A
5745.00	89.97	PK	V	31.44	4.96	0.00	126.37	120.35	N/A	N/A
5745.00	81.17	AV	V	31.44	4.96	0.00	117.57	111.55	N/A	N/A
5725.00	35.17	PK	V	31.42	4.96	0.00	71.55	65.53	122.20	56.67
5720.00	32.71	PK	V	31.41	4.96	0.00	69.08	63.06	110.80	47.74
5700.00	30.21	PK	V	31.38	4.97	0.00	66.56	60.54	105.20	44.66
5650.00	30.02	PK	V	31.31	4.95	0.00	66.28	60.26	68.20	7.94
11490.00	39.80	PK	V	38.29	6.98	26.57	58.50	52.48	74.00	21.52
11490.00	25.57	AV	V	38.29	6.98	26.57	44.27	38.25	54.00	15.75
17235.00	35.40	PK	V	41.02	9.01	25.11	60.32	54.3	68.20	13.90
Middle Channel: 5785 MHz										
5785.00	82.75	PK	H	31.50	4.94	0.00	119.19	113.17	N/A	N/A
5785.00	73.90	AV	H	31.50	4.94	0.00	110.34	104.32	N/A	N/A
5785.00	90.20	PK	V	31.50	4.94	0.00	126.64	120.62	N/A	N/A
5785.00	80.20	AV	V	31.50	4.94	0.00	116.64	110.618	N/A	N/A
11570.00	38.54	PK	V	38.36	6.98	26.97	56.91	50.89	74.00	23.11
11570.00	25.10	AV	V	38.36	6.98	26.97	43.47	37.45	54.00	16.55
17355.00	35.70	PK	V	41.28	9.04	25.16	60.86	54.84	68.20	13.36
High Channel: 5825 MHz										
5825.00	82.40	PK	H	31.56	4.94	0.00	118.90	112.88	N/A	N/A
5825.00	72.11	AV	H	31.56	4.94	0.00	108.61	102.59	N/A	N/A
5825.00	90.42	PK	V	31.56	4.94	0.00	126.92	120.9	N/A	N/A
5825.00	80.16	AV	V	31.56	4.94	0.00	116.66	110.64	N/A	N/A
5850.00	31.25	PK	V	31.59	4.95	0.00	67.79	61.77	122.20	60.43
5855.00	30.94	PK	V	31.60	4.95	0.00	67.49	61.47	110.80	49.33
5875.00	30.64	PK	V	31.63	4.95	0.00	67.22	61.2	105.20	44.00
5925.00	30.48	PK	V	31.70	4.95	0.00	67.13	61.11	68.20	7.09
11650.00	38.43	PK	V	38.42	6.99	26.84	57.00	50.98	74.00	23.02
11650.00	25.21	AV	V	38.42	6.99	26.84	43.78	37.76	54.00	16.24
17475.00	35.70	PK	V	41.55	9.06	24.55	61.76	55.74	68.20	12.46




**Chain 1, 20MHz mode:**


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	77.06	PK	H	31.44	4.96	0.00	113.46	107.44	N/A	N/A
5745.00	66.98	AV	H	31.44	4.96	0.00	103.38	97.36	N/A	N/A
5745.00	83.47	PK	V	31.44	4.96	0.00	119.87	113.85	N/A	N/A
5745.00	73.31	AV	V	31.44	4.96	0.00	109.71	103.69	N/A	N/A
5725.00	59.52	PK	V	31.42	4.96	0.00	95.90	89.88	122.20	32.32
5720.00	50.63	PK	V	31.41	4.96	0.00	87.00	80.98	110.80	29.82
5700.00	42.35	PK	V	31.38	4.97	0.00	78.70	72.68	105.20	32.52
5650.00	29.84	PK	V	31.31	4.95	0.00	66.10	60.08	68.20	8.12
11490.00	37.22	PK	V	38.29	6.98	26.57	55.92	49.9	74.00	24.10
11490.00	24.14	AV	V	38.29	6.98	26.57	42.84	36.82	54.00	17.18
17235.00	35.67	PK	V	41.02	9.01	25.11	60.59	54.57	68.20	13.63
Middle Channel: 5785 MHz										
5785.00	77.48	PK	H	31.50	4.94	0.00	113.92	107.9	N/A	N/A
5785.00	67.21	AV	H	31.50	4.94	0.00	103.65	97.63	N/A	N/A
5785.00	83.89	PK	V	31.50	4.94	0.00	120.33	114.31	N/A	N/A
5785.00	74.03	AV	V	31.50	4.94	0.00	110.47	104.45	N/A	N/A
11570.00	37.67	PK	V	38.36	6.98	26.97	56.04	50.02	74.00	23.98
11570.00	24.64	AV	V	38.36	6.98	26.97	43.01	36.99	54.00	17.01
17355.00	35.97	PK	V	41.28	9.04	25.16	61.13	55.11	68.20	13.09
High Channel: 5825 MHz										
5825.00	77.46	PK	H	31.56	4.94	0.00	113.96	107.94	N/A	N/A
5825.00	67.70	AV	H	31.56	4.94	0.00	104.20	98.18	N/A	N/A
5825.00	82.74	PK	V	31.56	4.94	0.00	119.24	113.22	N/A	N/A
5825.00	72.59	AV	V	31.56	4.94	0.00	109.09	103.07	N/A	N/A
5850.00	51.10	PK	V	31.59	4.95	0.00	87.64	81.62	122.20	40.58
5855.00	48.30	PK	V	31.60	4.95	0.00	84.85	78.83	110.80	31.97
5875.00	38.07	PK	V	31.63	4.95	0.00	74.65	68.63	105.20	36.57
5925.00	32.63	PK	V	31.70	4.95	0.00	69.28	63.26	68.20	4.94
11650.00	37.54	PK	V	38.42	6.99	26.84	56.11	50.09	74.00	23.91
11650.00	24.34	AV	V	38.42	6.99	26.84	42.91	36.89	54.00	17.11
17475.00	35.47	PK	V	41.55	9.06	24.55	61.53	55.51	68.20	12.69

**Chain 1, 40MHz mode:**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5755.00	62.17	PK	H	31.46	4.95	0.00	98.58	92.56	N/A	N/A
5755.00	52.01	AV	H	31.46	4.95	0.00	88.42	82.4	N/A	N/A
5755.00	69.78	PK	V	31.46	4.95	0.00	106.19	100.17	N/A	N/A
5755.00	59.70	AV	V	31.46	4.95	0.00	96.11	90.09	N/A	N/A
5725.00	39.29	PK	V	31.42	4.96	0.00	75.67	69.65	122.20	52.55
5720.00	35.55	PK	V	31.41	4.96	0.00	71.92	65.9	110.80	44.90
5700.00	29.93	PK	V	31.38	4.97	0.00	66.28	60.26	105.20	44.94
5650.00	28.94	PK	V	31.31	4.95	0.00	65.20	59.18	68.20	9.02
11510.00	37.60	PK	V	38.31	6.98	26.58	56.31	50.29	74.00	23.71
11510.00	24.97	AV	V	38.31	6.98	26.58	43.68	37.66	54.00	16.34
17265.00	35.44	PK	V	41.08	9.02	24.84	60.70	54.68	68.20	13.52
High Channel: 5825 MHz										
5795.00	64.54	PK	H	31.51	4.94	0.00	100.99	94.97	N/A	N/A
5795.00	54.20	AV	H	31.51	4.94	0.00	90.65	84.63	N/A	N/A
5795.00	70.85	PK	V	31.51	4.94	0.00	107.30	101.28	N/A	N/A
5795.00	60.78	AV	V	31.51	4.94	0.00	97.23	91.21	N/A	N/A
5850.00	29.94	PK	V	31.59	4.95	0.00	66.48	60.46	122.20	61.74
5855.00	29.90	PK	V	31.60	4.95	0.00	66.45	60.43	110.80	50.37
5875.00	29.88	PK	V	31.63	4.95	0.00	66.46	60.44	105.20	44.76
5925.00	29.84	PK	V	31.70	4.95	0.00	66.49	60.47	68.20	7.73
11590.00	37.50	PK	V	38.37	6.99	27.10	55.76	49.74	74.00	24.26
11590.00	24.50	AV	V	38.37	6.99	27.10	42.76	36.74	54.00	17.26
17385.00	35.70	PK	V	41.35	9.04	25.51	60.58	54.56	68.20	13.64



**Test Plots(Worst is Chain 0 20MHz mode Middle channel)  
Horizontal**

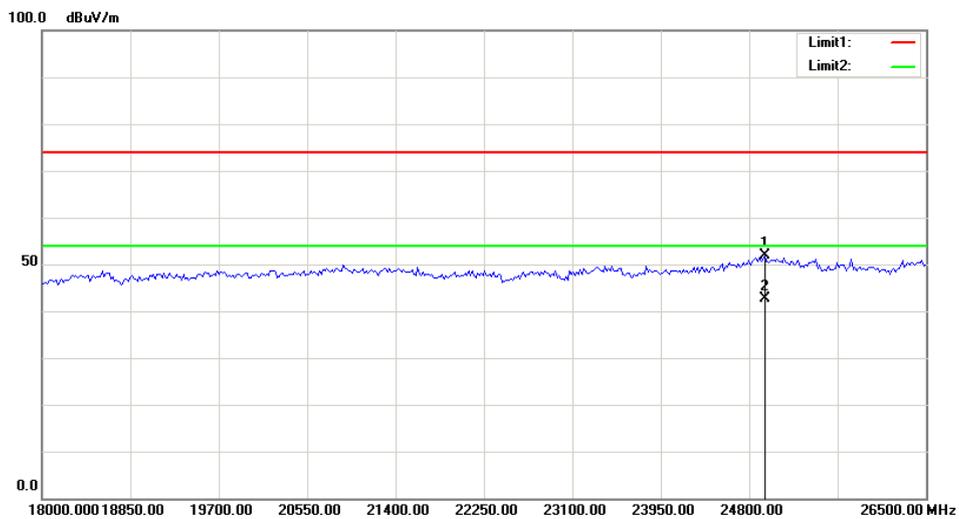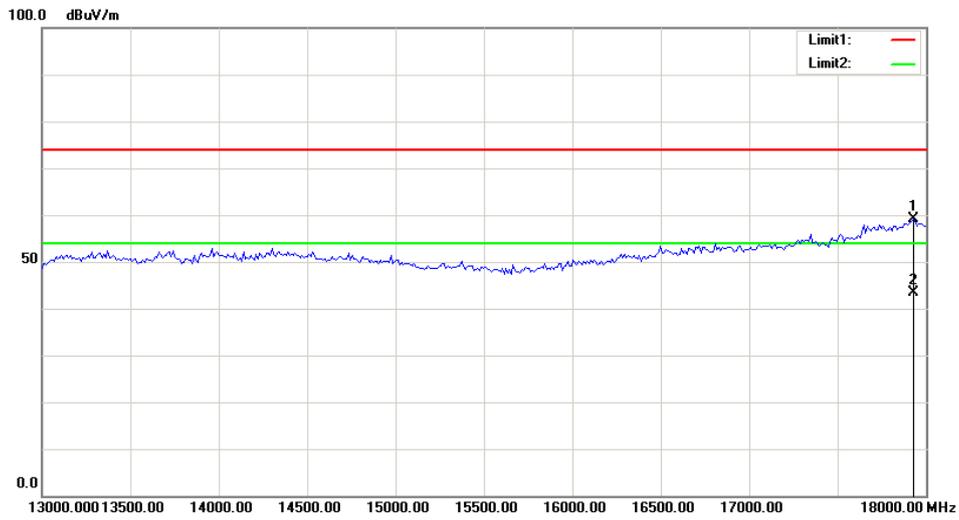
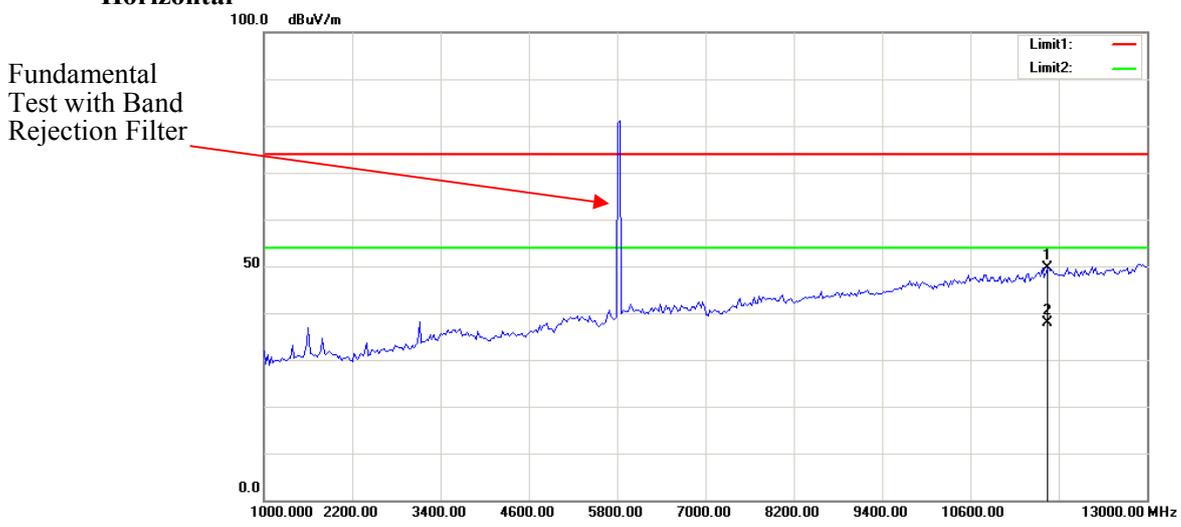


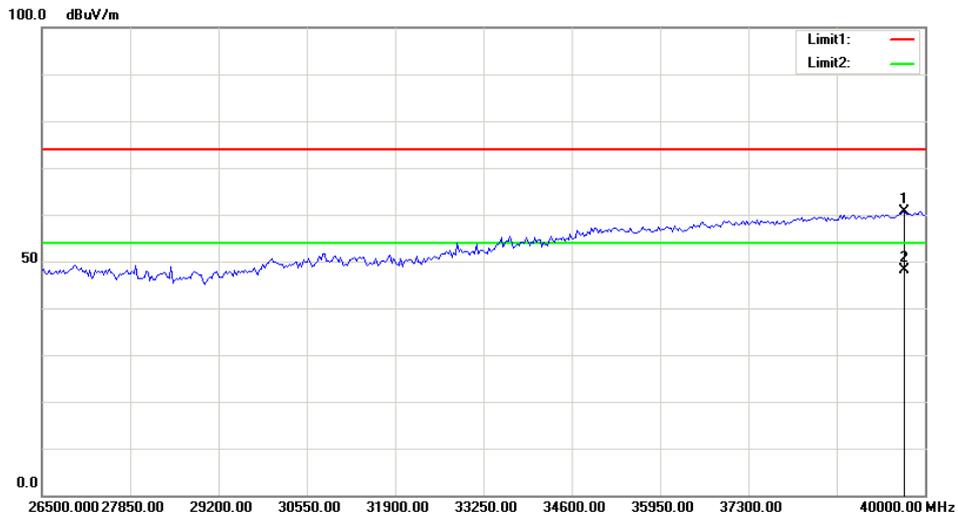

**Vertical**

Fundamental Test with Band Rejection Filter

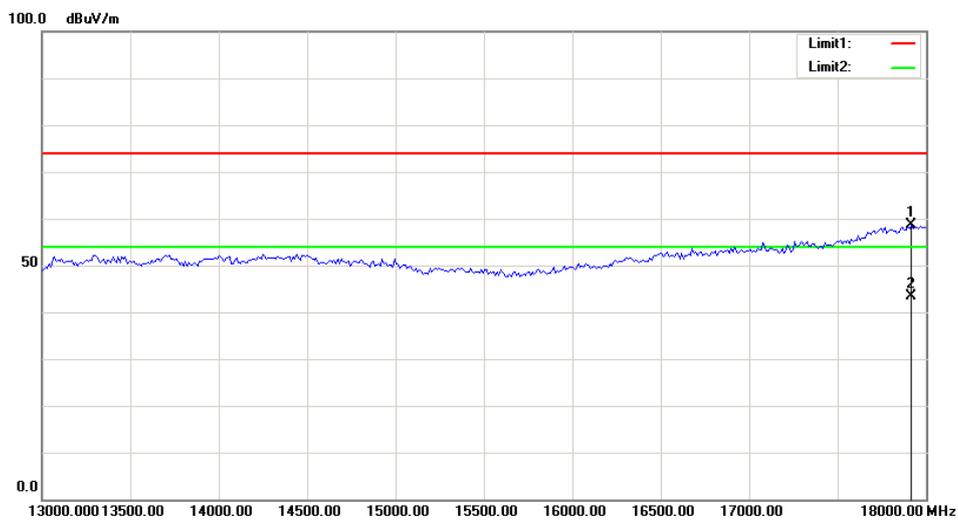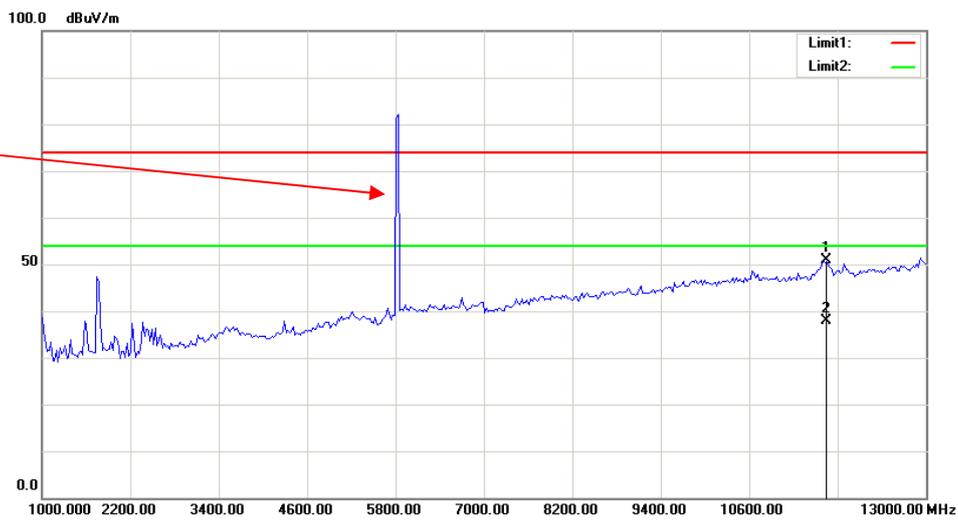

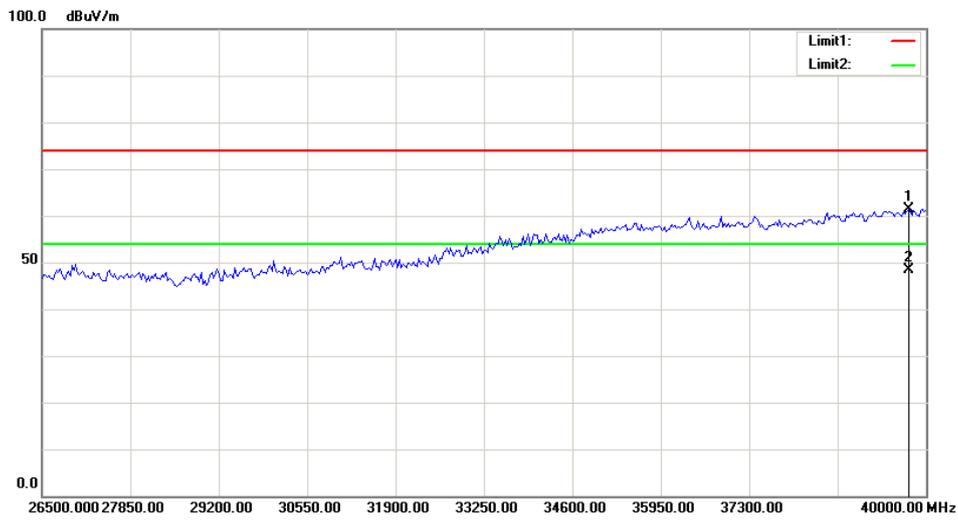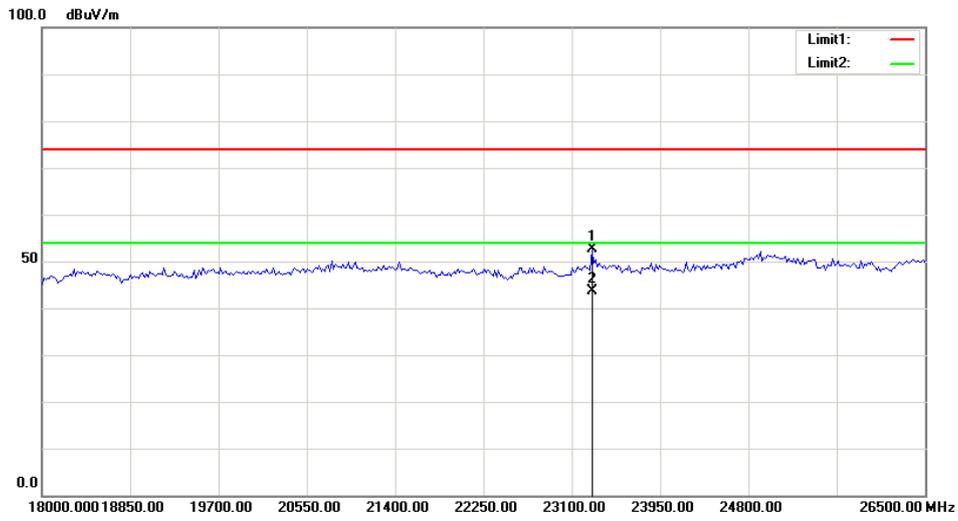

## **FCC §15.407(a)(e) & RSS-247 §6.2, RSS-Gen §6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**

### **Applicable Standard**

15.407(a) (e), RSS-247 §6.2 and RSS-Gen §6.7

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### **Test Procedure**

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25.1°C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	101.4 kPa

*The testing was performed by Tiago Huang on 2019-06-10.*

**Test Result:** Pass.

Please refer to the following tables and plots.


*Test mode: Transmitting (Test only performed at Chain 0)*

<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>6dB Bandwidth (MHz)</b>	<b>6dB Bandwidth Limit (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
5 MHz	Low	5745	4.180	0.5	6.020
	Middle	5785	4.180	0.5	5.740
	High	5825	4.200	0.5	5.340
20 MHz	Low	5745	15.952	0.5	22.000
	Middle	5785	15.551	0.5	22.960
	High	5825	15.952	0.5	18.960
40 MHz	Low	5755	35.110	0.5	36.960
	High	5795	35.271	0.5	36.960

Note: the 99% Occupied Bandwidth have not fall into the band 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


**6dB Bandwidth:**

5 MHz mode, Low Channel

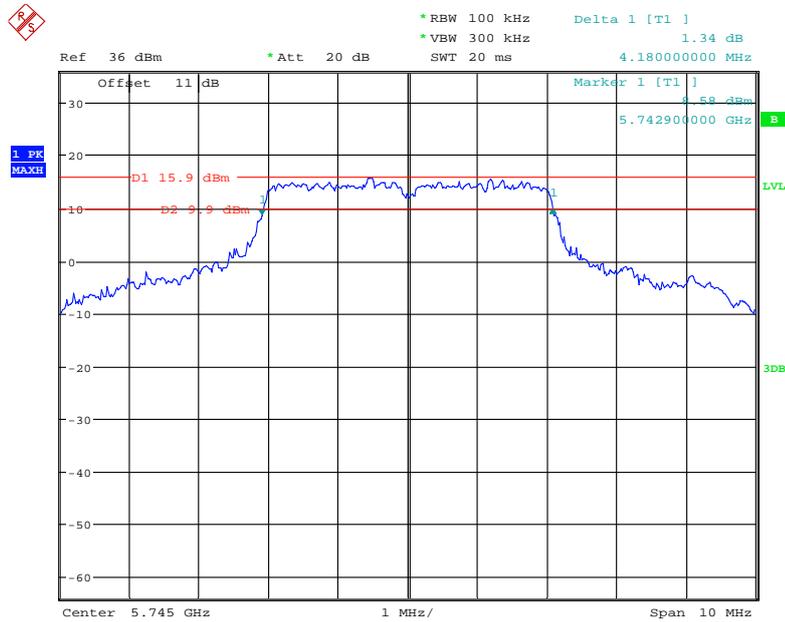


Date: 11.JUN.2019 08:56:19

5 MHz mode, Middle Channel

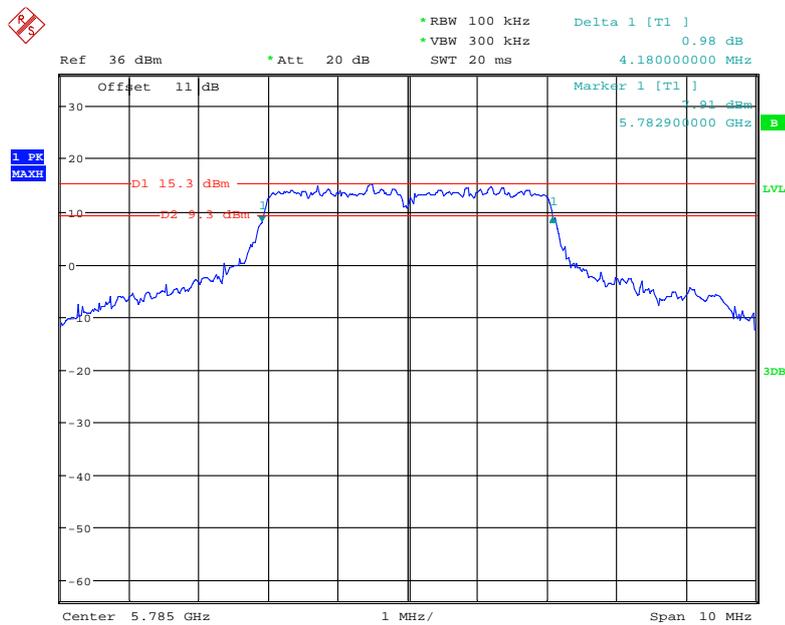


Date: 11.JUN.2019 08:58:25

5 MHz mode, High Channel

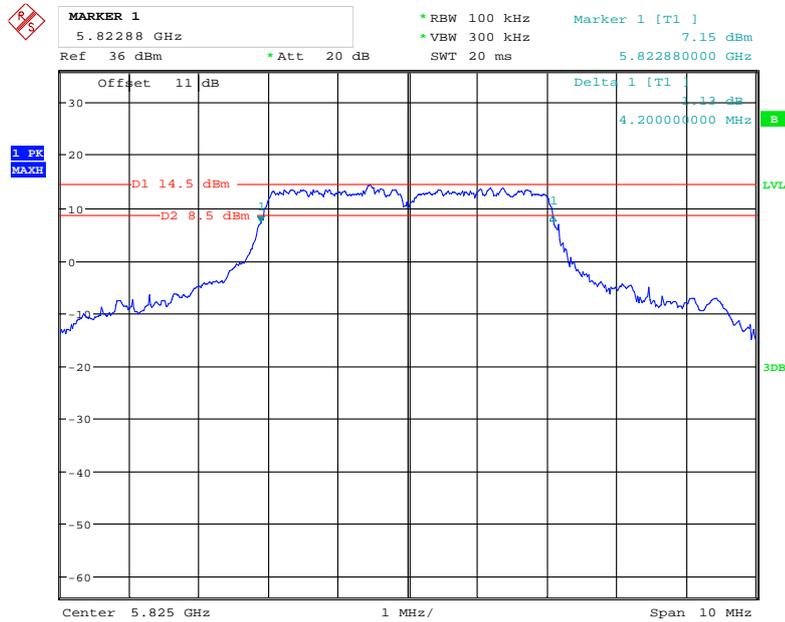


Date: 11.JUN.2019 08:59:58

20 MHz mode, Low Channel

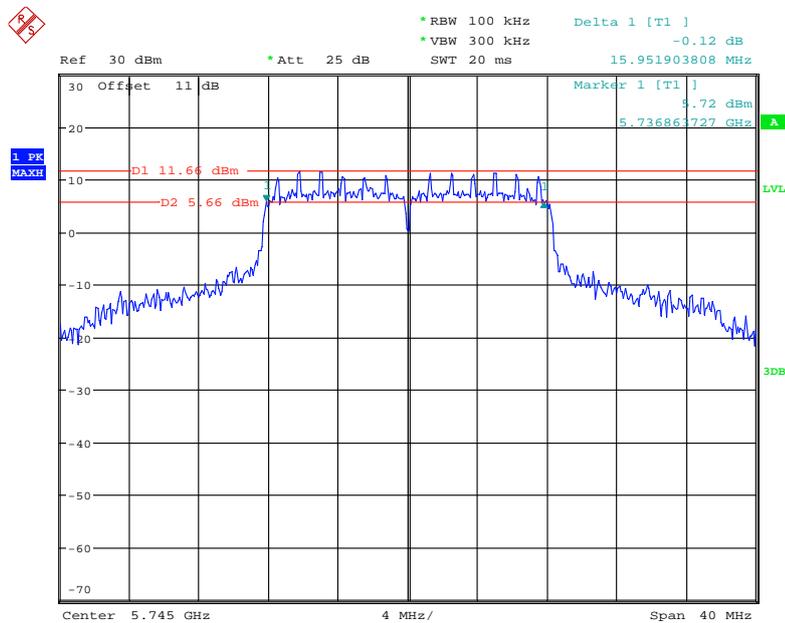


Date: 10.JUN.2019 14:25:46

20 MHz mode, Middle Channel

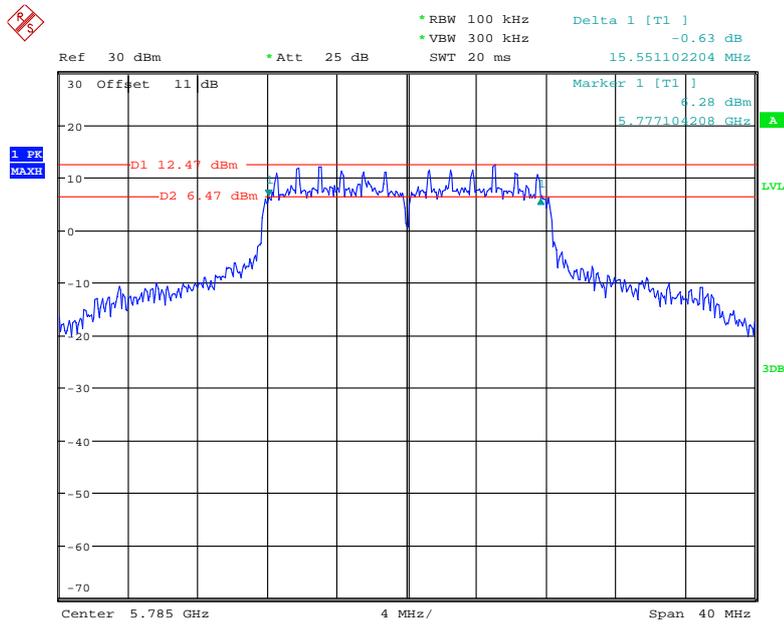


Date: 10.JUN.2019 14:29:06

20 MHz mode, High Channel

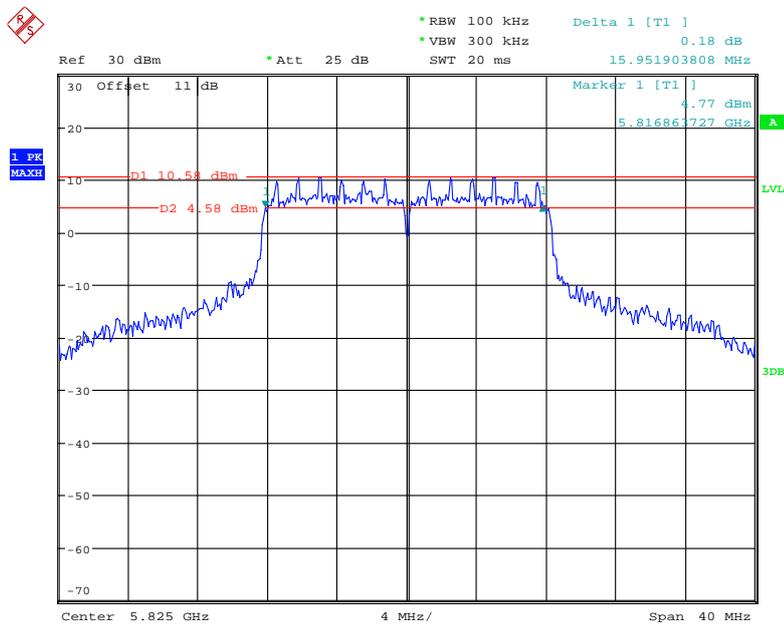


Date: 10.JUN.2019 14:31:36

### 40 MHz mode, Low Channel

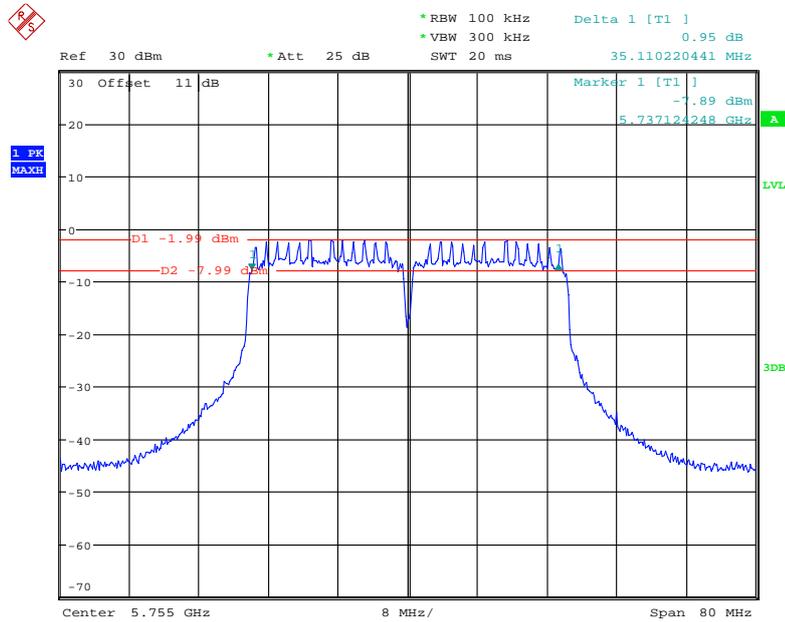

Date: 10.JUN.2019 14:37:10


### 40 MHz mode, High Channel

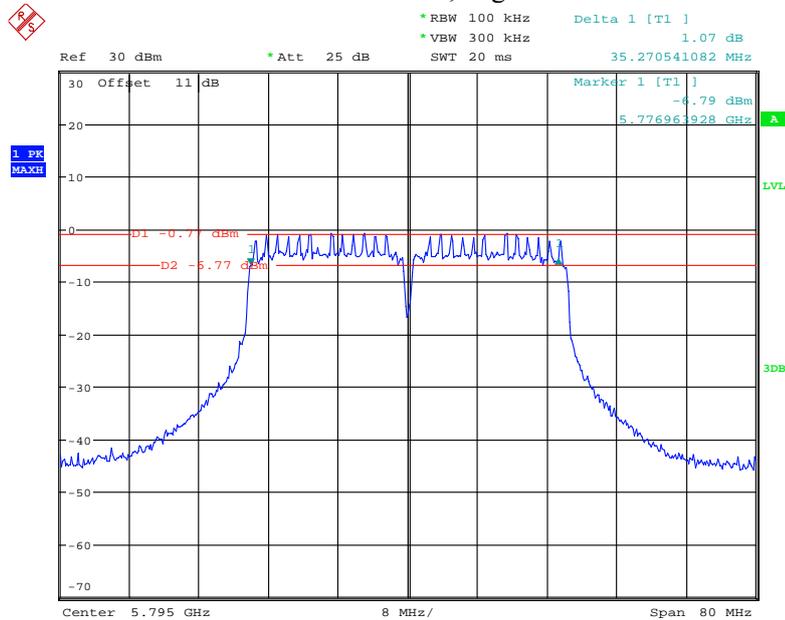

Date: 10.JUN.2019 14:40:17


99% Occupied Bandwidth:

5 MHz mode, Low Channel

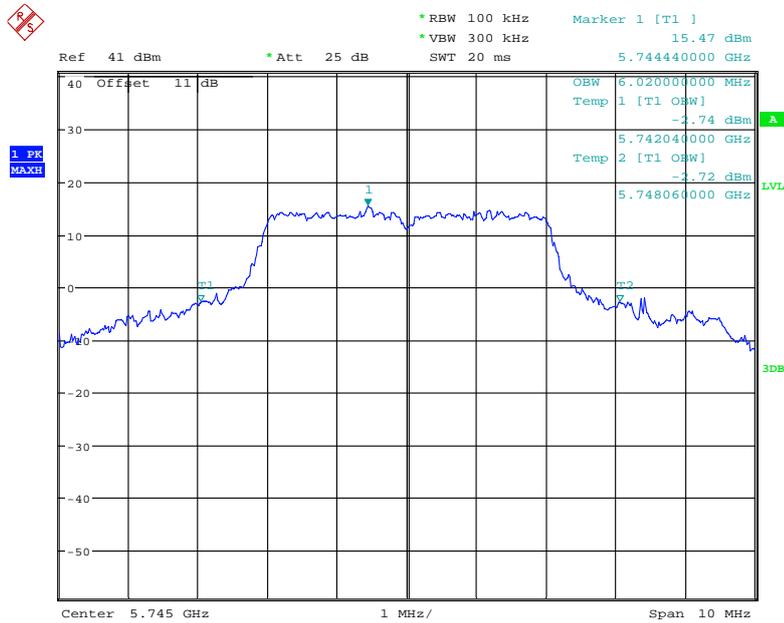


Date: 11.JUN.2019 08:57:11

5 MHz mode, Middle Channel

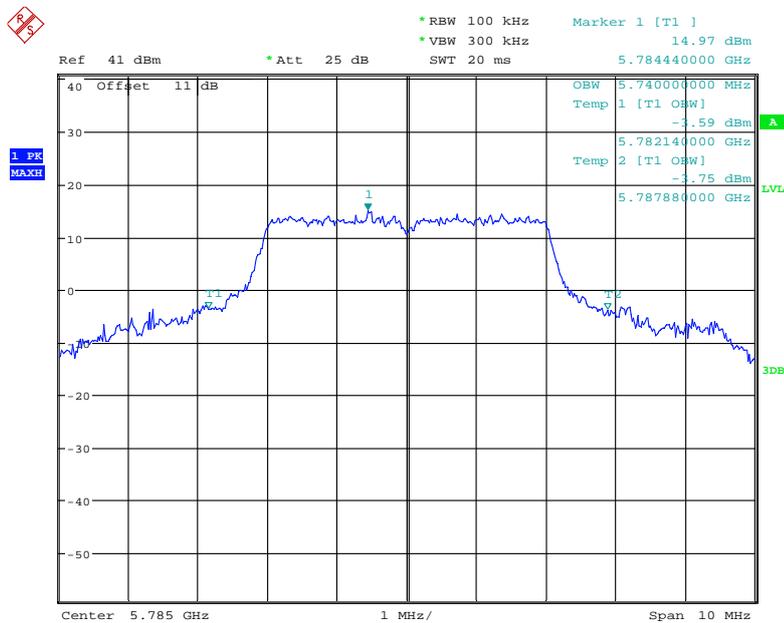


Date: 11.JUN.2019 08:57:42

### 5 MHz mode, High Channel

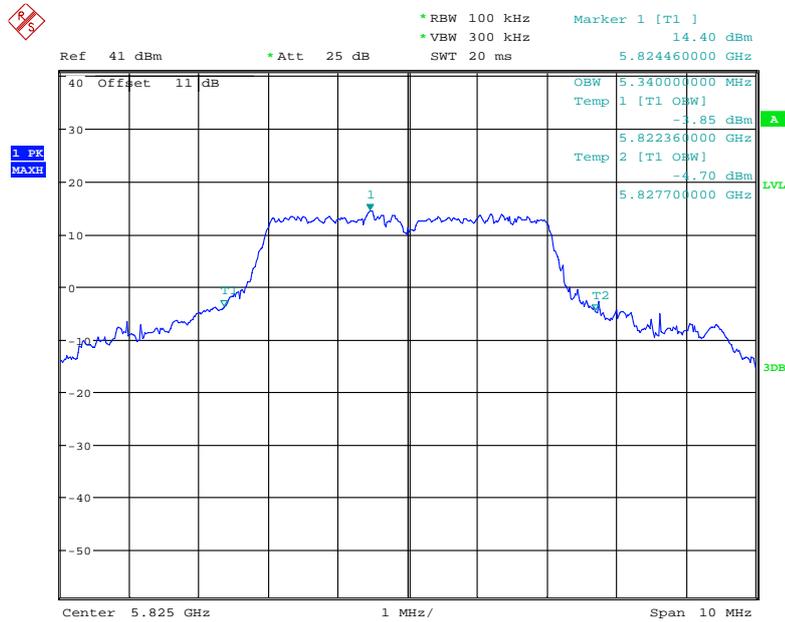


Date: 11.JUN.2019 09:00:43

### 20 MHz mode, Low Channel

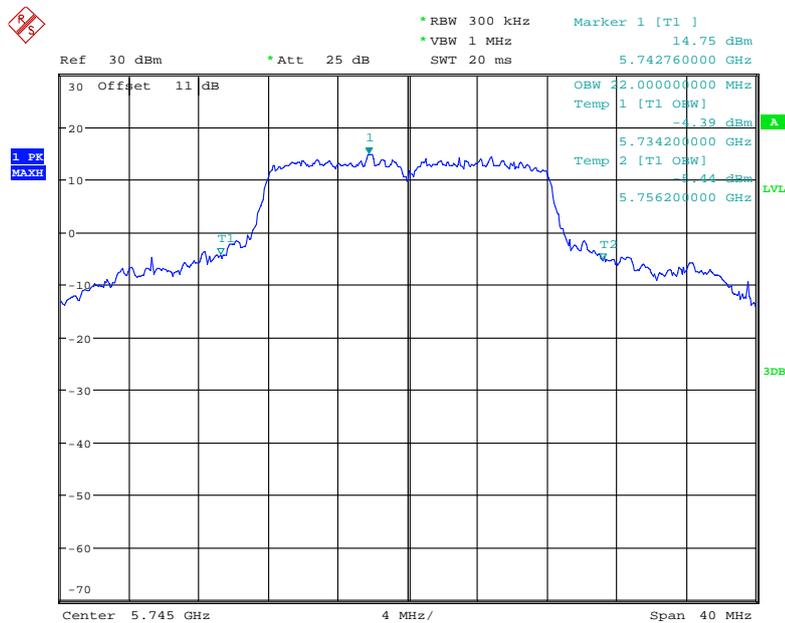


Date: 10.JUN.2019 14:26:04

20 MHz mode, Middle Channel

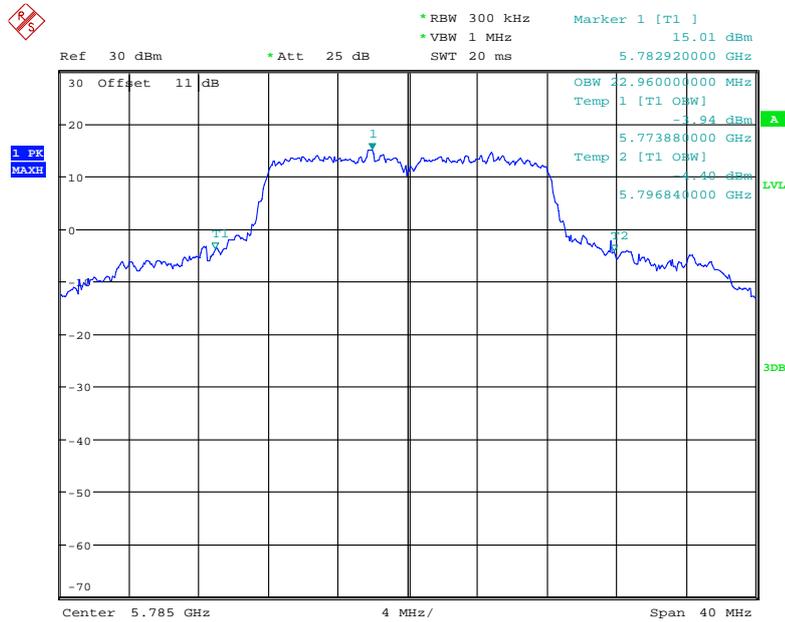


Date: 10.JUN.2019 14:29:21

20 MHz mode, High Channel

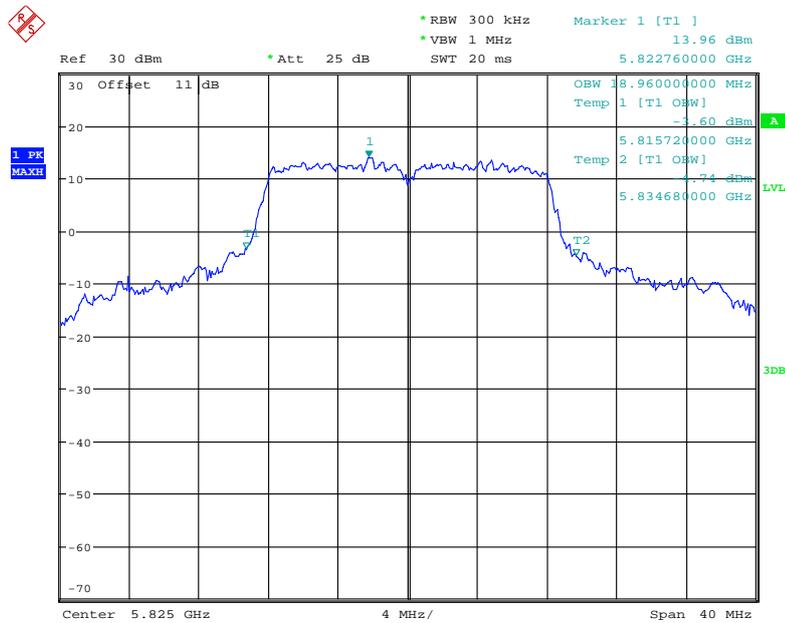


Date: 10.JUN.2019 14:32:02

40 MHz mode, Low Channel

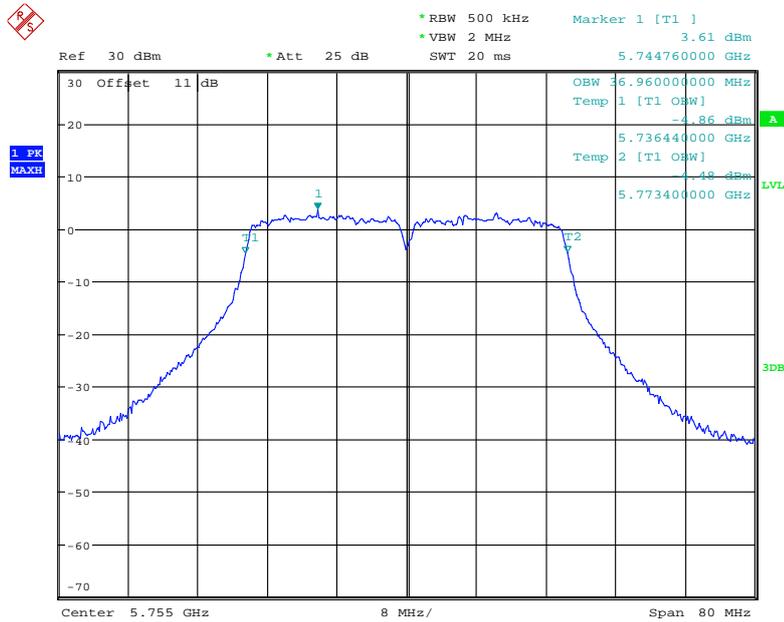

Date: 10.JUN.2019 14:37:28

40 MHz mode,High Channel

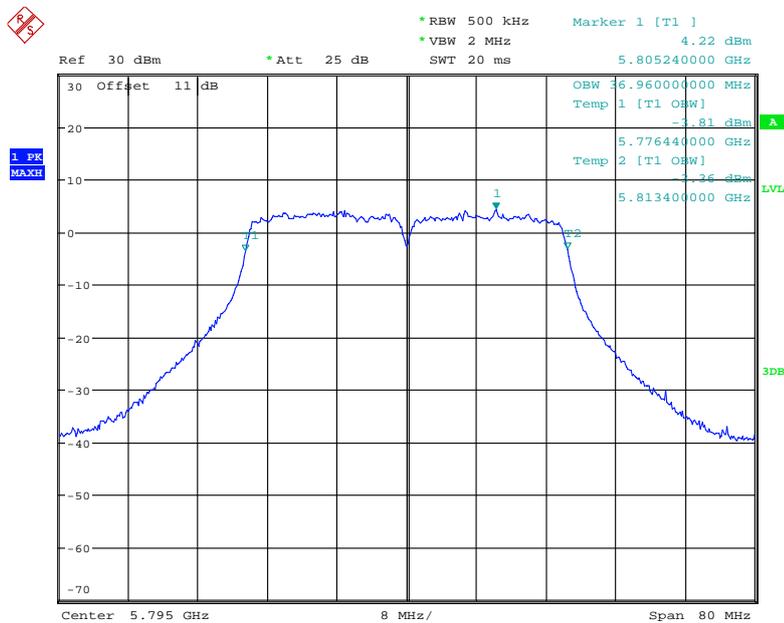

Date: 10.JUN.2019 14:40:40

## **FCC §15.407(a) & RSS-247 §6.2 –MAXIMUM CONDUCTED OUTPUT POWER**

### **Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 §6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

**Test Data****Environmental Conditions**

<b>Temperature:</b>	24.6°C
<b>Relative Humidity:</b>	68 %
<b>ATM Pressure:</b>	100.5 kPa

*The testing was performed by Tiago Huang on 2019-06-10.*

*Test Mode: Transmitting*

Mode	Test Frequency (MHz)	Maximum Conducted Average Output power (dBm)		Limit (dBm)
		Chain 0	Chain 1	
5 MHz	5745	23.89	23.79	30
	5785	23.80	23.60	
	5825	23.90	23.69	
20 MHz	5745	23.65	23.95	
	5785	23.72	23.98	
	5825	23.83	23.81	
40 MHz	5755	14.75	14.56	
	5795	14.25	15.87	

*Note: The antenna gain is 4dBi, meet the RSS-247 EIPR requirement.*

## **FCC §15.407(a)& RSS-247 §6.2- POWER SPECTRAL DENSITY**

### **Applicable Standard**

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10 \log B$ , where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 §6.2:

### **Frequency band 5150-5250 MHz**

#### **6.2.1.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or  $10 + 10 \log_{10}B$ , dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

### **Frequency band 5250-5350 MHz**

#### **6.2.2.1 Power limits**

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or  $1.76 + 10 \log_{10}B$ , dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency bands 5470-5600 MHz and 5650-5725 MHz

### 6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or  $11 + 10 \log_{10}B$ , dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or  $17 + 10 \log_{10}B$ , dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

## Frequency band 5725-5850 MHz

### 6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint<sup>3</sup> systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

## Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

<b>Temperature:</b>	24.4~26.6°C
<b>Relative Humidity:</b>	62~68 %
<b>ATM Pressure:</b>	100.5~100.6 kPa

The testing was performed by Tiago Huang from 2019-06-10 to 2019-06-11.


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

Mode	Test Frequency (MHz)	Reading (dBm/300kHz)		Maximum Power Spectral Density (dBm/500kHz)		Limit (dBm/500kHz)
		Chain 0	Chain 1	Chain 0	Chain 1	
5 MHz	5745	13.26	12.72	15.46	14.92	30
	5785	12.75	12.48	14.95	14.68	
	5825	12.11	11.37	14.31	13.57	
20 MHz	5745	8.17	8.28	10.37	10.48	
	5785	8.77	9.03	10.97	11.23	
	5825	7.57	7.29	9.77	9.49	
40 MHz	5755	-4.80	-3.92	-2.60	-1.72	
	5795	-3.46	-4.31	-1.26	-2.11	


Note: For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

5MHz mode,Low Channel, Chain 0

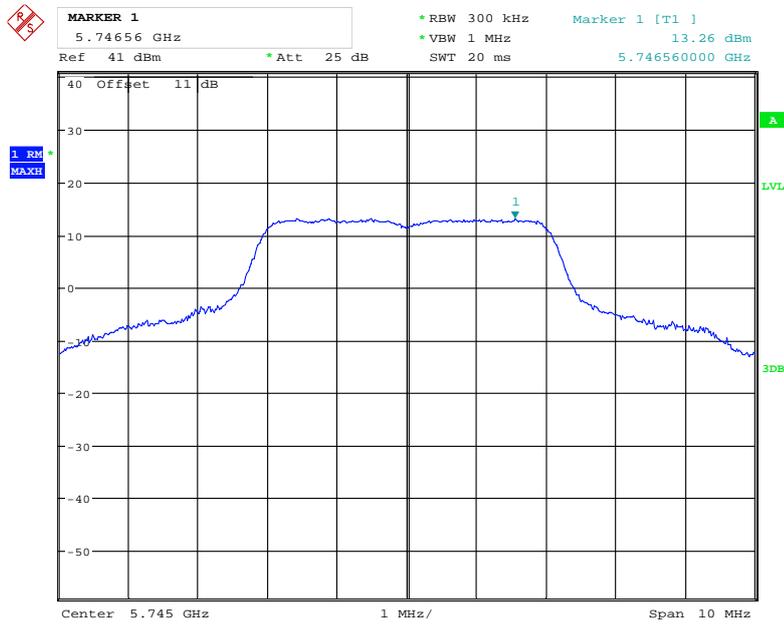


Date: 11.JUN.2019 09:05:57

5MHz mode,Middle Channel, Chain 0

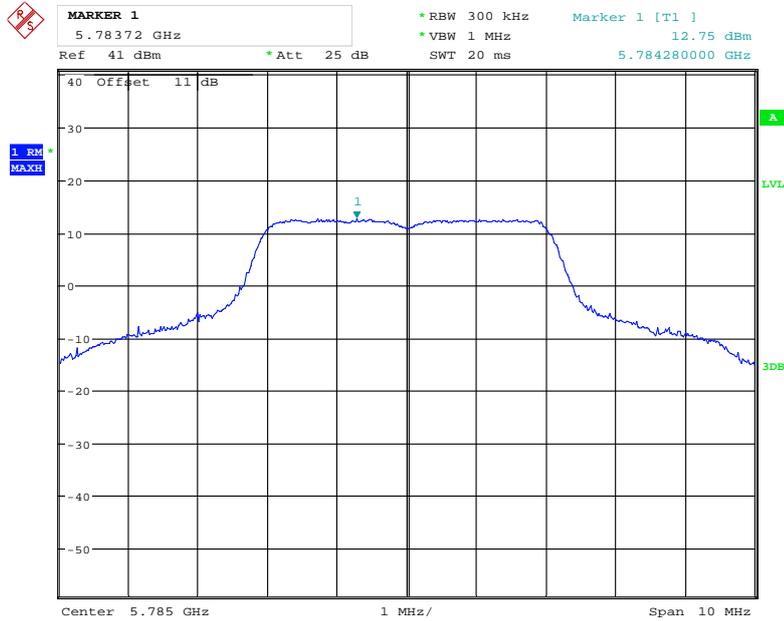


Date: 11.JUN.2019 09:06:25

### 5MHz mode,High Channel, Chain 0

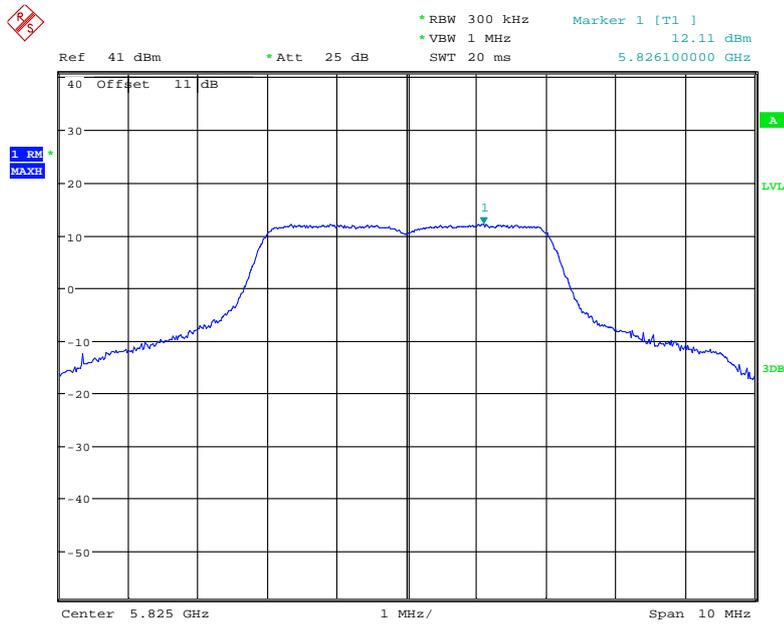


Date: 11.JUN.2019 09:05:13

### 20MHz mode,Low Channel, Chain 0

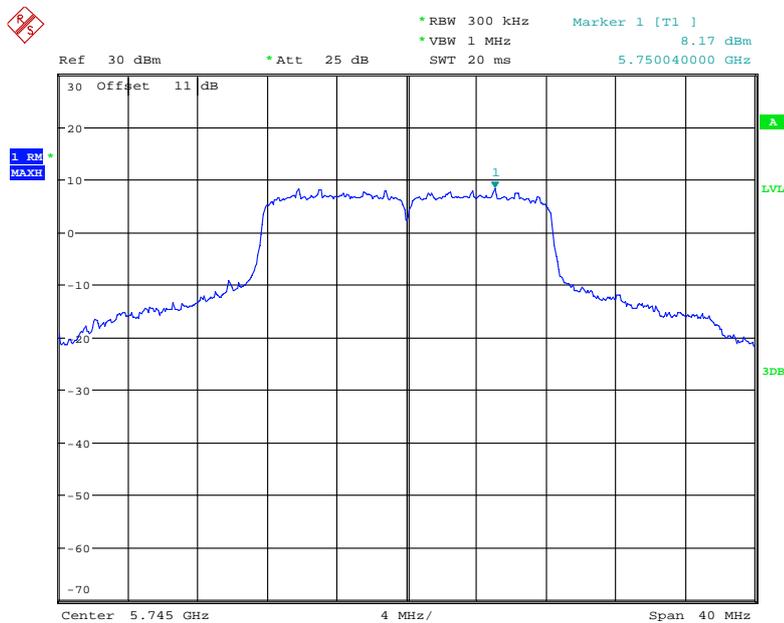


Date: 10.JUN.2019 14:26:22

20MHz mode,Middle Channel, Chain 0

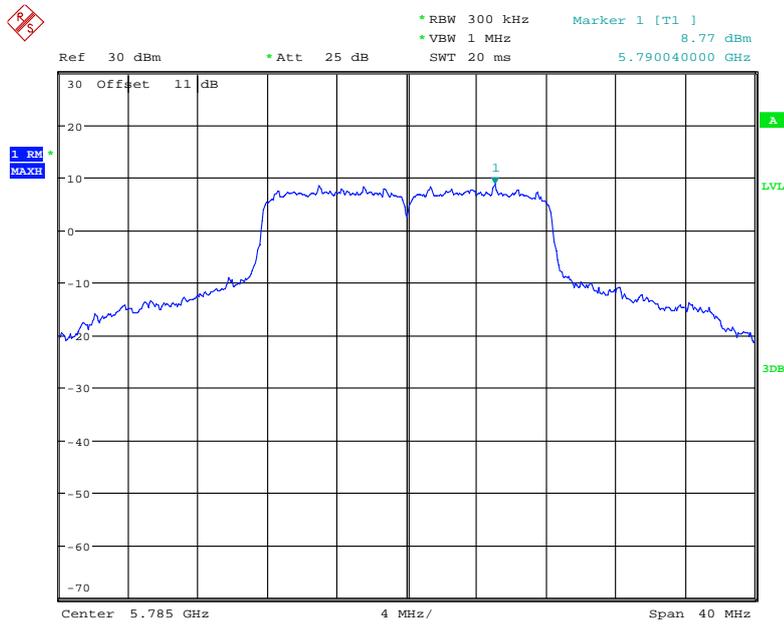


Date: 10.JUN.2019 14:29:35

20MHz mode,High Channel, Chain 0

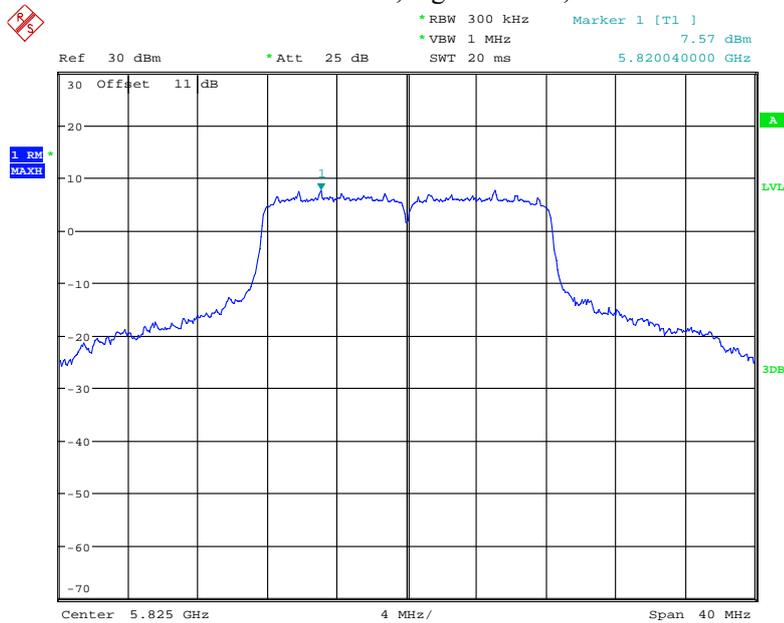


Date: 10.JUN.2019 14:32:23

### 40MHz mode,Low Channel, Chain 0

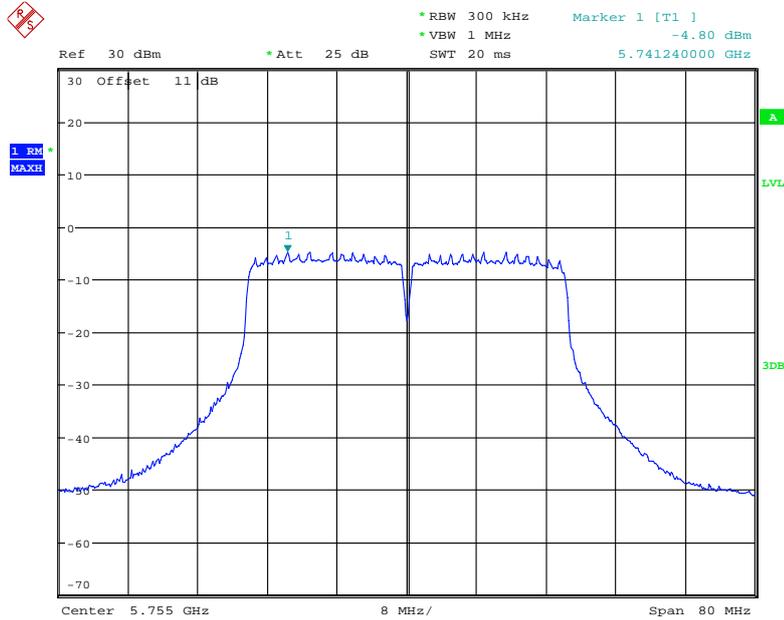


Date: 10.JUN.2019 14:37:50

### 40MHz mode,High Channel, Chain 0

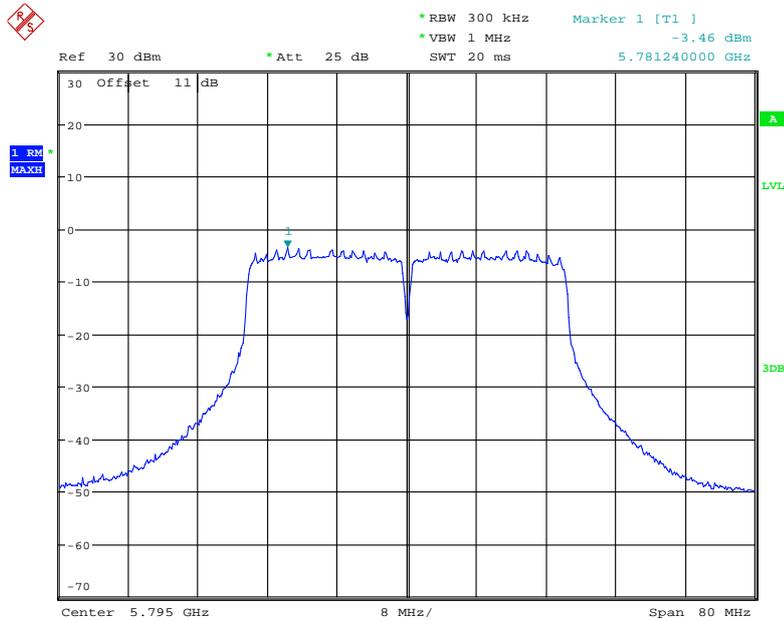


Date: 10.JUN.2019 14:41:02

5MHz mode,Low Channel, Chain 1

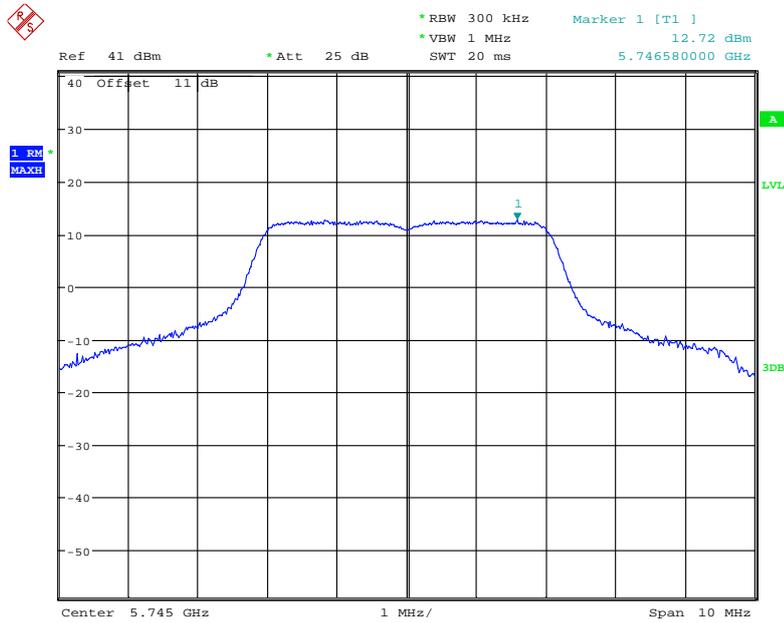


Date: 11.JUN.2019 09:25:25

5MHz mode,middle Channel, Chain 1

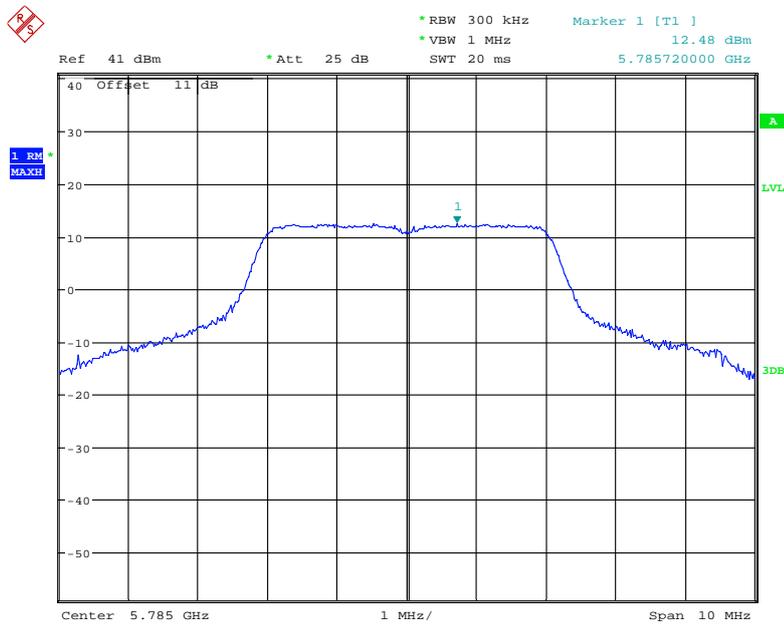


Date: 11.JUN.2019 09:24:26

### 5MHz mode,High Channel, Chain 1

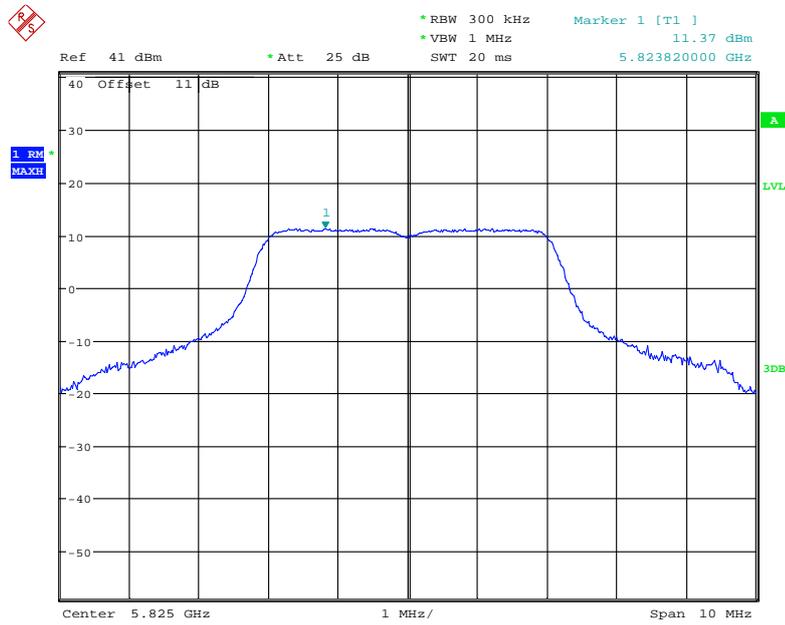


Date: 11.JUN.2019 09:24:00

### 20MHz mode,Low Channel, Chain 1

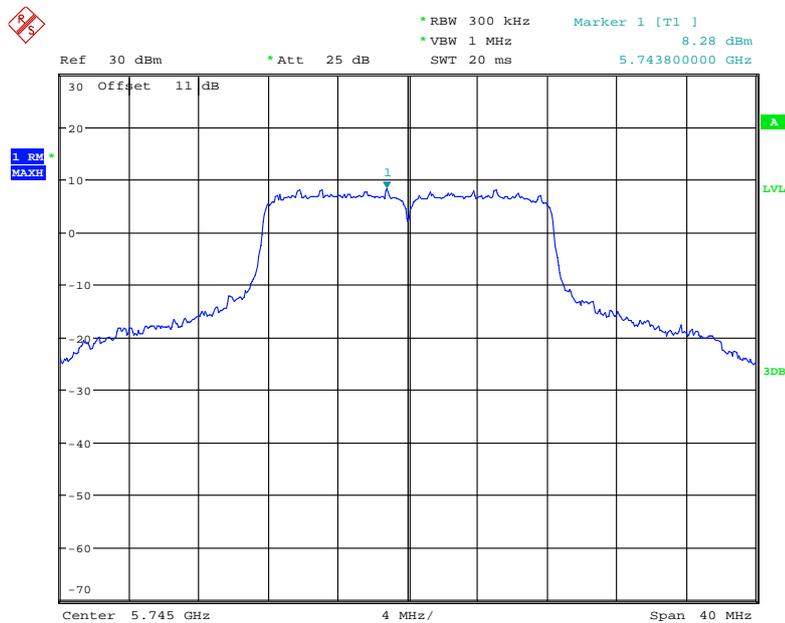


Date: 10.JUN.2019 15:45:06

20MHz mode,Middle Channel, Chain 1

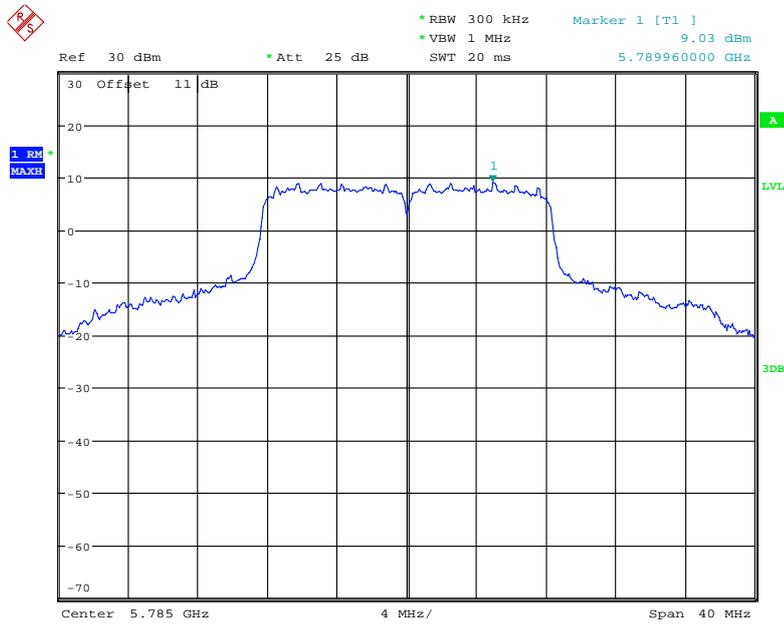


Date: 10.JUN.2019 15:47:45

20MHz mode,High Channel, Chain 1

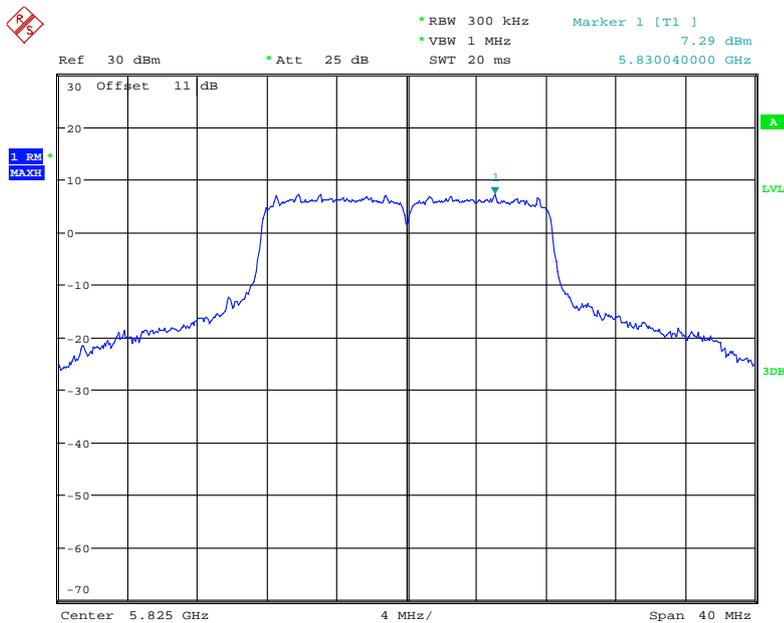


Date: 10.JUN.2019 15:55:45

40MHz mode,Low Channel, Chain 1

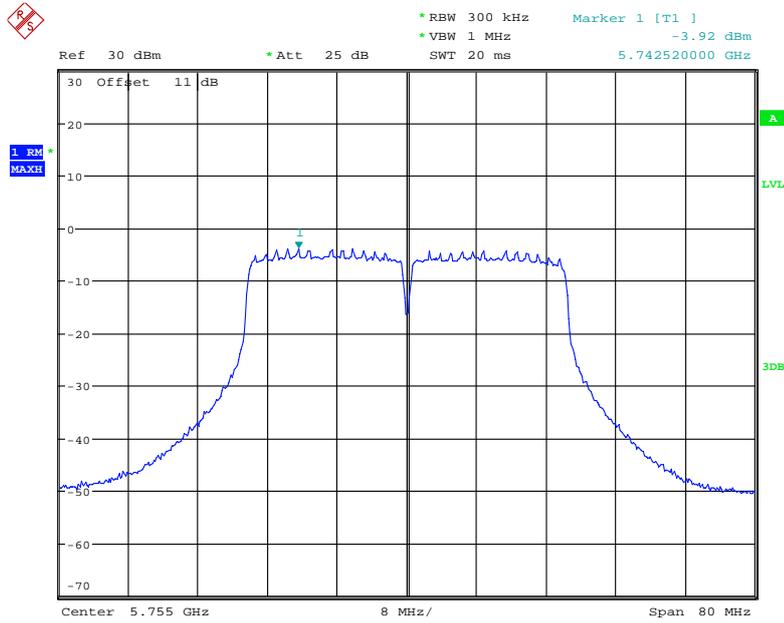

Date: 10.JUN.2019 15:59:27

40MHz mode,High Channel, Chain 1

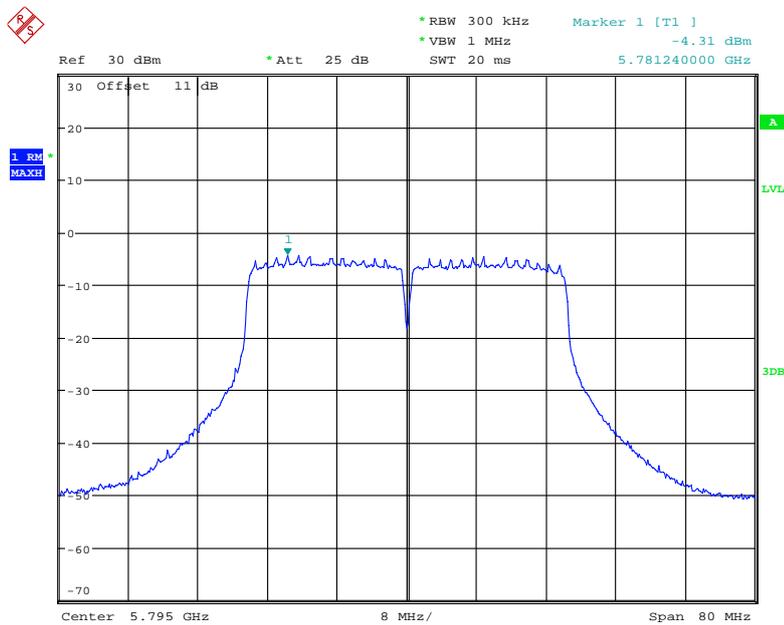

Date: 10.JUN.2019 16:02:20

\*\*\*\*\* END OF REPORT \*\*\*\*\*