

CFR 47 FCC PART 15 SUBPART E

TEST REPORT

For

DJI Mini 5 Pro

MODEL NUMBER: MT5MFND

REPORT NUMBER: 4791691684-1-RF-5

ISSUE DATE: October 31, 2024

FCC ID: SS3-MT5MFND25

Prepared for

SZ DJI TECHNOLOGY CO., LTD.

**Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community, Xili Street,
Nanshan District, Shenzhen, China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

**Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan,
Guangdong, China**

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	October 31, 2024	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
ON TIME AND DUTY CYCLE	ANSI C63.10-2013, Clause 12.2	None; for reporting purposes only.	Pass
6dB AND 26dB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH	KDB 789033 D02 v02r01 Section C.1	FCC Part 15.407 (a)/(e)	Pass
CONDUCTED OUTPUT POWER	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	FCC 15.407 (a)	Pass
POWER SPECTRAL DENSITY	KDB 789033 D02 v02r01 Section F	FCC 15.407 (a)	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2.	FCC 15.207	Pass
Radiated Emissions and Band Edge Measurement	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	FCC 15.407 (b) FCC 15.209 FCC 15.205	Pass
FREQUENCY STABILITY	ANSI C63.10-2013, Clause 6.8	FCC 15.407 (g)	Pass
Dynamic Frequency Selection (Slave)	KDB 905462 D03 Client Without DFS New Rules v01r02	FCC Part 15.407 (h)	N/A
Dynamic Frequency Selection (Master)	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	FCC Part 15.407 (h)	N/A
Antenna Requirement	N/A	FCC 47 CFR Part 15.203/ 15.407(a)(1) (2)	Pass

Note:

1. N/A: In this whole report not applicable.

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART E> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS.....	6
2. TEST METHODOLOGY.....	7
3. FACILITIES AND ACCREDITATION.....	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>9</i>
5.3. <i>CHANNEL LIST</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	<i>17</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	<i>18</i>
5.6. <i>WORSE CASE CONFIGURATIONS.....</i>	<i>18</i>
5.7. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>19</i>
5.8. <i>SUPPORT UNITS FOR SYSTEM TEST</i>	<i>20</i>
6. MEASURING EQUIPMENT AND SOFTWARE USED.....	21
7. ANTENNA PORT TEST RESULTS	24
7.1. <i>ON TIME AND DUTY CYCLE.....</i>	<i>24</i>
7.2. <i>6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH ...</i>	<i>25</i>
7.3. <i>CONDUCTED OUTPUT POWER.....</i>	<i>27</i>
7.4. <i>POWER SPECTRAL DENSITY.....</i>	<i>29</i>
7.5. <i>FREQUENCY STABILITY.....</i>	<i>31</i>
8. RADIATED TEST RESULTS.....	33
8.1. <i>RESTRICTED BANDEDGE</i>	<i>41</i>
8.2. <i>SPURIOUS EMISSIONS(1 GHZ~7 GHZ)</i>	<i>113</i>
8.3. <i>SPURIOUS EMISSIONS(7 GHZ~18 GHZ)</i>	<i>125</i>
8.4. <i>SPURIOUS EMISSIONS(9 KHZ~30 MHZ)</i>	<i>185</i>
8.5. <i>SPURIOUS EMISSIONS(18 GHZ~26 GHZ)</i>	<i>188</i>
8.6. <i>SPURIOUS EMISSIONS(26 GHZ~40 GHZ)</i>	<i>190</i>
8.7. <i>SPURIOUS EMISSIONS(30 MHZ~1 GHZ).....</i>	<i>192</i>
9. AC POWER LINE CONDUCTED EMISSION	194

10.	ANTENNA REQUIREMENT	198
11.	TEST DATA.....	199
11.1.	<i>APPENDIX A: EMISSION BANDWIDTH.....</i>	<i>199</i>
11.1.1.	Test Result.....	199
11.1.2.	Test Graphs	201
11.2.	<i>APPENDIX B: OCCUPIED CHANNEL BANDWIDTH.....</i>	<i>235</i>
11.2.1.	Test Result.....	235
11.2.2.	Test Graphs	237
11.3.	<i>APPENDIX C: MIN EMISSION BANDWIDTH</i>	<i>271</i>
11.3.1.	Test Result.....	271
11.3.2.	Test Graphs	271
11.4.	<i>APPENDIX D: MAXIMUM CONDUCTED OUTPUT POWER.....</i>	<i>282</i>
11.4.1.	Test Result.....	282
11.5.	<i>APPENDIX E: MAXIMUM POWER SPECTRAL DENSITY</i>	<i>288</i>
11.5.1.	Test Result.....	288
11.5.2.	Test Graphs	291
11.6.	<i>APPENDIX F: FREQUENCY STABILITY.....</i>	<i>325</i>
11.6.1.	Test Result.....	325
11.7.	<i>APPENDIX G: DUTY CYCLE.....</i>	<i>326</i>
11.7.1.	Test Result.....	326
11.7.2.	Test Graphs	327

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: SZ DJI TECHNOLOGY CO., LTD.
 Address: Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China

Manufacturer Information


Company Name: SZ DJI TECHNOLOGY CO., LTD.
 Address: Lobby of T2, DJI Sky City, No 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China

EUT Information

EUT Name: DJI Mini 5 Pro
 Model: MT5MFND
 Brand: DJI
 Sample Received Date: September 21, 2024
 Sample Status: Nromal
 Sample ID: 7771135
 Date of Tested: October 11, 2024 to October 31, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART E	Pass

Prepared By:



Fanny Huang
 Engineer Project Associate

Checked By:



Kebo Zhang
 Senior Project Engineer

Approved By:



Stephen Guo
 Operations Manager

2. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART E, ANSI C63.10-2013, CFR 47 FCC Part 2, KDB 789033 D02 v02r01, KDB414788 D01 Radiated Test Site v01, KDB 662911 D01 Multiple Transmitter Output v02r01, KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02, KDB 905462 D03 UNII clients without radar detection New Rules v01r02, KDB 905462 D04 Operational Modes for DFS Testing New Rules v01 and KDB 905462 D06 802 11 Channel Plans New Rules v02.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p>ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1:

All tests measurement facilities use to collect the original measurement data of this report are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China. And the new lab address after relocation is Room 101, Building 2, No.4, Information Road, Songshan Lake, Dongguan, Guangdong, China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 40 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
	5.37 dB (26 GHz ~ 40 GHz)
Duty Cycle	±0.028%
Emission Bandwidth and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.766 dB
Maximum Power Spectral Density Level	±1.22 dB
Frequency Stability	±2.76%
Dynamic Frequency Selection	±1.01 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	DJI Mini 5 Pro
Model	MT5MFND
Frequency Range:	5.1 GHz 10 MHz Bandwidth (5157 MHz ~5245 MHz) 5.1 GHz 20 MHz Bandwidth (5161 MHz ~ 5240 MHz) 5.1 GHz 40 MHz Bandwidth (5170 MHz ~ 5230 MHz) 5.1 GHz 60 MHz Bandwidth (5180 MHz ~ 5220 MHz) 5.1 GHz 80 MHz Bandwidth (5190 MHz ~ 5210 MHz) 5.8 GHz 10 MHz Bandwidth (5730.5 MHz ~ 5844.5 MHz) 5.8 GHz 20 MHz Bandwidth (5735.5 MHz ~ 5839.5 MHz) 5.8 GHz 40 MHz Bandwidth (5745.5 MHz ~ 5829.5 MHz) 5.8 GHz 60 MHz Bandwidth (5755.5 MHz ~ 5819.5 MHz) 5.8 GHz 80 MHz Bandwidth (5765.5 MHz ~ 5809.5 MHz)
Type of Modulation:	OFDM (QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM)
Battery	DC 7V/7.16V
Power Supply	DC 5V/9V/12V

Note: All power supply modes have been pre-scanned, only the worst data was recorded in the report.

5.2. MAXIMUM OUTPUT POWER

UNII-1 BAND

SRD 5GHz	Frequency (MHz)	Maximum Average Conducted Power (dBm)
10 MHz Mode	5150 ~ 5250	19.30
20 MHz Mode		19.04
40 MHz Mode		18.67
60 MHz Mode		18.88
80 MHz Mode		18.65

UNII-3 BAND

SRD 5GHz	Frequency (MHz)	Maximum Average Conducted Power (dBm)
10 MHz Mode	5725 ~ 5850	28.67
20 MHz Mode		29.17
40 MHz Mode		27.13
60 MHz Mode		25.94
80 MHz Mode		25.87

5.3. CHANNEL LIST

5.1 GHz 10 MHz Bandwidth (5157 MHz ~5245 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5157	24	5180	47	5203	70	5226
2	5158	25	5181	48	5204	71	5227
3	5159	26	5182	49	5205	72	5228
4	5160	27	5183	50	5206	73	5229
5	5161	28	5184	51	5207	74	5230
6	5162	29	5185	52	5208	75	5231
7	5163	30	5186	53	5209	76	5232
8	5164	31	5187	54	5210	77	5233
9	5165	32	5188	55	5211	78	5234
10	5166	33	5189	56	5212	79	5235
11	5167	34	5190	57	5213	80	5236
12	5168	35	5191	58	5214	81	5237
13	5169	36	5192	59	5215	82	5238
14	5170	37	5193	60	5216	83	5239
15	5171	38	5194	61	5217	84	5240
16	5172	39	5195	62	5218	85	5241
17	5173	40	5196	63	5219	86	5242
18	5174	41	5197	64	5220	87	5243
19	5175	42	5198	65	5221	88	5244
20	5176	43	5199	66	5222	89	5245
21	5177	44	5200	67	5223	/	/
22	5178	45	5201	68	5224	/	/
23	5179	46	5202	69	5225	/	/

5.1 GHz 20 MHz Bandwidth (5161 MHz ~ 5240 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5161	21	5181	41	5201	61	5221
2	5162	22	5182	42	5202	62	5222
3	5163	23	5183	43	5203	63	5223
4	5164	24	5184	44	5204	64	5224
5	5165	25	5185	45	5205	65	5225
6	5166	26	5186	46	5206	66	5226
7	5167	27	5187	47	5207	67	5227
8	5168	28	5188	48	5208	68	5228
9	5169	29	5189	49	5209	69	5229
10	5170	30	5190	50	5210	70	5230
11	5171	31	5191	51	5211	71	5231
12	5172	32	5192	52	5212	72	5232
13	5173	33	5193	53	5213	73	5233
14	5174	34	5194	54	5214	74	5234
15	5175	35	5195	55	5215	75	5235
16	5176	36	5196	56	5216	76	5236
17	5177	37	5197	57	5217	77	5237
18	5178	38	5198	58	5218	78	5238
19	5179	39	5199	59	5219	79	5239
20	5180	40	5200	60	5220	80	5240

5.1 GHz 40 MHz Bandwidth (5170 MHz ~ 5230 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5170	17	5186	33	5202	49	5218
2	5171	18	5187	34	5203	50	5219
3	5172	19	5188	35	5204	51	5220
4	5173	20	5189	36	5205	52	5221
5	5174	21	5190	37	5206	53	5222
6	5175	22	5191	38	5207	54	5223
7	5176	23	5192	39	5208	55	5224
8	5177	24	5193	40	5209	56	5225
9	5178	25	5194	41	5210	57	5226
10	5179	26	5195	42	5211	58	5227
11	5180	27	5196	43	5212	59	5228
12	5181	28	5197	44	5213	60	5229
13	5182	29	5198	45	5214	61	5230
14	5183	30	5199	46	5215	/	/
15	5184	31	5200	47	5216	/	/
16	5185	32	5201	48	5217	/	/

5.1 GHz 60 MHz Bandwidth (5180 MHz ~ 5220 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5180	12	5191	23	5202	34	5213
2	5181	13	5192	24	5203	35	5214
3	5182	14	5193	25	5204	36	5215
4	5183	15	5194	26	5205	37	5216
5	5184	16	5195	27	5206	38	5217
6	5185	17	5196	28	5207	39	5218
7	5186	18	5197	29	5208	40	5219
8	5187	19	5198	30	5209	41	5220
9	5188	20	5199	31	5210	/	/
10	5189	21	5200	32	5211	/	/
11	5190	22	5201	33	5212	/	/

5.1 GHz 80 MHz Bandwidth (5190 MHz ~ 5210 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5190	7	5196	13	5202	19	5208
2	5191	8	5197	14	5203	20	5209
3	5192	9	5198	15	5204	21	5210
4	5193	10	5199	16	5205	/	/
5	5194	11	5200	17	5206	/	/
6	5195	12	5201	18	5207	/	/

5.8 GHz 10 MHz Bandwidth (5730.5 MHz ~ 5844.5 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5730.5	30	5759.5	59	5788.5	88	5817.5
2	5731.5	31	5760.5	60	5789.5	89	5818.5
3	5732.5	32	5761.5	61	5790.5	90	5819.5
4	5733.5	33	5762.5	62	5791.5	91	5820.5
5	5734.5	34	5763.5	63	5792.5	92	5821.5
6	5735.5	35	5764.5	64	5793.5	93	5822.5
7	5736.5	36	5765.5	65	5794.5	94	5823.5
8	5737.5	37	5766.5	66	5795.5	95	5824.5
9	5738.5	38	5767.5	67	5796.5	96	5825.5
10	5739.5	39	5768.5	68	5797.5	97	5826.5
11	5740.5	40	5769.5	69	5798.5	98	5827.5
12	5741.5	41	5770.5	70	5799.5	99	5828.5
13	5742.5	42	5771.5	71	5800.5	100	5829.5
14	5743.5	43	5772.5	72	5801.5	101	5830.5
15	5744.5	44	5773.5	73	5802.5	102	5831.5
16	5745.5	45	5774.5	74	5803.5	103	5832.5
17	5746.5	46	5775.5	75	5804.5	104	5833.5
18	5747.5	47	5776.5	76	5805.5	105	5834.5
19	5748.5	48	5777.5	77	5806.5	106	5835.5
20	5749.5	49	5778.5	78	5807.5	107	5836.5
21	5750.5	50	5779.5	79	5808.5	108	5837.5
22	5751.5	51	5780.5	80	5809.5	109	5838.5
23	5752.5	52	5781.5	81	5810.5	110	5839.5
24	5753.5	53	5782.5	82	5811.5	111	5840.5
25	5754.5	54	5783.5	83	5812.5	112	5841.5
26	5755.5	55	5784.5	84	5813.5	113	5842.5
27	5756.5	56	5785.5	85	5814.5	114	5843.5
28	5757.5	57	5786.5	86	5815.5	115	5844.5
29	5758.5	58	5787.5	87	5816.5	/	/

5.8 GHz 20 MHz Bandwidth (5735.5 MHz ~ 5839.5 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5735.5	28	5762.5	55	5789.5	82	5816.5
2	5736.5	29	5763.5	56	5790.5	83	5817.5
3	5737.5	30	5764.5	57	5791.5	84	5818.5
4	5738.5	31	5765.5	58	5792.5	85	5819.5
5	5739.5	32	5766.5	59	5793.5	86	5820.5
6	5740.5	33	5767.5	60	5794.5	87	5821.5
7	5741.5	34	5768.5	61	5795.5	88	5822.5
8	5742.5	35	5769.5	62	5796.5	89	5823.5
9	5743.5	36	5770.5	63	5797.5	90	5824.5
10	5744.5	37	5771.5	64	5798.5	91	5825.5
11	5745.5	38	5772.5	65	5799.5	92	5826.5
12	5746.5	39	5773.5	66	5800.5	93	5827.5
13	5747.5	40	5774.5	67	5801.5	94	5828.5
14	5748.5	41	5775.5	68	5802.5	95	5829.5
15	5749.5	42	5776.5	69	5803.5	96	5830.5
16	5750.5	43	5777.5	70	5804.5	97	5831.5
17	5751.5	44	5778.5	71	5805.5	98	5832.5
18	5752.5	45	5779.5	72	5806.5	99	5833.5
19	5753.5	46	5780.5	73	5807.5	100	5834.5
20	5754.5	47	5781.5	74	5808.5	101	5835.5
21	5755.5	48	5782.5	75	5809.5	102	5836.5
22	5756.5	49	5783.5	76	5810.5	103	5837.5
23	5757.5	50	5784.5	77	5811.5	104	5838.5
24	5758.5	51	5785.5	78	5812.5	105	5839.5
25	5759.5	52	5786.5	79	5813.5	/	/
26	5760.5	53	5787.5	80	5814.5	/	/
27	5761.5	54	5788.5	81	5815.5	/	/

5.8 GHz 40 MHz Bandwidth (5745.5 MHz ~ 5829.5 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5745.5	23	5767.5	45	5789.5	67	5811.5
2	5746.5	24	5768.5	46	5790.5	68	5812.5
3	5747.5	25	5769.5	47	5791.5	69	5813.5
4	5748.5	26	5770.5	48	5792.5	70	5814.5
5	5749.5	27	5771.5	49	5793.5	71	5815.5
6	5750.5	28	5772.5	50	5794.5	72	5816.5
7	5751.5	29	5773.5	51	5795.5	73	5817.5
8	5752.5	30	5774.5	52	5796.5	74	5818.5
9	5753.5	31	5775.5	53	5797.5	75	5819.5
10	5754.5	32	5776.5	54	5798.5	76	5820.5
11	5755.5	33	5777.5	55	5799.5	77	5821.5
12	5756.5	34	5778.5	56	5800.5	78	5822.5
13	5757.5	35	5779.5	57	5801.5	79	5823.5
14	5758.5	36	5780.5	58	5802.5	80	5824.5
15	5759.5	37	5781.5	59	5803.5	81	5825.5
16	5760.5	38	5782.5	60	5804.5	82	5826.5
17	5761.5	39	5783.5	61	5805.5	83	5827.5
18	5762.5	40	5784.5	62	5806.5	84	5828.5
19	5763.5	41	5785.5	63	5807.5	85	5829.5
20	5764.5	42	5786.5	64	5808.5	/	/
21	5765.5	43	5787.5	65	5809.5	/	/
22	5766.5	44	5788.5	66	5810.5	/	/

5.8 GHz 60 MHz Bandwidth (5755.5 MHz ~ 5819.5 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5755.5	18	5772.5	35	5789.5	52	5806.5
2	5756.5	19	5773.5	36	5790.5	53	5807.5
3	5757.5	20	5774.5	37	5791.5	54	5808.5
4	5758.5	21	5775.5	38	5792.5	55	5809.5
5	5759.5	22	5776.5	39	5793.5	56	5810.5
6	5760.5	23	5777.5	40	5794.5	57	5811.5
7	5761.5	24	5778.5	41	5795.5	58	5812.5
8	5762.5	25	5779.5	42	5796.5	59	5813.5
9	5763.5	26	5780.5	43	5797.5	60	5814.5
10	5764.5	27	5781.5	44	5798.5	61	5815.5
11	5765.5	28	5782.5	45	5799.5	62	5816.5
12	5766.5	29	5783.5	46	5800.5	63	5817.5
13	5767.5	30	5784.5	47	5801.5	64	5818.5
14	5768.5	31	5785.5	48	5802.5	65	5819.5
15	5769.5	32	5786.5	49	5803.5	/	/
16	5770.5	33	5787.5	50	5804.5	/	/
17	5771.5	34	5788.5	51	5805.5	/	/

5.8 GHz 80 MHz Bandwidth (5765.5 MHz ~ 5809.5 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5765.5	13	5777.5	25	5789.5	37	5801.5
2	5766.5	14	5778.5	26	5790.5	38	5802.5
3	5767.5	15	5779.5	27	5791.5	39	5803.5
4	5768.5	16	5780.5	28	5792.5	40	5804.5
5	5769.5	17	5781.5	29	5793.5	41	5805.5
6	5770.5	18	5782.5	30	5794.5	42	5806.5
7	5771.5	19	5783.5	31	5795.5	43	5807.5
8	5772.5	20	5784.5	32	5796.5	44	5808.5
9	5773.5	21	5785.5	33	5797.5	45	5809.5
10	5774.5	22	5786.5	34	5798.5	/	/
11	5775.5	23	5787.5	35	5799.5	/	/
12	5776.5	24	5788.5	36	5800.5	/	/

5.4. TEST CHANNEL CONFIGURATION

SRD 5 GHz	Test Channel Number	Frequency
5.1G 10 MHz Mode	CH 1(Low Channel), CH2, CH4, CH6, CH7, CH10, CH11, CH13, CH 45(MID Channel), CH 89(High Channel)	5157 MHz, 5158 MHz, 5160 MHz, 5162 MHz, 5163 MHz, 5166 MHz, 5167 MHz, 5169 MHz, 5201 MHz, 5245 MHz
5.1G 20 MHz Mode	CH 1(Low Channel), CH2, CH3, CH7, CH10, CH 40(MID Channel), CH 80(High Channel)	5161 MHz, 5162 MHz, 5167 MHz, 5169 MHz, 5171 MHz, 5200 MHz, 5240 MHz
5.1G 40 MHz Mode	CH 1(Low Channel), CH2, CH4, CH8, CH18, CH 31(MID Channel), CH 61(High Channel)	5170 MHz, 5171 MHz, 5173 MHz, 5177 MHz, 5187 MHz, 5200 MHz, 5230 MHz
5.1G 60 MHz Mode	CH 1(Low Channel), CH3, CH7, CH12, CH16, CH 21(MID Channel), CH 41(High Channel)	5180 MHz, 5182 MHz, 5186 MHz, 5191 MHz, 5195 MHz, 5200 MHz, 5220 MHz
5.1G 80 MHz Mode	CH 1(Low Channel), CH3, CH6, CH 11(MID Channel), CH 21(High Channel)	5190 MHz, 5192 MHz, 5195 MHz, 5200 MHz, 5210 MHz,
5.8G 10 MHz Mode	CH 1(Low Channel), CH 58(MID Channel), CH 115(High Channel)	5730.5 MHz, 5787.5 MHz, 5844.5 MHz
5.8G 20 MHz Mode	CH 1(Low Channel), CH 53(MID Channel), CH 105(High Channel)	5735.5 MHz, 5787.5 MHz, 5839.5 MHz
5.8G 40 MHz Mode	CH 1(Low Channel), CH43(MID Channel), CH 85(High Channel)	5745.5 MHz, 5787.5 MHz, 5829.5 MHz
5.8G 60 MHz Mode	CH 1(Low Channel), CH 23(MID Channel), CH 65(High Channel)	5755.5 MHz, 5787.5 MHz, 5819.5 MHz
5.8G 80 MHz Mode	CH 1(Low Channel), CH 23(MID Channel), CH 45(High Channel)	5765.5 MHz, 5787.5 MHz, 5809.5 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worst Case Power Setting Parameter under 5157 ~ 5240 MHz/ 5728.5 ~ 5848.12 MHz Band		
Test Software		DjiSdrConsole-v2.2.8
Modulation Mode	Transmit Antenna Number	Test Software setting value
		NCB: 10 MHz/20 MHz/40 MHz/60 MHz /80 MHz
		All Channels
All	All	Default

5.6. WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst case Data Rates declared by the customer:

- SRD 5G-10 MHz Mode/QPSK
- SRD 5G-20 MHz Mode/QPSK
- SRD 5G-40 MHz Mode/QPSK
- SRD 5G-60 MHz Mode/QPSK
- SRD 5G-80 MHz Mode/QPSK

The EUT has 4 separate antennas which correspond to 4 separate antenna ports, core ANT 0, core ANT 1, core ANT 2, core ANT 3 correspond to antenna 0, antenna 1, antenna 2, antenna 3 respectively. Only Antenna 1 support WIFI & BLE. Antenna 0,1,2,3 support SRD. For SRD, the EUT support 1TX4RX and 2TX4RX mode. 1TX4RX and 2TX4RX have the same power setting, so only the worst data for 2TX4RX mode were recorded in the report. For 2T4R mode, antenna 0 and antenna 1/ antenna 0 and antenna 3/ antenna 1 and antenna 2/ antenna 2 and antenna 3 used as transmit antennas and all the 4 antennas can use as receive antennas, all the transmit combination(ANT0 and ANT1 / ANT0 and ANT3 / ANT1 and ANT2 / ANT2 and ANT3) had been tested, but only the worst data for ANT0 and ANT1 were recorded in the report.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Radiated emissions tests were performed with the MIMO modes. These were found to be the worst modulation scheme with regards to emissions after preliminary investigations and, as this mode emits the highest conducted output power level, it was deemed to be the worst case.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)
0	5150 ~ 5250	Dipole Antenna	1
1	5150 ~ 5250	Dipole Antenna	1
2	5150 ~ 5250	Dipole Antenna	1
3	5150 ~ 5250	Dipole Antenna	1

Antenna	Frequency (MHz)	Antenna Type	Maximum Antenna Gain (dBi)
0	5725 ~ 5850	Dipole Antenna	1.5
1	5725 ~ 5850	Dipole Antenna	1.5
2	5725 ~ 5850	Dipole Antenna	1.5
3	5725 ~ 5850	Dipole Antenna	1.5

Test Mode	Transmit and Receive Mode	Description
10 MHz Mode	<input checked="" type="checkbox"/> 2TX, 4RX	ANT 0,1 / 0,3 / 1,2 / 2,3 can be used as transmitting antenna. ANT 0,1, 2, 3 can be used as receiving antenna.
20 MHz Mode	<input checked="" type="checkbox"/> 2TX, 4RX	ANT 0,1 / 0,3 / 1,2 / 2,3 can be used as transmitting antenna. ANT 0,1, 2, 3 can be used as receiving antenna.
40 MHz Mode	<input checked="" type="checkbox"/> 2TX, 4RX	ANT 0,1 / 0,3 / 1,2 / 2,3 can be used as transmitting antenna. ANT 0,1, 2, 3 can be used as receiving antenna.
60 MHz Mode	<input checked="" type="checkbox"/> 2TX, 4RX	ANT 0,1 / 0,3 / 1,2 / 2,3 can be used as transmitting antenna. ANT 0,1, 2, 3 can be used as receiving antenna.
80 MHz Mode	<input checked="" type="checkbox"/> 2TX, 4RX	ANT 0,1 / 0,3 / 1,2 / 2,3 can be used as transmitting antenna. ANT 0,1, 2, 3 can be used as receiving antenna.

5.8. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	/
2	USB Adapter	MI	MDY-08-EH	Input: AC 100 ~ 240 V, 50/60 Hz, 0.5 A Output: DC 5 V, 2.5 A/9 V, 2 A/12V, 1.5 A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	Type C	Unshielded	1.0	/

ACCESSORIES


Item	Accessory	Brand Name	Model Name	Description
1	Lithium-ion Rechargeable Battery	DJI	BWXNN5-4680-7.16	Max Charge Voltage: 8.6V Normal Voltage: 7.16V
2	Lithium-ion Rechargeable Battery	DJI	BWXNN5-2788-7.0	Max Charge Voltage: 8.6V Normal Voltage: 7V
3	Adapter Power	DJI	PD-65CN	Input: AC 100 ~ 240 V, 50/60 Hz, 2.0 A Output: DC 5 V, 5 A/9 V, 5 A/12V, 5 A/15V, 4.3A/20V, 3.25A

TEST SETUP

The EUT can work in engineering mode with a software through a laptop.

SETUP DIAGRAM FOR TESTS

For AC Power Line Conducted Emission Test:

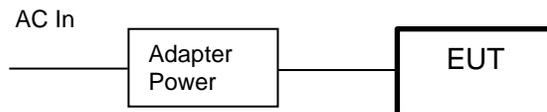

For Others Test:



6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	/	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Software						
Description	Manufacturer		Name		Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32		10.60.10	
Tonsend RF Test System						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	1201.0002K50-161167-ij	/	Sep 28, 2024	Sep 27, 2025
Wireless Connectivity Tester	R&S	CMW270	1201.0002K75-1025	Sep.25, 2023	Sep 13, 2024	Sep 12, 2025
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
RF Control Unit	Tonscend	JS0806-2	23B80620666	/	Mar.25,2024	Mar.24,2025
Software						
Description	Manufacturer		Name		Version	
Tonsend SRD Test System	Tonsend		JS1120-3 RF Test System		V3.2.22	

Conducted Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Sep 28, 2024	Sep 27, 2025
Software						
Description			Manufacturer		Name	Version
Test Software for Conducted Emissions			Farad		EZ-EMC	Ver. UL-3A1

Radiated Emissions						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug.02, 2021	June 28, 2024	June 27, 2027
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Horn Antenna	TDK	HRN-0118	130939	/	Apr.29, 2022	Apr.28, 2025
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Horn Antenna	Schwarzbeck	BBHA9170	697	/	June 30, 2024	June 29, 2027
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Loop antenna	Schwarzbeck	1519B	00008	/	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Band Reject Filter	Wainwright	WRCJV12-5695-5725-5850-5880-40SS	4	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025

Band Reject Filter	Wainwright	WRCJV20-5120-5150-5350-5380-60SS	2	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Band Reject Filter	Wainwright	WRCJV20-5440-5470-5725-5755-60SS	1	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025
Software						
Description		Manufacturer		Name	Version	
Test Software for Radiated Emissions		Farad		EZ-EMC	Ver. UL-3A1	

Other Instrument						
Equipment	Manufacturer	Model No.	Serial No.	Upper Cal.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.8, 2024	Oct.7, 2025
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.10, 2024	Oct.9, 2025
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Sep 28, 2024	Sep 27, 2025

7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE

LIMITS


None; for reporting purposes only.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.B.

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW \geq EBW if possible; otherwise, set RBW to the largest available value. Set VBW \geq RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

TEST SETUP

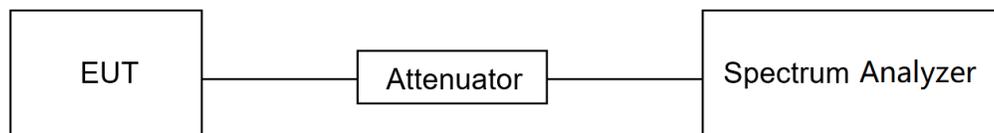

TEST ENVIRONMENT

Temperature	24.7°C	Relative Humidity	58.1%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	October 31, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix G

7.2. 6DB AND 26DB EMISSION BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
26 dB Emission Bandwidth	For reporting purposes only.	5150 ~ 5250
26 dB Emission Bandwidth	For reporting purposes only.	5250 ~ 5350
26 dB Emission Bandwidth	For reporting purposes only.	5470 ~ 5725 (For FCC)
26 dB Emission Bandwidth	For reporting purposes only.	5725 ~ 5850
6 dB Emission Bandwidth	The minimum 6 dB emission bandwidth shall be 500 kHz.	5725 ~ 5850
99 % Occupied Bandwidth	For reporting purposes only.	5150 ~ 5825

TEST PROCEDURE


Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.C1. for 26 dB Emission Bandwidth; section II.C2. for 6 dB Emission Bandwidth; section II.D. for 99 % Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	For 6 dB Emission Bandwidth: RBW=100 kHz For 26 dB Emission bandwidth: approximately 1 % of the EBW. For 99 % Occupied Bandwidth: approximately 1 % ~ 5 % of the OBW.
VBW	For 6 dB Bandwidth: $\geq 3 \times \text{RBW}$ For 26 dB Bandwidth: $> 3 \times \text{RBW}$ For 99 % Bandwidth: $> 3 \times \text{RBW}$
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6/26 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

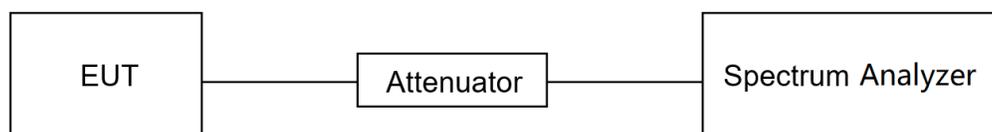

TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	October 13, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A&B&C

7.3. CONDUCTED OUTPUT POWER

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Conducted Output Power	<input type="checkbox"/> Outdoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Indoor Access Point: 1 W (30 dBm) <input type="checkbox"/> Fixed Point-To-Point Access Points: 1 W (30 dBm) <input checked="" type="checkbox"/> Client Devices: 250 mW (24 dBm)	5150 ~ 5250
	Shall not exceed the lesser of 250 mW (24dBm) or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz.	5250 ~ 5350 5470 ~ 5725
	Shall not exceed 1 Watt (30 dBm).	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.E.

Method PM (Measurement using an RF average power meter):

- (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
 - a. The EUT is configured to transmit continuously or to transmit with a constant duty cycle.
 - b. At all times when the EUT is transmitting, it must be transmitting at its maximum power control level.
 - c. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in II.B.
- (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.
- (iv) Adjust the measurement in dBm by adding $10 \log (1/x)$ where x is the duty cycle (e.g., $10 \log (1/0.25)$ if the duty cycle is 25 %).

TEST SETUP

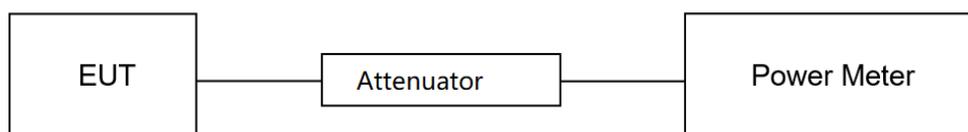

TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	October 13, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix D

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15, Subpart E		
Test Item	Limit	Frequency Range (MHz)
Power Spectral Density	<input type="checkbox"/> Outdoor Access Point: 17 dBm/MHz <input type="checkbox"/> Indoor Access Point: 17 dBm/MHz <input type="checkbox"/> Fixed Point-To-Point Access Points: 17 dBm/MHz <input checked="" type="checkbox"/> Client Devices: 11 dBm/MHz	5150 ~ 5250
	11 dBm/MHz	5250 ~ 5350 5470 ~ 5725
	30 dBm/500kHz	5725 ~ 5850

Note:

The above limits are based upon the maximum antenna gain does not exceed 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

Refer to KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.F.

Connect the EUT to the spectrum analyzer and use the following settings:


For U-NII-1, U-NII-2A and U-NII-2C band:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	1 MHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

For U-NII-3:

Center Frequency	The center frequency of the channel under test
Detector	RMS
RBW	500 kHz
VBW	$\geq 3 \times$ RBW
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Average
Sweep time	Auto

Allow trace to fully stabilize and use the peak search function on the instrument to find the peak of the spectrum and record its value.
Add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum, the result is the Maximum PSD over 1 MHz / 500 kHz reference bandwidth.

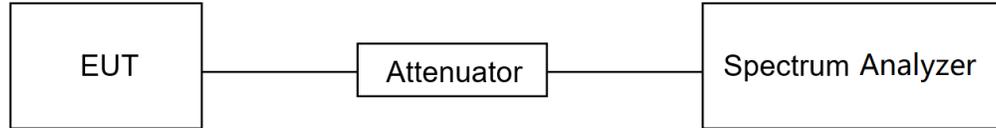TEST SETUP**TEST ENVIRONMENT**

Temperature	25.6°C	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	October 13, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.5. FREQUENCY STABILITY

LIMITS

The frequency of the carrier signal shall be maintained within band of operation.

TEST PROCEDURE

1. The EUT was placed inside an environmental chamber as the temperature in the chamber was varied between -10 °C ~ 40 °C (declared by customer).
2. The temperature was incremented by 10 °C intervals and the unit allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded.
3. The primary supply voltage is varied from 85 % to 115 % of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Connect the EUT to the spectrum analyzer and use the following settings:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	10 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	Encompass the entire emissions bandwidth (EBW) of the signal
Trace	Max hold
Sweep time	Auto

4. While maintaining a constant temperature inside the environmental chamber, turn the EUT on and record the operating frequency at startup, and at 2 minutes, 5 minutes, and 10 minutes after the EUT is energized.
5. Allow the trace to stabilize, find the peak value of the power envelope and record the frequency, then calculated the frequency drift.

TEST ENVIRONMENT

	Normal Test Conditions	Extreme Test Conditions
Relative Humidity	20 % ~ 75 %	/
Atmospheric Pressure	100 kPa ~ 102 kPa	/
Temperature	T _N (Normal Temperature): 25.6 °C	T _L (Low Temperature): -10 °C
		T _H (High Temperature): 40 °C
Supply Voltage	V _N (Normal Voltage): DC 7.16V	V _L (Low Voltage): DC 6.086 V
		V _H (High Voltage): DC 8.234 V

TEST SETUP

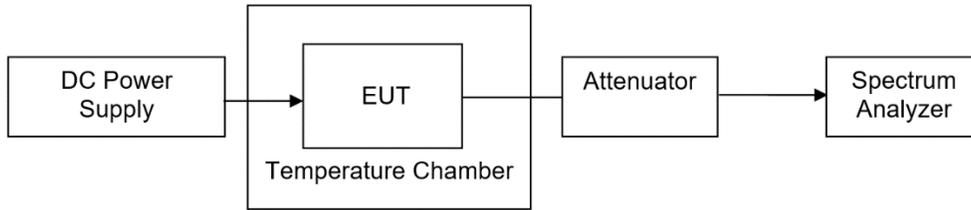

TEST ENVIRONMENT

Temperature	25.6°C	Relative Humidity	63.5%
Atmosphere Pressure	101kPa	Test Voltage	DC 7.16V

TEST DATE / ENGINEER

Test Date	October 13, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F

8. RADIATED TEST RESULTS

LIMITS

Refer to CFR 47 FCC §15.205, §15.209 and §15.407 (b).

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

Limits of unwanted/undesirable emission out of the restricted bands refer to CFR 47 FCC §15.407 (b).

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1GHz)		
Frequency Range (MHz)	EIRP Limit	Field Strength Limit (dBuV/m) at 3 m
5150~5250 MHz	PK: -27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz		
5470~5725 MHz		
5725~5850 MHz	PK: -27 (dBm/MHz) *1 PK: 10 (dBm/MHz) *2 PK: 15.6 (dBm/MHz) *3 PK: 27 (dBm/MHz) *4	PK: 68.2(dBμV/m) *1 PK: 105.2 (dBμV/m) *2 PK: 110.8(dBμV/m) *3 PK: 122.2 (dBμV/m) *4
Note: *1 beyond 75 MHz or more above of the band edge. *2 below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above. *3 below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above. *4 from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in KDB 789033 D02 General U-NII Test Procedures New Rules v02r01 section II.G.3 ~ II.G.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

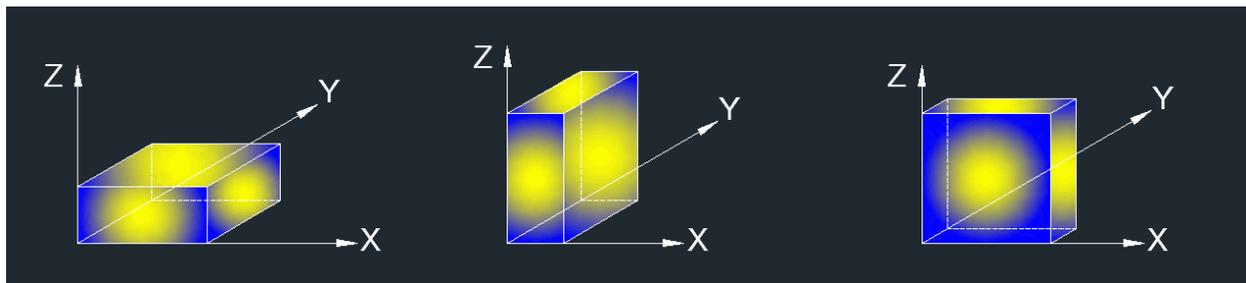

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 7 GHz):

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (7 GHz ~ 18 GHz):

Note:

1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. Since non-restricted band peak emissions are less than the average limit, they also comply with the -27 dBm/MHz (68.2 dBuV/m) limit.
9. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):

Note:


1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (26 GHz ~ 40 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

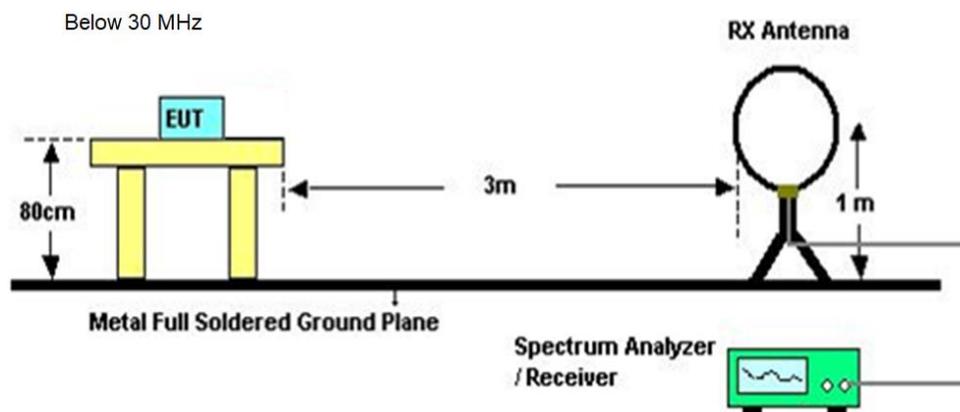

Below 1 GHz and above 30 MHz

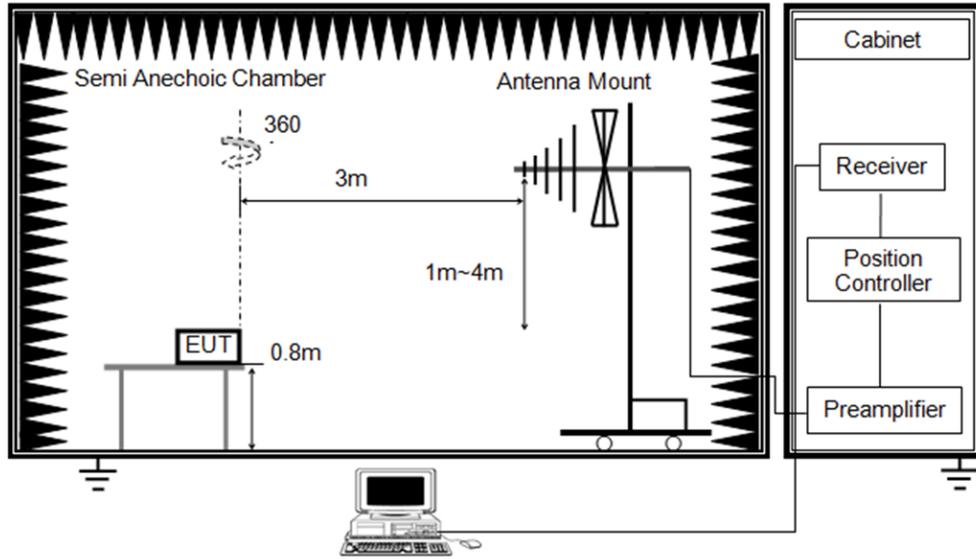

Above 1 GHz

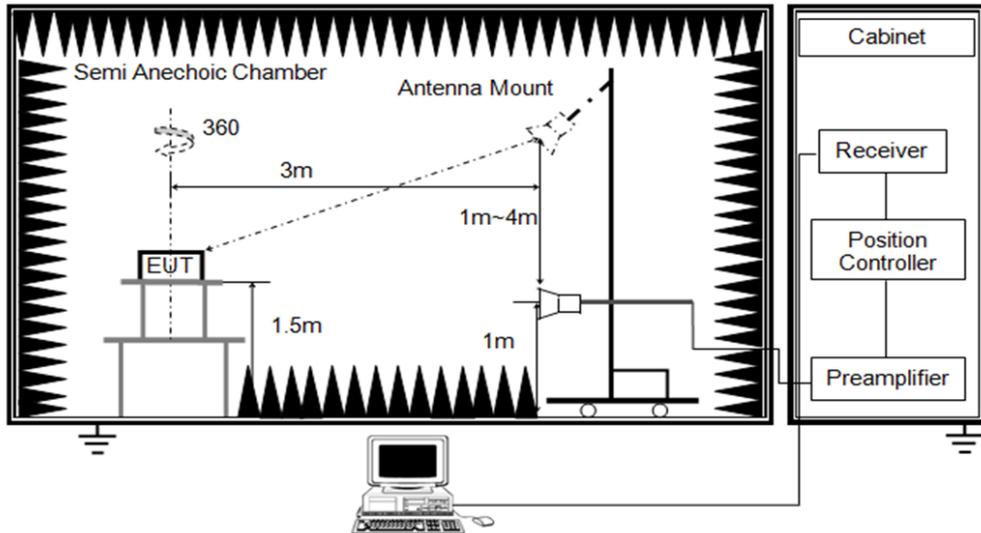

TEST ENVIRONMENT

Temperature	22.8°C	Relative Humidity	53.1%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	October 30, 2024	Test By	Rex Huang
-----------	------------------	---------	-----------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	SRD 10M PK	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 7.16V

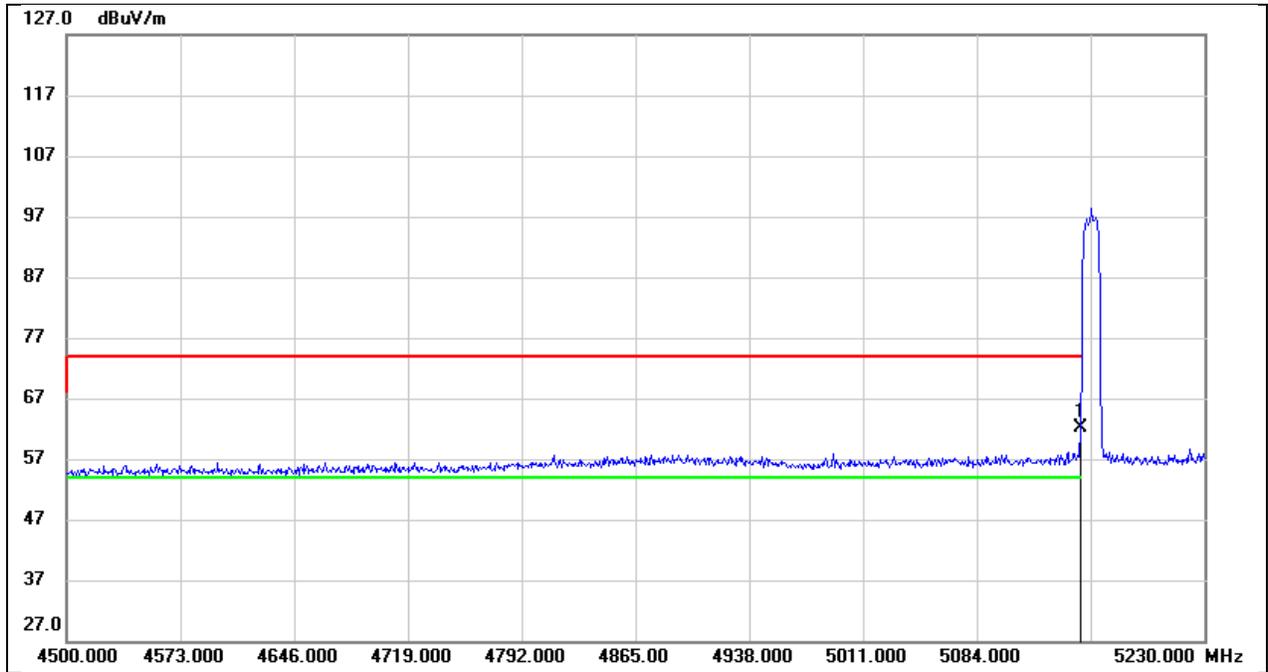


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	22.18	40.04	62.22	74.00	-11.78	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 7.16V

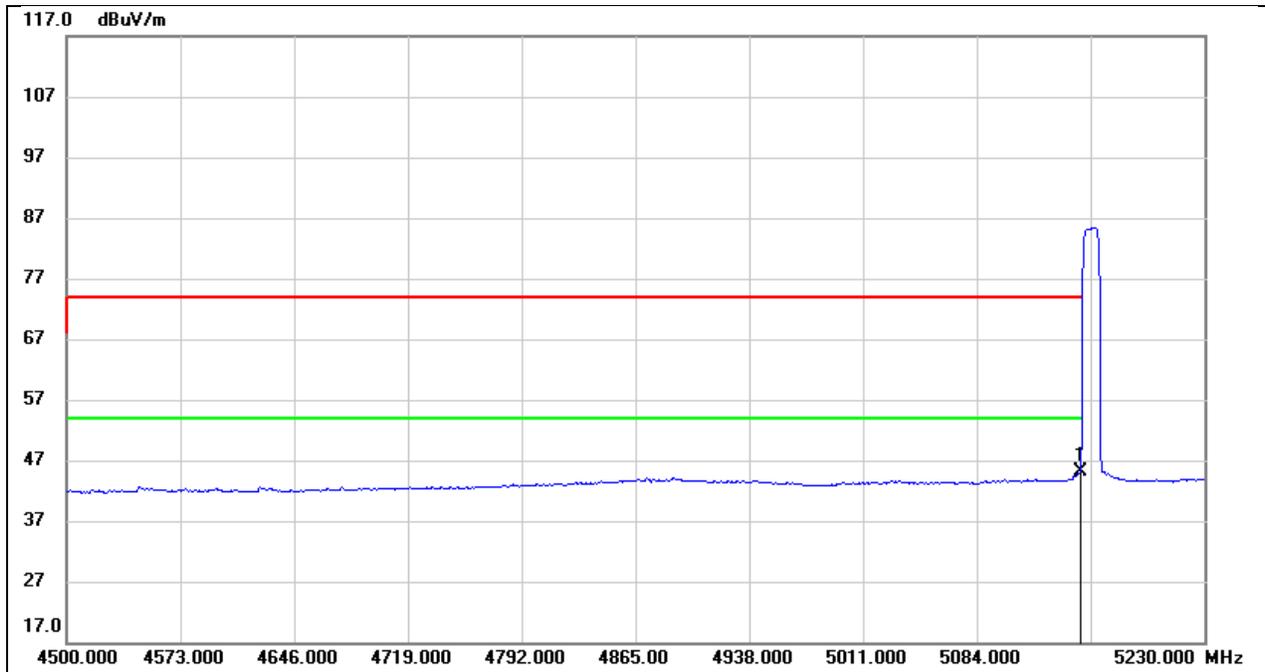


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.19	40.04	45.23	54.00	-8.77	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5158
Polarity:	Vertical	Test Voltage:	DC 7.16V

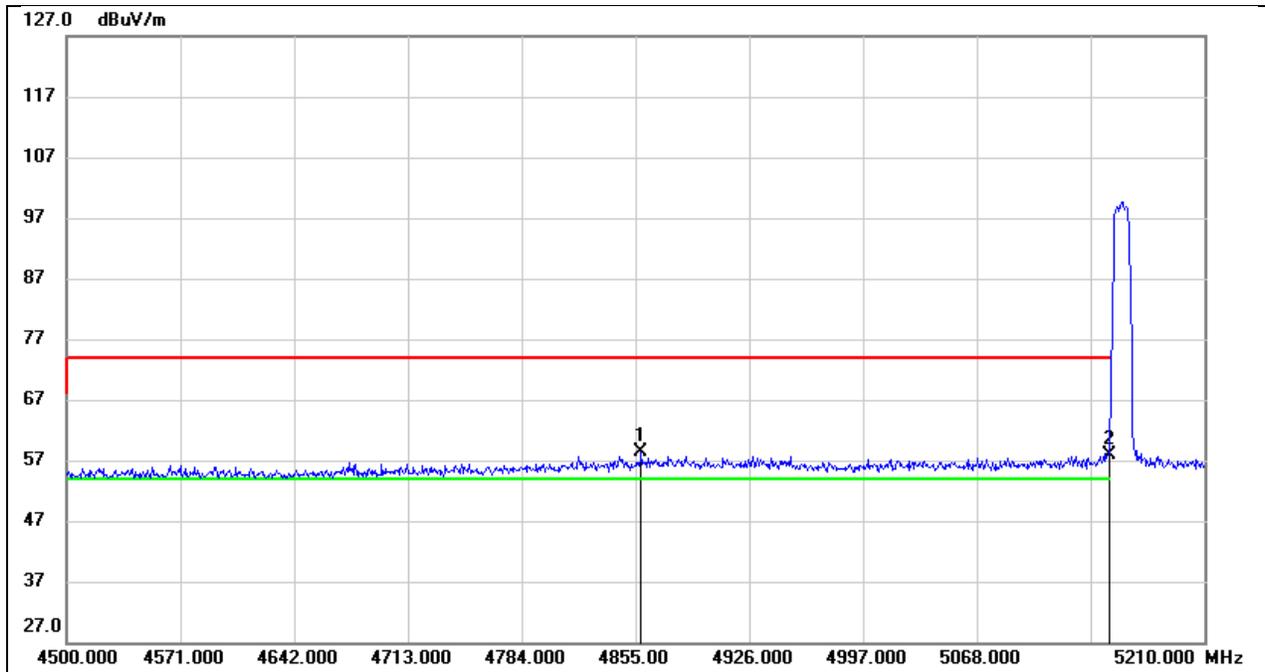


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4858.550	18.83	39.43	58.26	74.00	-15.74	peak
2	5150.000	17.81	40.04	57.85	74.00	-16.15	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5158
Polarity:	Vertical	Test Voltage:	DC 7.16V

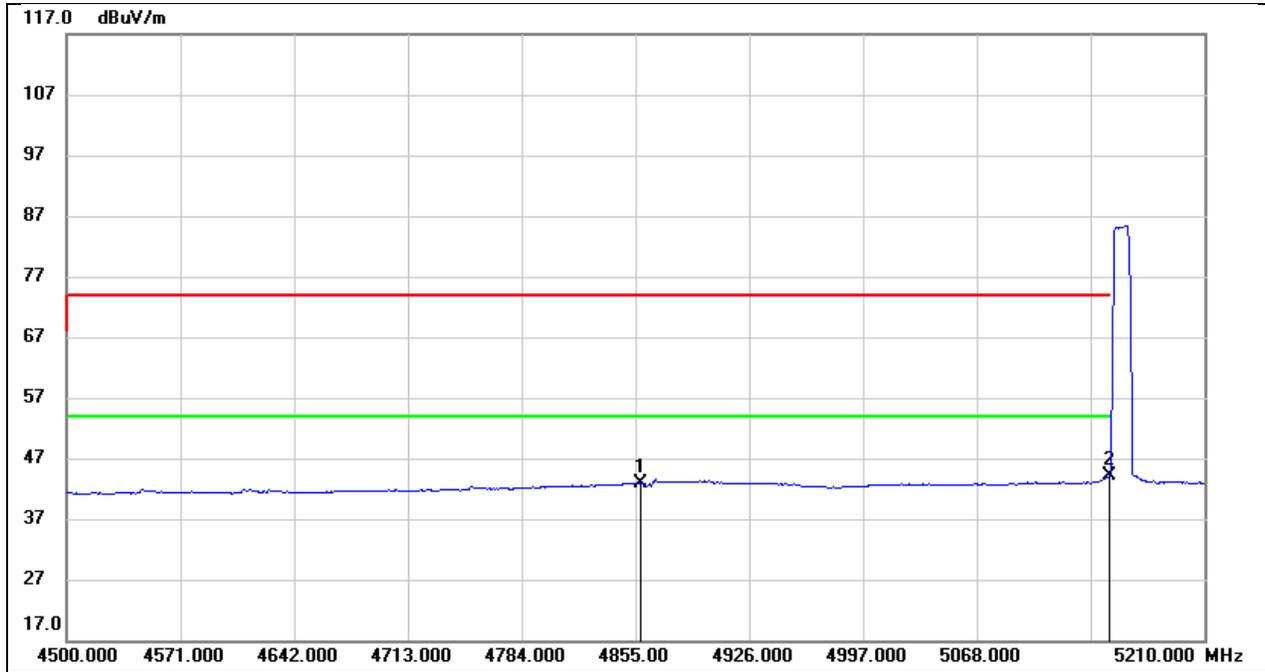


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4858.550	3.40	39.43	42.83	54.00	-11.17	AVG
2	5150.000	4.02	40.04	44.06	54.00	-9.94	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5160
Polarity:	Vertical	Test Voltage:	DC 7.16V

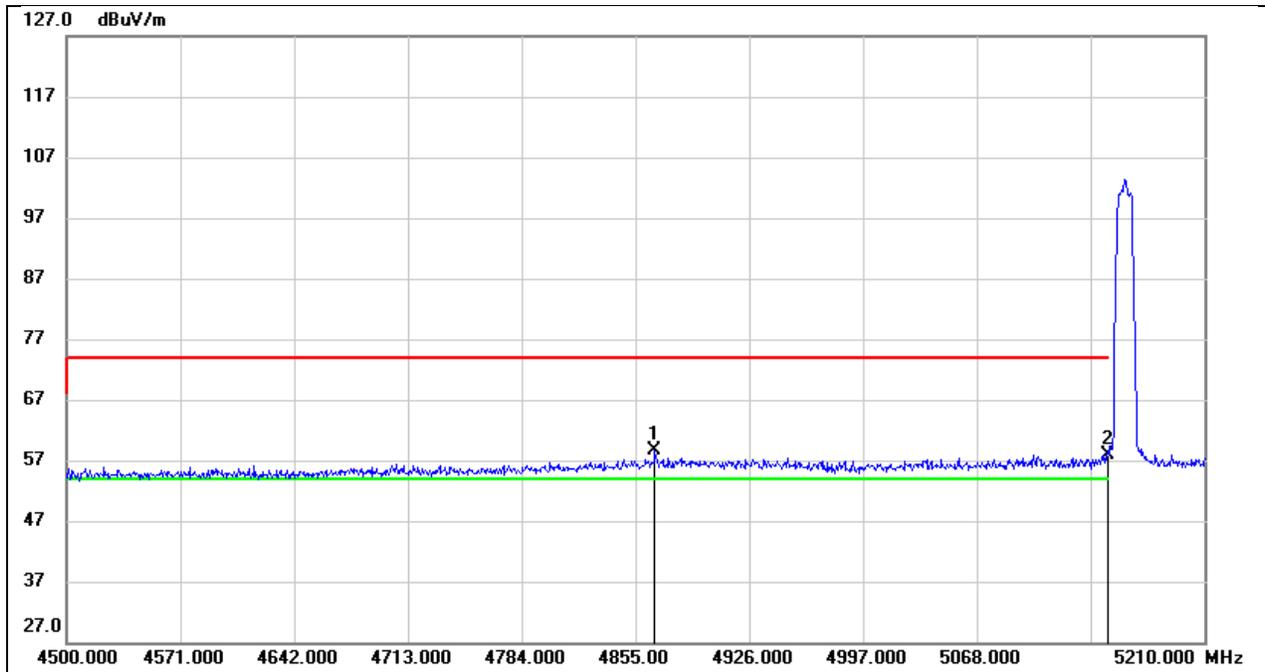


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4867.070	19.27	39.46	58.73	74.00	-15.27	peak
2	5150.000	17.91	40.04	57.95	74.00	-16.05	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5160
Polarity:	Vertical	Test Voltage:	DC 7.16V

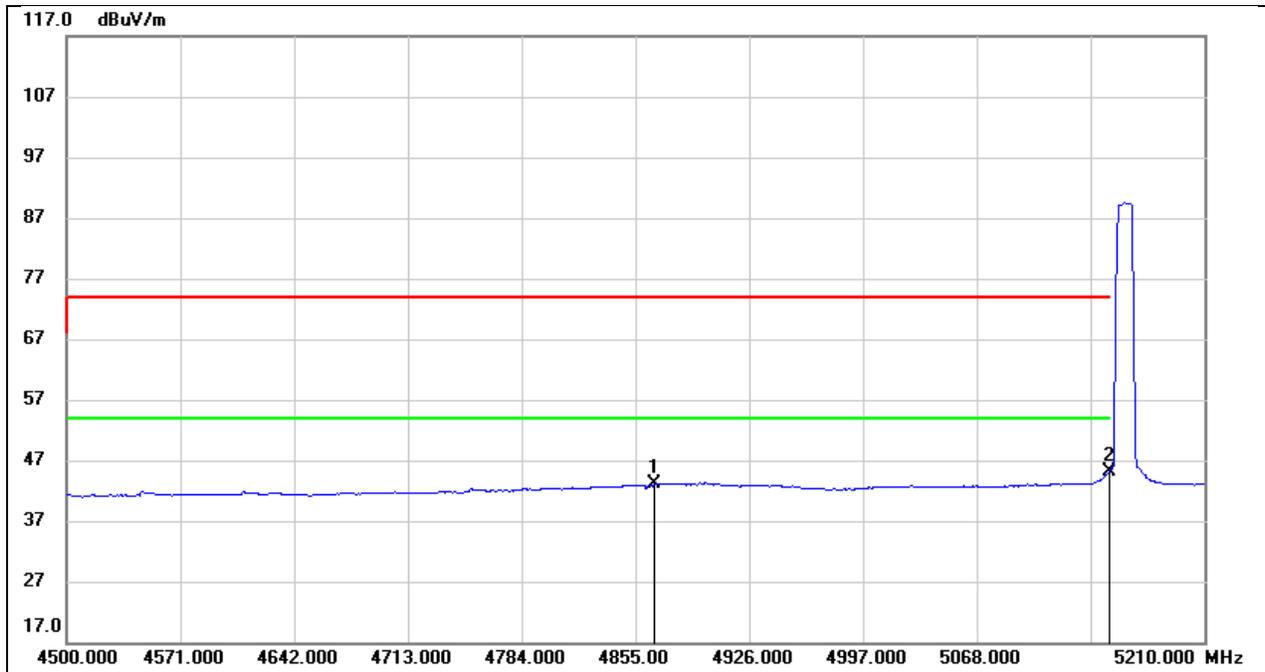


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4867.070	3.68	39.46	43.14	54.00	-10.86	AVG
2	5150.000	5.15	40.04	45.19	54.00	-8.81	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5162
Polarity:	Vertical	Test Voltage:	DC 7.16V

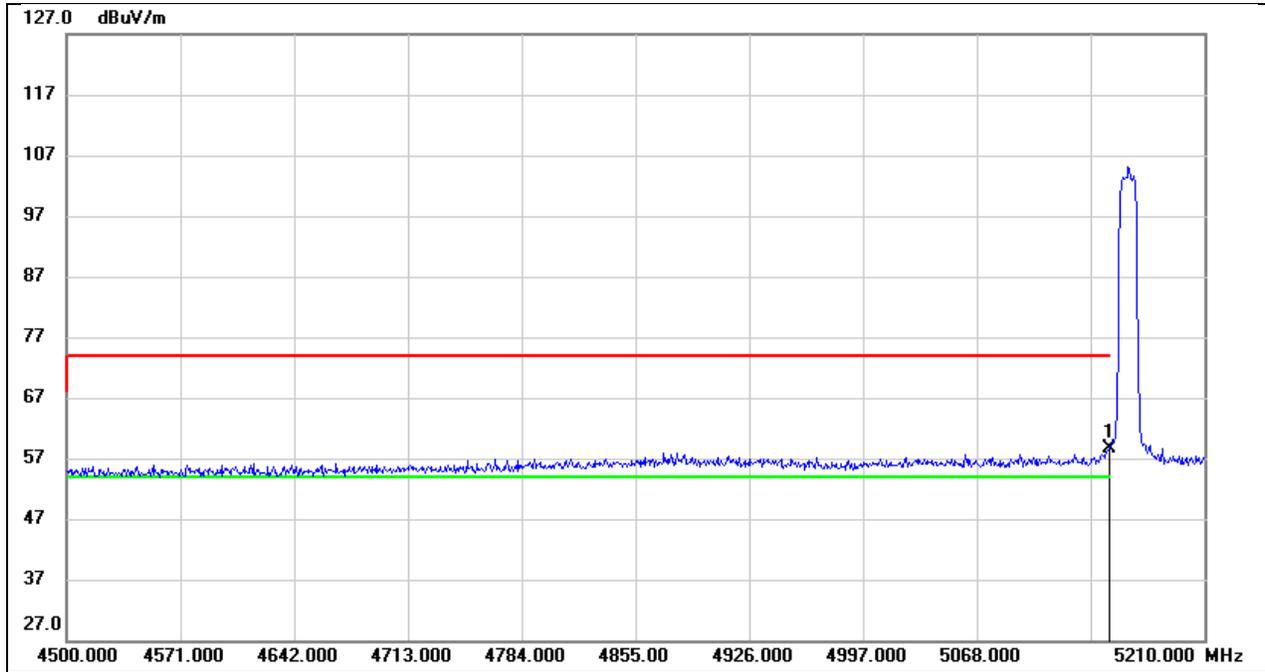


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.69	40.04	58.73	74.00	-15.27	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5162
Polarity:	Vertical	Test Voltage:	DC 7.16V

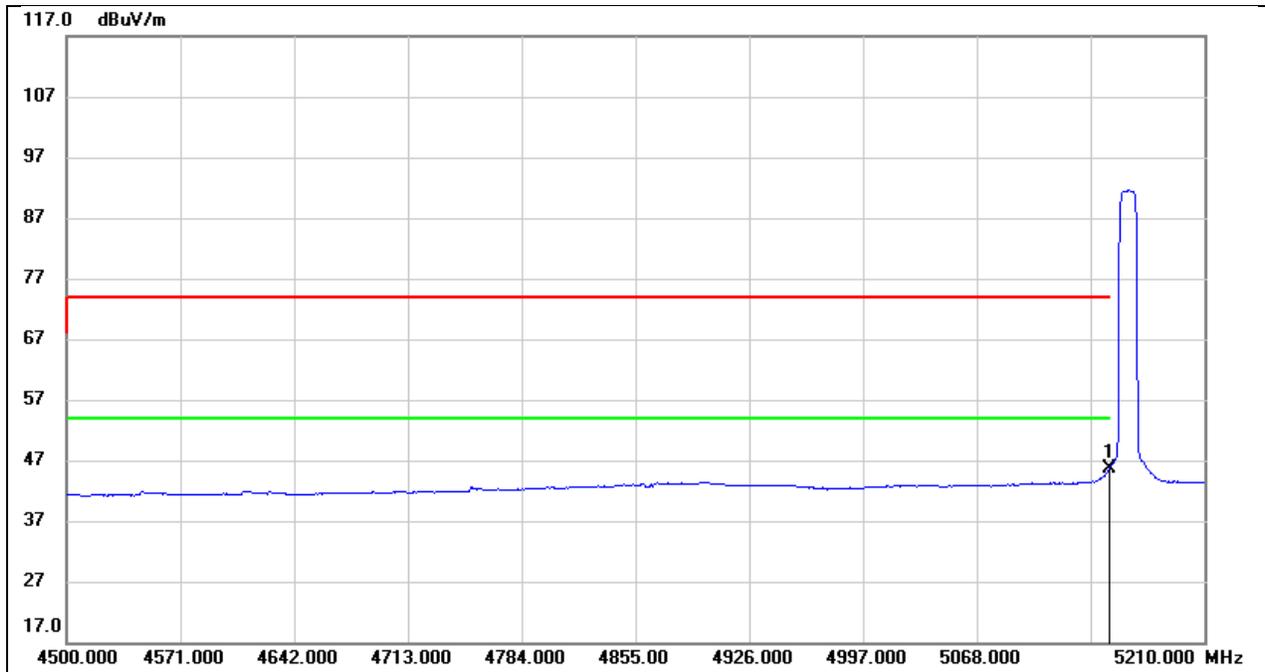


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.49	40.04	45.53	54.00	-8.47	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5163
Polarity:	Vertical	Test Voltage:	DC 7.16V

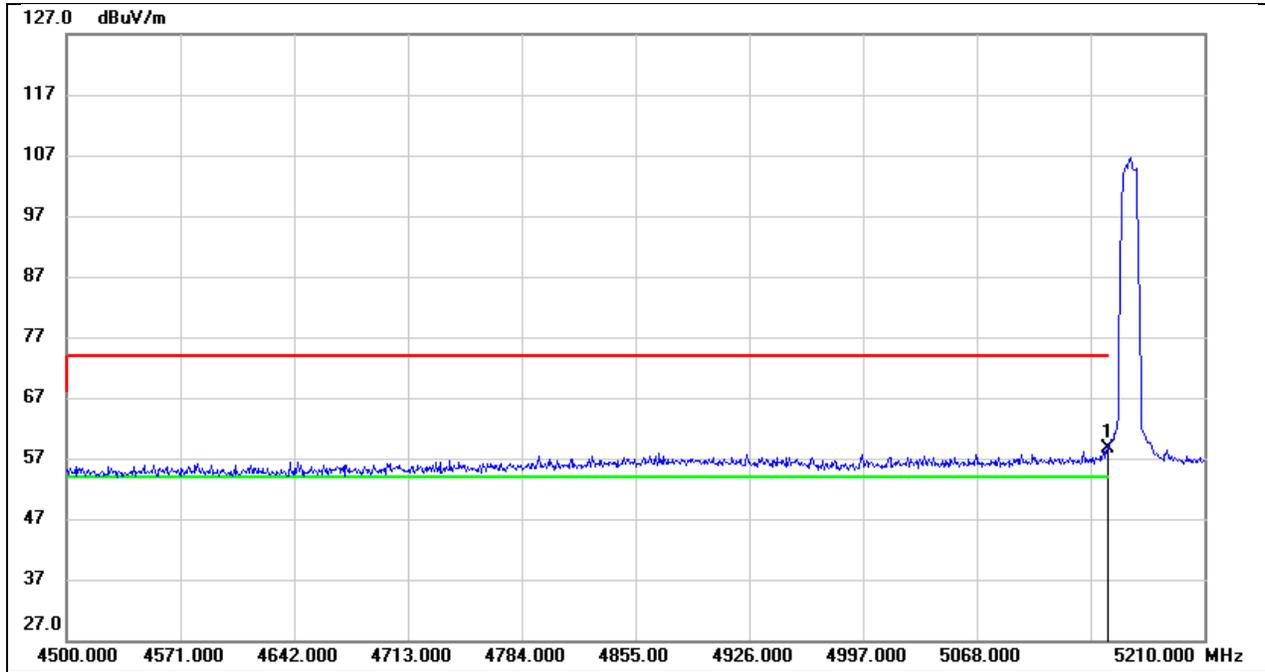


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.49	40.04	58.53	74.00	-15.47	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5163
Polarity:	Vertical	Test Voltage:	DC 7.16V

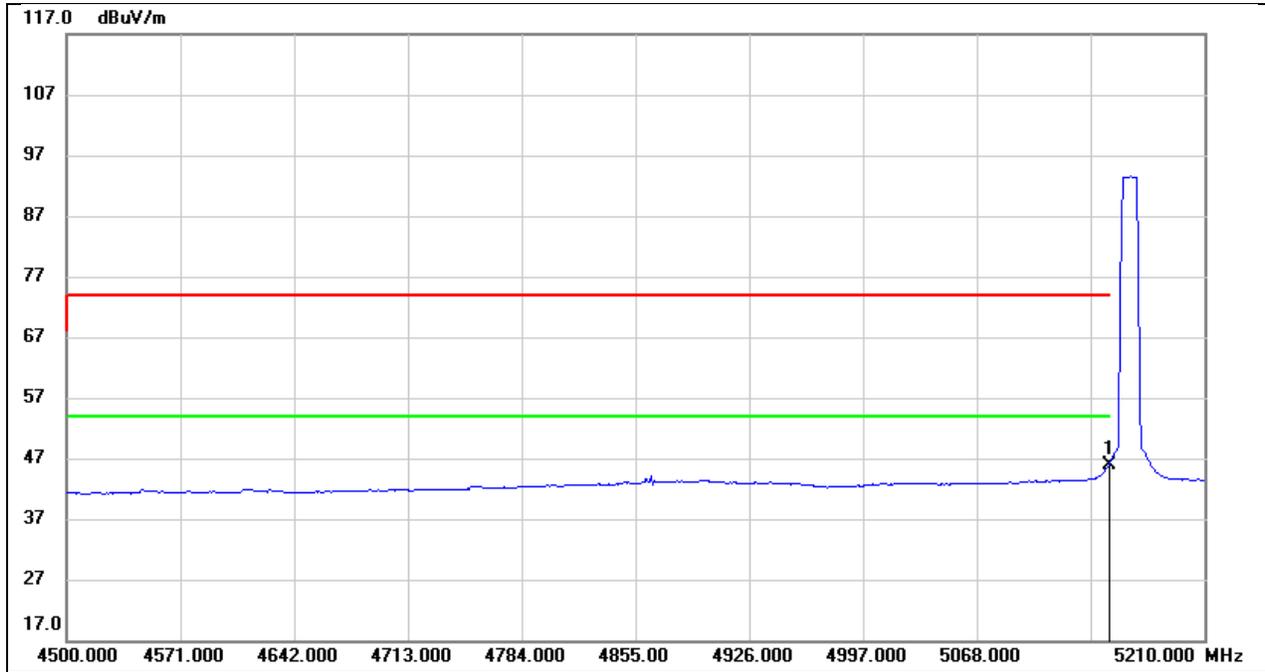


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.92	40.04	45.96	54.00	-8.04	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5166
Polarity:	Vertical	Test Voltage:	DC 7.16V

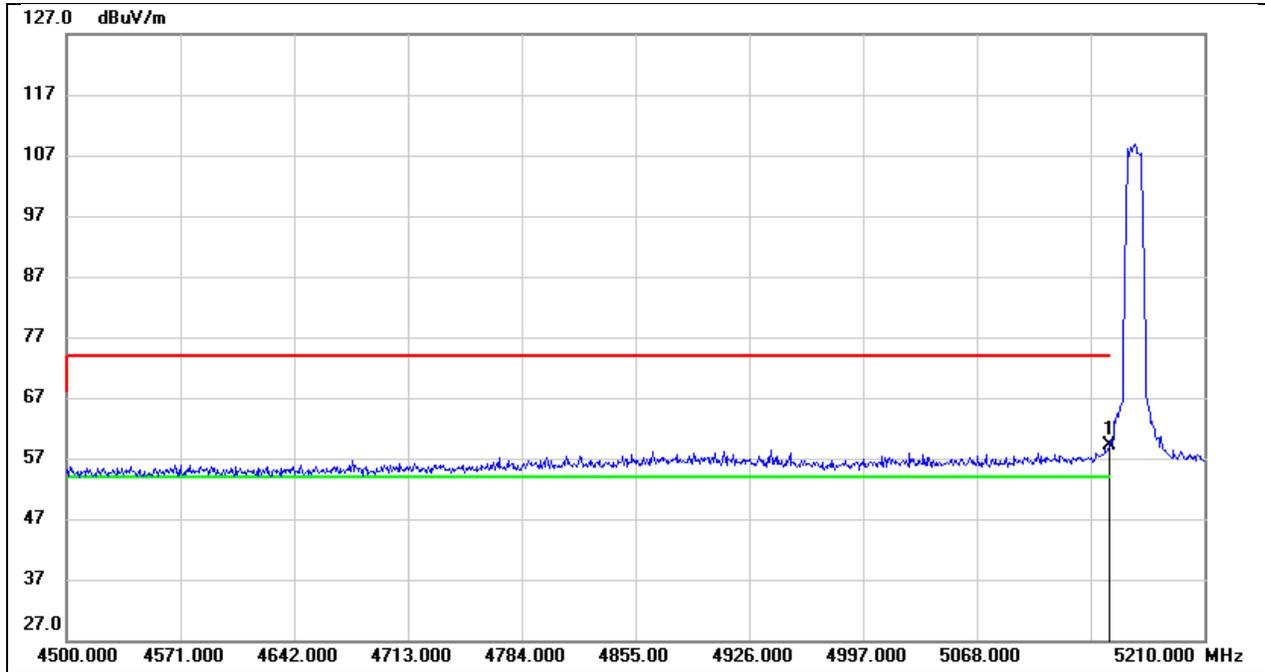


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.98	40.04	59.02	74.00	-14.98	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5166
Polarity:	Vertical	Test Voltage:	DC 7.16V

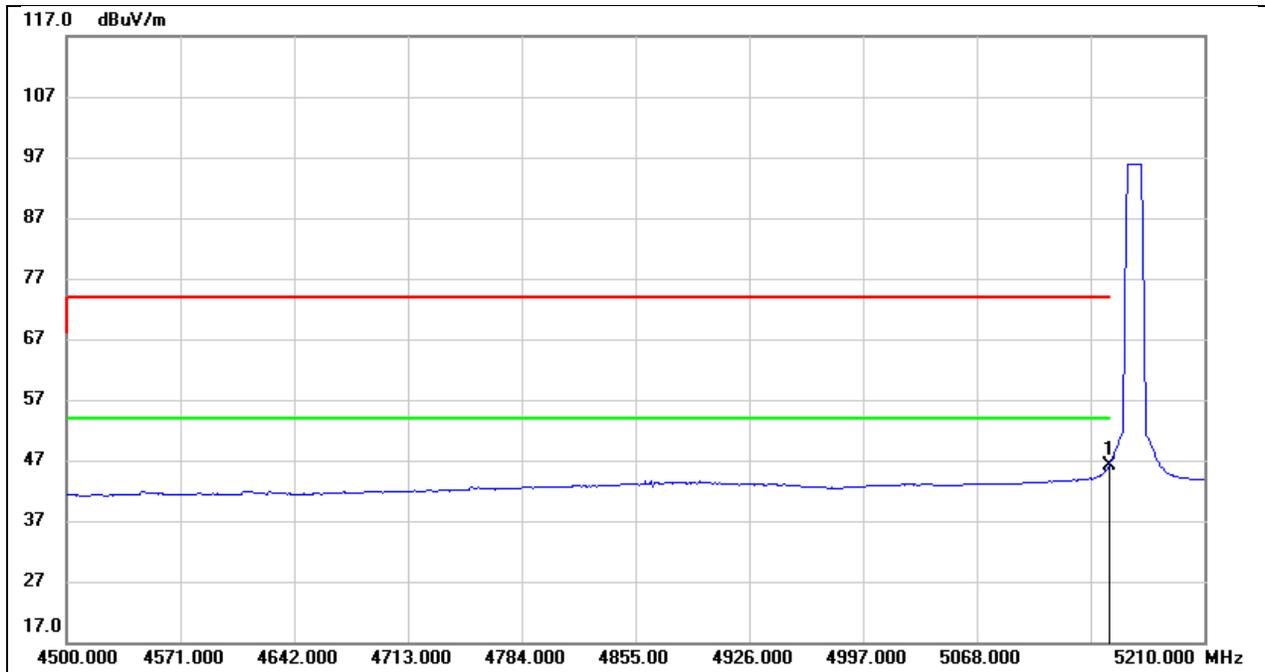


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.09	40.04	46.13	54.00	-7.87	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5167
Polarity:	Vertical	Test Voltage:	DC 7.16V

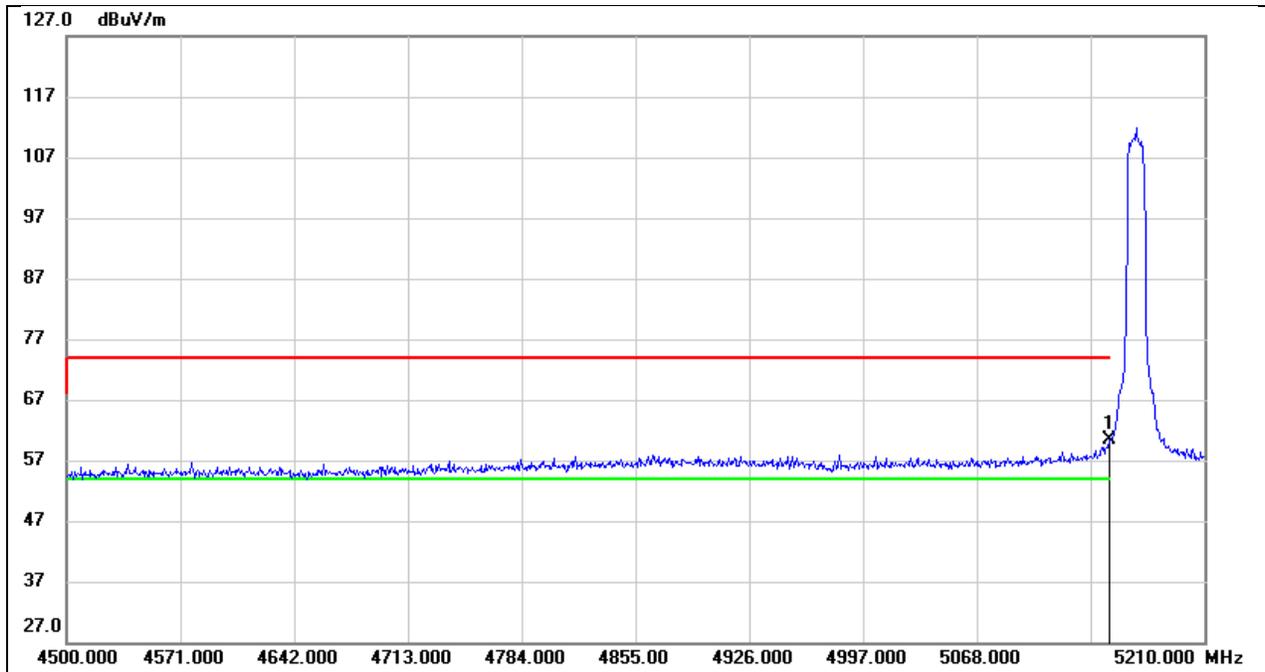


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.27	40.04	60.31	74.00	-13.69	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5167
Polarity:	Vertical	Test Voltage:	DC 7.16V

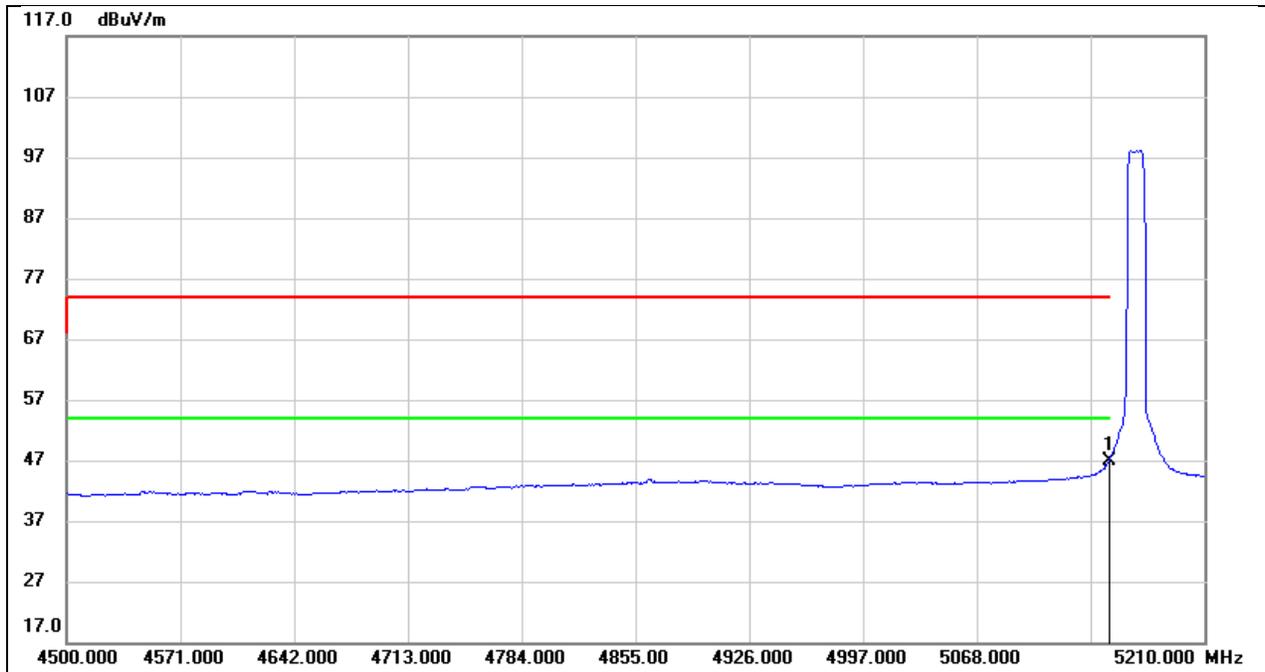


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.83	40.04	46.87	54.00	-7.13	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5169
Polarity:	Vertical	Test Voltage:	DC 7.16V

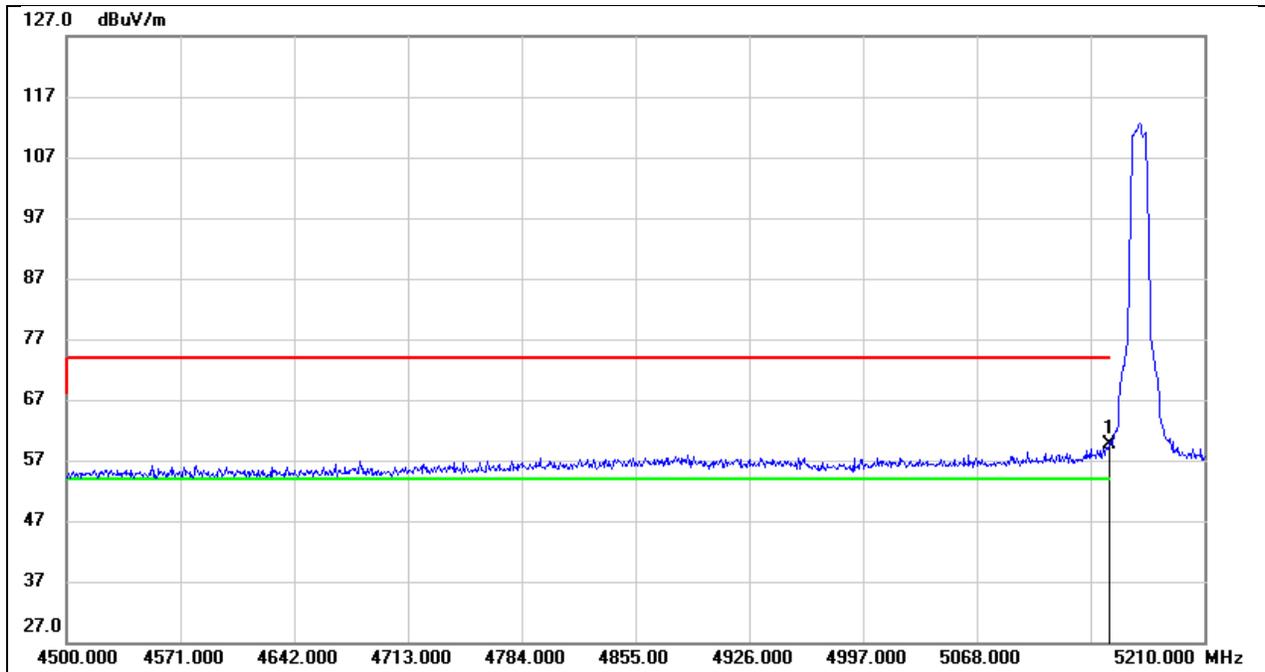


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	19.69	40.04	59.73	74.00	-14.27	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5169
Polarity:	Vertical	Test Voltage:	DC 7.16V

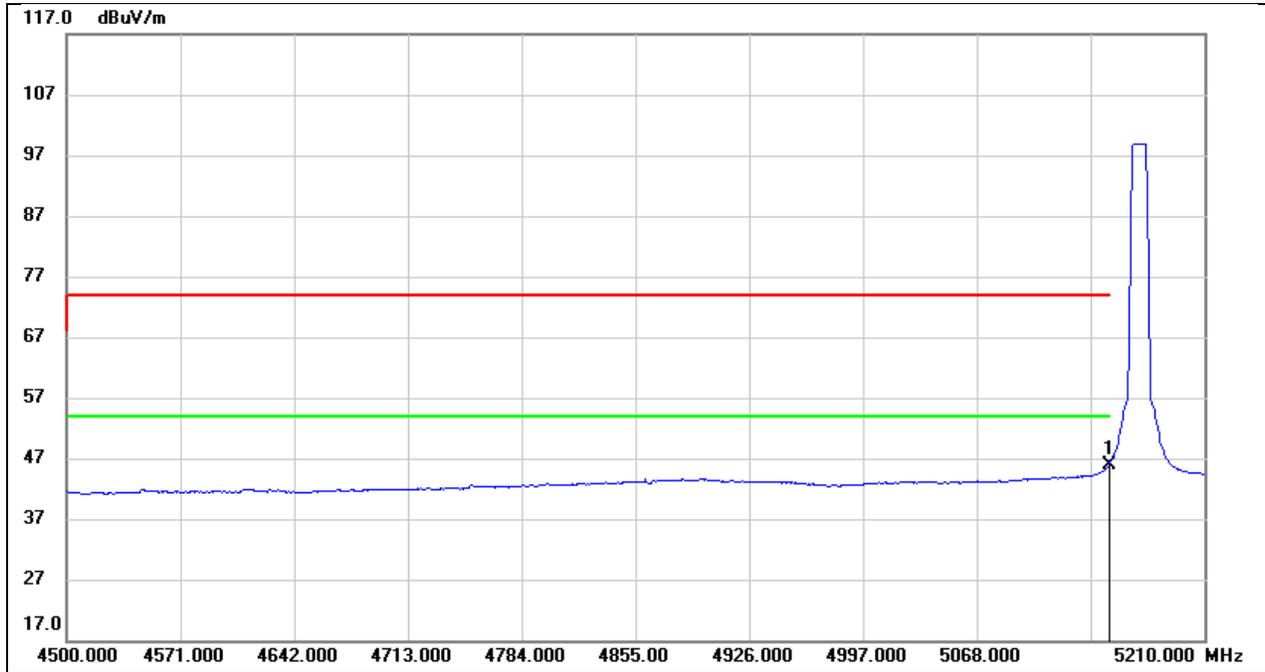


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.86	40.04	45.90	54.00	-8.10	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 7.16V

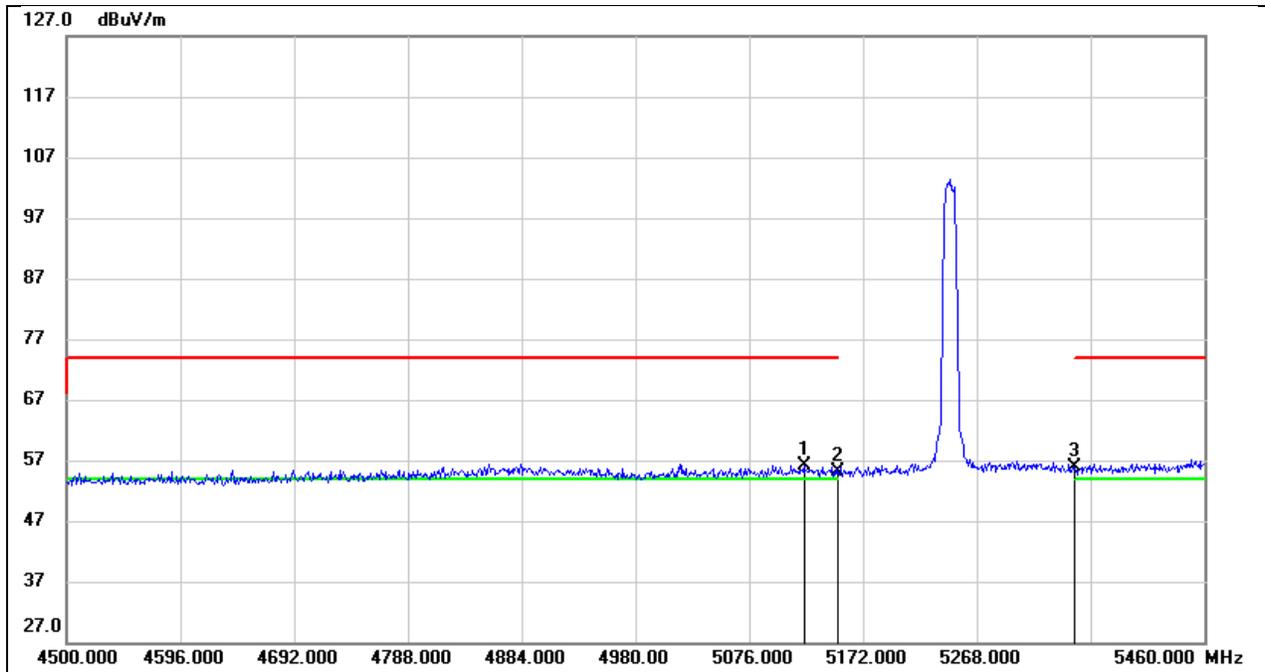


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.080	17.38	38.80	56.18	74.00	-17.82	peak
2	5150.000	16.32	38.84	55.16	74.00	-18.84	peak
3	5350.000	16.61	39.29	55.90	74.00	-18.10	peak

Test Mode:	SRD 10M AV	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 7.16V

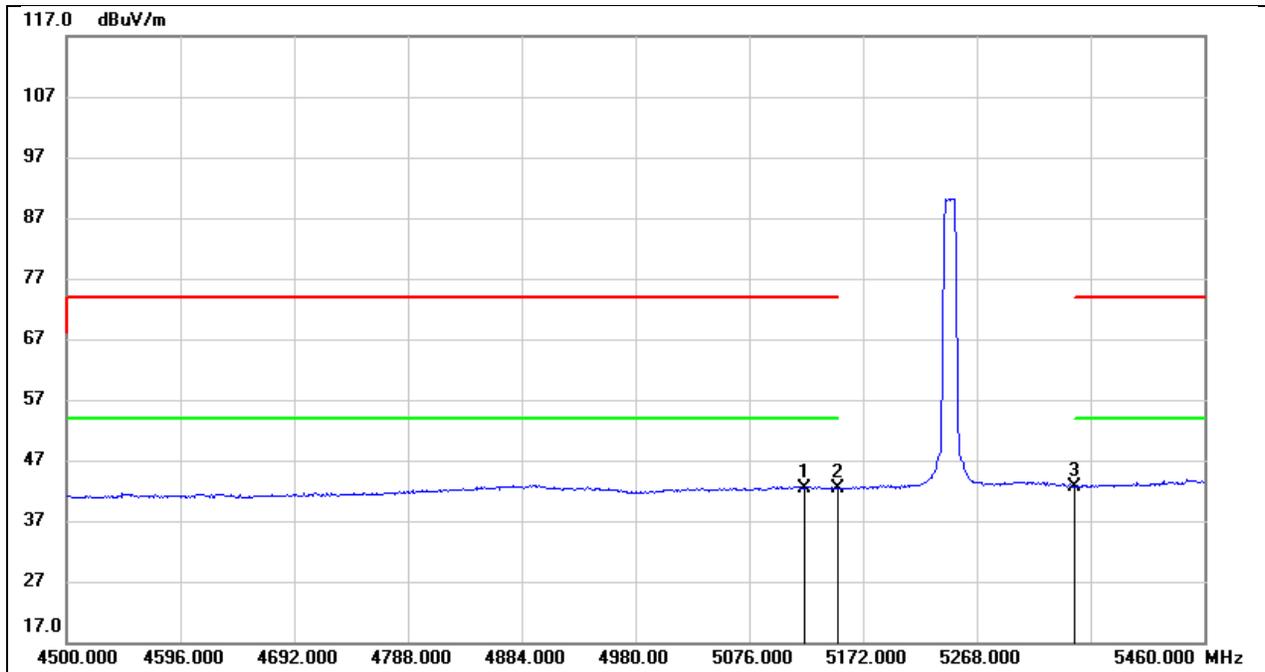


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5122.080	3.66	38.80	42.46	54.00	-11.54	AVG
2	5150.000	3.51	38.84	42.35	54.00	-11.65	AVG
3	5350.000	3.36	39.29	42.65	54.00	-11.35	AVG

Test Mode:	SRD 10M PK	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

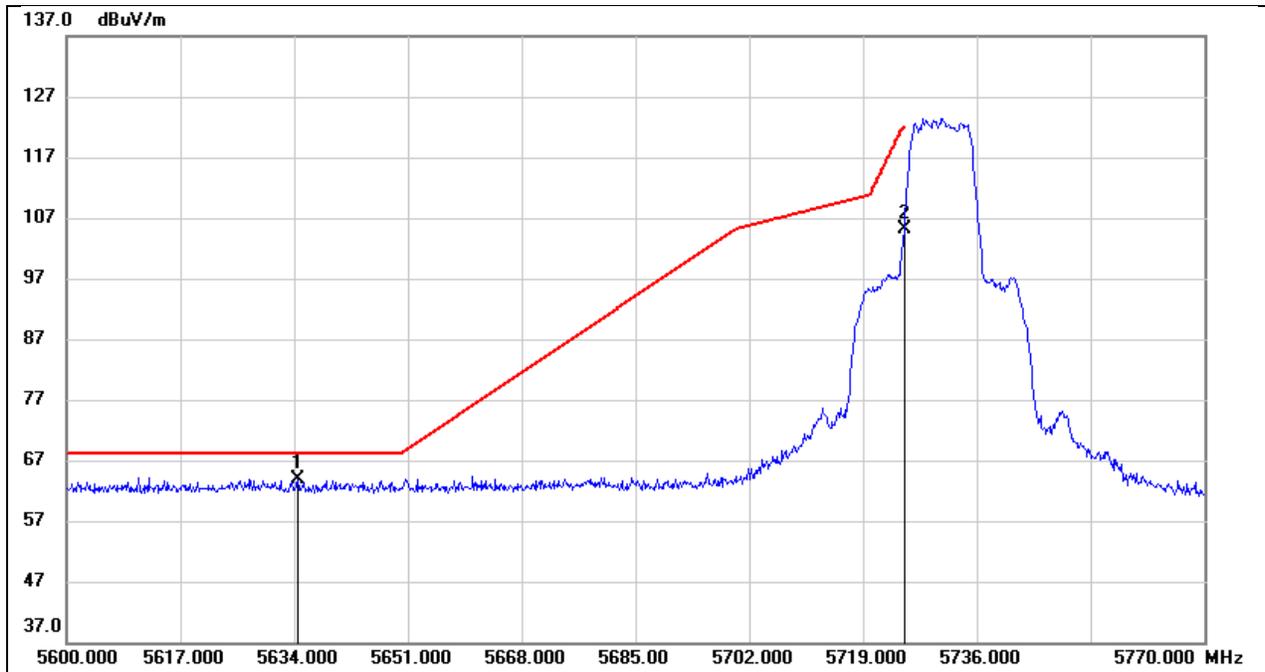


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5634.510	22.75	41.12	63.87	68.20	-4.33	peak
2	5725.000	63.97	41.20	105.17	122.20	-17.03	peak

Test Mode:	SRD 10M PK	Frequency(MHz):	5844.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

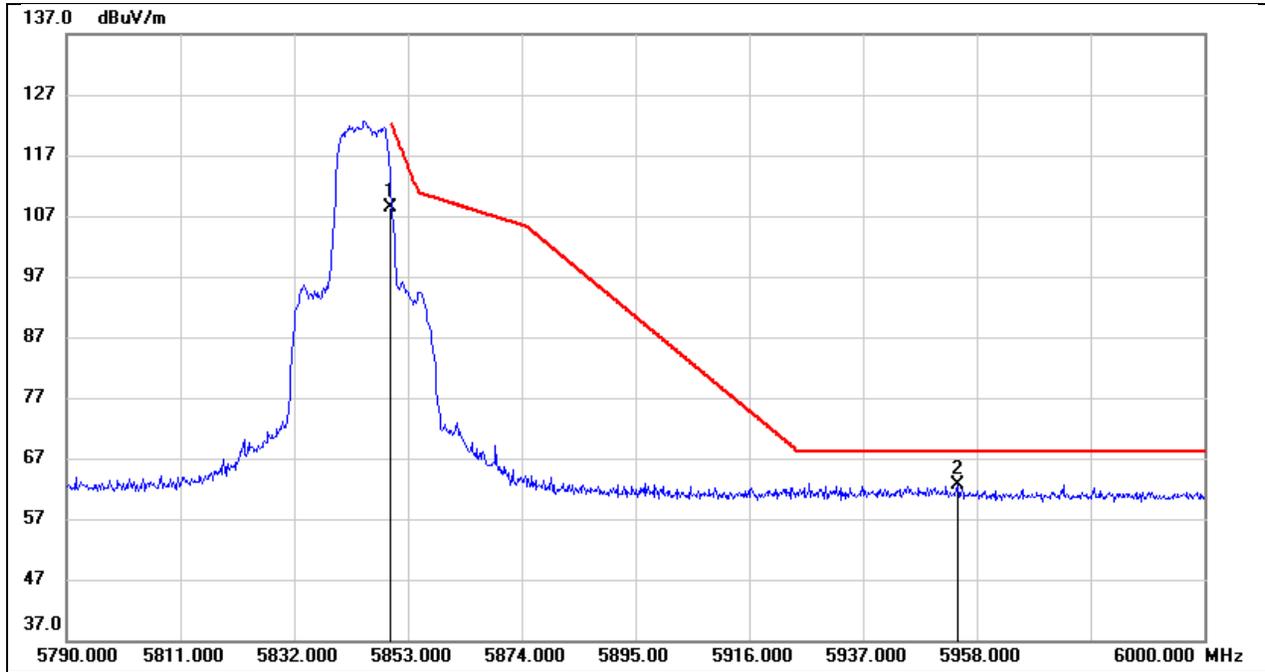


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	66.96	41.36	108.32	122.20	-13.88	peak
2	5954.430	21.02	41.57	62.59	68.20	-5.61	peak

Test Mode:	SRD 20M PK	Frequency(MHz):	5161
Polarity:	Vertical	Test Voltage:	DC 7.16V

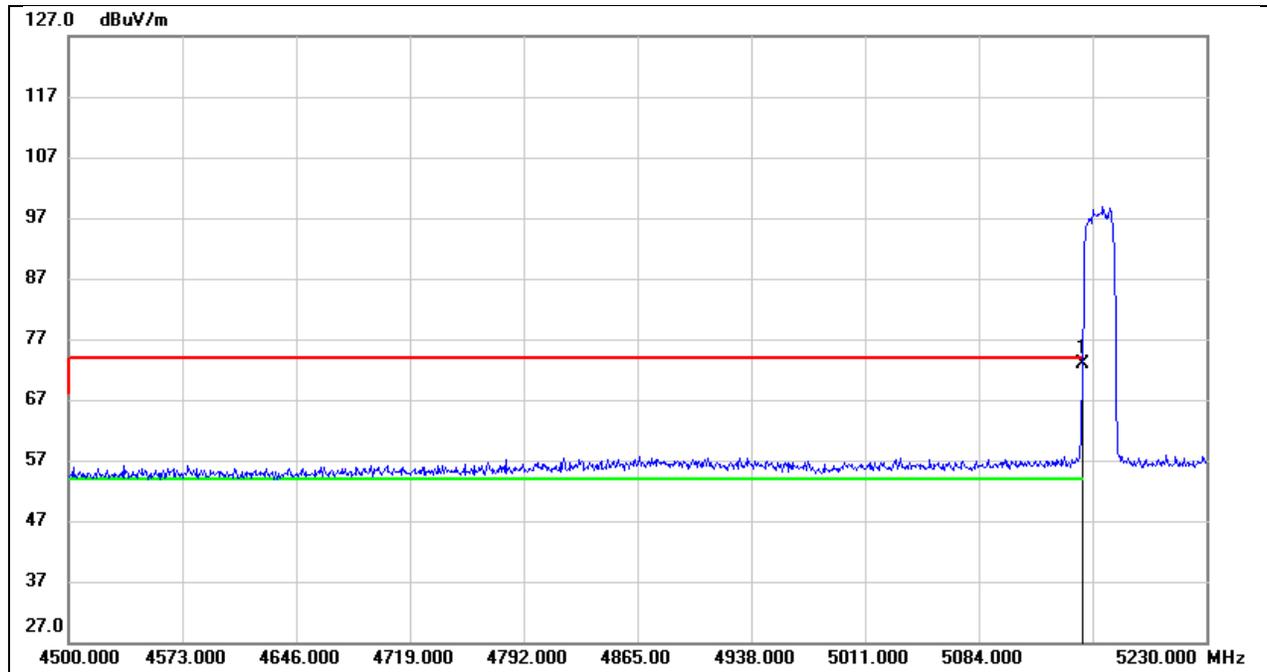


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	32.86	40.04	72.90	74.00	-1.10	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5161
Polarity:	Vertical	Test Voltage:	DC 7.16V

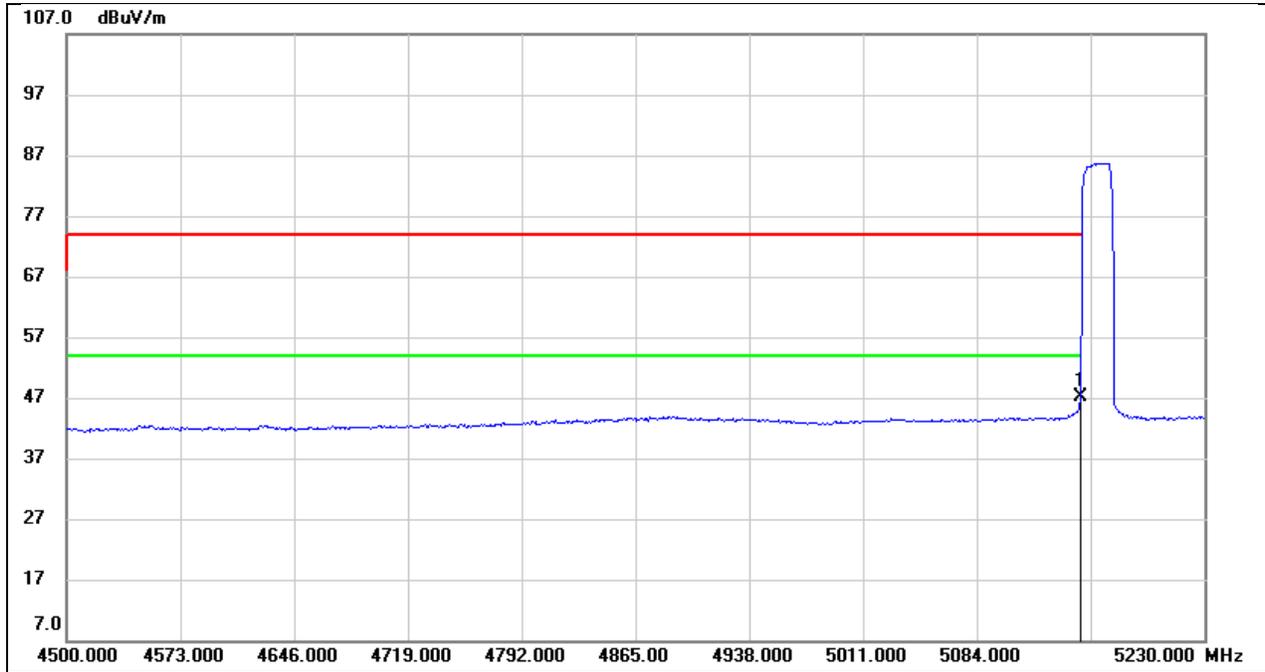


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.14	40.04	47.18	54.00	-6.82	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5162
Polarity:	Vertical	Test Voltage:	DC 7.16V

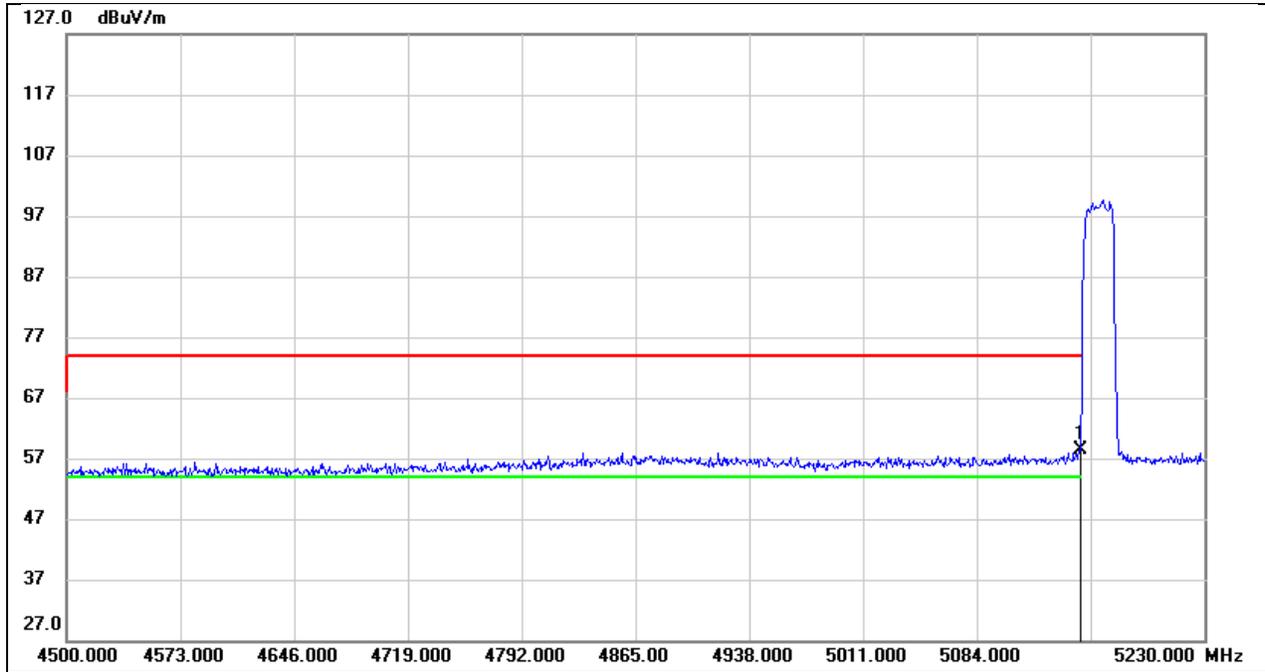


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.31	40.04	58.35	74.00	-15.65	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5162
Polarity:	Vertical	Test Voltage:	DC 7.16V

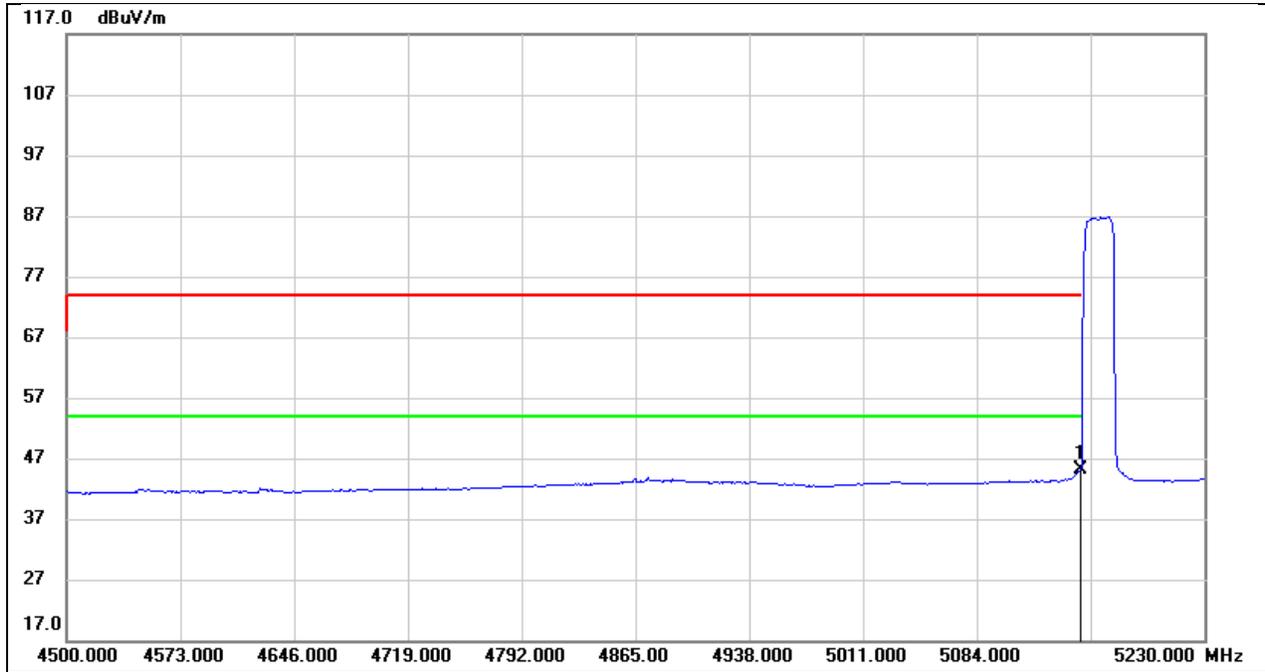


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.16	40.04	45.20	54.00	-8.80	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5167
Polarity:	Vertical	Test Voltage:	DC 7.16V

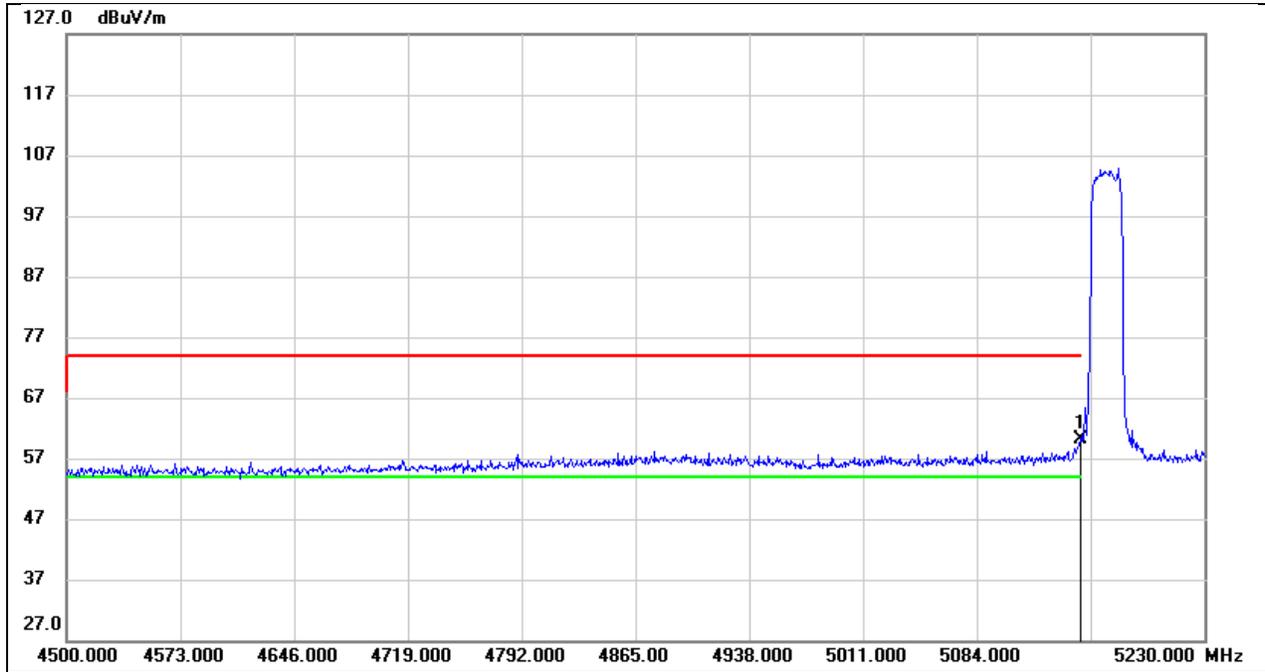


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.16	40.04	60.20	74.00	-13.80	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5167
Polarity:	Vertical	Test Voltage:	DC 7.16V

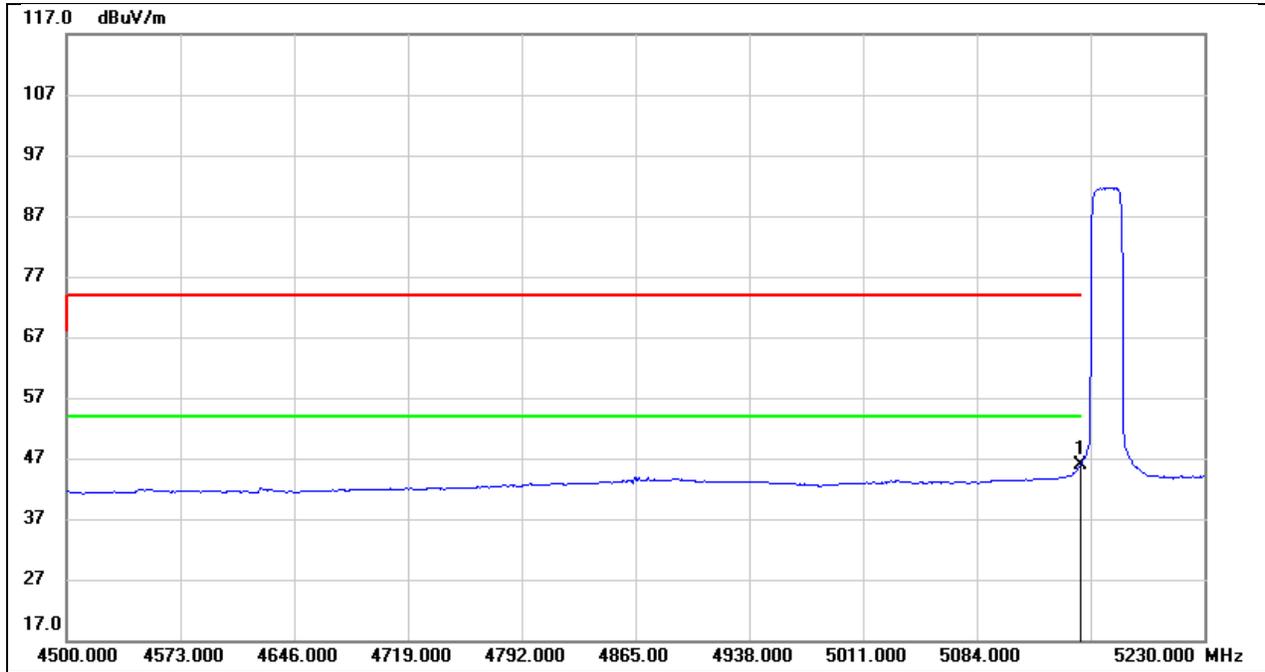


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.94	40.04	45.98	54.00	-8.02	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5169
Polarity:	Vertical	Test Voltage:	DC 7.16V

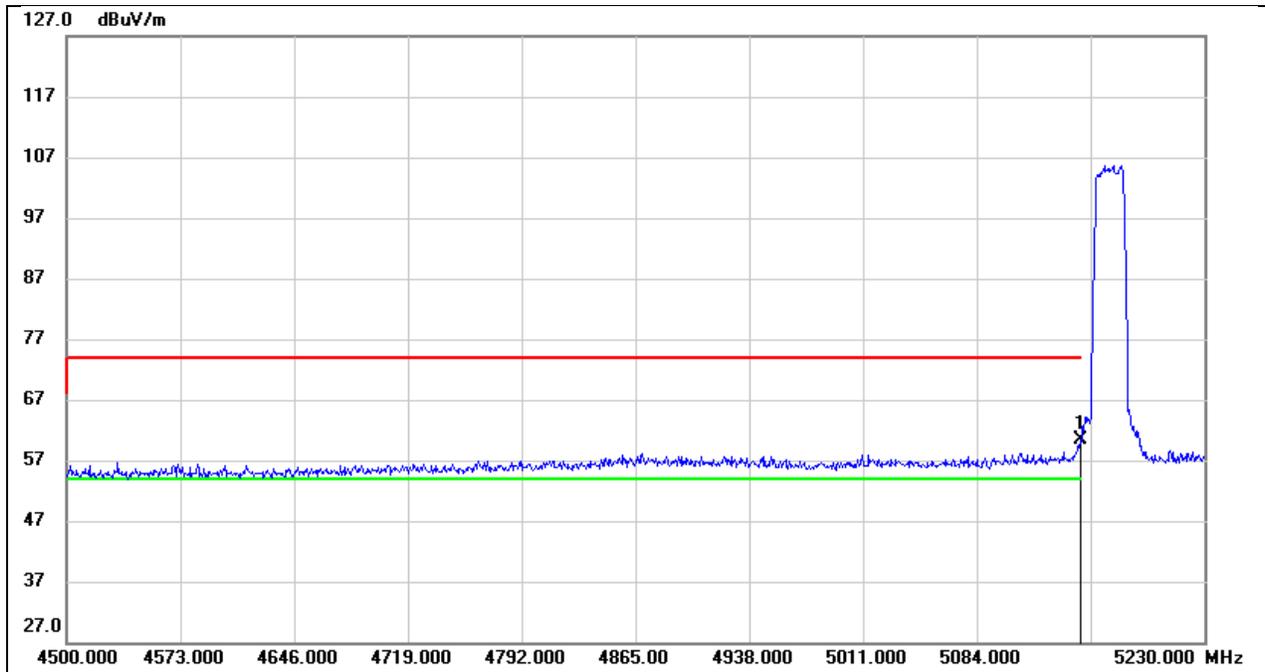


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.23	40.04	60.27	74.00	-13.73	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5169
Polarity:	Vertical	Test Voltage:	DC 7.16V

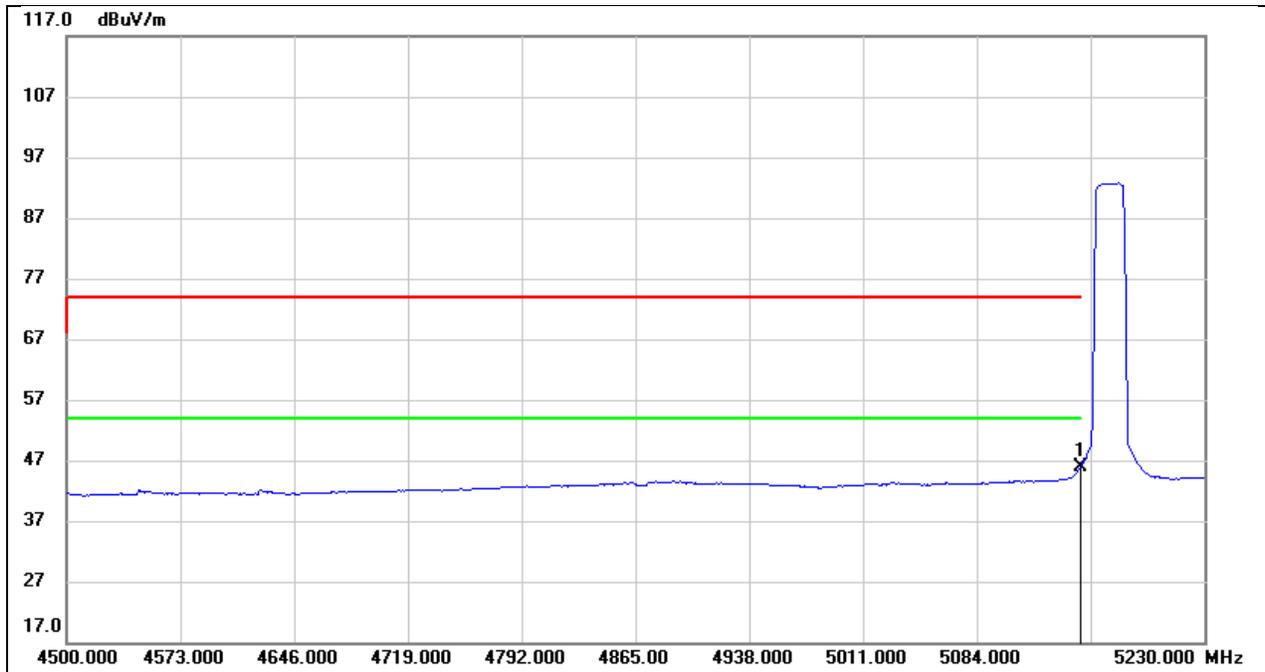


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.84	40.04	45.88	54.00	-8.12	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5171
Polarity:	Vertical	Test Voltage:	DC 7.16V

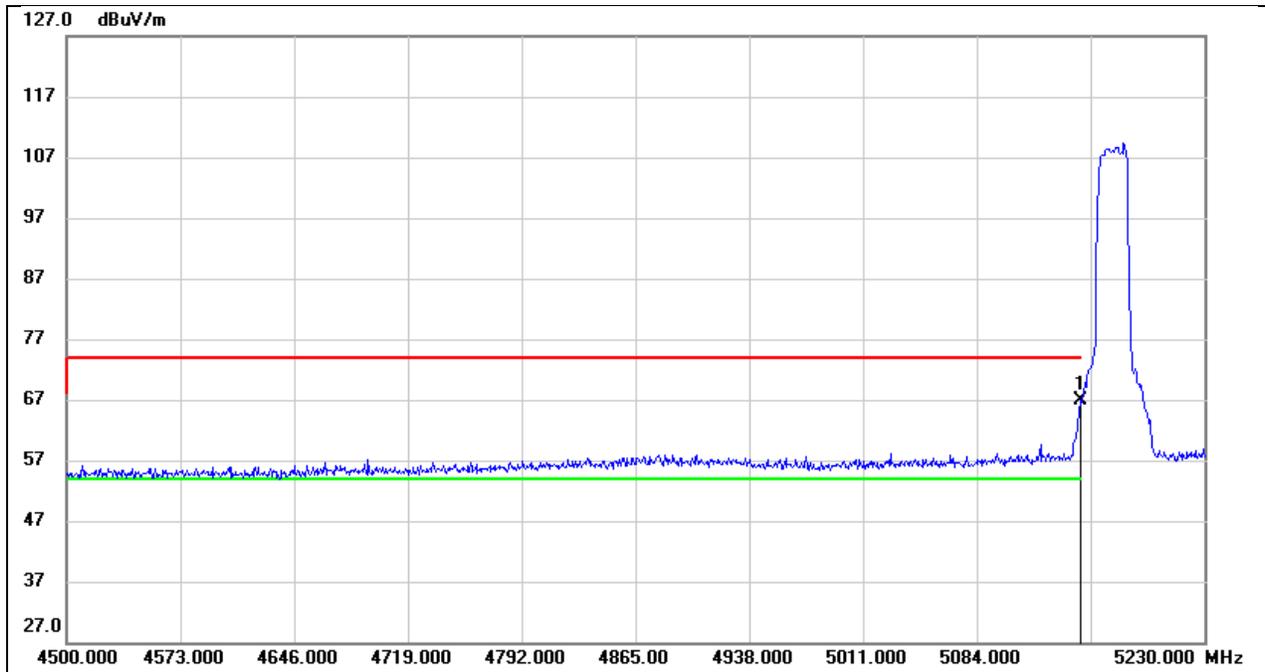


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.75	40.04	66.79	74.00	-7.21	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5171
Polarity:	Vertical	Test Voltage:	DC 7.16V

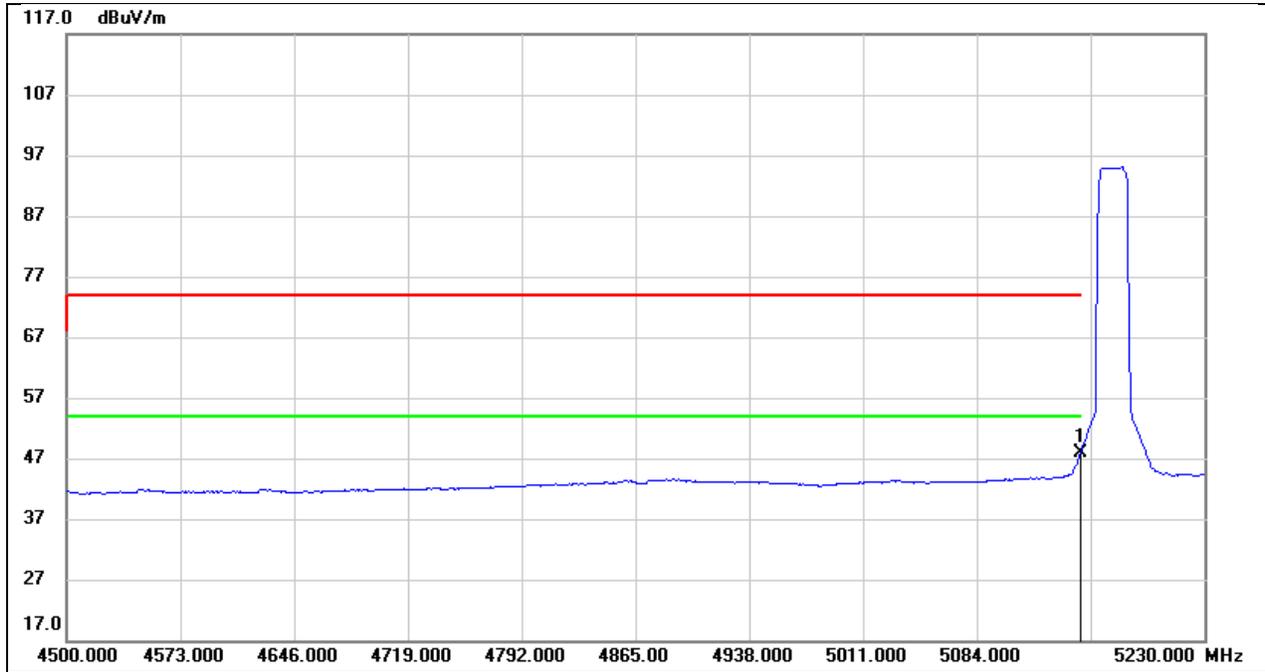


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.81	40.04	47.85	54.00	-6.15	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 7.16V

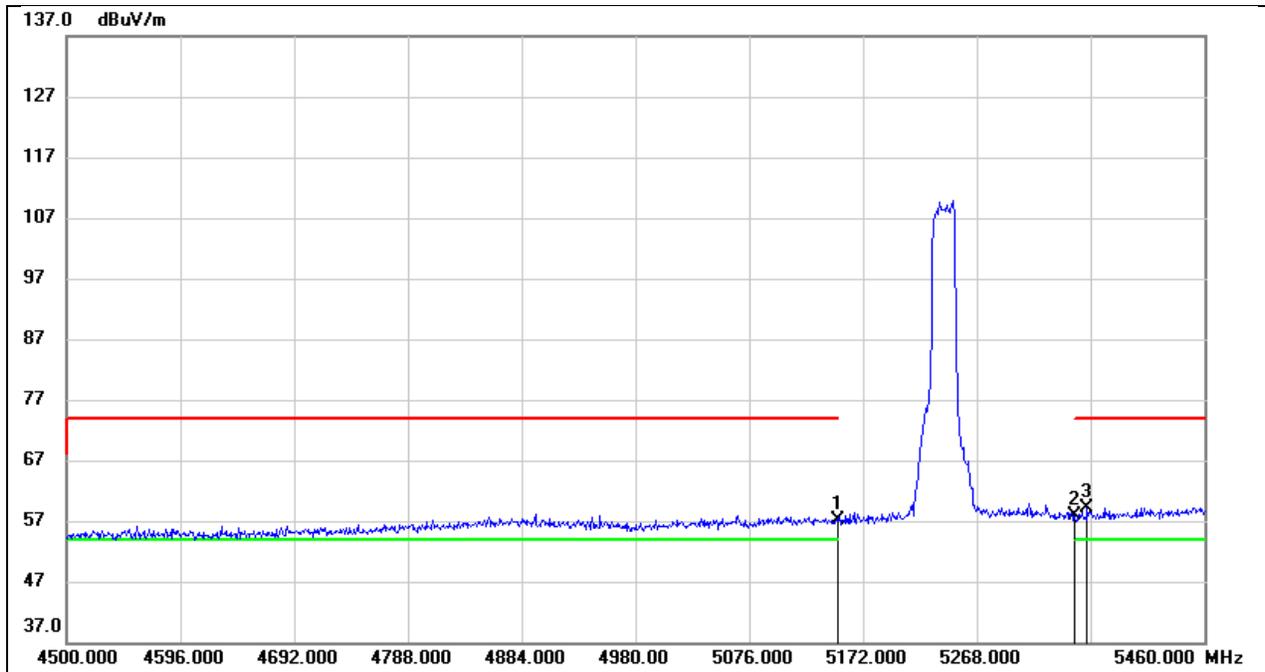


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	17.12	40.04	57.16	74.00	-16.84	peak
2	5350.000	17.39	40.49	57.88	74.00	-16.12	peak
3	5361.120	18.72	40.52	59.24	74.00	-14.76	peak

Test Mode:	SRD 20M AV	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 7.16V

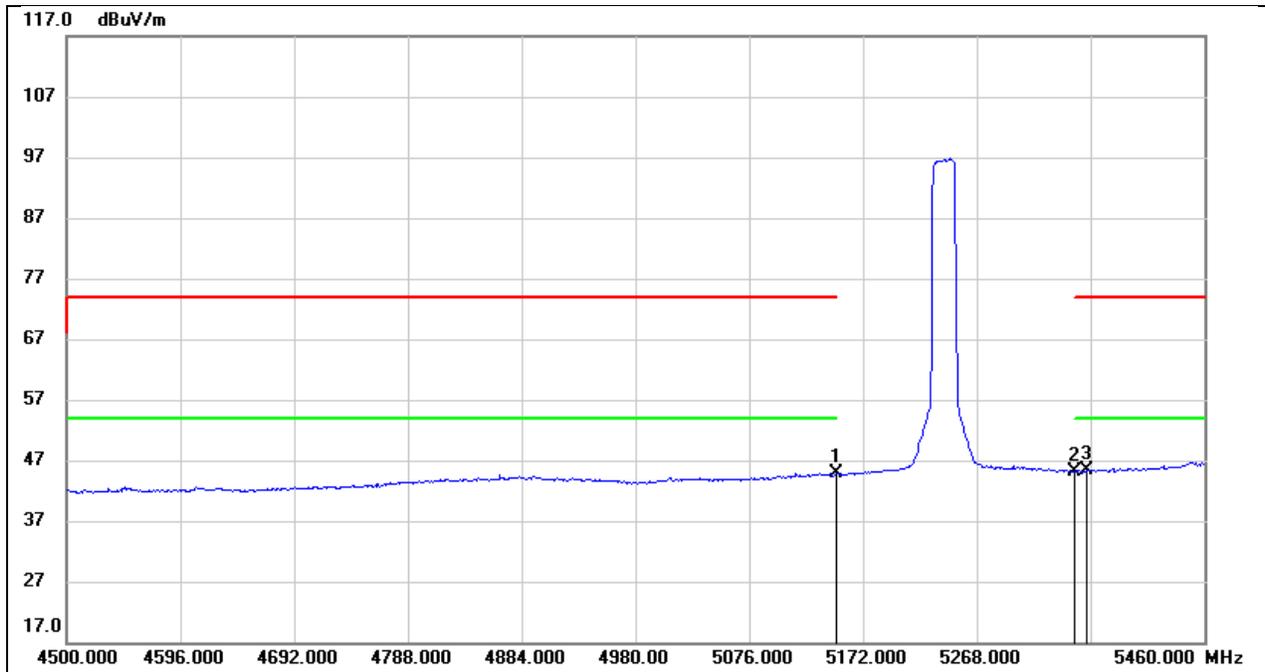


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	4.75	40.04	44.79	54.00	-9.21	AVG
2	5350.000	4.70	40.49	45.19	54.00	-8.81	AVG
3	5361.120	4.95	40.52	45.47	54.00	-8.53	AVG

Test Mode:	SRD 20M PK	Frequency(MHz):	5735.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

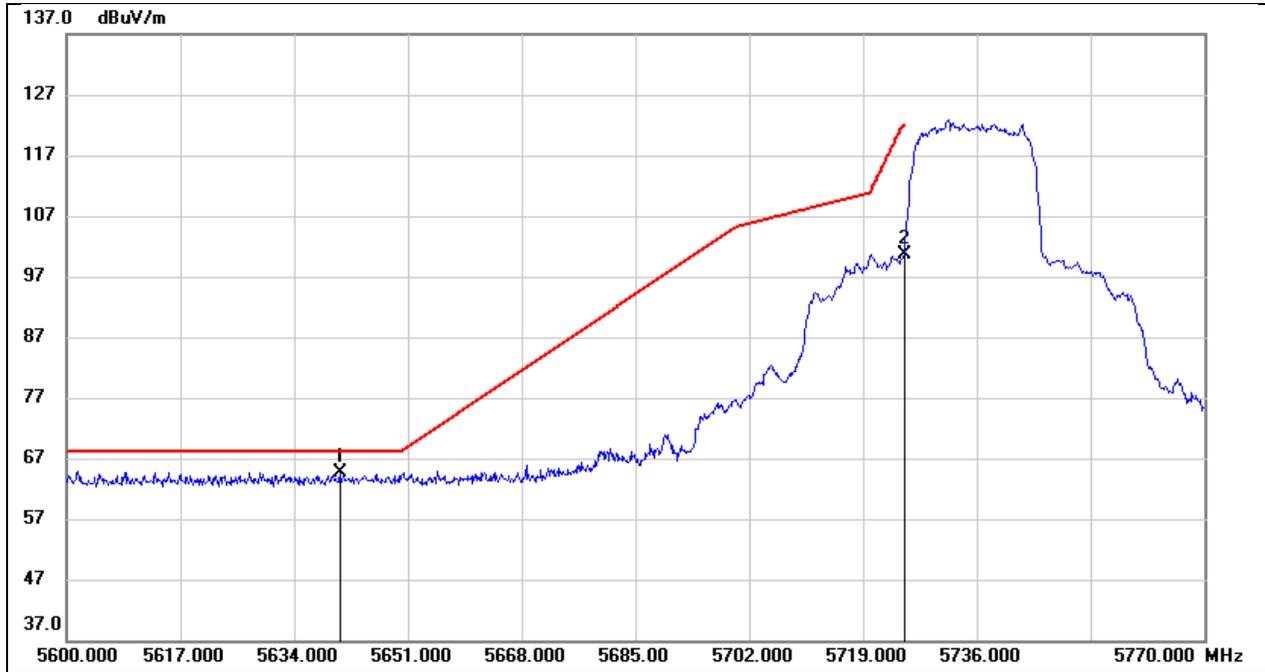


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5640.800	23.53	41.13	64.66	68.20	-3.54	peak
2	5725.000	59.37	41.20	100.57	122.20	-21.63	peak

Test Mode:	SRD 20M PK	Frequency(MHz):	5839.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

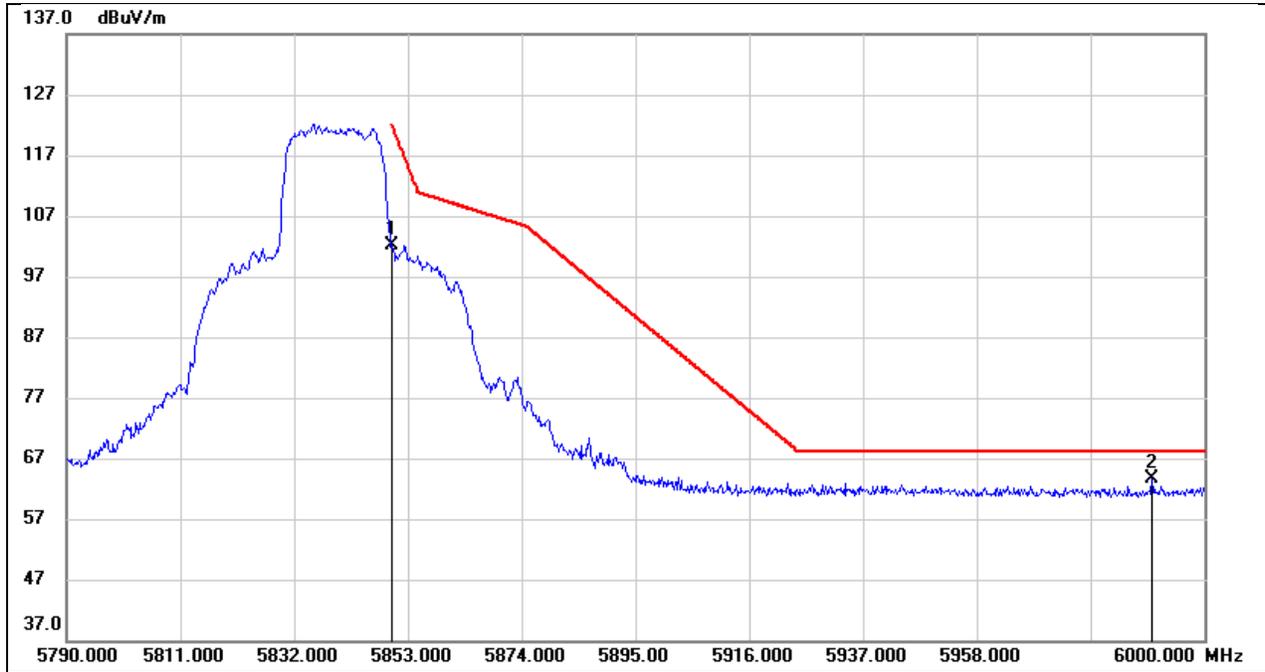


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	60.65	41.36	102.01	122.20	-20.19	peak
2	5990.340	22.12	41.63	63.75	68.20	-4.45	peak

Test Mode:	SRD 40M PK	Frequency(MHz):	5170
Polarity:	Vertical	Test Voltage:	DC 7.16V

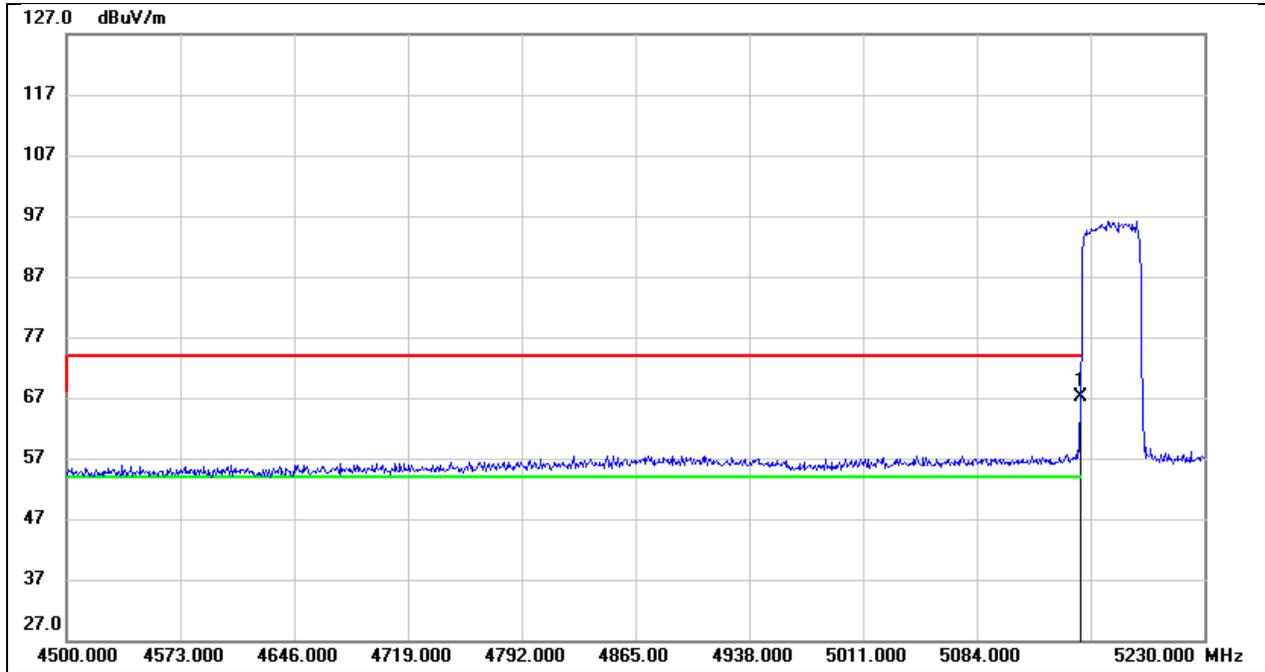


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.99	40.04	67.03	74.00	-6.97	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5170
Polarity:	Vertical	Test Voltage:	DC 7.16V

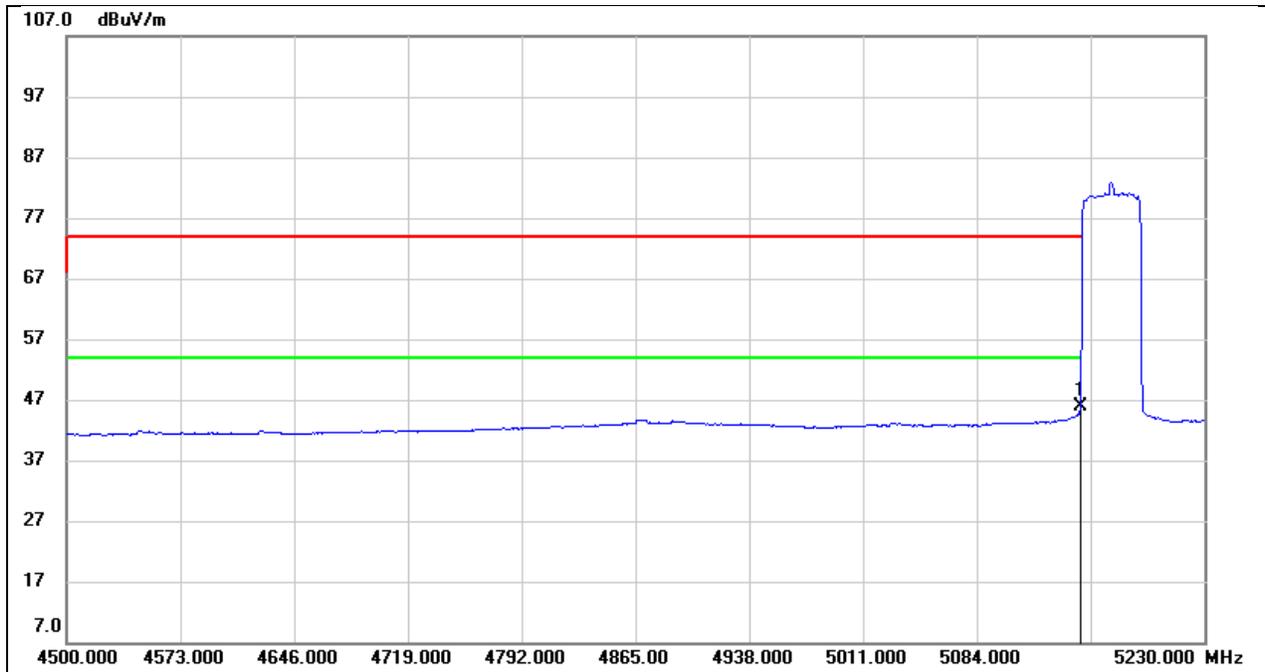


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	5.77	40.04	45.81	54.00	-8.19	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5171
Polarity:	Vertical	Test Voltage:	DC 7.16V

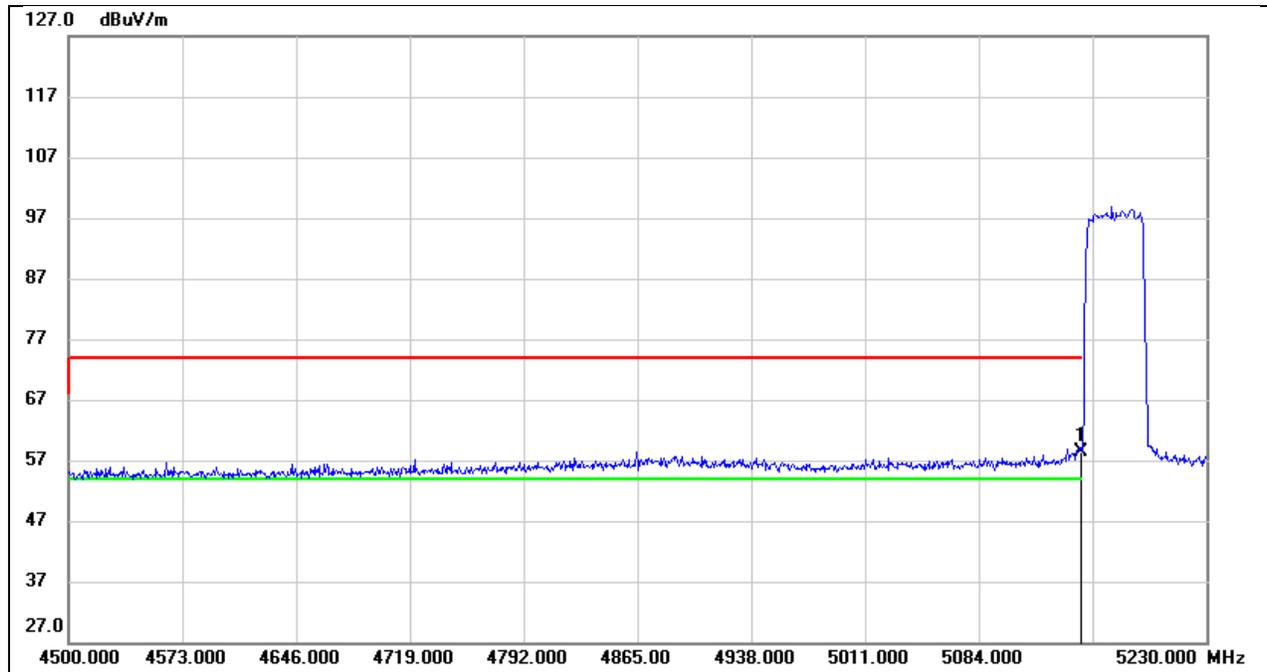


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	18.41	40.04	58.45	74.00	-15.55	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5171
Polarity:	Vertical	Test Voltage:	DC 7.16V

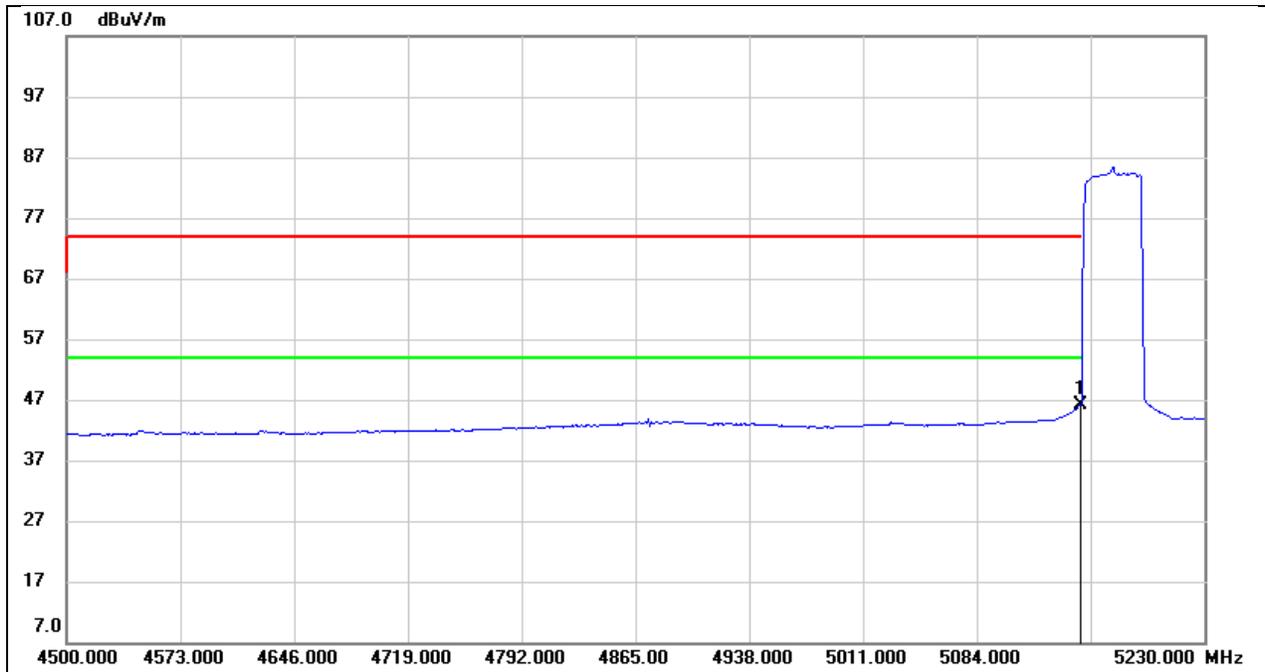


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.09	40.04	46.13	54.00	-7.87	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5173
Polarity:	Vertical	Test Voltage:	DC 7.16V

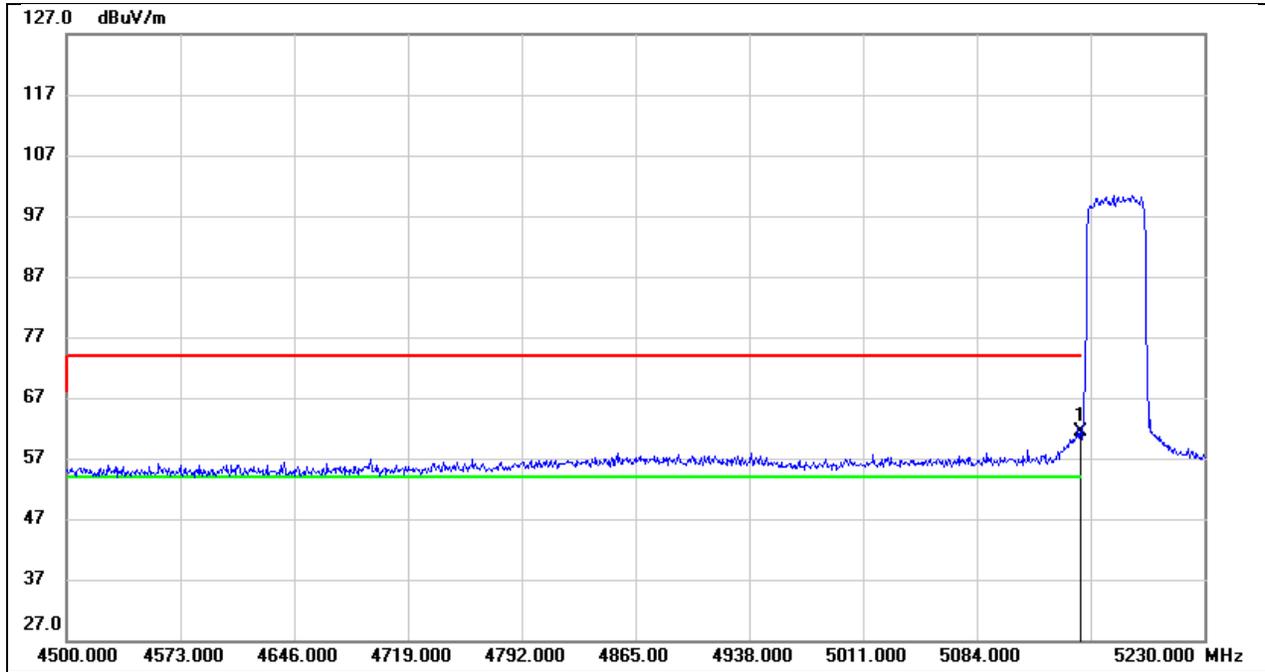


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	21.46	40.04	61.50	74.00	-12.50	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5173
Polarity:	Vertical	Test Voltage:	DC 7.16V

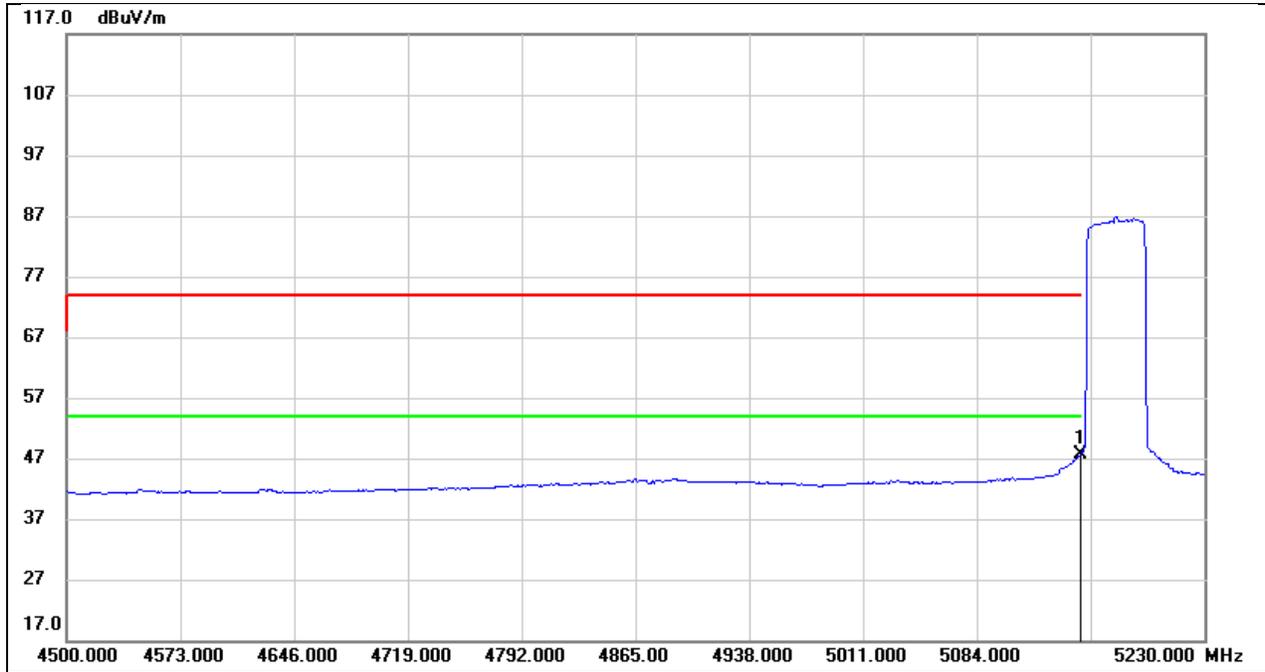


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	7.69	40.04	47.73	54.00	-6.27	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5177
Polarity:	Vertical	Test Voltage:	DC 7.16V

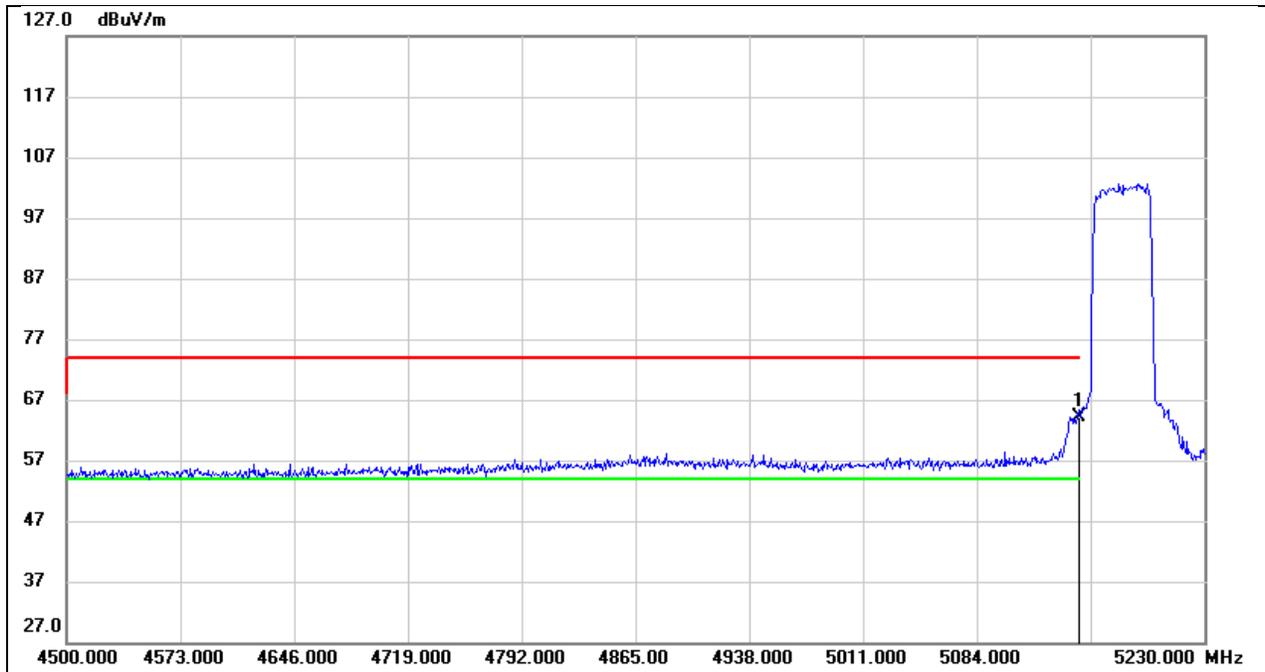


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	24.01	40.04	64.05	74.00	-9.95	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5177
Polarity:	Vertical	Test Voltage:	DC 7.16V

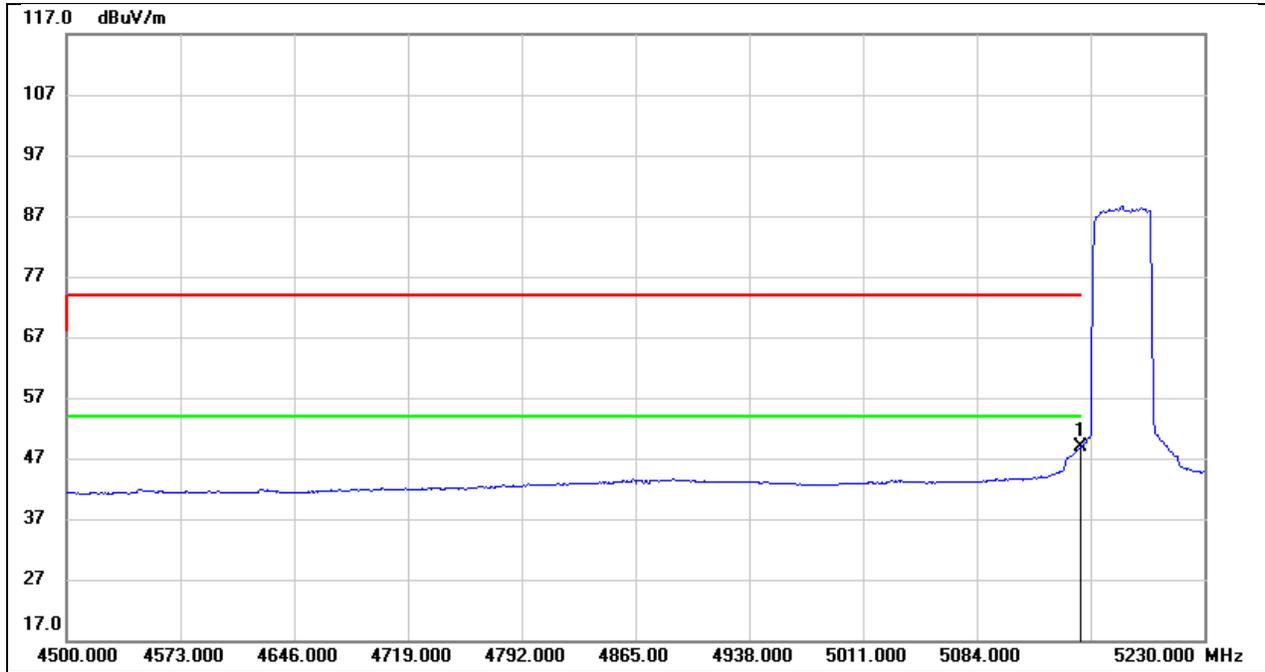


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	8.86	40.04	48.90	54.00	-5.10	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5187
Polarity:	Vertical	Test Voltage:	DC 7.16V

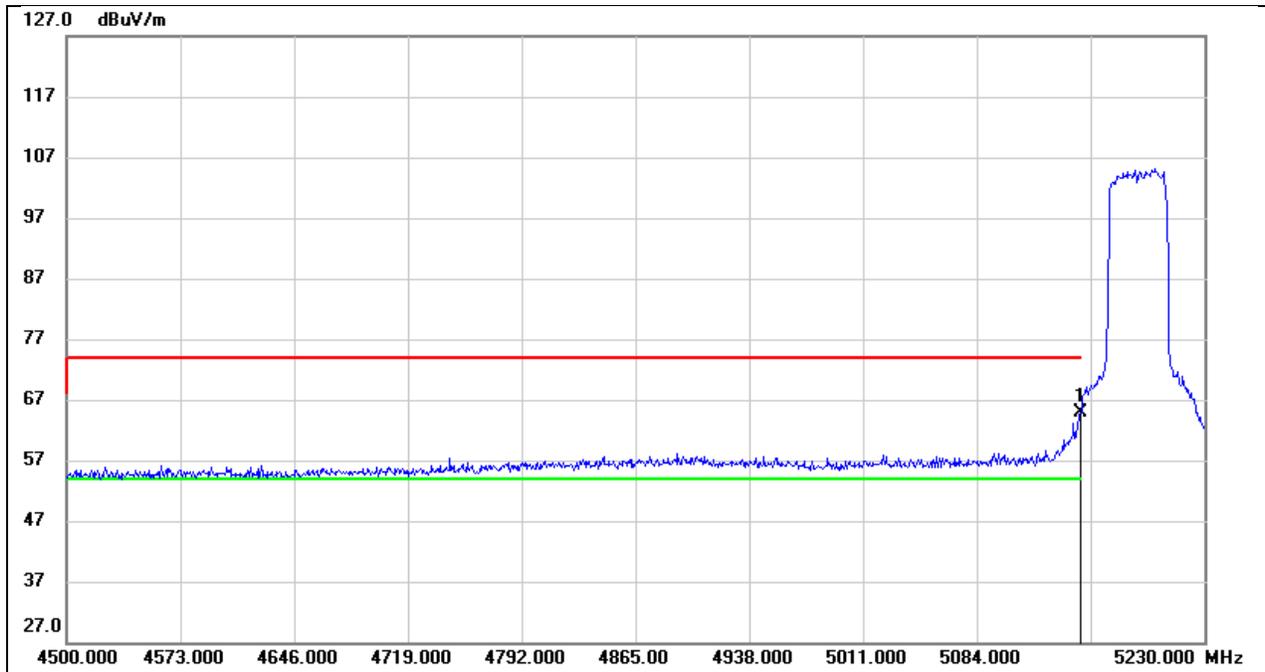


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	24.92	40.04	64.96	74.00	-9.04	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5187
Polarity:	Vertical	Test Voltage:	DC 7.16V

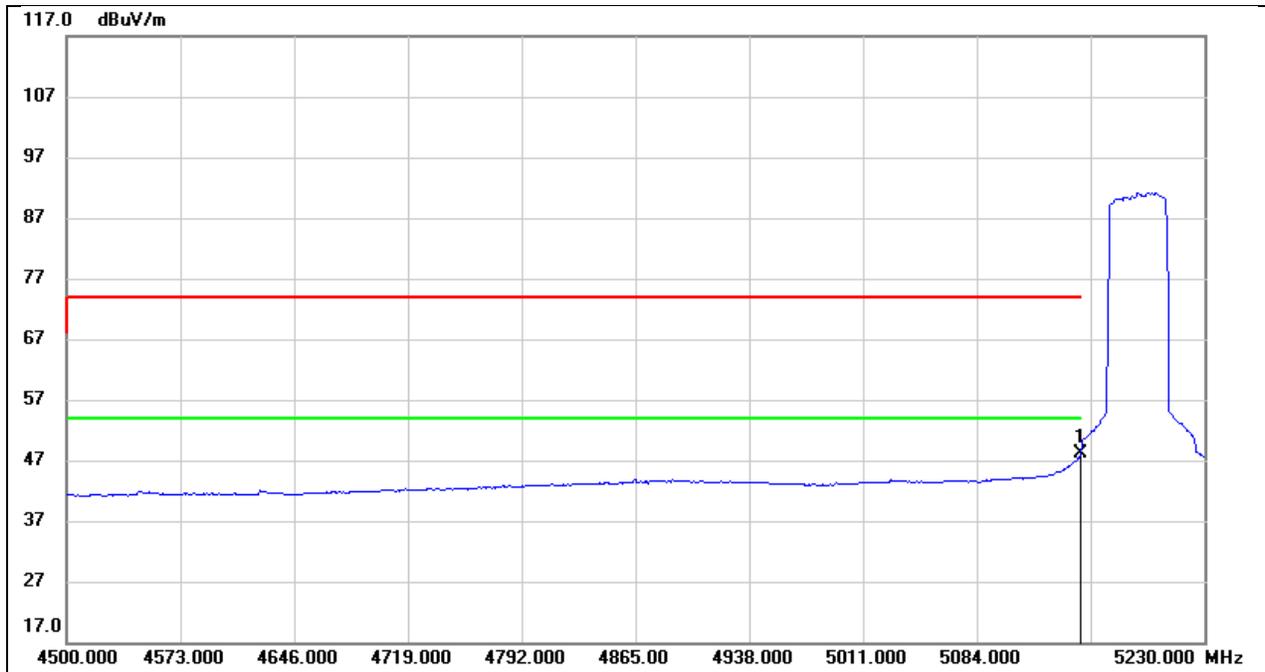


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	8.04	40.04	48.08	54.00	-5.92	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 7.16V

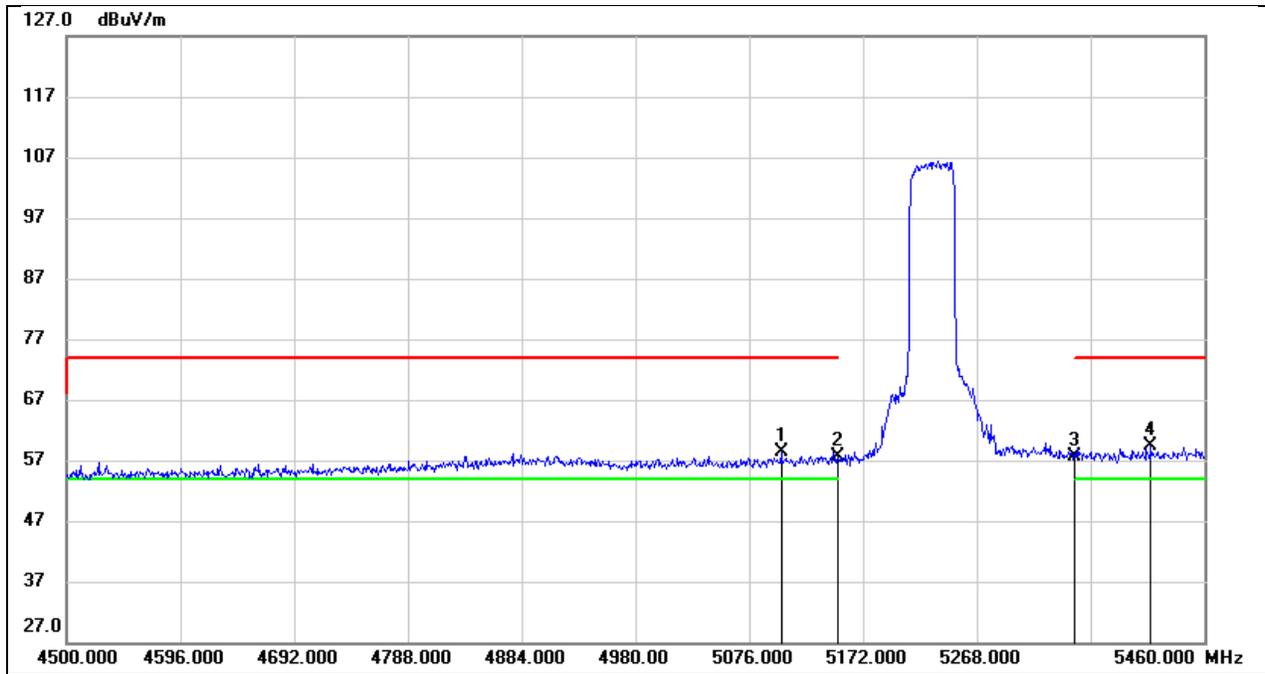


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.880	18.48	39.96	58.44	74.00	-15.56	peak
2	5150.000	17.59	40.04	57.63	74.00	-16.37	peak
3	5350.000	17.21	40.49	57.70	74.00	-16.30	peak
4	5414.880	18.69	40.66	59.35	74.00	-14.65	peak

Test Mode:	SRD 40M AV	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 7.16V

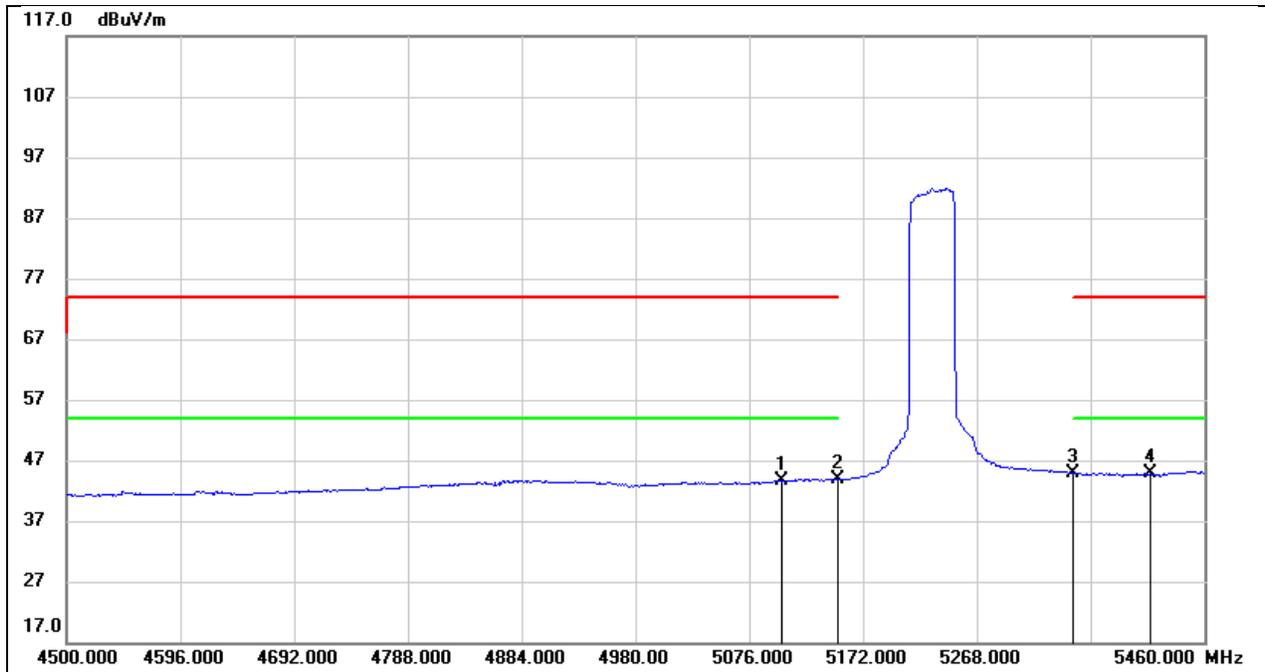


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5102.880	3.64	39.96	43.60	54.00	-10.40	AVG
2	5150.000	3.87	40.04	43.91	54.00	-10.09	AVG
3	5350.000	4.44	40.49	44.93	54.00	-9.07	AVG
4	5414.880	4.10	40.66	44.76	54.00	-9.24	AVG

Test Mode:	SRD 40M PK	Frequency(MHz):	5745.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

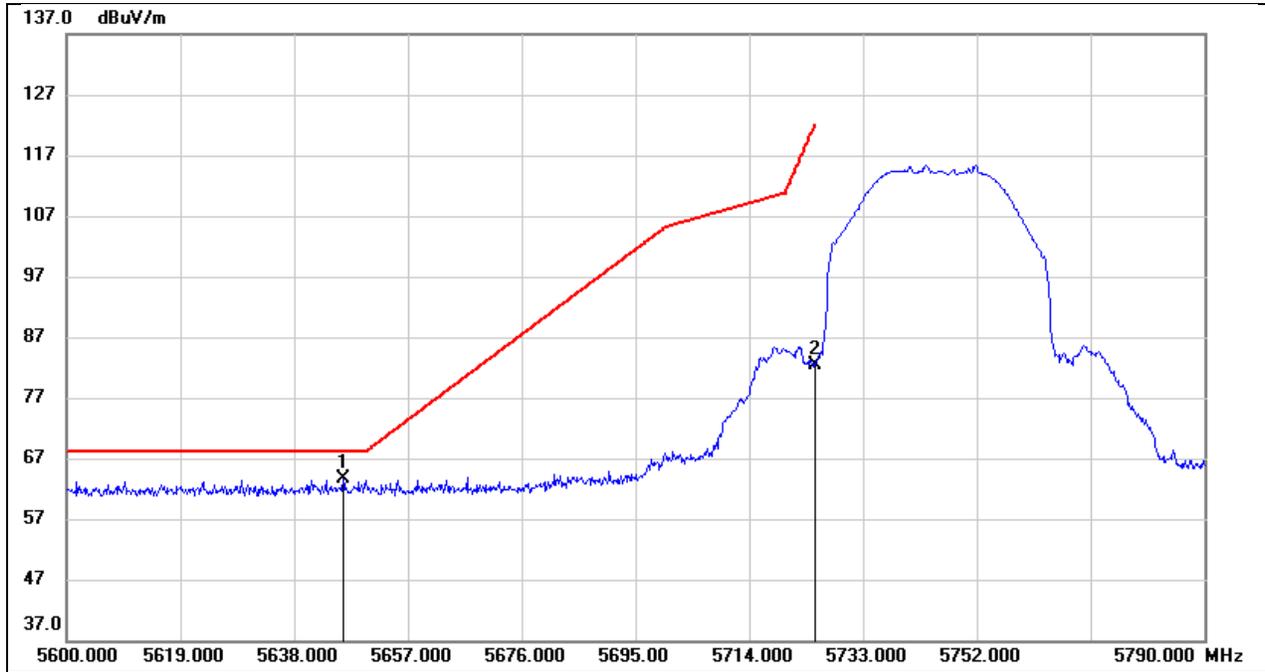


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5646.170	22.48	41.13	63.61	68.20	-4.59	peak
2	5725.000	41.17	41.20	82.37	122.20	-39.83	peak

Test Mode:	SRD 40M PK	Frequency(MHz):	5829.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

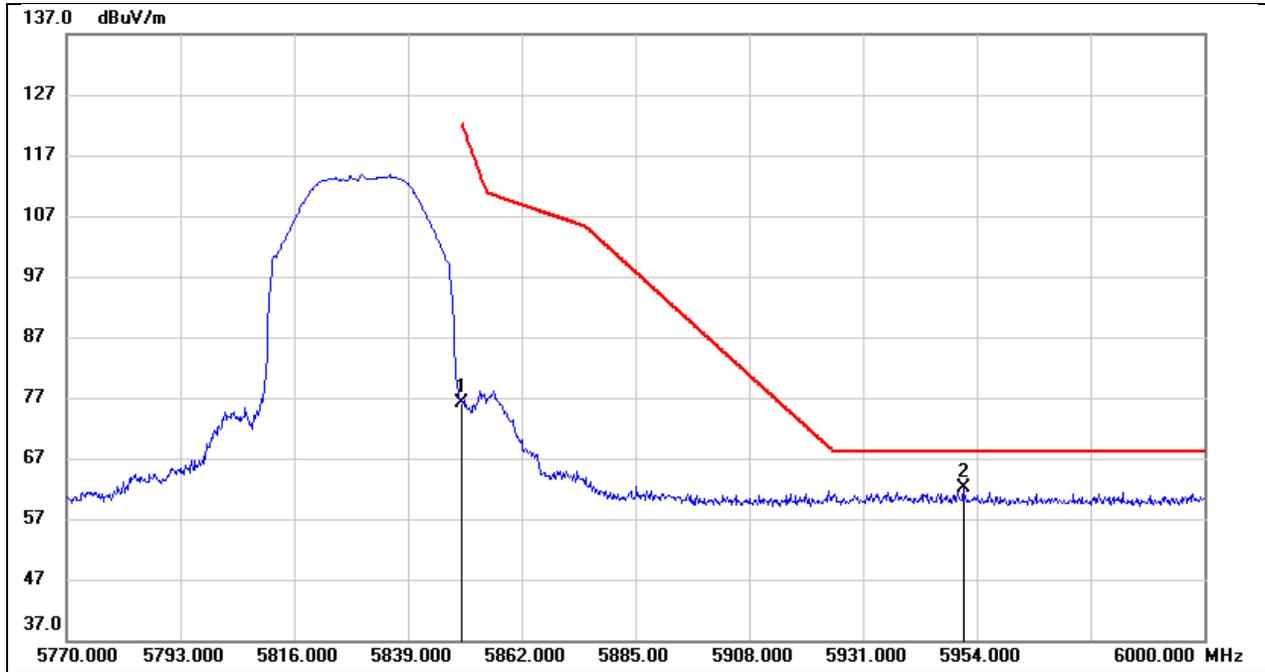


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	34.84	41.36	76.20	122.20	-46.00	peak
2	5951.240	20.64	41.55	62.19	68.20	-6.01	peak

Test Mode:	SRD 60M PK	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 7.16V

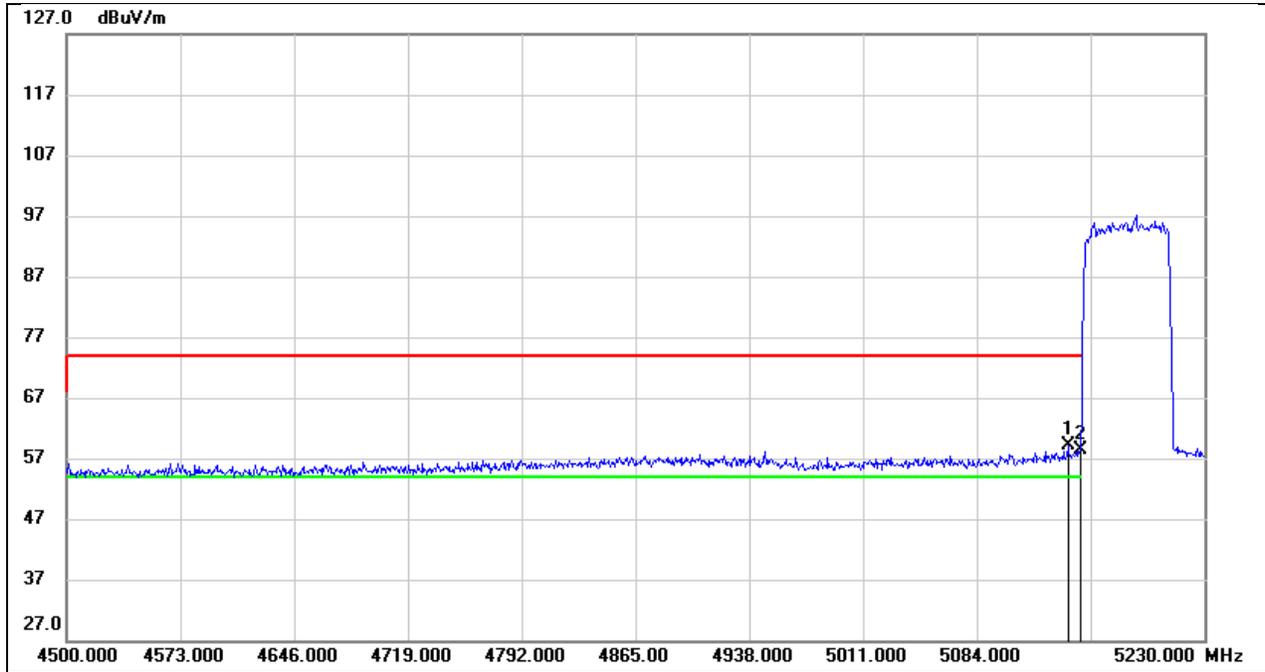


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	19.07	40.03	59.10	74.00	-14.90	peak
2	5150.000	18.35	40.04	58.39	74.00	-15.61	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 7.16V

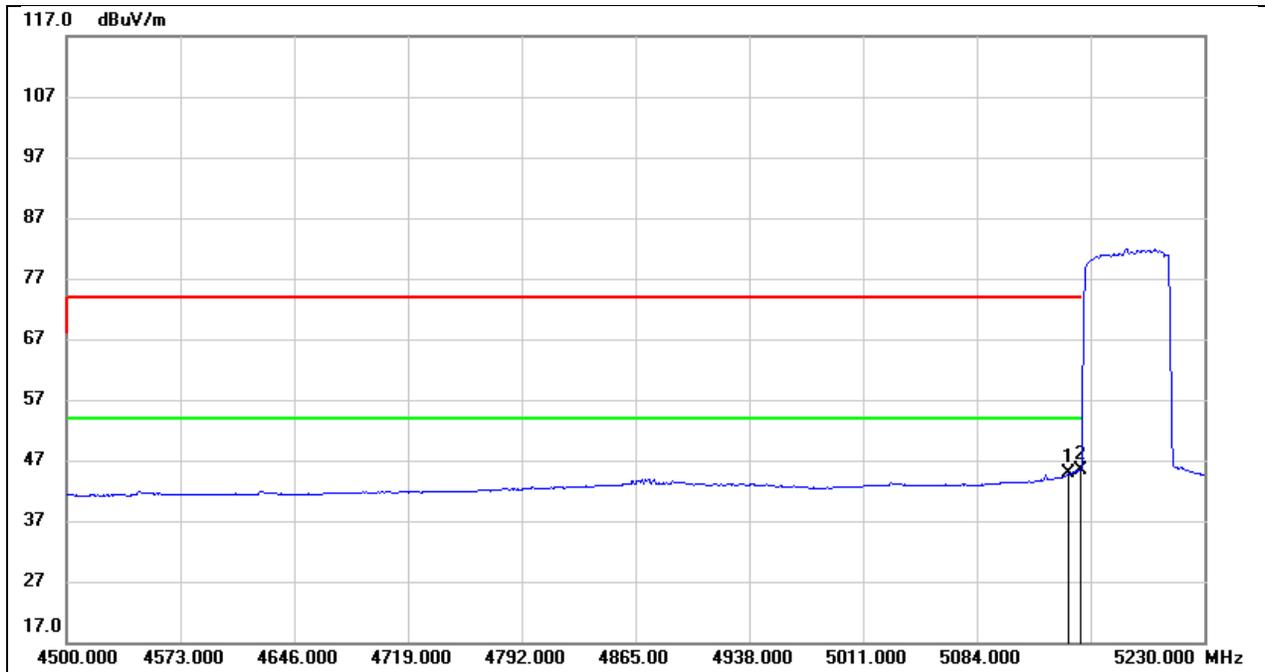


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5142.400	4.73	40.03	44.76	54.00	-9.24	AVG
2	5150.000	5.45	40.04	45.49	54.00	-8.51	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5182
Polarity:	Vertical	Test Voltage:	DC 7.16V

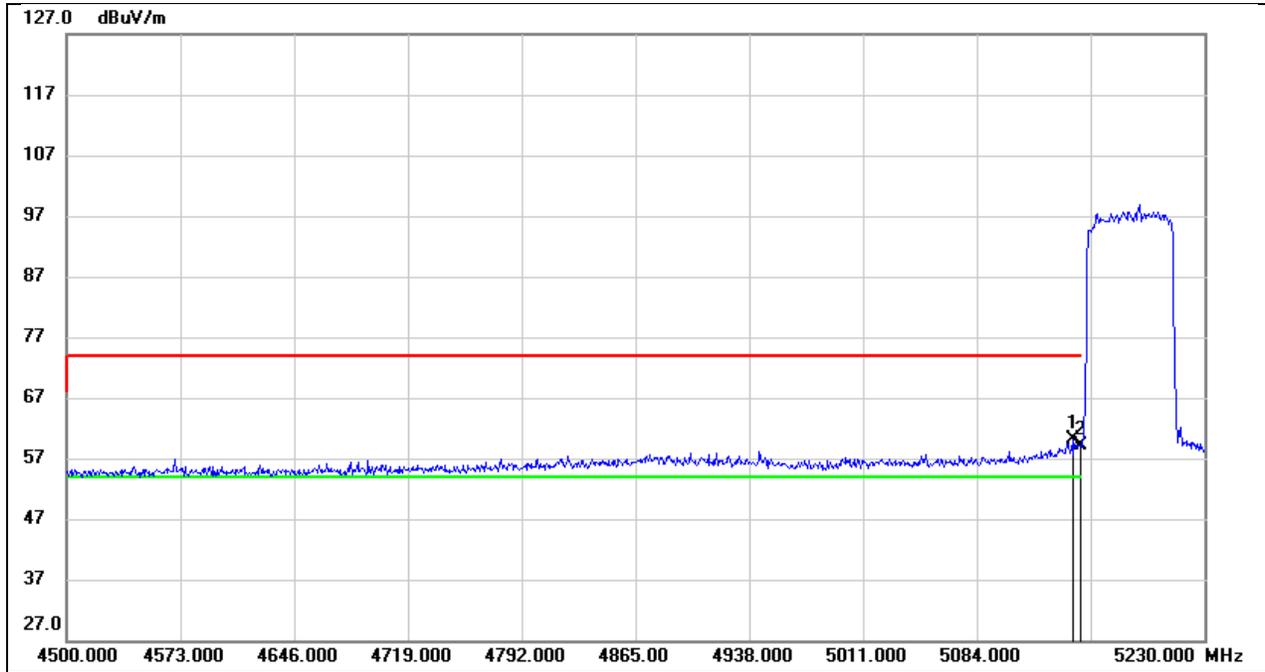


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	20.00	40.04	60.04	74.00	-13.96	peak
2	5150.000	19.07	40.04	59.11	74.00	-14.89	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5182
Polarity:	Vertical	Test Voltage:	DC 7.16V

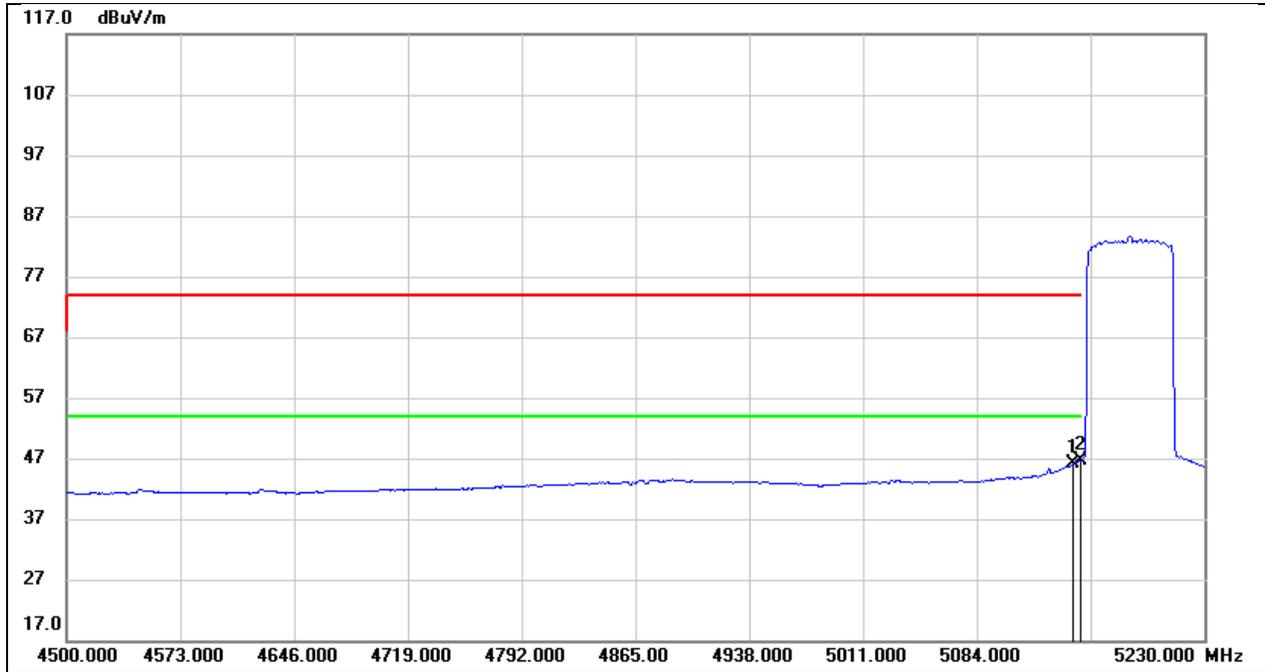


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	6.03	40.04	46.07	54.00	-7.93	AVG
2	5150.000	6.67	40.04	46.71	54.00	-7.29	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5186
Polarity:	Vertical	Test Voltage:	DC 7.16V

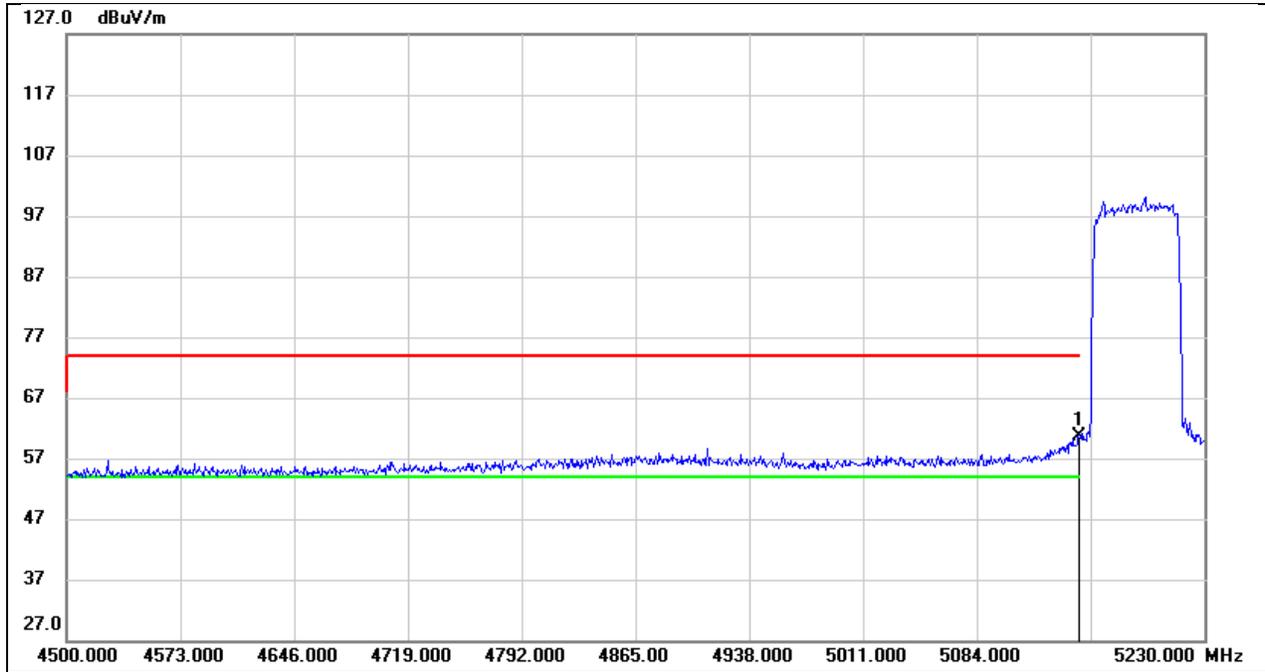


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	20.58	40.04	60.62	74.00	-13.38	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5186
Polarity:	Vertical	Test Voltage:	DC 7.16V

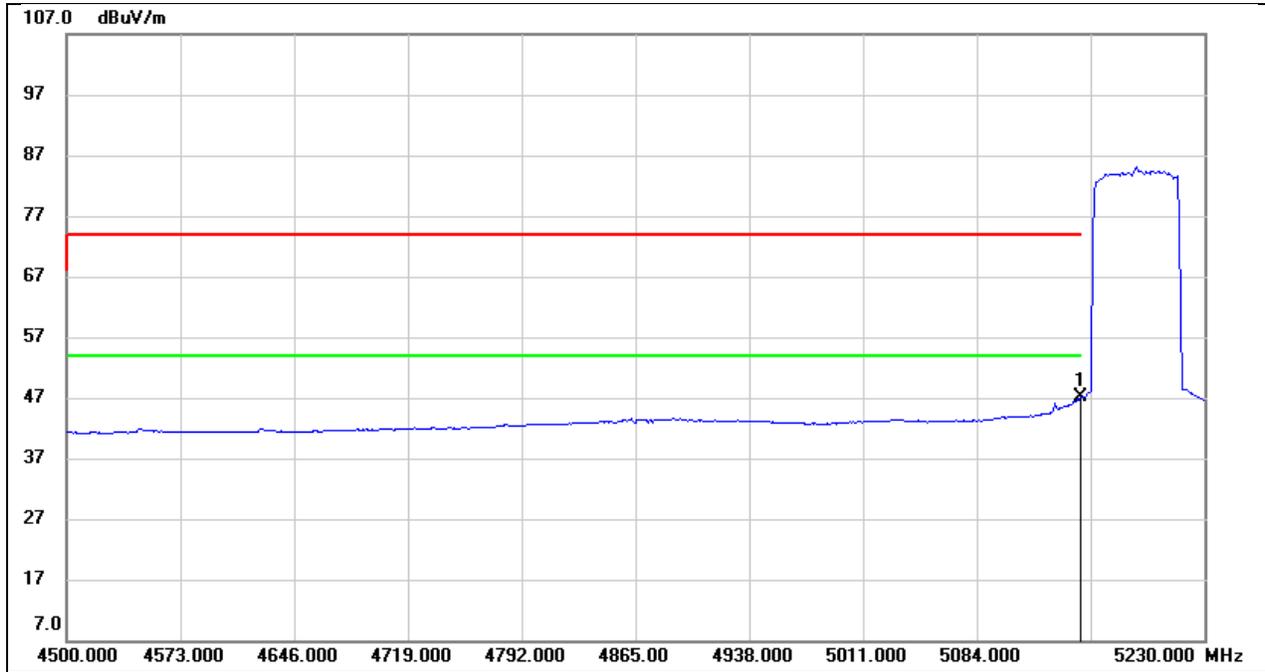


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	6.97	40.04	47.01	54.00	-6.99	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5191
Polarity:	Vertical	Test Voltage:	DC 7.16V

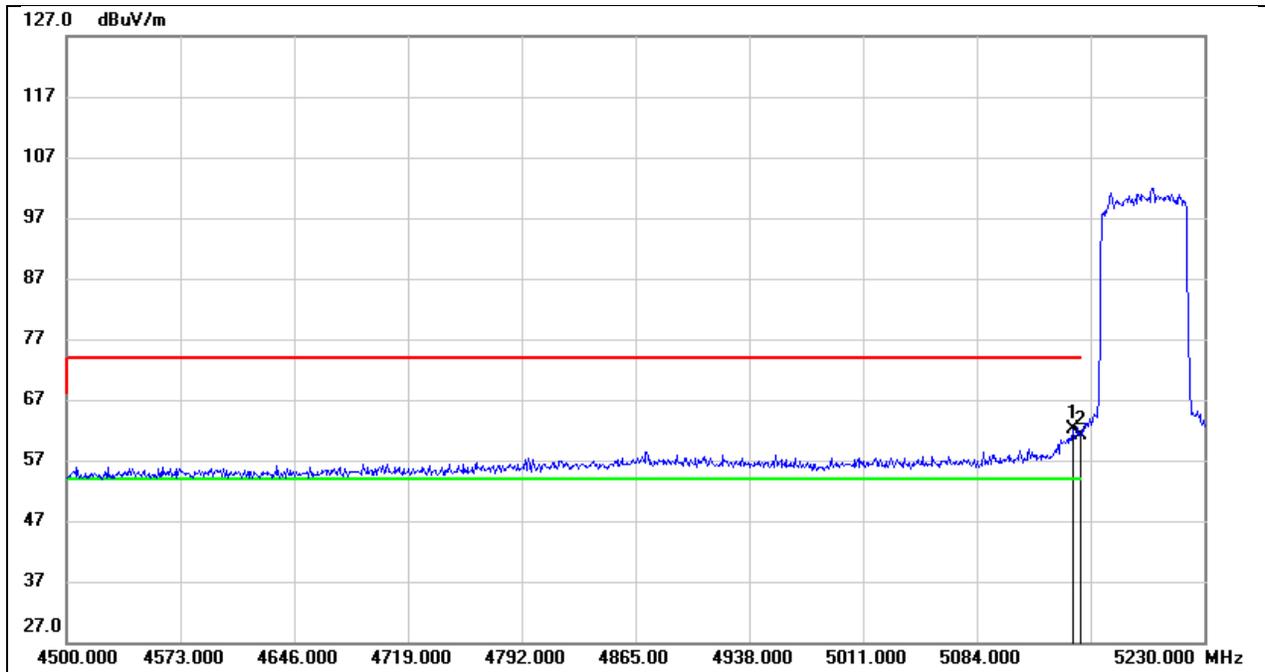


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	22.07	40.04	62.11	74.00	-11.89	peak
2	5150.000	21.13	40.04	61.17	74.00	-12.83	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5191
Polarity:	Vertical	Test Voltage:	DC 7.16V

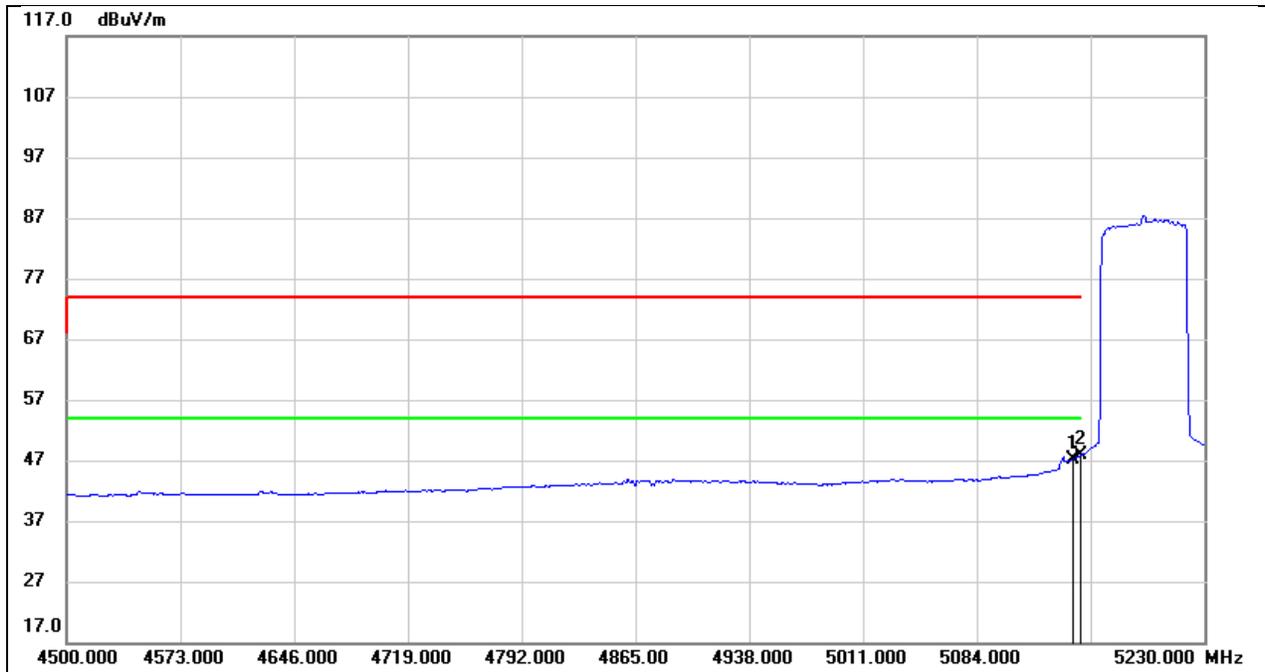


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5146.050	7.10	40.04	47.14	54.00	-6.86	AVG
2	5150.000	7.84	40.04	47.88	54.00	-6.12	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5195
Polarity:	Vertical	Test Voltage:	DC 7.16V

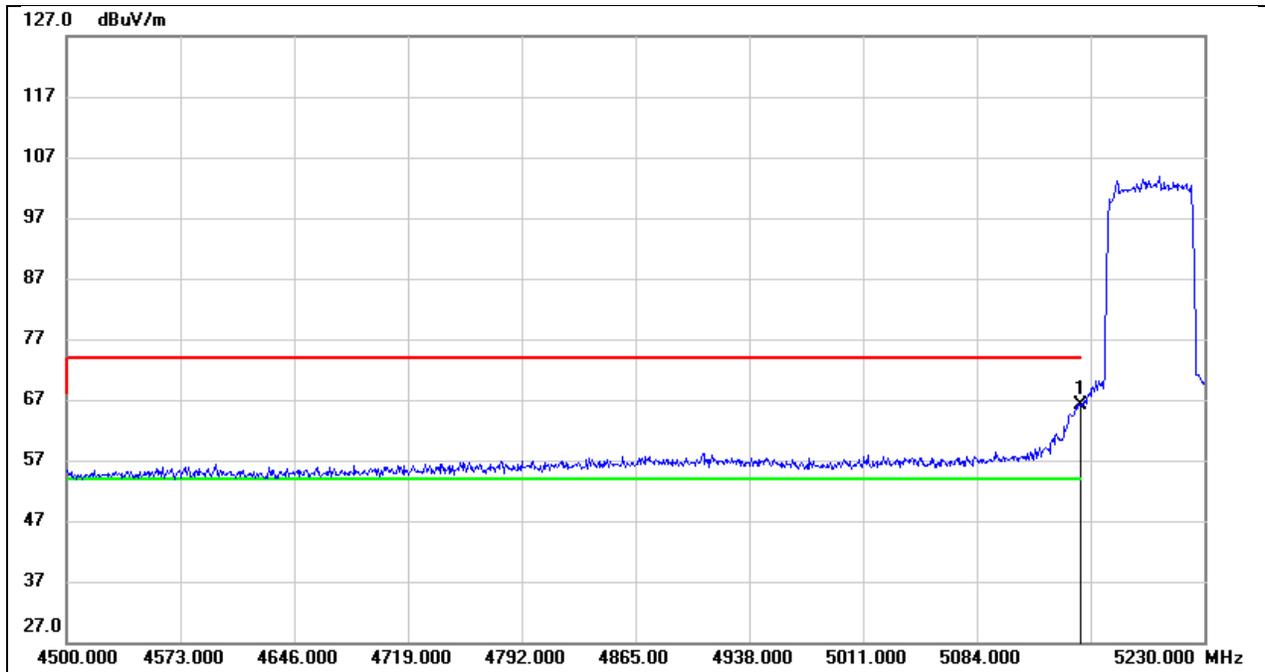


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	26.21	40.04	66.25	74.00	-7.75	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5195
Polarity:	Vertical	Test Voltage:	DC 7.16V

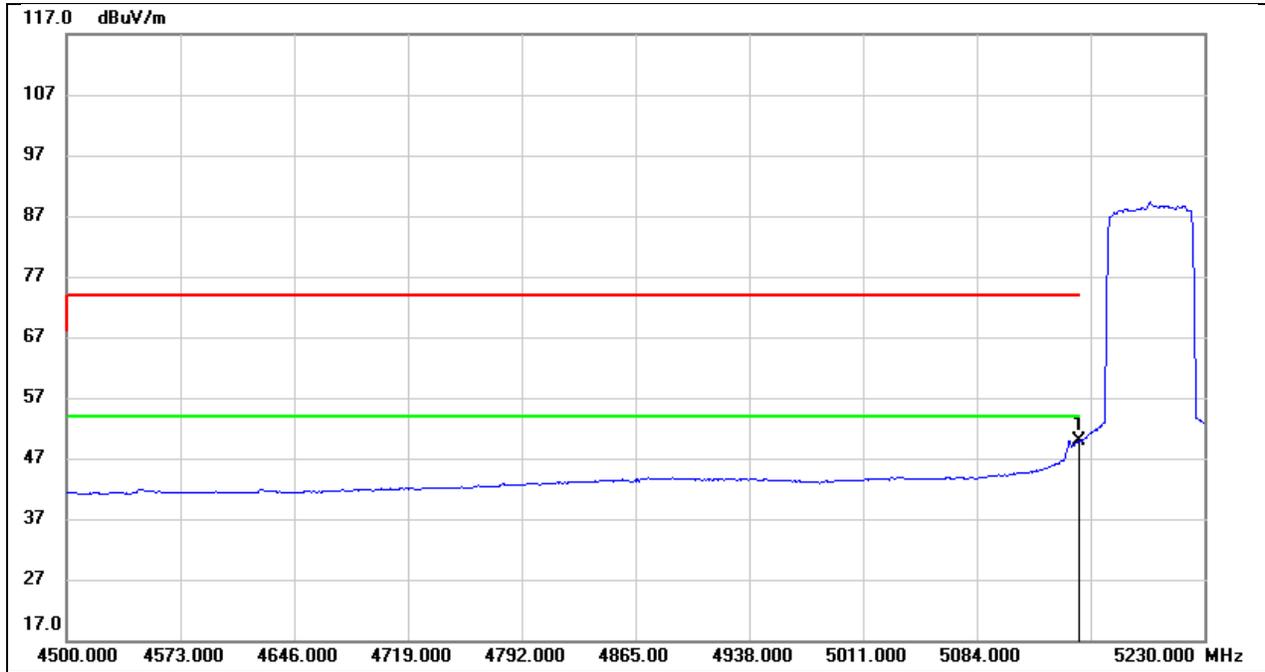


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5150.000	9.78	40.04	49.82	54.00	-4.18	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5220
Polarity:	Vertical	Test Voltage:	DC 7.16V

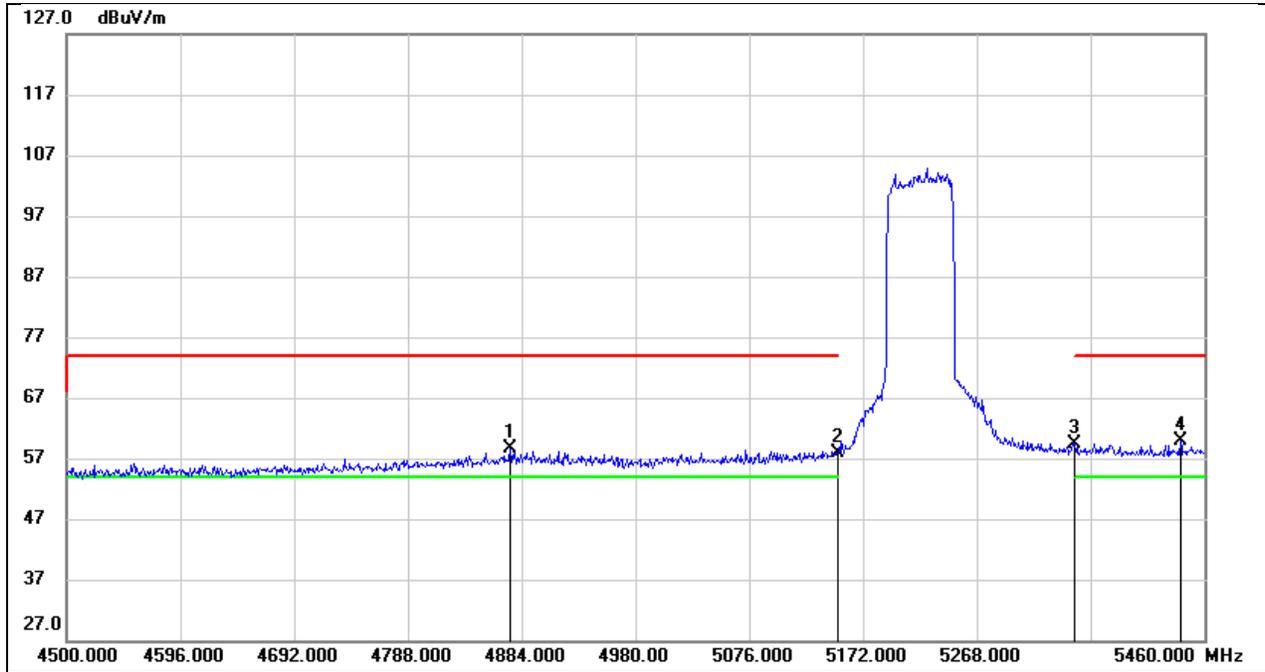


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.400	19.10	39.47	58.57	74.00	-15.43	peak
2	5150.000	17.84	40.04	57.88	74.00	-16.12	peak
3	5350.000	18.81	40.49	59.30	74.00	-14.70	peak
4	5439.840	19.24	40.72	59.96	74.00	-14.04	peak

Test Mode:	SRD 60M AV	Frequency(MHz):	5220
Polarity:	Vertical	Test Voltage:	DC 7.16V

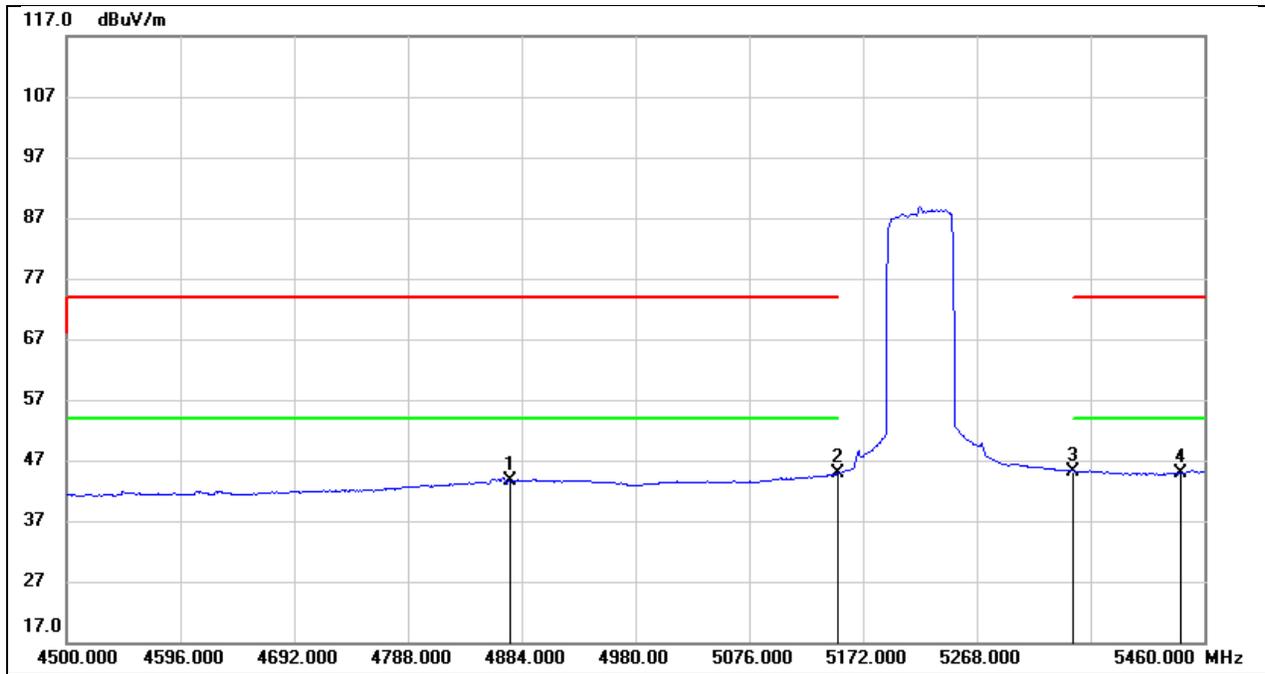


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.400	4.10	39.47	43.57	54.00	-10.43	AVG
2	5150.000	4.86	40.04	44.90	54.00	-9.10	AVG
3	5350.000	4.74	40.49	45.23	54.00	-8.77	AVG
4	5439.840	4.14	40.72	44.86	54.00	-9.14	AVG

Test Mode:	SRD 60M PK	Frequency(MHz):	5755.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

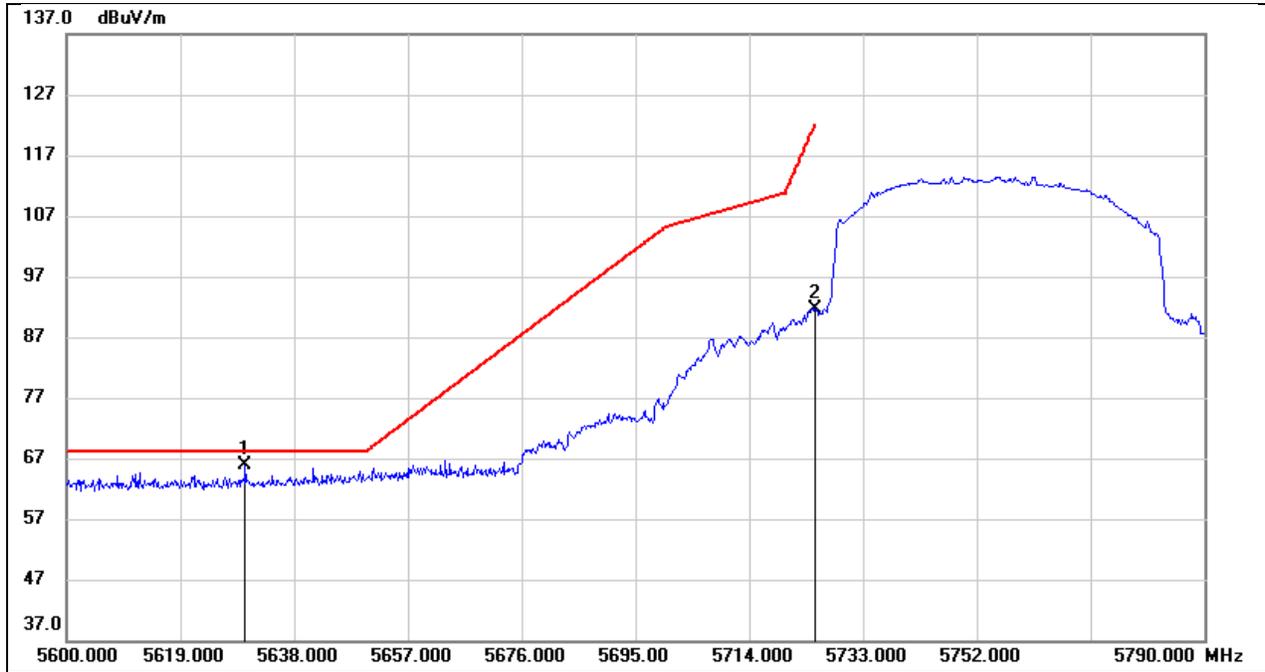


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5629.830	24.64	41.12	65.76	68.20	-2.44	peak
2	5725.000	50.51	41.20	91.71	122.20	-30.49	peak

Test Mode:	SRD 60M PK	Frequency(MHz):	5819.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

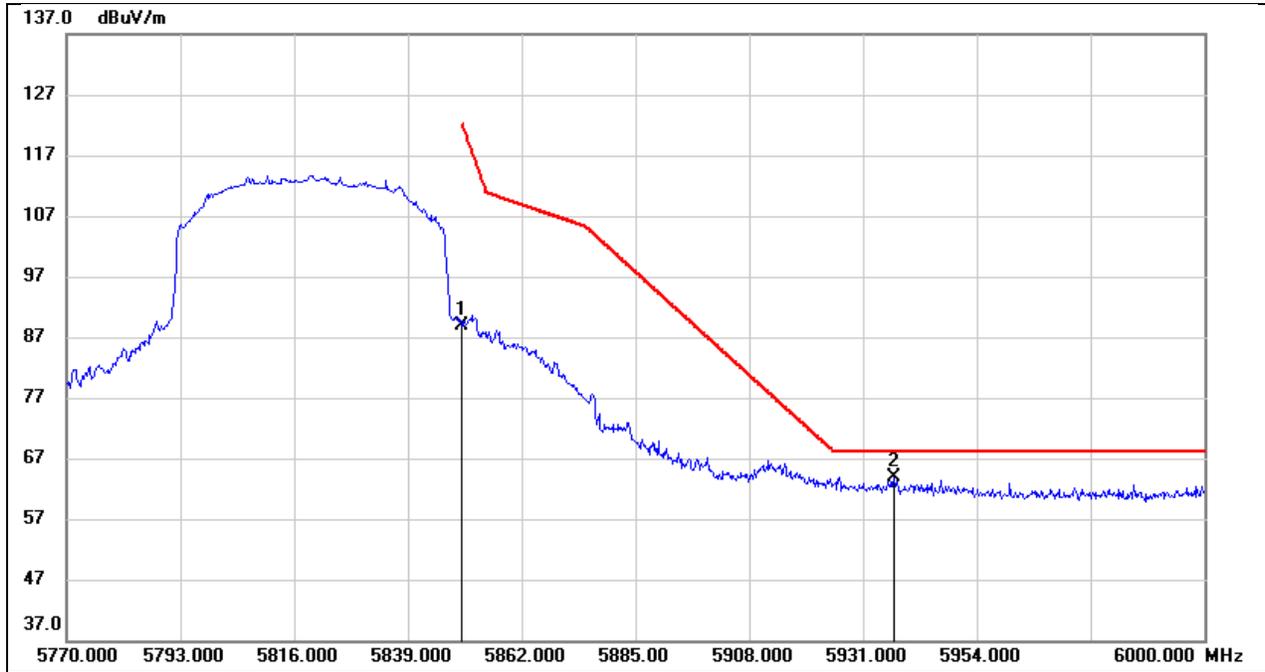


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	47.59	41.36	88.95	122.20	-33.25	peak
2	5937.210	22.41	41.52	63.93	68.20	-4.27	peak

Test Mode:	SRD 80M PK	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 7.16V

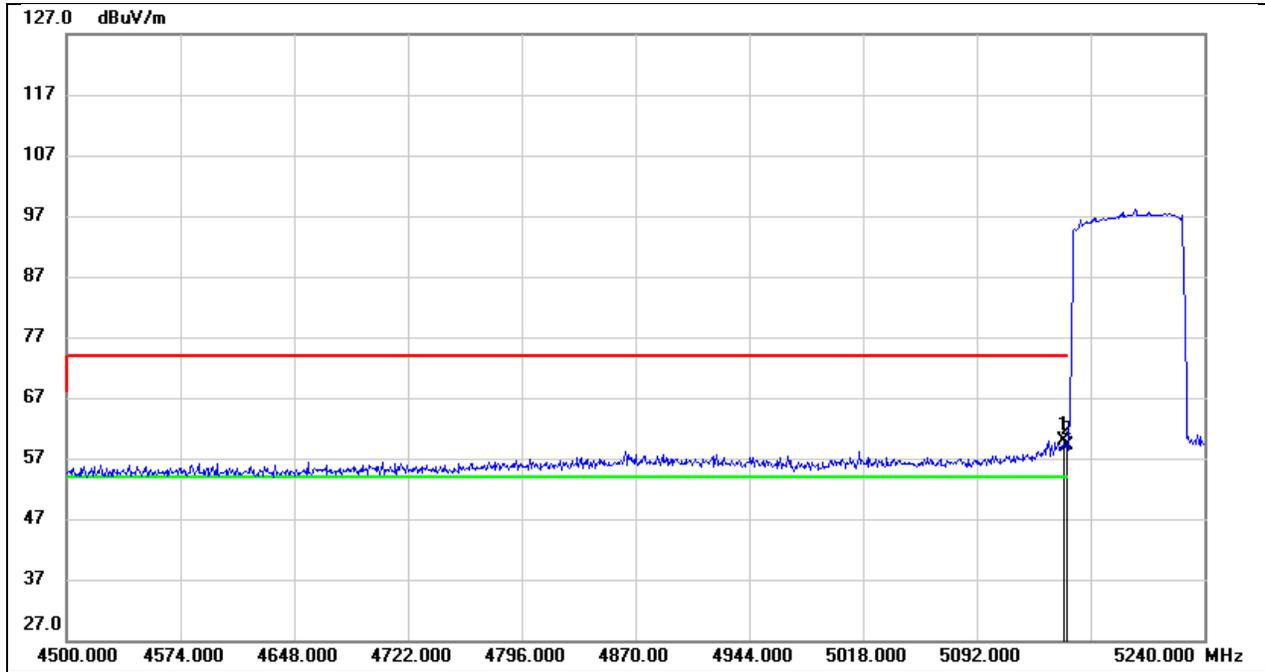


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.980	19.75	40.04	59.79	74.00	-14.21	peak
2	5150.000	19.04	40.04	59.08	74.00	-14.92	peak

Test Mode:	SRD 80M AV	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 7.16V

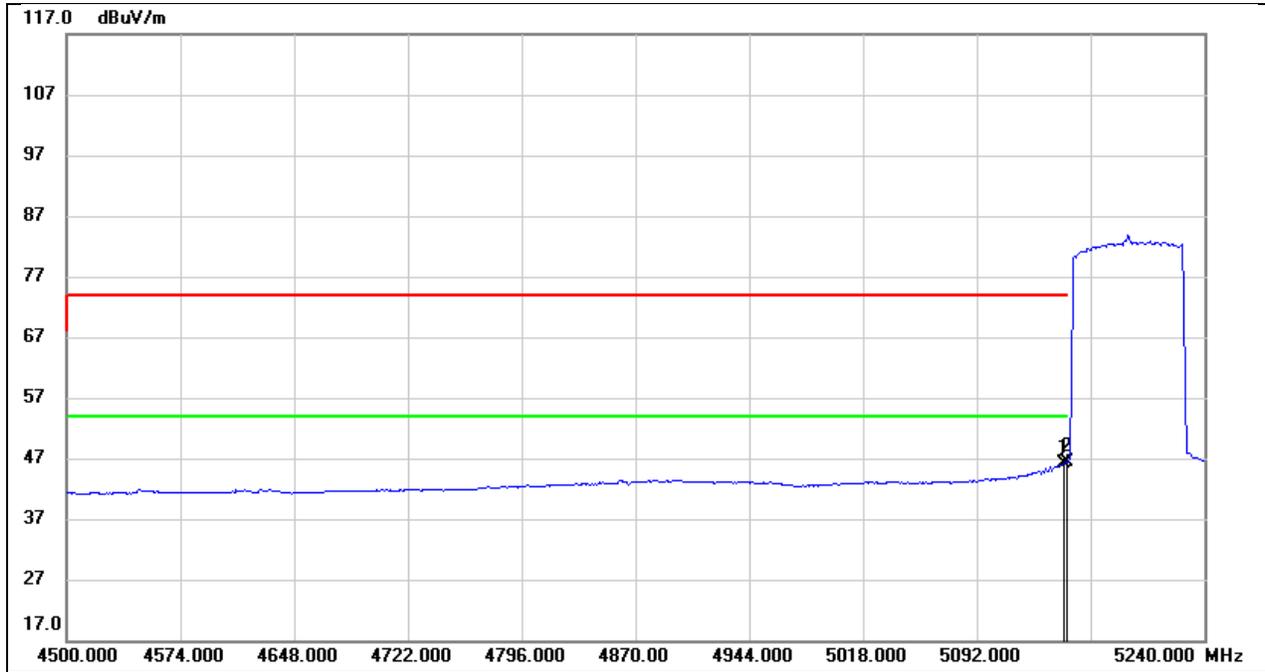


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5148.980	6.06	40.04	46.10	54.00	-7.90	AVG
2	5150.000	6.41	40.04	46.45	54.00	-7.55	AVG

Test Mode:	SRD 80M PK	Frequency(MHz):	5192
Polarity:	Vertical	Test Voltage:	DC 7.16V

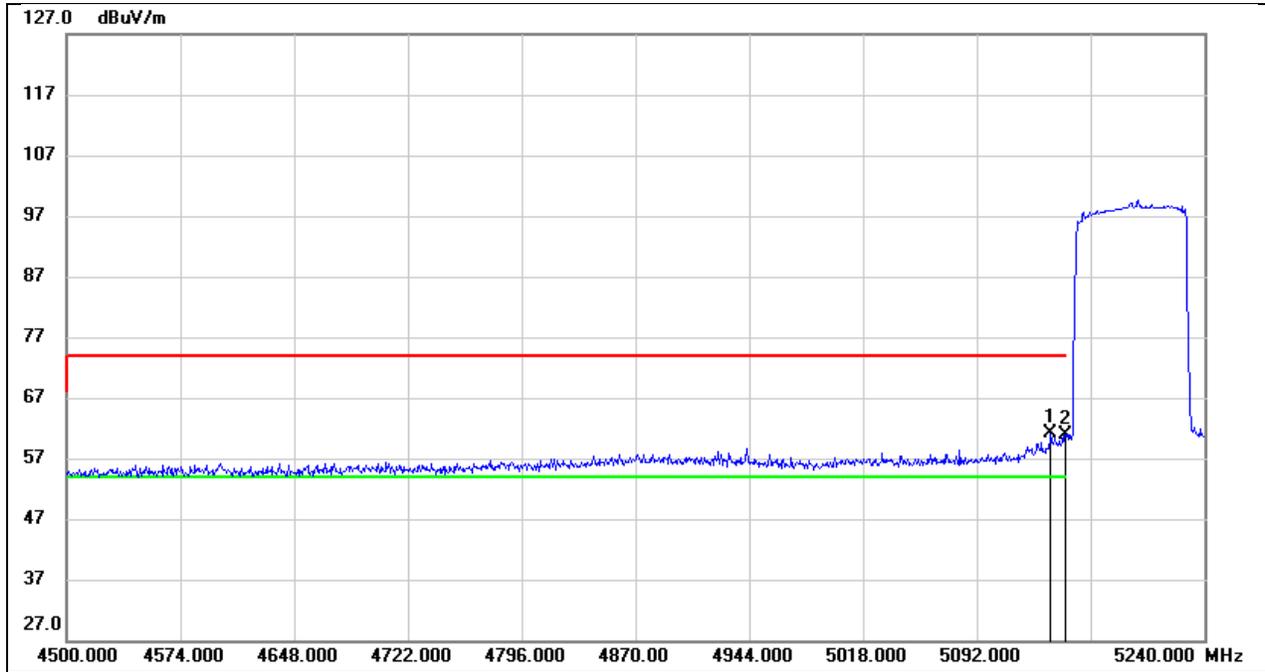


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.100	20.99	40.03	61.02	74.00	-12.98	peak
2	5150.000	20.83	40.04	60.87	74.00	-13.13	peak

Test Mode:	SRD 80M AV	Frequency(MHz):	5192
Polarity:	Vertical	Test Voltage:	DC 7.16V

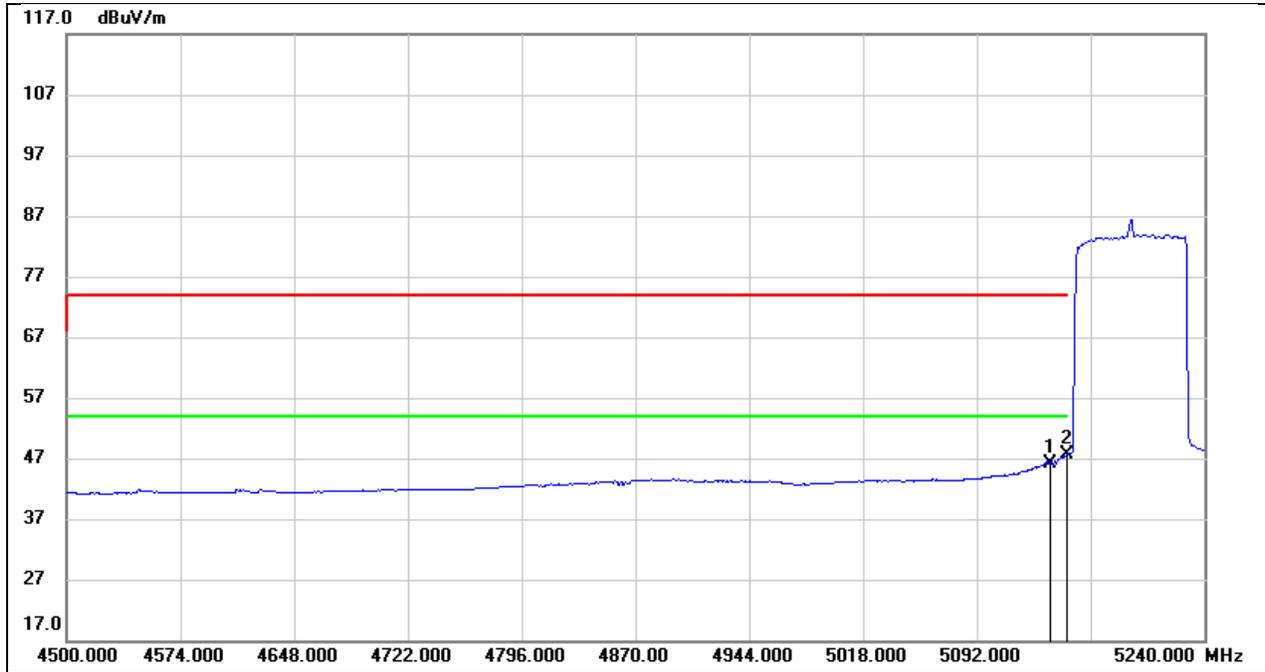


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5140.100	6.22	40.03	46.25	54.00	-7.75	AVG
2	5150.000	7.50	40.04	47.54	54.00	-6.46	AVG

Test Mode:	SRD 80M PK	Frequency(MHz):	5195
Polarity:	Vertical	Test Voltage:	DC 7.16V

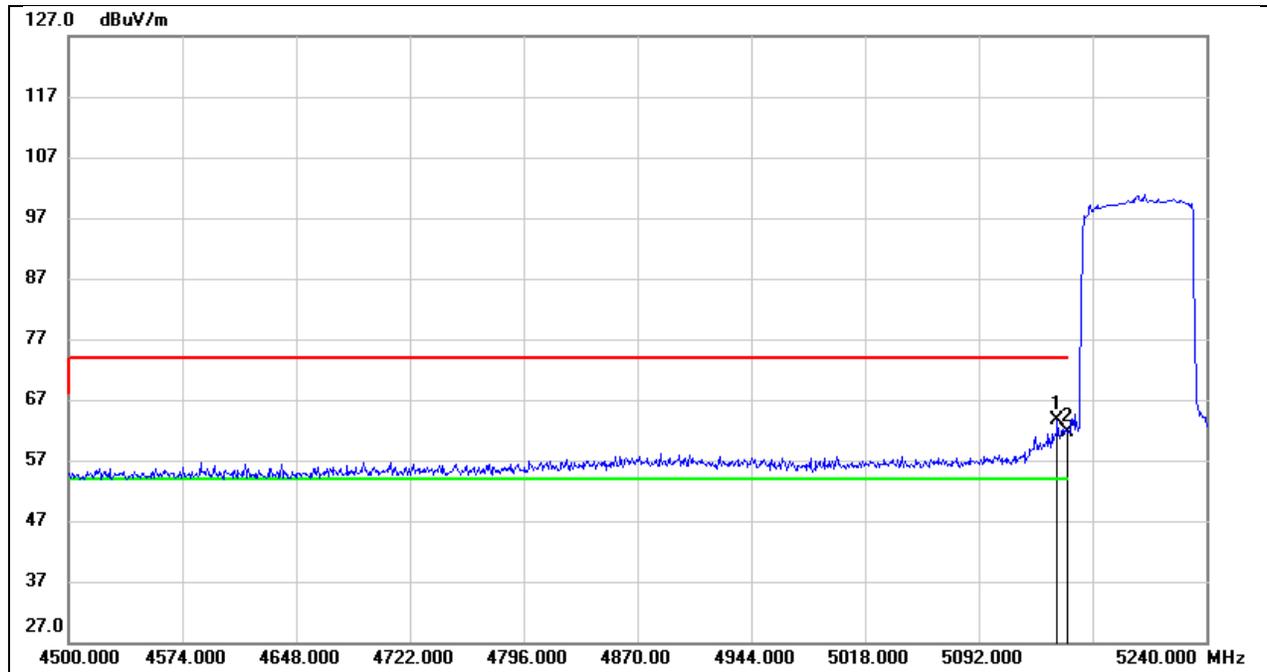


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.060	23.55	40.03	63.58	74.00	-10.42	peak
2	5150.000	21.63	40.04	61.67	74.00	-12.33	peak

Test Mode:	SRD 80M AV	Frequency(MHz):	5195
Polarity:	Vertical	Test Voltage:	DC 7.16V

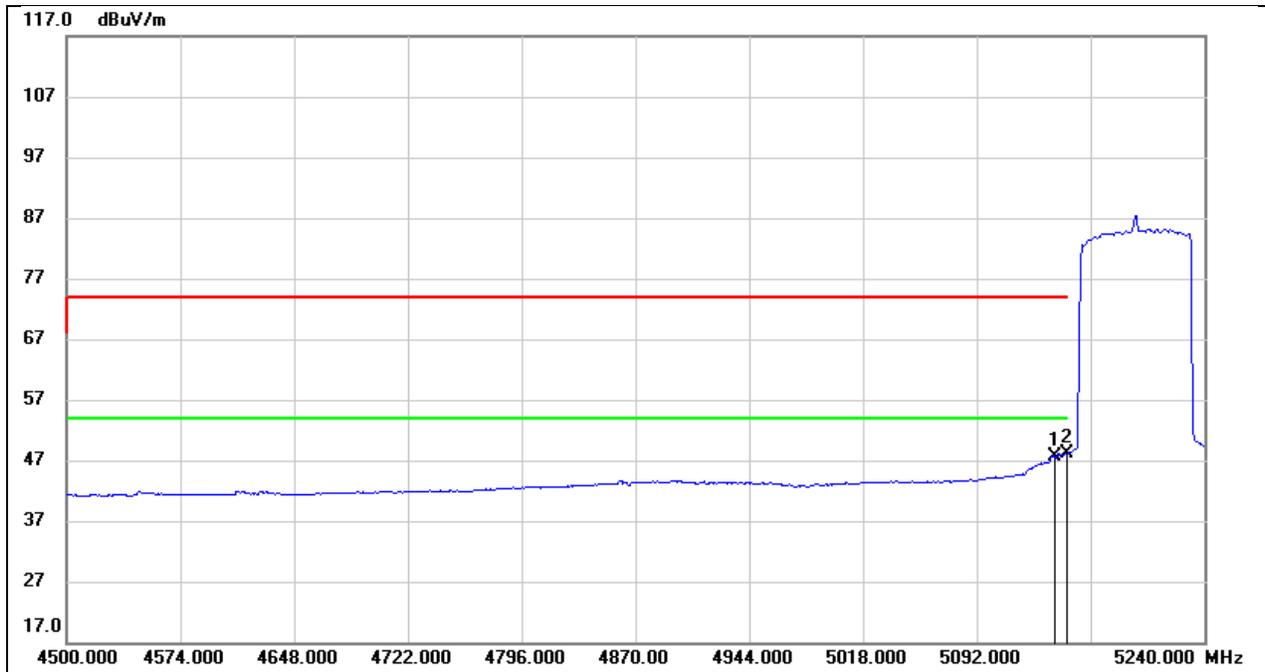


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5143.060	7.72	40.03	47.75	54.00	-6.25	AVG
2	5150.000	8.15	40.04	48.19	54.00	-5.81	AVG

Test Mode:	SRD 80M PK	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 7.16V

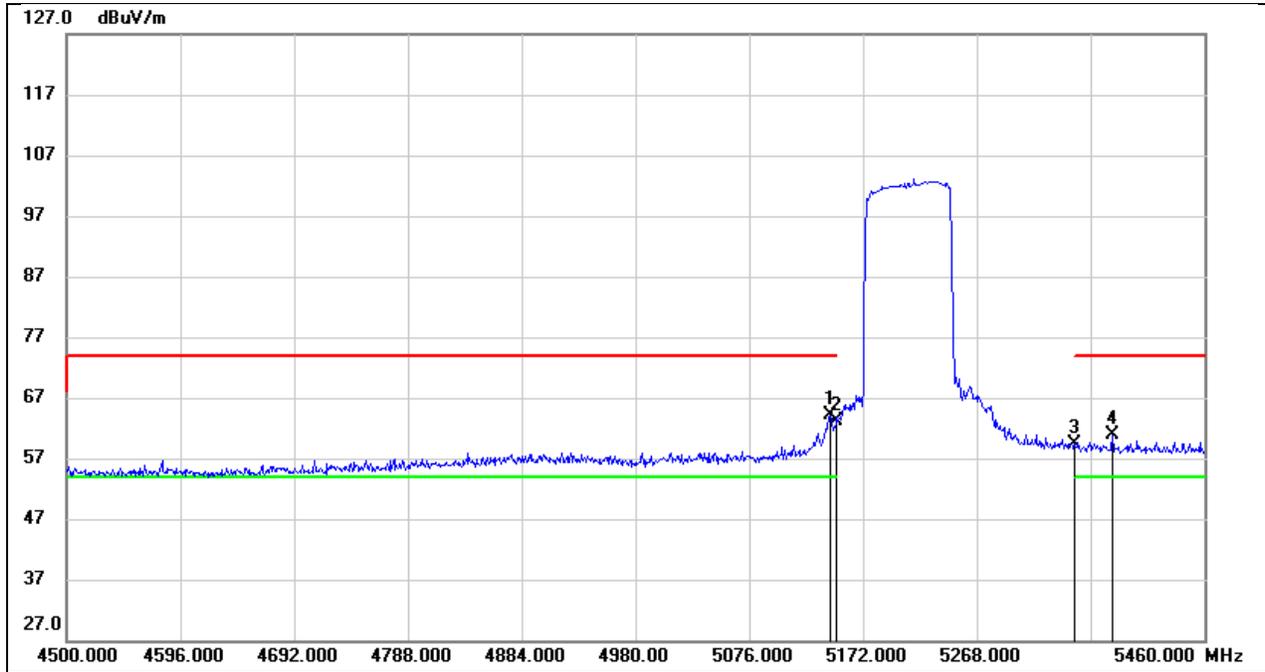


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.160	24.13	40.03	64.16	74.00	-9.84	peak
2	5150.000	23.12	40.04	63.16	74.00	-10.84	peak
3	5350.000	18.94	40.49	59.43	74.00	-14.57	peak
4	5382.240	20.29	40.58	60.87	74.00	-13.13	peak

Test Mode:	SRD 80M AV	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 7.16V

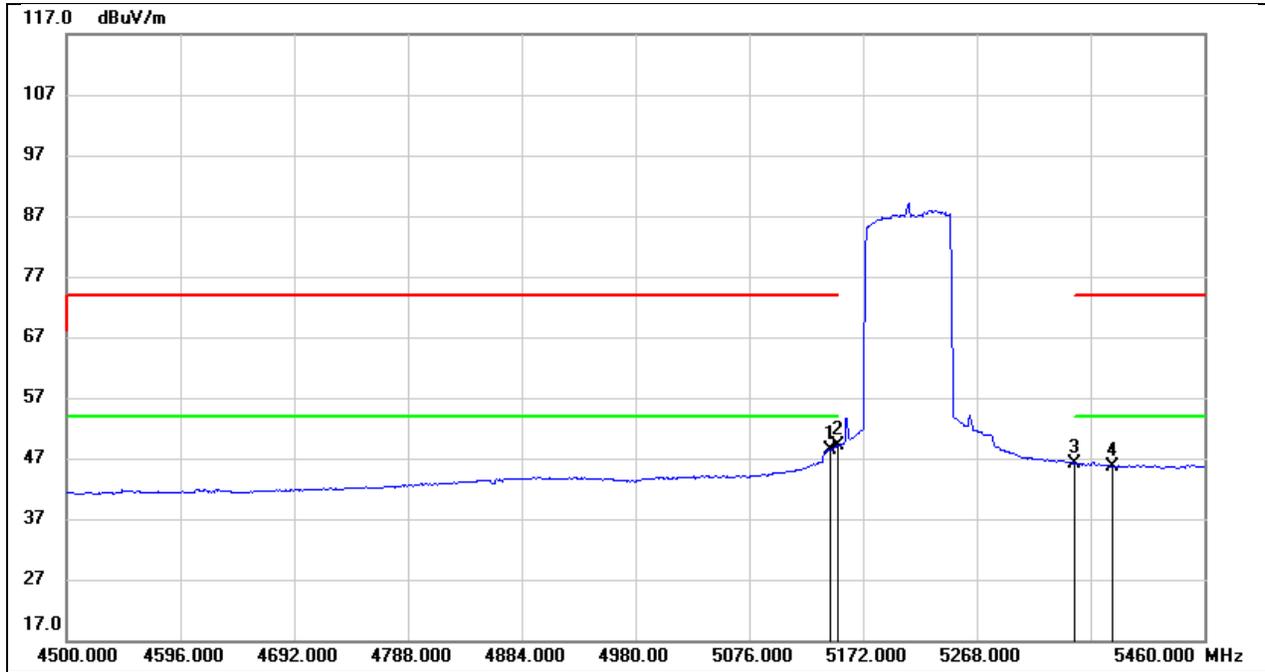


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5144.160	8.44	40.03	48.47	54.00	-5.53	AVG
2	5150.000	9.02	40.04	49.06	54.00	-4.94	AVG
3	5350.000	5.73	40.49	46.22	54.00	-7.78	AVG
4	5382.240	5.12	40.58	45.70	54.00	-8.30	AVG

Test Mode:	SRD 80M PK	Frequency(MHz):	5765.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

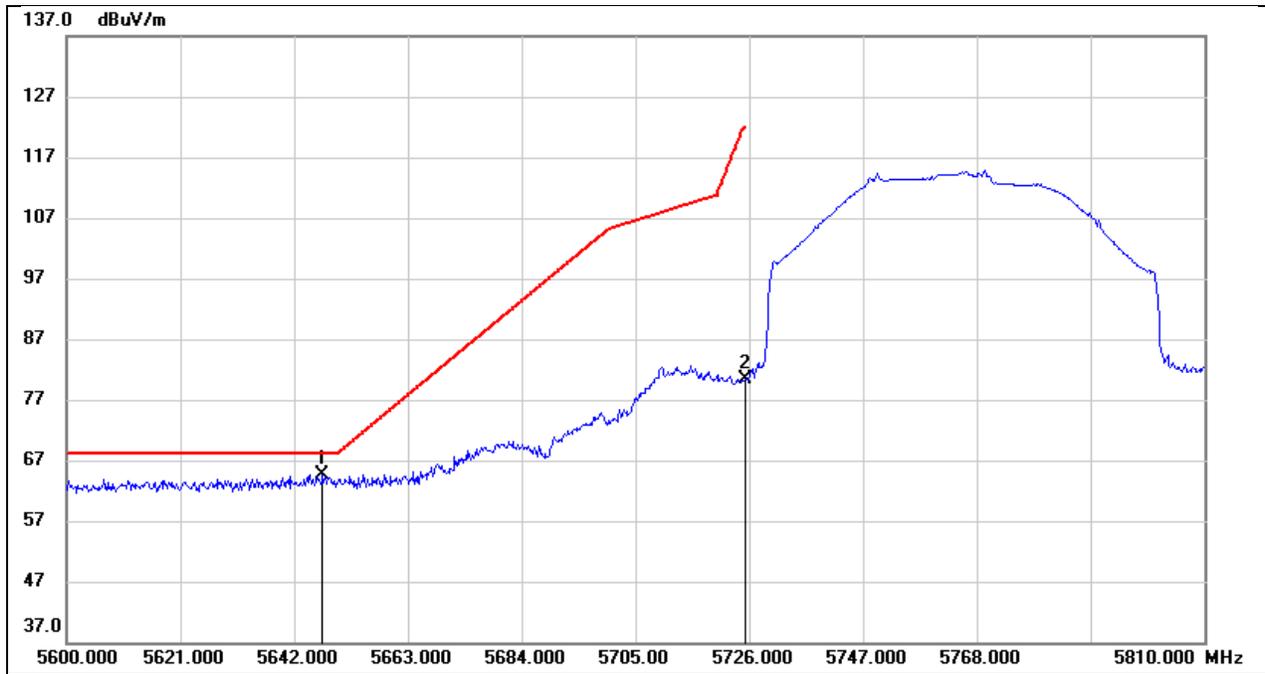

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5647.250	23.56	41.13	64.69	68.20	-3.51	peak
2	5725.000	39.16	41.20	80.36	122.20	-41.84	peak


Test Mode:	SRD 80M PK	Frequency(MHz):	5809.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

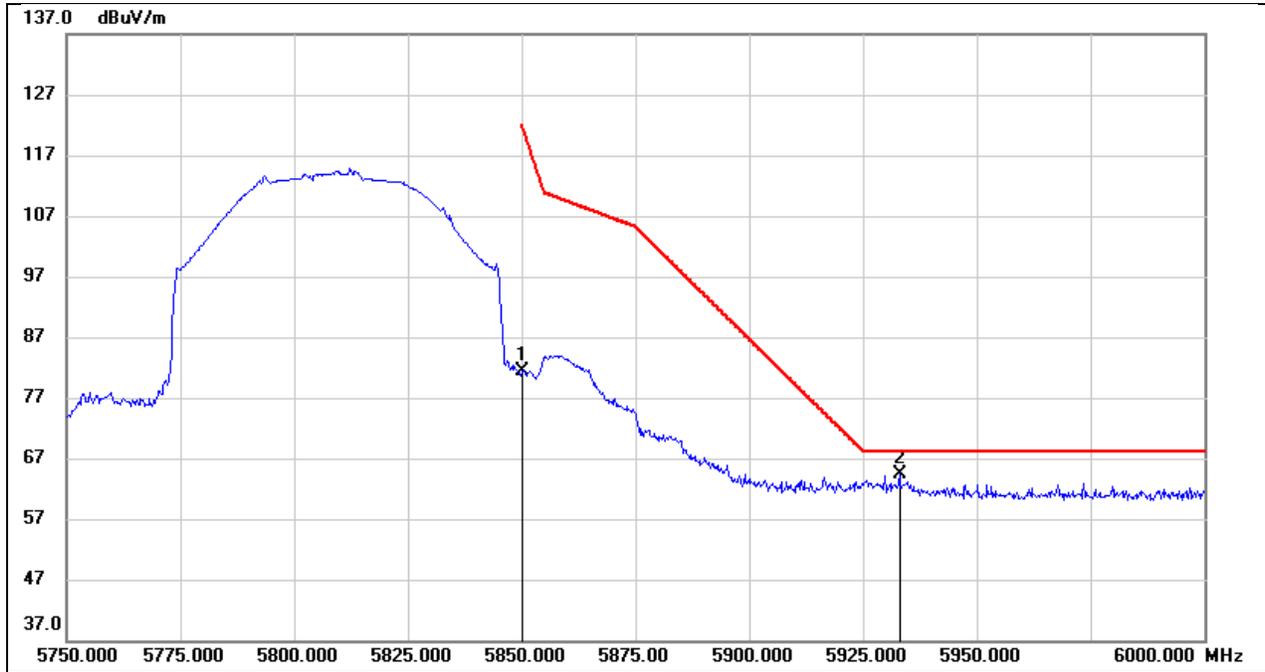

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	40.04	41.36	81.40	122.20	-40.80	peak
2	5933.000	22.84	41.52	64.36	68.20	-3.84	peak


8.2. SPURIOUS EMISSIONS(1 GHZ~7 GHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 7.16V

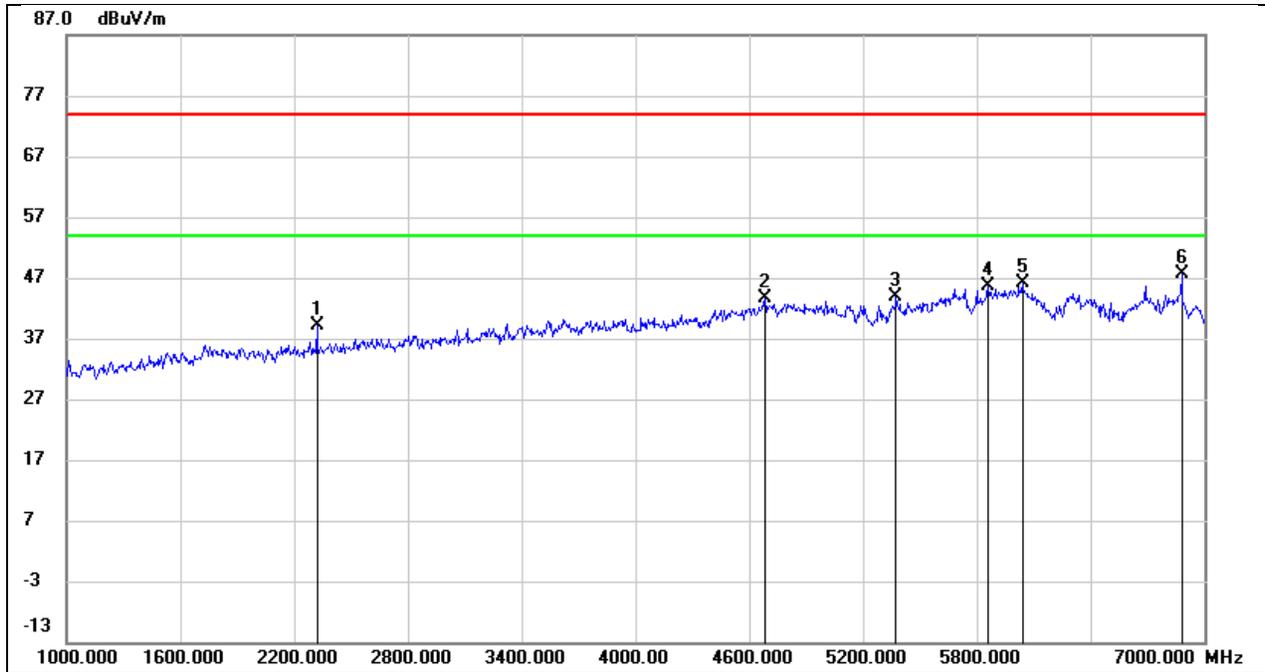


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2320.000	47.95	-8.86	39.09	74.00	-34.91	peak
2	4684.000	43.19	0.48	43.67	74.00	-30.33	peak
3	5374.000	40.95	2.97	43.92	74.00	-30.08	peak
4	5860.000	40.68	4.97	45.65	74.00	-28.35	peak
5	6040.000	40.26	5.88	46.14	74.00	-27.86	peak
6	6880.000	40.90	6.65	47.55	74.00	-26.45	peak

Test Mode:	SRD 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 7.16V

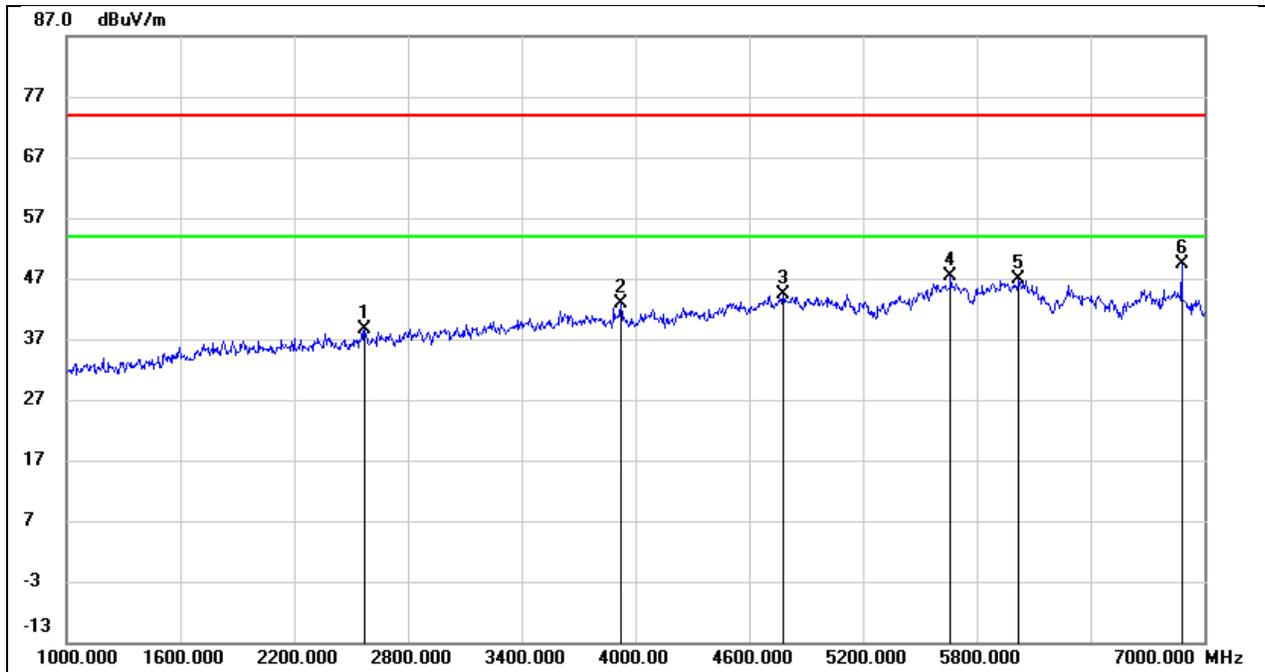


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2572.000	45.52	-6.96	38.56	74.00	-35.44	peak
2	3922.000	44.42	-1.66	42.76	74.00	-31.24	peak
3	4780.000	42.39	1.97	44.36	74.00	-29.64	peak
4	5662.000	42.13	5.16	47.29	74.00	-26.71	peak
5	6022.000	40.02	6.81	46.83	74.00	-27.17	peak
6	6880.000	41.90	7.52	49.42	74.00	-24.58	peak

Test Mode:	SRD 10M	Frequency(MHz):	5201
Polarity:	Horizontal	Test Voltage:	DC 7.16V

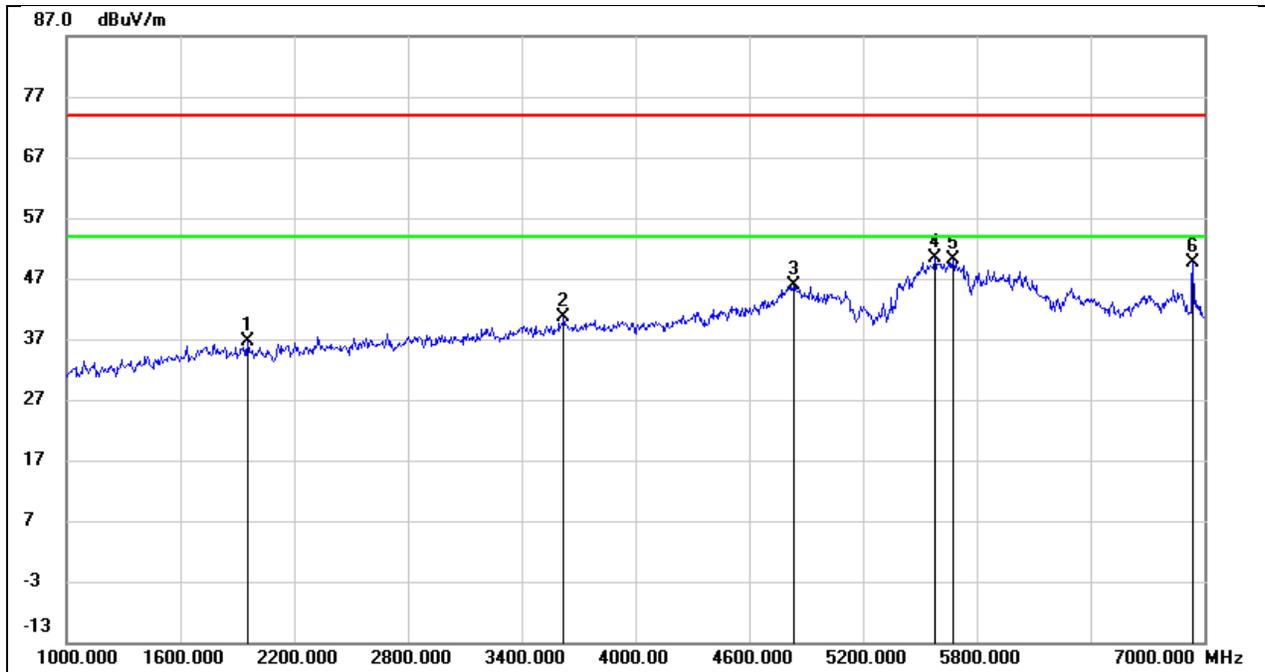


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1954.000	46.65	-10.06	36.59	74.00	-37.41	peak
2	3622.000	43.88	-3.33	40.55	74.00	-33.45	peak
3	4834.000	44.68	1.15	45.83	74.00	-28.17	peak
4	5578.000	46.64	3.67	50.31	74.00	-23.69	peak
5	5674.000	46.05	4.08	50.13	74.00	-23.87	peak
6	6940.000	43.06	6.59	49.65	74.00	-24.35	peak

Test Mode:	SRD 10M	Frequency(MHz):	5201
Polarity:	Vertical	Test Voltage:	DC 7.16V

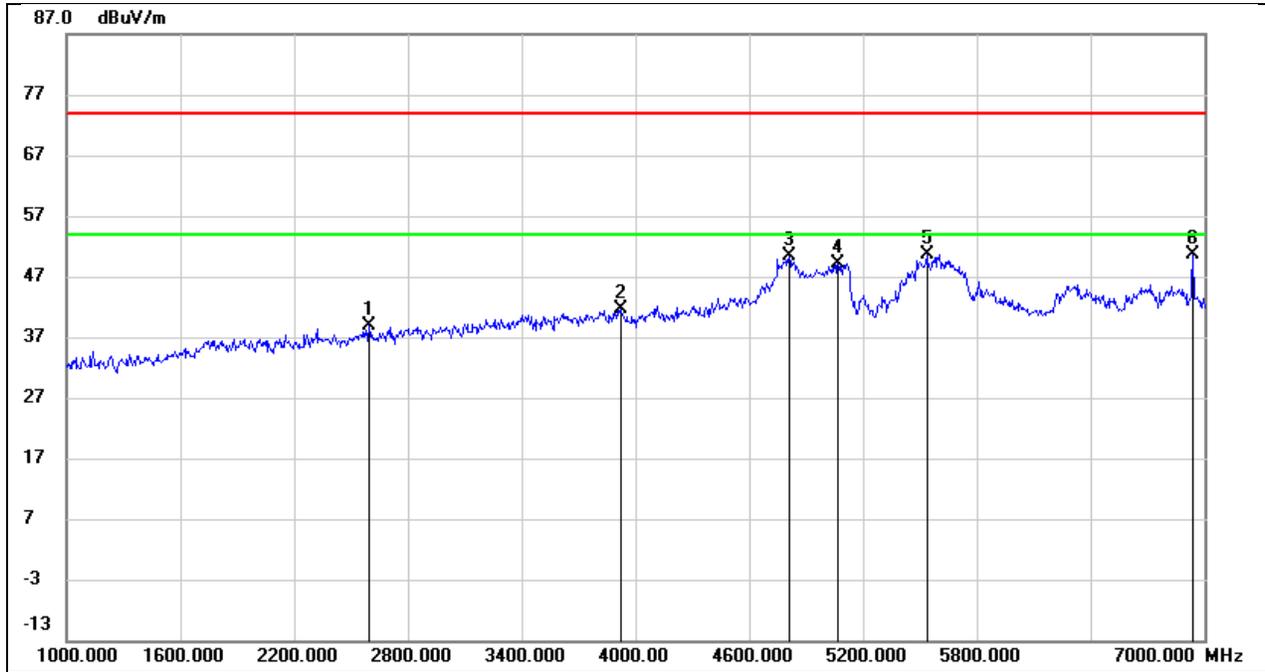


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2596.000	45.77	-6.82	38.95	74.00	-35.05	peak
2	3922.000	43.41	-1.66	41.75	74.00	-32.25	peak
3	4810.000	48.14	2.12	50.26	74.00	-23.74	peak
4	5068.000	45.96	3.28	49.24	74.00	-24.76	peak
5	5536.000	46.04	4.70	50.74	74.00	-23.26	peak
6	6940.000	43.19	7.48	50.67	74.00	-23.33	peak

Test Mode:	SRD 10M	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 7.16V

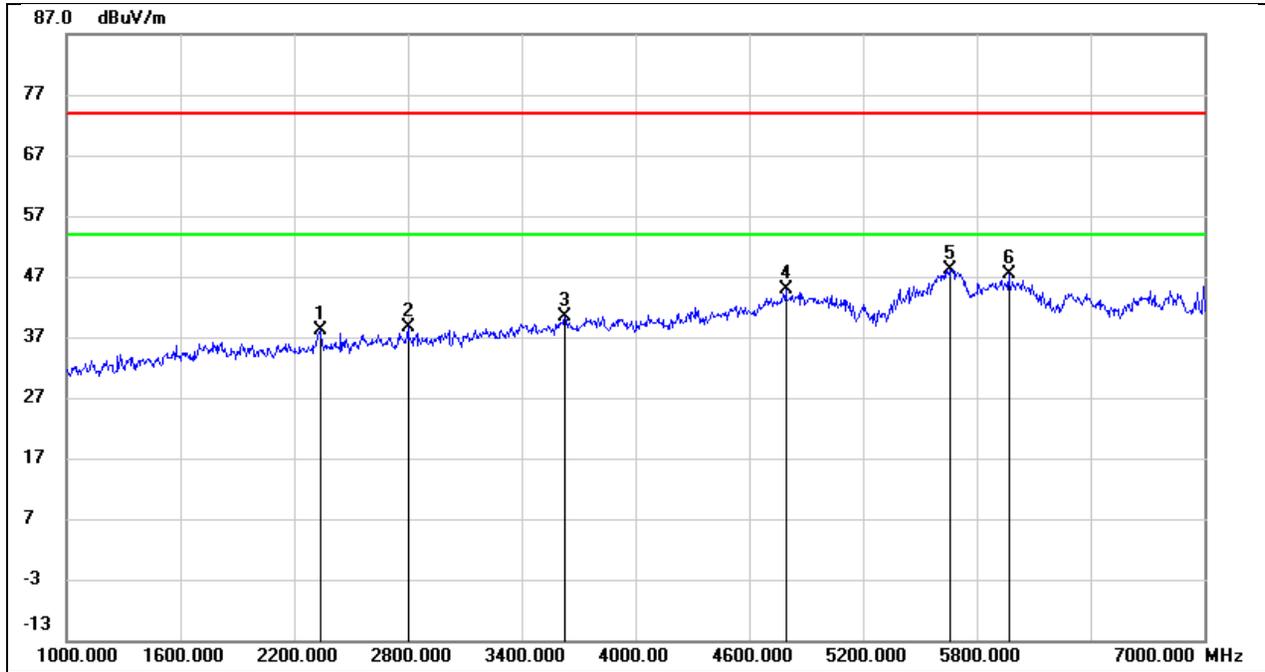


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2338.000	46.83	-8.78	38.05	74.00	-35.95	peak
2	2800.000	45.56	-6.84	38.72	74.00	-35.28	peak
3	3628.000	43.71	-3.31	40.40	74.00	-33.60	peak
4	4792.000	43.84	0.96	44.80	74.00	-29.20	peak
5	5662.000	44.20	4.03	48.23	74.00	-25.77	peak
6	5968.000	41.86	5.56	47.42	74.00	-26.58	peak

Test Mode:	SRD 10M	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 7.16V

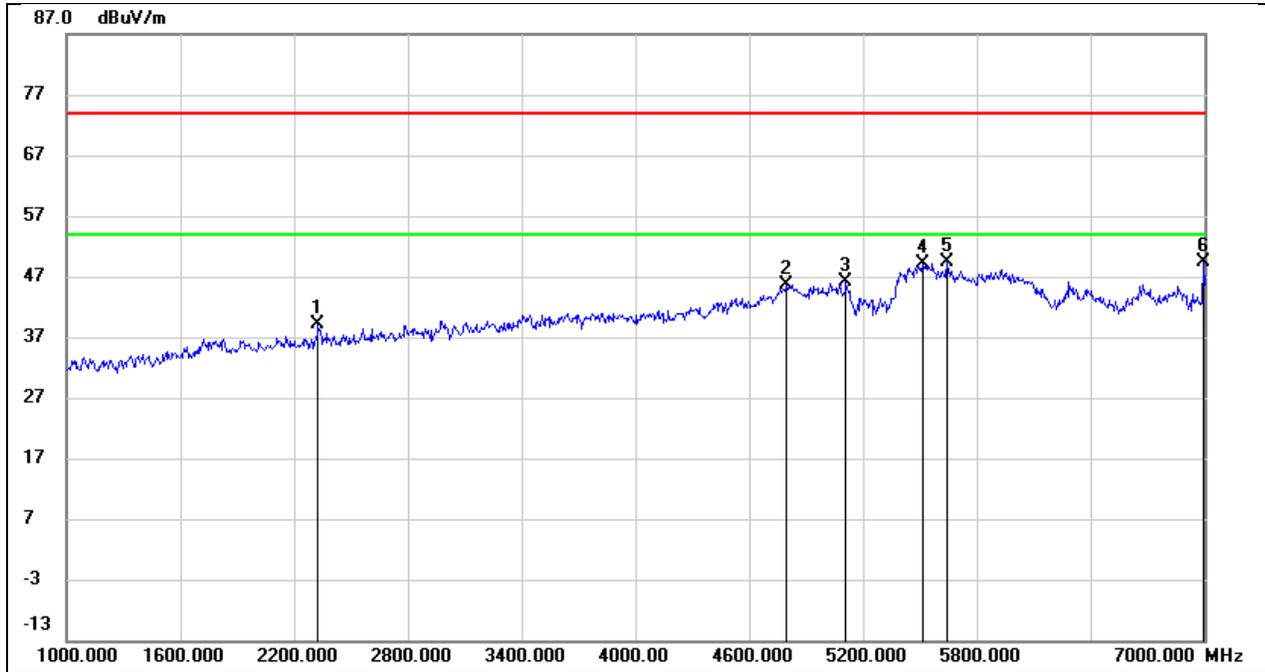


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2326.000	47.01	-8.00	39.01	74.00	-34.99	peak
2	4798.000	43.53	2.07	45.60	74.00	-28.40	peak
3	5110.000	42.84	3.32	46.16	74.00	-27.84	peak
4	5518.000	44.58	4.65	49.23	74.00	-24.77	peak
5	5644.000	44.19	5.08	49.27	74.00	-24.73	peak
6	6994.000	41.90	7.46	49.36	74.00	-24.64	peak

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

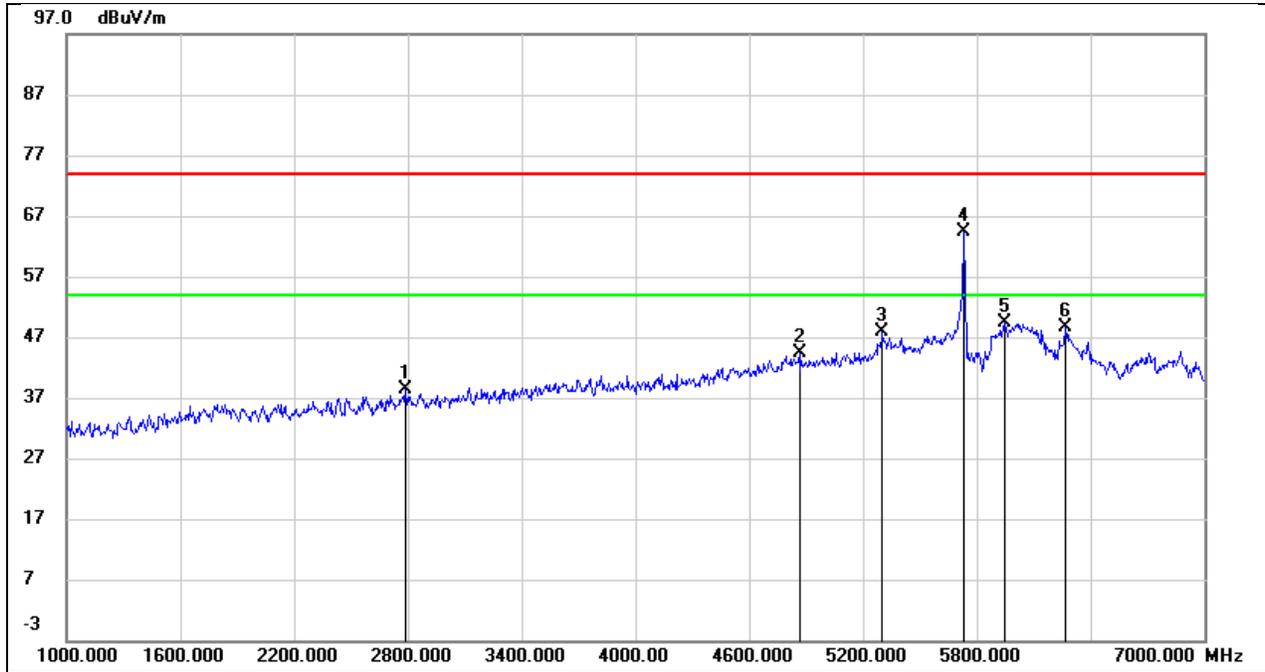


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2788.000	45.27	-6.89	38.38	74.00	-35.62	peak
2	4864.000	43.04	1.32	44.36	74.00	-29.64	peak
3	5302.000	45.19	2.66	47.85	74.00	-26.15	peak
4	5730.500	60.07	4.31	64.38	/	/	Fundamental
5	5950.000	43.96	5.46	49.42	74.00	-24.58	peak
6	6268.000	42.23	6.28	48.51	74.00	-25.49	peak

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

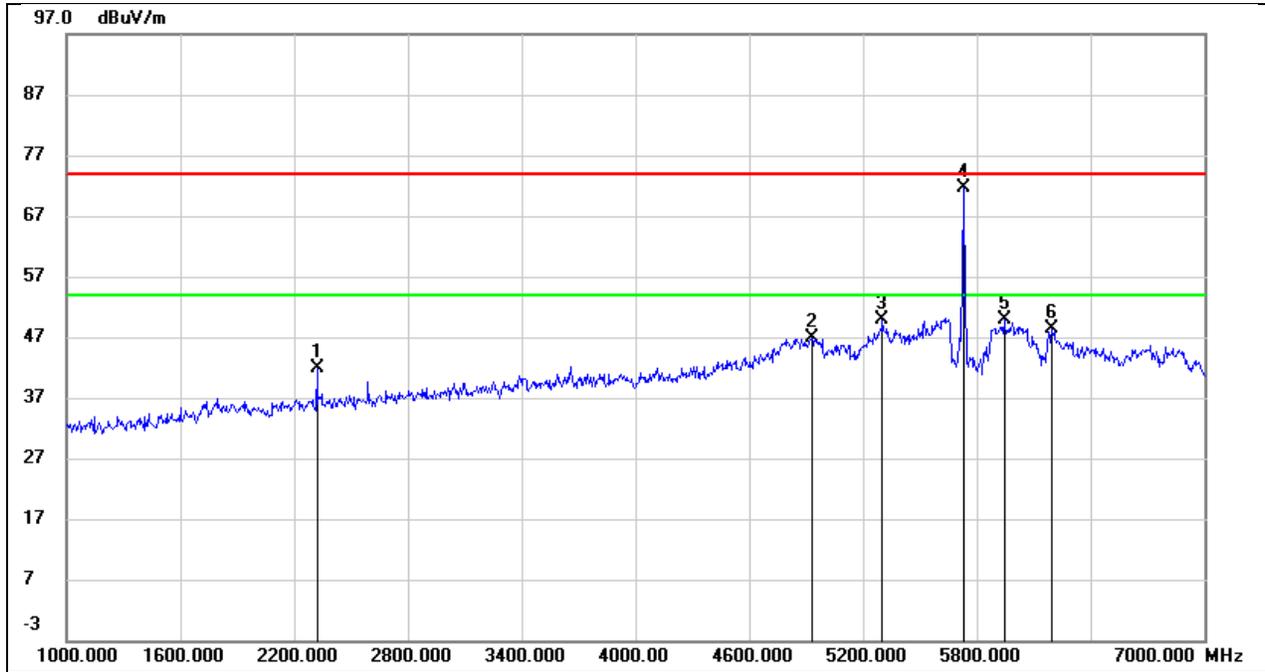


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2320.000	49.87	-8.02	41.85	74.00	-32.15	peak
2	4930.000	44.13	2.81	46.94	74.00	-27.06	peak
3	5302.000	45.92	3.86	49.78	74.00	-24.22	peak
4	5730.500	66.27	5.42	71.69	/	/	Fundamental
5	5944.000	43.35	6.44	49.79	74.00	-24.21	peak
6	6196.000	40.92	7.39	48.31	74.00	-25.69	peak

Test Mode:	SRD 10M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

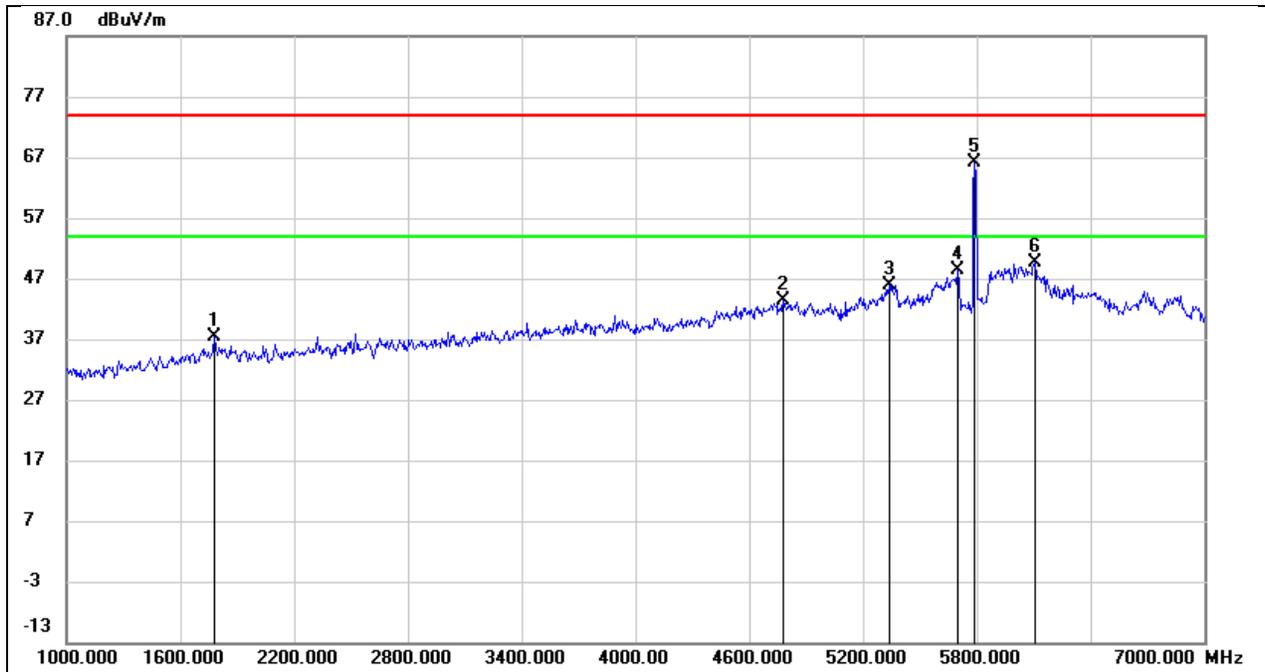


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1780.000	47.35	-10.05	37.30	74.00	-36.70	peak
2	4780.000	42.43	0.90	43.33	74.00	-30.67	peak
3	5338.000	43.03	2.81	45.84	74.00	-28.16	peak
4	5698.000	44.15	4.18	48.33	74.00	-25.67	peak
5	5787.500	61.54	4.58	66.12	/	/	Fundamental
6	6106.000	43.58	6.12	49.70	74.00	-24.30	peak

Test Mode:	SRD 10M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

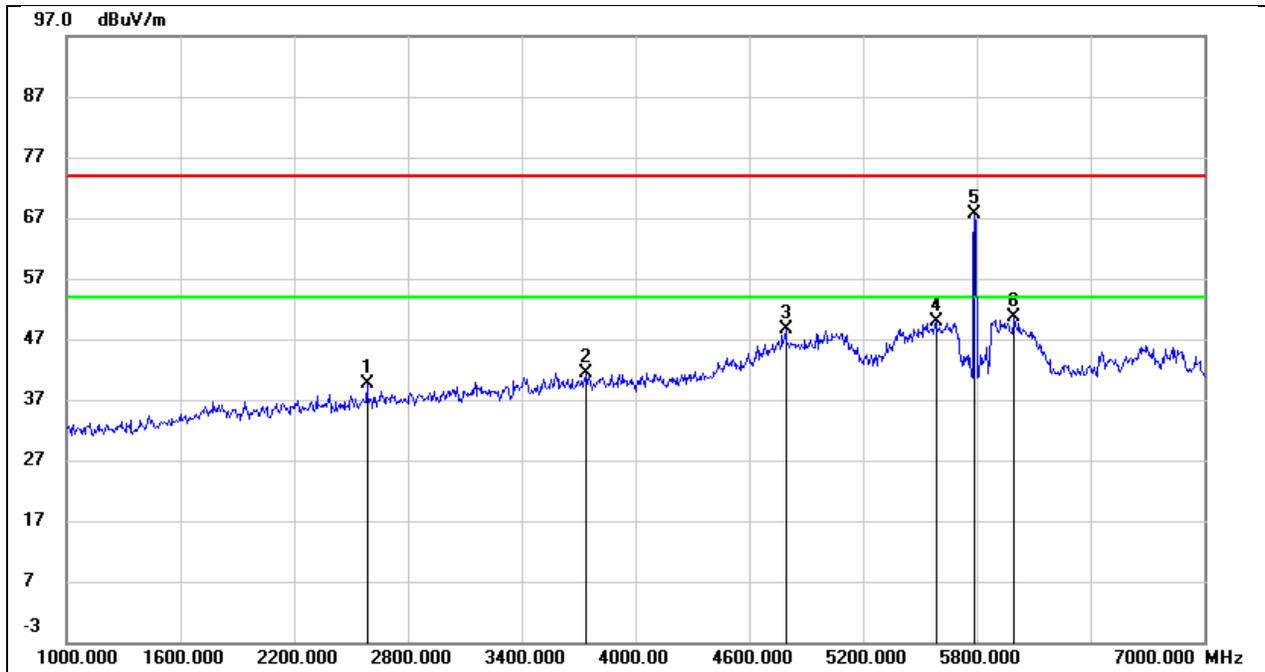


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2584.000	46.42	-6.89	39.53	74.00	-34.47	peak
2	3742.000	43.51	-2.03	41.48	74.00	-32.52	peak
3	4792.000	46.48	2.03	48.51	74.00	-25.49	peak
4	5584.000	44.91	4.86	49.77	74.00	-24.23	peak
5	5787.500	62.03	5.67	67.70	/	/	Fundamental
6	5998.000	43.81	6.72	50.53	74.00	-23.47	peak

Test Mode:	SRD 10M	Frequency(MHz):	5844.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

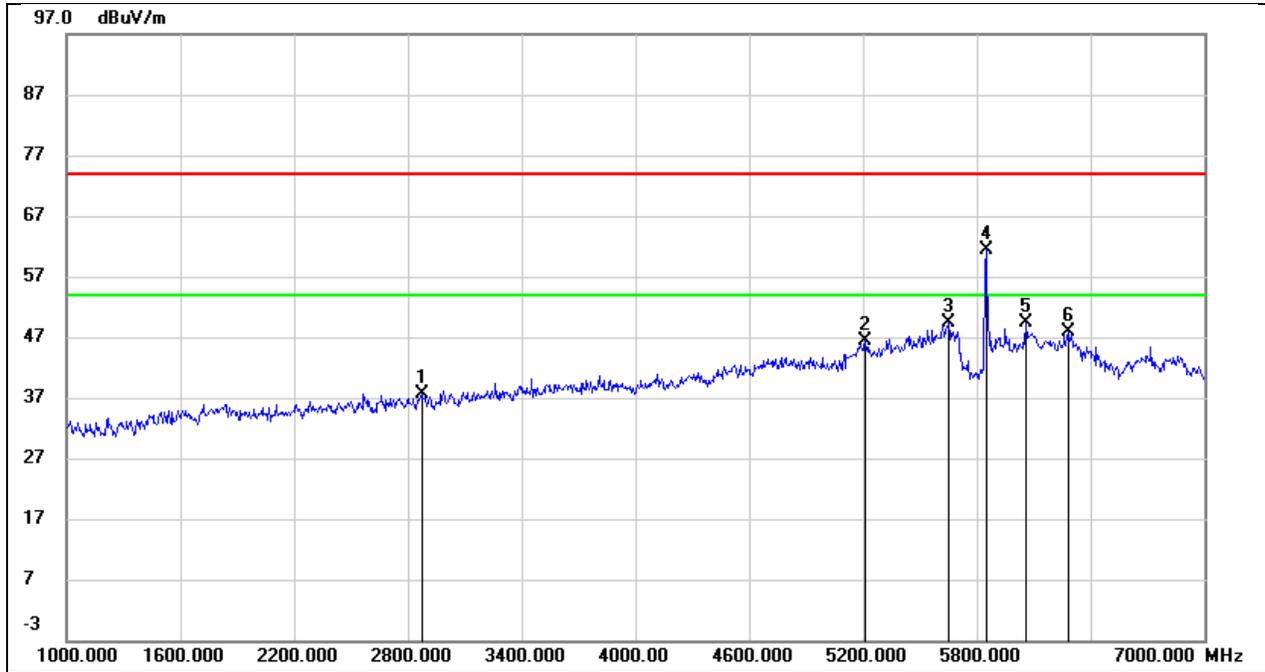

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2872.000	44.19	-6.50	37.69	74.00	-36.31	peak
2	5212.000	44.20	2.27	46.47	74.00	-27.53	peak
3	5650.000	45.33	3.97	49.30	74.00	-24.70	peak
4	5844.500	56.46	4.89	61.35	/	/	Fundamental
5	6058.000	43.45	5.95	49.40	74.00	-24.60	peak
6	6280.000	41.57	6.25	47.82	74.00	-26.18	peak


Test Mode:	SRD 10M	Frequency(MHz):	5844.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

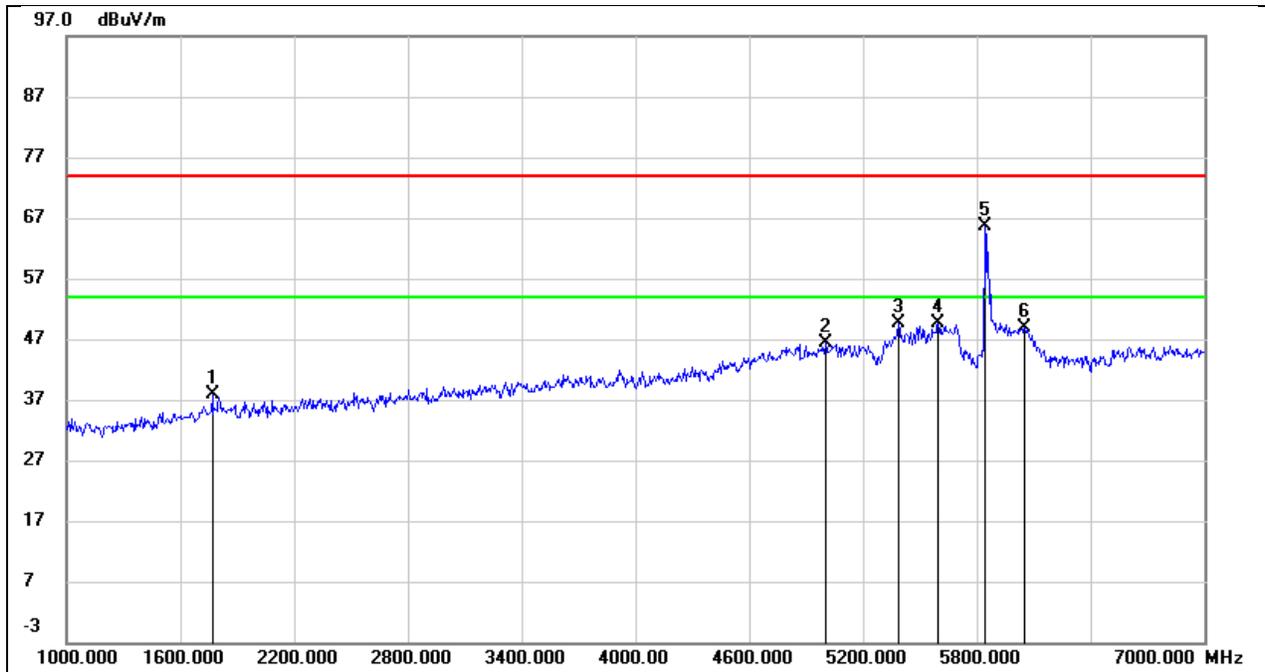

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1768.000	47.42	-9.61	37.81	74.00	-36.19	peak
2	5002.000	43.17	3.20	46.37	74.00	-27.63	peak
3	5386.000	45.33	4.22	49.55	74.00	-24.45	peak
4	5596.000	44.70	4.90	49.60	74.00	-24.40	peak
5	5844.500	59.64	5.92	65.56	/	/	Fundamental
6	6052.000	41.88	6.90	48.78	74.00	-25.22	peak


8.3. SPURIOUS EMISSIONS(7 GHZ~18 GHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5157
Polarity:	Horizontal	Test Voltage:	DC 7.16V

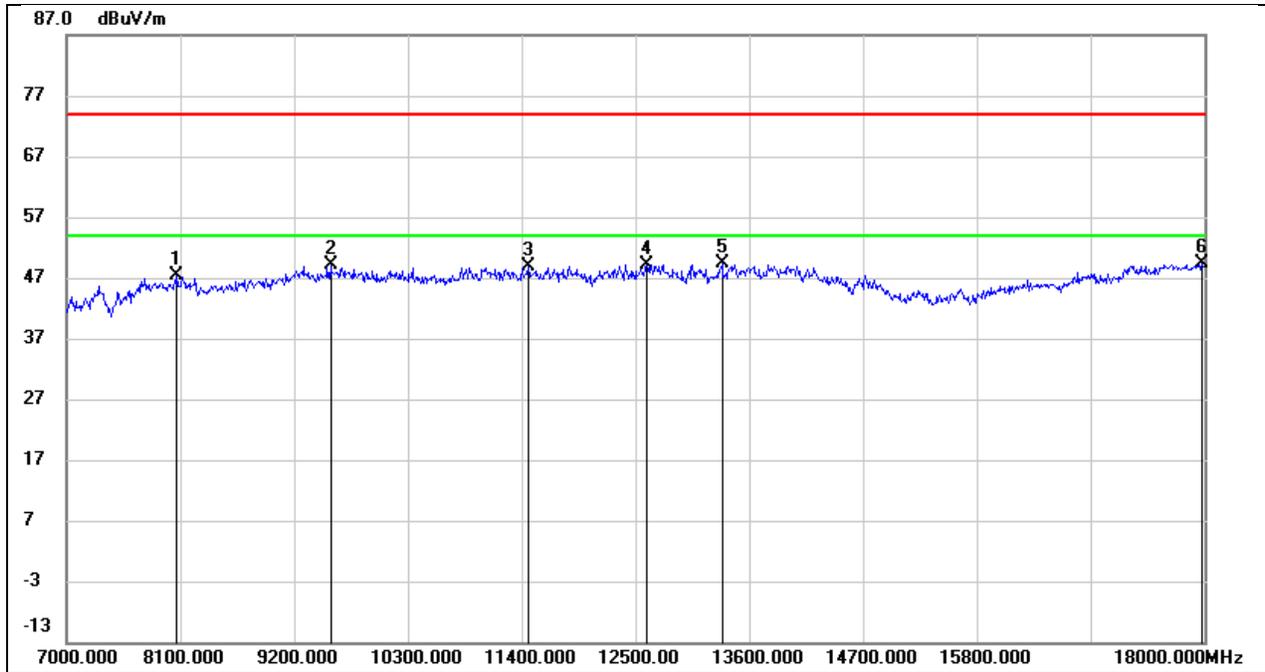


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8067.000	39.17	8.16	47.33	74.00	-26.67	peak
2	9552.000	36.00	13.12	49.12	74.00	-24.88	peak
3	11466.000	31.07	17.72	48.79	74.00	-25.21	peak
4	12610.000	29.94	19.22	49.16	74.00	-24.84	peak
5	13336.000	28.09	21.28	49.37	74.00	-24.63	peak
6	17978.000	20.27	29.18	49.45	74.00	-24.55	peak

Test Mode:	SRD 10M	Frequency(MHz):	5157
Polarity:	Vertical	Test Voltage:	DC 7.16V

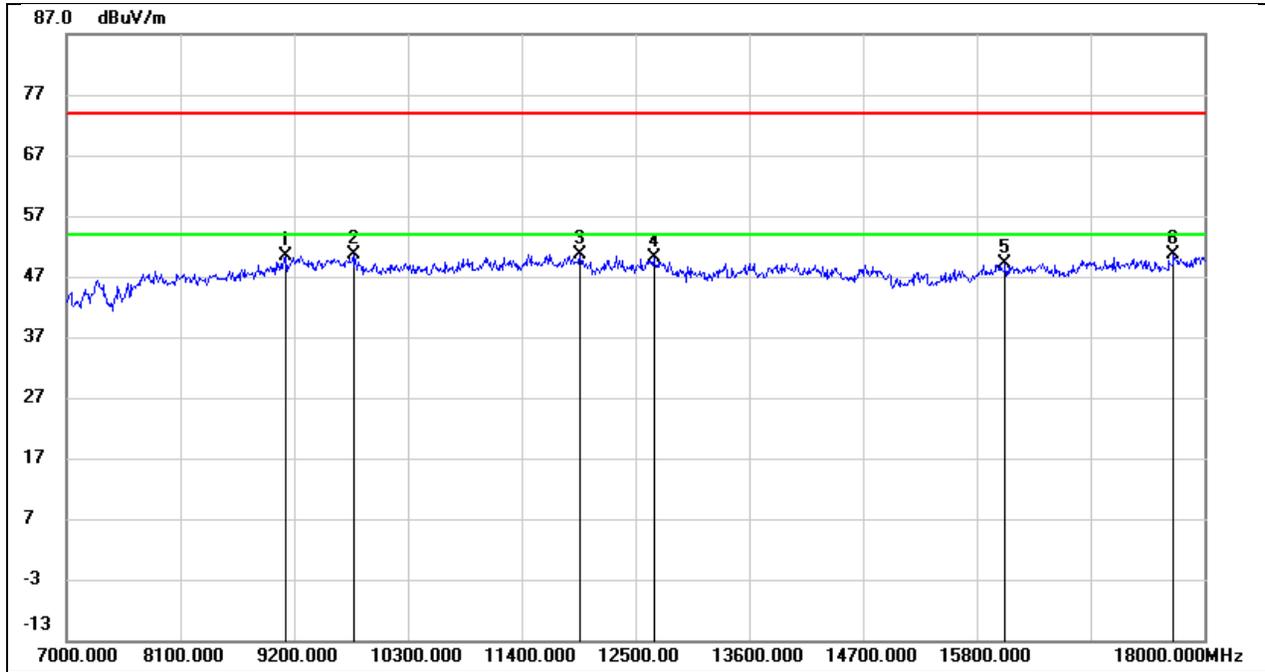


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	38.93	11.43	50.36	74.00	-23.64	peak
2	9772.000	37.28	13.35	50.63	74.00	-23.37	peak
3	11961.000	33.14	17.46	50.60	74.00	-23.40	peak
4	12676.000	31.58	18.46	50.04	74.00	-23.96	peak
5	16075.000	25.72	23.34	49.06	74.00	-24.94	peak
6	17703.000	25.13	25.45	50.58	74.00	-23.42	peak

Test Mode:	SRD 10M	Frequency(MHz):	5201
Polarity:	Horizontal	Test Voltage:	DC 7.16V

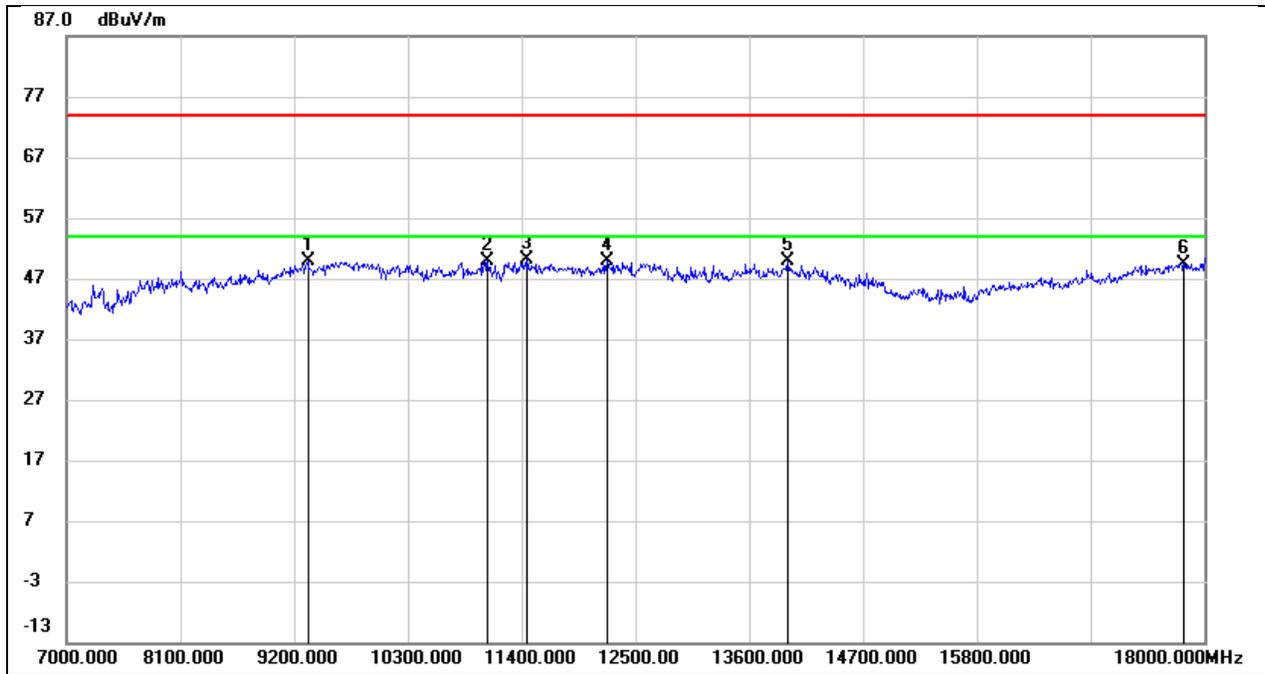


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9332.000	37.95	11.92	49.87	74.00	-24.13	peak
2	11070.000	34.48	15.36	49.84	74.00	-24.16	peak
3	11455.000	32.59	17.65	50.24	74.00	-23.76	peak
4	12225.000	31.03	18.87	49.90	74.00	-24.10	peak
5	13974.000	26.48	23.31	49.79	74.00	-24.21	peak
6	17802.000	22.19	27.31	49.50	74.00	-24.50	peak

Test Mode:	SRD 10M	Frequency(MHz):	5201
Polarity:	Vertical	Test Voltage:	DC 7.16V

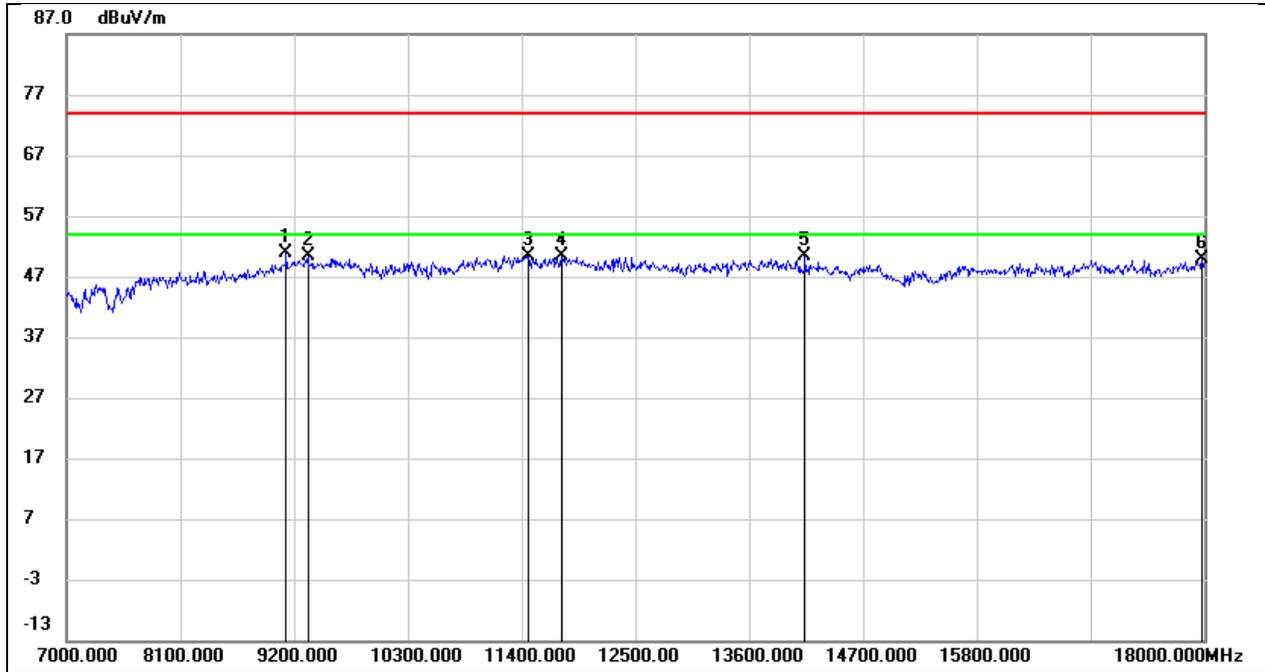


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9123.000	39.52	11.43	50.95	74.00	-23.05	peak
2	9332.000	38.30	12.06	50.36	74.00	-23.64	peak
3	11466.000	34.14	16.26	50.40	74.00	-23.60	peak
4	11785.000	33.44	16.85	50.29	74.00	-23.71	peak
5	14139.000	28.65	21.61	50.26	74.00	-23.74	peak
6	17978.000	22.90	27.08	49.98	74.00	-24.02	peak

Test Mode:	SRD 10M	Frequency(MHz):	5245
Polarity:	Horizontal	Test Voltage:	DC 7.16V

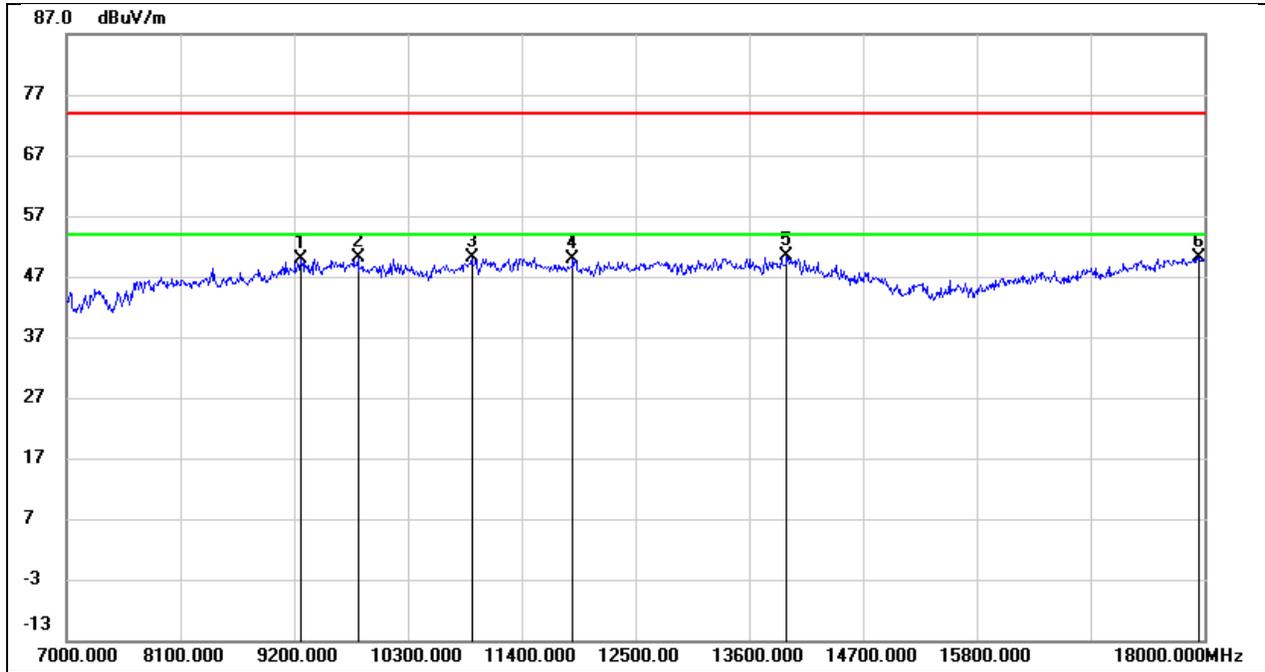


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9266.000	38.22	11.70	49.92	74.00	-24.08	peak
2	9816.000	36.34	13.75	50.09	74.00	-23.91	peak
3	10916.000	35.40	14.70	50.10	74.00	-23.90	peak
4	11895.000	31.58	18.39	49.97	74.00	-24.03	peak
5	13963.000	27.24	23.26	50.50	74.00	-23.50	peak
6	17945.000	21.41	28.83	50.24	74.00	-23.76	peak

Test Mode:	SRD 10M	Frequency(MHz):	5245
Polarity:	Vertical	Test Voltage:	DC 7.16V

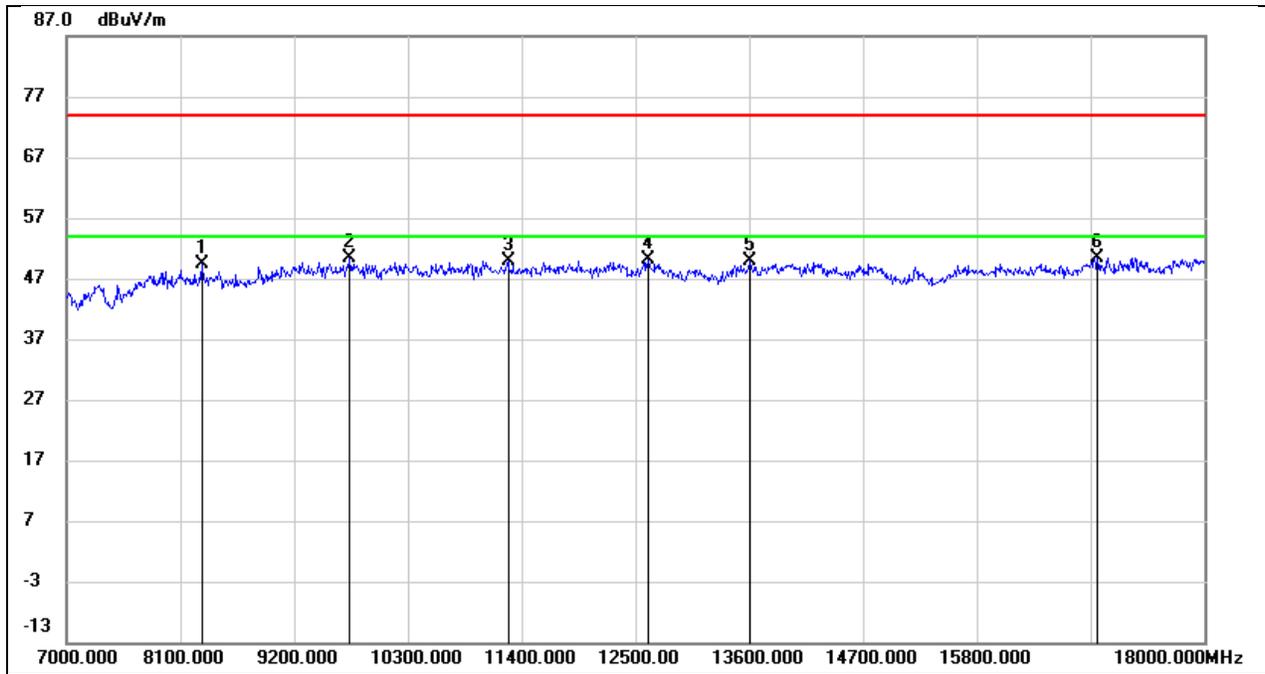


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8309.000	40.30	9.00	49.30	74.00	-24.70	peak
2	9739.000	37.08	13.33	50.41	74.00	-23.59	peak
3	11268.000	34.49	15.37	49.86	74.00	-24.14	peak
4	12621.000	31.77	18.29	50.06	74.00	-23.94	peak
5	13600.000	29.57	20.38	49.95	74.00	-24.05	peak
6	16966.000	26.25	24.17	50.42	74.00	-23.58	peak

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

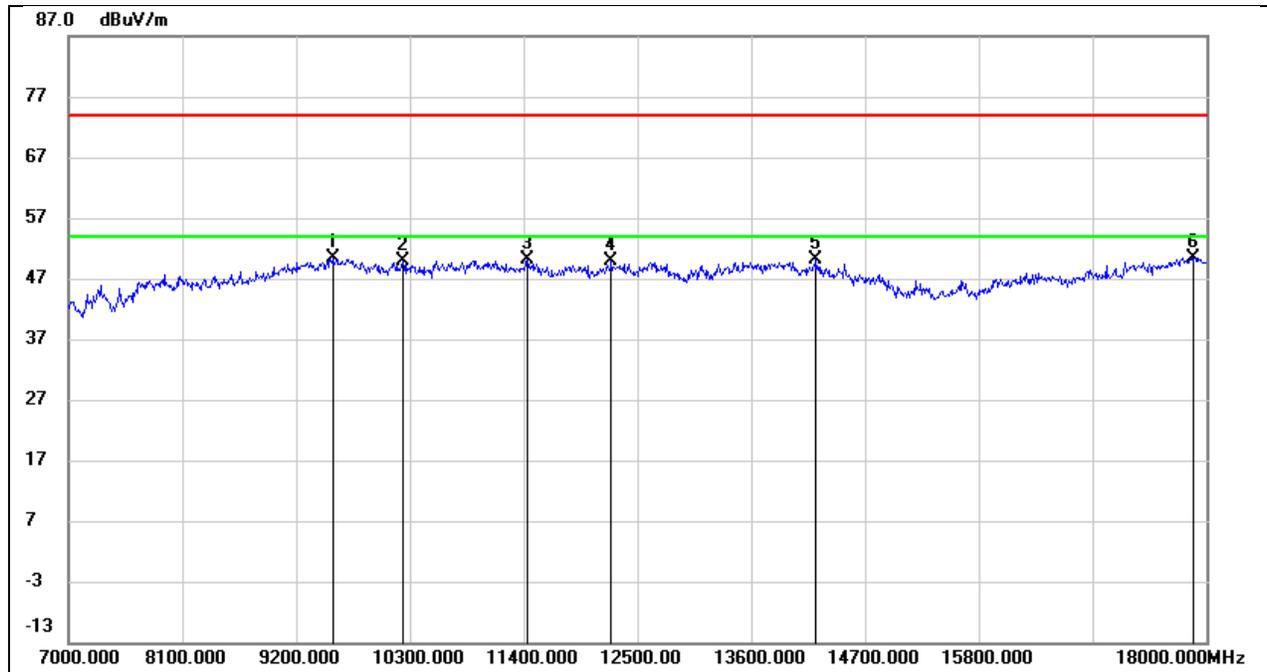


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9552.000	37.27	13.12	50.39	74.00	-23.61	peak
2	10234.000	36.79	13.18	49.97	74.00	-24.03	peak
3	11433.000	32.61	17.54	50.15	74.00	-23.85	peak
4	12247.000	30.87	18.90	49.77	74.00	-24.23	peak
5	14227.000	27.75	22.42	50.17	74.00	-23.83	peak
6	17879.000	22.33	28.12	50.45	74.00	-23.55	peak

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

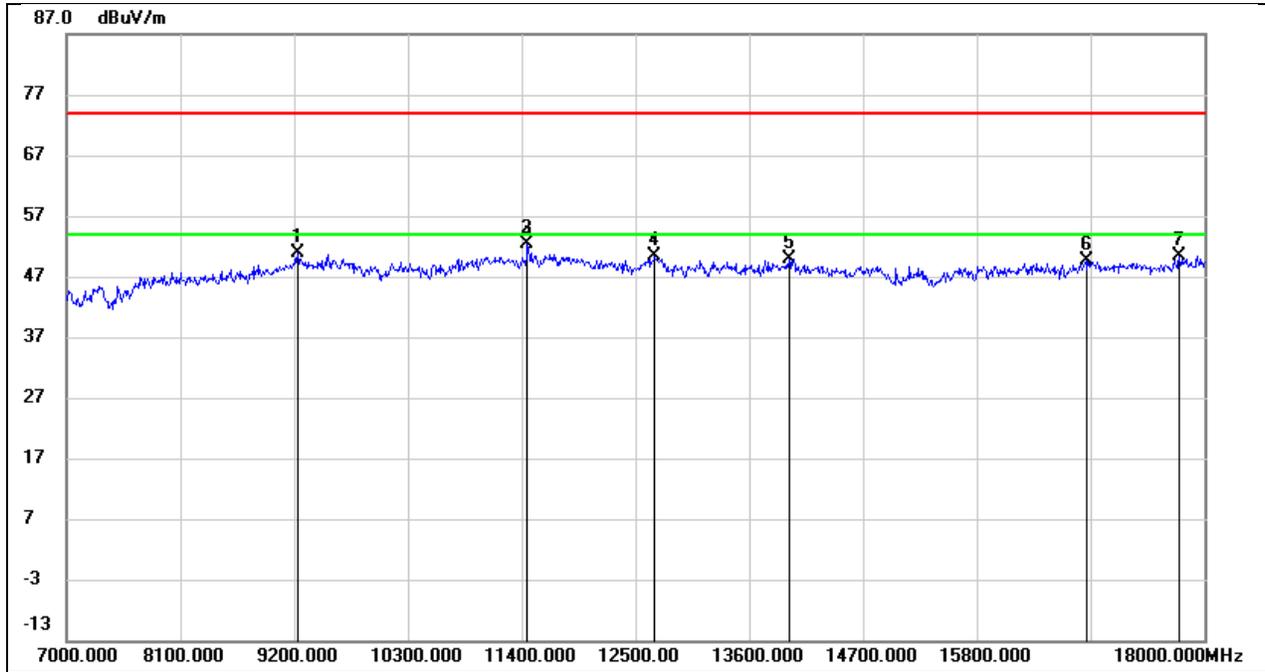


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	9233.000	39.11	11.81	50.92	74.00	-23.08	peak
2	11455.000	36.08	16.21	52.29	74.00	-21.71	peak
3	11455.000	36.08	16.21	52.29	54.00	-1.71	AVG
4	12687.000	31.88	18.50	50.38	74.00	-23.62	peak
5	13985.000	28.04	21.75	49.79	74.00	-24.21	peak
6	16856.000	25.69	23.97	49.66	74.00	-24.34	peak
7	17758.000	24.72	25.74	50.46	74.00	-23.54	peak

Test Mode:	SRD 10M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

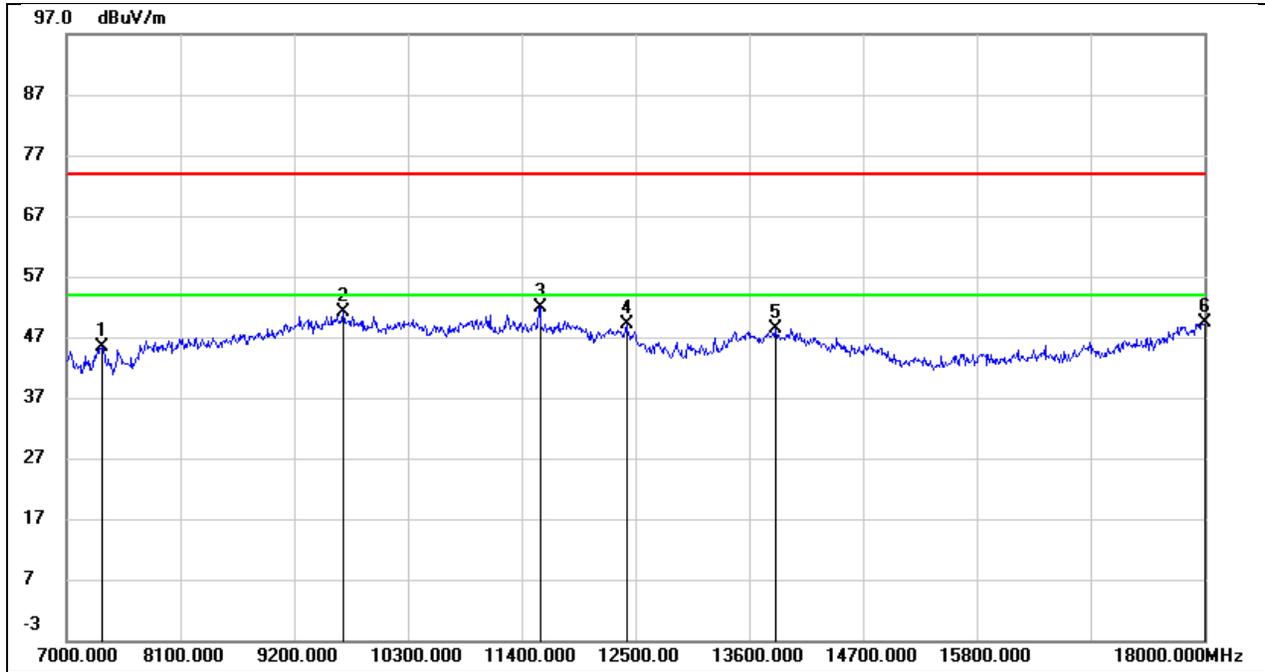


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.71	7.75	45.46	74.00	-28.54	peak
2	9673.000	37.53	13.55	51.08	74.00	-22.92	peak
3	11576.000	33.79	18.11	51.90	74.00	-22.10	peak
4	12412.000	30.06	19.06	49.12	74.00	-24.88	peak
5	13853.000	25.58	22.83	48.41	74.00	-25.59	peak
6	18000.000	19.99	29.41	49.40	74.00	-24.60	peak

Test Mode:	SRD 10M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

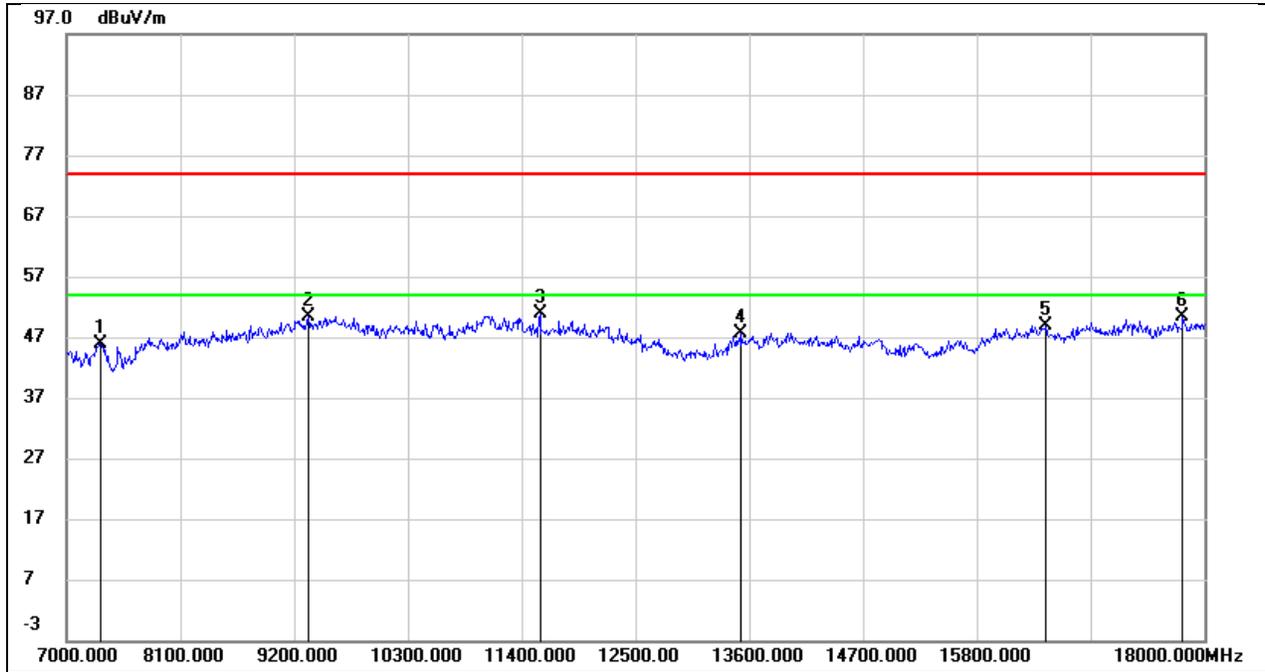


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.61	8.37	45.98	74.00	-28.02	peak
2	9343.000	38.31	12.08	50.39	74.00	-23.61	peak
3	11576.000	34.25	16.67	50.92	74.00	-23.08	peak
4	13523.000	27.44	20.23	47.67	74.00	-26.33	peak
5	16471.000	25.43	23.48	48.91	74.00	-25.09	peak
6	17791.000	24.56	25.91	50.47	74.00	-23.53	peak

Test Mode:	SRD 10M	Frequency(MHz):	5844.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

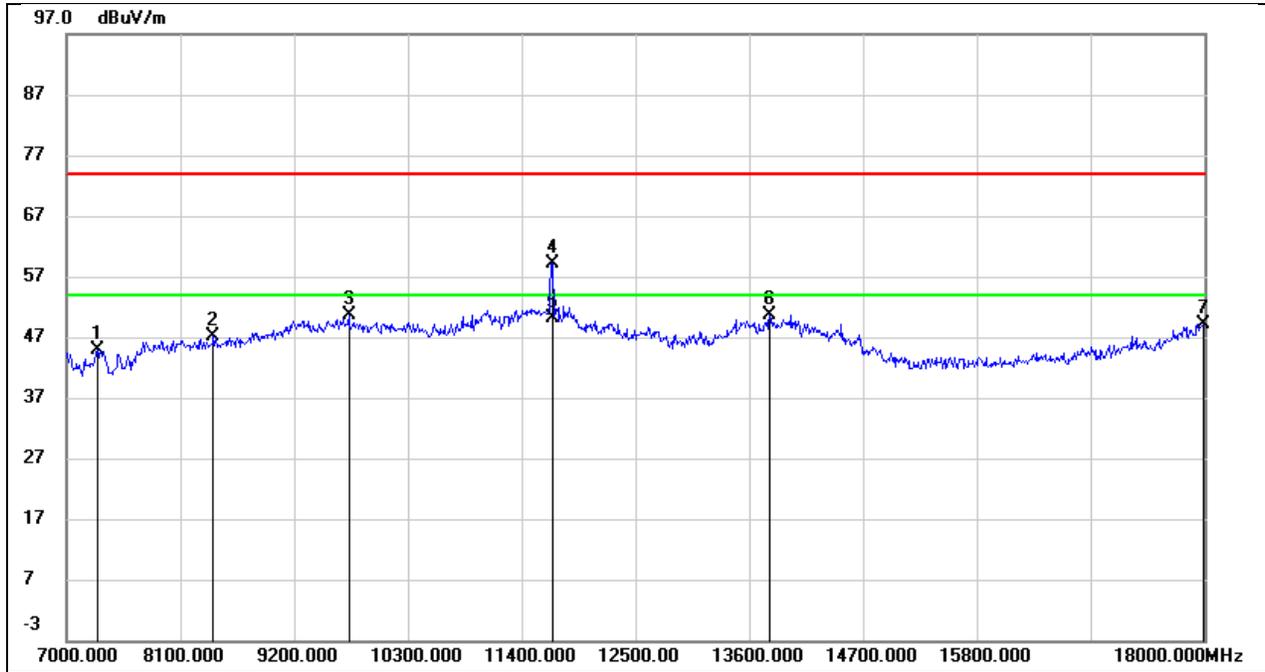


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.06	7.71	44.77	74.00	-29.23	peak
2	8419.000	38.72	8.53	47.25	74.00	-26.75	peak
3	9728.000	36.91	13.65	50.56	74.00	-23.44	peak
4	11697.000	40.96	18.16	59.12	74.00	-14.88	peak
5	11697.000	31.98	18.16	50.14	54.00	-3.86	AVG
6	13798.000	28.10	22.62	50.72	74.00	-23.28	peak
7	17989.000	19.92	29.29	49.21	74.00	-24.79	peak

Test Mode:	SRD 10M	Frequency(MHz):	5844.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

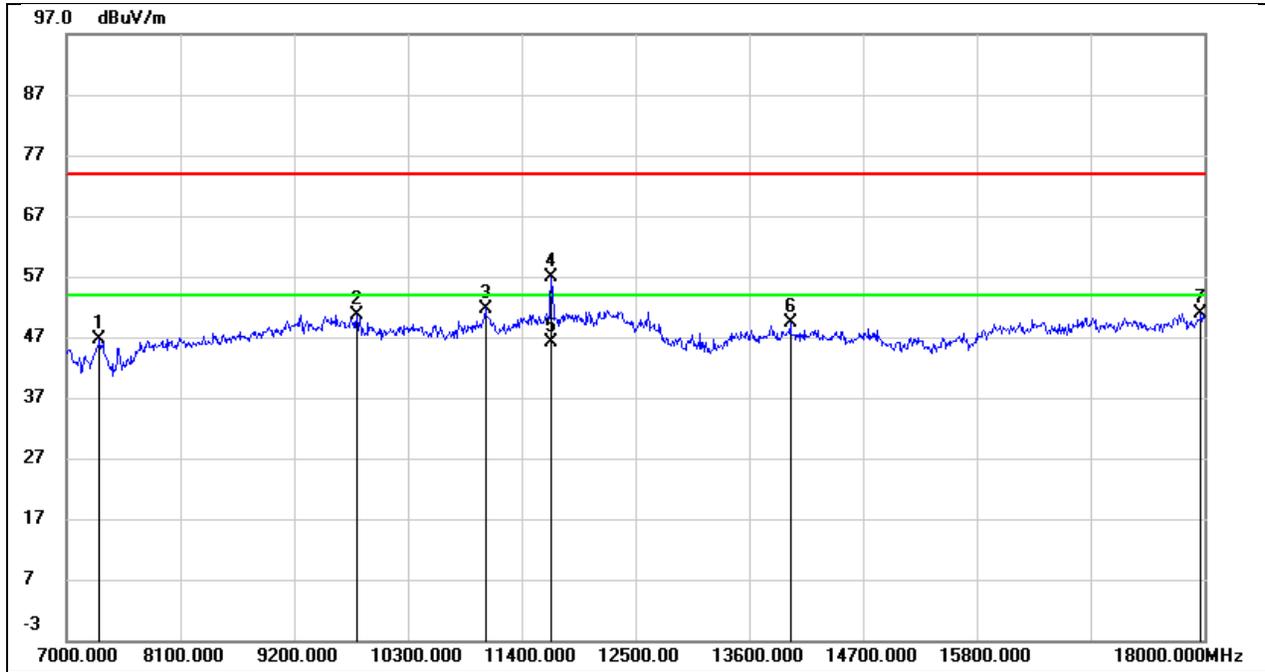


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.22	8.37	46.59	74.00	-27.41	peak
2	9805.000	37.40	13.35	50.75	74.00	-23.25	peak
3	11048.000	37.38	14.37	51.75	74.00	-22.25	peak
4	11686.000	40.00	16.81	56.81	74.00	-17.19	peak
5	11686.000	29.41	16.81	46.22	54.00	-7.78	AVG
6	13996.000	27.55	21.79	49.34	74.00	-24.66	peak
7	17967.000	23.95	27.00	50.95	74.00	-23.05	peak

Test Mode:	SRD 20M	Frequency(MHz):	5161
Polarity:	Horizontal	Test Voltage:	DC 7.16V

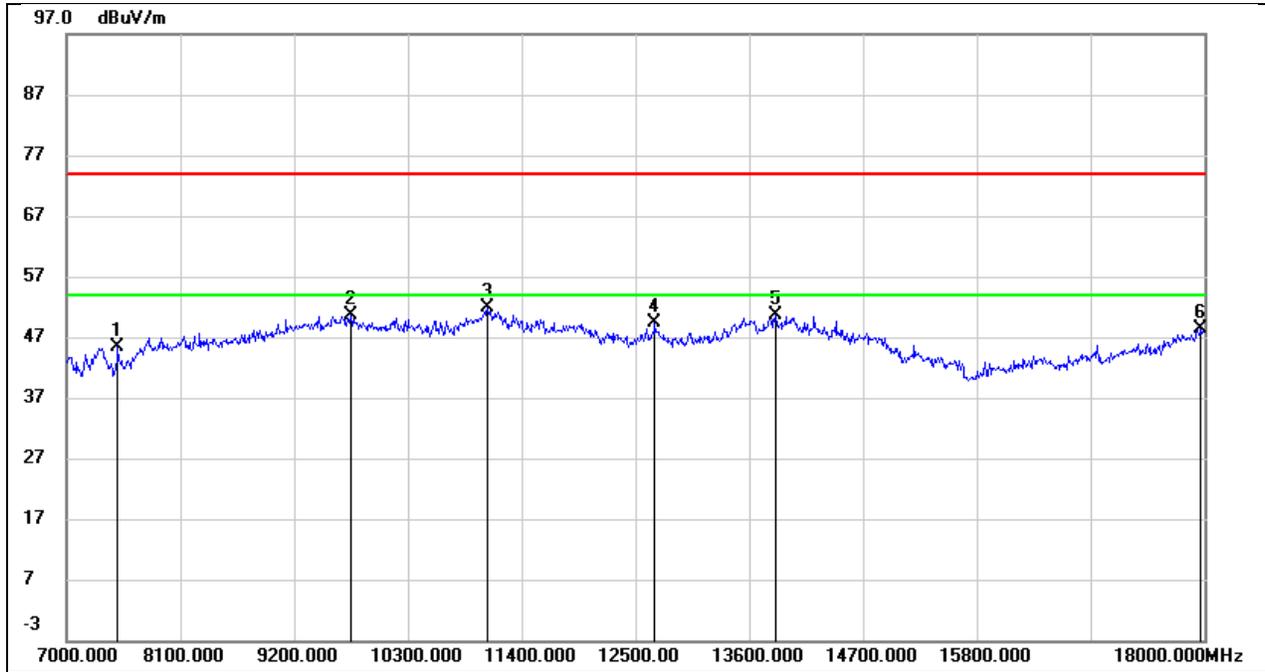


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.48	7.89	45.37	74.00	-28.63	peak
2	9750.000	36.93	13.69	50.62	74.00	-23.38	peak
3	11070.000	36.60	15.36	51.96	74.00	-22.04	peak
4	12687.000	29.90	19.51	49.41	74.00	-24.59	peak
5	13853.000	27.73	22.83	50.56	74.00	-23.44	peak
6	17967.000	19.32	29.06	48.38	74.00	-25.62	peak

Test Mode:	SRD 20M	Frequency(MHz):	5161
Polarity:	Vertical	Test Voltage:	DC 7.16V

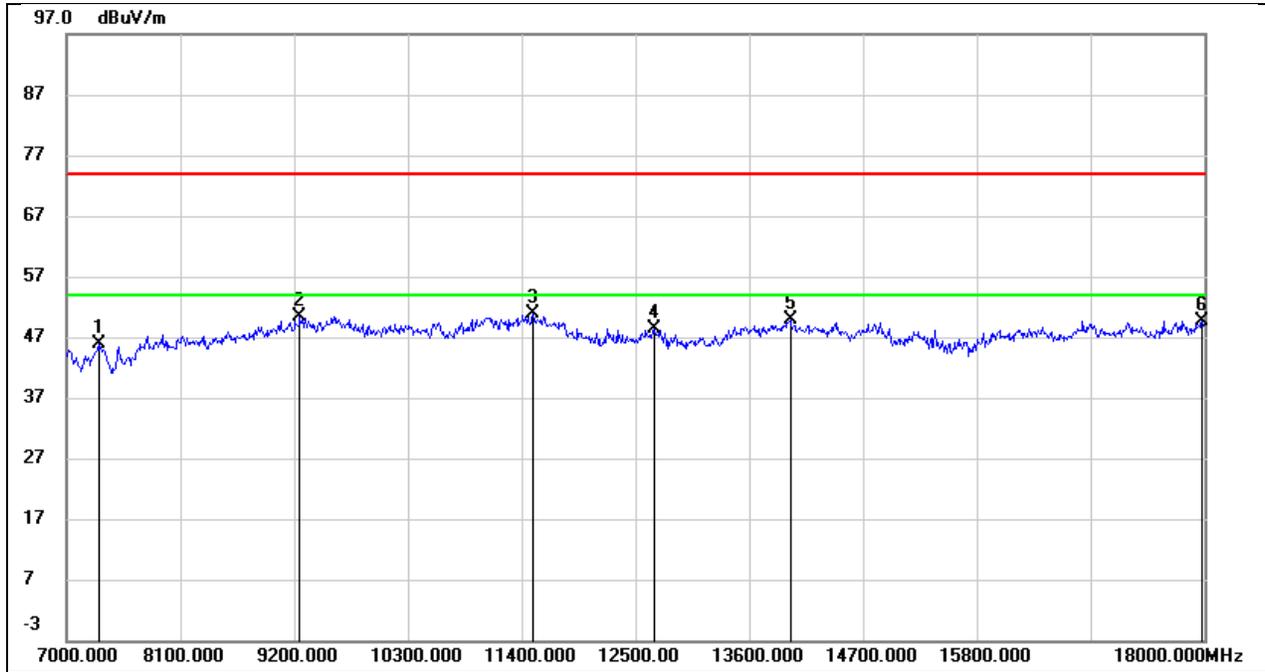


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.43	8.36	45.79	74.00	-28.21	peak
2	9255.000	38.61	11.86	50.47	74.00	-23.53	peak
3	11510.000	34.53	16.42	50.95	74.00	-23.05	peak
4	12687.000	29.98	18.50	48.48	74.00	-25.52	peak
5	13996.000	28.09	21.79	49.88	74.00	-24.12	peak
6	17978.000	22.55	27.08	49.63	74.00	-24.37	peak

Test Mode:	SRD 20M	Frequency(MHz):	5201
Polarity:	Horizontal	Test Voltage:	DC 7.16V

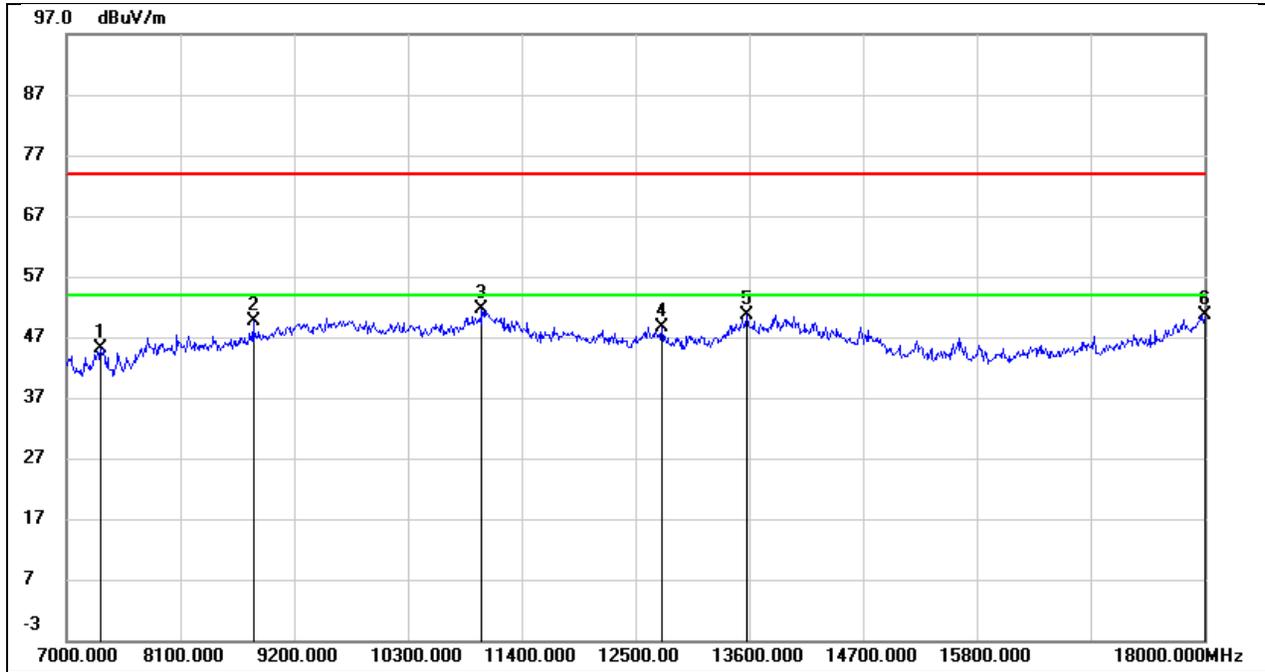


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.34	7.73	45.07	74.00	-28.93	peak
2	8804.000	40.10	9.59	49.69	74.00	-24.31	peak
3	11015.000	36.54	15.04	51.58	74.00	-22.42	peak
4	12753.000	28.83	19.75	48.58	74.00	-25.42	peak
5	13578.000	28.69	22.03	50.72	74.00	-23.28	peak
6	18000.000	21.24	29.41	50.65	74.00	-23.35	peak

Test Mode:	SRD 20M	Frequency(MHz):	5201
Polarity:	Vertical	Test Voltage:	DC 7.16V

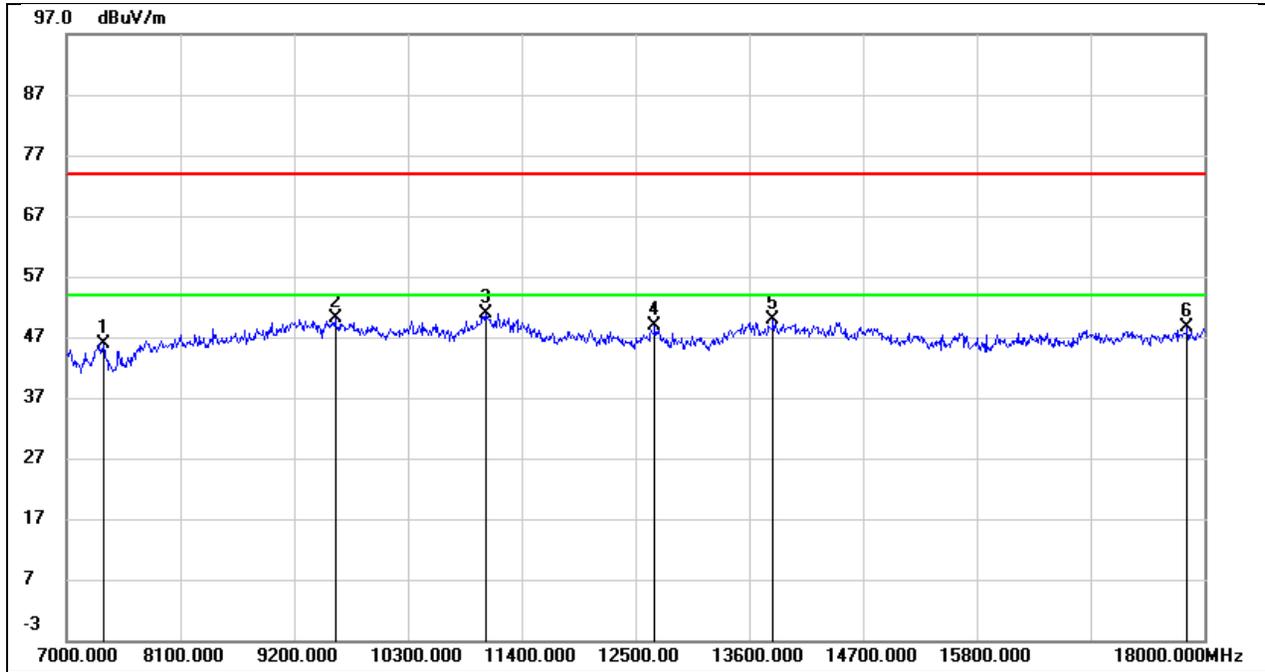


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7363.000	37.53	8.37	45.90	74.00	-28.10	peak
2	9596.000	36.97	13.26	50.23	74.00	-23.77	peak
3	11048.000	36.53	14.37	50.90	74.00	-23.10	peak
4	12687.000	30.38	18.50	48.88	74.00	-25.12	peak
5	13831.000	28.73	21.11	49.84	74.00	-24.16	peak
6	17835.000	22.46	26.18	48.64	74.00	-25.36	peak

Test Mode:	SRD 20M	Frequency(MHz):	5240
Polarity:	Horizontal	Test Voltage:	DC 7.16V

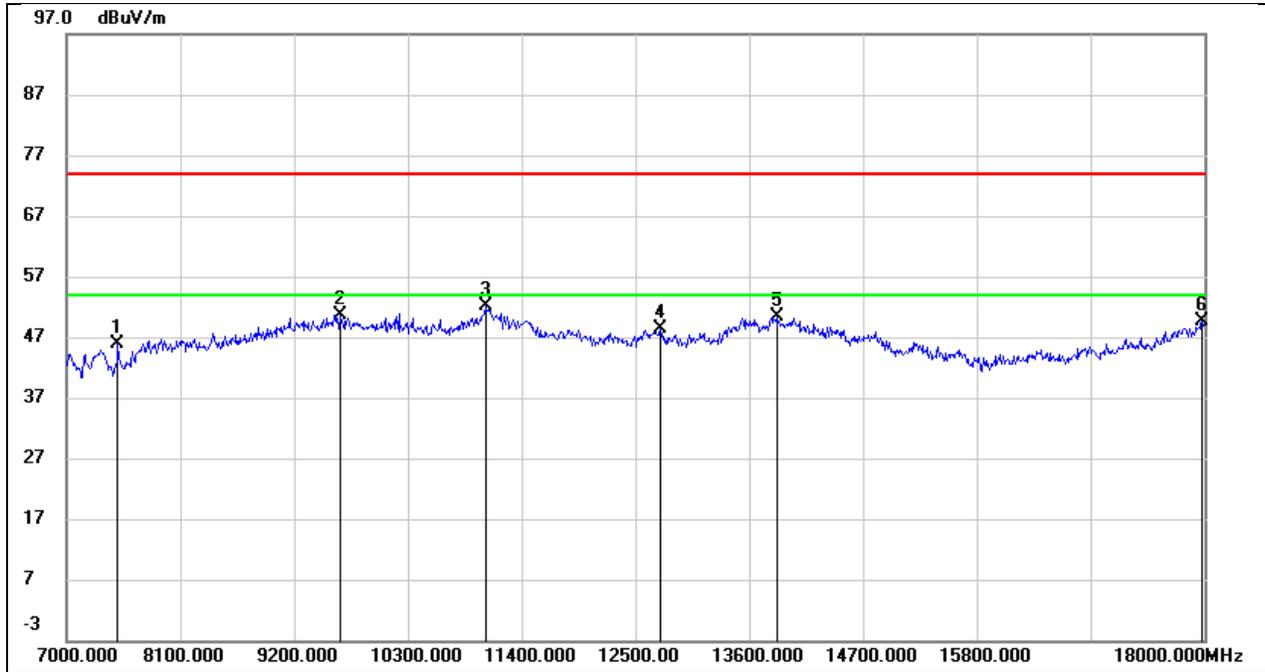


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	38.09	7.89	45.98	74.00	-28.02	peak
2	9640.000	37.10	13.50	50.60	74.00	-23.40	peak
3	11048.000	36.93	15.24	52.17	74.00	-21.83	peak
4	12742.000	28.56	19.73	48.29	74.00	-25.71	peak
5	13864.000	27.47	22.87	50.34	74.00	-23.66	peak
6	17978.000	20.54	29.18	49.72	74.00	-24.28	peak

Test Mode:	SRD 20M	Frequency(MHz):	5240
Polarity:	Vertical	Test Voltage:	DC 7.16V

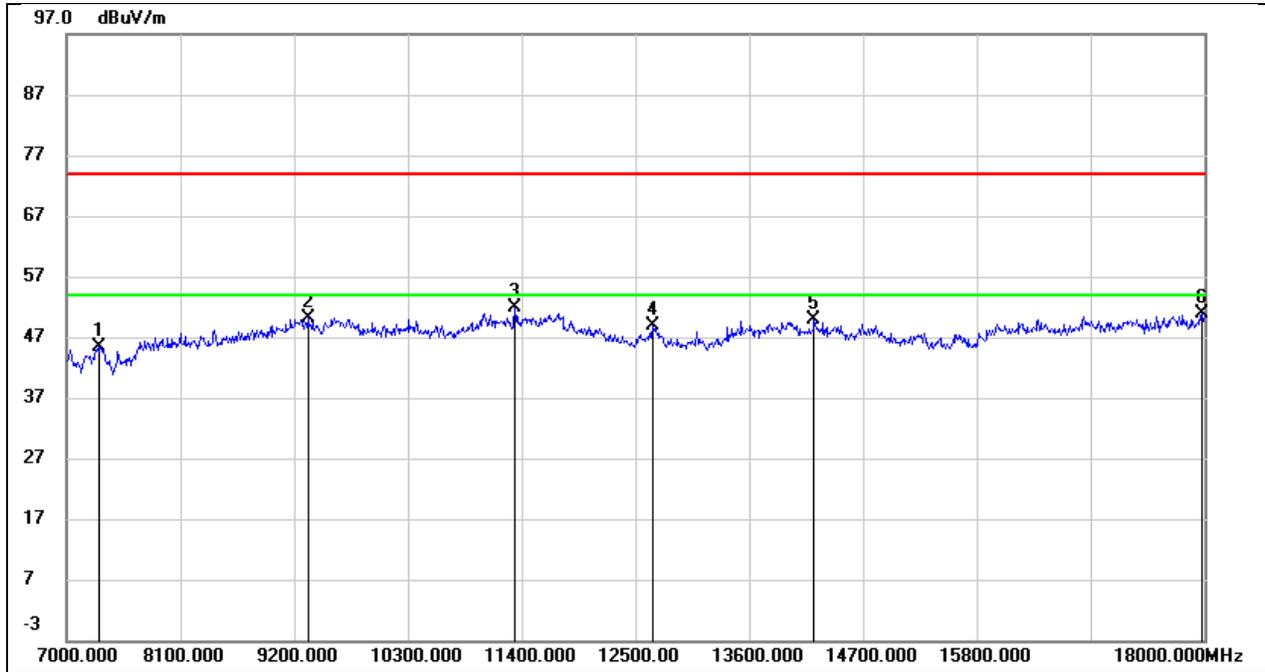


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.90	8.37	45.27	74.00	-28.73	peak
2	9332.000	38.19	12.06	50.25	74.00	-23.75	peak
3	11334.000	36.06	15.70	51.76	74.00	-22.24	peak
4	12665.000	30.46	18.42	48.88	74.00	-25.12	peak
5	14227.000	28.43	21.41	49.84	74.00	-24.16	peak
6	17978.000	23.68	27.08	50.76	74.00	-23.24	peak

Test Mode:	SRD 20M	Frequency(MHz):	5735.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

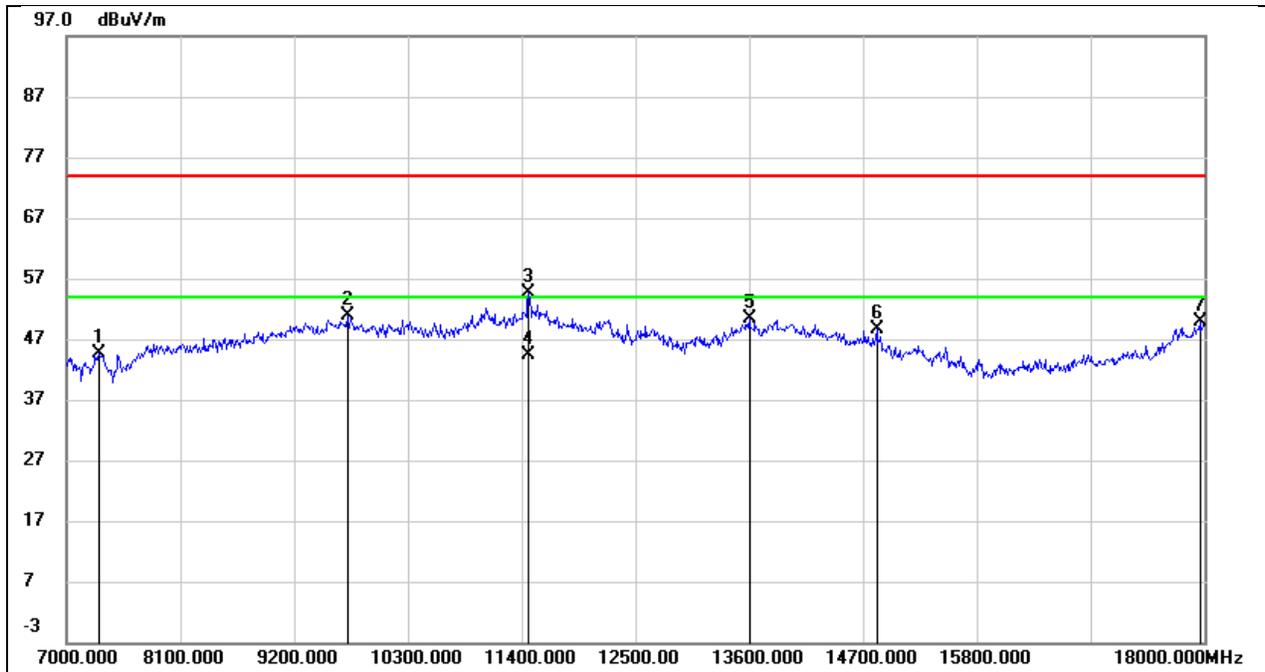


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	36.89	7.71	44.60	74.00	-29.40	peak
2	9717.000	37.24	13.63	50.87	74.00	-23.13	peak
3	11466.000	36.91	17.72	54.63	74.00	-19.37	peak
4	11466.000	26.54	17.72	44.26	54.00	-9.74	AVG
5	13600.000	28.21	22.06	50.27	74.00	-23.73	peak
6	14832.000	28.79	19.93	48.72	74.00	-25.28	peak
7	17956.000	20.88	28.94	49.82	74.00	-24.18	peak

Test Mode:	SRD 20M	Frequency(MHz):	5735.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

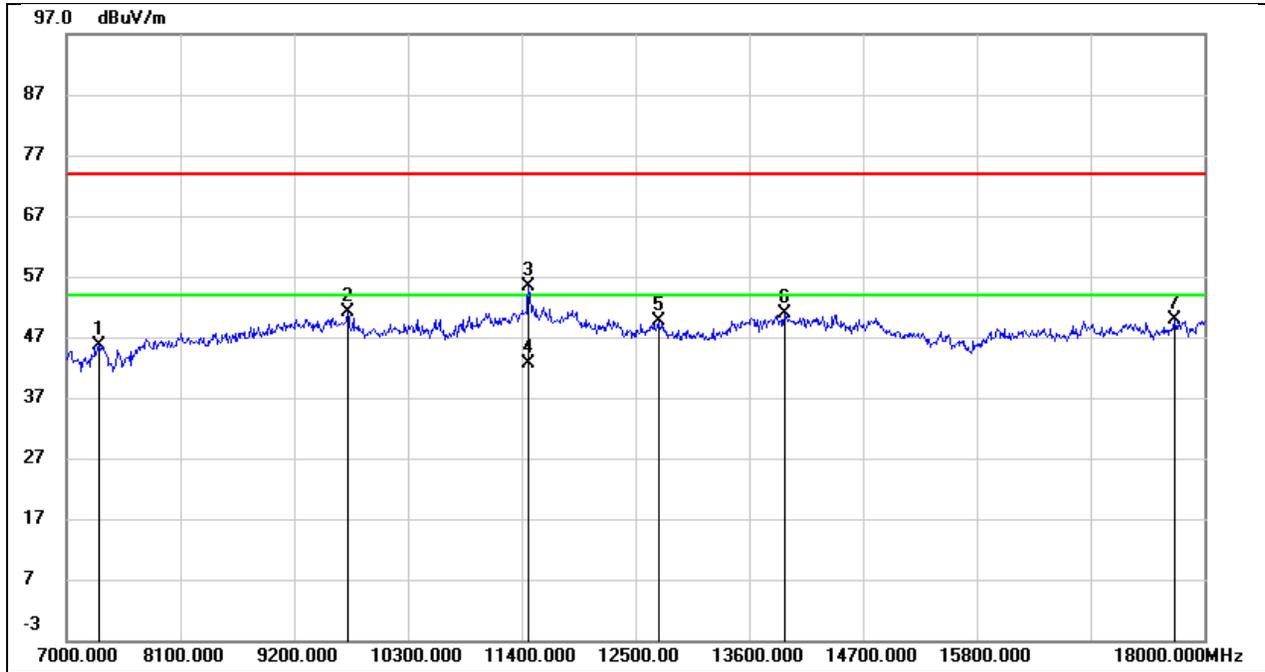


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.31	8.36	45.67	74.00	-28.33	peak
2	9717.000	37.70	13.32	51.02	74.00	-22.98	peak
3	11466.000	39.03	16.26	55.29	74.00	-18.71	peak
4	11466.000	26.25	16.26	42.51	54.00	-11.49	AVG
5	12720.000	31.00	18.61	49.61	74.00	-24.39	peak
6	13941.000	29.34	21.57	50.91	74.00	-23.09	peak
7	17714.000	24.43	25.51	49.94	74.00	-24.06	peak

Test Mode:	SRD 20M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

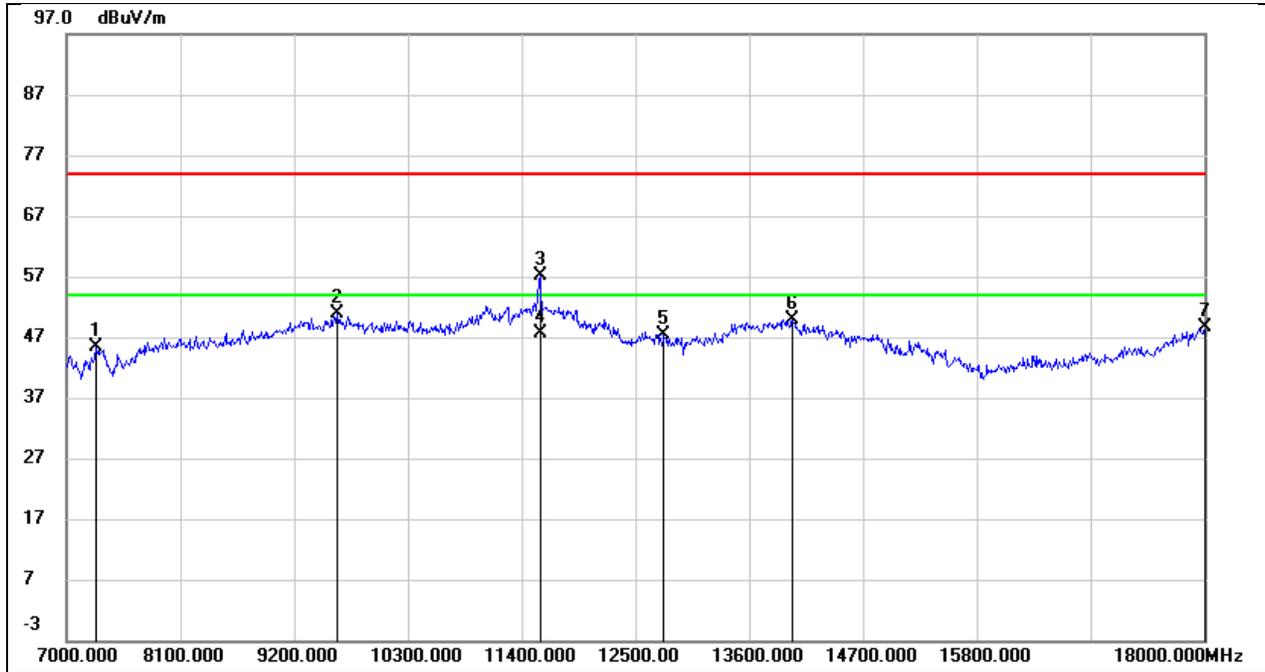


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.73	7.69	45.42	74.00	-28.58	peak
2	9618.000	37.42	13.46	50.88	74.00	-23.12	peak
3	11576.000	38.92	18.11	57.03	74.00	-16.97	peak
4	11576.000	29.63	18.11	47.74	54.00	-6.26	AVG
5	12775.000	27.45	19.85	47.30	74.00	-26.70	peak
6	14018.000	26.50	23.34	49.84	74.00	-24.16	peak
7	18000.000	19.22	29.41	48.63	74.00	-25.37	peak

Test Mode:	SRD 20M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

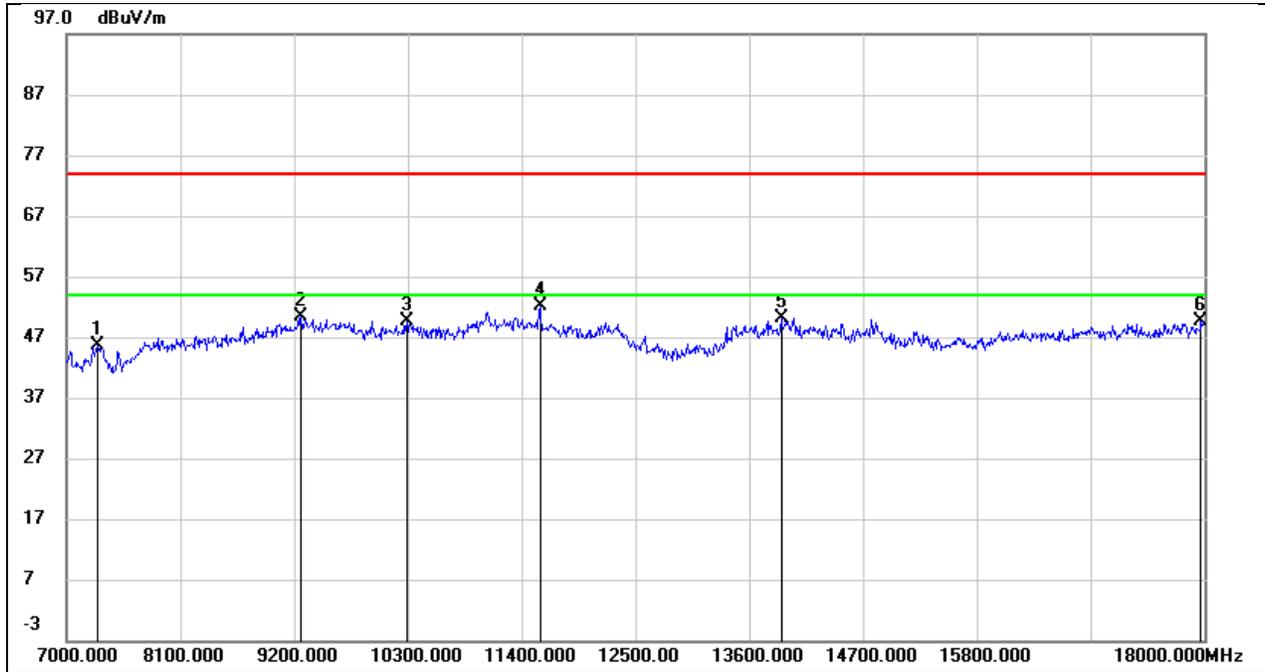


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.19	8.37	45.56	74.00	-28.44	peak
2	9266.000	38.47	11.88	50.35	74.00	-23.65	peak
3	10289.000	36.74	12.82	49.56	74.00	-24.44	peak
4	11576.000	35.48	16.67	52.15	74.00	-21.85	peak
5	13908.000	28.72	21.43	50.15	74.00	-23.85	peak
6	17967.000	22.64	27.00	49.64	74.00	-24.36	peak

Test Mode:	SRD 20M	Frequency(MHz):	5839.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

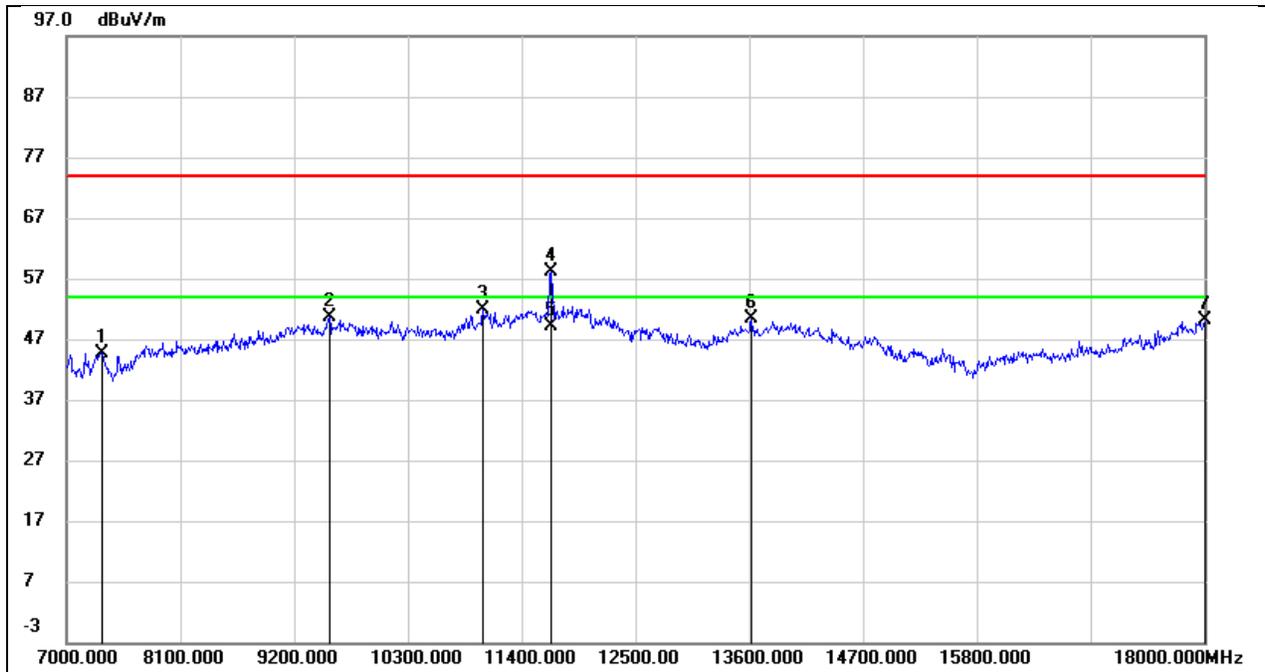


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.99	7.75	44.74	74.00	-29.26	peak
2	9541.000	37.60	13.06	50.66	74.00	-23.34	peak
3	11026.000	36.65	15.11	51.76	74.00	-22.24	peak
4	11686.000	40.04	18.16	58.20	74.00	-15.80	peak
5	11686.000	30.95	18.16	49.11	54.00	-4.89	AVG
6	13622.000	28.37	22.12	50.49	74.00	-23.51	peak
7	18000.000	20.61	29.41	50.02	74.00	-23.98	peak

Test Mode:	SRD 20M	Frequency(MHz):	5839.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

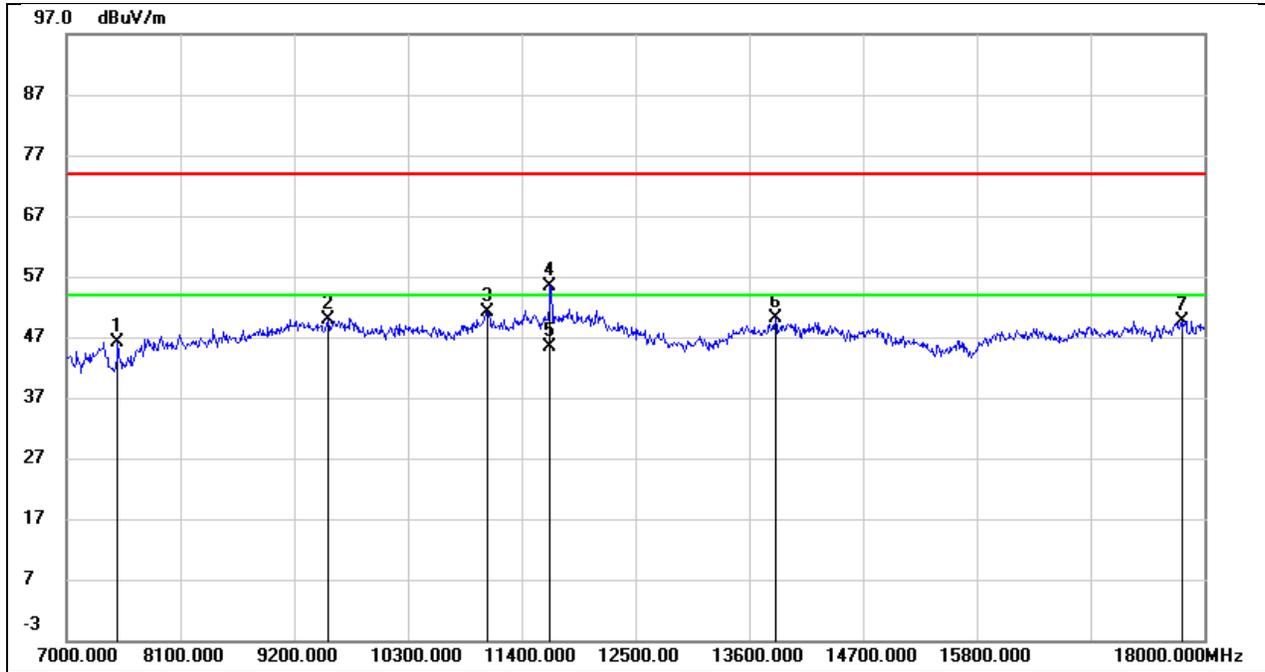


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.78	8.40	46.18	74.00	-27.82	peak
2	9530.000	36.89	12.95	49.84	74.00	-24.16	peak
3	11070.000	36.68	14.47	51.15	74.00	-22.85	peak
4	11675.000	38.62	16.79	55.41	74.00	-18.59	peak
5	11675.000	28.57	16.79	45.36	54.00	-8.64	AVG
6	13853.000	28.82	21.20	50.02	74.00	-23.98	peak
7	17780.000	23.86	25.86	49.72	74.00	-24.28	peak

Test Mode:	SRD 40M	Frequency(MHz):	5170
Polarity:	Horizontal	Test Voltage:	DC 7.16V

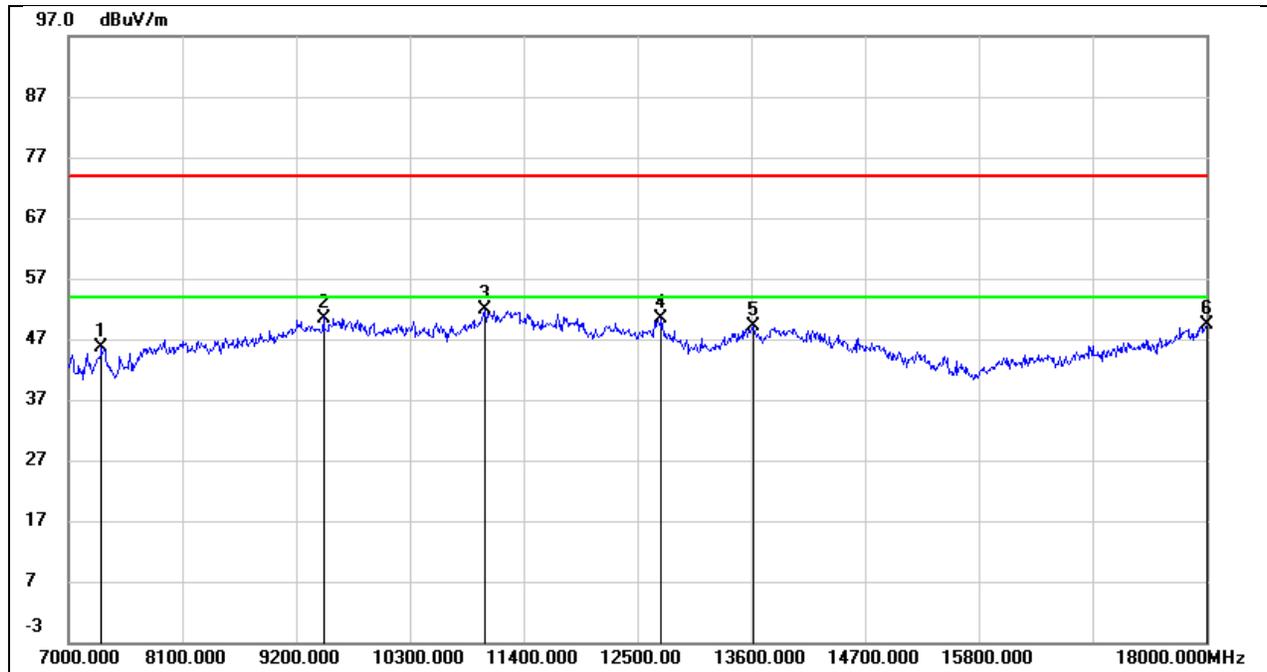


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.98	7.73	45.71	74.00	-28.29	peak
2	9464.000	37.93	12.57	50.50	74.00	-23.50	peak
3	11026.000	36.77	15.11	51.88	74.00	-22.12	peak
4	12731.000	30.74	19.68	50.42	74.00	-23.58	peak
5	13622.000	27.00	22.12	49.12	74.00	-24.88	peak
6	18000.000	20.04	29.41	49.45	74.00	-24.55	peak

Test Mode:	SRD 40M	Frequency(MHz):	5170
Polarity:	Vertical	Test Voltage:	DC 7.16V

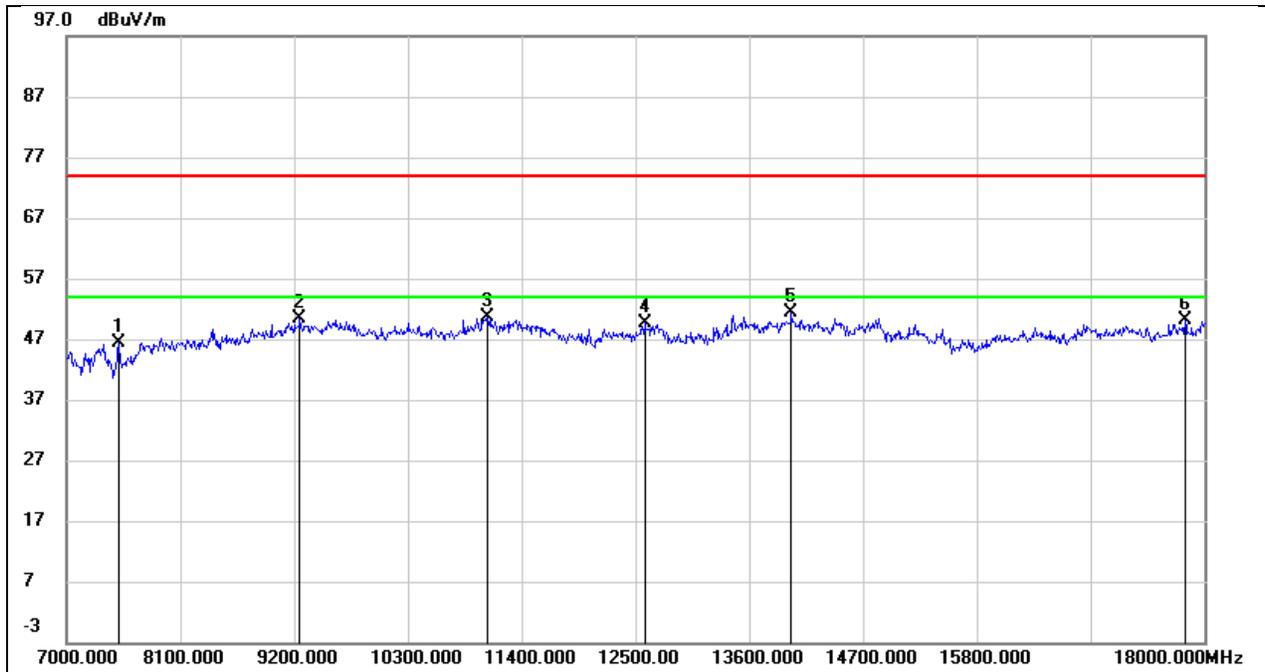


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.89	8.39	46.28	74.00	-27.72	peak
2	9255.000	38.43	11.86	50.29	74.00	-23.71	peak
3	11070.000	36.04	14.47	50.51	74.00	-23.49	peak
4	12588.000	31.40	18.21	49.61	74.00	-24.39	peak
5	14007.000	29.65	21.81	51.46	74.00	-22.54	peak
6	17813.000	24.10	26.04	50.14	74.00	-23.86	peak

Test Mode:	SRD 40M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 7.16V

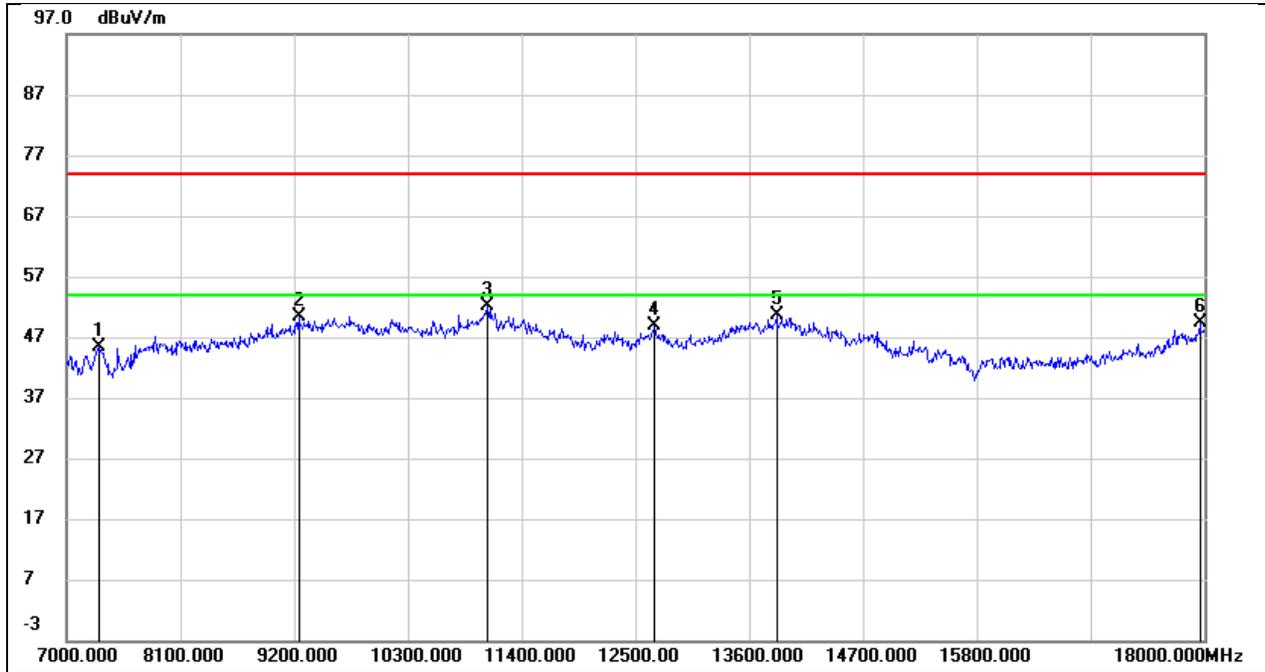


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.63	7.71	45.34	74.00	-28.66	peak
2	9244.000	38.83	11.63	50.46	74.00	-23.54	peak
3	11070.000	36.72	15.36	52.08	74.00	-21.92	peak
4	12687.000	29.26	19.51	48.77	74.00	-25.23	peak
5	13864.000	27.73	22.87	50.60	74.00	-23.40	peak
6	17956.000	20.34	28.94	49.28	74.00	-24.72	peak

Test Mode:	SRD 40M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 7.16V

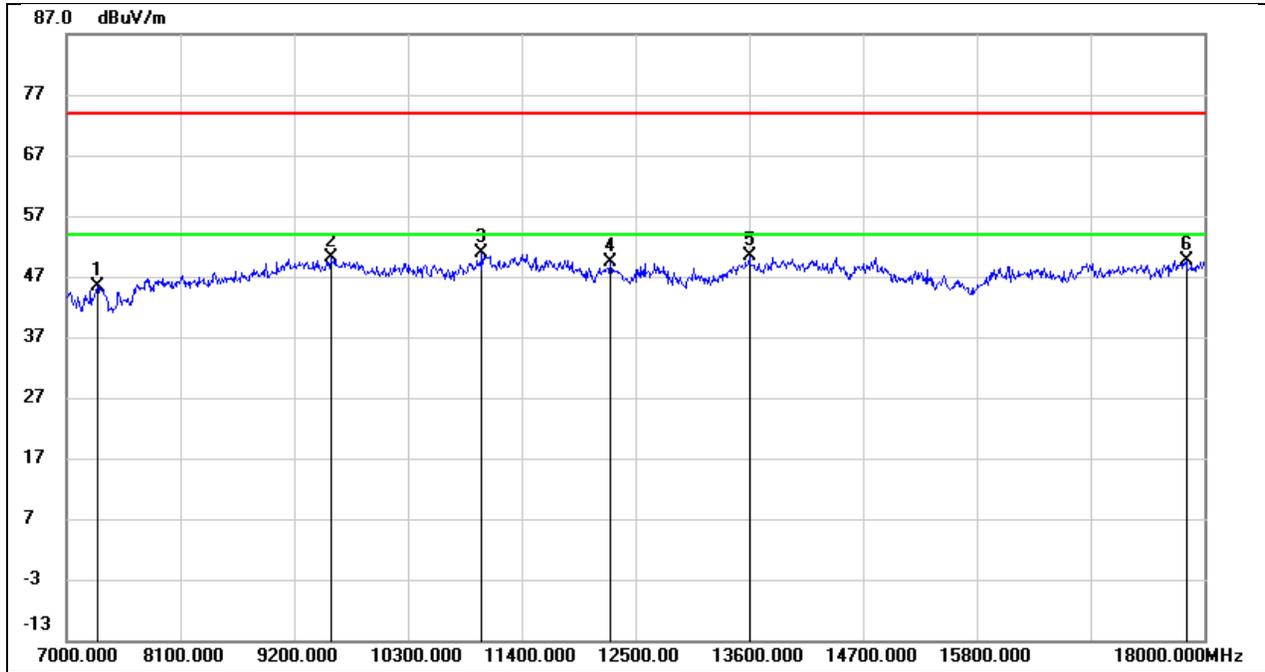


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.00	8.37	45.37	74.00	-28.63	peak
2	9552.000	36.99	13.05	50.04	74.00	-23.96	peak
3	11015.000	36.75	14.22	50.97	74.00	-23.03	peak
4	12258.000	31.51	17.91	49.42	74.00	-24.58	peak
5	13600.000	29.95	20.38	50.33	74.00	-23.67	peak
6	17824.000	23.53	26.11	49.64	74.00	-24.36	peak

Test Mode:	SRD 40M	Frequency(MHz):	5230
Polarity:	Horizontal	Test Voltage:	DC 7.16V

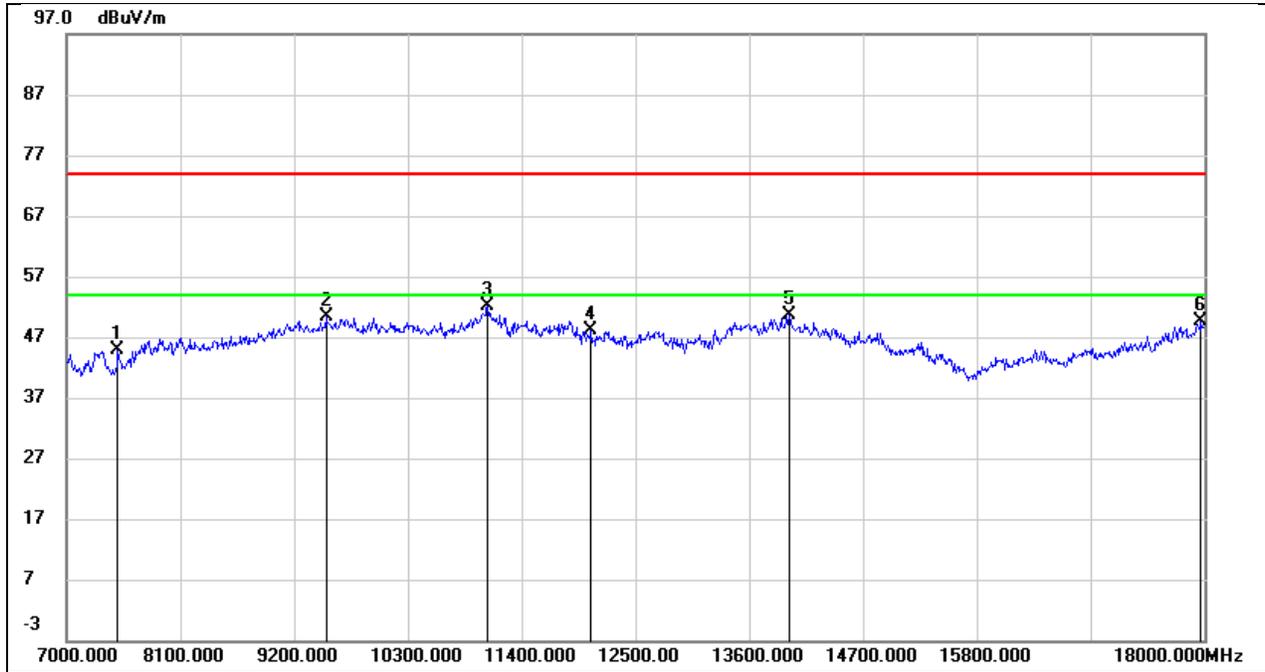


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.02	7.89	44.91	74.00	-29.09	peak
2	9508.000	37.51	12.86	50.37	74.00	-23.63	peak
3	11070.000	36.73	15.36	52.09	74.00	-21.91	peak
4	12071.000	29.44	18.75	48.19	74.00	-25.81	peak
5	13985.000	27.23	23.35	50.58	74.00	-23.42	peak
6	17967.000	20.45	29.06	49.51	74.00	-24.49	peak

Test Mode:	SRD 40M	Frequency(MHz):	5230
Polarity:	Vertical	Test Voltage:	DC 7.16V

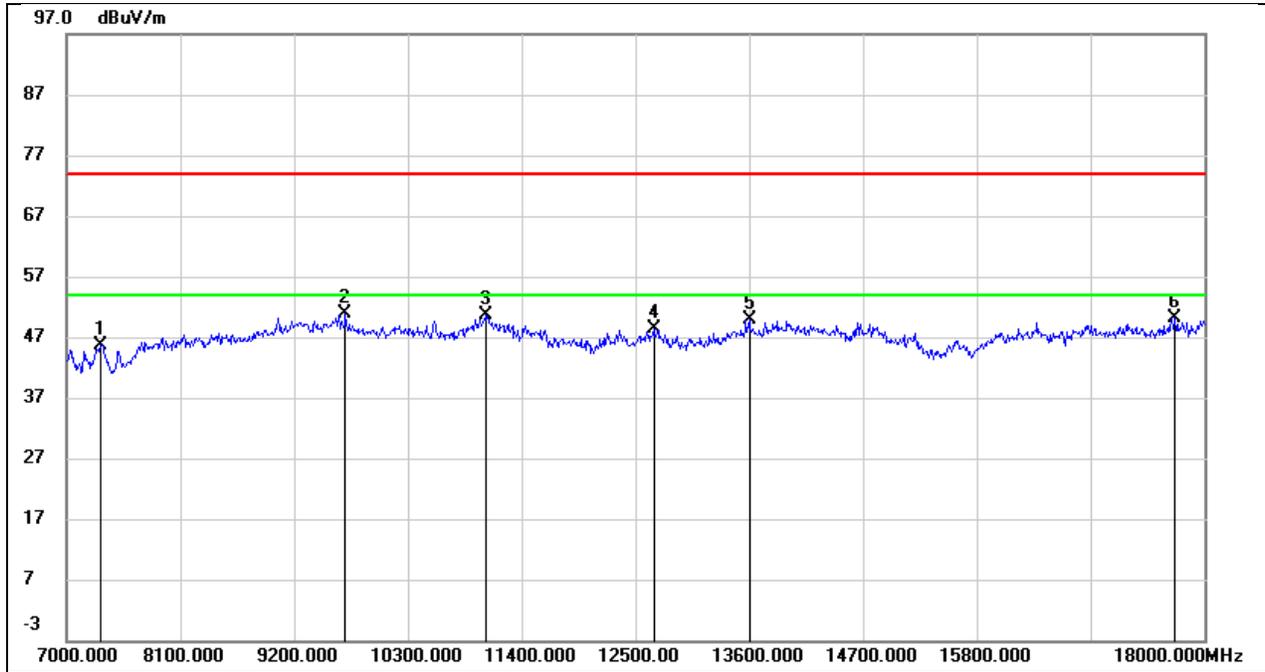


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.36	8.37	45.73	74.00	-28.27	peak
2	9695.000	37.52	13.31	50.83	74.00	-23.17	peak
3	11059.000	36.31	14.43	50.74	74.00	-23.26	peak
4	12676.000	29.90	18.46	48.36	74.00	-25.64	peak
5	13600.000	29.48	20.38	49.86	74.00	-24.14	peak
6	17714.000	24.65	25.51	50.16	74.00	-23.84	peak

Test Mode:	SRD 40M	Frequency(MHz):	5745.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

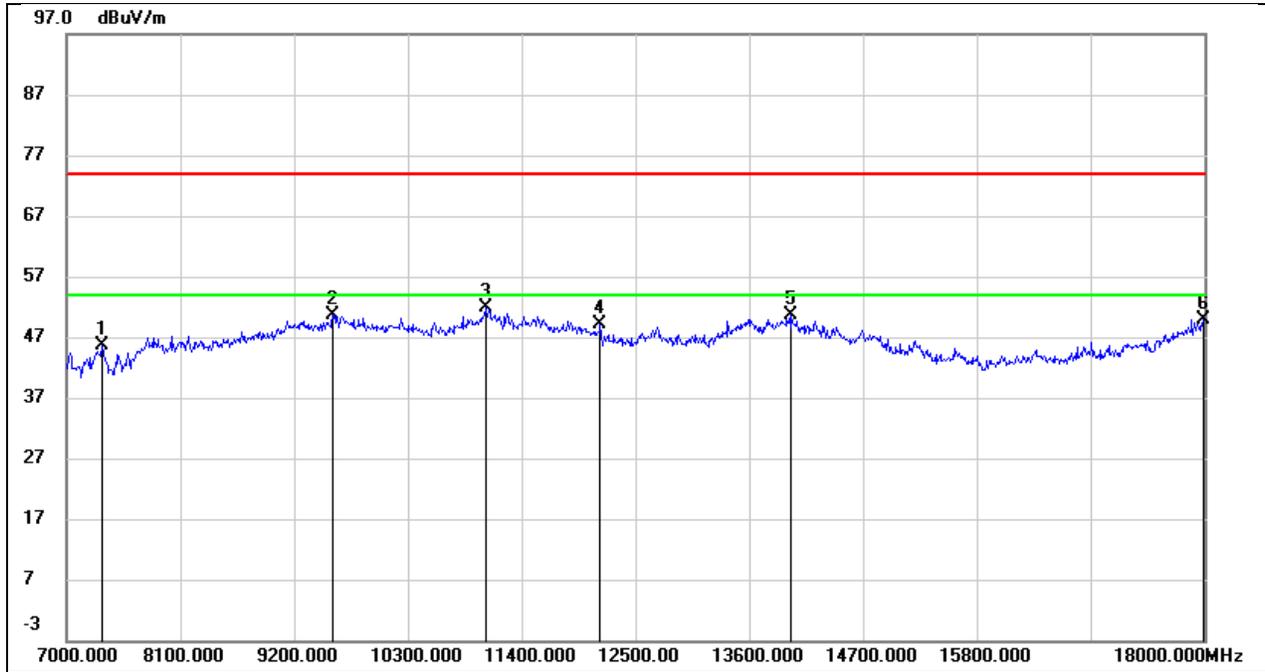


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.87	7.75	45.62	74.00	-28.38	peak
2	9574.000	37.49	13.26	50.75	74.00	-23.25	peak
3	11059.000	36.45	15.31	51.76	74.00	-22.24	peak
4	12159.000	30.27	18.82	49.09	74.00	-24.91	peak
5	14007.000	27.22	23.39	50.61	74.00	-23.39	peak
6	17989.000	20.67	29.29	49.96	74.00	-24.04	peak

Test Mode:	SRD 40M	Frequency(MHz):	5745.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

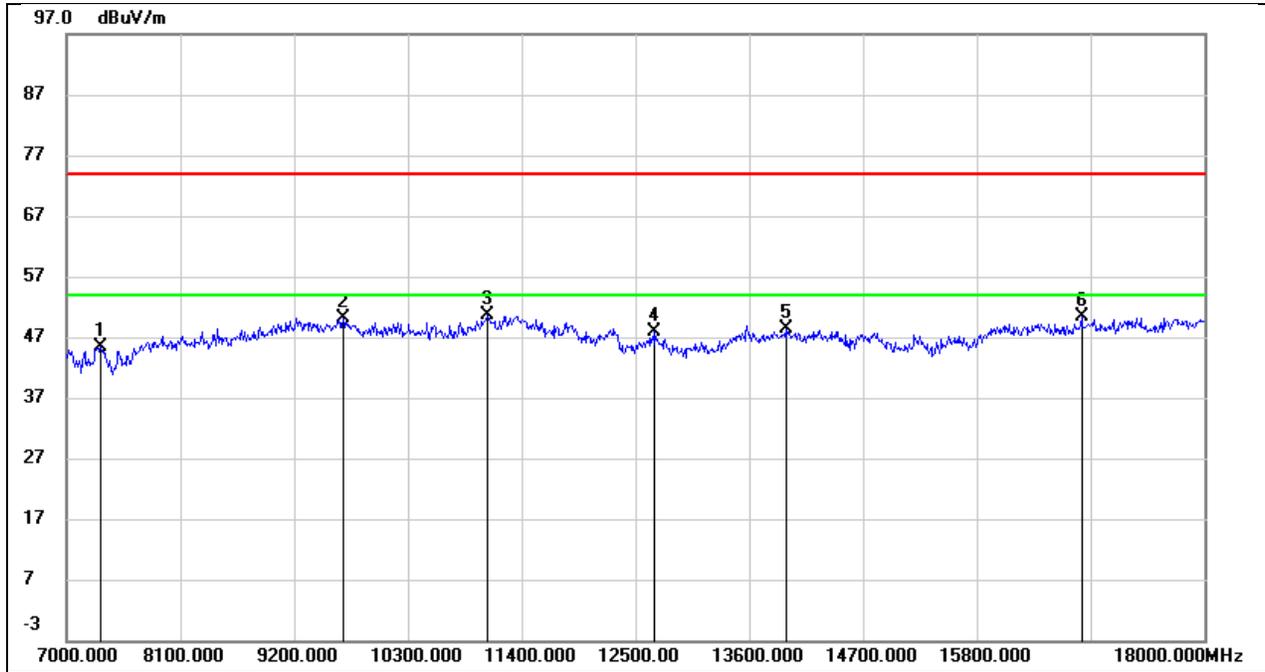


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.98	8.37	45.35	74.00	-28.65	peak
2	9673.000	36.81	13.31	50.12	74.00	-23.88	peak
3	11070.000	36.22	14.47	50.69	74.00	-23.31	peak
4	12687.000	29.28	18.50	47.78	74.00	-26.22	peak
5	13952.000	26.66	21.61	48.27	74.00	-25.73	peak
6	16812.000	26.52	23.91	50.43	74.00	-23.57	peak

Test Mode:	SRD 40M	Frequency(MHz):	5785.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

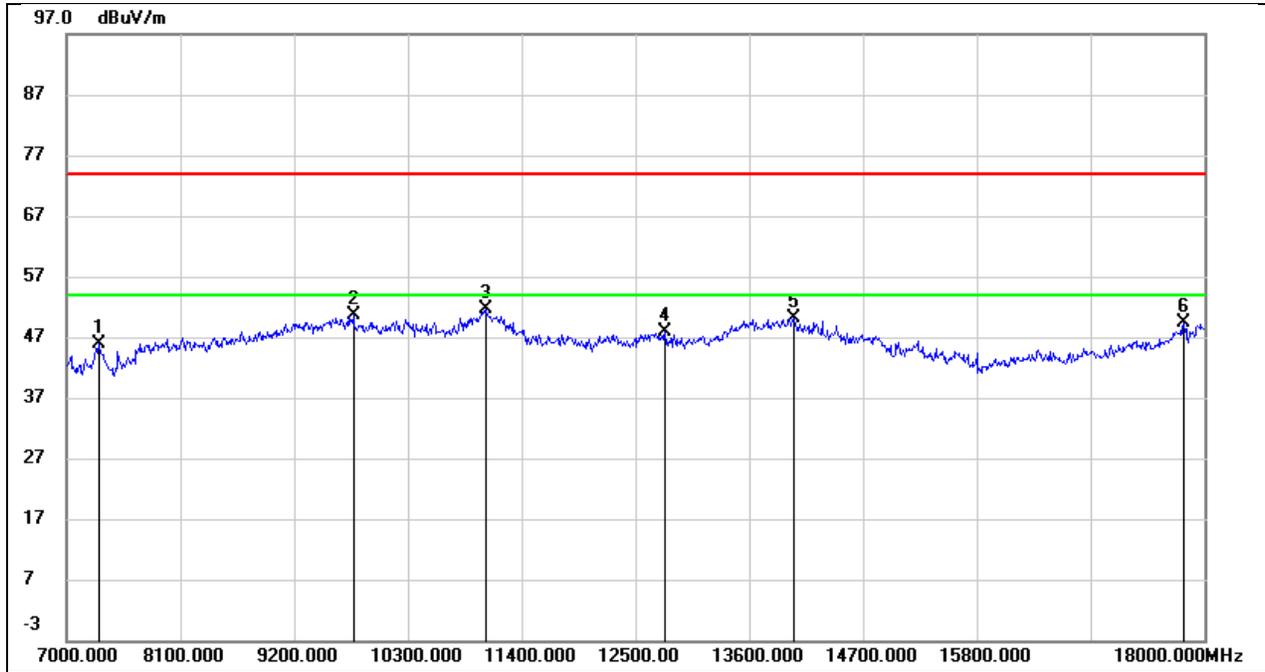


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.20	7.71	45.91	74.00	-28.09	peak
2	9772.000	36.92	13.73	50.65	74.00	-23.35	peak
3	11059.000	36.28	15.31	51.59	74.00	-22.41	peak
4	12786.000	28.06	19.89	47.95	74.00	-26.05	peak
5	14029.000	26.85	23.29	50.14	74.00	-23.86	peak
6	17802.000	22.00	27.31	49.31	74.00	-24.69	peak

Test Mode:	SRD 40M	Frequency(MHz):	5785.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

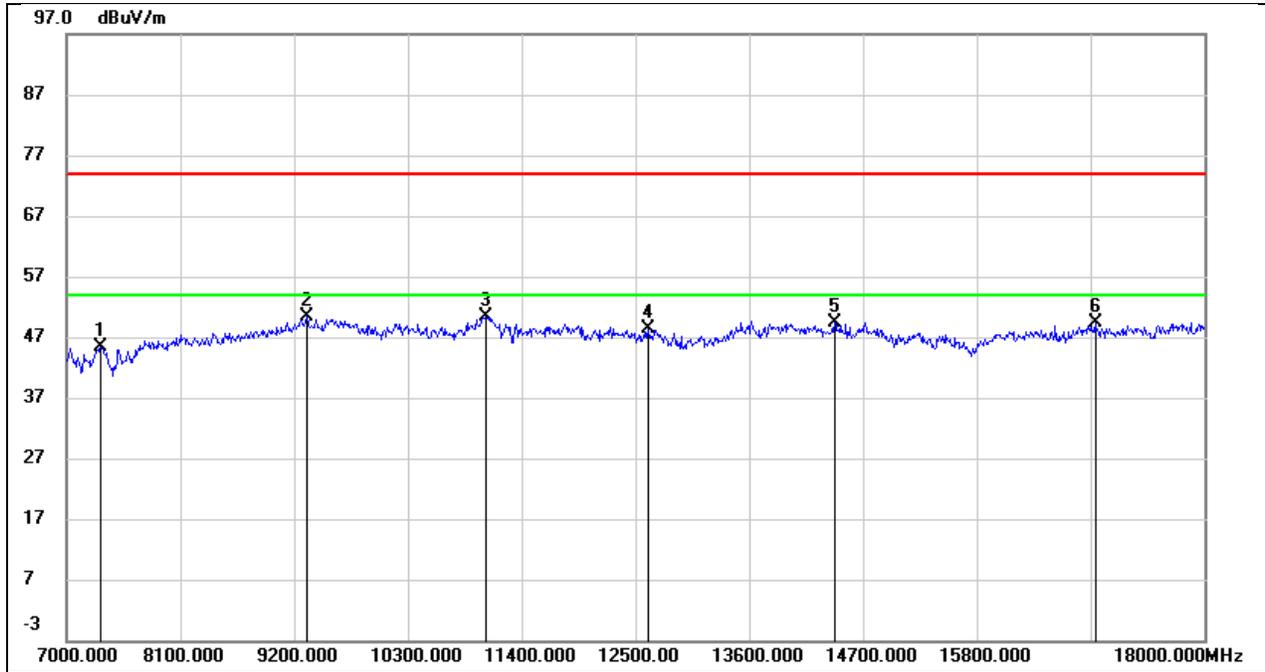


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.10	8.37	45.47	74.00	-28.53	peak
2	9321.000	38.28	12.03	50.31	74.00	-23.69	peak
3	11048.000	36.09	14.37	50.46	74.00	-23.54	peak
4	12621.000	30.05	18.29	48.34	74.00	-25.66	peak
5	14425.000	28.66	20.78	49.44	74.00	-24.56	peak
6	16944.000	25.22	24.14	49.36	74.00	-24.64	peak

Test Mode:	SRD 40M	Frequency(MHz):	5829.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

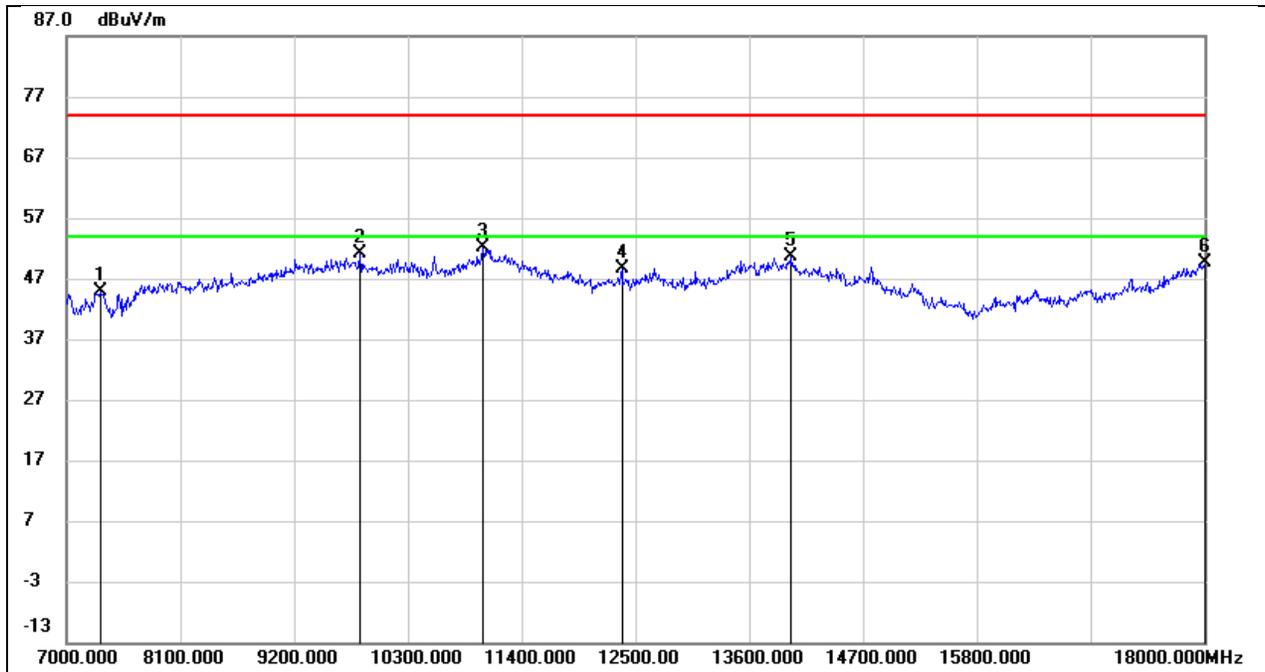


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.03	7.73	44.76	74.00	-29.24	peak
2	9838.000	37.45	13.70	51.15	74.00	-22.85	peak
3	11026.000	36.91	15.11	52.02	74.00	-21.98	peak
4	12368.000	29.65	19.03	48.68	74.00	-25.32	peak
5	14007.000	27.18	23.39	50.57	74.00	-23.43	peak
6	18000.000	20.11	29.41	49.52	74.00	-24.48	peak

Test Mode:	SRD 40M	Frequency(MHz):	5829.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

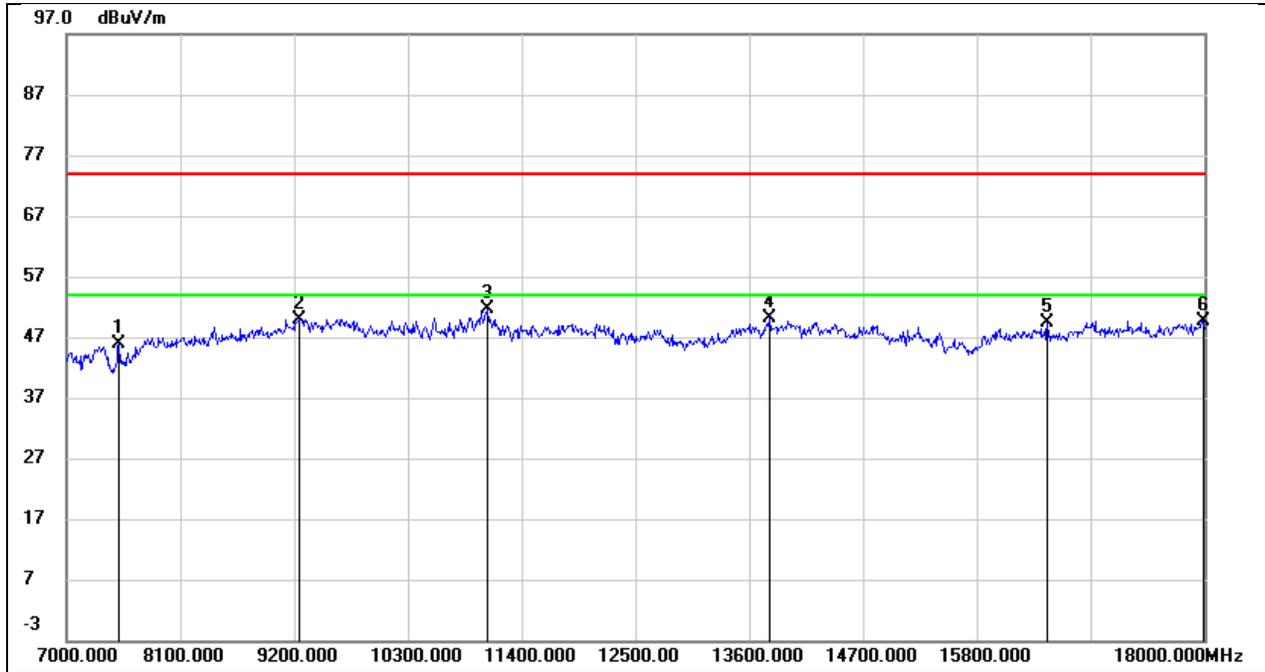


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.59	8.39	45.98	74.00	-28.02	peak
2	9255.000	38.14	11.86	50.00	74.00	-24.00	peak
3	11070.000	37.15	14.47	51.62	74.00	-22.38	peak
4	13798.000	29.11	20.98	50.09	74.00	-23.91	peak
5	16482.000	25.82	23.48	49.30	74.00	-24.70	peak
6	17989.000	22.44	27.13	49.57	74.00	-24.43	peak

Test Mode:	SRD 60M	Frequency(MHz):	5180
Polarity:	Horizontal	Test Voltage:	DC 7.16V

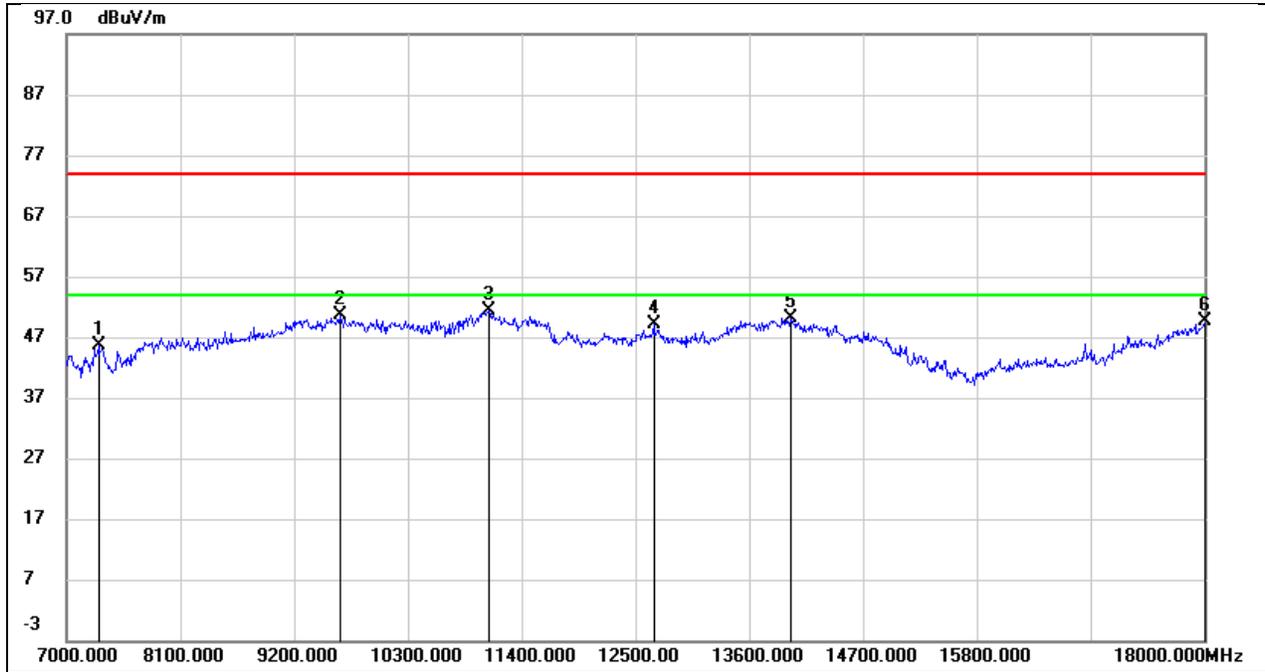


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	38.01	7.71	45.72	74.00	-28.28	peak
2	9640.000	37.09	13.50	50.59	74.00	-23.41	peak
3	11081.000	35.86	15.44	51.30	74.00	-22.70	peak
4	12676.000	29.54	19.47	49.01	74.00	-24.99	peak
5	13996.000	26.81	23.39	50.20	74.00	-23.80	peak
6	18000.000	20.10	29.41	49.51	74.00	-24.49	peak

Test Mode:	SRD 60M	Frequency(MHz):	5180
Polarity:	Vertical	Test Voltage:	DC 7.16V

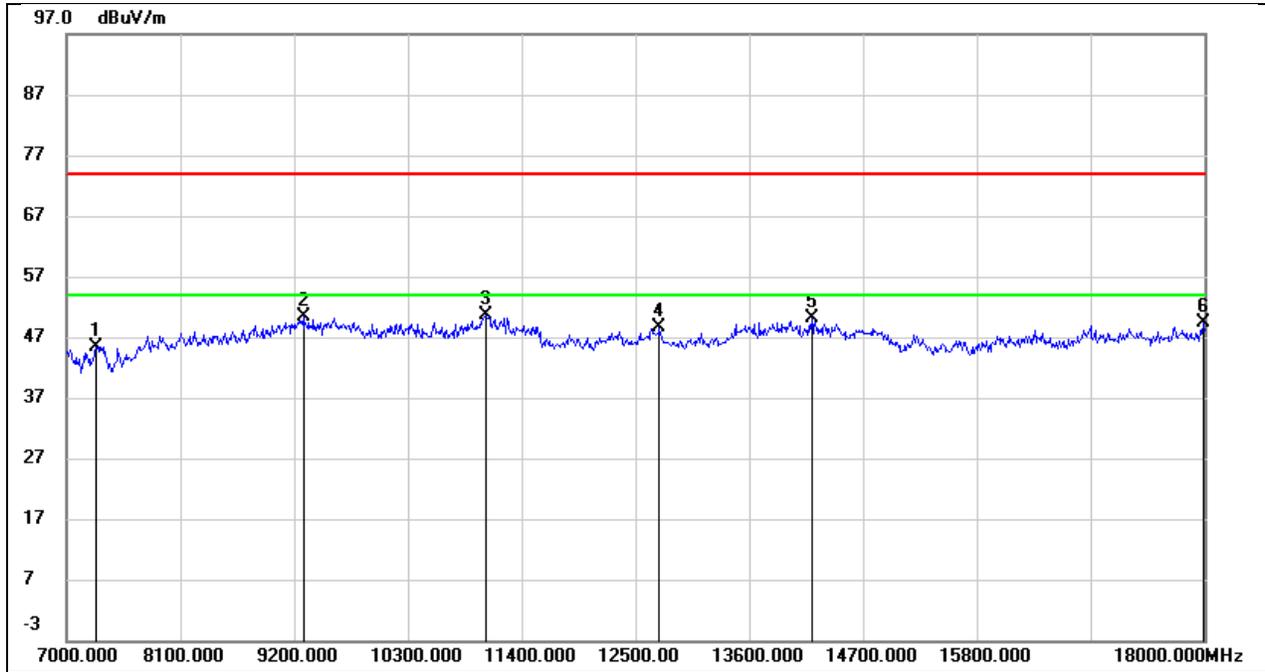


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7286.000	37.11	8.36	45.47	74.00	-28.53	peak
2	9288.000	38.46	11.94	50.40	74.00	-23.60	peak
3	11048.000	36.19	14.37	50.56	74.00	-23.44	peak
4	12731.000	29.94	18.64	48.58	74.00	-25.42	peak
5	14205.000	28.60	21.49	50.09	74.00	-23.91	peak
6	17989.000	22.24	27.13	49.37	74.00	-24.63	peak

Test Mode:	SRD 60M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 7.16V

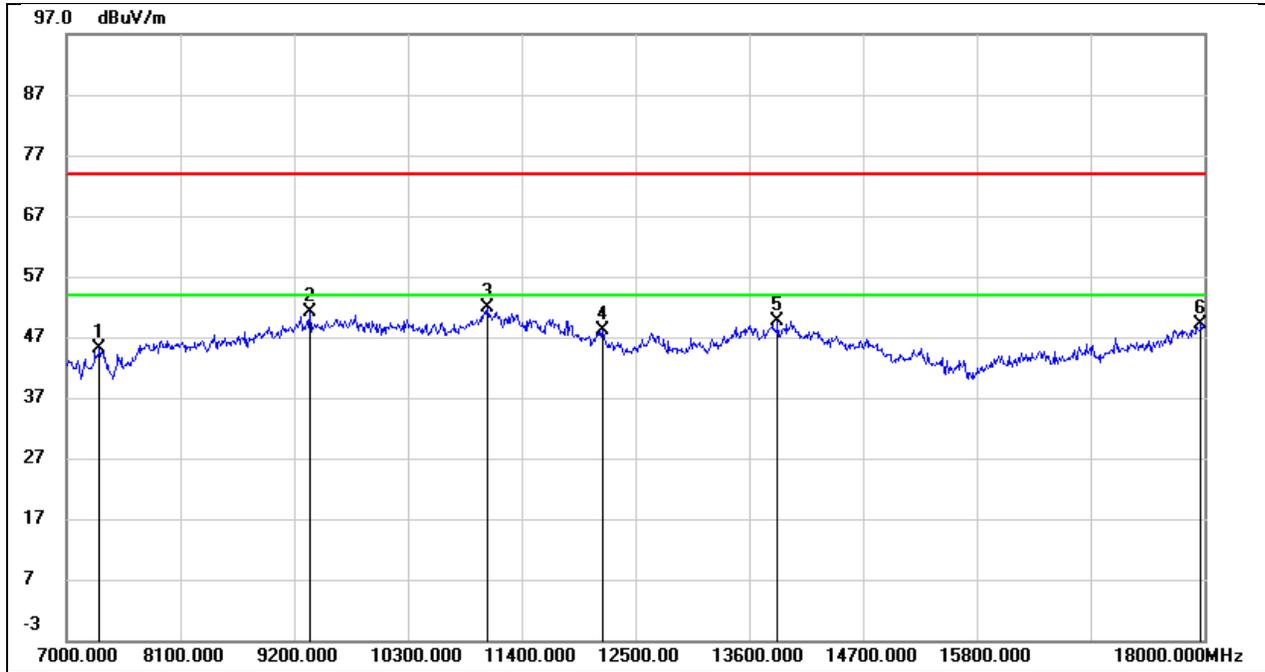


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.43	7.73	45.16	74.00	-28.84	peak
2	9354.000	39.07	12.00	51.07	74.00	-22.93	peak
3	11070.000	36.41	15.36	51.77	74.00	-22.23	peak
4	12181.000	29.20	18.83	48.03	74.00	-25.97	peak
5	13875.000	26.70	22.92	49.62	74.00	-24.38	peak
6	17967.000	20.16	29.06	49.22	74.00	-24.78	peak

Test Mode:	SRD 60M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 7.16V

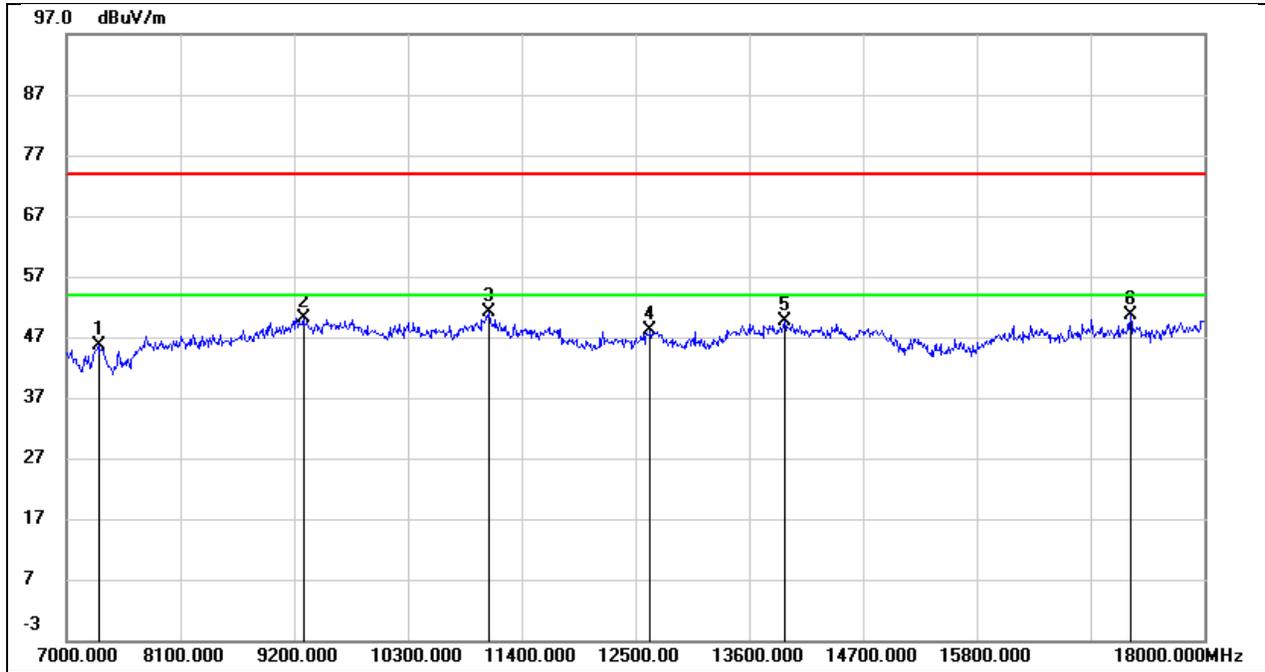


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.29	8.36	45.65	74.00	-28.35	peak
2	9288.000	38.25	11.94	50.19	74.00	-23.81	peak
3	11081.000	36.56	14.52	51.08	74.00	-22.92	peak
4	12643.000	29.73	18.36	48.09	74.00	-25.91	peak
5	13941.000	28.13	21.57	49.70	74.00	-24.30	peak
6	17285.000	25.84	24.77	50.61	74.00	-23.39	peak

Test Mode:	SRD 60M	Frequency(MHz):	5220
Polarity:	Horizontal	Test Voltage:	DC 7.16V

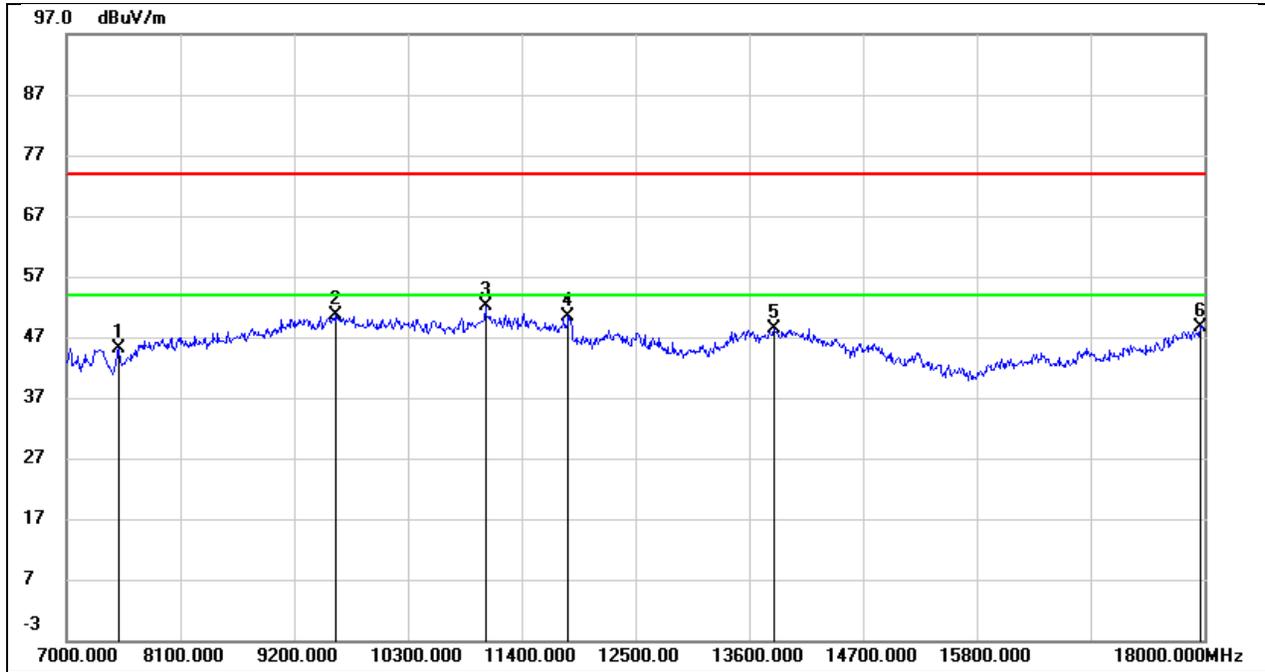


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.19	7.89	45.08	74.00	-28.92	peak
2	9596.000	37.17	13.40	50.57	74.00	-23.43	peak
3	11048.000	36.77	15.24	52.01	74.00	-21.99	peak
4	11851.000	32.07	18.27	50.34	74.00	-23.66	peak
5	13842.000	25.60	22.78	48.38	74.00	-25.62	peak
6	17956.000	19.81	28.94	48.75	74.00	-25.25	peak

Test Mode:	SRD 60M	Frequency(MHz):	5220
Polarity:	Vertical	Test Voltage:	DC 7.16V

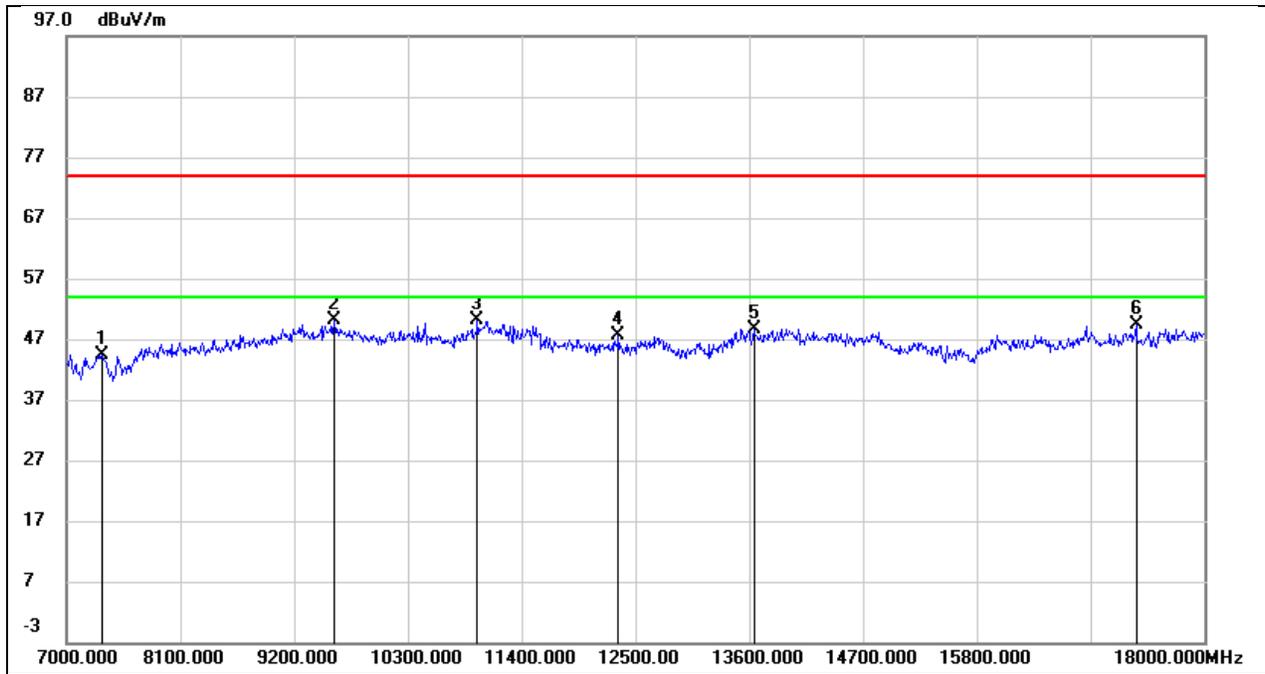


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	36.12	8.37	44.49	74.00	-29.51	peak
2	9585.000	36.98	13.22	50.20	74.00	-23.80	peak
3	10971.000	36.07	14.10	50.17	74.00	-23.83	peak
4	12335.000	29.61	18.03	47.64	74.00	-26.36	peak
5	13644.000	28.14	20.52	48.66	74.00	-25.34	peak
6	17340.000	24.53	24.81	49.34	74.00	-24.66	peak

Test Mode:	SRD 60M	Frequency(MHz):	5755.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

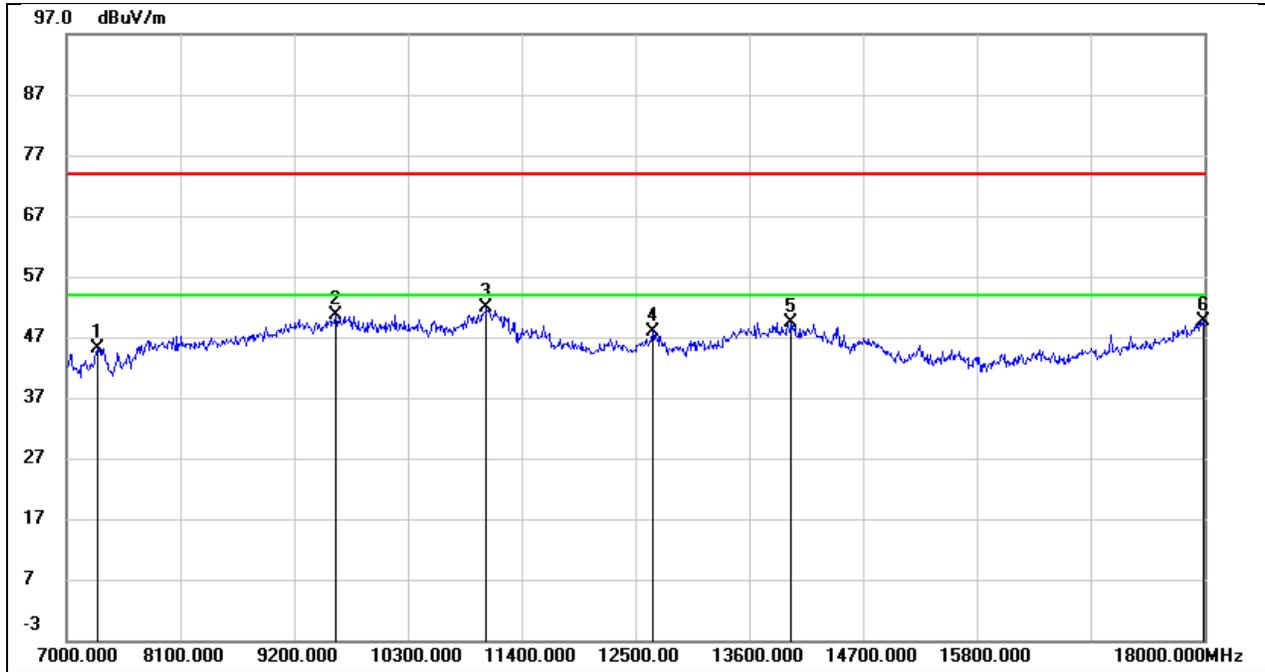


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.48	7.71	45.19	74.00	-28.81	peak
2	9596.000	37.22	13.40	50.62	74.00	-23.38	peak
3	11059.000	36.65	15.31	51.96	74.00	-22.04	peak
4	12665.000	28.58	19.42	48.00	74.00	-26.00	peak
5	14007.000	26.04	23.39	49.43	74.00	-24.57	peak
6	17989.000	20.35	29.29	49.64	74.00	-24.36	peak

Test Mode:	SRD 60M	Frequency(MHz):	5755.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

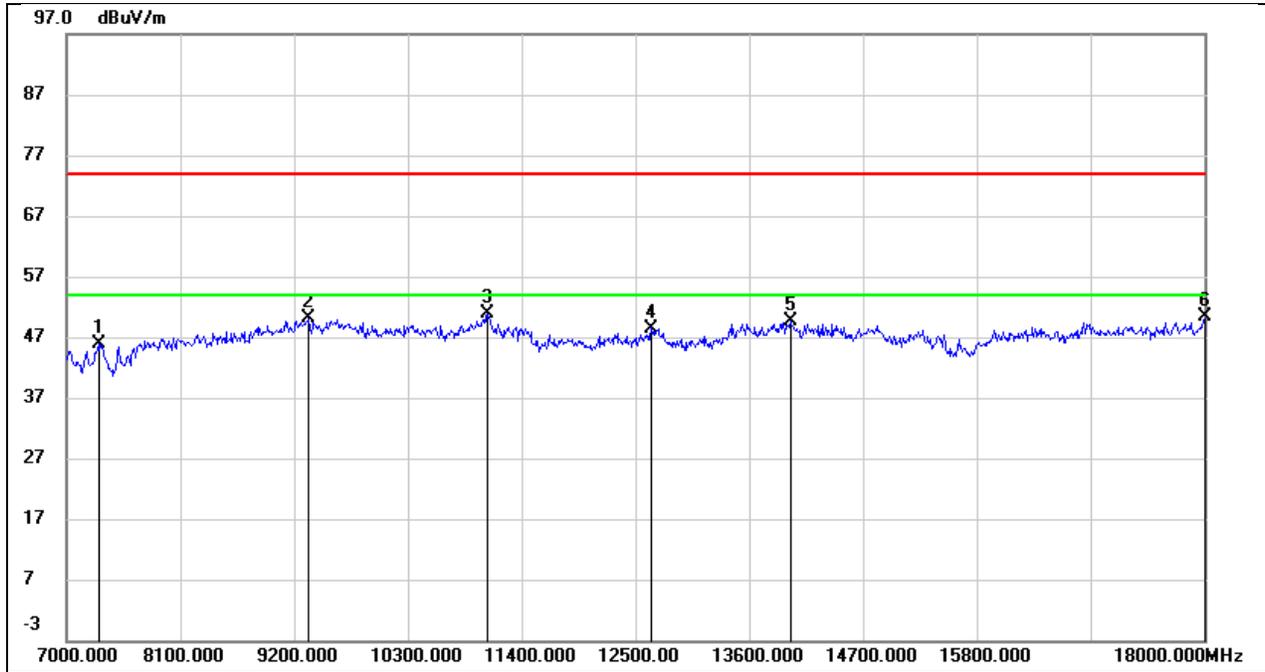


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.40	8.36	45.76	74.00	-28.24	peak
2	9343.000	38.04	12.08	50.12	74.00	-23.88	peak
3	11070.000	36.41	14.47	50.88	74.00	-23.12	peak
4	12654.000	30.11	18.39	48.50	74.00	-25.50	peak
5	13996.000	27.86	21.79	49.65	74.00	-24.35	peak
6	18000.000	23.07	27.21	50.28	74.00	-23.72	peak

Test Mode:	SRD 60M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

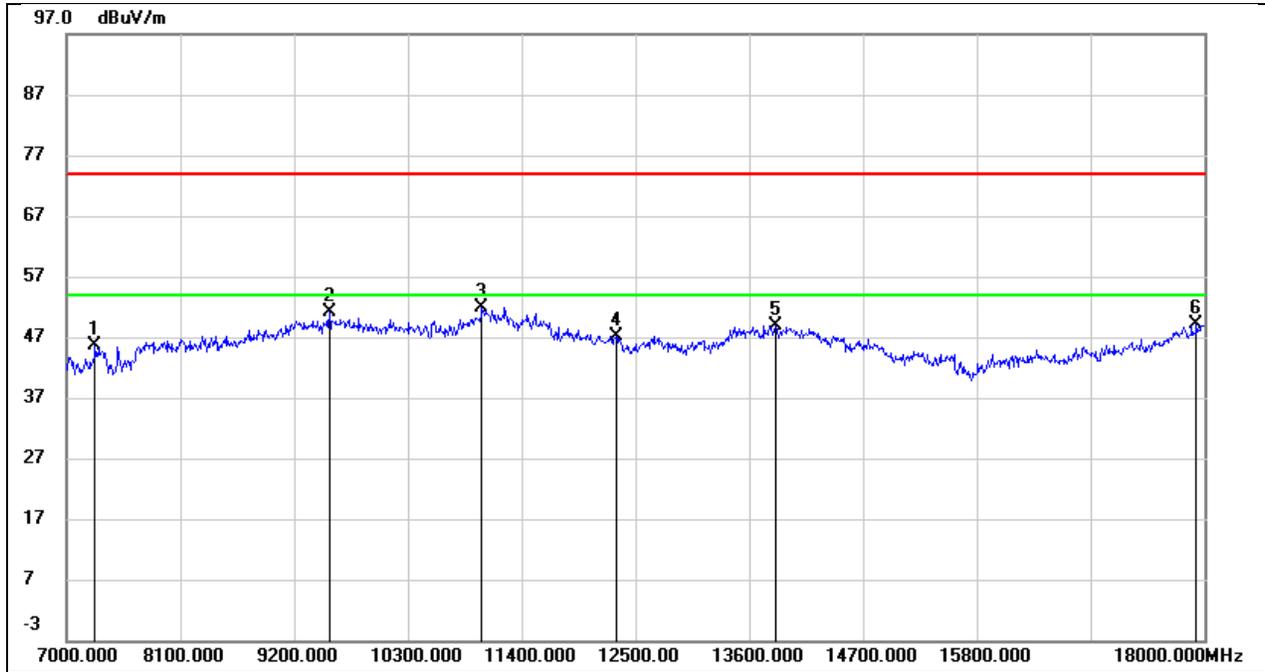


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	37.84	7.67	45.51	74.00	-28.49	peak
2	9541.000	38.07	13.06	51.13	74.00	-22.87	peak
3	11015.000	36.87	15.04	51.91	74.00	-22.09	peak
4	12313.000	28.10	18.97	47.07	74.00	-26.93	peak
5	13853.000	26.16	22.83	48.99	74.00	-25.01	peak
6	17923.000	20.57	28.58	49.15	74.00	-24.85	peak

Test Mode:	SRD 60M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

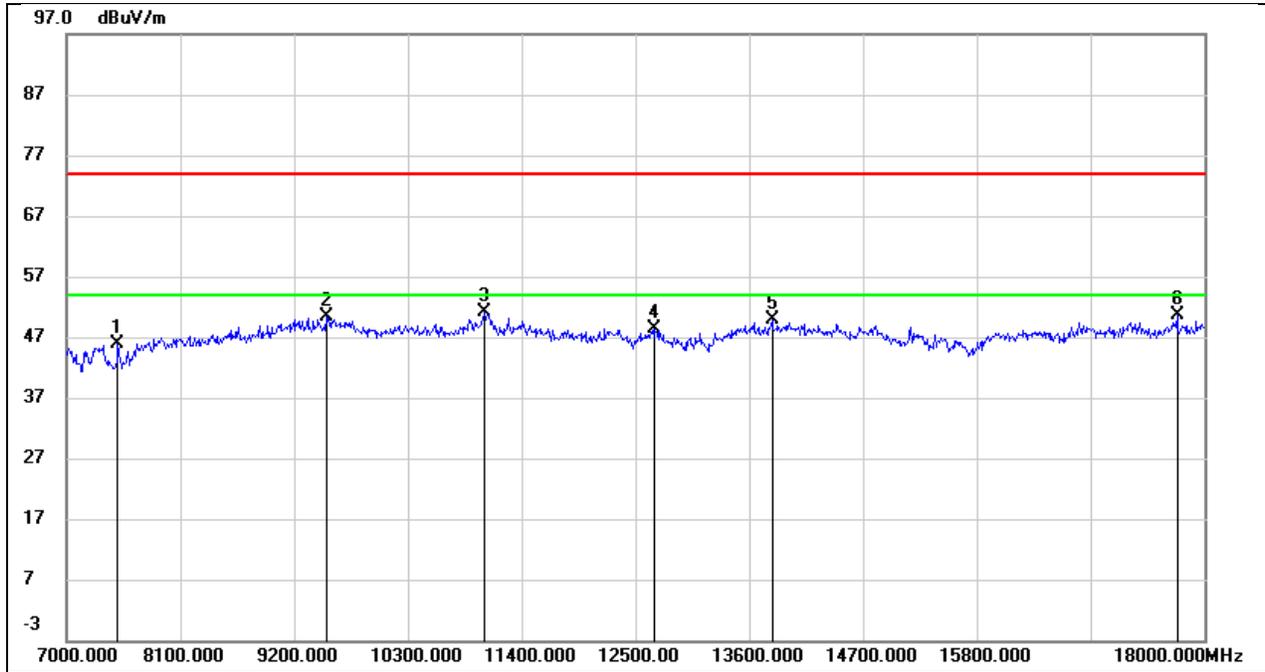


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7495.000	37.36	8.40	45.76	74.00	-28.24	peak
2	9508.000	37.53	12.85	50.38	74.00	-23.62	peak
3	11037.000	36.75	14.33	51.08	74.00	-22.92	peak
4	12687.000	29.76	18.50	48.26	74.00	-25.74	peak
5	13820.000	28.79	21.06	49.85	74.00	-24.15	peak
6	17736.000	24.97	25.63	50.60	74.00	-23.40	peak

Test Mode:	SRD 60M	Frequency(MHz):	5819.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

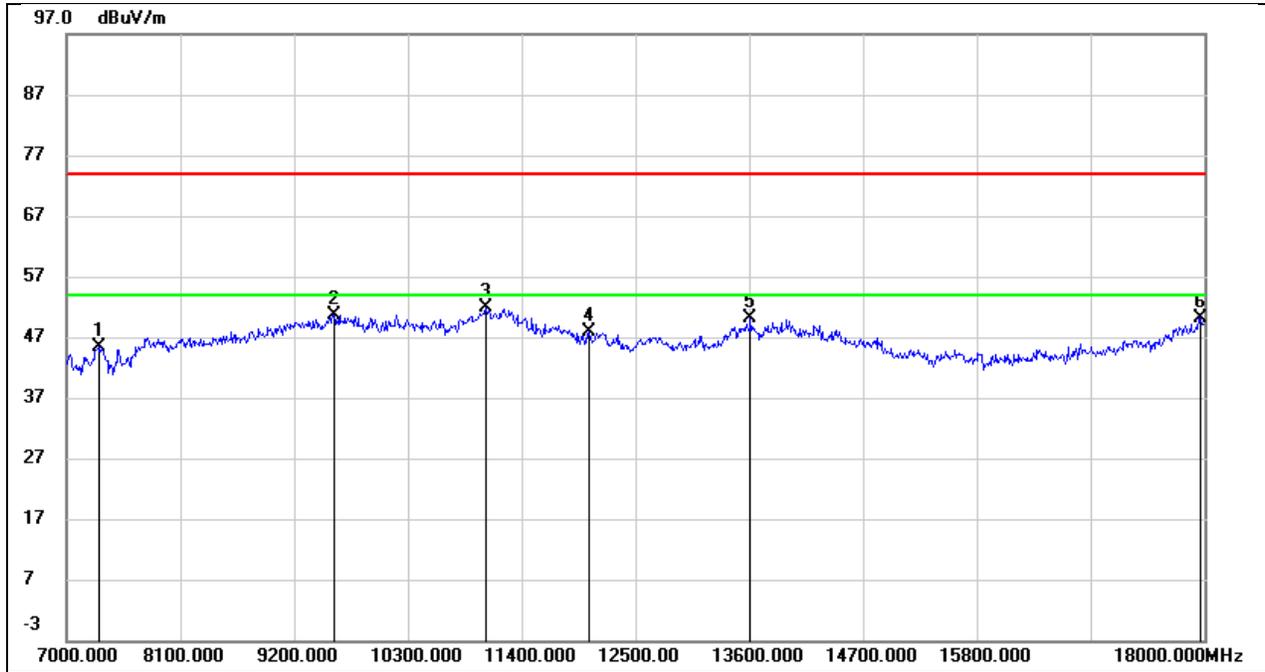


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7308.000	37.74	7.71	45.45	74.00	-28.55	peak
2	9585.000	37.35	13.34	50.69	74.00	-23.31	peak
3	11048.000	36.62	15.24	51.86	74.00	-22.14	peak
4	12049.000	29.13	18.74	47.87	74.00	-26.13	peak
5	13611.000	28.05	22.09	50.14	74.00	-23.86	peak
6	17967.000	21.00	29.06	50.06	74.00	-23.94	peak

Test Mode:	SRD 60M	Frequency(MHz):	5819.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

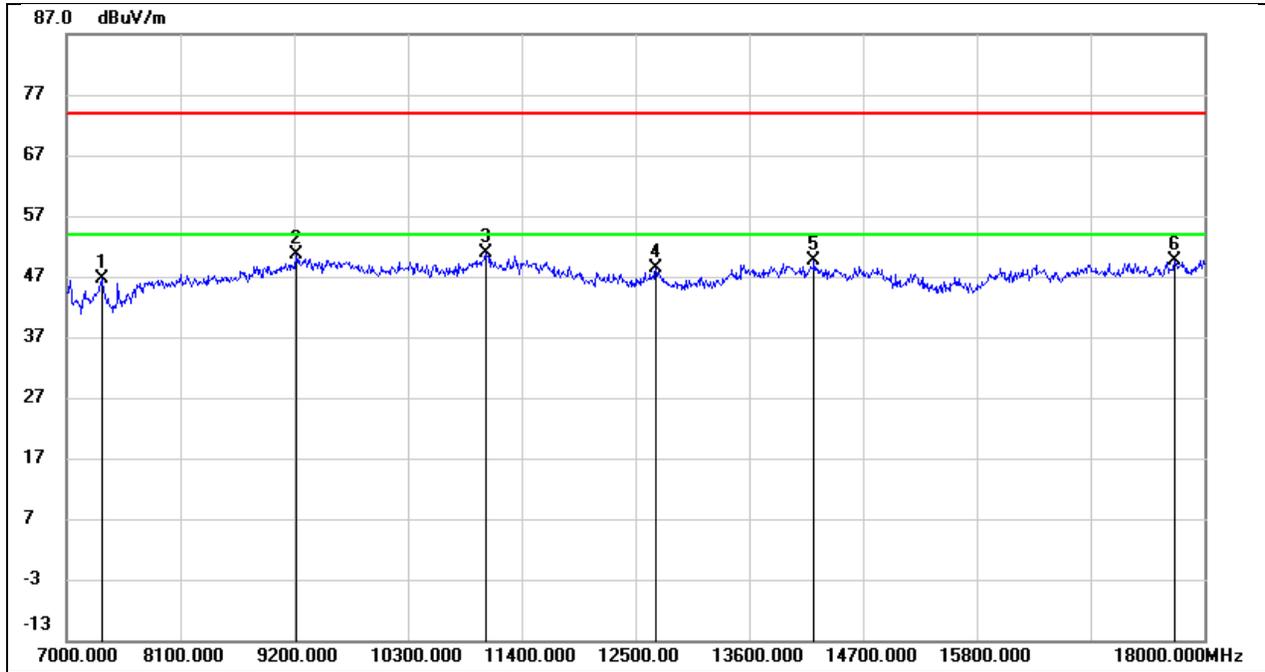


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	38.19	8.37	46.56	74.00	-27.44	peak
2	9222.000	38.84	11.78	50.62	74.00	-23.38	peak
3	11048.000	36.45	14.37	50.82	74.00	-23.18	peak
4	12698.000	29.78	18.53	48.31	74.00	-25.69	peak
5	14227.000	28.33	21.41	49.74	74.00	-24.26	peak
6	17714.000	24.07	25.51	49.58	74.00	-24.42	peak

Test Mode:	SRD 80M	Frequency(MHz):	5200
Polarity:	Horizontal	Test Voltage:	DC 7.16V

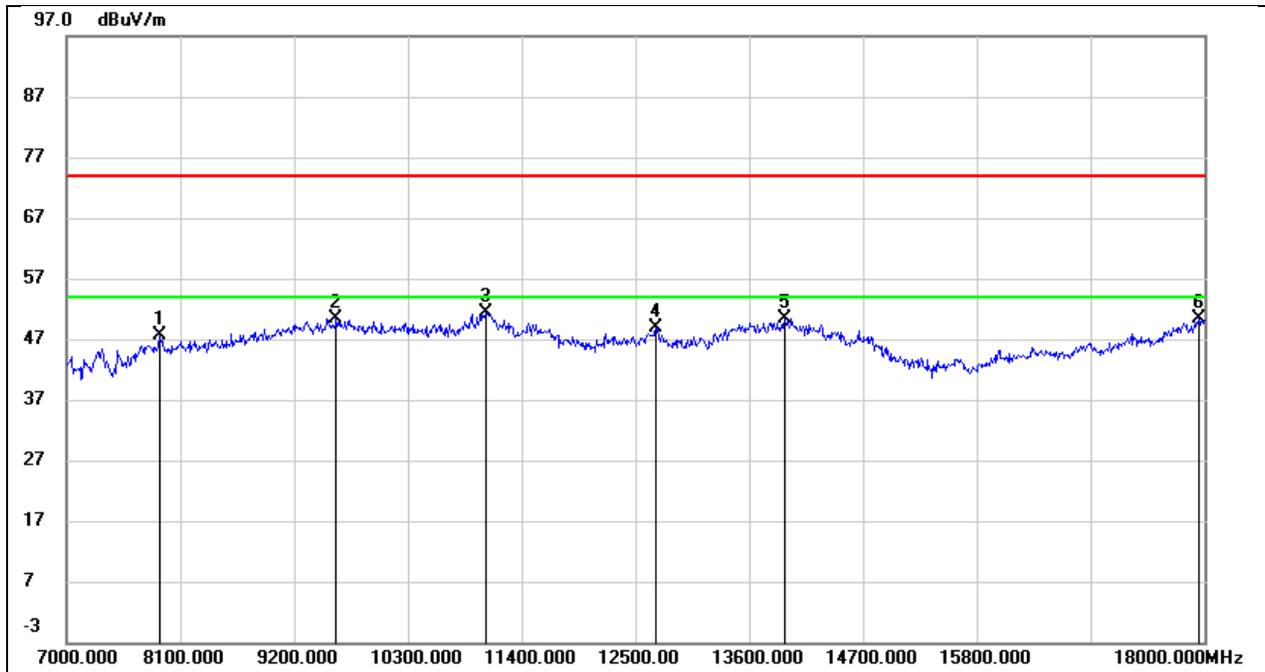


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7902.000	39.63	8.05	47.68	74.00	-26.32	peak
2	9607.000	36.87	13.44	50.31	74.00	-23.69	peak
3	11048.000	36.22	15.24	51.46	74.00	-22.54	peak
4	12698.000	29.33	19.55	48.88	74.00	-25.12	peak
5	13941.000	27.25	23.18	50.43	74.00	-23.57	peak
6	17945.000	21.66	28.83	50.49	74.00	-23.51	peak

Test Mode:	SRD 80M	Frequency(MHz):	5200
Polarity:	Vertical	Test Voltage:	DC 7.16V

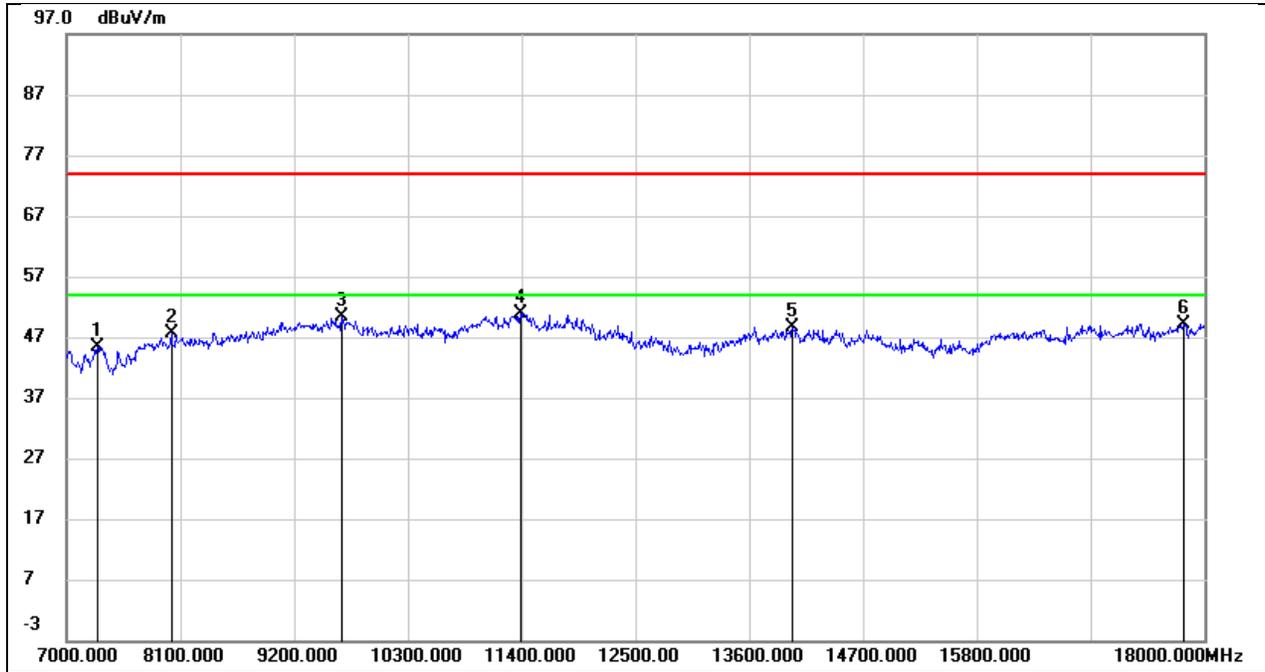


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.11	8.37	45.48	74.00	-28.52	peak
2	8012.000	39.08	8.59	47.67	74.00	-26.33	peak
3	9662.000	37.15	13.31	50.46	74.00	-23.54	peak
4	11389.000	35.01	15.97	50.98	74.00	-23.02	peak
5	14018.000	26.95	21.79	48.74	74.00	-25.26	peak
6	17802.000	23.27	25.98	49.25	74.00	-24.75	peak

Test Mode:	SRD 80M	Frequency(MHz):	5190
Polarity:	Horizontal	Test Voltage:	DC 7.16V

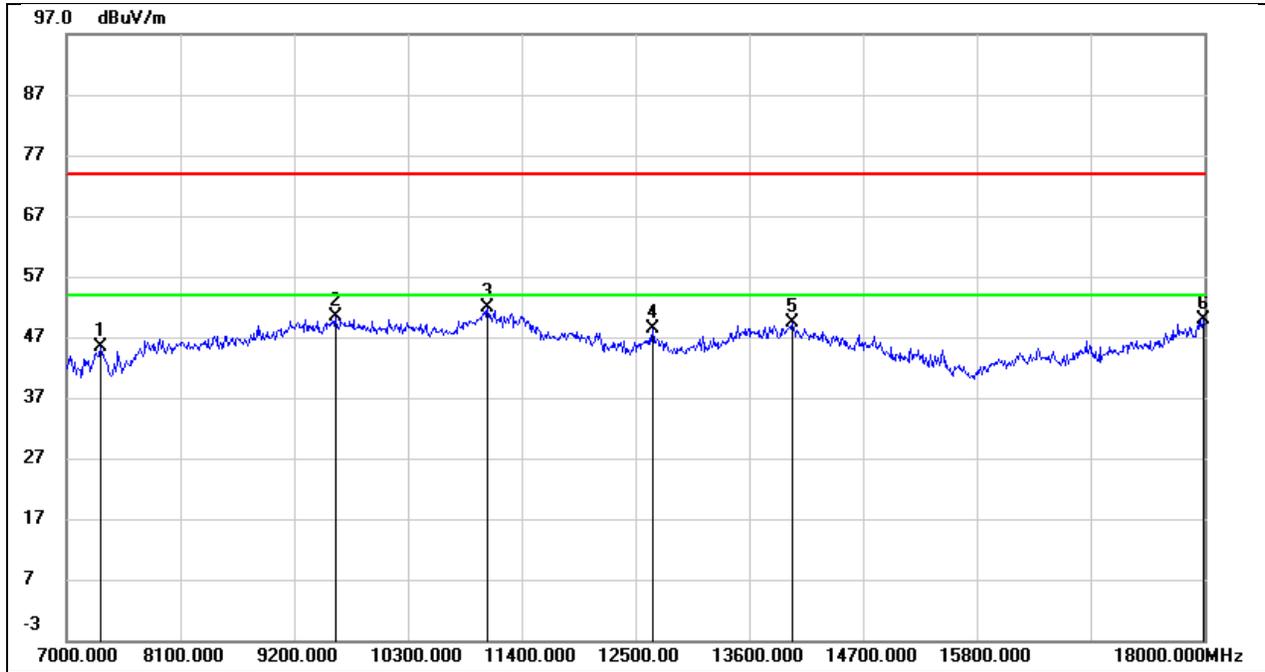


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	37.58	7.73	45.31	74.00	-28.69	peak
2	9596.000	36.86	13.40	50.26	74.00	-23.74	peak
3	11070.000	36.62	15.36	51.98	74.00	-22.02	peak
4	12665.000	28.90	19.42	48.32	74.00	-25.68	peak
5	14018.000	25.97	23.34	49.31	74.00	-24.69	peak
6	17989.000	20.55	29.29	49.84	74.00	-24.16	peak

Test Mode:	SRD 80M	Frequency(MHz):	5190
Polarity:	Vertical	Test Voltage:	DC 7.16V

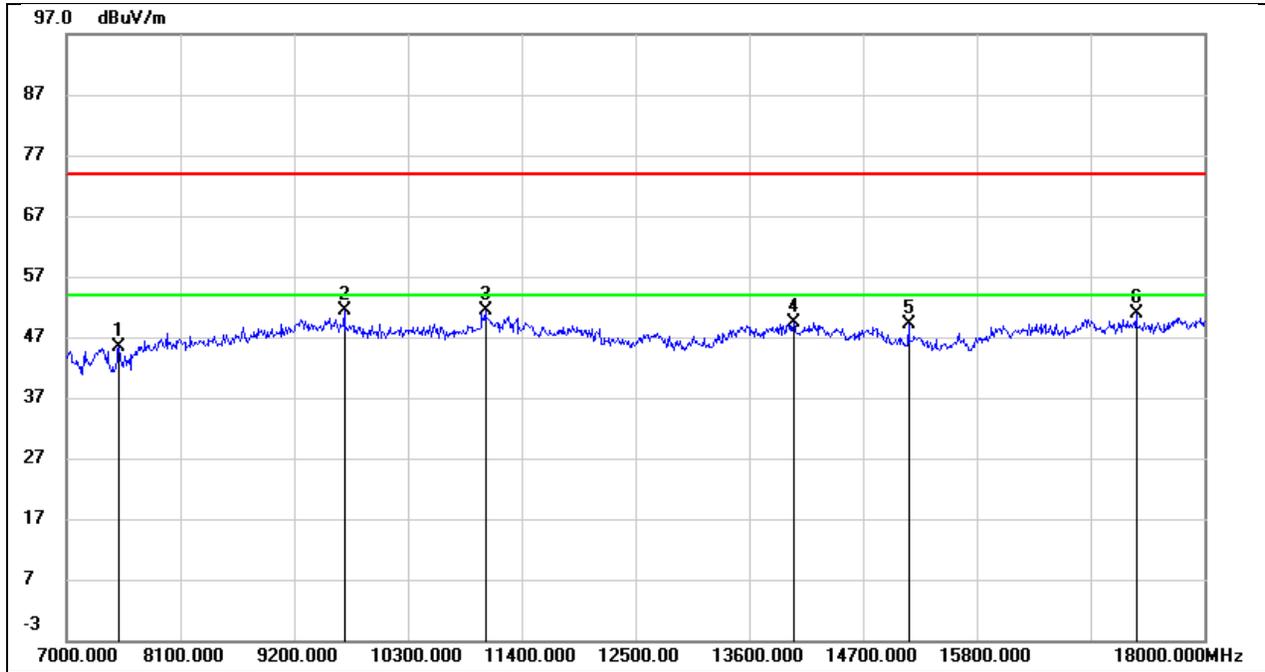


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	36.87	8.39	45.26	74.00	-28.74	peak
2	9684.000	38.03	13.32	51.35	74.00	-22.65	peak
3	11048.000	37.05	14.37	51.42	74.00	-22.58	peak
4	14029.000	27.67	21.76	49.43	74.00	-24.57	peak
5	15140.000	29.26	19.78	49.04	74.00	-24.96	peak
6	17340.000	26.03	24.81	50.84	74.00	-23.16	peak

Test Mode:	SRD 80M	Frequency(MHz):	5210
Polarity:	Horizontal	Test Voltage:	DC 7.16V

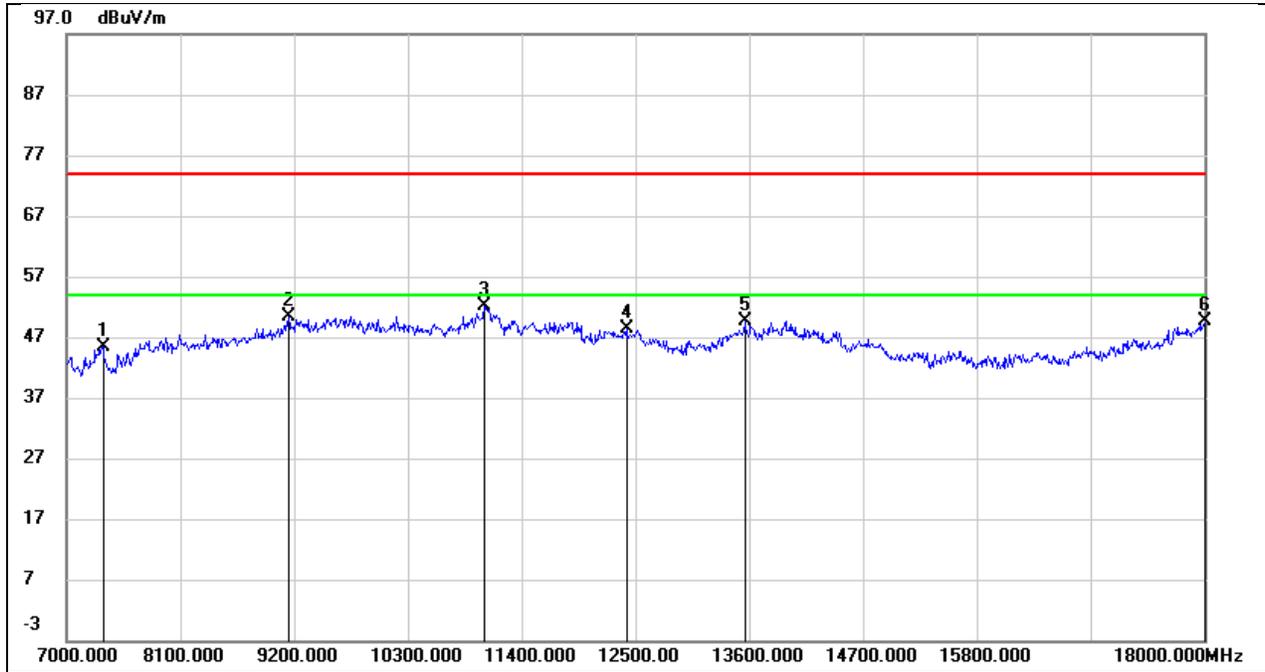


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7352.000	37.62	7.75	45.37	74.00	-28.63	peak
2	9145.000	39.07	11.22	50.29	74.00	-23.71	peak
3	11037.000	37.01	15.18	52.19	74.00	-21.81	peak
4	12412.000	29.32	19.06	48.38	74.00	-25.62	peak
5	13556.000	27.70	21.98	49.68	74.00	-24.32	peak
6	18000.000	20.12	29.41	49.53	74.00	-24.47	peak

Test Mode:	SRD 80M	Frequency(MHz):	5210
Polarity:	Vertical	Test Voltage:	DC 7.16V

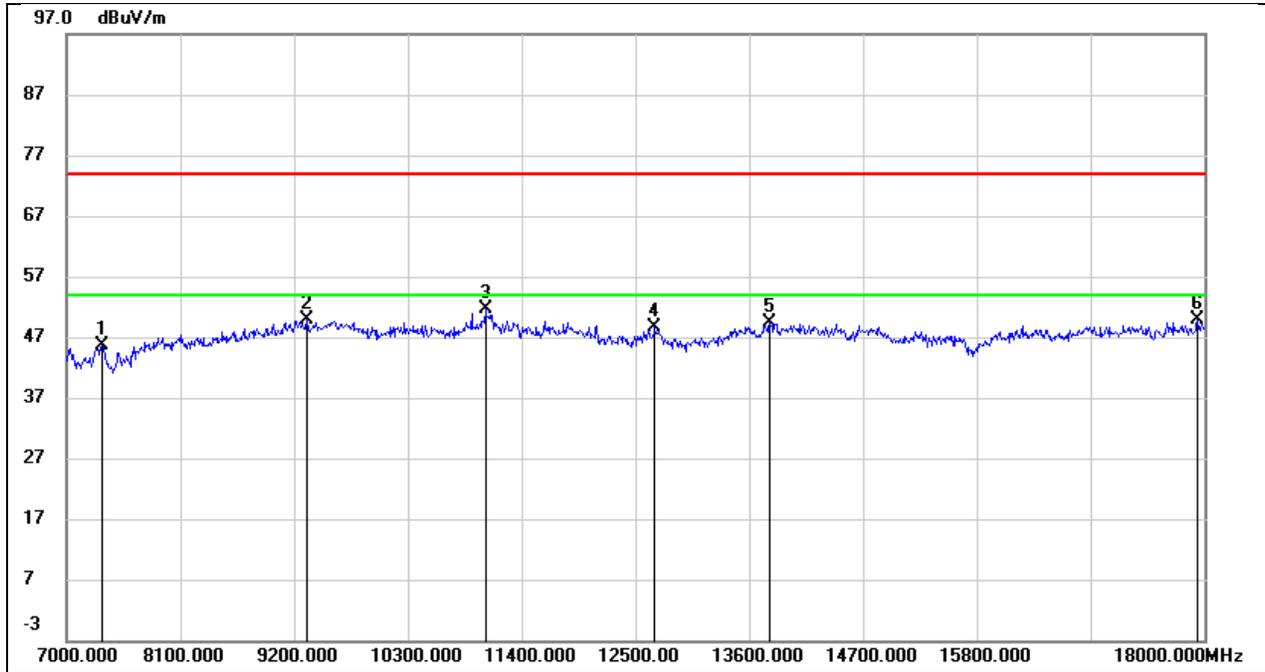


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7341.000	37.36	8.37	45.73	74.00	-28.27	peak
2	9321.000	37.85	12.03	49.88	74.00	-24.12	peak
3	11048.000	37.15	14.37	51.52	74.00	-22.48	peak
4	12687.000	30.03	18.50	48.53	74.00	-25.47	peak
5	13798.000	28.28	20.98	49.26	74.00	-24.74	peak
6	17934.000	23.00	26.80	49.80	74.00	-24.20	peak

Test Mode:	SRD 80M	Frequency(MHz):	5765.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

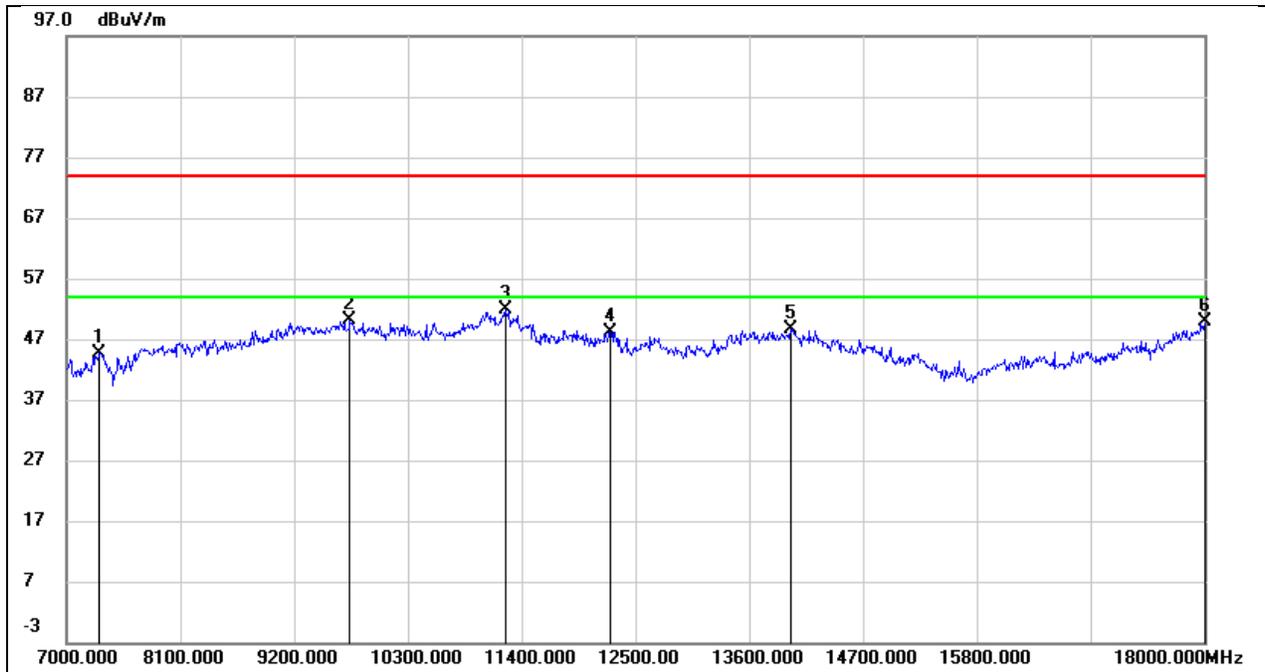


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	36.97	7.73	44.70	74.00	-29.30	peak
2	9739.000	36.35	13.67	50.02	74.00	-23.98	peak
3	11246.000	35.43	16.41	51.84	74.00	-22.16	peak
4	12258.000	29.22	18.91	48.13	74.00	-25.87	peak
5	13996.000	25.33	23.39	48.72	74.00	-25.28	peak
6	18000.000	20.55	29.41	49.96	74.00	-24.04	peak

Test Mode:	SRD 80M	Frequency(MHz):	5765.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

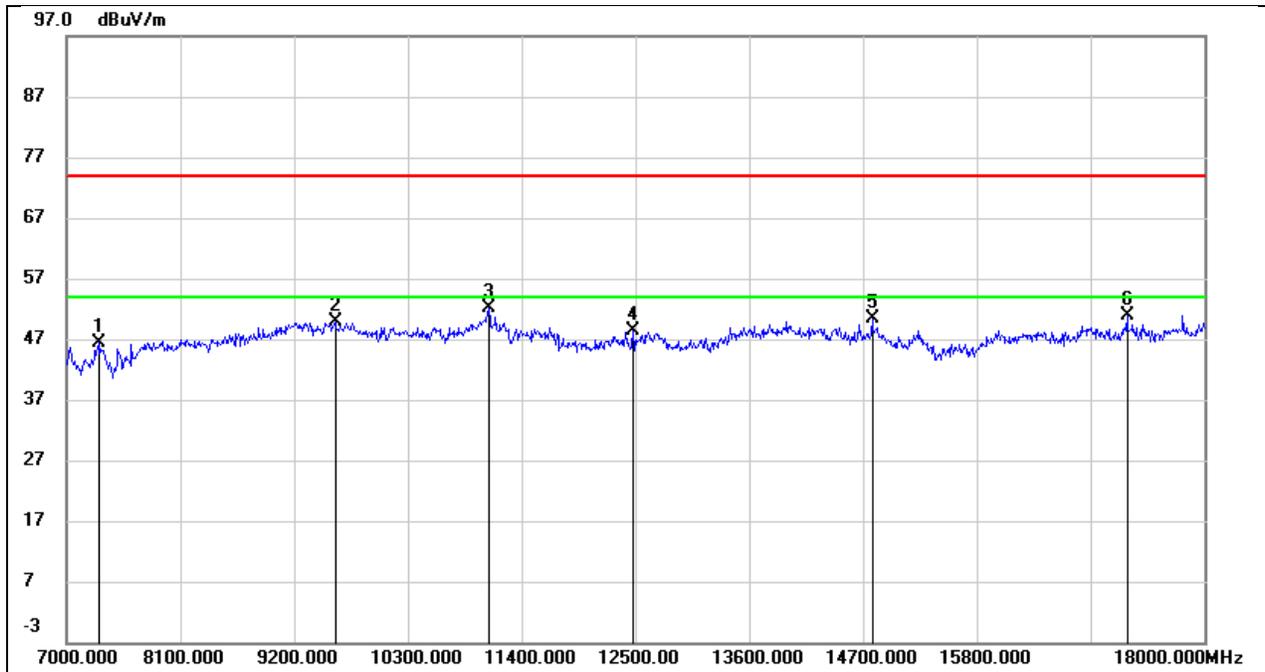


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	38.11	8.37	46.48	74.00	-27.52	peak
2	9596.000	36.73	13.26	49.99	74.00	-24.01	peak
3	11081.000	37.56	14.52	52.08	74.00	-21.92	peak
4	12478.000	30.13	18.14	48.27	74.00	-25.73	peak
5	14788.000	29.88	20.41	50.29	74.00	-23.71	peak
6	17252.000	26.17	24.74	50.91	74.00	-23.09	peak

Test Mode:	SRD 80M	Frequency(MHz):	5787.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

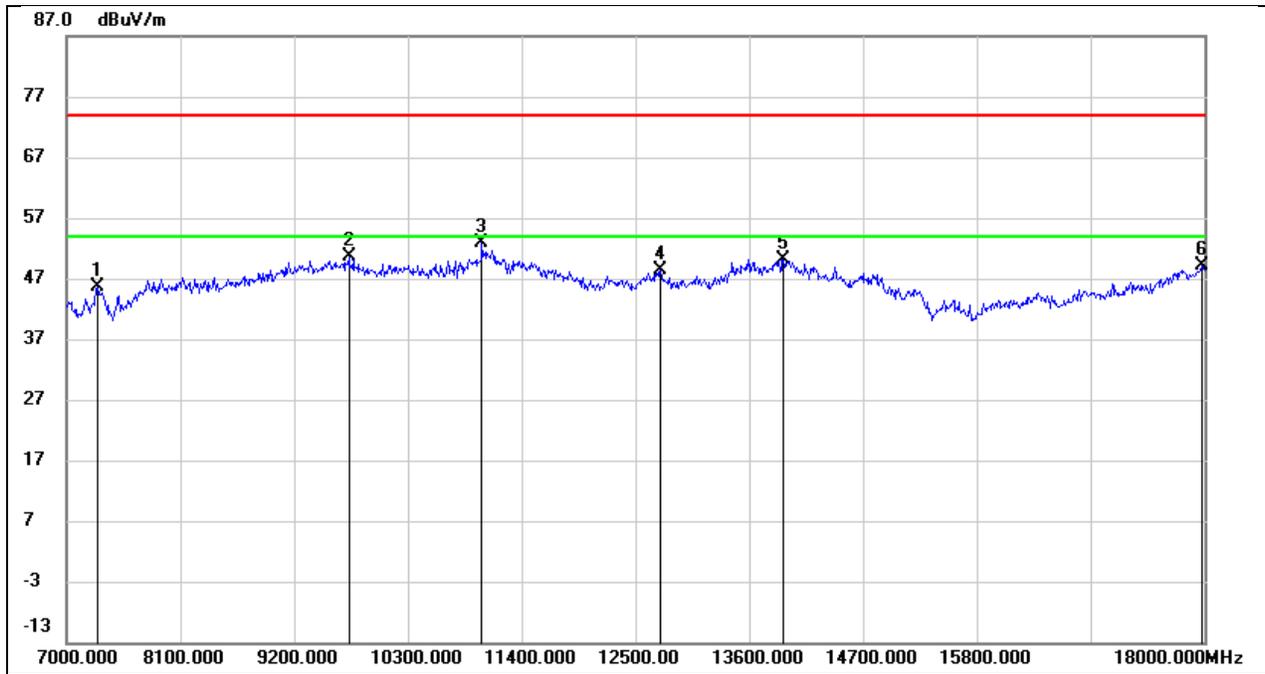


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7297.000	37.85	7.71	45.56	74.00	-28.44	peak
2	9728.000	36.88	13.65	50.53	74.00	-23.47	peak
3	11015.000	37.72	15.04	52.76	74.00	-21.24	peak
4	12742.000	28.66	19.73	48.39	74.00	-25.61	peak
5	13930.000	27.11	23.13	50.24	74.00	-23.76	peak
6	17978.000	19.97	29.18	49.15	74.00	-24.85	peak

Test Mode:	SRD 80M	Frequency(MHz):	5787.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

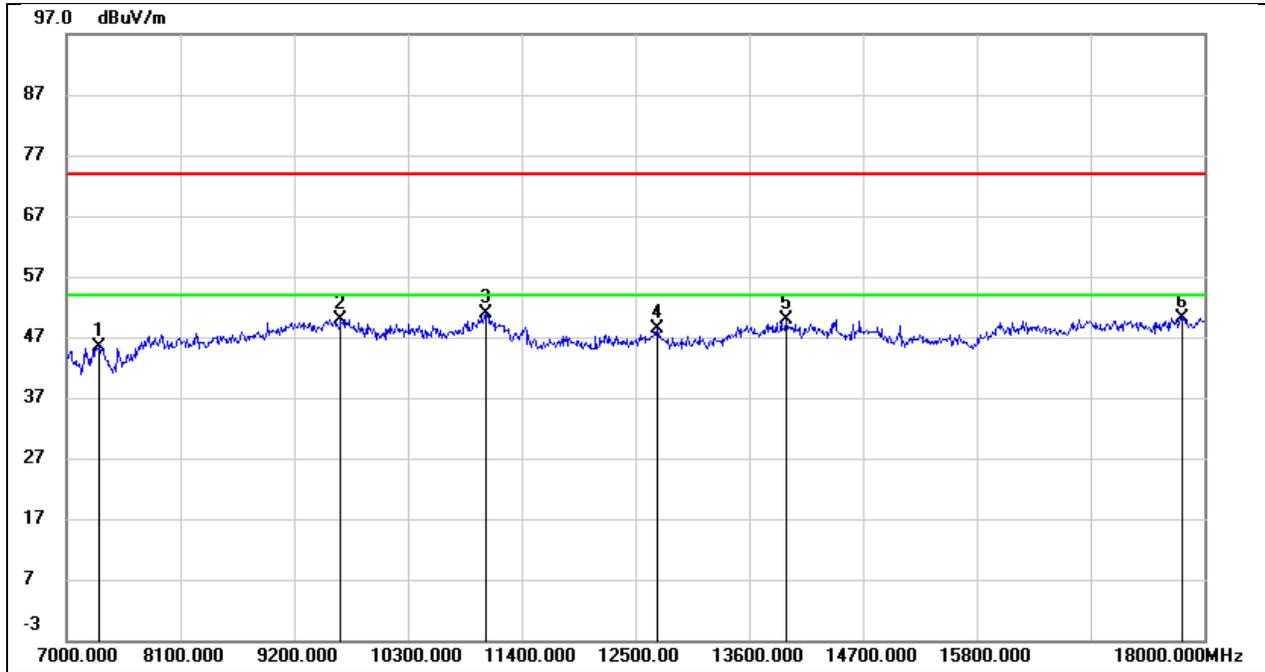


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7319.000	37.01	8.37	45.38	74.00	-28.62	peak
2	9651.000	36.61	13.30	49.91	74.00	-24.09	peak
3	11048.000	36.51	14.37	50.88	74.00	-23.12	peak
4	12709.000	29.89	18.57	48.46	74.00	-25.54	peak
5	13952.000	28.34	21.61	49.95	74.00	-24.05	peak
6	17780.000	24.39	25.86	50.25	74.00	-23.75	peak

Test Mode:	SRD 80M	Frequency(MHz):	5809.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

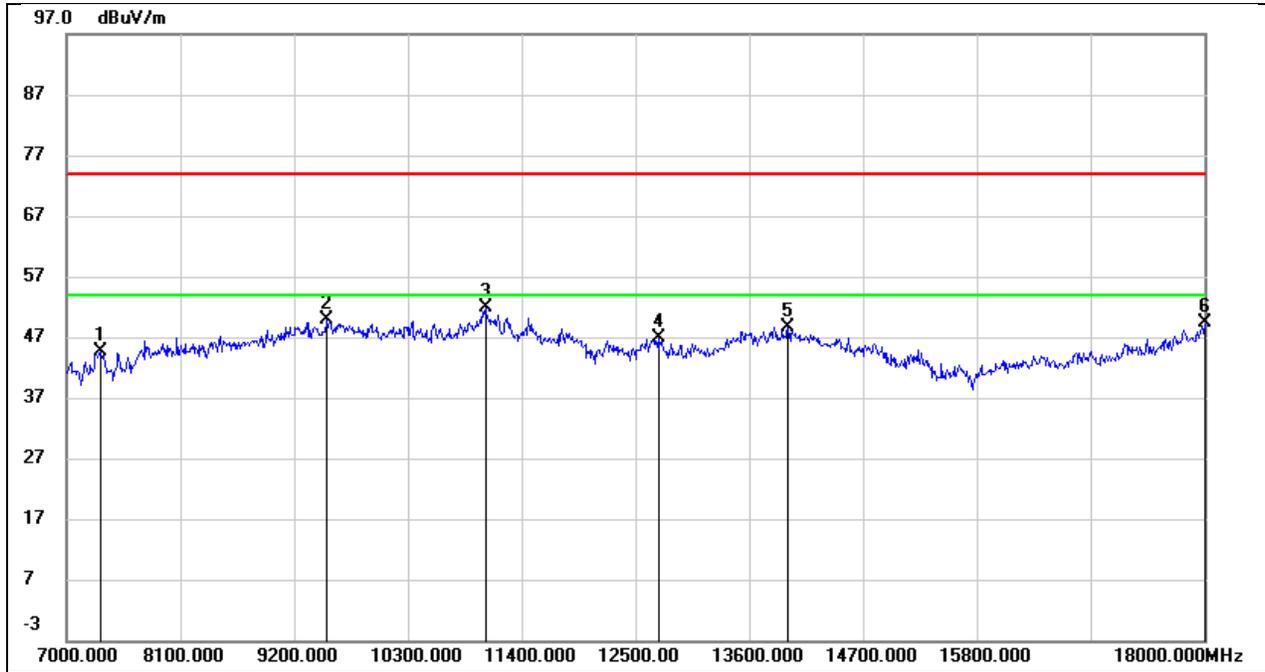

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7330.000	36.93	7.73	44.66	74.00	-29.34	peak
2	9519.000	36.93	12.93	49.86	74.00	-24.14	peak
3	11048.000	36.59	15.24	51.83	74.00	-22.17	peak
4	12720.000	27.13	19.64	46.77	74.00	-27.23	peak
5	13974.000	25.29	23.31	48.60	74.00	-25.40	peak
6	18000.000	19.89	29.41	49.30	74.00	-24.70	peak


Test Mode:	SRD 80M	Frequency(MHz):	5809.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

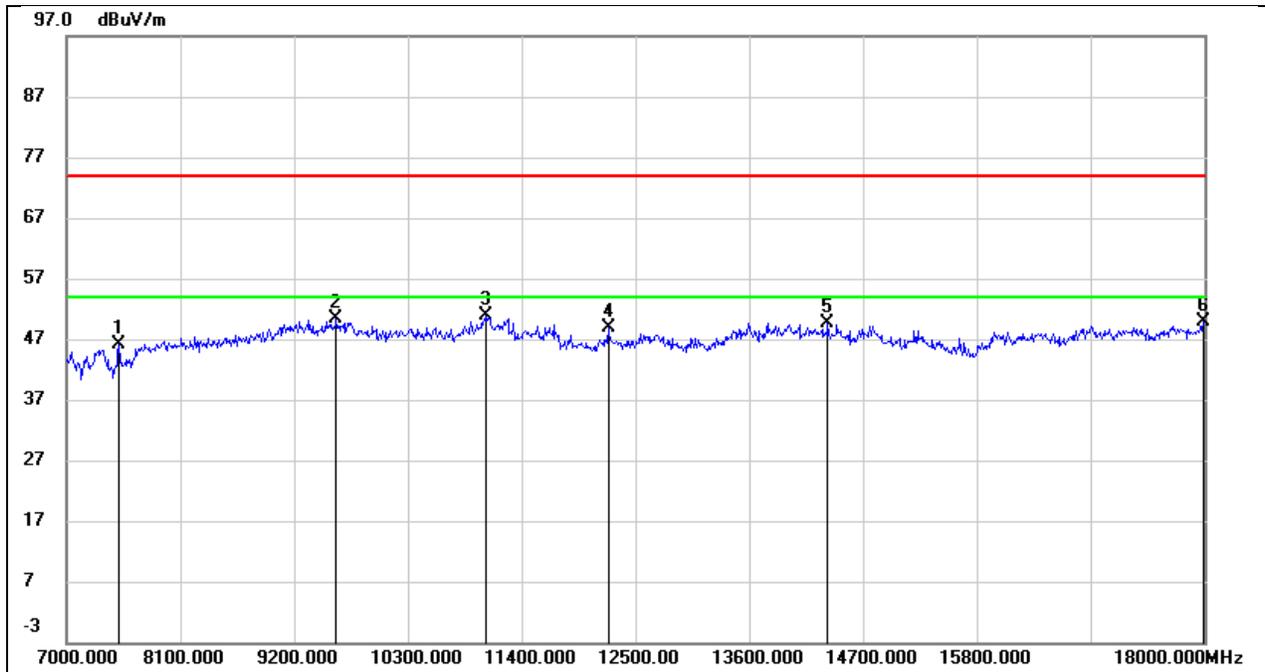

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7506.000	37.81	8.39	46.20	74.00	-27.80	peak
2	9607.000	37.16	13.29	50.45	74.00	-23.55	peak
3	11059.000	36.57	14.43	51.00	74.00	-23.00	peak
4	12236.000	30.99	17.89	48.88	74.00	-25.12	peak
5	14359.000	28.76	20.94	49.70	74.00	-24.30	peak
6	17989.000	22.63	27.13	49.76	74.00	-24.24	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

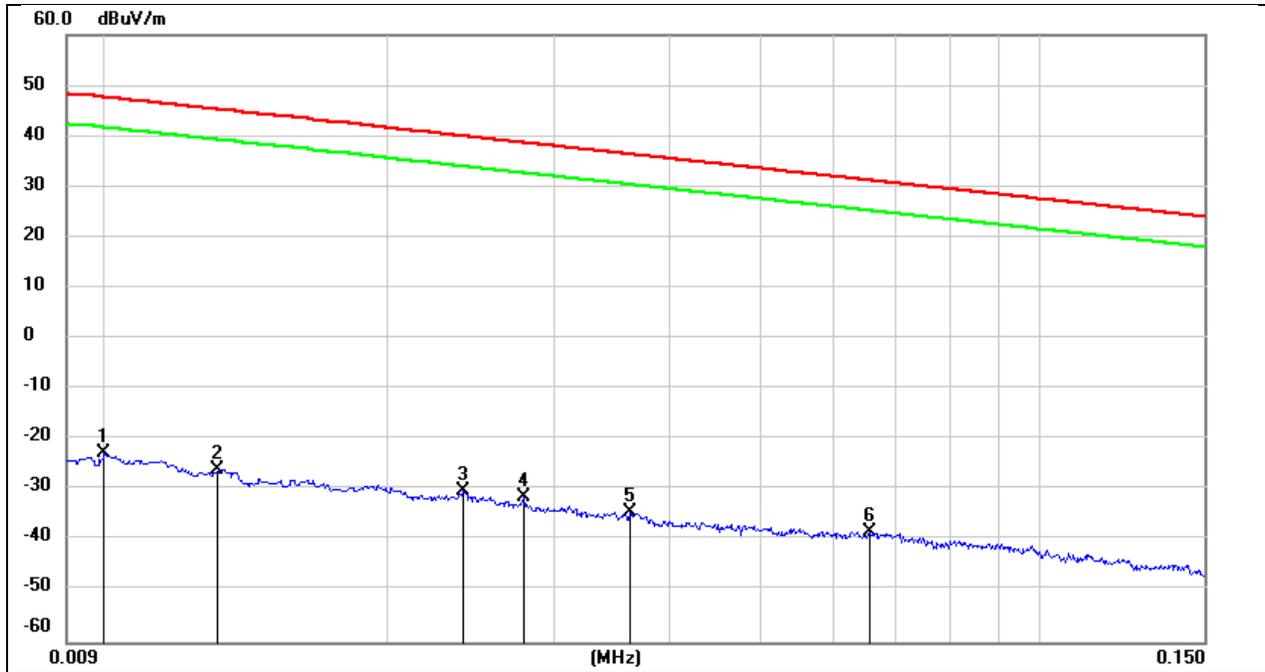


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.0100	78.72	-101.40	-22.68	47.6	-70.28	peak
2	0.0131	75.47	-101.38	-25.91	45.25	-71.16	peak
3	0.0240	71.32	-101.36	-30.04	40	-70.04	peak
4	0.0279	70.17	-101.38	-31.21	38.69	-69.90	peak
5	0.0362	67.01	-101.42	-34.41	36.43	-70.84	peak
6	0.0656	63.36	-101.55	-38.19	31.26	-69.45	peak

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

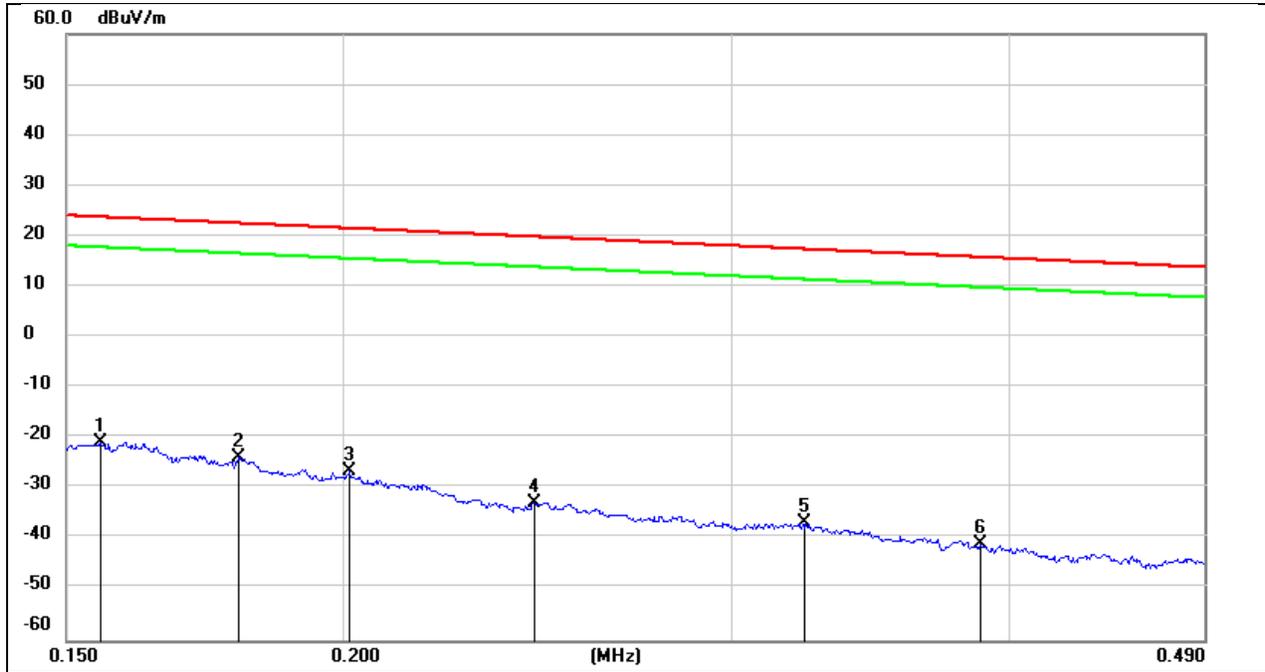

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	80.77	-101.65	-20.88	23.77	-44.65	peak
2	0.1794	77.77	-101.68	-23.91	22.53	-46.44	peak
3	0.2013	75.05	-101.72	-26.67	21.52	-48.19	peak
4	0.2442	69.03	-101.79	-32.76	19.85	-52.61	peak
5	0.3234	64.98	-101.88	-36.9	17.41	-54.31	peak
6	0.3881	60.90	-101.95	-41.05	15.82	-56.87	peak


Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

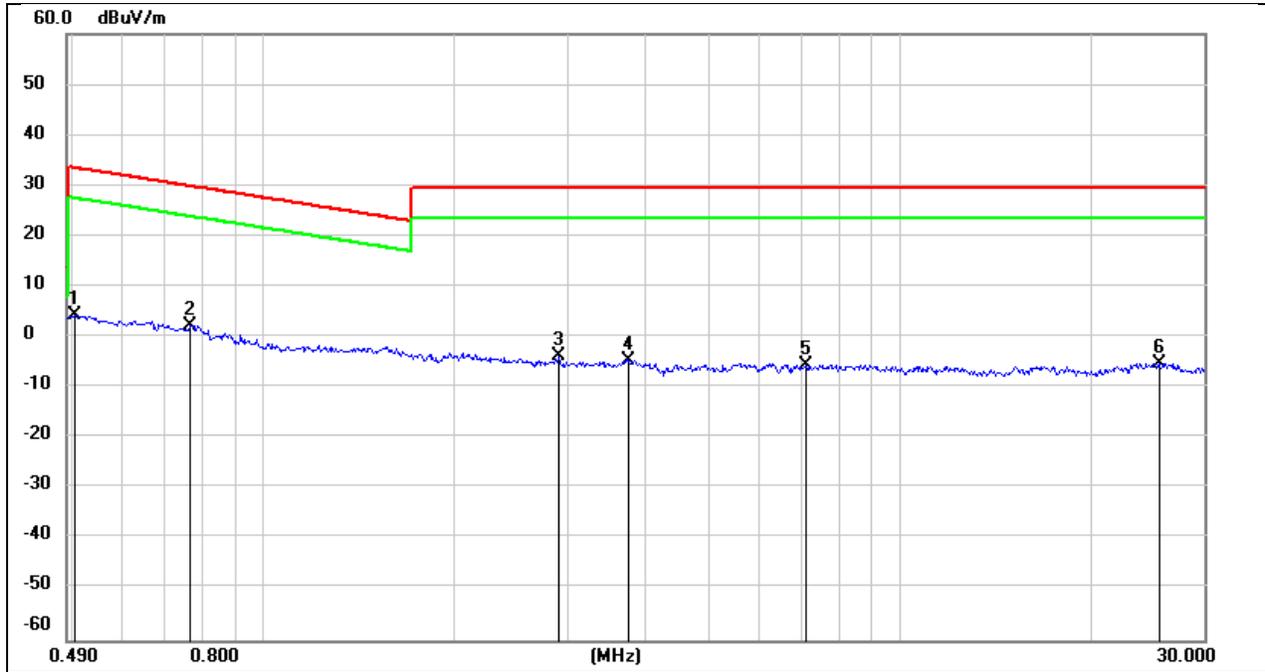

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	Margin (dB)	Remark
1	0.5039	66.43	-62.07	4.36	33.56	-29.20	peak
2	0.7641	64.42	-62.12	2.3	29.94	-27.64	peak
3	2.9102	57.73	-61.60	-3.87	29.54	-33.41	peak
4	3.7406	56.80	-61.40	-4.6	29.54	-34.14	peak
5	7.1298	55.67	-61.19	-5.52	29.54	-35.06	peak
6	25.4847	55.22	-60.40	-5.18	29.54	-34.72	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

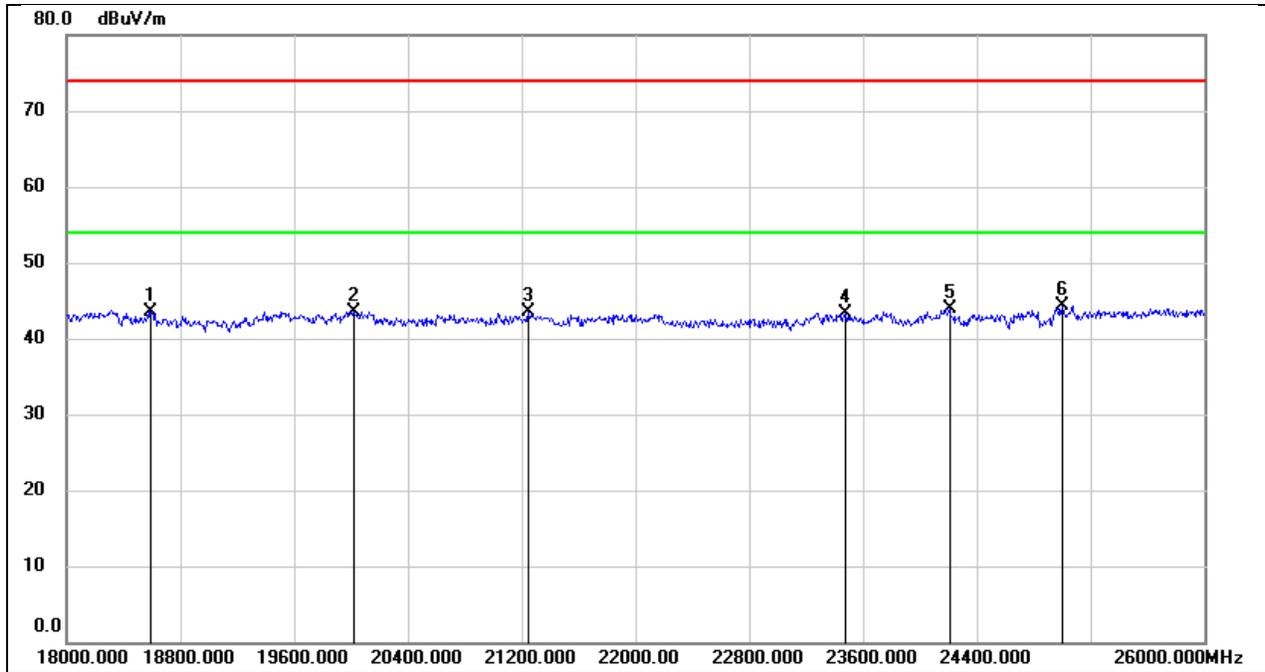

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18592.000	48.75	-5.31	43.44	74.00	-30.56	peak
2	20016.000	49.06	-5.47	43.59	74.00	-30.41	peak
3	21248.000	48.29	-4.77	43.52	74.00	-30.48	peak
4	23480.000	46.54	-3.16	43.38	74.00	-30.62	peak
5	24208.000	46.71	-2.81	43.90	74.00	-30.10	peak
6	25000.000	46.36	-2.10	44.26	74.00	-29.74	peak


Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

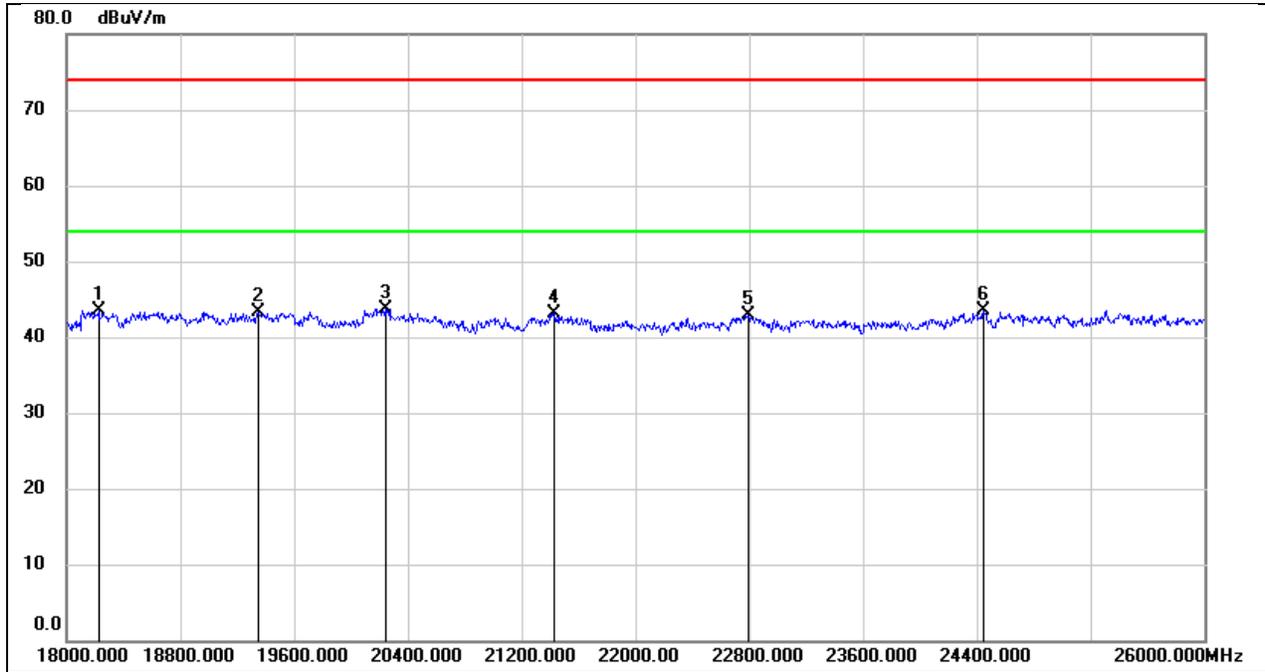

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18224.000	49.08	-5.53	43.55	74.00	-30.45	peak
2	19344.000	48.93	-5.57	43.36	74.00	-30.64	peak
3	20240.000	49.32	-5.61	43.71	74.00	-30.29	peak
4	21432.000	47.74	-4.71	43.03	74.00	-30.97	peak
5	22792.000	46.61	-3.65	42.96	74.00	-31.04	peak
6	24448.000	45.92	-2.42	43.50	74.00	-30.50	peak


8.6. SPURIOUS EMISSIONS(26 GHZ~40 GHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

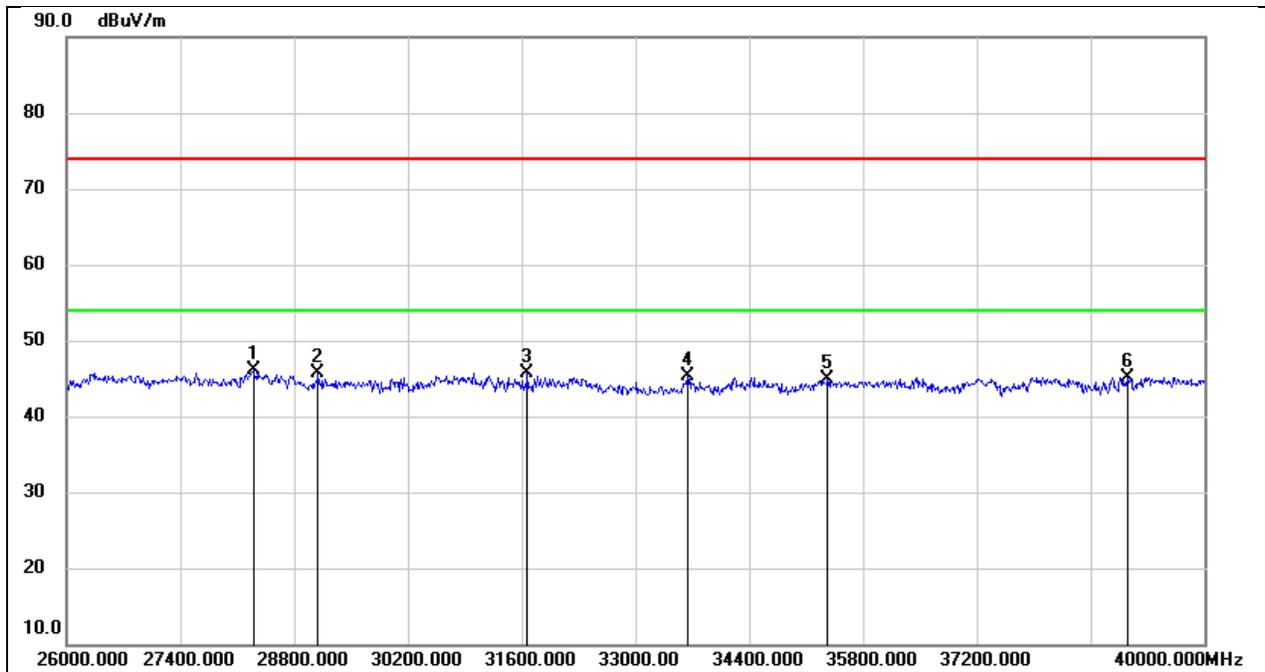

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	28296.000	48.46	-2.45	46.01	74.00	-27.99	peak
2	29094.000	46.95	-1.28	45.67	74.00	-28.33	peak
3	31670.000	46.86	-1.21	45.65	74.00	-28.35	peak
4	33644.000	44.81	0.42	45.23	74.00	-28.77	peak
5	35366.000	42.40	2.59	44.99	74.00	-29.01	peak
6	39062.000	40.81	4.30	45.11	74.00	-28.89	peak


Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

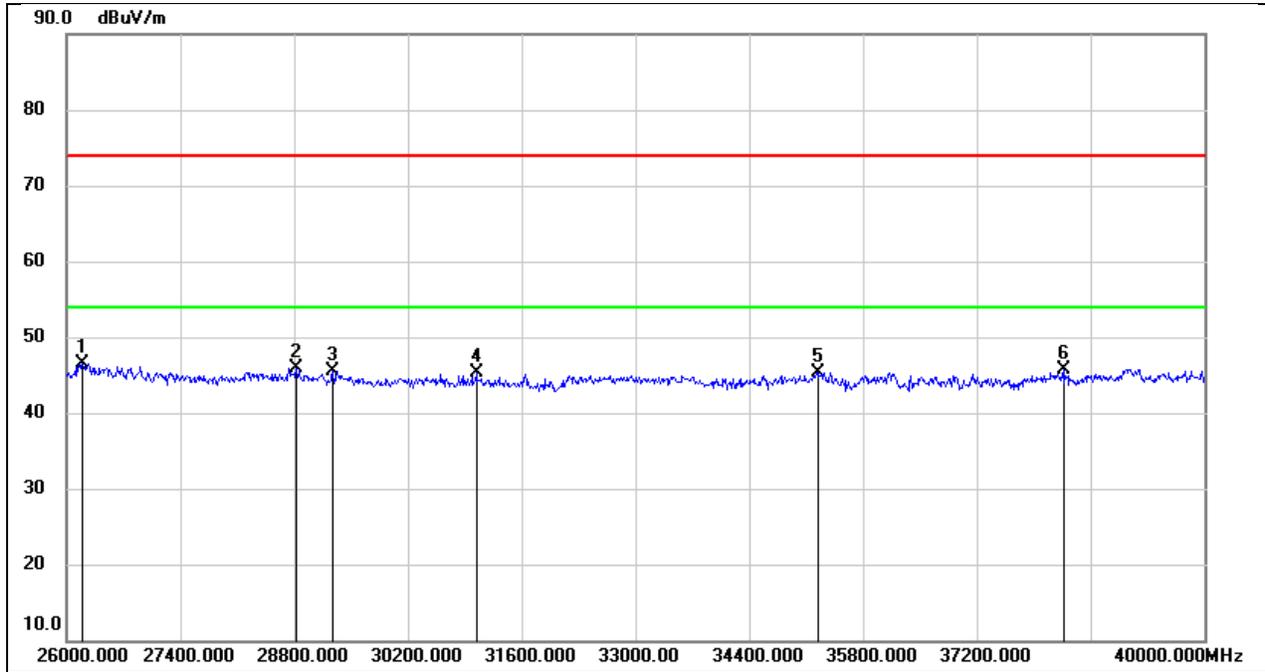

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	26196.000	52.08	-5.53	46.55	74.00	-27.45	peak
2	28828.000	46.63	-0.79	45.84	74.00	-28.16	peak
3	29276.000	46.51	-1.01	45.50	74.00	-28.50	peak
4	31040.000	45.95	-0.72	45.23	74.00	-28.77	peak
5	35254.000	42.62	2.65	45.27	74.00	-28.73	peak
6	38278.000	41.82	3.82	45.64	74.00	-28.36	peak


8.7. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Horizontal	Test Voltage:	DC 7.16V

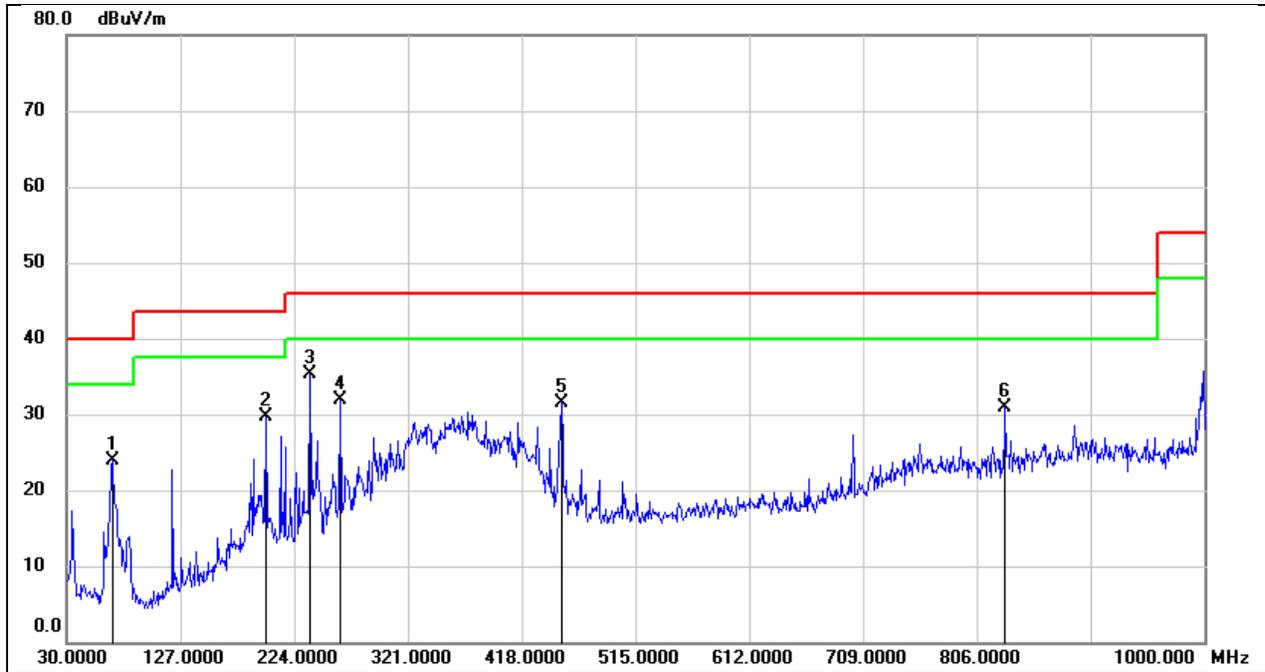

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	68.8000	39.92	-16.05	23.87	40.00	-16.13	QP
2	199.7500	41.26	-11.60	29.66	43.50	-13.84	QP
3	237.5800	48.90	-13.65	35.25	46.00	-10.75	QP
4	263.7700	45.43	-13.59	31.84	46.00	-14.16	QP
5	451.9500	39.70	-8.10	31.60	46.00	-14.40	QP
6	830.2500	33.05	-2.09	30.96	46.00	-15.04	QP

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Polarity:	Vertical	Test Voltage:	DC 7.16V

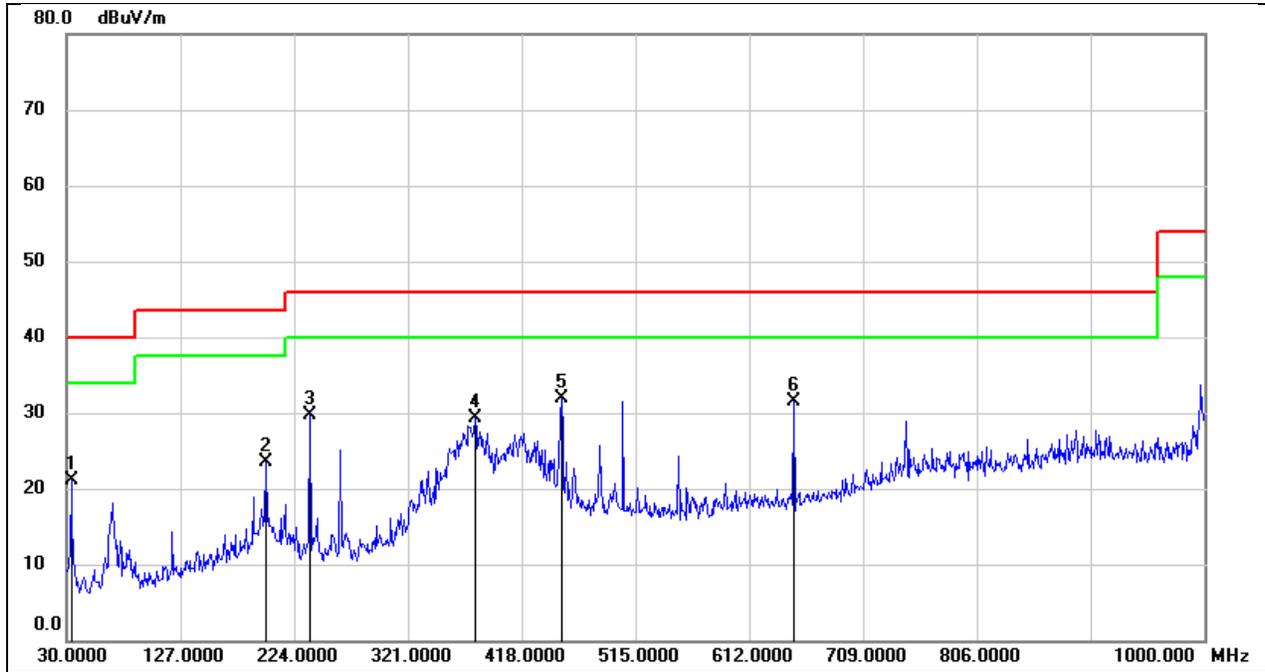

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	33.8800	35.56	-14.52	21.04	40.00	-18.96	QP
2	199.7500	35.04	-11.60	23.44	43.50	-20.06	QP
3	237.5800	43.33	-13.65	29.68	46.00	-16.32	QP
4	378.2300	38.68	-9.30	29.38	46.00	-16.62	QP
5	451.9500	39.92	-8.10	31.82	46.00	-14.18	QP
6	649.8300	37.23	-5.74	31.49	46.00	-14.51	QP

9. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00


TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

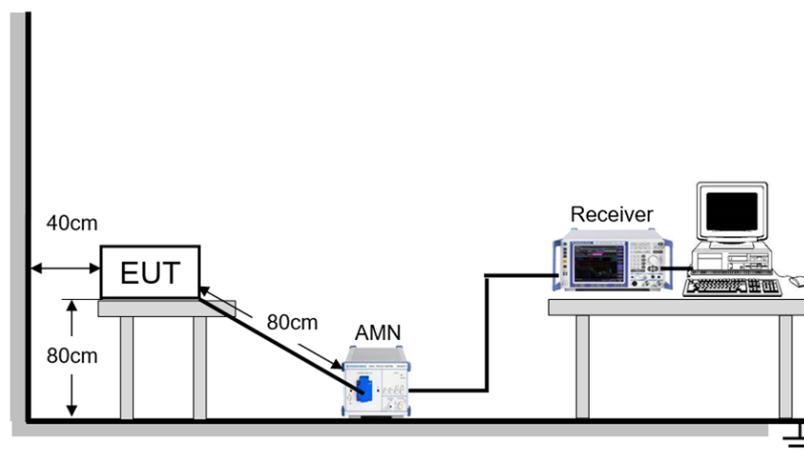

TEST ENVIRONMENT

Temperature	25.0°C	Relative Humidity	61.0%
-------------	--------	-------------------	-------


Atmosphere Pressure	101kPa	Test Voltage	AC 120V 60Hz
---------------------	--------	--------------	--------------

TEST DATE / ENGINEER

Test Date	October 22, 2024	Test By	Johnson Liu
-----------	------------------	---------	-------------

TEST RESULTS

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Line:	Line		

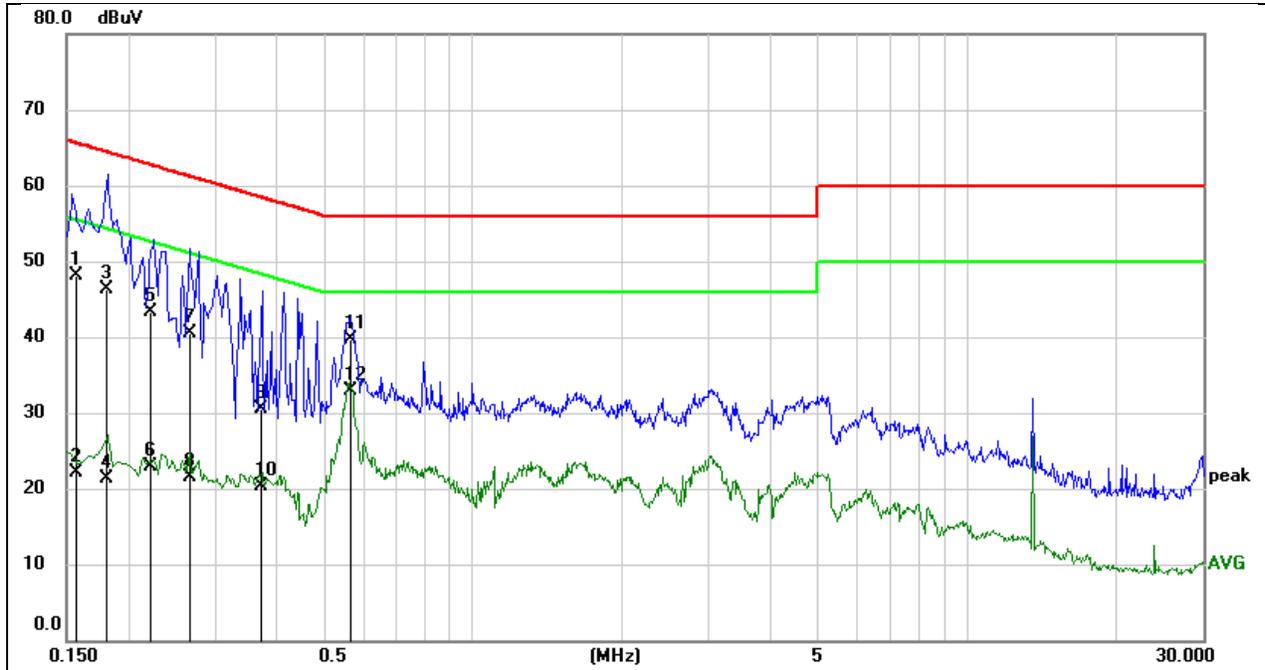


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1569	37.80	10.33	48.13	65.63	-17.50	QP
2	0.1569	11.70	10.33	22.03	55.63	-33.60	AVG
3	0.1797	35.95	10.28	46.23	64.50	-18.27	QP
4	0.1797	10.95	10.28	21.23	54.50	-33.27	AVG
5	0.2219	33.10	10.24	43.34	62.75	-19.41	QP
6	0.2219	12.72	10.24	22.96	52.75	-29.79	AVG
7	0.2646	30.24	10.24	40.48	61.29	-20.81	QP
8	0.2646	11.18	10.24	21.42	51.29	-29.87	AVG
9	0.3710	20.19	10.24	30.43	58.48	-28.05	QP
10	0.3710	10.13	10.24	20.37	48.48	-28.11	AVG
11	0.5638	29.40	10.24	39.64	56.00	-16.36	QP
12	0.5638	22.69	10.24	32.93	46.00	-13.07	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	SRD 10M	Frequency(MHz):	5730.5
Line:	Neutral		

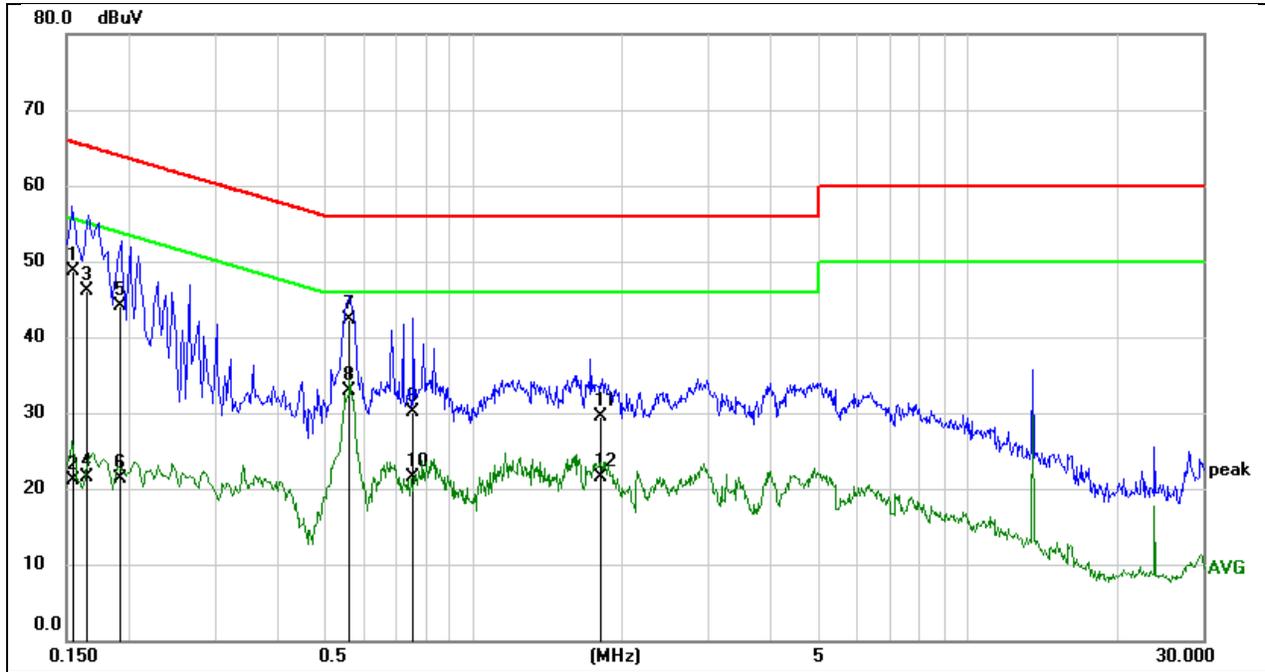

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1556	38.34	10.33	48.67	65.70	-17.03	QP
2	0.1556	10.87	10.33	21.20	55.70	-34.50	AVG
3	0.1650	35.81	10.31	46.12	65.21	-19.09	QP
4	0.1650	11.23	10.31	21.54	55.21	-33.67	AVG
5	0.1918	33.81	10.26	44.07	63.96	-19.89	QP
6	0.1918	11.11	10.26	21.37	53.96	-32.59	AVG
7	0.5618	32.07	10.24	42.31	56.00	-13.69	QP
8	0.5618	22.58	10.24	32.82	46.00	-13.18	AVG
9	0.7560	19.89	10.19	30.08	56.00	-25.92	QP
10	0.7560	11.28	10.19	21.47	46.00	-24.53	AVG
11	1.8127	19.46	9.96	29.42	56.00	-26.58	QP
12	1.8127	11.53	9.96	21.49	46.00	-24.51	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

10. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.407(a)

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

11. TEST DATA


11.1. APPENDIX A: EMISSION BANDWIDTH


11.1.1. Test Result

Test Mode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]
SRD 10M	Ant0	5157	10.36	5151.88	5162.24
	Ant1	5157	10.40	5151.84	5162.24
	Ant0	5158	10.24	5152.96	5163.20
	Ant1	5158	10.48	5152.88	5163.36
	Ant0	5160	10.32	5154.88	5165.20
	Ant1	5160	10.44	5154.80	5165.24
	Ant0	5162	10.32	5156.88	5167.20
	Ant1	5162	10.44	5156.80	5167.24
	Ant0	5163	10.24	5157.96	5168.20
	Ant1	5163	10.40	5157.84	5168.24
	Ant0	5166	10.28	5160.92	5171.20
	Ant1	5166	10.40	5160.88	5171.28
	Ant0	5167	10.16	5161.92	5172.08
	Ant1	5167	10.44	5161.84	5172.28
	Ant0	5169	10.28	5163.92	5174.20
	Ant1	5169	10.40	5163.88	5174.28
	Ant0	5201	10.32	5195.88	5206.20
	Ant1	5201	10.44	5195.84	5206.28
	Ant0	5245	10.20	5239.96	5250.16
	Ant1	5245	10.36	5239.92	5250.28
Ant0	5730.5	10.40	5725.26	5735.66	
Ant1	5730.5	10.96	5725.02	5735.98	
Ant0	5787.5	10.28	5782.34	5792.62	
Ant1	5787.5	10.72	5782.10	5792.82	
Ant0	5844.5	10.68	5839.18	5849.86	
Ant1	5844.5	10.64	5839.26	5849.90	
SRD 20M	Ant0	5161	20.04	5150.96	5171.00
	Ant1	5161	19.64	5151.20	5170.84
	Ant0	5162	19.76	5152.12	5171.88
	Ant1	5162	19.52	5152.24	5171.76
	Ant0	5167	20.08	5156.92	5177.00
	Ant1	5167	19.64	5157.24	5176.88
	Ant0	5169	19.96	5159.08	5179.04
	Ant1	5169	19.68	5159.16	5178.84
	Ant0	5171	19.80	5161.12	5180.92
	Ant1	5171	19.72	5161.12	5180.84
	Ant0	5201	19.48	5191.16	5210.64
	Ant1	5201	19.56	5191.20	5210.76
	Ant0	5240	19.60	5230.24	5249.84
	Ant1	5240	19.60	5230.16	5249.76
	Ant0	5735.5	19.68	5725.86	5745.54
	Ant1	5735.5	20.84	5724.70	5745.54
	Ant0	5787.5	20.32	5777.78	5798.10
	Ant1	5787.5	19.36	5777.90	5797.26
	Ant0	5839.5	21.60	5828.62	5850.22
	Ant1	5839.5	19.40	5829.94	5849.34
SRD 40M	Ant0	5170	38.64	5150.72	5189.36
	Ant1	5170	38.40	5150.96	5189.36
	Ant0	5171	38.40	5151.88	5190.28
	Ant1	5171	38.32	5151.96	5190.28
	Ant0	5173	38.32	5153.88	5192.20
	Ant1	5173	38.32	5154.04	5192.36


	Ant0	5177	38.56	5157.80	5196.36
	Ant1	5177	38.16	5158.04	5196.20
	Ant0	5187	38.24	5167.88	5206.12
	Ant1	5187	38.32	5167.96	5206.28
	Ant0	5200	38.40	5180.80	5219.20
	Ant1	5200	38.32	5180.96	5219.28
	Ant0	5230	38.48	5210.72	5249.20
	Ant1	5230	38.08	5211.04	5249.12
	Ant0	5745.5	36.80	5727.10	5763.90
	Ant1	5745.5	36.72	5727.18	5763.90
	Ant0	5787.5	37.04	5768.94	5805.98
	Ant1	5787.5	36.88	5769.10	5805.98
	Ant0	5829.5	36.80	5811.10	5847.90
	Ant1	5829.5	36.80	5811.18	5847.98
SRD 60M	Ant0	5180	56.76	5151.56	5208.32
	Ant1	5180	57.00	5151.56	5208.56
	Ant0	5182	56.52	5153.92	5210.44
	Ant1	5182	56.76	5153.68	5210.44
	Ant0	5186	56.64	5157.92	5214.56
	Ant1	5186	56.76	5157.56	5214.32
	Ant0	5191	56.64	5162.92	5219.56
	Ant1	5191	57.00	5162.56	5219.56
	Ant0	5195	56.76	5166.80	5223.56
	Ant1	5195	56.76	5166.68	5223.44
	Ant0	5200	56.76	5171.68	5228.44
	Ant1	5200	56.76	5171.80	5228.56
	Ant0	5220	56.64	5191.80	5248.44
	Ant1	5220	57.12	5191.56	5248.68
	Ant0	5755.5	65.76	5723.34	5789.10
	Ant1	5755.5	65.28	5723.66	5788.94
	Ant0	5787.5	67.84	5753.58	5821.42
	Ant1	5787.5	64.96	5756.14	5821.10
Ant0	5819.5	65.60	5787.50	5853.10	
Ant1	5819.5	64.32	5788.30	5852.62	
SRD 80M	Ant0	5190	74.40	5152.56	5226.96
	Ant1	5190	74.24	5153.04	5227.28
	Ant0	5192	74.56	5154.88	5229.44
	Ant1	5192	74.08	5155.20	5229.28
	Ant0	5195	74.56	5162.68	5237.24
	Ant1	5195	74.08	5163.16	5237.24
	Ant0	5200	74.40	5162.88	5237.28
	Ant1	5200	74.40	5163.04	5237.44
	Ant0	5210	74.56	5172.88	5247.44
	Ant1	5210	74.08	5173.20	5247.28
	Ant0	5765.5	72.64	5729.18	5801.82
	Ant1	5765.5	72.48	5729.34	5801.82
	Ant0	5787.5	72.64	5751.18	5823.82
	Ant1	5787.5	72.48	5751.34	5823.82
	Ant0	5809.5	72.48	5773.34	5845.82
	Ant1	5809.5	72.48	5773.34	5845.82

11.1.2. Test Graphs

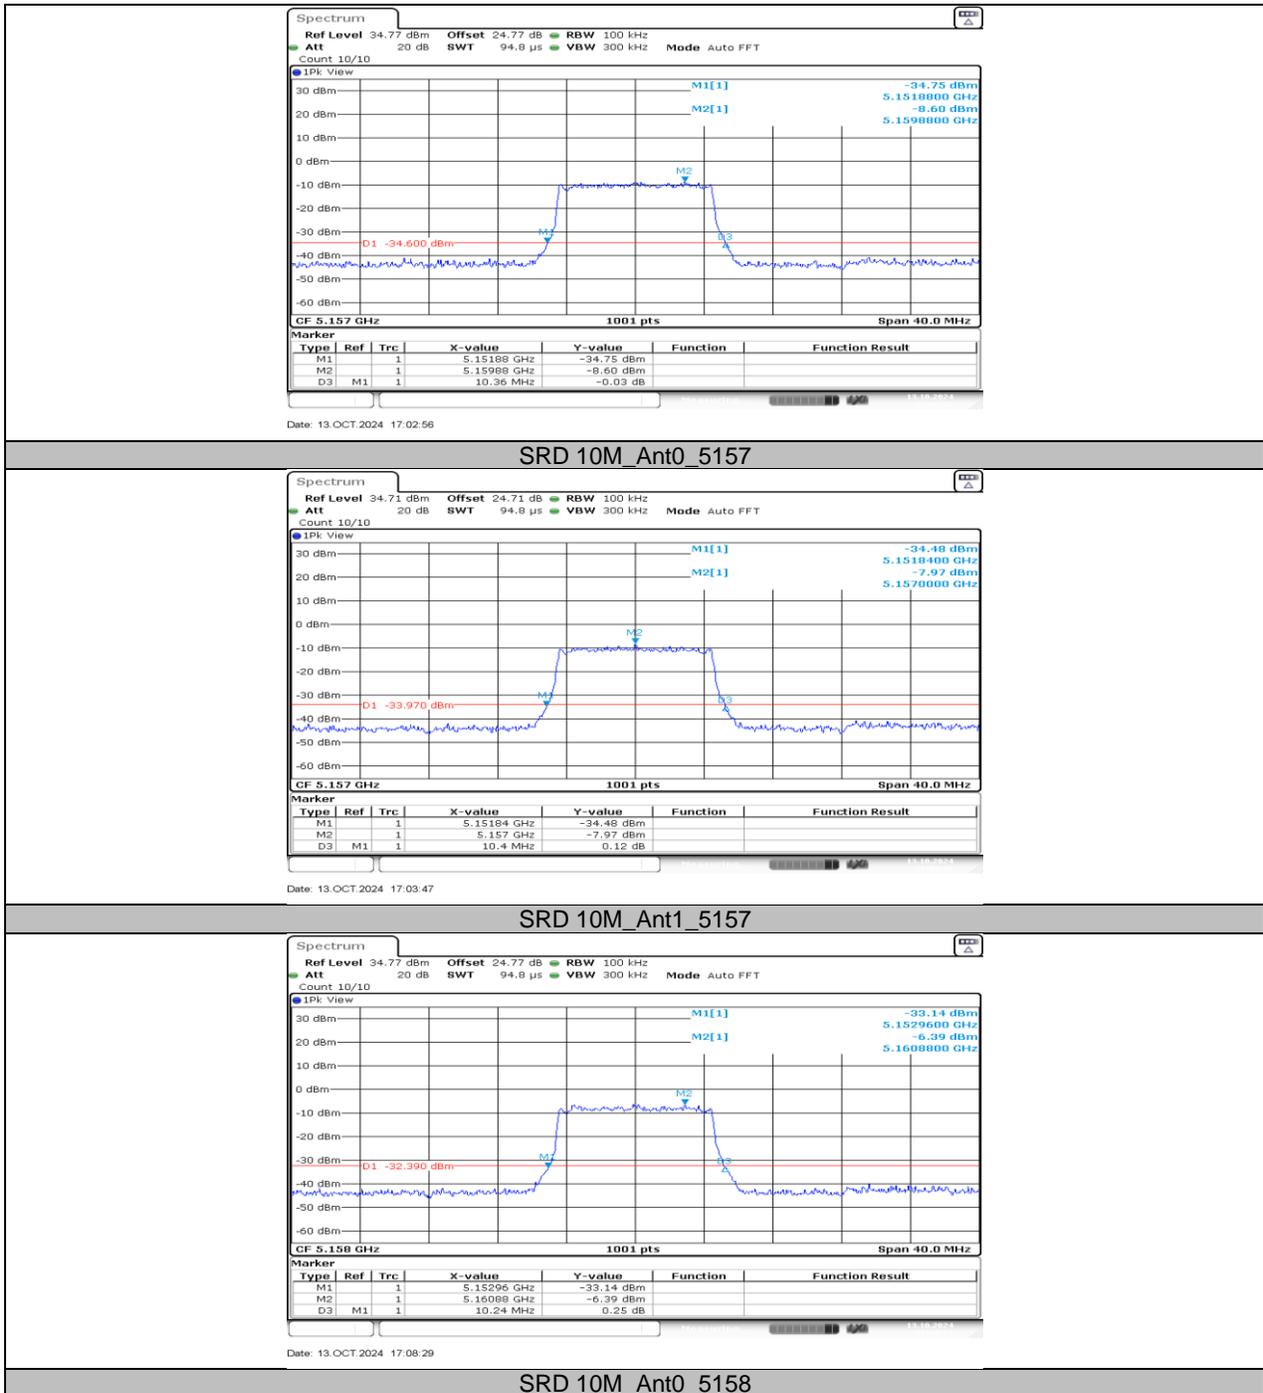


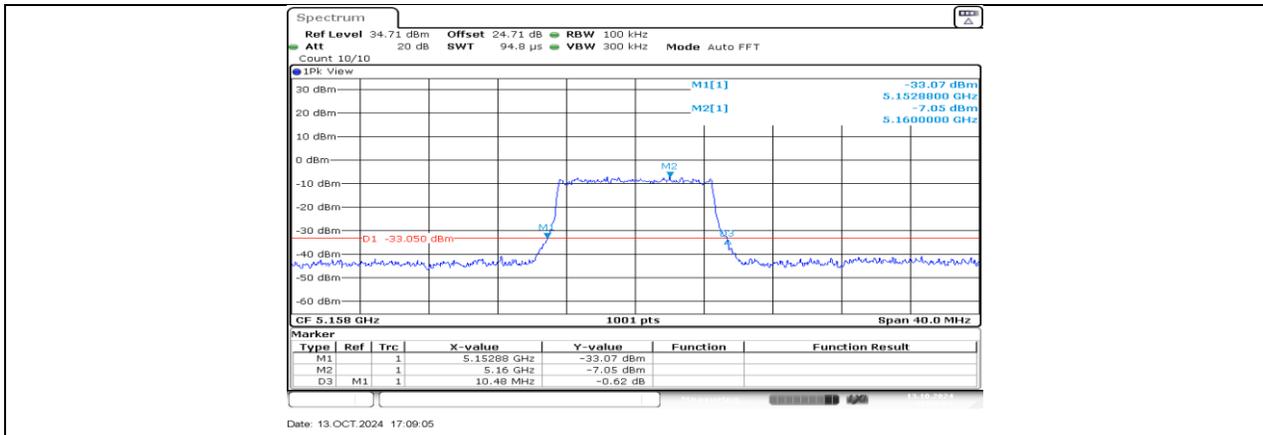


SRD 10M_Ant1_5158

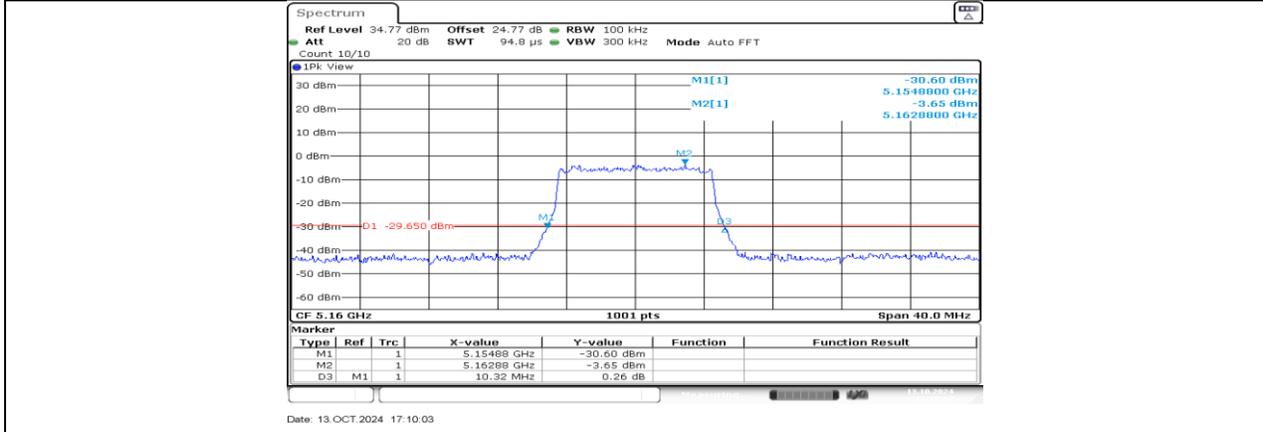


SRD 10M_Ant0_5160

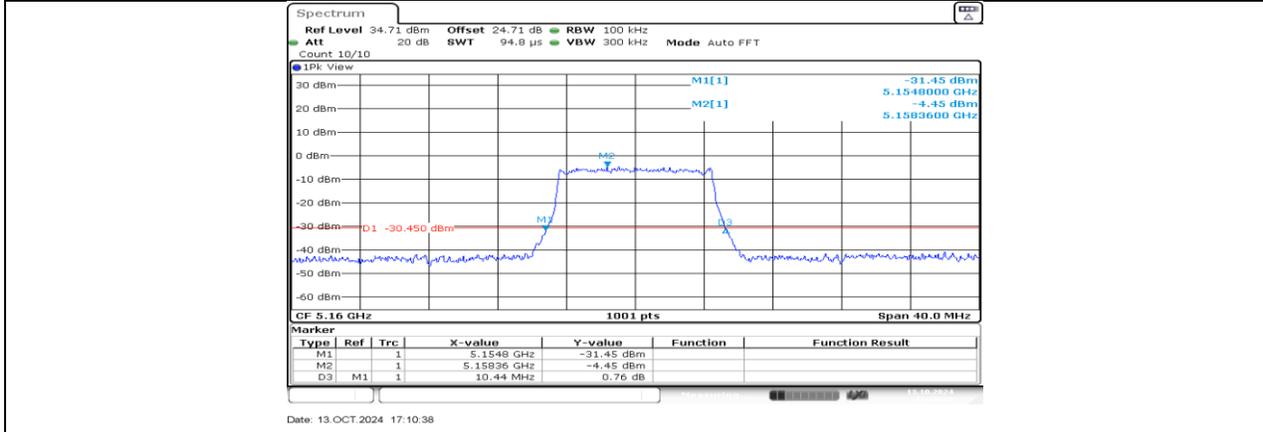


SRD 10M_Ant1_5160

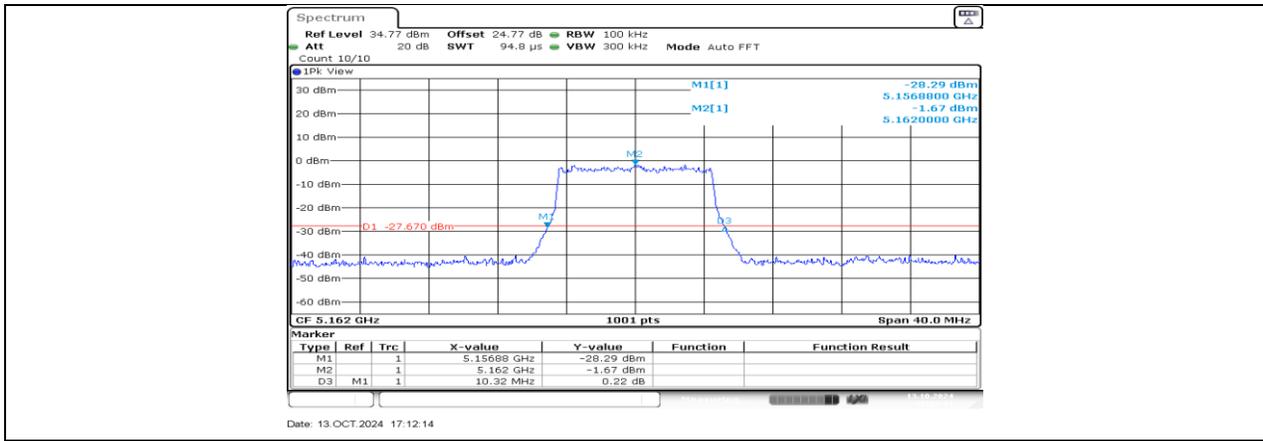


SRD 10M_Ant0_5162

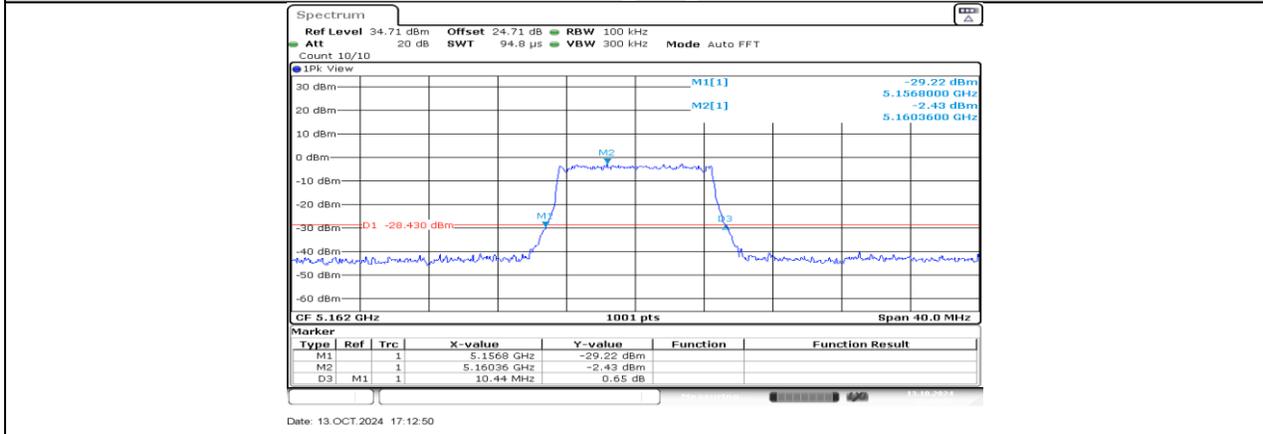


SRD 10M_Ant1_5162

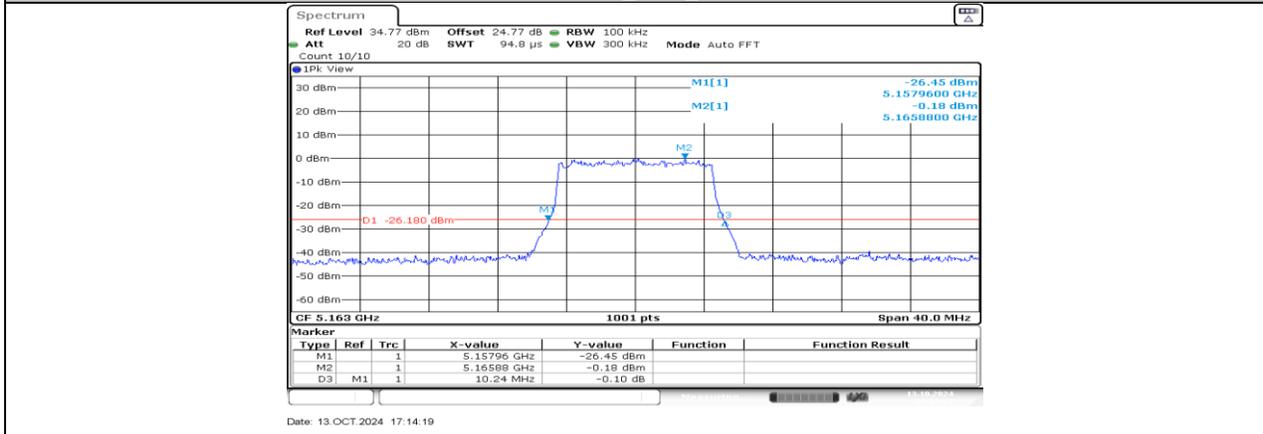


SRD 10M_Ant0_5163

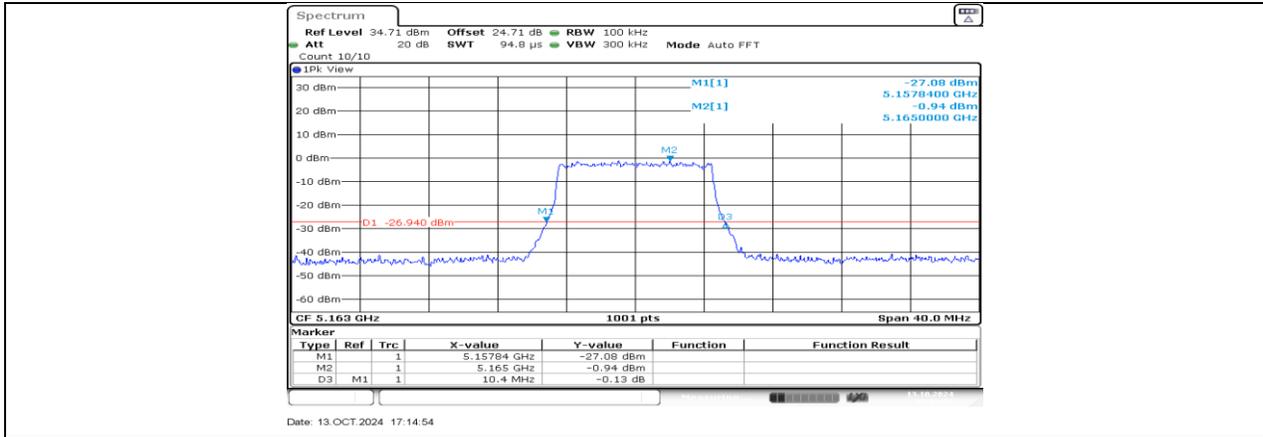


SRD 10M_Ant1_5163

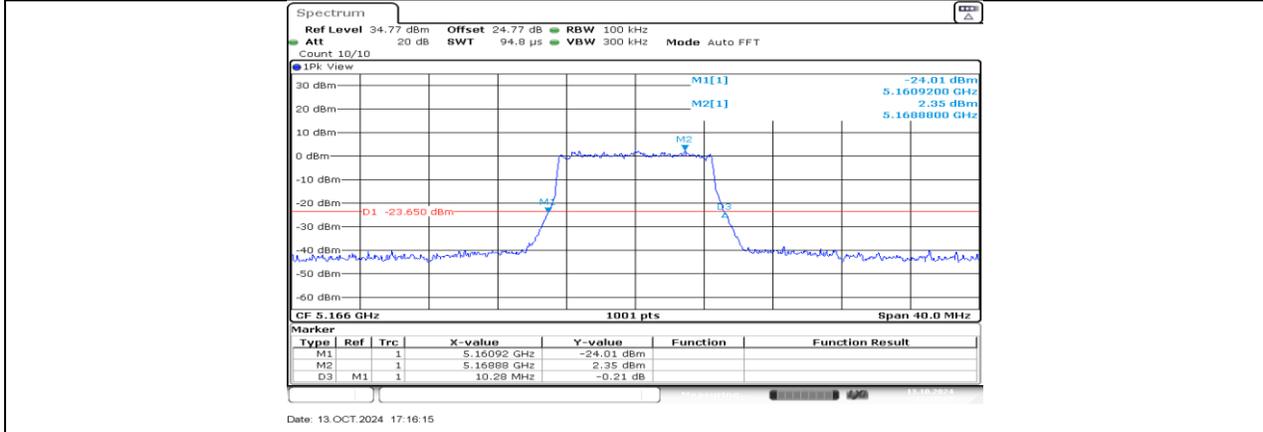


SRD 10M_Ant0_5166

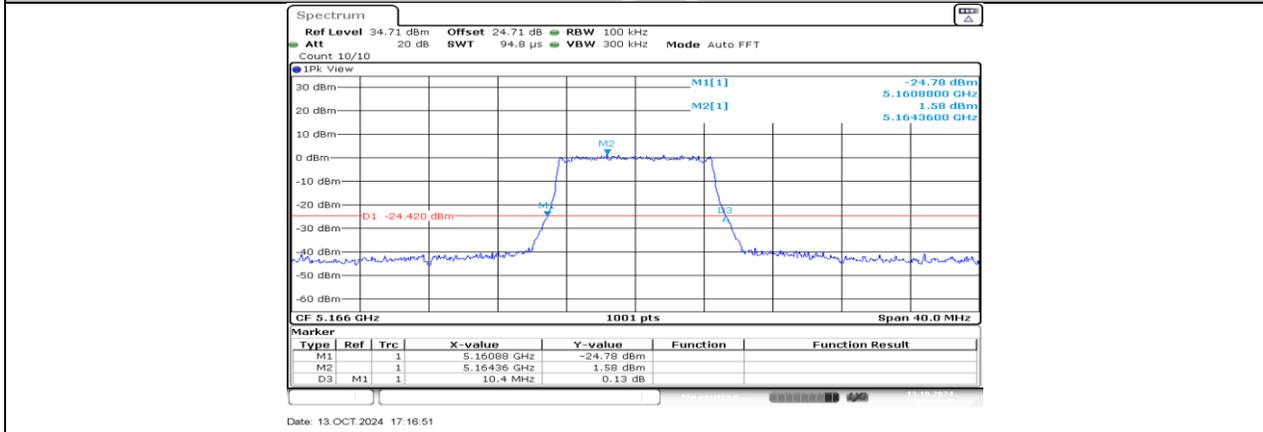


SRD 10M_Ant1_5166

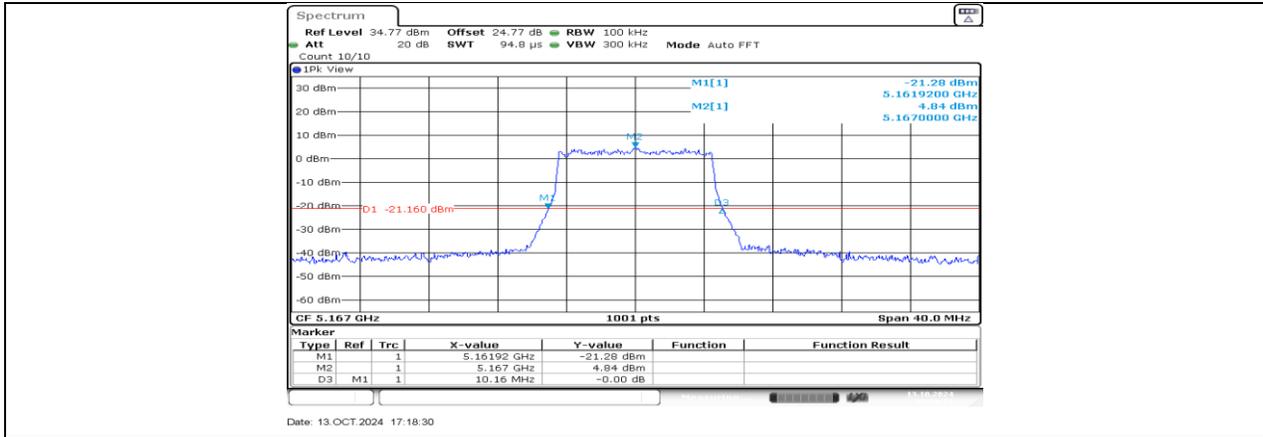


SRD 10M_Ant0_5167

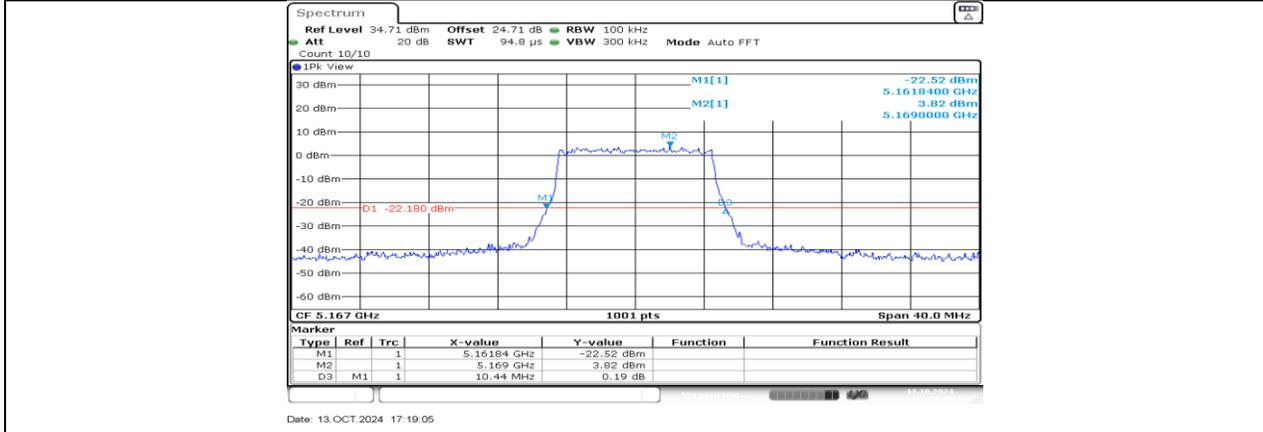


SRD 10M_Ant1_5167

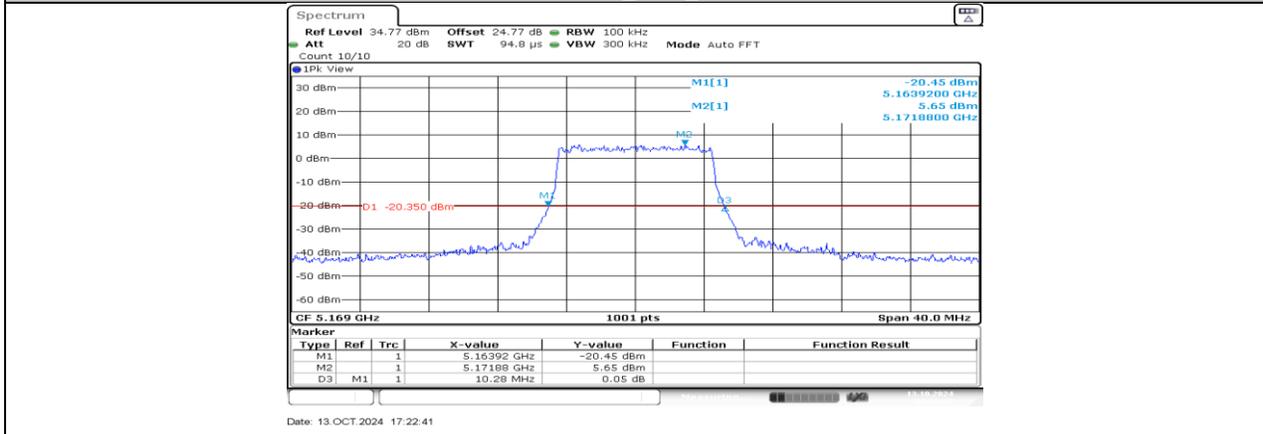

SRD 10M_Ant0_5169

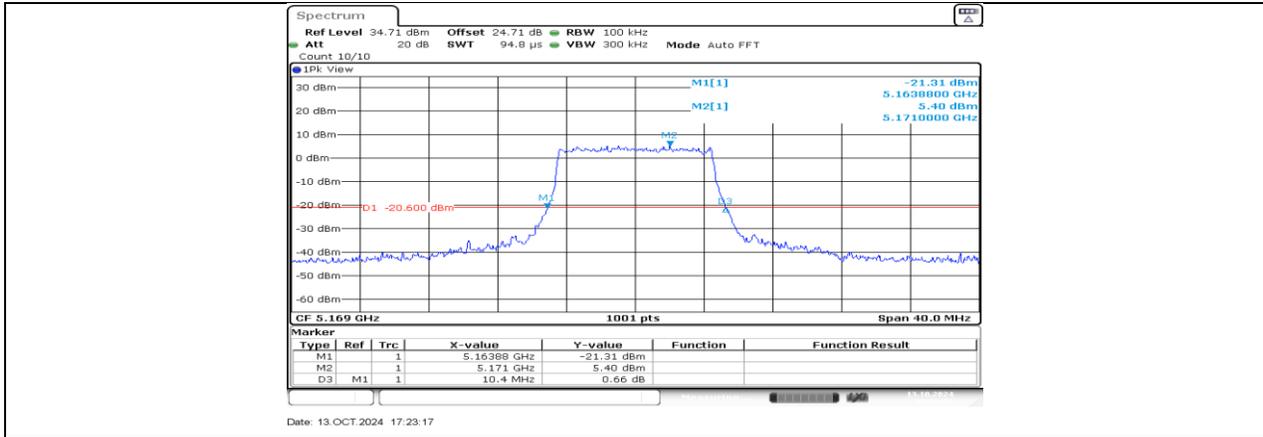


SRD 10M_Ant1_5169

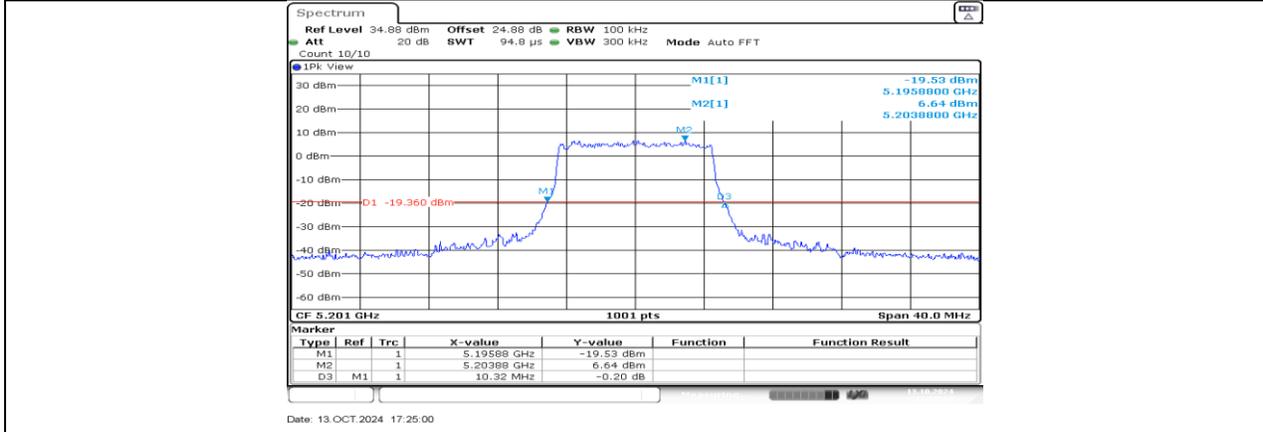


SRD 10M_Ant0_5201




SRD 10M_Ant1_5201

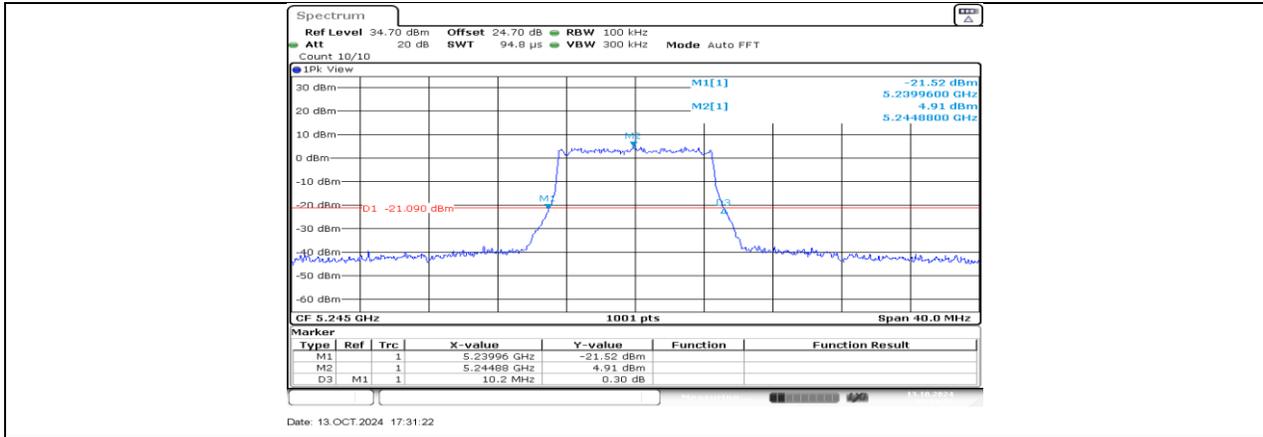


SRD 10M_Ant0_5245

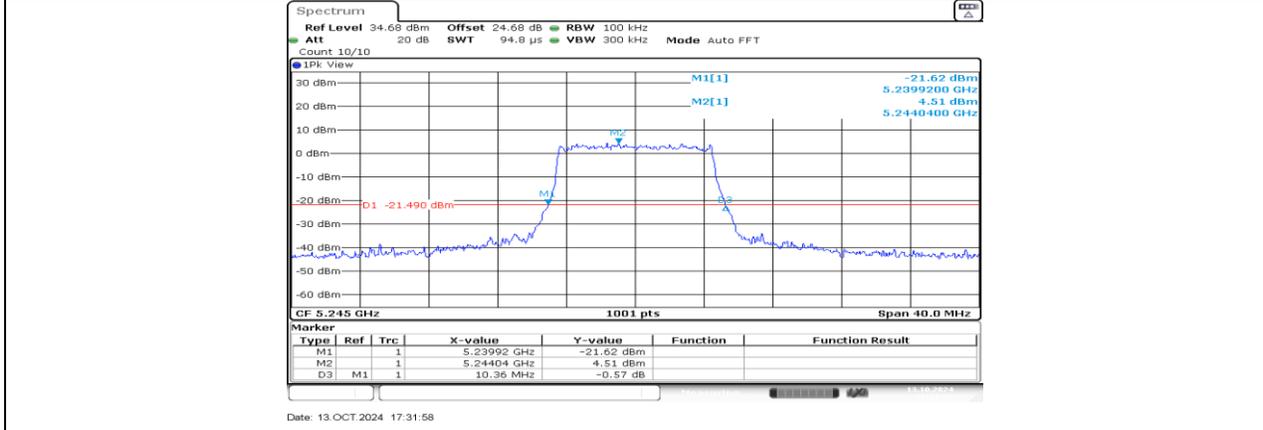


SRD 10M_Ant1_5245

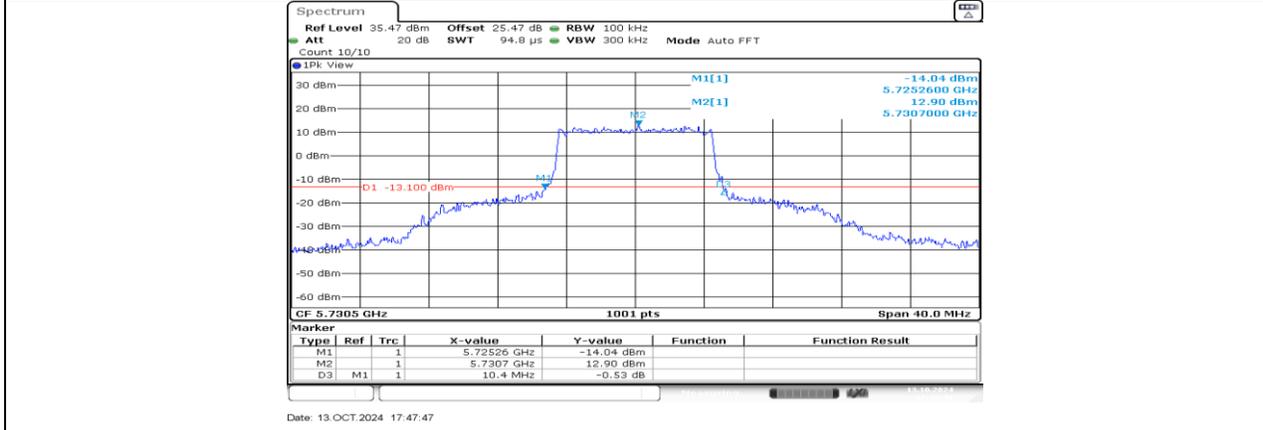


SRD 10M_Ant0_5730.5

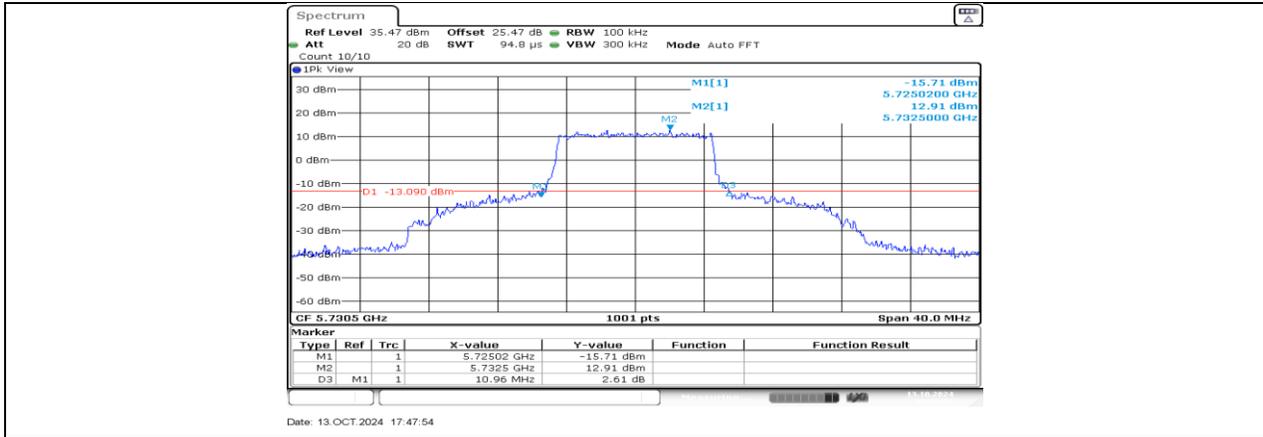


SRD 10M_Ant1_5730.5

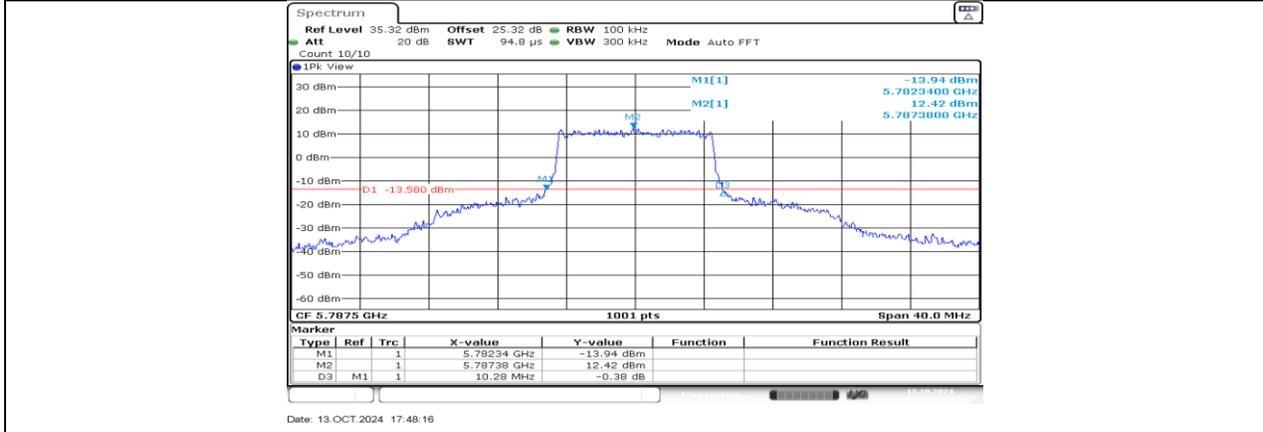


SRD 10M_Ant0_5787.5

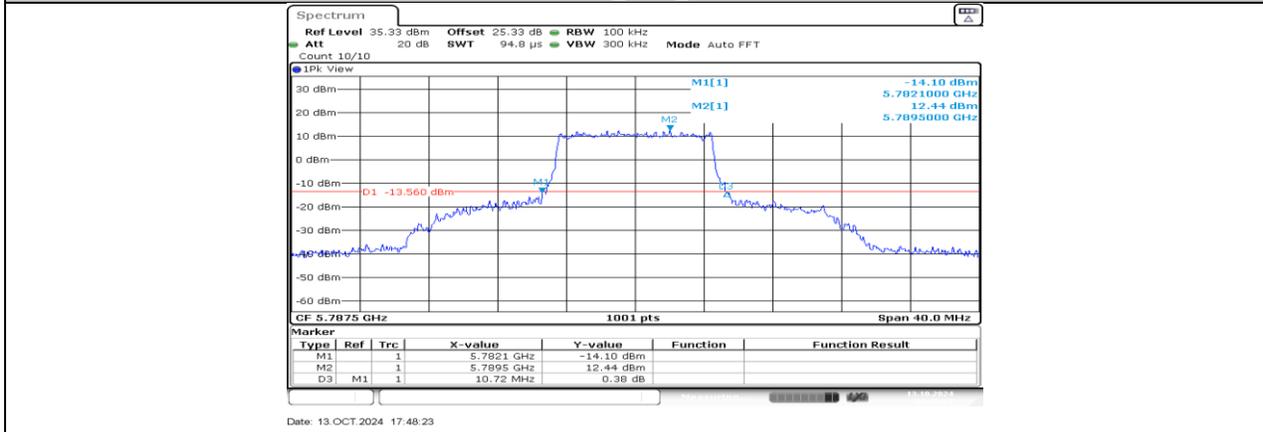


SRD 10M_Ant1_5787.5

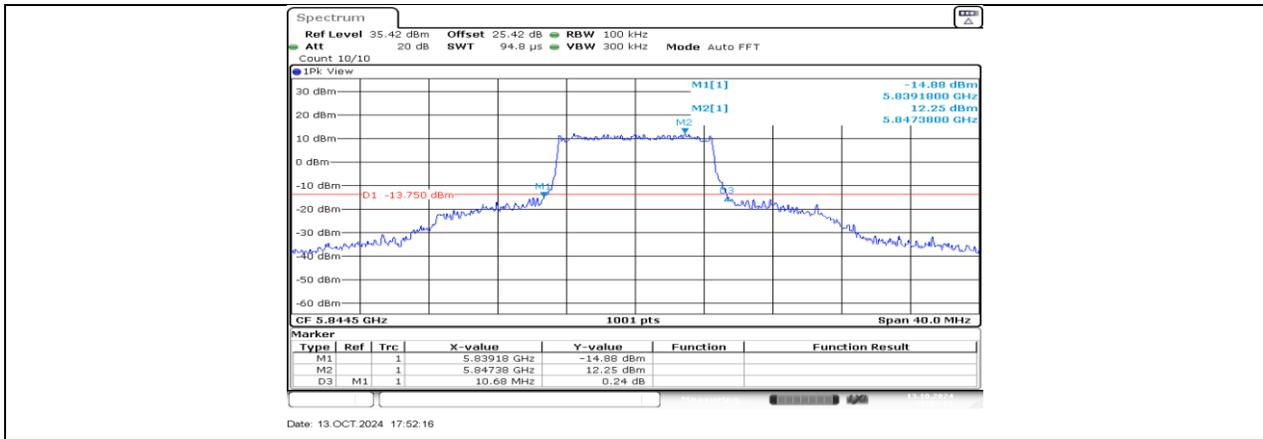

SRD 10M_Ant0_5844.5

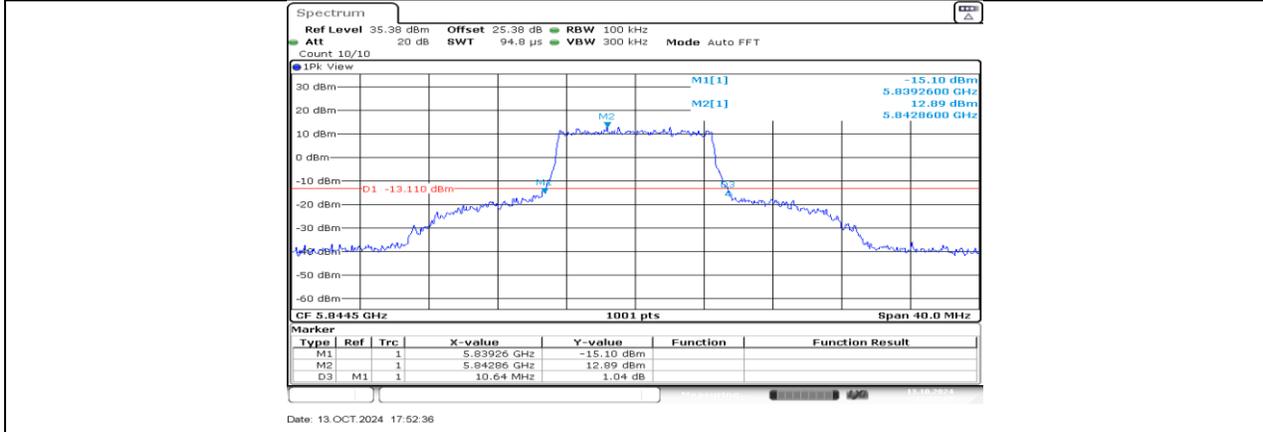

SRD 10M_Ant1_5844.5

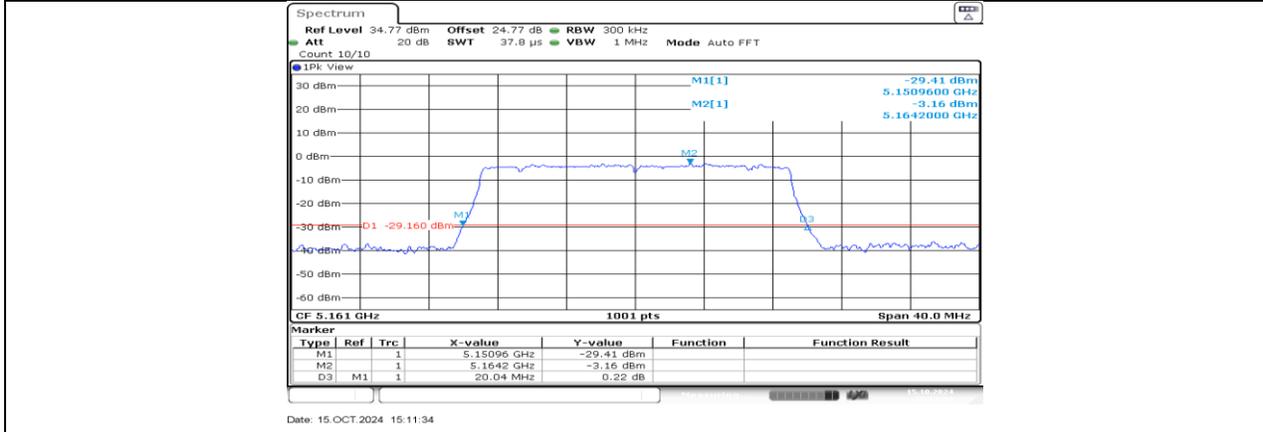

SRD 20M_Ant0_5161