

FCC PART 15.407

TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-NB06251803

Report Type: Original Report	Product Name: Multilink
Report Number: RDG180409002-00C	
Report Date: 2018-06-05	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S)	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
EUT EXERCISE SOFTWARE	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
SUPPORT CABLE LIST AND DETAILS	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
FCC §15.407 (f) & §1.1310 & §2.1093 - RF EXPOSURE	10
APPLICABLE STANDARD	10
TEST RESULT	10
FCC §15.203- ANTENNA REQUIREMENT.....	11
APPLICABLE STANDARD	11
ANTENNA CONNECTOR CONSTRUCTION	11
FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION	12
APPLICABLE STANDARD	12
EUT SETUP	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA	16
FCC §15.407(a) – EMISSION BANDWIDTH.....	23
APPLICABLE STANDARD	23
TEST EQUIPMENT LIST AND DETAILS.....	23
TEST PROCEDURE	23
TEST DATA	23
FCC §15.407(a) – MAXIMUM CONDUCTED OUTPUT POWER.....	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE	28
TEST DATA	29
FCC §15.407(a) - POWER SPECTRAL DENSITY	30
APPLICABLE STANDARD	30
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	32
FCC §15.407(b) – OUT- OF-BAND EMISSIONS	35

APPLICABLE STANDARD	35
TEST PROCEDURE	35
TEST EQUIPMENT LIST AND DETAILS.....	36
TEST DATA	36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Multilink
EUT Model:	NB0625
FCC ID:	SS3-NB06251803
Rated Input Voltage:	5Vdc
External Dimension:	77 mm (L) x 47 mm (W) x 14 mm (H)
Serial Number:	180409002
EUT Received Date:	2018-04-09

Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC submissions with Part 15.247 DSS, FCC ID: SS3-NB06251803.

FCC submissions with Part 15B JAB, FCC ID: SS3-NB06251803.

Part of system submissions with FCC ID: SS3-GL800A1703.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~40GHz: 5.23 dB
Unwanted Emissions, Conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218,the FCC Designation No. : CN1220.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062D.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system employed GFSK modulation in 5.8GHz band, total 58 channels was used:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	5729	30	5787
2	5731	31	5789
3	5733	32	5791
...	...	...	...
...	...	...	...
24	5775	53	5833
25	5777	54	5835
26	5779	55	5837
27	5781	56	5839
28	5783	57	5841
29	5785	58	5843

Test was performed with Channel: 1, 24 and 58.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

The software "Certification_HG330.exe" was used for testing, which was provided by manufacturer. The maximum power with maximum duty cycle was configured as below setting.

Test Software Version	Certification_HG330.exe		
Test Frequency	5729MHz	5775MHz	5843MHz
Power Level Setting	22	22	22

The duty cycle as below:

T _{on} (ms)	T _{on+off} (ms)	Duty Cycle (%)
1.36	5	27.2

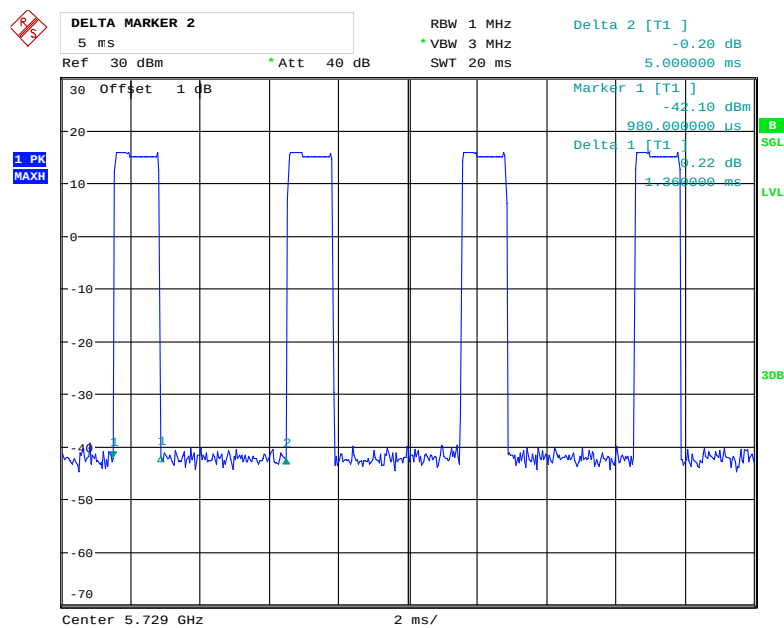

Date: 4.JUN.2018 21:45:59


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number	FCC ID
DJI	Remote control	GL800A	N/A	SS3-GL800A1703

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Data Cable	No	Yes	0.2	Remote	EUT

Block Diagram of Test Setup

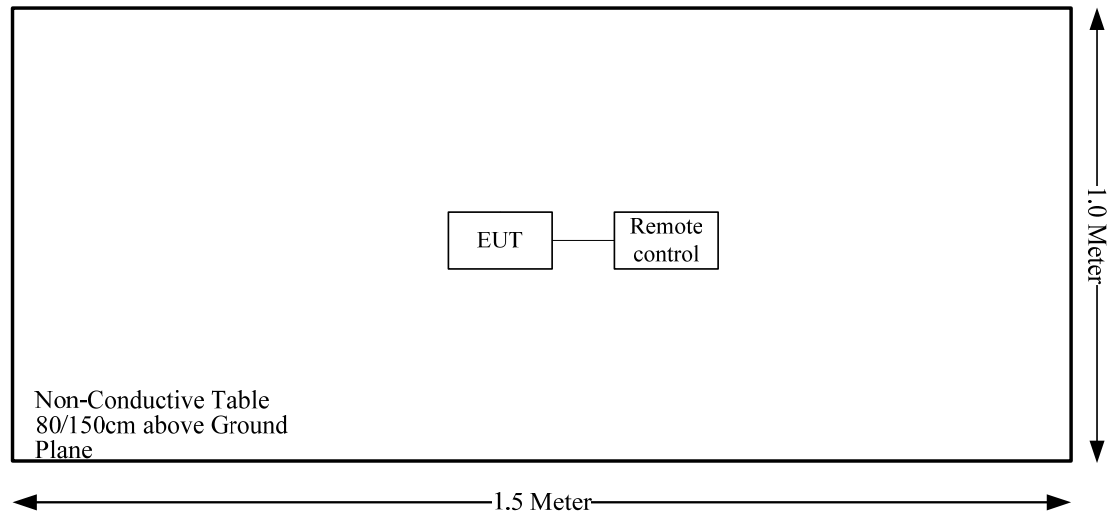

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093	RF Exposure	Compliance
FCC§15.203	Antenna Requirement	Compliance
FCC§15.207 (a)	AC Line Conducted Emissions	Not applicable*
FCC§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(b) (1),(2),(3),(4)	Out Of Band Emissions	Compliance
FCC§15.407(a)	Emission Bandwidth	Compliance
FCC§15.407(a)	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a)	Power Spectral Density	Compliance

Note:

Not applicable*: The device was powered by battery.

FCC §15.407 (f) & §1.1310 & §2.1093 - RF EXPOSURE

Applicable Standard

According to subpart 15.407(f), §1.1310 and §2.1093.

Test Result

Compliant, please refer to the SAR report: RDG180409002-20.

FCC §15.203- ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has a external antenna arrangement permanently attached to the unit, the antenna gain is 3.79 dBi in 2.4GHz band and 6.47 dBi in 5.8GHz band, fulfill the requirement of this section. Please refer to the EUT photos.

Result: Compliance.

FCC §15.209, §15.205 , §15.407(b) –UNWANTED EMISSION

Applicable Standard

According to FCC §15.407; §15.209; §15.205;

(b) *Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.


(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.


(8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

EUT Setup


Below 1 GHz:

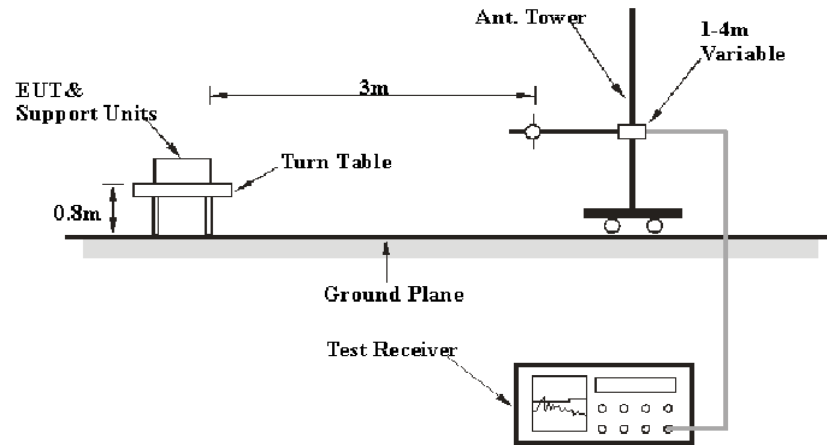

1-26.5 GHz:

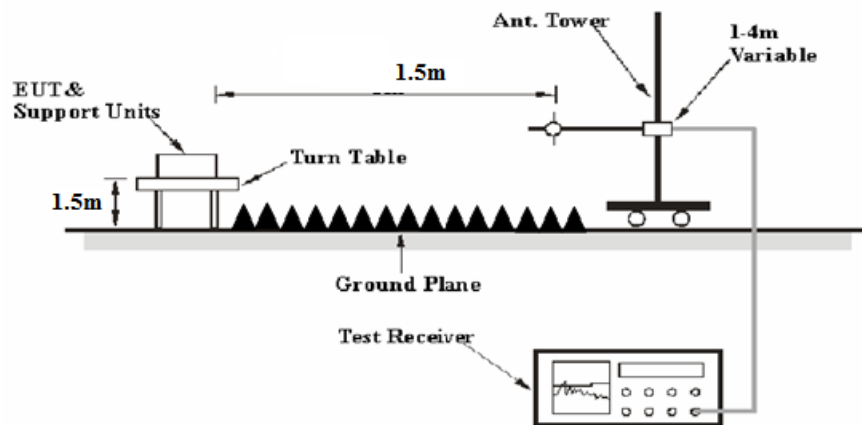

26.5-40 GHz:

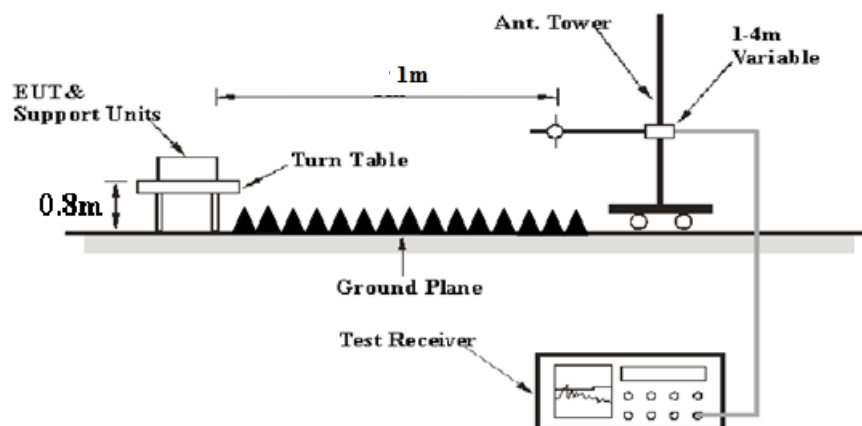

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

Extrapolation result

$$= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Extrapolation result}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2017-12-11	2018-12-11
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
HP	Amplifier	8447D	2727A05902	2017-09-05	2018-09-05
unknown	Coaxial Cable	4m	C0400/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	0.75m	C0075/01	2017-09-05	2018-09-05
unknown	Coaxial Cable	10m	Multilink000/01	2017-09-05	2018-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2018-01-04	2019-01-04
ETS-Lindgren	Horn Antenna	3115	000 527 35	2016-01-05	2019-01-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2017-09-05	2018-09-05
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2017-06-27	2018-06-27
unknown	Coaxial Cable	8m	C0800/01	2017-09-05	2018-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	04	2017-05-06	2018-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2017-06-16	2018-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2017-06-16	2018-06-16
Chengdu OuLi	Bandrejector Filter	5725-5850	005	2017-09-05	2018-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	24.4~24.6 °C
Relative Humidity:	39~42 %
ATM Pressure:	100.5~101.1 kPa

* The testing was performed by Blake Yang & Steve Zuo on 2018-04-15& 2018-04-16.


Test Mode: Transmitting

1) 30MHz-1GHz(Middle channel was the worst):

Horizontal:

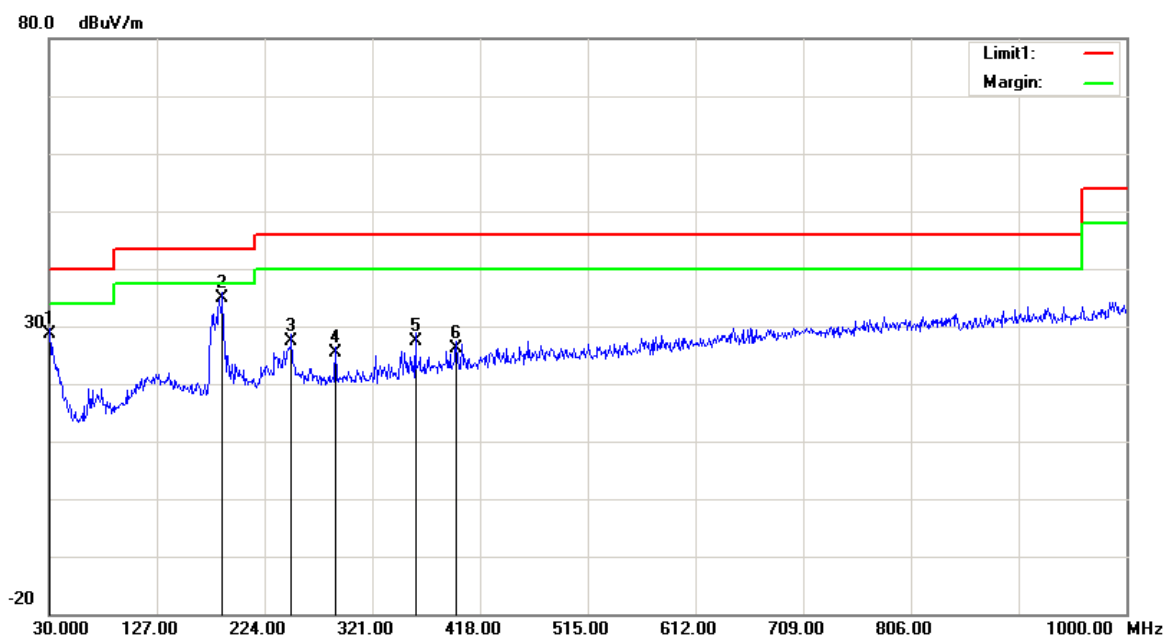

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	27.79	QP	0.81	28.60	40.00	11.40
186.1700	42.34	QP	-7.54	34.80	43.50	8.70
248.2500	33.53	QP	-6.13	27.40	46.00	18.60
288.0200	29.40	QP	-4.10	25.30	46.00	20.70
359.8000	30.15	QP	-2.85	27.30	46.00	18.70
396.6600	28.30	QP	-2.10	26.20	46.00	19.80

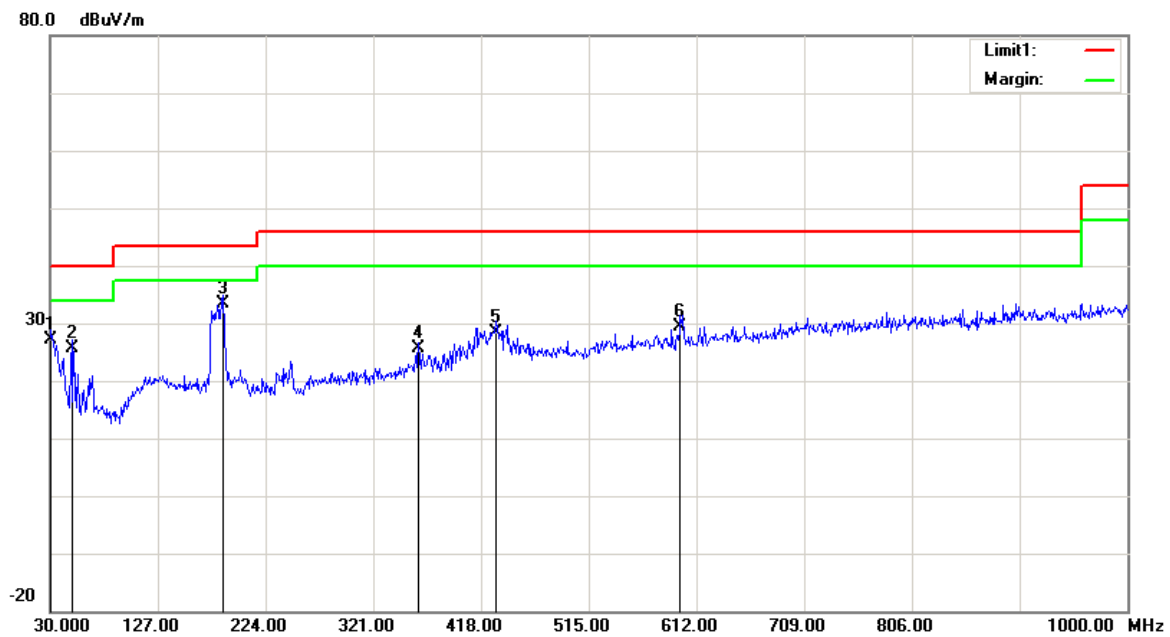Vertical:




Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	25.66	QP	1.54	27.20	40.00	12.80
49.4000	36.66	QP	-11.06	25.60	40.00	14.40
185.2000	40.98	QP	-7.58	33.40	43.50	10.10
361.7400	28.52	QP	-2.82	25.70	46.00	20.30
431.5800	29.91	QP	-1.41	28.50	46.00	17.50
597.4500	28.61	QP	0.79	29.40	46.00	16.60


2) 1-40GHz:

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5729 MHz										
5729.00	88.21	PK	H	34.19	3.69	0.00	126.09	120.07	N/A	N/A
5729.00	75.65	AV	H	34.19	3.69	0.00	113.53	107.51	N/A	N/A
5729.00	71.43	PK	V	34.19	3.69	0.00	109.31	103.29	N/A	N/A
5729.00	58.64	AV	V	34.19	3.69	0.00	96.52	90.5	N/A	N/A
5725.00	55.49	PK	H	34.19	3.69	0.00	93.37	87.35	122.20	34.85
5720.00	41.56	PK	H	34.19	3.69	0.00	79.44	73.42	110.80	37.38
5700.00	28.13	PK	H	34.18	3.68	0.00	65.99	59.97	105.20	45.23
5650.00	25.67	PK	H	34.16	3.63	0.00	63.46	57.44	68.20	10.76
11458.00	57.87	PK	H	38.96	6.59	37.33	66.09	60.07	74.00	13.93
11458.00	44.52	AV	H	38.96	6.59	37.33	52.74	46.72	54.00	7.28
17187.00	46.95	PK	H	41.28	8.77	38.64	58.36	52.34	74.00	21.66
17187.00	34.78	AV	H	41.28	8.77	38.64	46.19	40.17	54.00	13.83
Middle Channel: 5775 MHz										
5775.00	88.16	PK	H	34.21	3.70	0.00	126.07	120.05	N/A	N/A
5775.00	75.42	AV	H	34.21	3.70	0.00	113.33	107.31	N/A	N/A
5775.00	70.68	PK	V	34.21	3.70	0.00	108.59	102.57	N/A	N/A
5775.00	57.43	AV	V	34.21	3.70	0.00	95.34	89.32	N/A	N/A
11550.00	54.62	PK	H	39.00	6.61	37.42	62.81	56.79	74.00	17.21
11550.00	41.37	AV	H	39.00	6.61	37.42	49.56	43.54	54.00	10.46
17325.00	46.58	PK	H	42.09	8.80	38.54	58.93	52.91	74.00	21.09
17325.00	34.45	AV	H	42.09	8.80	38.54	46.80	40.78	54.00	13.22
High Channel: 5843 MHz										
5843.00	88.54	PK	H	34.24	3.74	0.00	126.52	120.5	N/A	N/A
5843.00	75.39	AV	H	34.24	3.74	0.00	113.37	107.35	N/A	N/A
5843.00	72.17	PK	V	34.24	3.74	0.00	110.15	104.13	N/A	N/A
5843.00	59.53	AV	V	34.24	3.74	0.00	97.51	91.49	N/A	N/A
5850.00	41.62	PK	H	34.24	3.75	0.00	79.61	73.59	122.20	48.61
5855.00	32.48	PK	H	34.24	3.75	0.00	70.47	64.45	110.80	46.35
5875.00	27.34	PK	H	34.25	3.77	0.00	65.36	59.34	105.20	45.86
5925.00	25.69	PK	H	34.27	3.80	0.00	63.76	57.74	68.20	10.46
11686.00	55.48	PK	H	39.00	6.65	37.57	63.56	57.54	74.00	16.46
11686.00	42.97	AV	H	39.00	6.65	37.57	51.05	45.03	54.00	8.97
17529.00	46.53	PK	H	43.28	8.85	38.39	60.27	54.25	74.00	19.75
17529.00	34.47	AV	H	43.28	8.85	38.39	48.21	42.19	54.00	11.81



Worst plots(Low channel) **Horizontal**



Fundamental
Test with Band
Rejection Filter

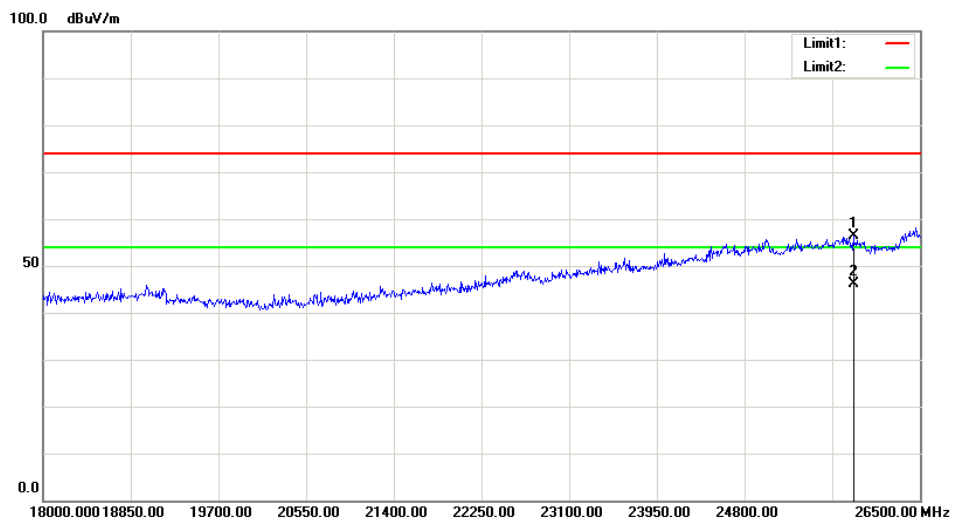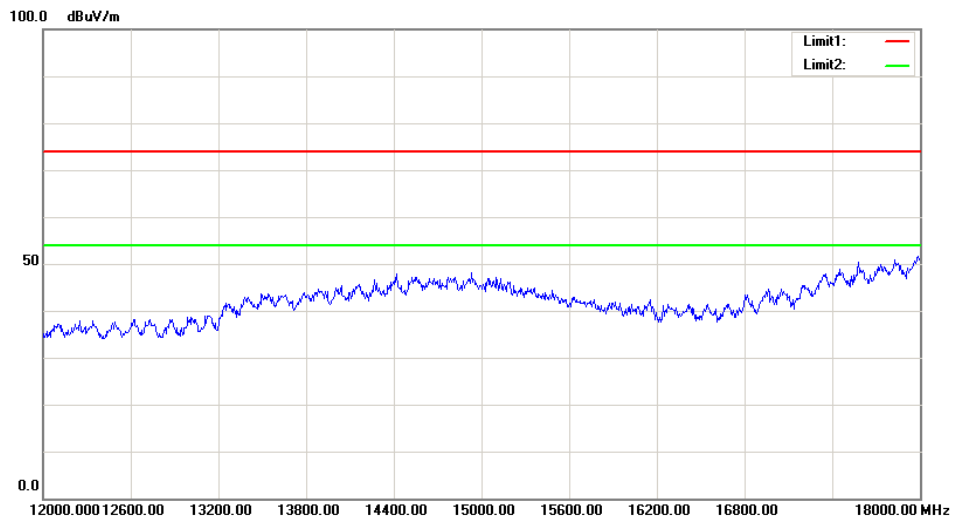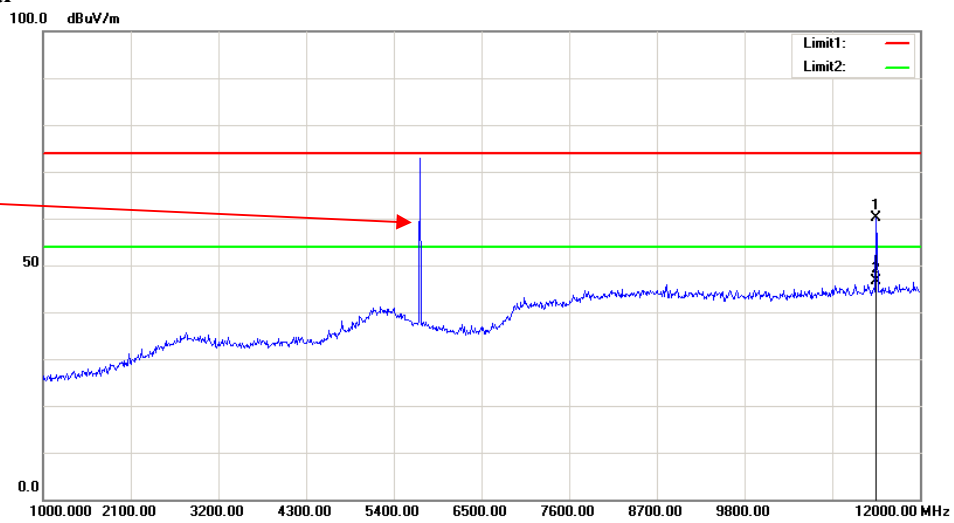

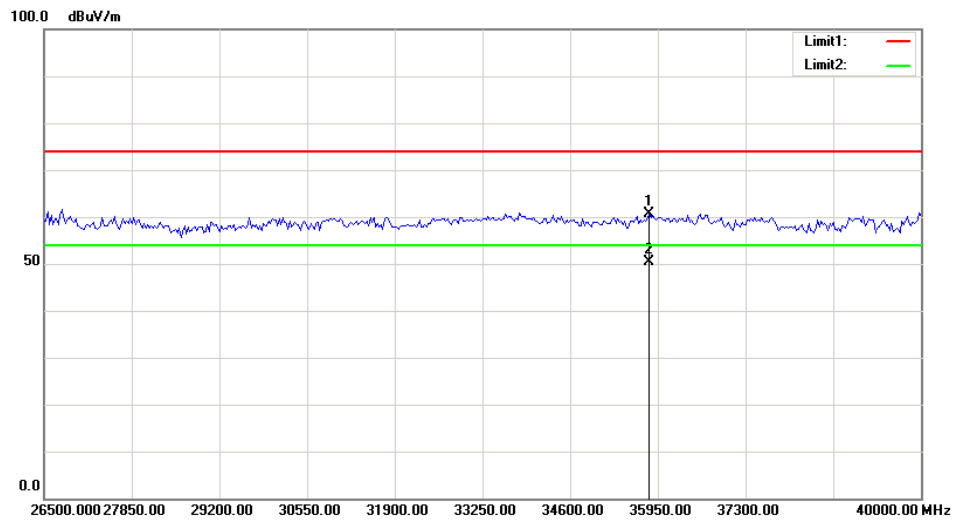

Vertical

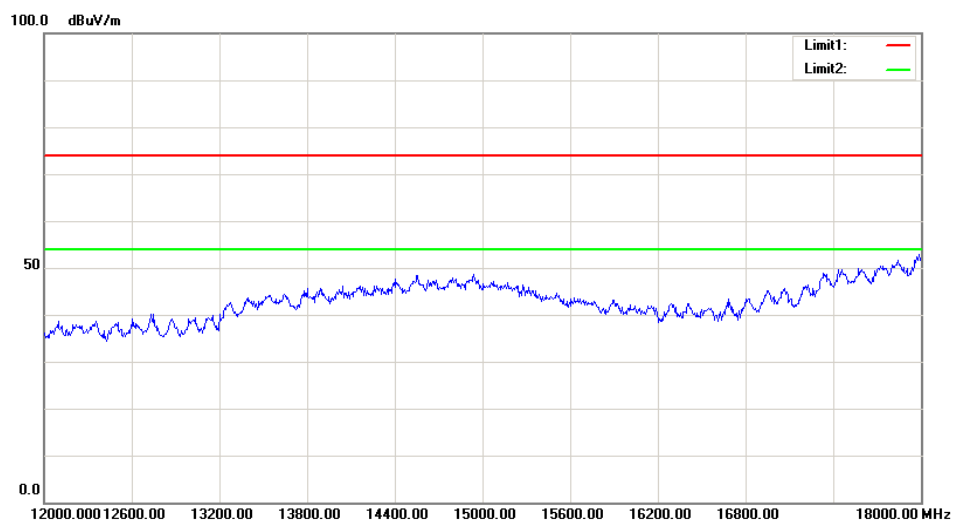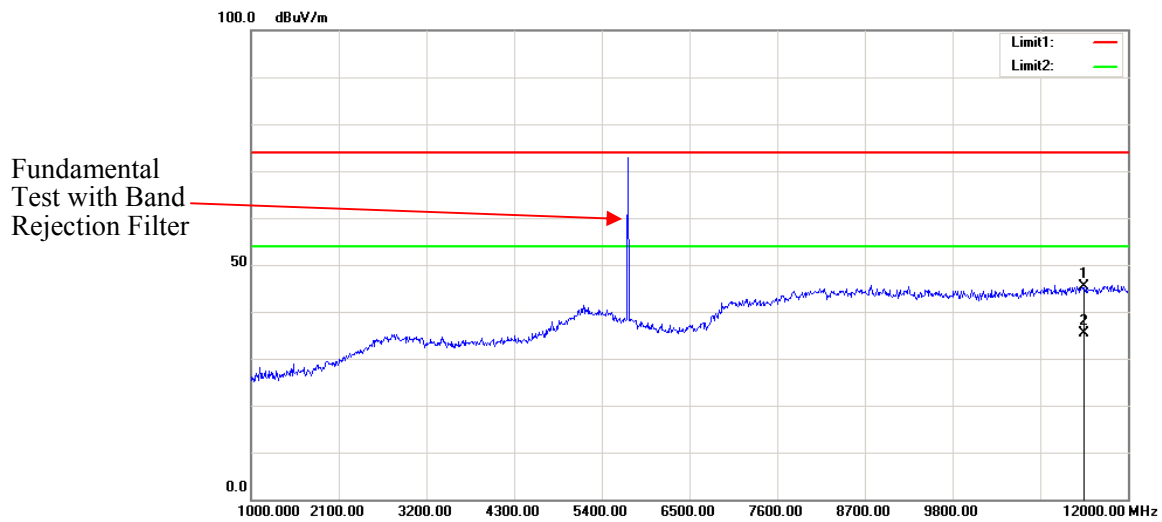

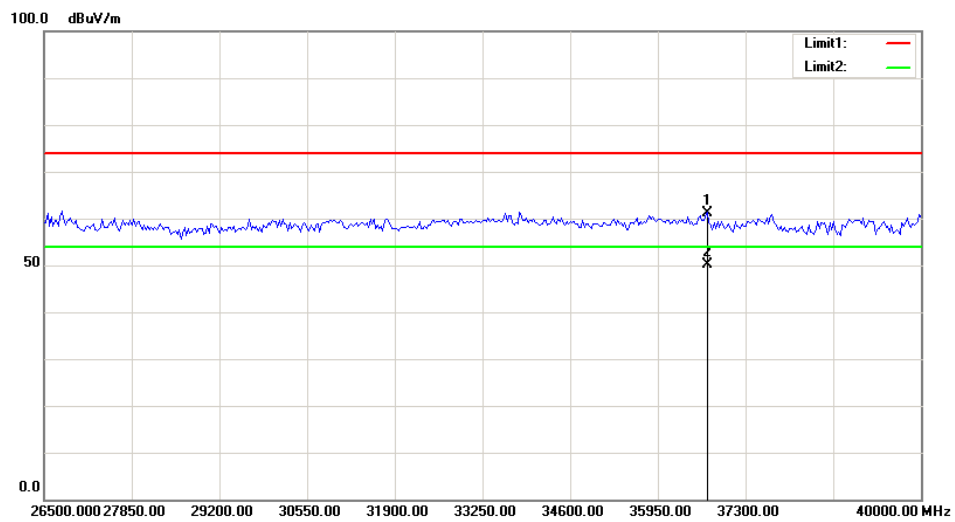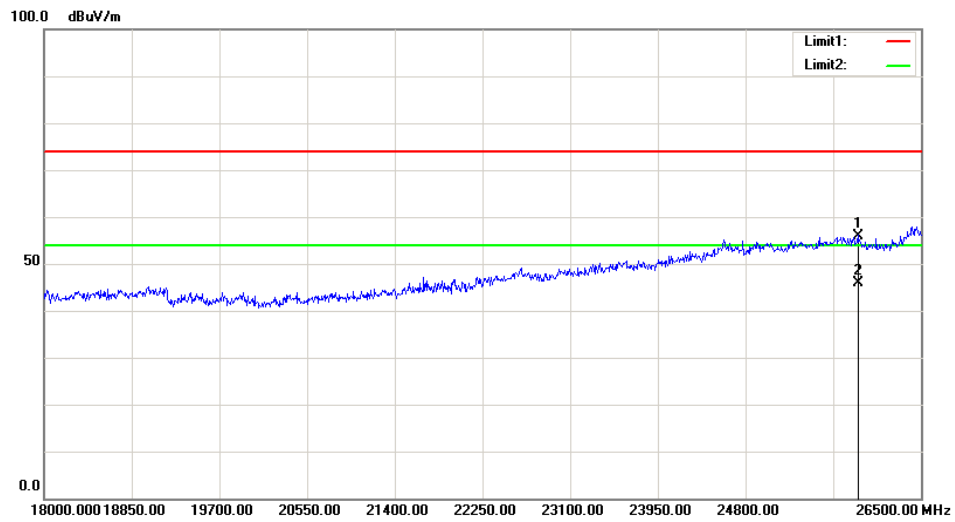

FCC §15.407(a) – EMISSION BANDWIDTH

Applicable Standard

15.407(a)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/05	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 .

Test Data

Environmental Conditions

Temperature:	26.3 °C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

* The testing was performed by Emily Wang on 2018-06-04.

Test Result: Pass.

Please refer to the following tables and plots.


Test mode: Transmitting

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limits (MHz)
Low	5729	0.76	0.84	≥0.5
Middle	5775	0.75	0.86	≥0.5
High	5843	0.78	0.89	≥0.5

Note: the 99% Occupied bandwidth are not fall into 5470-5725MHz band


6dB Bandwidth:

Low Channel

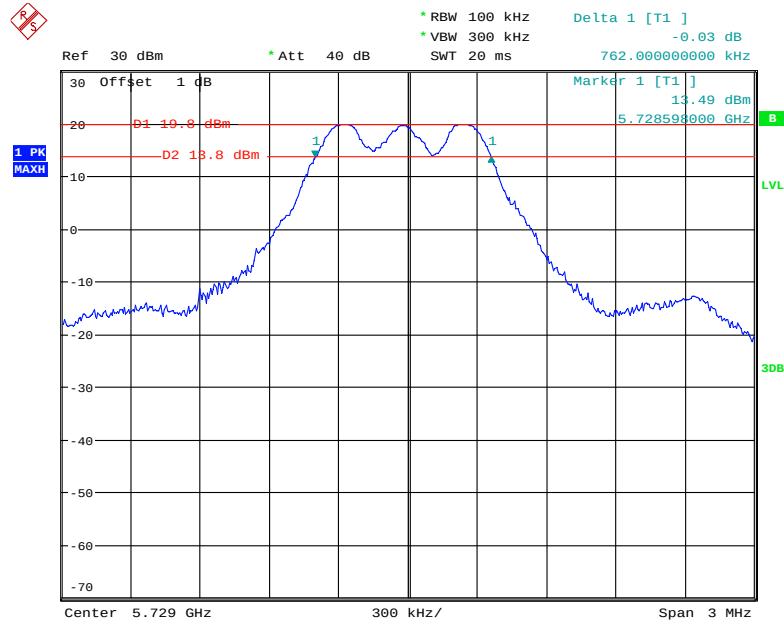


Date: 4.JUN.2018 22:02:45

Middle Channel

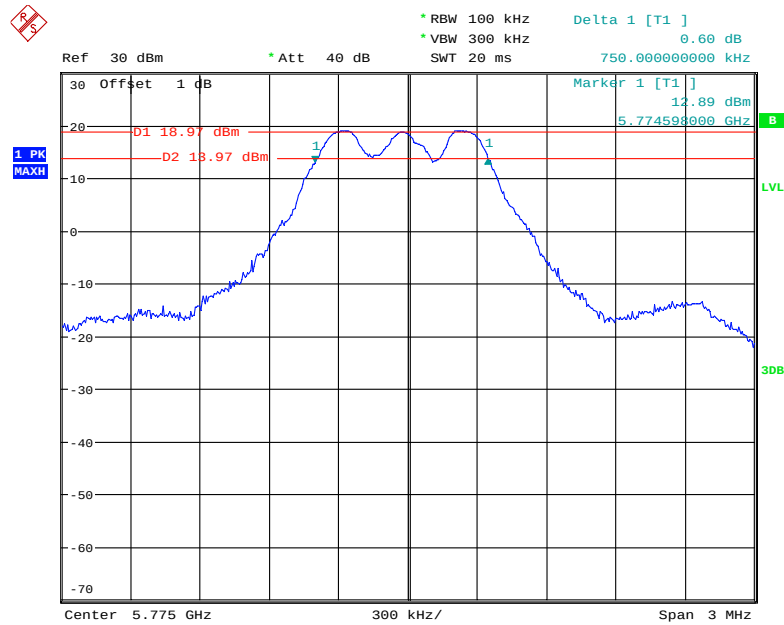

Date: 4.JUN.2018 22:01:02


High Channel

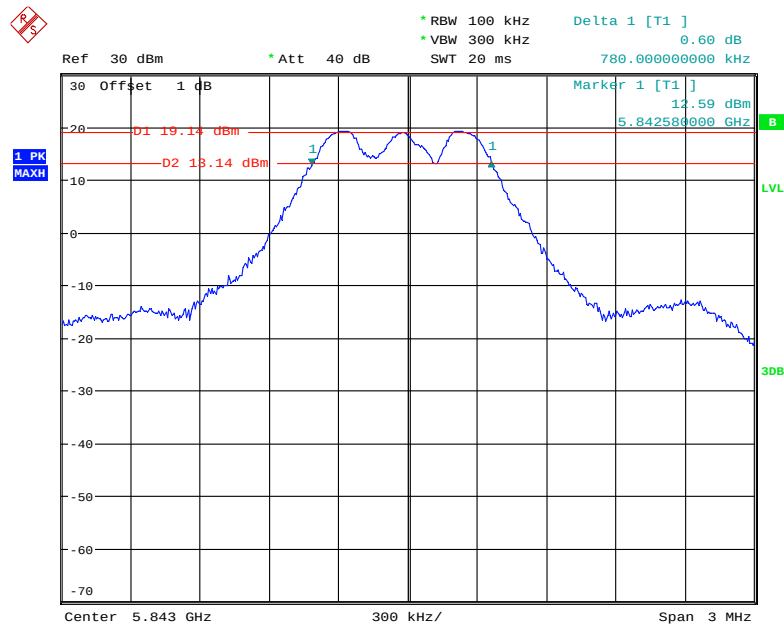

Date: 4.JUN.2018 22:04:49


99% Occupied Bandwidth:

Low Channel

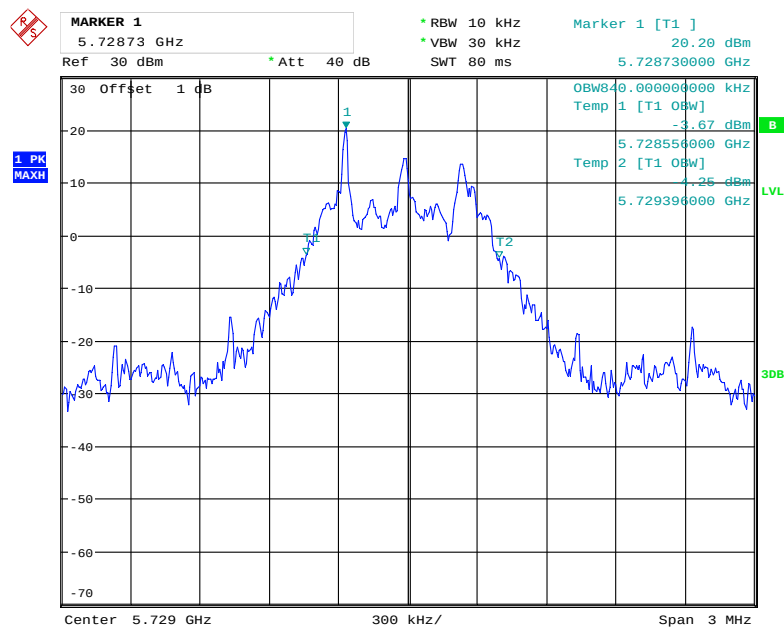


Date: 4.JUN.2018 22:11:41

Middle Channel

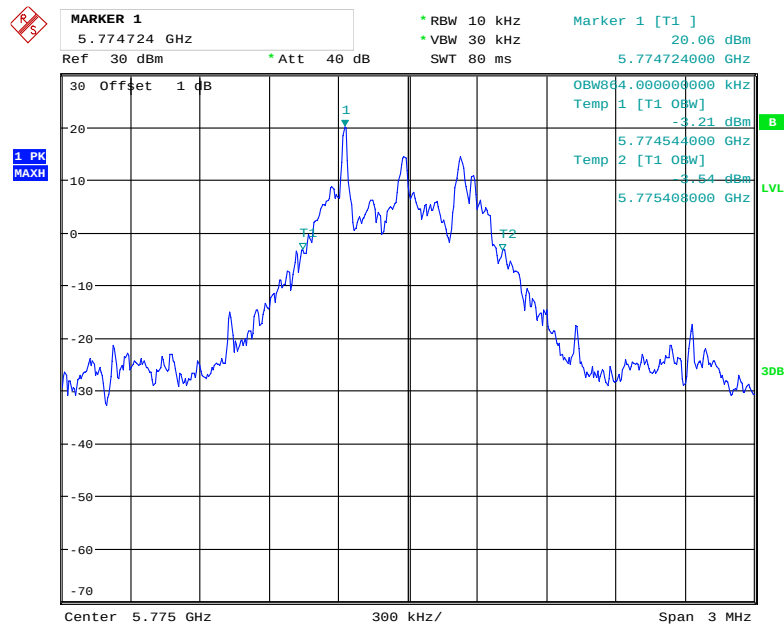

Date: 4.JUN.2018 22:09:52

High Channel

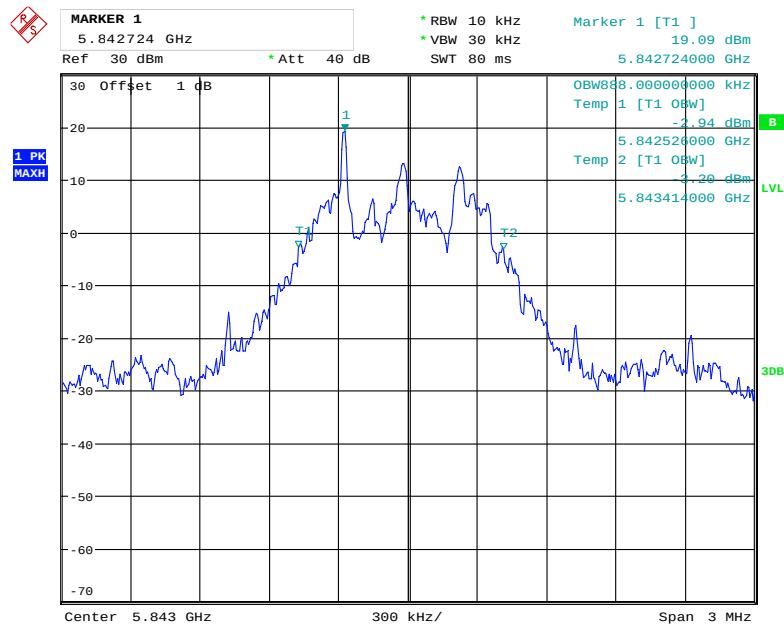

Date: 4.JUN.2018 22:08:12

FCC §15.407(a) – MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 + 10 \log B$ dBm, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum

power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2017-12-11	2018-12-11
Unknown	Coaxial Cable	C-SJ00-0010	C0010/05	Each Time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	26.3 °C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

* The testing was performed by Emily Wang on 2018-06-04.

Test Mode: Transmitting

Frequency (MHz)	Maximum Conducted Average Output Power (dBm)	Limit (dBm)
5729	21.49	29.53
5775	21.37	29.53
5843	21.67	29.53

Note: the power sensor is a gated RF average power meter. The antenna gain is 6.47 dBi

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/05	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	26.3 °C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

** The testing was performed by Emily Wang on 2018-06-04.*


Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

Frequency (MHz)	Result (dBm/500kHz)	Limit (dBm/500kHz)
5729	21.38	29.53
5775	21.27	29.53
5843	21.49	29.53


Note: SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.

Low Channel

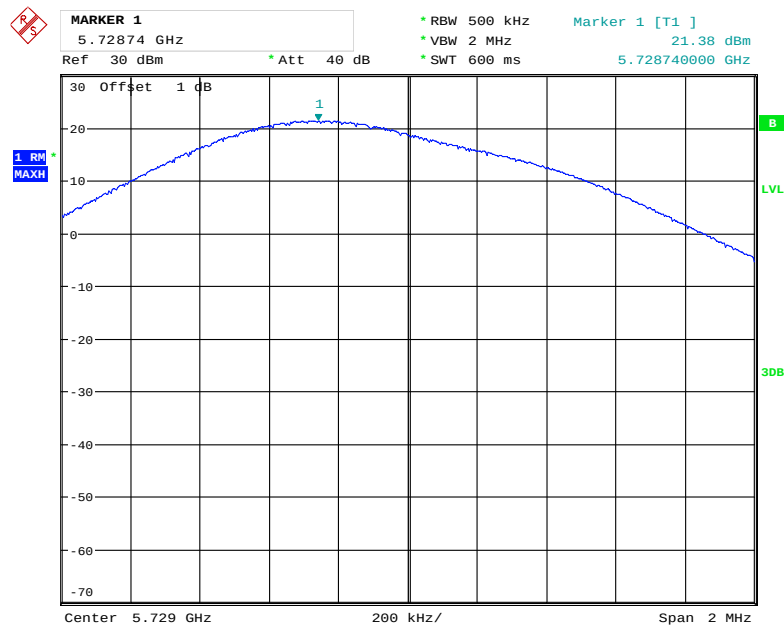


Date: 4.JUN.2018 22:32:00

Middle Channel

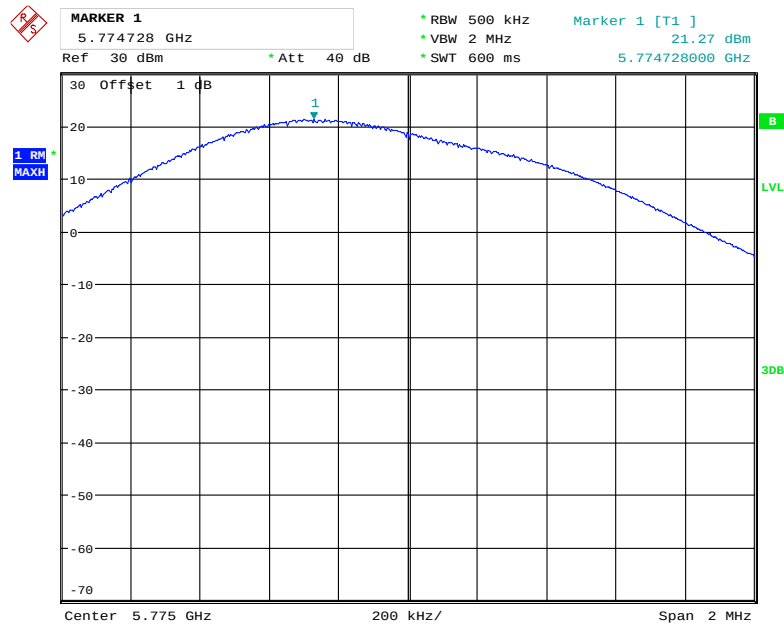

Date: 4.JUN.2018 22:31:00

High Channel

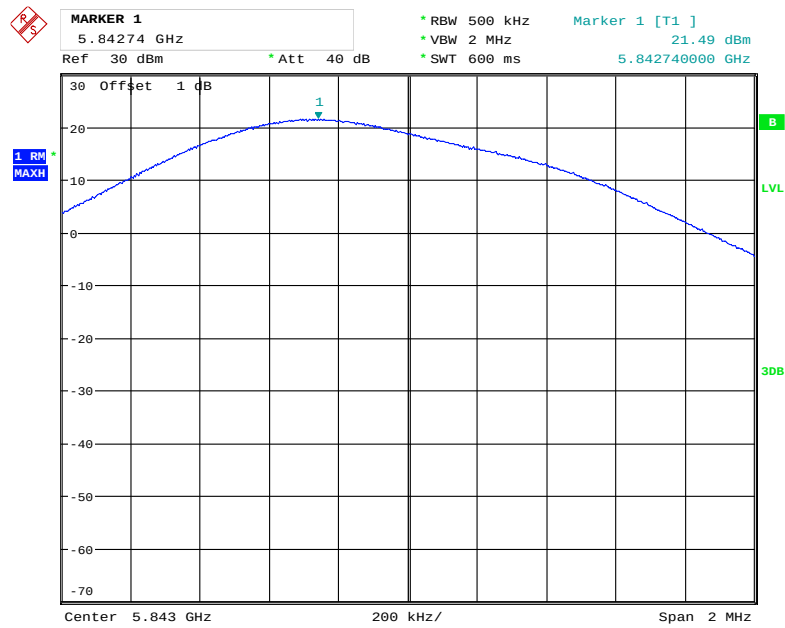

Date: 4.JUN.2018 22:30:04

FCC §15.407(b) – OUT- OF-BAND EMISSIONS

Applicable Standard

FCC §15.407

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01 .

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSP 38	100478	2017-12-08	2018-12-08
Unknown	Coaxial Cable	C-SJ00-0010	C0010/05	Each time	/

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	26.3 °C
Relative Humidity:	54 %
ATM Pressure:	101.2kPa

* The testing was performed by Emily Wang on 2018-06-04.

Test Result: Pass.


All emissions are under limit more than 6.47 dB(antenna gain 6.47dBi). Please refer to the following plots.

Low Channel

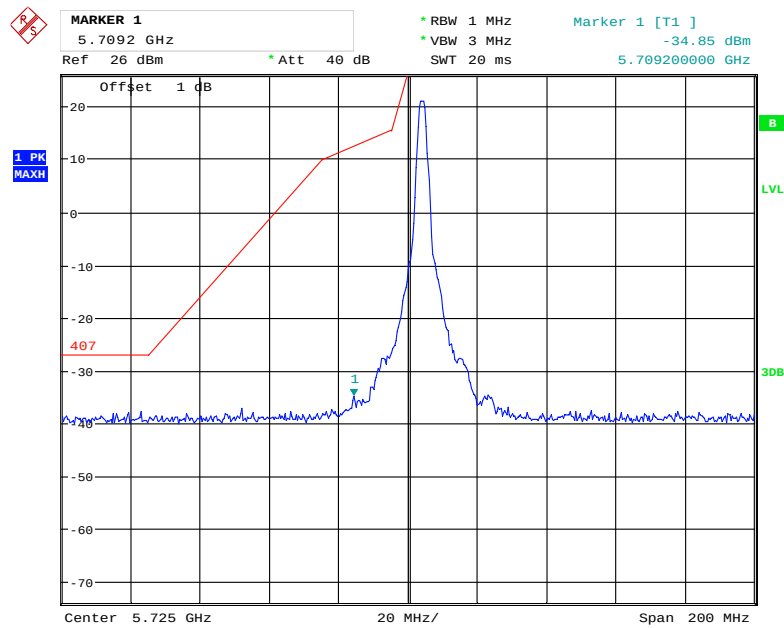

Date: 4.JUN.2018 22:37:03

High Channel

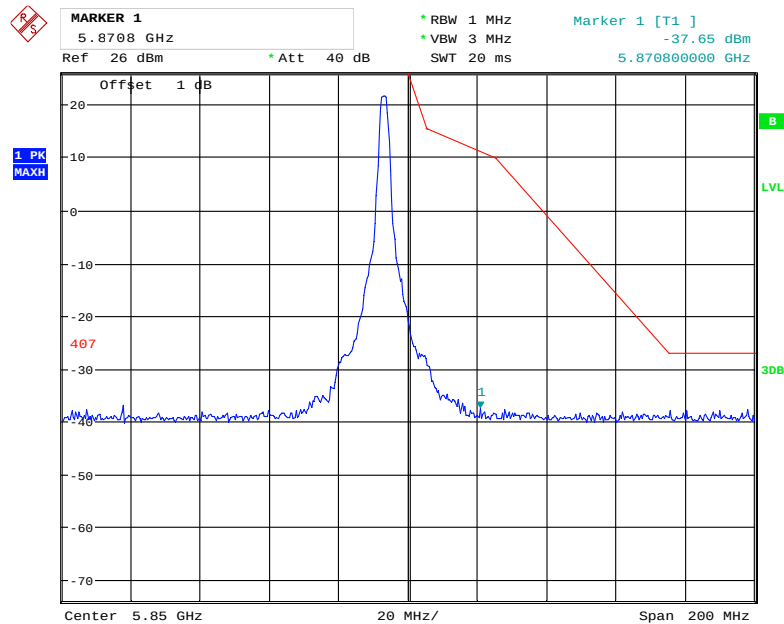

Date: 4.JUN.2018 22:38:15

***** END OF REPORT *****