

<b>Prüfbericht-Nr.:</b> Test report no.:	<b>CN24W6UQ 002</b>	<b>Auftrags-Nr.:</b> Order no.:	168492000	Seite 1 von 23 Page 1 of 23
<b>Kunden-Referenz-Nr.:</b> Client reference no.:	N/A	<b>Auftragsdatum:</b> Order date:	2024-07-01	
<b>Auftraggeber:</b> Client:	SZ DJI TECHNOLOGY CO., LTD Lobby of T2, DJI Sky City, No. 53 Xianyuan Road, Xili Community, Xili Street, Nanshan District, Shenzhen, China.			
<b>Prüfgegenstand:</b> Test item:	D-RTK 3 Multifunctional Station, D-RTK 3 AG			
<b>Bezeichnung / Typ-Nr.:</b> Identification / Type no.:	R600BS, R600_AG (Trademark: DJI)			
<b>Auftrags-Inhalt:</b> Order content:	Test Report			
<b>Prüfgrundlage:</b> Test specification:	CFR47 FCC Part 15: Subpart E Section 15.407			
<b>Wareneingangsdatum:</b> Date of sample receipt:	2024-07-01	Please refer to Photo Document		
<b>Prüfmuster-Nr.:</b> Test sample no.:	A003757365-001 A003757344-003, 005 A003834149-006~015			
<b>Prüfzeitraum:</b> Testing period:	2024-07-05 - 2024-12-17			
<b>Ort der Prüfung:</b> Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüflaboratorium:</b> Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
<b>Prüfergebnis*:</b> Test result*:	Pass			
<b>geprüft von:</b> tested by:	 <b>Bettina Hu</b>	<b>genehmigt von:</b> authorized by:	 <b>Hardy Suo</b>	
<b>Datum:</b> Date:	2024-12-31	<b>Ausstellungsdatum:</b> Issue date:	2024-12-31	
<b>Stellung / Position:</b>	Sachverständige(r)/Expert	<b>Stellung / Position:</b>	Sachverständige(r)/Expert	
<b>Sonstiges / Other:</b>	FCC ID: SS3-R600BS2024 This report is for 5.2GHz SDR.			
<b>Zustand des Prüfgegenstandes bei Anlieferung:</b> Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
<b>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.</b> This test report only relates to the above mentioned test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN24W6UQ 002  
Test report no.:

Seite 2 von 23  
Page 2 of 23

**Anmerkungen**  
Remarks

- |   |  |
|---|--|
| 1 | <p>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben.<br/>Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</p> <p><i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i></p>   |
| 2 | <p>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></p> <p><i>As contractually agreed, this document has been signed digitally only. TUV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TUV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: <a href="http://go.tuv.com/digital-signature">go.tuv.com/digital-signature</a></i></p> |
| 3 | <p>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben.<br/>Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</p> <p><i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.<br/>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i></p>  |
| 4 | <p>Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019.</p> <p><i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i></p>   |

## **Test Summary**

**5.1.1 ANTENNA REQUIREMENT**

*RESULT: Pass*

**5.1.2 MAXIMUM OUTPUT POWER**

*RESULT: Pass*

**5.1.3 CONDUCTED POWER SPECTRAL DENSITY**

*RESULT: Pass*

**5.1.4 FREQUENCY STABILITY**

*RESULT: Pass*

**5.1.5 26dB BANDWIDTH AND 99% BANDWIDTH**

*RESULT: Pass*

**5.1.6 RADIATED SPURIOUS EMISSION**

*RESULT: Pass*

**5.1.7 CONDUCTED EMISSION ON AC MAINS**

*RESULT: Pass*

## Contents

<b>1</b>	<b>GENERAL REMARKS .....</b>	<b>5</b>
<b>1.1</b>	<b>COMPLEMENTARY MATERIALS .....</b>	<b>5</b>
<b>2</b>	<b>TEST SITES.....</b>	<b>6</b>
<b>2.1</b>	<b>TEST FACILITIES.....</b>	<b>6</b>
<b>2.2</b>	<b>LIST OF TEST AND MEASUREMENT INSTRUMENTS .....</b>	<b>6</b>
<b>2.3</b>	<b>TRACEABILITY.....</b>	<b>7</b>
<b>2.4</b>	<b>CALIBRATION.....</b>	<b>7</b>
<b>2.5</b>	<b>MEASUREMENT UNCERTAINTY .....</b>	<b>7</b>
<b>2.6</b>	<b>LOCATION OF ORIGINAL DATA .....</b>	<b>8</b>
<b>2.7</b>	<b>STATUS OF FACILITY USED FOR TESTING.....</b>	<b>8</b>
<b>3</b>	<b>GENERAL PRODUCT INFORMATION.....</b>	<b>9</b>
<b>3.1</b>	<b>PRODUCT FUNCTION AND INTENDED USE.....</b>	<b>9</b>
<b>3.2</b>	<b>RATINGS AND SYSTEM DETAILS .....</b>	<b>9</b>
<b>3.3</b>	<b>INDEPENDENT OPERATION MODES .....</b>	<b>10</b>
<b>3.4</b>	<b>NOISE GENERATING AND NOISE SUPPRESSING PARTS.....</b>	<b>10</b>
<b>3.5</b>	<b>SUBMITTED DOCUMENTS.....</b>	<b>10</b>
<b>4</b>	<b>TEST SET-UP AND OPERATION MODES .....</b>	<b>11</b>
<b>4.1</b>	<b>PRINCIPLE OF CONFIGURATION SELECTION.....</b>	<b>11</b>
<b>4.2</b>	<b>TEST OPERATION AND TEST SOFTWARE.....</b>	<b>11</b>
<b>4.3</b>	<b>SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT.....</b>	<b>11</b>
<b>4.4</b>	<b>COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....</b>	<b>11</b>
<b>4.5</b>	<b>TEST SETUP DIAGRAM.....</b>	<b>12</b>
<b>5</b>	<b>TEST RESULTS.....</b>	<b>14</b>
<b>5.1</b>	<b>TRANSMITTER REQUIREMENT &amp; TEST SUITES.....</b>	<b>14</b>
<b>5.1.1</b>	<i>Antenna Requirement.....</i>	<b>14</b>
<b>5.1.2</b>	<i>Maximum Output Power.....</i>	<b>15</b>
<b>5.1.3</b>	<i>Conducted Power Spectral Density.....</i>	<b>18</b>
<b>5.1.4</b>	<i>Frequency Stability.....</i>	<b>19</b>
<b>5.1.5</b>	<i>26dB Bandwidth and 99% Bandwidth .....</i>	<b>20</b>
<b>5.1.6</b>	<i>Radiated Spurious Emission.....</i>	<b>21</b>
<b>5.1.7</b>	<i>Conducted Emission on AC Mains.....</i>	<b>22</b>
<b>6</b>	<b>PHOTOGRAPHS OF THE TEST SET-UP.....</b>	<b>23</b>
<b>7</b>	<b>LIST OF TABLES .....</b>	<b>23</b>

# 1 General Remarks

## 1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix A: Test Results of 5.2GHz SDR

Appendix B: Photographs of the Test Set-up.

## 2 Test Sites

### 2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd.

No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China.

FCC Accreditation Designation No.: 694916

### 2.2 List of Test and Measurement Instruments

**Table 1: List of Test and Measurement Equipment**

<b>Radio Spectrum Testing (SRD-Tonscend)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. until</b>
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY60241175	2024-09-26	2025-09-25
MXG X-Series RF Vector Signal Generator	Keysight	N5182B	MY61250137	2024-09-26	2025-09-25
EXG X-Series Microwave Analog Signal Generator	Keysight	N5173B	MY61250141	2024-09-26	2025-09-25
DC power supply	Keysight	E3642A	MY61276100	2024-09-26	2025-09-25
Power Control Unit	Tonscend	JS0806-4ADC	N/A	2024-09-26	2025-09-25
Automation Control Unit	Tonscend	JS0806-2	21C8060396	2024-09-26	2025-09-25
Test Software	Tonscend	JS1120-3	N/A	N/A	N/A
Control PC	Lenovo	TianYi510S-071MB	YLX23JMF	N/A	N/A
Shielding Room	Albatross	SR1	APC17151-SR1	2024-09-14	2027-09-13
<b>Unwanted Emission Testing (TS9975)</b>					
<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Cal. Date</b>	<b>Cal. until</b>
EMI Test Receiver	R&S	ESR 7	102021	2024-09-29	2025-09-28
Signal Analyzer	R&S	FSV 40	101439	2024-09-29	2025-09-28
System Controller Interface	R&S	SCI-100	S10010038	N/A	N/A
Filterbank	R&S	Wlan	100759	2024-09-29	2025-09-28
OSP	R&S	OSP 120	102040	N/A	N/A
Pre-amplifier	R&S	SCU08F1	08320031	2024-09-29	2025-09-28
Amplifier	R&S	SCU-18F	180070	2024-09-29	2025-09-28
Amplifier	R&S	SCU40A	100475	2024-09-29	2025-09-28
Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	2024-09-28	2025-09-27

Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	2024-09-28	2025-09-27
Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	2024-09-28	2025-09-27
Active Loop Antenna	Schwarzbeck	FMZB 1513	302	2024-09-28	2025-09-27
Test software	R&S	EMC32 (V10.60.10)	N/A	N/A	N/A
Control PC	Dell	OptiPlex 7050	36NV9P2	N/A	N/A
3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	2024-09-14	2027-09-13

Conducted Emission				
Equipment	Manufacturer	Model No.	Serial No.	Cal. Until
EMI Test Receiver	R&S	ESR3	102680	2025-02-22
Artificial Mains Network	R&S	ENV216	101445	2025-02-22
EMC32 test software	R&S	EMC32(Ver.10.50.00)	N/A	N/A

## 2.3 Traceability

All measurement equipment calibrations are traceable to NIM (National Institute of Metrology) or where calibration is performed in other countries, to equivalent nationally recognized standards organizations.

## 2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

## 2.5 Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions and conducted emissions measurements as below table.

**Table 2: Measurement Uncertainty**

Parameter	Uncertainty (k=2)
RF output power, conducted	± 0.99 dB
Occupied Channel Bandwidth	± 2.08 %
RF power density, conducted	± 0.99 dB
Unwanted Emissions, conducted	± 0.89 dB
All emissions, radiated	±4.17 dB
Conducted Emission, (9kHz to 150kHz)/(150kHz to 30MHz)	± 3.70 dB / ± 3.30 dB

**Prüfbericht - Nr.:** CN24W6UQ 002  
*Test Report No.:*

Seite 8 von 23  
Page 8 of 23

## 2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached at Appendix A & B of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) file for certification follow-up purposes.

## 2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at No. 362 Huanguan Road Middle, Longhua District, 518110, Shenzhen, P. R. China. is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

### 3 General Product Information

#### 3.1 Product Function and Intended Use

The Product is D-RTK 3 Multifunctional Station which supports Bluetooth, 2.4GHz SDR, 5.2GHz SDR, 5.8GHz SDR and GNSS functions.

\*remark: SDR means specific defined radio, and cannot changes radio specification via software/firmware by end-users.

For details refer to the User Manual, Technical Description and Circuit Diagram.

#### 3.2 Ratings and System Details

**Table 3: Technical Specification of EUT**

General Information of EUT	Value
Kind of Equipment	D-RTK 3 Multifunctional Station, D-RTK 3 AG
Type Designation	R600BS, R600_AG (Two models are identical except for model name and product name.)
Trademark	DJI
FCC ID	SS3-R600BS2024
Operating Voltage	Powered by battery(7.2Vdc) or DC 9V-15V by USB-C port for charging
Testing Voltage	Fully charged battery
Extreme Temperature Range	-30°C to +55°C
Radiofrequency operating mode	1) Bluetooth: operating within 2400-2483.5MHz, Bluetooth BLE (1Mbps&2Mbps) 2) 2.4GHz SDR: operating within 2400-2483.5MHz, supports 1.4MHz/3MHz/5MHz/10MHz/20MHz/40MHz/60MHz Bandwidth 3) 5.2GHz SDR: operating within 5150-5250MHz, supports 1.4MHz/3MHz/5MHz/10MHz/20MHz/40MHz/60MHz/80MHz Bandwidth 4) 5.8GHz SDR: operating within 5725-5850MHz, supports 1.4MHz/3MHz/5MHz/10MHz/20MHz/40MHz/60MHz/80MHz Bandwidth 5) GPS & BDS & Galileo & Glonass (receiver): operating within 1559-1610MHz
<b>Technical Specification of 5.2GHz SDR</b>	
Operating Frequency	5154-5248MHz for 1.4MHz Bandwidth 5154-5247MHz for 3MHz Bandwidth 5155-5246.24MHz for 5MHz Bandwidth 5157-5245MHz for 10MHz Bandwidth 5161-5240MHz for 20MHz Bandwidth 5170-5230MHz for 40MHz Bandwidth 5180-5220MHz for 60MHz Bandwidth 5190-5210MHz for 80MHz Bandwidth
Type of Modulation	OFDM (QPSK, 16QAM, 64QAM)
Channel Number	110 channels for 1.4MHz Bandwidth 68 channels for 3MHz Bandwidth 189 channels for 5MHz Bandwidth

	247 channels for 10MHz Bandwidth 202 channels for 20MHz Bandwidth 103 channels for 40MHz Bandwidth 41 channels for 60MHz Bandwidth 21 channels for 80MHz Bandwidth
Antenna Type	Integral Antenna
Antenna Number	1Tx4Rx for SISO mode (ANT0 or ANT1 or ANT2 or ANT3) 2Tx4Rx for MIMO mode (ANT0+ANT1, or ANT0+ANT2, or ANT0+ANT3, or ANT2+ANT1, or ANT1+ANT3, or ANT2+ANT3)
Antenna Gain	5 dBi for ANT0, 4.5 dBi for ANT1/ANT2/ANT3 (Provided by the Client)
The type of wideband data transmission equipment	DTS

Note: The correctness of all data provided by customer in the test report is ensured and responsible of the customer. Any misjudgment of the test results caused by the use of incorrect data provided by customer shall be borne by the customer.

### 3.3 Independent Operation Modes

The basic operation modes are:

- A. On, 5.2GHz SDR wireless transmitting mode
  - 1) Low Channel
  - 2) Middle Channel
  - 3) High Channel
- B. Off

### 3.4 Noise Generating and Noise Suppressing Parts

Refer to Circuit Diagram for further details.

### 3.5 Submitted Documents

- Application Form
- User Manual
- ID Label and Location Info
- Operation Description

## 4 Test Set-up and Operation Modes

### 4.1 Principle of Configuration Selection

**Radio Spectrum:** The equipment under test (EUT) was configured at its highest power output in order to measure its highest possible radiation and conducted level. The test modes were adapted accordingly in reference to the instructions for use.

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

### 4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

According to clause 3.1, all tests were performed on model R600BS in this report.

### 4.3 Special Accessories and Auxiliary Equipment

**Table 4: List of Accessories and Auxiliary Equipment**

Description	Manufacturer	Model	Remark
Laptop	Lenovo	T480	S/N: PF-16A6N8
Repeater	DJI	EA600	N/A
Adapter	TP-LINK	T535081-2A1	DC 53.5V, 0.81A
POE Adapter	TP-LINK	TL-POE170S	DC 53.5V, 0.81A
D-RTK 3 PoE Module	DJI	R600BSPOE	DC 53.5V

### 4.4 Countermeasures to Achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Technical Construction File (TCF).

No additional measures were employed to achieve compliance.

## 4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test (Below 1GHz)

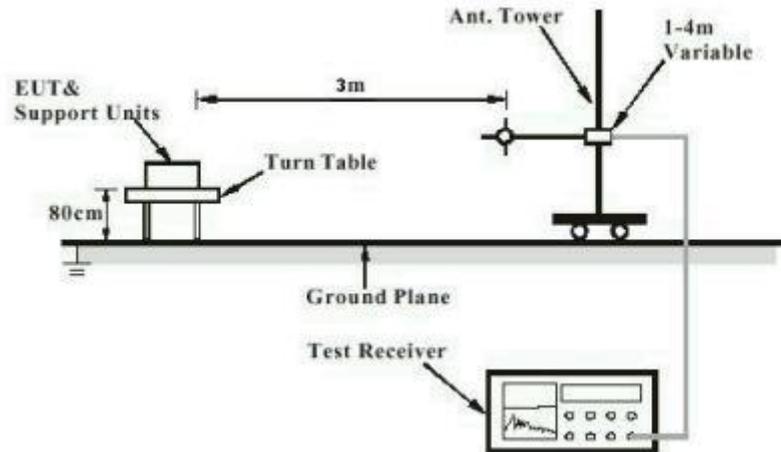


Diagram of Measurement Configuration for Radiation Test (Above 1GHz)

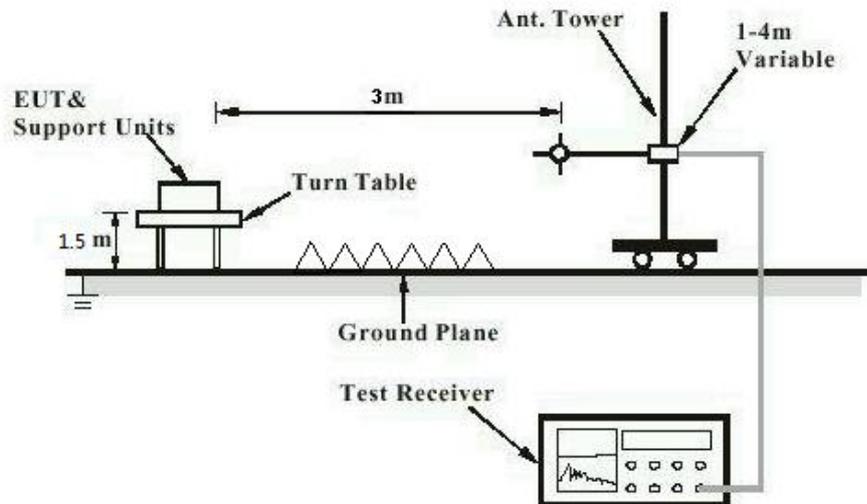


Diagram of Measurement Configuration for Mains Conduction Measurement


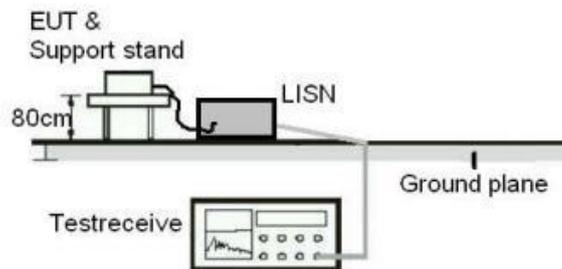


Diagram of Measurement Configuration for Conducted Transmitter Measurement

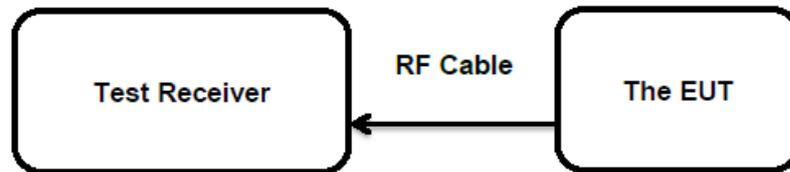

## 5 Test Results

### 5.1 Transmitter Requirement & Test Suites

#### 5.1.1 Antenna Requirement

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.203
Limit	:	the use of antennas with directional gains that do not exceed 6 dBi

According to the manufacturer declared, the EUT have four Integral Antennas, the max. uncorrelated antenna gain is 4.76dBi for 5.2GHz SDR, permanent attachment and no consideration of replacement.

Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: **CN24W6UQ 002**  
Test Report No.:Seite 15 von 23  
Page 15 of 23

## 5.1.2 Maximum Output Power

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407 (a)  
Basic standard : ANSI C63.10: 2013  
Limits : <250mW (24dBm) (5150-5250MHz)  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2024-10-22 to 2024-12-17  
Input voltage : Fully charged battery  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 45 %  
Atmospheric pressure : 101 kPa

For details refer to following test result.

**Table 5: Test Result of Maximum Conducted Output Power, 5.2GHz SDR**

Worst case: SISO mode (ANT 0)

Test Mode	Test Channel (MHz)	Measured Average Power		Limit (W)
		(dBm)	(W)	
1.4MHz BW	5154	-0.02	0.0010	< 1.0
	5160	4.82	0.0030	
	5200	7.81	0.0060	
	5248	7.82	0.0061	
3MHz BW	5154	-1.51	0.0007	
	5160	-6.12	0.0002	
	5199	8.78	0.0076	
	5247	8.18	0.0066	
5MHz BW	5155	0.85	0.0012	
	5165	12.19	0.0166	
	5200	12.05	0.0160	
	5246.24	12.62	0.0183	
10MHz BW	5157	0.31	0.0011	
	5166	11.04	0.0127	
	5200	14.17	0.0261	
	5245	14.21	0.0264	
20MHz BW	5161	4.20	0.0026	
	5169	11.38	0.0137	
	5200	14.22	0.0264	
	5240	14.17	0.0261	
40MHz BW	5170	4.62	0.0029	
	5181	10.84	0.0121	
	5200	14.13	0.0259	
	5230	14.47	0.0280	
60MHz BW	5180	4.84	0.0030	
	5193	10.11	0.0103	
	5200	13.52	0.0225	
	5220	14.06	0.0255	
80MHz BW	5190	4.87	0.0031	
	5196	10.78	0.0120	
	5200	14.04	0.0254	
	5210	14.41	0.0276	
<b>Maximum Measured Value</b>		<b>14.47</b>	<b>0.0280</b>	

Worst case: MIMO mode (ANT 0+3)

Test Mode	Test Channel (MHz)	Measured Average Power		Limit (W)
		(dBm)	(W)	
1.4MHz BW	5154	-0.11	0.0010	< 1.0
	5160	4.96	0.0031	
	5200	7.61	0.0058	
	5248	7.71	0.0059	
3MHz BW	5154	-0.78	0.0008	
	5160	6.21	0.0042	
	5199	8.72	0.0074	
	5247	8.97	0.0079	
5MHz BW	5155	1.00	0.0013	
	5165	12.41	0.0174	
	5200	13.10	0.0204	
	5246.24	12.78	0.0190	
10MHz BW	5157	0.74	0.0012	
	5166	11.52	0.0142	

	5200	14.44	0.0278	
	5245	14.71	0.0296	
20MHz BW	5161	4.62	0.0029	
	5169	12.25	0.0168	
	5200	14.55	0.0285	
	5240	14.47	0.0280	
	5170	5.05	0.0032	
40MHz BW	5181	11.07	0.0128	
	5200	14.92	0.0310	
	5230	15.02	0.0318	
	5180	5.32	0.0034	
60MHz BW	5193	10.52	0.0113	
	5200	12.97	0.0198	
	5220	14.78	0.0301	
	5190	4.79	0.0030	
80MHz BW	5196	10.75	0.0119	
	5200	14.79	0.0301	
	5210	14.89	0.0308	
	<b>Maximum Measured Value</b>		<b>15.02</b>	<b>0.0318</b>

**Note:**

- 1) The cable loss is taken into account in results,
- 2) Antenna gain(G) of 5.2GHz SDR: 5 dBi for ANT0, 4.5 dBi for ANT1/ANT2/ANT3  
4.76dBi for MIMO (uncorrelated antenna gain)

Prüfbericht - Nr.: **CN24W6UQ 002**  
Test Report No.:Seite 18 von 23  
Page 18 of 23

### 5.1.3 Conducted Power Spectral Density

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407 (a)  
Basic standard : ANSI C63.10: 2013  
Limits : <11dBm/MHz (5150-5250MHz)  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2024-10-22 to 2024-12-17  
Input voltage : Fully charged battery  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 45 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

### 5.1.4 Frequency Stability

**RESULT:****Pass****Test Specification**

Test standard	: FCC Part 15.407 (g)
Basic standard	: ANSI C63.10: 2013
Limits	: Within assigned bands
Kind of test site	: Shielded Room

**Test Setup**

Date of testing	: 2024-10-22 to 2024-12-17
Input voltage	: Fully charged battery
Operation mode	: A
Test channel	: Low / Middle / High
Ambient temperature	: 25 °C
Relative humidity	: 45 %
Atmospheric pressure	: 101 kPa

For the measurement records, refer to the appendix A.

Prüfbericht - Nr.: **CN24W6UQ 002**  
Test Report No.:Seite 20 von 23  
Page 20 of 23

### 5.1.5 26dB Bandwidth and 99% Bandwidth

**RESULT:****Pass****Test Specification**

Test standard : FCC Part 15.407  
Basic standard : ANSI C63.10: 2013  
Limits : N/A  
Kind of test site : Shielded Room

**Test Setup**

Date of testing : 2024-10-22 to 2024-12-17  
Input voltage : Fully charged battery  
Operation mode : A  
Test channel : Low / Middle / High  
Ambient temperature : 25 °C  
Relative humidity : 45 %  
Atmospheric pressure : 101 kPa

For the measurement records, refer to the appendix A.

## 5.1.6 Radiated Spurious Emission

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.407(b) & FCC Part 15.205 & FCC Part 15.209
Basic standard	:	ANSI C63.10: 2013
Limits	:	<ul style="list-style-type: none"><li>• For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.</li><li>• Restricted Bands meet the requirement of 15.209 limit</li></ul>
Kind of test site	:	3m Semi-anechoic Chamber

**Test Setup**

Date of testing	:	2024-10-31 to 2024-12-13
Input voltage	:	Fully charged battery
Operation mode	:	A
Test channel	:	Low / Middle / High
Ambient temperature	:	Refer to test result
Relative humidity	:	Refer to test result
Atmospheric pressure	:	101 kPa

**Remark:**

Testing was carried out within frequency range 9kHz to the tenth harmonics. Only the worst case spurious emissions configuration of the each mode were reported.

For the measurement records, refer to the appendix A.

### 5.1.7 Conducted Emission on AC Mains

**RESULT:****Pass****Test Specification**

Test standard	:	FCC Part 15.207(a)
Basic standard	:	ANSI C63.10: 2013
Frequency range	:	0.15 – 30MHz
Classification	:	Class B
Limits	:	FCC Part 15.207(a)
Kind of test site	:	Shielded Room

**Test Setup**

Date of testing	:	2024-07-05
Input voltage	:	AC 120V, 60Hz
Operation mode	:	A
Earthing	:	Not connected
Ambient temperature	:	23.4 °C
Relative humidity	:	51.2 %
Atmospheric pressure	:	101 kPa

For the measurement records, refer to the appendix A.

## 6 Photographs of the Test Set-Up

For photographs of the test set-up, refer to the appendix B.

## 7 List of Tables

Table 1: List of Test and Measurement Equipment.....	6
Table 2: Measurement Uncertainty.....	7
Table 3: Technical Specification of EUT.....	9
Table 4: List of Accessories and Auxiliary Equipment.....	11
Table 5: Test Result of Maximum Conducted Output Power, 5.2GHz SDR.....	16

===== END OF REPORT =====