

FCC PART 15.407
RSS-GEN, ISSUE 5, AMENDMENT 1, MARCH 2019
RSS-247, ISSUE 2, FEBRUARY 2017
TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-RM500E1910
IC: 11805A- RM500E1910


Report Type: Original Report	Product Name: DJI Smart Controller Enterprise
Report Number: <u>RDG191226022-00C</u>	
Report Date: <u>20120-03-02</u>	
Reviewed By:	Ivan Cao Assistant Manager 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	5
DECLARATIONS.....	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	10
SUPPORT EQUIPMENT LIST AND DETAILS	10
SUPPORT CABLE LIST AND DETAILS	10
BLOCK DIAGRAM OF TEST SETUP	10
SUMMARY OF TEST RESULTS	11
FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE	12
APPLICABLE STANDARD	12
TEST RESULT	12
FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT.....	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST PROCEDURE	16
TEST DATA	16
FCC §15.209, §15.205 , §15.407(b) & RSS-247 CLAUSE 6.2, RSS-GEN CLAUSE 8.10 –UNWANTED EMISSION	19
APPLICABLE STANDARD	19
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	23
TEST PROCEDURE	23
CORRECTED AMPLITUDE & MARGIN CALCULATION	24
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST DATA	25
FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2,RSS-Gen CLAUSE 6.7–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	38
APPLICABLE STANDARD	38
TEST EQUIPMENT LIST AND DETAILS.....	38
TEST PROCEDURE	38
TEST DATA	38

FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER.....	58
APPLICABLE STANDARD	58
TEST EQUIPMENT LIST AND DETAILS.....	60
TEST PROCEDURE	60
TEST DATA	61
FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY	62
APPLICABLE STANDARD	62
TEST PROCEDURE	64
TEST EQUIPMENT LIST AND DETAILS.....	64
TEST DATA	64

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		DJI Smart Controller Enterprise
EUT Model:		RM500-ENT
Operation Frequency:		5150-5250 MHz 5725-5850 MHz
Maximum Peak Output Power (Conducted):		5150-5250 MHz: 16.12 dBm 5725-5850 MHz: 16.07 dBm
Modulation Type:		OFDM
Rated Input Voltage:		7.2Vdc from battery or DC 3.6-12V from adapter
Adapter Information	Model:	QC24-US
	Input:	100-240VAC~50/60Hz Max 0.8A
	Output:	3.6-8V ---3A/12V---2A
Serial Number:		RDG191226022-RF-S3
EUT Received Date:		2019/12/25

Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS, 15E NII submissions with FCC ID: SS3-RM500E1910
 FCC Part 15C DSS submissions with FCC ID: SS3-RM500E1910
 RSS-247 DTSS, LE-LANs submissions with IC: 11805A- RM500E1910
 Part of system submissions with FCC ID: SS3-M3001910, IC: 11805A-M3001910.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01, and RSS-247, Issue 2, February 2017, RSS-Gen Issue 5, Amendment 1, March 2019 of the Innovation, Science and Economic Development Canada.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %

RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “△”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode (which was selected by manufacturer). The system support 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80, the vht20/vht40 were reduced since the identical parameters with 802.11n ht20 and ht40.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20 Channel 36, 40 and 48 was tested;

For 802.11n ht40 Channel 38, 46 were tested;

For 802.11ac vht80 Channel 42 was tested.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n ht20 Channel 149, 157 and 165 was tested;

for 802.11n ht40 Channel 151, 159 was tested;

For 802.11ac vht80 Channel 155 was tested.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The device supports SISO and MIMO in all modes, per pretest, MIMO mode was the worst mode and reported.

EUT Exercise Software


Software "DjiSdrConsole.exe" was used during test, which was provided by manufacturer and the maximum power was configured as below:

Frequency Bands	Mode	Channel	Frequency (MHz)	Data rate	Power level Setting
5150 - 5250 MHz	802.11 a	Low	5180	6 Mbps	13
		Middle	5200	6 Mbps	13
		High	5240	6 Mbps	13
	802.11n ht20	Low	5180	MCS8	13
		Middle	5200	MCS8	13
		High	5240	MCS8	13
	802.11n Ht40	Low	5190	MCS8	13
		High	5230	MCS8	13
	802.11ac vht80	Middle	5210	MCS9	13
5725 - 5850 MHz	802.11 a	Low	5745	6 Mbps	13
		Middle	5785	6 Mbps	13
		High	5825	6 Mbps	13
	802.11n ht20	Low	5745	MCS8	13
		Middle	5785	MCS8	13
		High	5825	MCS8	13
	802.11n Ht40	Low	5755	MCS8	13
		High	5795	MCS8	13
	802.11ac vht80	Middle	5775	MCS9	13

The maximum duty cycle as following table:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle(x) (%)
802.11 a	2.100	3.770	55.70
802.11n ht20	1.980	2.080	95.19
802.11n ht40	0.980	1.060	92.45
802.11ac vht80	0.268	0.356	75.28

802.11a

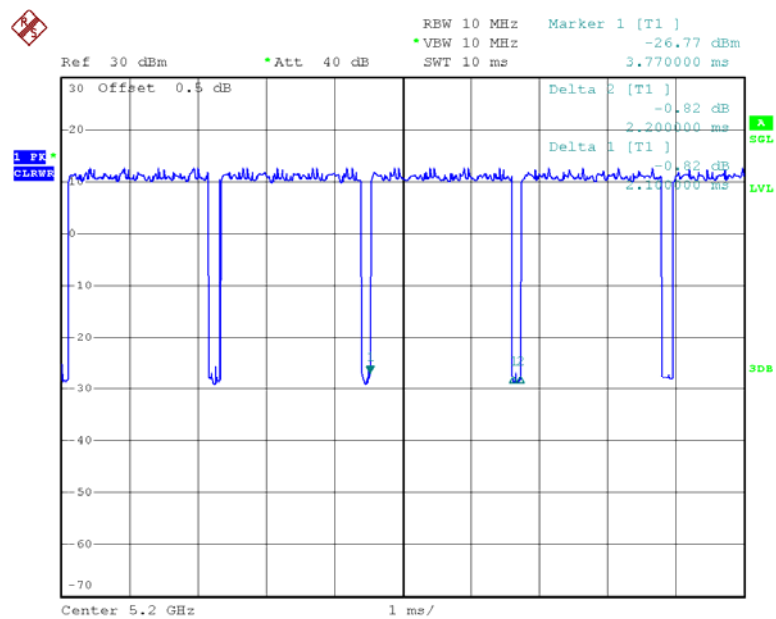


Date: 24.FEB.2020 15:55:43

802.11n ht20

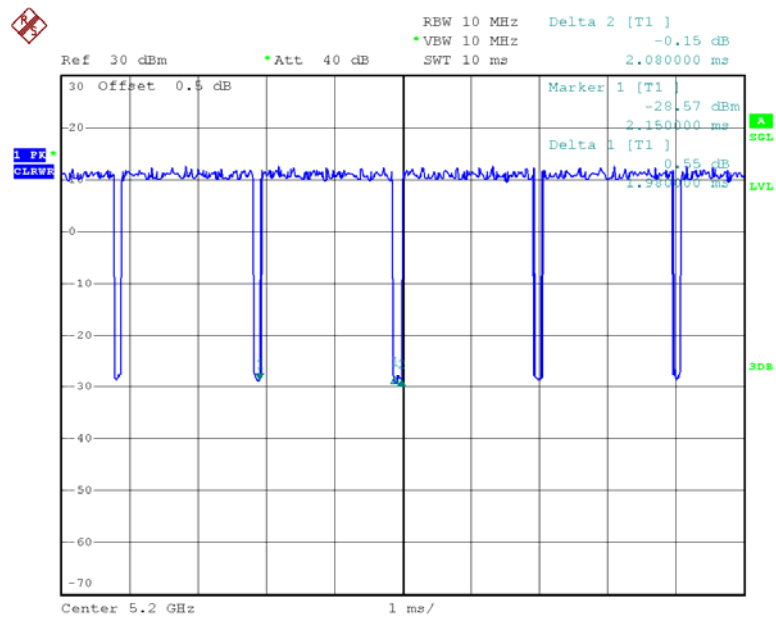


Date: 24.FEB.2020 15:56:46

802.11n ht40

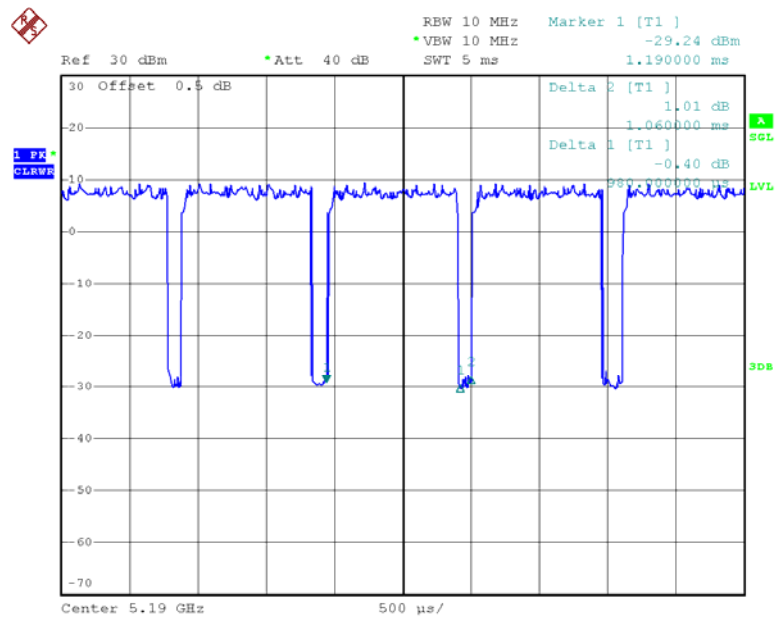

Date: 24.FEB.2020 15:58:43

802.11ac ht80

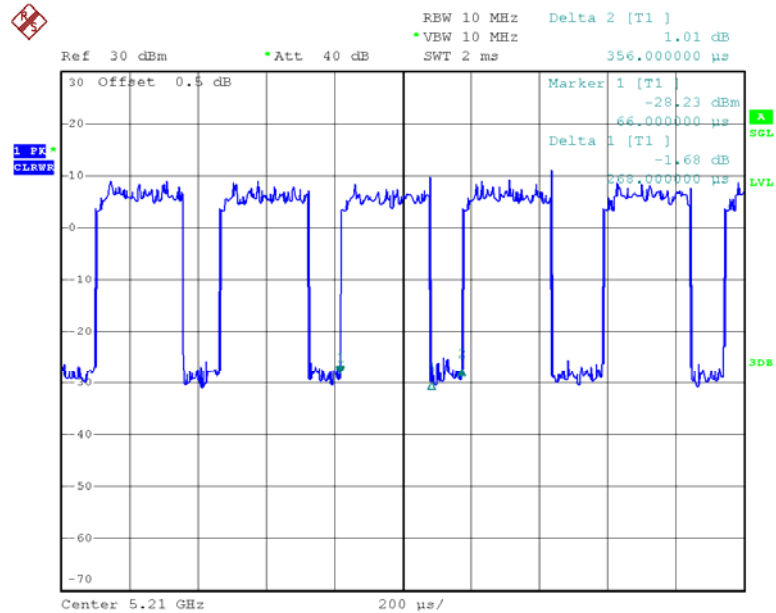

Date: 24.FEB.2020 16:08:42

Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DJI	CrystalSky (7.85inch) Display	CS785	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	yes	No	1.2	Adapter	EUT
USB Cable	yes	No	0.2	EUT	Display

Block Diagram of Test Setup

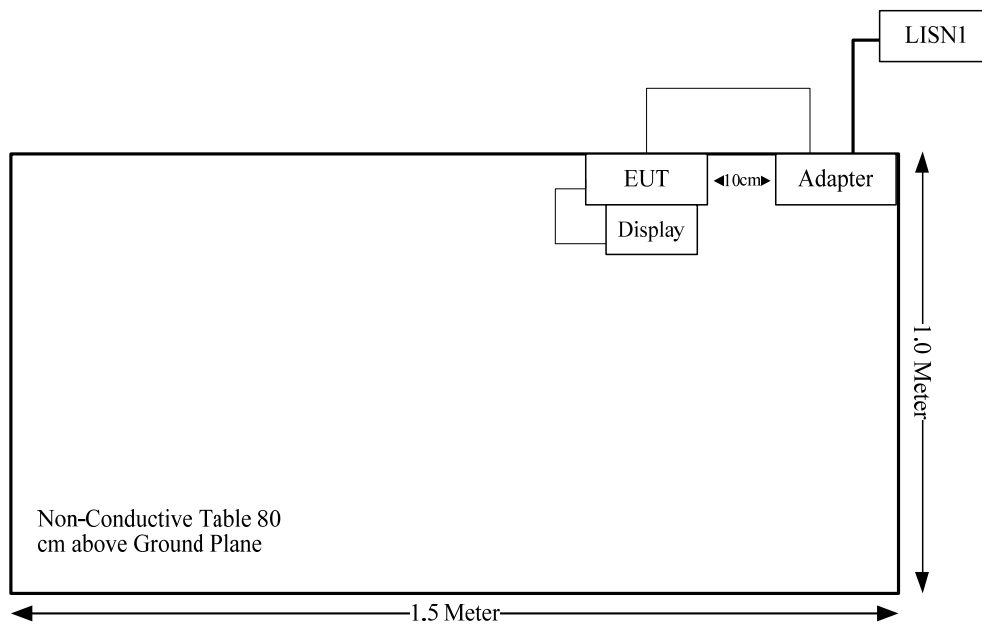

SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1093 RSS-102 Clause 4	RF Exposure	Compliance
FCC§15.203, RSS-Gen Clause 6.8	Antenna Requirement	Compliance
FCC§15.407(b)(6)& §15.207(a), RSS-Gen Clause 8.8	Conducted Emissions	Compliance
FCC§15.205& §15.209 &§15.407(b), RSS-247 Clause 6.2	Undesirable Emission& Restricted Bands	Compliance
FCC§15.407(a) (e), RSS-247 Clause 6.2 RSS-Gen Clause 6.7	Emission Bandwidth	Compliance
FCC§15.407(a) RSS-247 Clause 6.2	Conducted Transmitter Output Power	Compliance
FCC§15.407 (a), RSS-247 Clause 6.2	Power Spectral Density	Compliance
FCC§15.407 (h), RSS-247 Clause 6.3	Dynamic Frequency Selection(DFS)	Compliance

FCC §15.407 (f) & §1.1310 & §2.1093, RSS-102 CLAUSE 4- RF EXPOSURE**Applicable Standard**

According to §15.407(f), §1.1310 and §2.1093.

According to RSS-102 Clause 4 Table 3, SAR limits for device used by the general public

Body Region	Average SAR (W/Kg)	Averaging Time (minutes)	Mass Average (g)
Whole Body	0.08	6	Whole Body
Localized Head, Neck and Trunk	1.6	6	1
Localized Limbs	4	6	10

Test Result

Compliant, please refer to the SAR report: RDG191226022-20.

FCC §15.203& RSS-GEN CLAUSE 6.8 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC§ 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

According to RSS-Gen Clause 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report (and in the notice to be included in the user manual, provided below).

When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer. The test report shall state the RF power, output power setting and spurious emission measurements with each antenna type that is used with the transmitter being tested.

For licence-exempt equipment with detachable antennas, the user manual shall also contain the following notice in a conspicuous location:

This radio transmitter [enter the device's ISED certification number] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Immediately following the above notice, the manufacturer shall provide a list of all antenna types which can be used with the transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna type.

Antenna Connector Construction

The EUT has two internal antennas arrangement for WIFI/BLE, fulfill the requirement of this section. Please refer to the EUT photos.

Usage	Antenna Chain	Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
WIFI	0	PCB	50	2.5 dBi/2.4~2.5GHz 3.0 dBi/5.15~5.85GHz
WIFI/BLE	1	PCB	50	2.5 dBi/2.4~2.5GHz 3.0 dBi/5.15~5.85GHz


Result: Compliance.

FCC §15.207(a) RSS-GEN CLAUSE 8.8– CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6), RSS-GEN CLAUSE 8.8.

EUT Setup

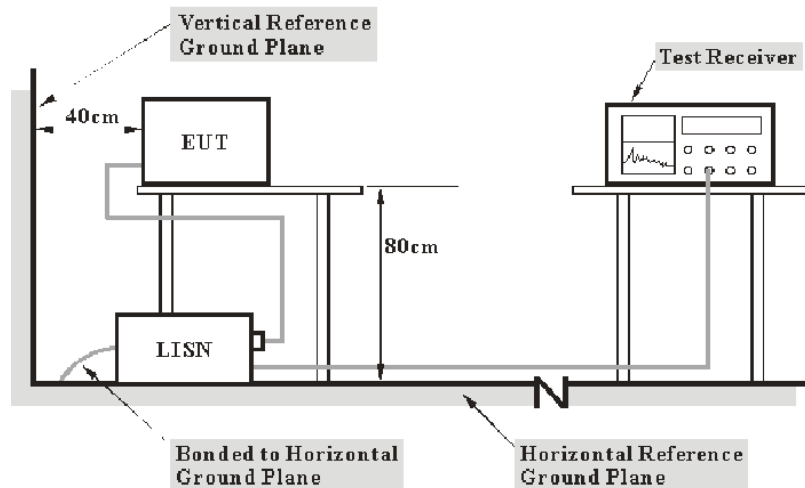

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits and RSS-Gen clause 8.8 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	LISN	ENV 216	101614	2019-09-12	2020-09-12
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the EUT was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Data


Environmental Conditions

Temperature:	23.4 °C
Relative Humidity:	46 %
ATM Pressure:	101.7 kPa

The testing was performed by Sern Xiang on 2020-02-25


Test Mode: Transmitting

AC120 V, 60 Hz, Line:

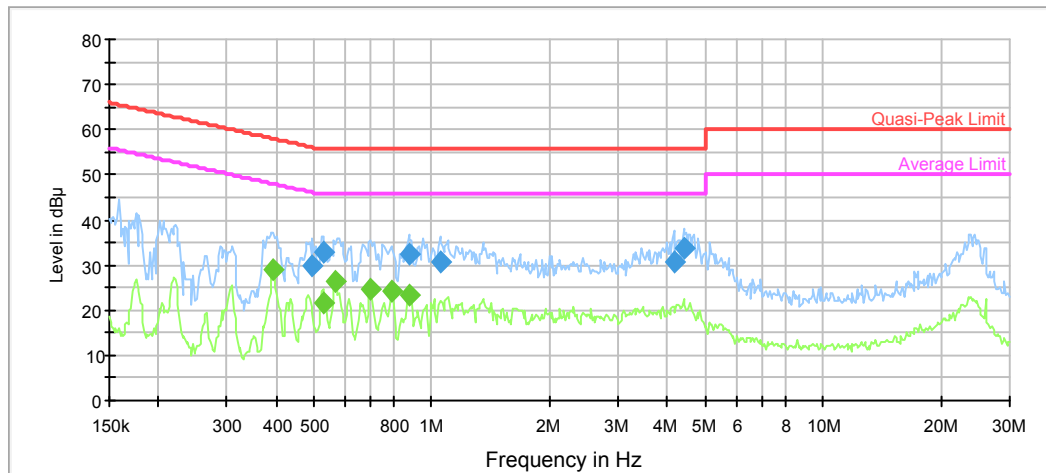

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.2	9.000	L1	9.7	19.8	66.0
0.259279	33.4	9.000	L1	9.7	28.1	61.5
0.485304	38.8	9.000	L1	9.7	17.4	56.2
0.525514	30.5	9.000	L1	9.7	25.5	56.0
1.493925	29.1	9.000	L1	9.7	26.9	56.0
4.375596	29.1	9.000	L1	9.8	26.9	56.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.335833	21.6	9.000	L1	9.7	27.7	49.3
0.430682	22.7	9.000	L1	9.7	24.5	47.2
0.500009	24.0	9.000	L1	9.7	22.0	46.0
0.574747	23.8	9.000	L1	9.7	22.2	46.0
1.493925	17.0	9.000	L1	9.7	29.0	46.0
4.204862	20.2	9.000	L1	9.8	25.8	46.0

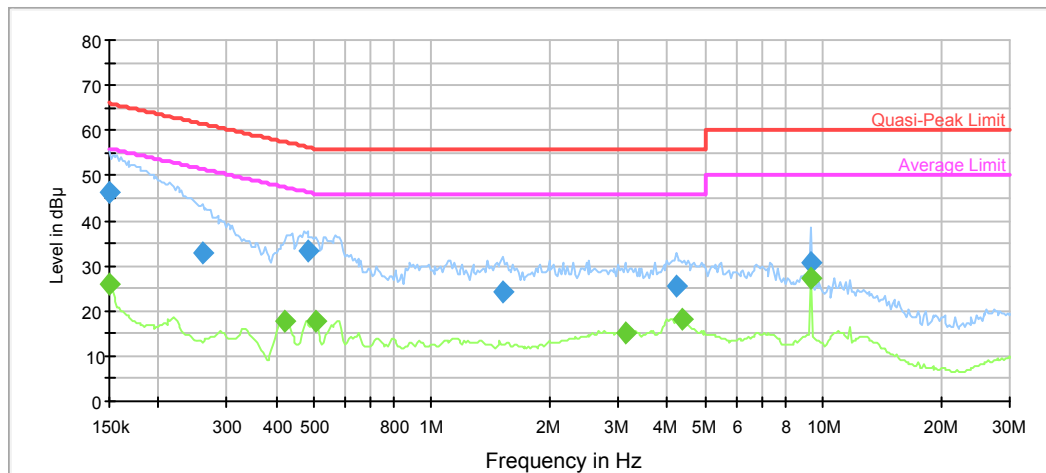AC120 V, 60 Hz, Neutral:

frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	46.4	9.000	N	9.7	19.6	66.0
0.259279	33.1	9.000	N	9.7	28.4	61.5
0.480499	33.3	9.000	N	9.6	23.0	56.3
1.523953	24.0	9.000	N	9.6	32.0	56.0
4.204862	25.4	9.000	N	9.7	30.6	56.0
9.320982	30.6	9.000	N	9.7	29.4	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	25.8	9.000	N	9.7	30.2	56.0
0.422196	17.6	9.000	N	9.6	29.8	47.4
0.505009	17.7	9.000	N	9.6	28.3	46.0
3.150880	15.2	9.000	N	9.6	30.8	46.0
4.375596	18.0	9.000	N	9.7	28.0	46.0
9.320982	27.4	9.000	N	9.7	22.6	50.0

**FCC §15.209, §15.205 , §15.407(b) &RSS-247 CLAUSE 6.2, RSS-GEN
CLAUSE 8.10 –UNWANTED EMISSION**

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.

(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.

(7) The provisions of §15.205 apply to intentional radiators operating under this section.

According to RSS-247 Clause 6.2

Frequency band 5150-5250 MHz

6.2.1.2 Unwanted emission limits

For transmitters with operating frequencies in the band 5150-5250 MHz, all emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. Any unwanted emissions that fall into the band 5250-5350 MHz shall be attenuated below the channel power by at least 26 dB, when measured using a resolution bandwidth between 1 and 5% of the occupied bandwidth (i.e. 99% bandwidth), above 5250 MHz. The 26 dB bandwidth may fall into the 5250-5350 MHz band; however, if the occupied bandwidth also falls within the 5250-5350 MHz band, the transmission is considered as intentional and the devices shall comply with all requirements in the band 5250-5350 MHz including implementing dynamic frequency selection (DFS) and TPC, on the portion of the emission that resides in the 5250-5350 MHz band.

Frequency band 5250-5350 MHz

6.2.2.2 Unwanted emission limits

Devices shall comply with the following:

- a) All emissions outside the band 5250-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p.; or
- b) All emissions outside the band 5150-5350 MHz shall not exceed -27 dBm/MHz e.i.r.p. and its power shall comply with the spectral power density for operation within the band 5150-5250 MHz. The device, except devices installed in vehicles, shall be labelled or include in the user manual the following text “for indoor use only.”

Frequency bands 5470-5600 MHz and 5650-5725 MHz:

6.2.3.2 Unwanted emission limits

Emissions outside the band 5470-5600 MHz and 5650-5725 MHz shall not exceed -27 dBm/MHz e.i.r.p. However, devices with bandwidth overlapping the band edge of 5725 MHz can meet the emission limit of -27 dBm/MHz e.i.r.p. at 5850 MHz instead of 5725 MHz.

Frequency band 5725-5850 MHz

6.2.4.2 Unwanted emission limits

Devices operating in the band 5725-5850 MHz with antenna gain greater than 10 dBi can have unwanted emissions that comply with either the limits in this section or in section 5.5 until six (6) months after the publication date of this standard for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2018.


Devices operating in the band 5725-5850 MHz with antenna gain of 10 dBi or less can have unwanted emissions that comply with either the limits in this section or in section 5.5 until April 1, 2018 for certification. Certified devices that do not comply with emission limits in this section shall not be manufactured, imported, distributed, leased, offered for sale or sold after April 1, 2020.



Devices operating in the band 5725-5850 MHz shall have e.i.r.p. of unwanted emissions comply with the following:

- 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
- 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
- 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
- 27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

EUT Setup

Below 1 GHz:

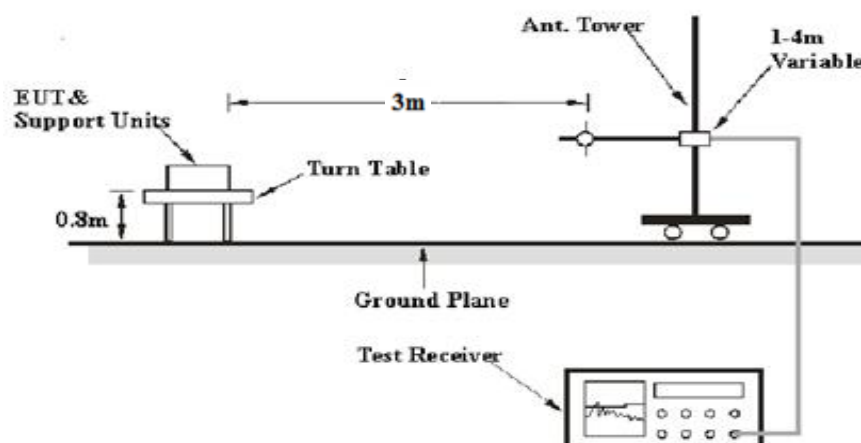

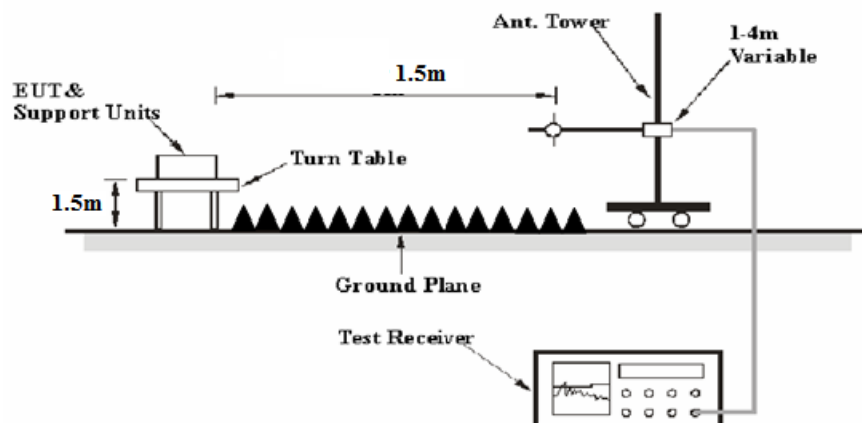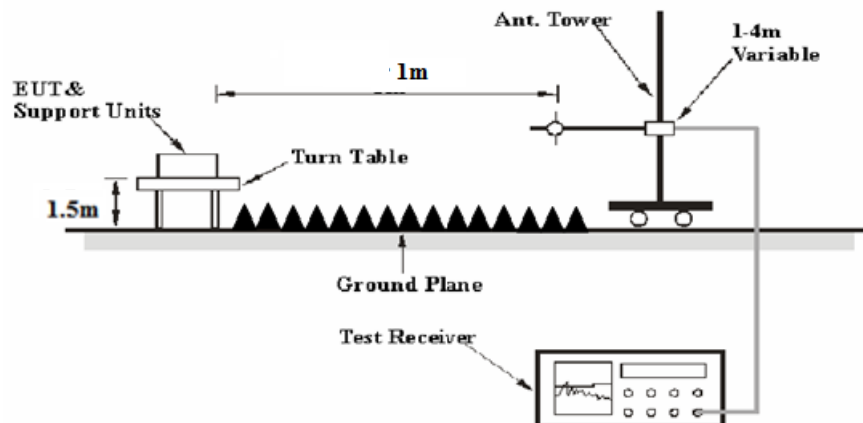1-26.5 GHz:**26.5-40 GHz:**

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits and RSS-247, RSS-Gen limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-09-12	2020-09-12
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2019-09-05	2020-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2017-12-06	2020-12-05
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2017-12-06	2020-12-05
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN-0899-003	0899003	2019-05-06	2020-05-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	21.1℃	25℃
Relative Humidity:	54%	46%
ATM Pressure:	101.0kPa	101.7 kPa
Tester:	Chris Mo	Fixel Zhang
Test Date:	2020-02-21	2020-01-08


Test Mode: Transmitting

1) Below 1GHz(802.11a 5825 MHz MIMO was the worst):

Horizontal

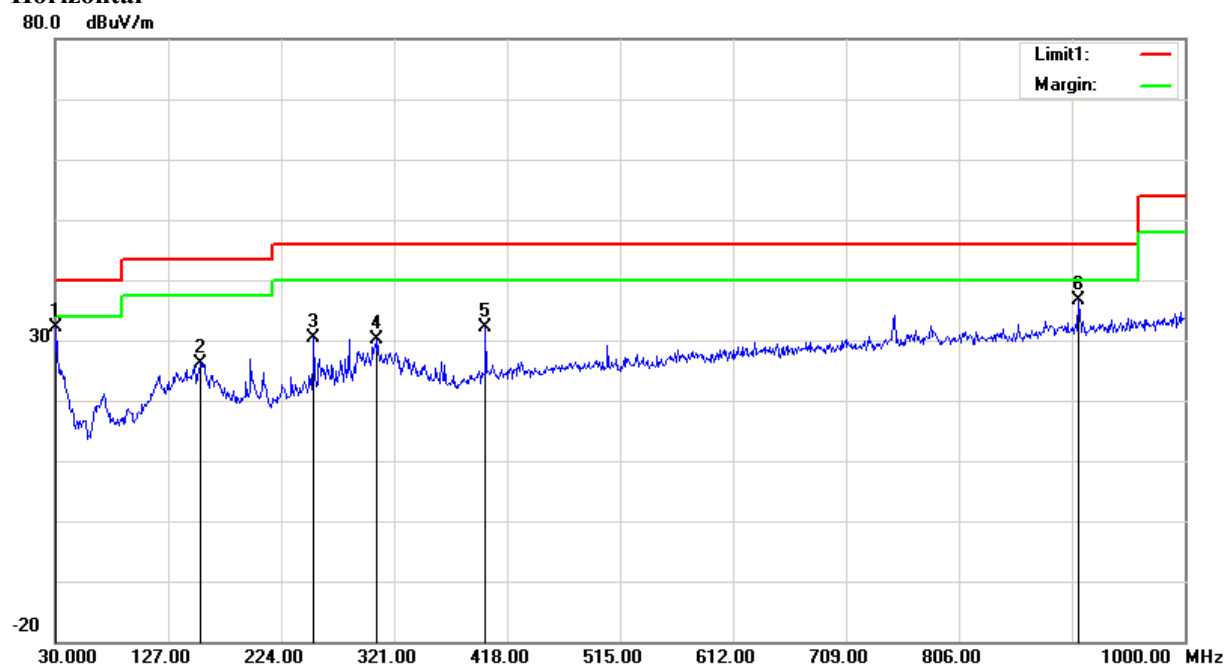

Frequency (MHz)	Receiver Reading (dBuV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
30.9700	31.12	peak	0.91	32.03	40.00	7.97
155.1300	32.12	peak	-5.87	26.25	43.50	17.25
252.1300	36.49	peak	-6.02	30.47	46.00	15.53
306.4500	33.79	peak	-3.68	30.11	46.00	15.89
399.5700	34.16	peak	-2.03	32.13	46.00	13.87
908.8200	30.35	peak	6.37	36.72	46.00	9.28

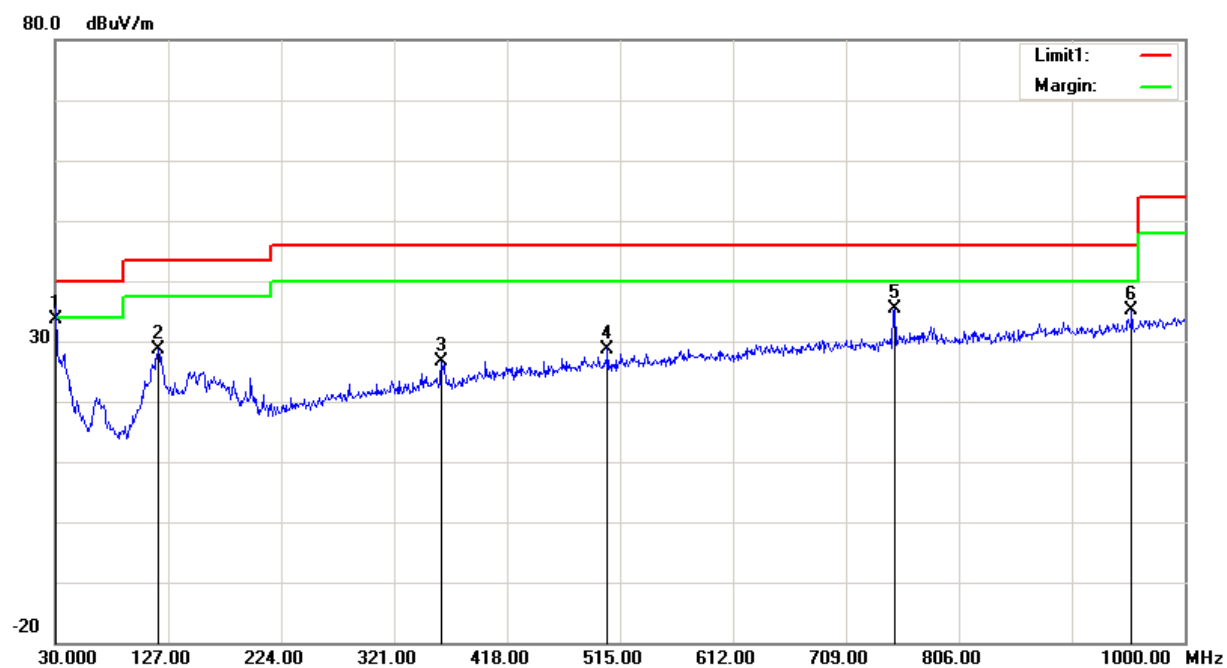Vertical

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	32.79	QP	0.91	33.70	40.00	6.30
118.2700	33.41	peak	-4.82	28.59	43.50	14.91
361.7400	29.48	peak	-2.80	26.68	46.00	19.32
504.3300	29.03	peak	-0.28	28.75	46.00	17.25
750.7100	31.70	peak	3.66	35.36	46.00	10.64
954.4100	34.21	peak	0.82	35.03	46.00	10.97

2) 1GHz-40GHz:
5150-5250MHz
802.11a(MIMO mode was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	74.40	PK	H	33.59	3.58	0.00	111.57	105.55	N/A	N/A
5180.00	66.16	AV	H	33.59	3.58	0.00	103.33	97.31	N/A	N/A
5180.00	72.06	PK	V	33.59	3.58	0.00	109.23	103.21	N/A	N/A
5180.00	64.24	AV	V	33.59	3.58	0.00	101.41	95.39	N/A	N/A
5150.00	36.20	PK	H	33.54	3.56	0.00	73.30	67.28	74.00	6.72
5150.00	17.10	AV	H	33.54	3.56	0.00	54.20	48.18	54.00	5.82
10360.00	36.07	PK	H	38.17	6.29	25.46	55.07	49.05	68.20	19.15
15540.00	35.53	PK	H	38.06	8.85	24.27	58.17	52.15	74.00	21.85
15540.00	23.00	AV	H	38.06	8.85	24.27	45.64	39.62	54.00	14.38
Middle Channel: 5200 MHz										
5200.00	74.87	PK	H	33.62	3.60	0.00	112.09	106.07	N/A	N/A
5200.00	66.34	AV	H	33.62	3.60	0.00	103.56	97.54	N/A	N/A
5200.00	73.40	PK	V	33.62	3.60	0.00	110.62	104.6	N/A	N/A
5200.00	63.34	AV	V	33.62	3.60	0.00	100.56	94.54	N/A	N/A
10400.00	36.12	PK	H	38.18	6.32	25.46	55.16	49.14	68.20	19.06
15600.00	35.60	PK	H	38.00	8.83	24.31	58.12	52.1	74.00	21.90
15600.00	23.10	AV	H	38.00	8.83	24.31	45.62	39.6	54.00	14.40
High Channel: 5240 MHz										
5240.00	74.86	PK	H	33.68	3.52	0.00	112.06	106.04	N/A	N/A
5240.00	66.31	AV	H	33.68	3.52	0.00	103.51	97.49	N/A	N/A
5240.00	73.24	PK	V	33.68	3.52	0.00	110.44	104.42	N/A	N/A
5240.00	63.24	AV	V	33.68	3.52	0.00	100.44	94.42	N/A	N/A
5350.00	28.01	PK	H	33.86	3.52	0.00	65.39	59.37	74.00	14.63
5350.00	15.34	AV	H	33.86	3.52	0.00	52.72	46.7	54.00	7.30
10480.00	36.15	PK	H	38.20	6.37	25.47	55.25	49.23	68.20	18.97
15720.00	35.34	PK	H	37.88	8.79	24.39	57.62	51.6	74.00	22.40
15720.00	23.47	AV	H	37.88	8.79	24.39	45.75	39.73	54.00	14.27

802.11n ht20(MIMO mode was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	74.76	PK	H	33.59	3.58	0.00	111.93	105.91	N/A	N/A
5180.00	65.17	AV	H	33.59	3.58	0.00	102.34	96.32	N/A	N/A
5180.00	72.45	PK	V	33.59	3.58	0.00	109.62	103.6	N/A	N/A
5180.00	62.75	AV	V	33.59	3.58	0.00	99.92	93.9	N/A	N/A
5150.00	36.51	PK	H	33.54	3.56	0.00	73.61	67.59	74.00	6.41
5150.00	16.51	AV	H	33.54	3.56	0.00	53.61	47.59	54.00	6.41
10360.00	36.47	PK	H	38.17	6.29	25.46	55.47	49.45	68.20	18.75
15540.00	36.87	PK	H	38.06	8.85	24.27	59.51	53.49	74.00	20.51
15540.00	23.47	AV	H	38.06	8.85	24.27	46.11	40.09	54.00	13.91
Middle Channel: 5200 MHz										
5200.00	75.25	PK	H	33.62	3.60	0.00	112.47	106.45	N/A	N/A
5200.00	65.00	AV	H	33.62	3.60	0.00	102.22	96.2	N/A	N/A
5200.00	72.10	PK	V	33.62	3.60	0.00	109.32	103.3	N/A	N/A
5200.00	62.14	AV	V	33.62	3.60	0.00	99.36	93.34	N/A	N/A
10400.00	35.67	PK	H	38.18	6.32	25.46	54.71	48.69	68.20	19.51
15600.00	35.27	PK	H	38.00	8.83	24.31	57.79	51.77	74.00	22.23
15600.00	23.24	AV	H	38.00	8.83	24.31	45.76	39.74	54.00	14.26
High Channel: 5240 MHz										
5240.00	74.41	PK	H	33.68	3.52	0.00	111.61	105.59	N/A	N/A
5240.00	65.31	AV	H	33.68	3.52	0.00	102.51	96.49	N/A	N/A
5240.00	73.24	PK	V	33.68	3.52	0.00	110.44	104.42	N/A	N/A
5240.00	64.10	AV	V	33.68	3.52	0.00	101.30	95.28	N/A	N/A
5350.00	27.69	PK	H	33.86	3.52	0.00	65.07	59.05	74.00	14.95
5350.00	15.49	AV	H	33.86	3.52	0.00	52.87	46.85	54.00	7.15
10480.00	35.34	PK	H	38.20	6.37	25.47	54.44	48.42	68.20	19.78
15720.00	35.47	PK	H	37.88	8.79	24.39	57.75	51.73	74.00	22.27
15720.00	23.41	AV	H	37.88	8.79	24.39	45.69	39.67	54.00	14.33

802.11n ht40(MIMO mode was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	71.28	PK	H	33.60	3.59	0.00	108.47	102.45	N/A	N/A
5190.00	61.27	AV	H	33.60	3.59	0.00	98.46	92.44	N/A	N/A
5190.00	68.12	PK	V	33.60	3.59	0.00	105.31	99.29	N/A	N/A
5190.00	58.54	AV	V	33.60	3.59	0.00	95.73	89.71	N/A	N/A
5150.00	36.66	PK	H	33.54	3.56	0.00	73.76	67.74	74.00	6.26
5150.00	20.66	AV	H	33.54	3.56	0.00	57.76	51.74	54.00	2.26
10380.00	35.19	PK	H	38.18	6.31	25.46	54.22	48.2	68.20	20.00
15570.00	35.99	PK	H	38.03	8.84	24.29	58.57	52.55	74.00	21.45
15570.00	23.04	AV	H	38.03	8.84	24.29	45.62	39.6	54.00	14.40
High Channel: 5230 MHz										
5230.00	70.90	PK	H	33.67	3.54	0.00	108.11	102.09	N/A	N/A
5230.00	62.00	AV	H	33.67	3.54	0.00	99.21	93.19	N/A	N/A
5230.00	67.72	PK	V	33.67	3.54	0.00	104.93	98.91	N/A	N/A
5230.00	57.67	AV	V	33.67	3.54	0.00	94.88	88.86	N/A	N/A
5350.00	30.49	PK	H	33.86	3.52	0.00	67.87	61.85	74.00	12.15
5350.00	15.42	AV	H	33.86	3.52	0.00	52.80	46.78	54.00	7.22
10460.00	35.63	PK	H	38.19	6.36	25.47	54.71	48.69	68.20	19.51
15690.00	36.40	PK	H	37.91	8.80	24.37	58.74	52.72	74.00	21.28
15690.00	23.47	AV	H	37.91	8.80	24.37	45.81	39.79	54.00	14.21

802.11ac vht80(MIMO mode was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5210 MHz										
5210.00	70.10	PK	H	33.64	3.58	0.00	107.32	101.3	N/A	N/A
5210.00	56.78	AV	H	33.64	3.58	0.00	94.00	87.98	N/A	N/A
5210.00	68.94	PK	V	33.64	3.58	0.00	106.16	100.14	N/A	N/A
5210.00	54.07	AV	V	33.64	3.58	0.00	91.29	85.27	N/A	N/A
5150.00	34.00	PK	H	33.54	3.56	0.00	71.10	65.08	74.00	8.92
5150.00	21.87	AV	H	33.54	3.56	0.00	58.97	52.95	54.00	1.05
5350.00	28.88	PK	H	33.86	3.52	0.00	66.26	60.24	74.00	13.76
5350.00	18.47	AV	H	33.86	3.52	0.00	55.85	49.83	54.00	4.17
10420.00	36.03	PK	H	38.18	6.33	25.47	55.07	49.05	68.20	19.15
15630.00	36.02	PK	H	37.97	8.82	24.33	58.48	52.46	74.00	21.54
15630.00	23.47	AV	H	37.97	8.82	24.33	45.93	39.91	54.00	14.09

5725-5850MHz**802.11a(MIMO mode was the worst)**

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	73.73	PK	H	34.20	3.69	0.00	111.62	105.6	N/A	N/A
5745.00	61.34	AV	H	34.20	3.69	0.00	99.23	93.21	N/A	N/A
5745.00	71.97	PK	V	34.20	3.69	0.00	109.86	103.84	N/A	N/A
5745.00	61.25	AV	V	34.20	3.69	0.00	99.14	93.12	N/A	N/A
5725.00	45.54	PK	H	34.19	3.69	0.00	83.42	77.4	122.20	44.80
5720.00	37.93	PK	H	34.19	3.69	0.00	75.81	69.79	110.80	41.01
5700.00	28.82	PK	H	34.18	3.68	0.00	66.68	60.66	105.20	44.54
5650.00	26.45	PK	H	34.16	3.63	0.00	64.24	58.22	68.20	9.98
11490.00	36.74	PK	H	38.99	6.59	25.51	56.81	50.79	74.00	23.21
11490.00	23.44	AV	H	38.99	6.59	25.51	43.51	37.49	54.00	16.51
17235.00	36.87	PK	H	41.56	8.78	23.72	63.49	57.47	68.20	10.73
Middle Channel: 5785 MHz										
5785.00	73.87	PK	H	34.21	3.71	0.00	111.79	105.77	N/A	N/A
5785.00	61.41	AV	H	34.21	3.71	0.00	99.33	93.31	N/A	N/A
5785.00	72.00	PK	V	34.21	3.71	0.00	109.92	103.9	N/A	N/A
5785.00	61.87	AV	V	34.21	3.71	0.00	99.79	93.77	N/A	N/A
11570.00	36.84	PK	H	39.00	6.61	25.46	56.99	50.97	74.00	23.03
11570.00	23.37	AV	H	39.00	6.61	25.46	43.52	37.497	54.00	16.50
17355.00	36.34	PK	H	42.26	8.81	23.60	63.81	57.79	68.20	10.41
High Channel: 5825 MHz										
5825.00	72.86	PK	H	34.23	3.73	0.00	110.82	104.8	N/A	N/A
5825.00	60.27	AV	H	34.23	3.73	0.00	98.23	92.21	N/A	N/A
5825.00	70.54	PK	V	34.23	3.73	0.00	108.50	102.48	N/A	N/A
5825.00	60.77	AV	V	34.23	3.73	0.00	98.73	92.71	N/A	N/A
5850.00	32.75	PK	H	34.24	3.75	0.00	70.74	64.72	122.20	57.48
5855.00	30.32	PK	H	34.24	3.75	0.00	68.31	62.29	110.80	48.51
5875.00	27.15	PK	H	34.25	3.77	0.00	65.17	59.15	105.20	46.05
5925.00	26.41	PK	H	34.27	3.80	0.00	64.48	58.46	68.20	9.74
11650.00	36.83	PK	H	39.00	6.64	25.41	57.06	51.04	74.00	22.96
11650.00	23.27	AV	H	39.00	6.64	25.41	43.50	37.48	54.00	16.52
17475.00	36.65	PK	H	42.96	8.84	23.48	64.97	58.95	68.20	9.25

802.11n ht20(MIMO mode was the worst)

Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB/m	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5745 MHz										
5745.00	75.27	PK	H	34.20	3.69	0.00	113.16	107.14	N/A	N/A
5745.00	65.42	AV	H	34.20	3.69	0.00	103.31	97.29	N/A	N/A
5745.00	73.20	PK	V	34.20	3.69	0.00	111.09	105.07	N/A	N/A
5745.00	63.41	AV	V	34.20	3.69	0.00	101.30	95.28	N/A	N/A
5725.00	42.83	PK	H	34.19	3.69	0.00	80.71	74.69	122.20	47.51
5720.00	40.23	PK	H	34.19	3.69	0.00	78.11	72.09	110.80	38.71
5700.00	32.30	PK	H	34.18	3.68	0.00	70.16	64.14	105.20	41.06
5650.00	27.40	PK	H	34.16	3.63	0.00	65.19	59.17	68.20	9.03
11490.00	35.81	PK	H	38.99	6.59	25.51	55.88	49.86	74.00	24.14
11490.00	23.31	AV	H	38.99	6.59	25.51	43.38	37.36	54.00	16.64
17235.00	36.17	PK	H	41.56	8.78	23.72	62.79	56.77	68.20	11.43
Middle Channel: 5785 MHz										
5785.00	74.78	PK	H	34.21	3.71	0.00	112.70	106.68	N/A	N/A
5785.00	64.71	AV	H	34.21	3.71	0.00	102.63	96.61	N/A	N/A
5785.00	73.41	PK	V	34.21	3.71	0.00	111.33	105.31	N/A	N/A
5785.00	63.27	AV	V	34.21	3.71	0.00	101.19	95.17	N/A	N/A
11570.00	35.87	PK	H	39.00	6.61	25.46	56.02	50	74.00	24.00
11570.00	23.41	AV	H	39.00	6.61	25.46	43.56	37.54	54.00	16.46
17355.00	36.24	PK	H	42.26	8.81	23.60	63.71	57.69	68.20	10.51
High Channel: 5825 MHz										
5825.00	74.33	PK	H	34.23	3.73	0.00	112.29	106.27	N/A	N/A
5825.00	64.82	AV	H	34.23	3.73	0.00	102.78	96.76	N/A	N/A
5825.00	73.57	PK	V	34.23	3.73	0.00	111.53	105.51	N/A	N/A
5825.00	63.47	AV	V	34.23	3.73	0.00	101.43	95.41	N/A	N/A
5850.00	39.47	PK	H	34.24	3.75	0.00	77.46	71.44	122.20	50.76
5855.00	37.37	PK	H	34.24	3.75	0.00	75.36	69.34	110.80	41.46
5875.00	30.24	PK	H	34.25	3.77	0.00	68.26	62.24	105.20	42.96
5925.00	26.42	PK	H	34.27	3.80	0.00	64.49	58.47	68.20	9.73
11650.00	35.87	PK	H	39.00	6.64	25.41	56.10	50.08	74.00	23.92
11650.00	23.41	AV	H	39.00	6.64	25.41	43.64	37.62	54.00	16.38
17475.00	36.71	PK	H	42.96	8.84	23.48	65.03	59.01	68.20	9.19




802.11n ht40(MIMO mode was the worst)


Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5755 MHz										
5755.00	72.75	PK	H	34.20	3.70	0.00	110.65	104.63	N/A	N/A
5755.00	63.55	AV	H	34.20	3.70	0.00	101.45	95.43	N/A	N/A
5755.00	70.32	PK	V	34.20	3.70	0.00	108.22	102.2	N/A	N/A
5755.00	61.40	AV	V	34.20	3.70	0.00	99.30	93.28	N/A	N/A
5725.00	42.48	PK	H	34.19	3.69	0.00	80.36	74.34	122.20	47.86
5720.00	41.81	PK	H	34.19	3.69	0.00	79.69	73.67	110.80	37.13
5700.00	34.16	PK	H	34.18	3.68	0.00	72.02	66	105.20	39.20
5650.00	27.76	PK	H	34.16	3.63	0.00	65.55	59.53	68.20	8.67
11510.00	35.78	PK	H	39.00	6.59	25.50	55.87	49.85	74.00	24.15
11510.00	23.94	AV	H	39.00	6.59	25.50	44.03	38.01	54.00	15.99
17265.00	35.07	PK	H	41.74	8.79	23.69	61.91	55.89	68.20	12.31
High Channel: 5795 MHz										
5795.00	72.16	PK	H	34.22	3.71	0.00	110.09	104.07	N/A	N/A
5795.00	62.20	AV	H	34.22	3.71	0.00	100.13	94.11	N/A	N/A
5795.00	70.14	PK	V	34.22	3.71	0.00	108.07	102.05	N/A	N/A
5795.00	60.17	AV	V	34.22	3.71	0.00	98.10	92.08	N/A	N/A
5850.00	33.58	PK	H	34.24	3.75	0.00	71.57	65.55	122.20	56.65
5855.00	30.27	PK	H	34.24	3.75	0.00	68.26	62.24	110.80	48.56
5875.00	29.27	PK	H	34.25	3.77	0.00	67.29	61.27	105.20	43.93
5925.00	26.92	PK	H	34.27	3.80	0.00	64.99	58.97	68.20	9.23
11590.00	36.70	PK	H	39.00	6.62	25.45	56.87	50.85	74.00	23.15
11590.00	23.97	AV	H	39.00	6.62	25.45	44.14	38.12	54.00	15.88
17385.00	35.98	PK	H	42.43	8.82	23.57	63.66	57.64	68.20	10.56

802.11ac vht80(MIMO mode was the worst)



Frequency	Receiver		Rx Antenna		Cable loss	Amplifier Gain	Corrected Amplitude	Extrapolation result	Limit	Margin
	Reading	Detector	Polar	Factor						
MHz	dBμV	PK/QP/AV	H/V	dB(1/m)	dB	dB	dBμV/m	dBμV/m	dBμV/m	dB
Low Channel: 5755 MHz										
5775.00	71.39	PK	H	34.21	3.70	0.00	109.30	103.28	N/A	N/A
5775.00	59.48	AV	H	34.21	3.70	0.00	97.39	91.37	N/A	N/A
5775.00	69.69	PK	V	34.21	3.70	0.00	107.60	101.58	N/A	N/A
5775.00	56.28	AV	V	34.21	3.70	0.00	94.19	88.17	N/A	N/A
5725.00	42.27	PK	H	34.19	3.69	0.00	80.15	74.13	122.20	48.07
5720.00	42.09	PK	H	34.19	3.69	0.00	79.97	73.95	110.80	36.85
5700.00	40.22	PK	H	34.18	3.68	0.00	78.08	72.06	105.20	33.14
5650.00	29.28	PK	H	34.16	3.63	0.00	67.07	61.05	68.20	7.15
5850.00	36.51	PK	H	34.24	3.75	0.00	74.50	68.48	122.20	53.72
5855.00	37.21	PK	H	34.24	3.75	0.00	75.20	69.18	110.80	41.62
5875.00	31.50	PK	H	34.25	3.77	0.00	69.52	63.5	105.20	41.70
5925.00	28.76	PK	H	34.27	3.80	0.00	66.83	60.81	68.20	7.39
11550.00	36.31	PK	H	39.00	6.61	25.48	56.44	50.42	74.00	23.58
11550.00	24.51	AV	H	39.00	6.61	25.48	44.64	38.62	54.00	15.38
17325.00	35.58	PK	H	42.09	8.80	23.63	62.84	56.82	68.20	11.38



Test Plots(For worst mode 802.11n ht20 MIMO 5825MHz)
Horizontal

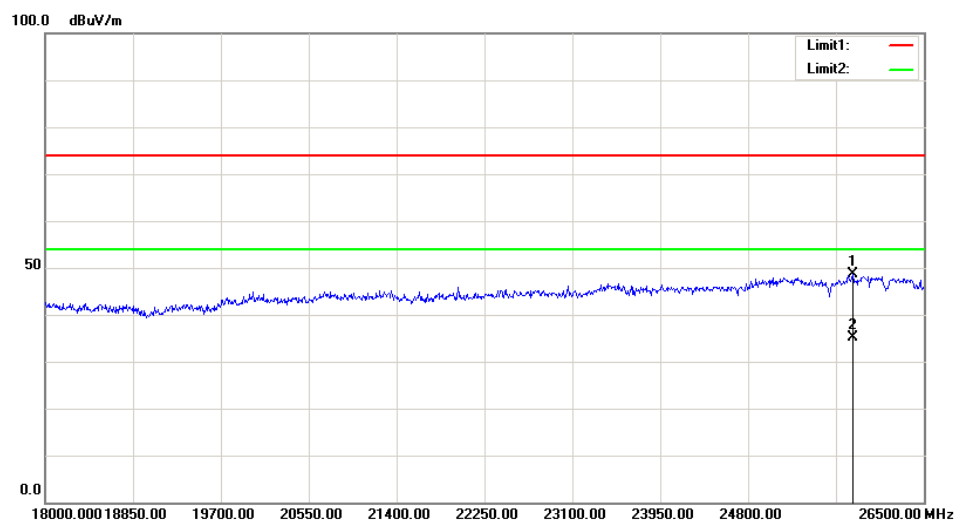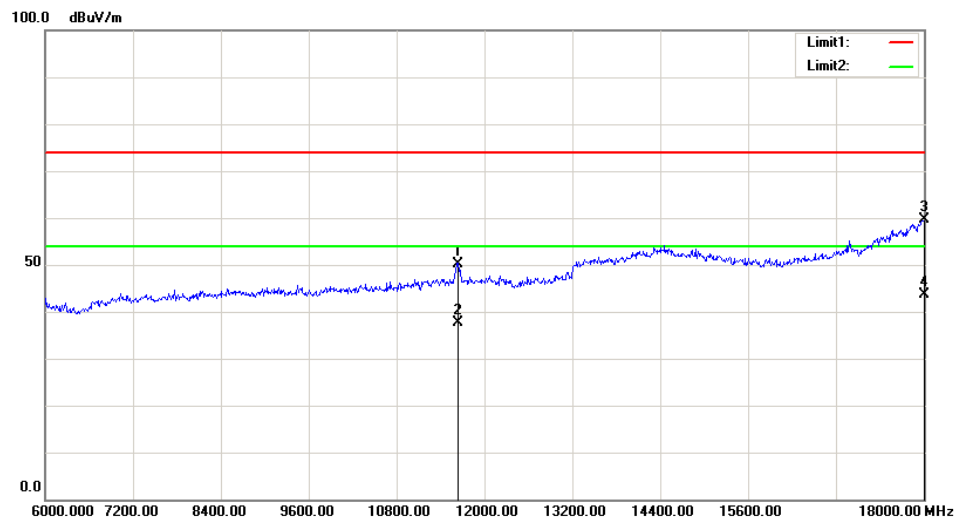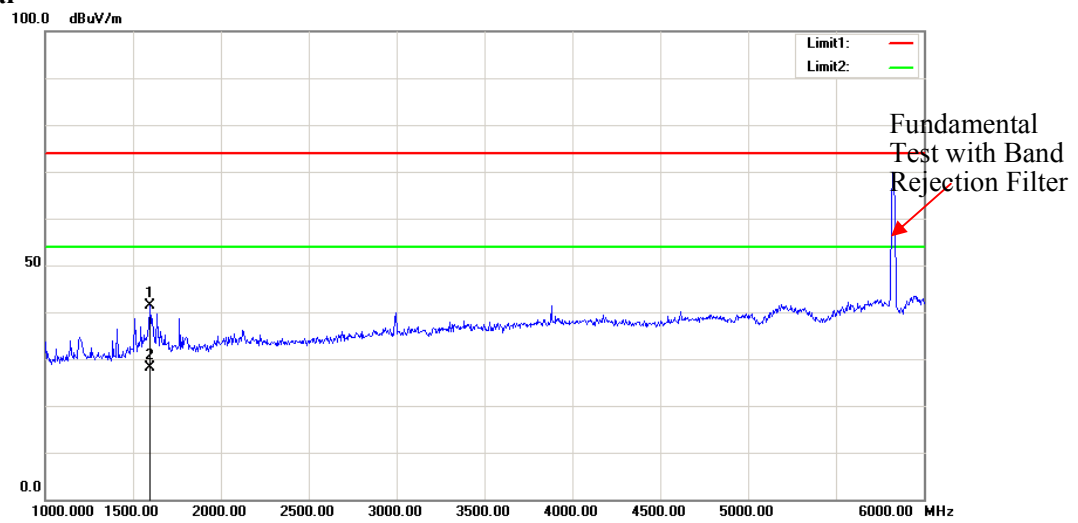

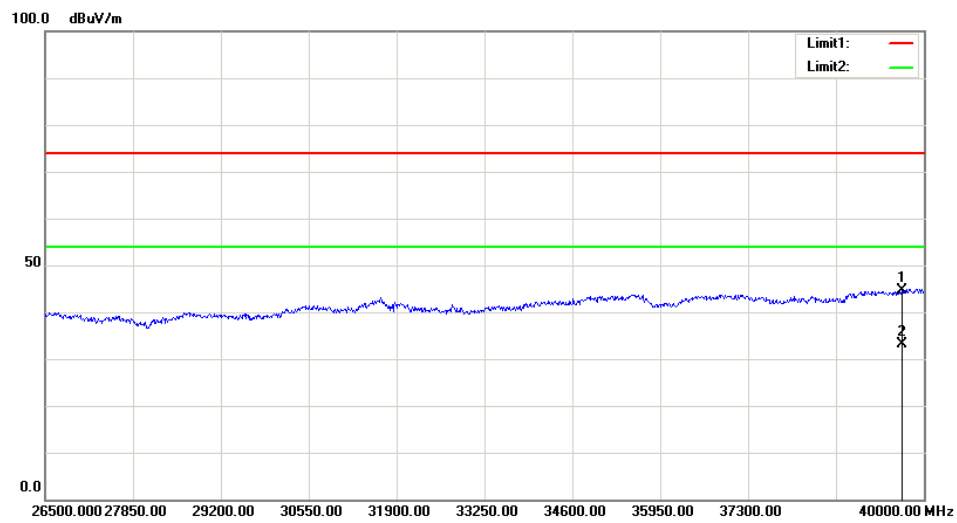

Vertical

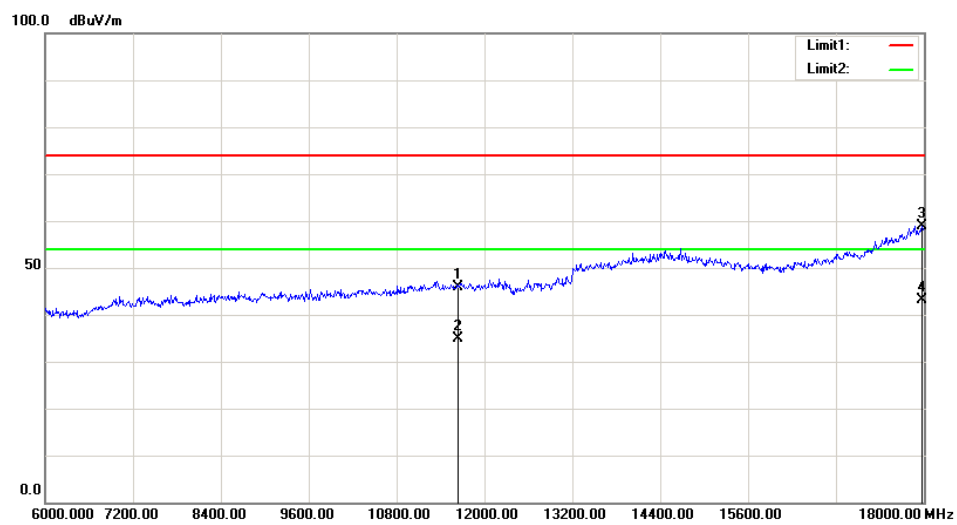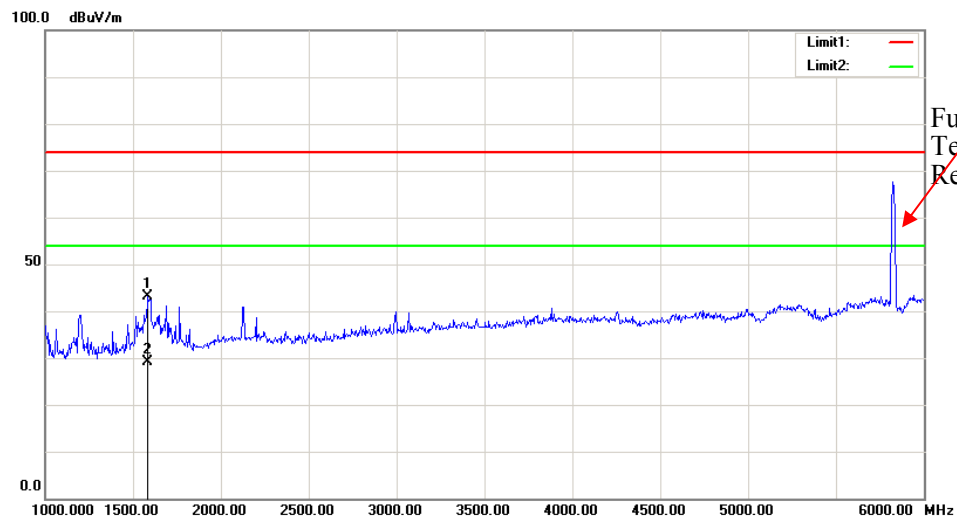

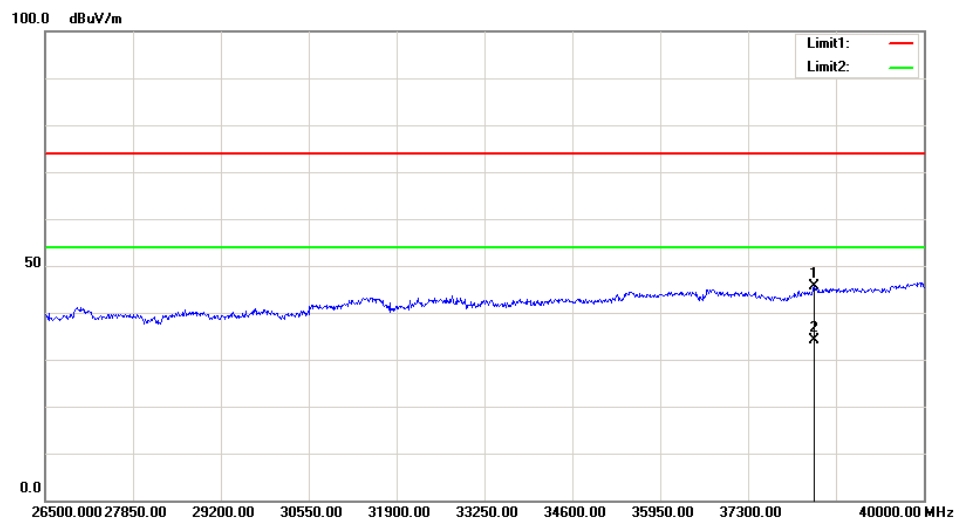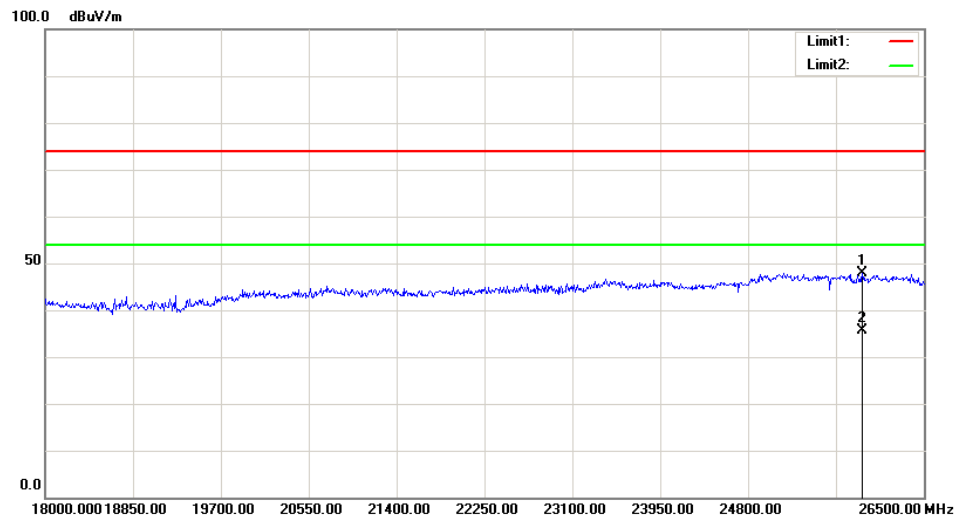

**FCC §15.407(a)(e) & RSS-247 CLAUSE 6.2, RSS-Gen CLAUSE 6.7–
EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH****Applicable Standard**

15.407(a) (e), RSS-247 Clause 6.2 and RSS-Gen Clause 6.7

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	23.1°C
Relative Humidity:	50 %
ATM Pressure:	102.1kPa
Tester:	Severn Zhu
Test Date:	2020-01-21

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	19.880	16.353
	5200	19.399	16.353
	5240	19.158	16.353
802.11n ht20	5180	20.842	17.475
	5200	20.842	17.475
	5240	20.762	17.475
802.11n ht40	5190	41.523	36.232
	5230	40.721	36.232
802.11ac ht80	5210	82.724	75.351


5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	15.471	16.433
	5785	15.551	16.353
	5825	15.631	16.353
802.11n ht20	5745	15.551	17.555
	5785	15.631	17.475
	5825	15.391	17.475
802.11n ht40	5755	35.431	36.393
	5795	35.431	36.393
802.11ac ht80	5775	75.671	75.671


Note: the 99% Occupied Bandwidth has not fallen into the band 5250-5350MHz or 5470-5725MHz.

5150-5250MHz:
26dB Emission Bandwidth:


802.11a Low Channel

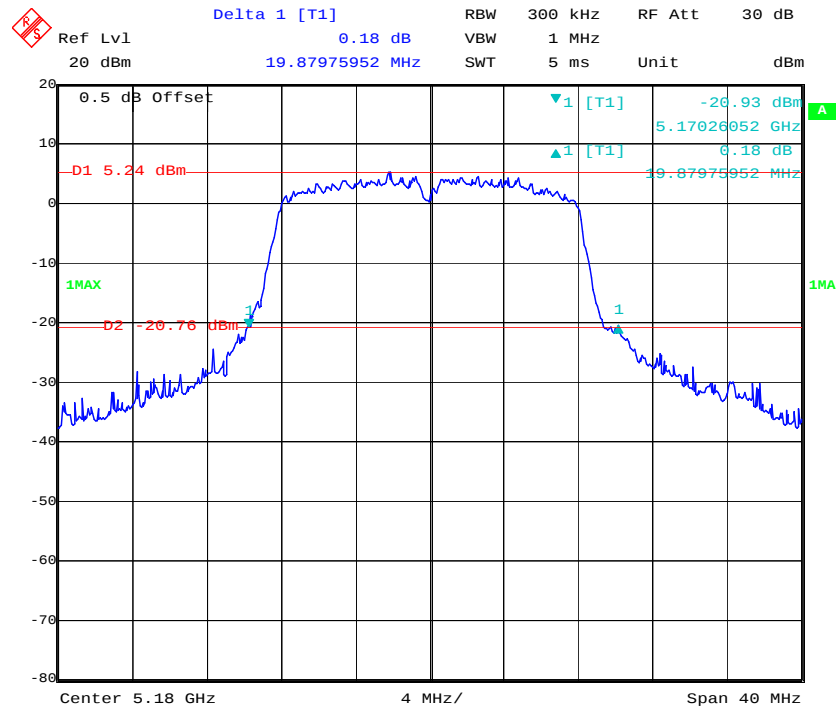

802.11a Middle Channel

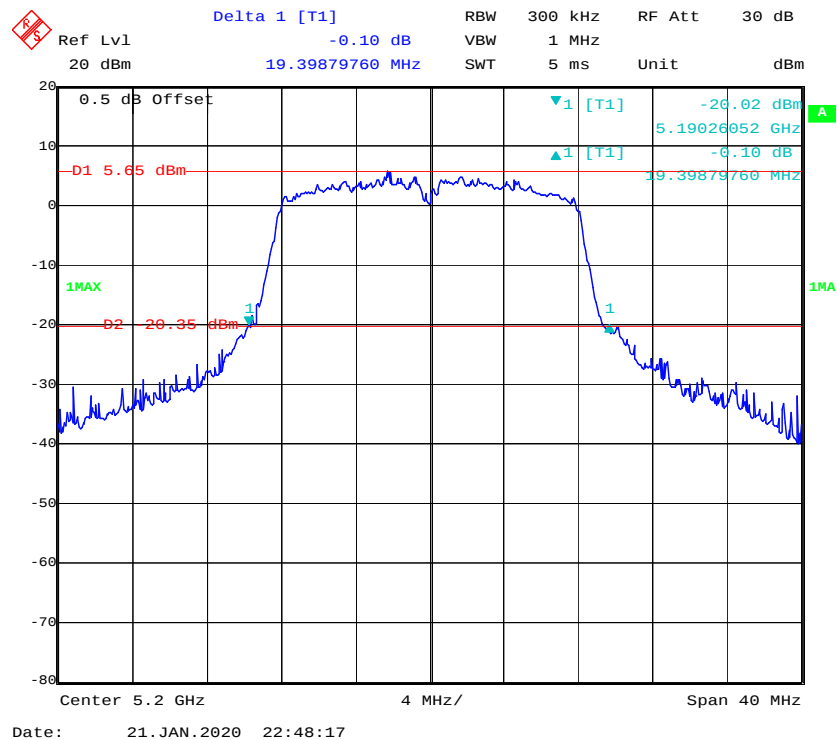


802.11n ht20 Middle Channel

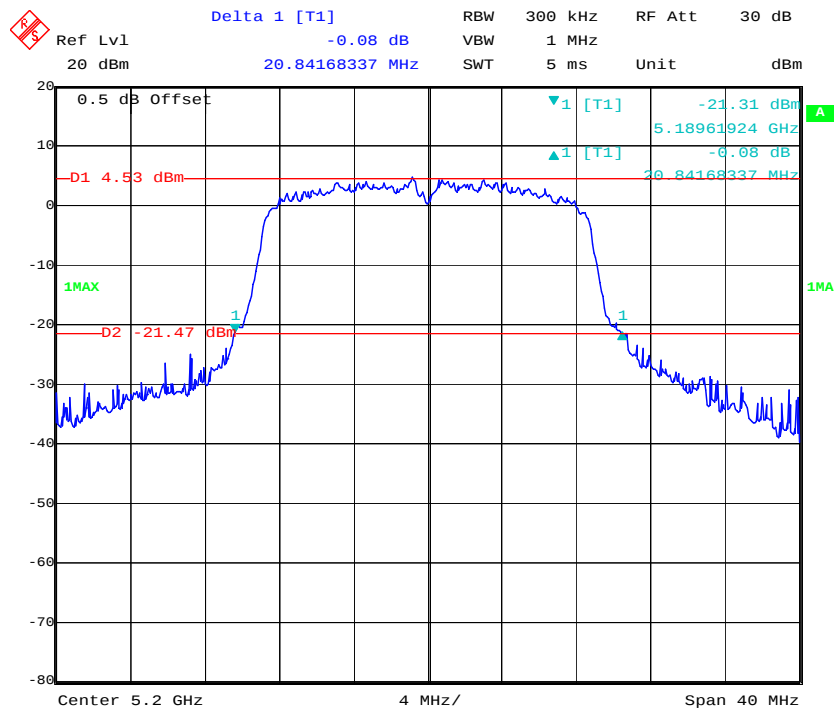


Date: 21.JAN.2020 22:55:35

802.11n ht20 High Channel

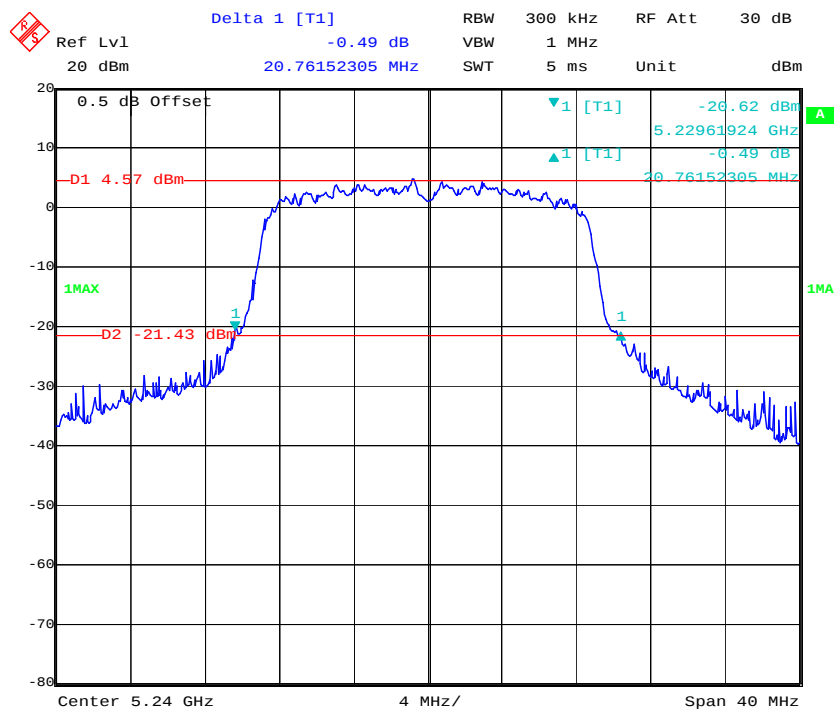


Date: 21.JAN.2020 23:00:17


802.11n ht40 Low Channel

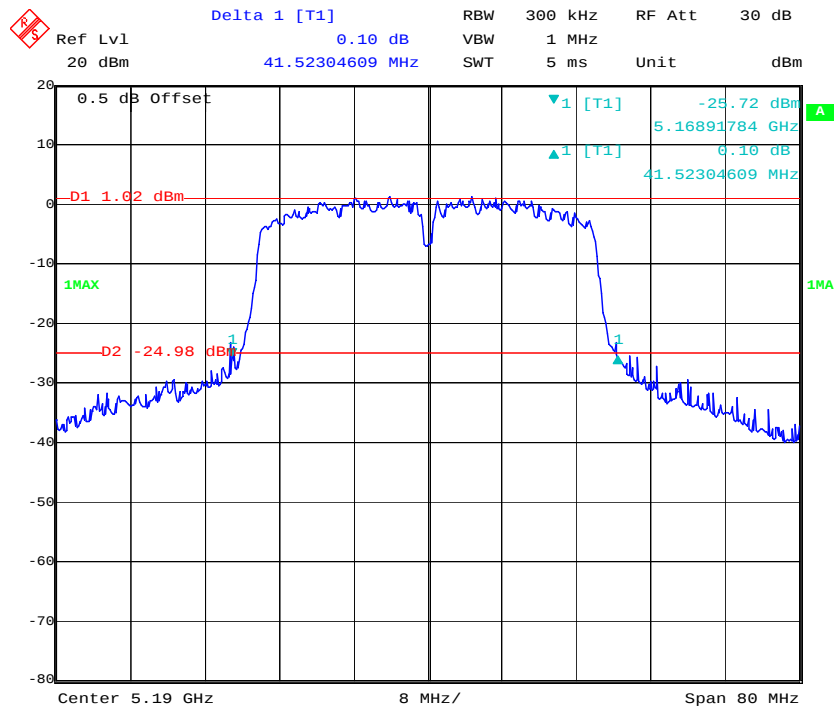

802.11n ht40 High Channel

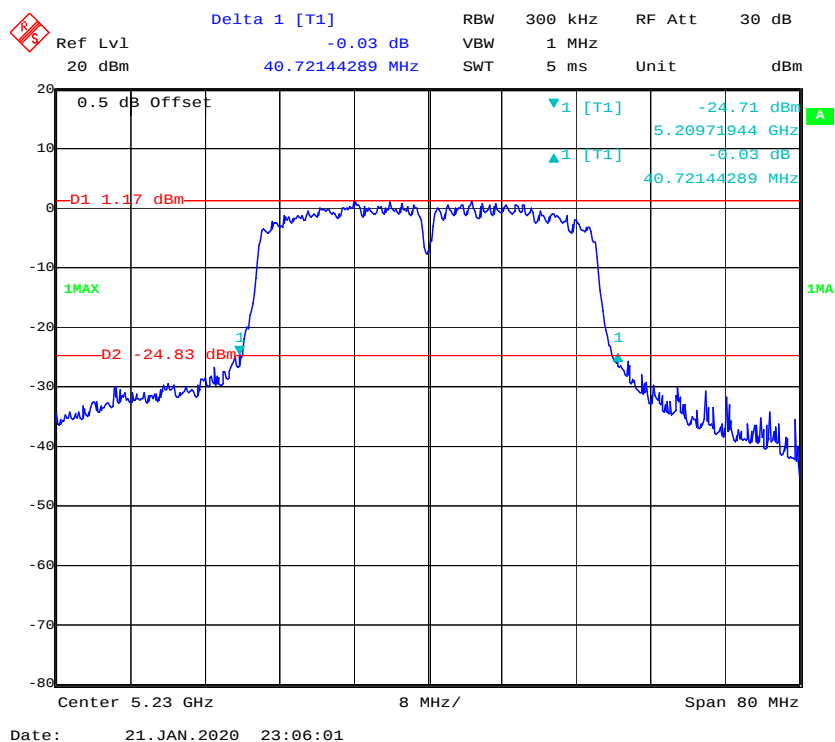


802.11ac ht80 Middle Channel

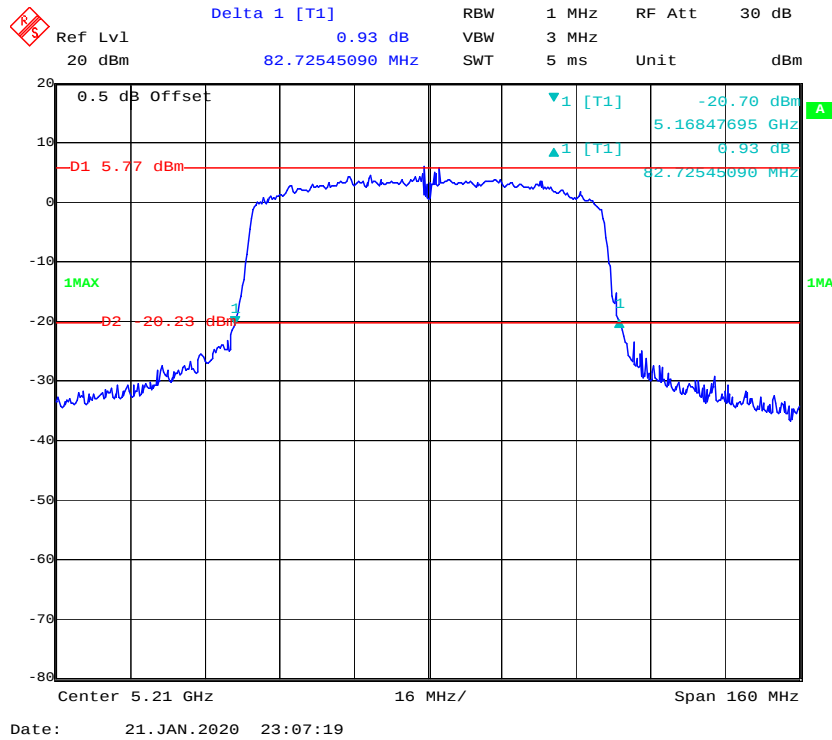


99% Occupied Bandwidth:


802.11a Low Channel

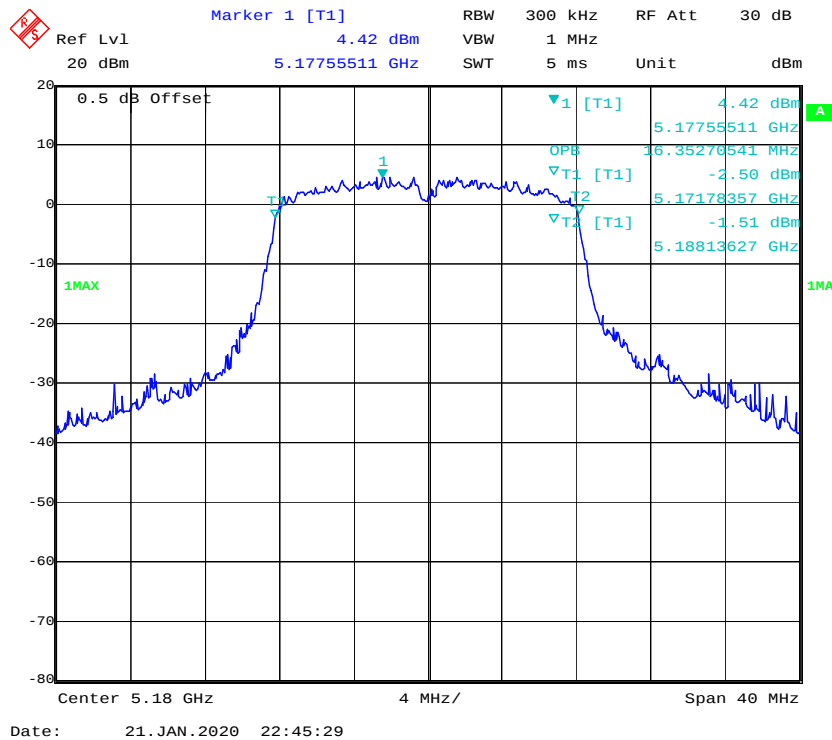


802.11a Middle Channel

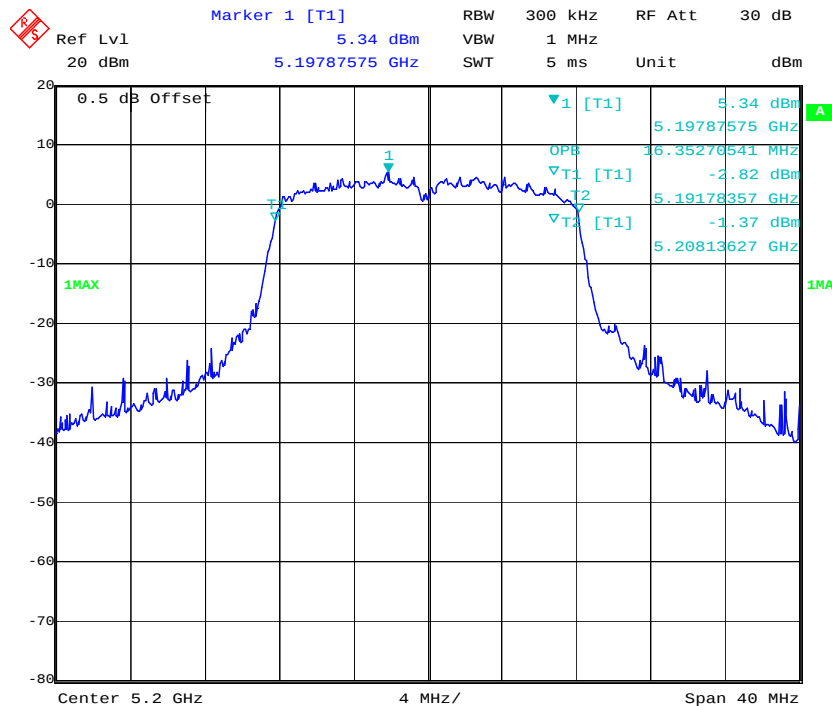


802.11a High Channel

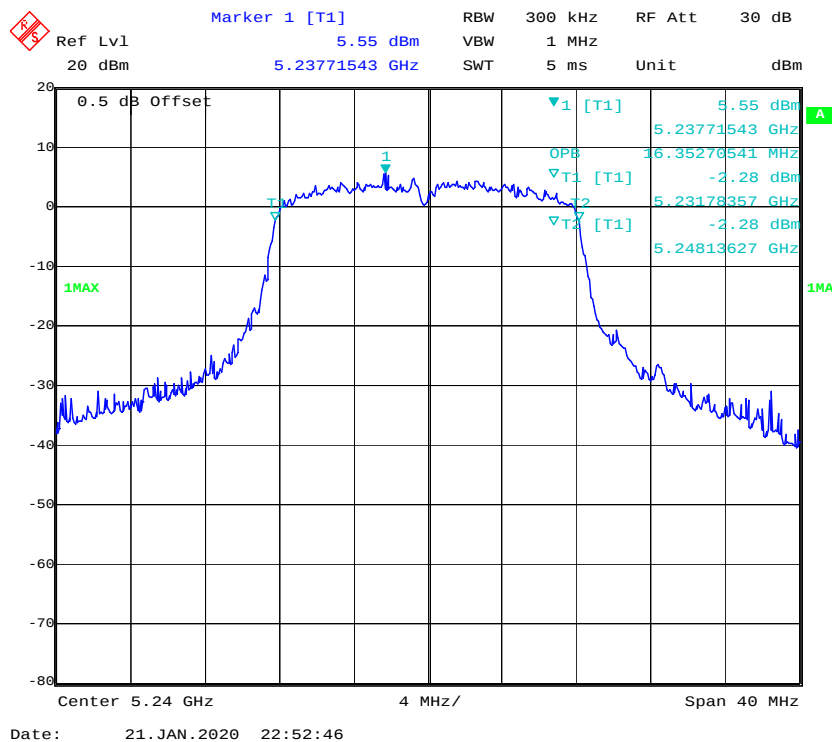


802.11n ht20 Low Channel

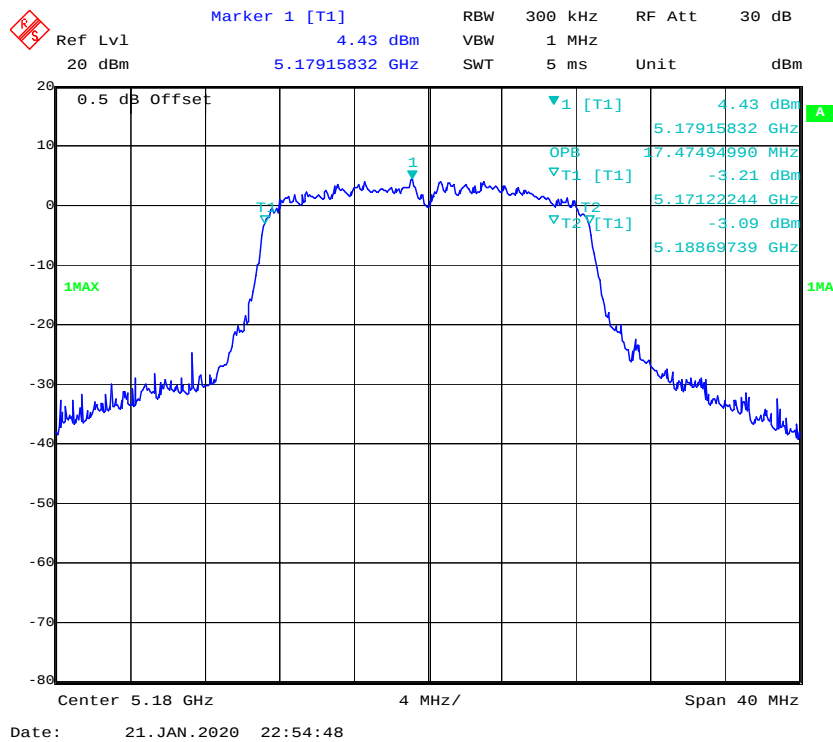


802.11n ht20 Middle Channel

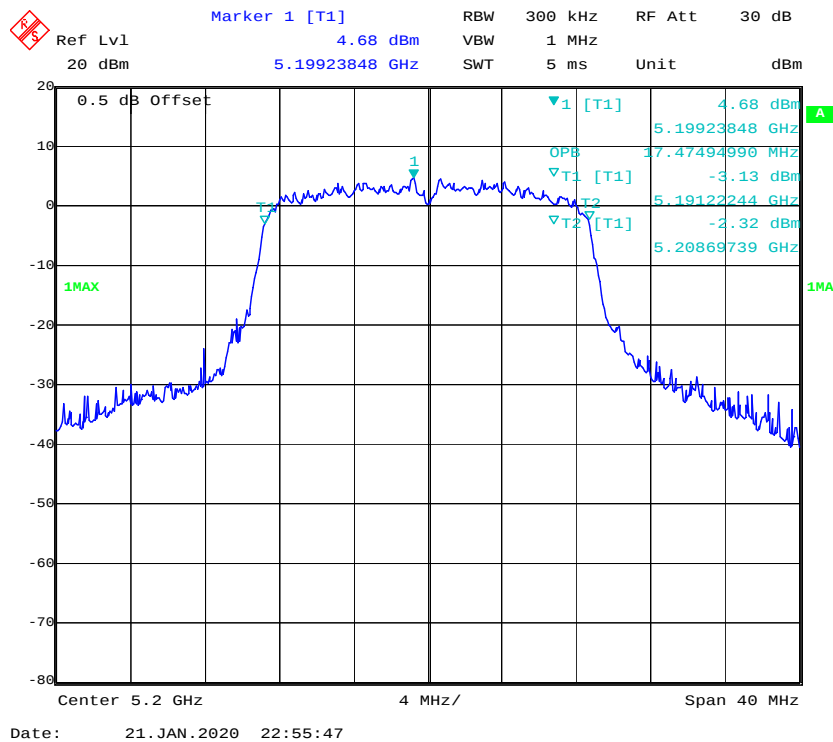


802.11n ht20 High Channel

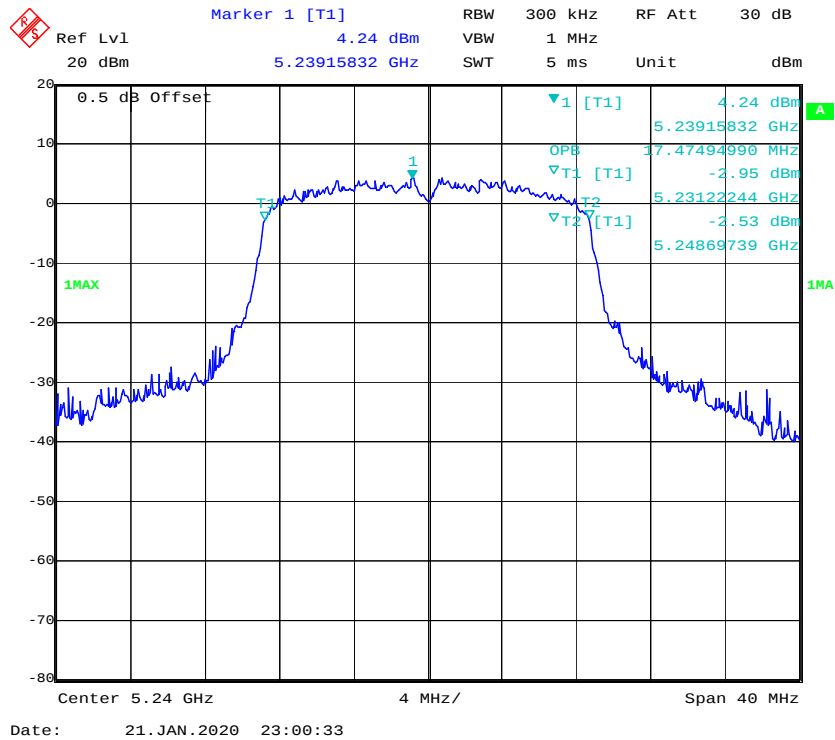


802.11n ht40 Low Channel

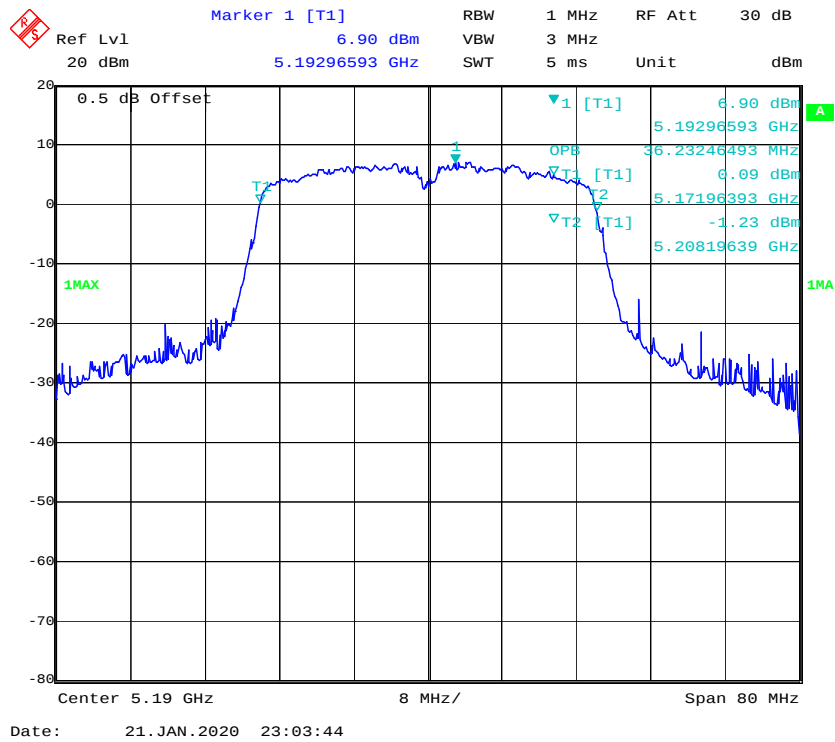

802.11n ht40 High Channel

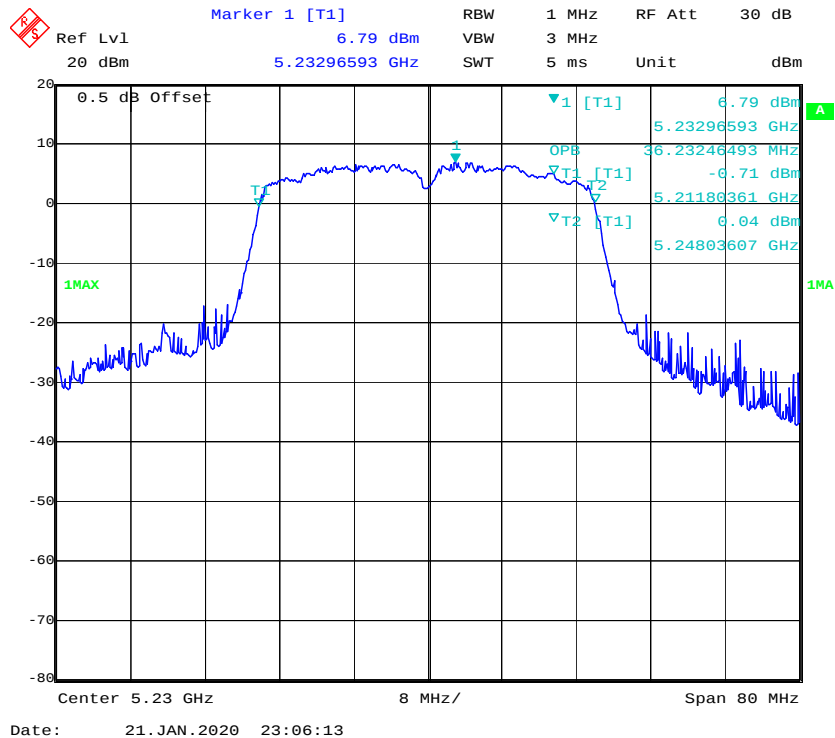


802.11ac ht80 Meddle Channel

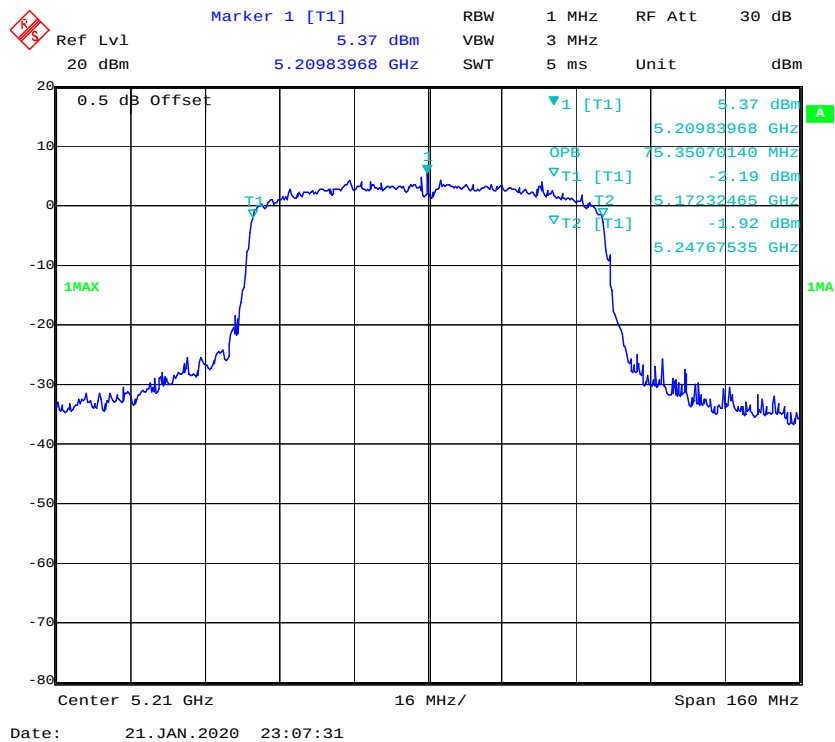


5725-5850MHz:
6dB Emission Bandwidth:


802.11a Low Channel

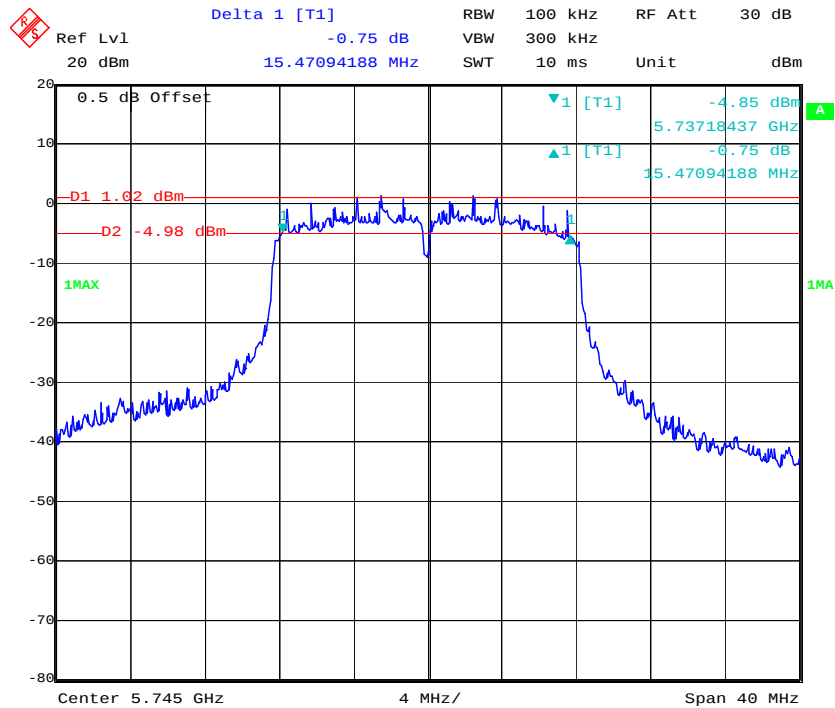

802.11a Middle Channel

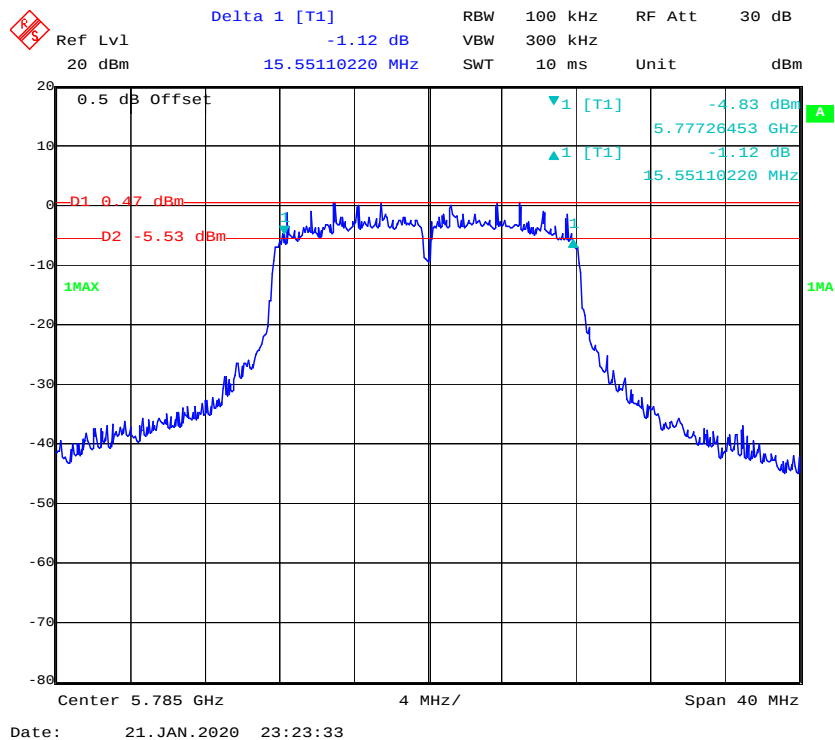


802.11a High Channel

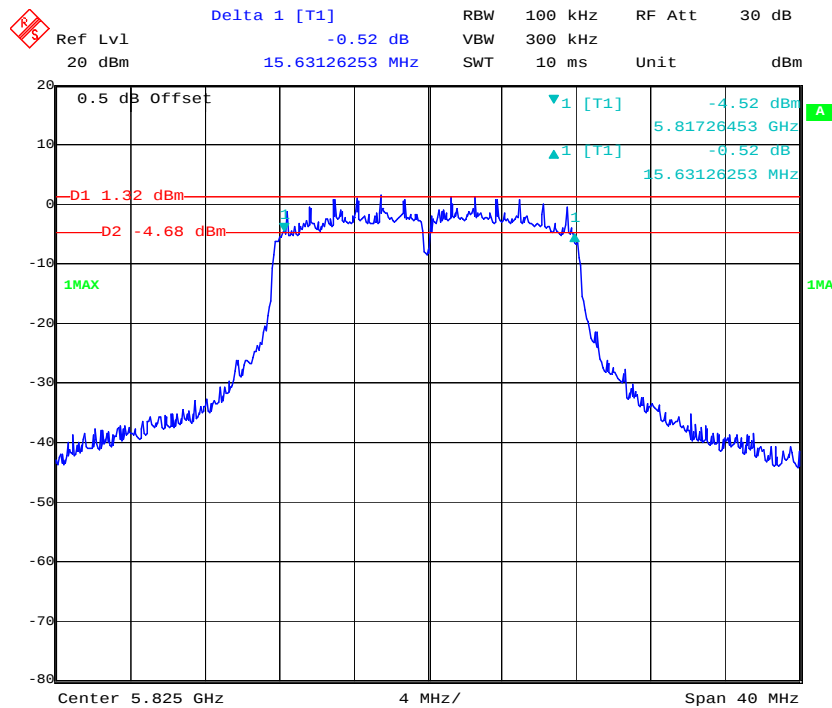

Date: 21. JAN. 2020 23:24:39

802.11n ht20 Low Channel

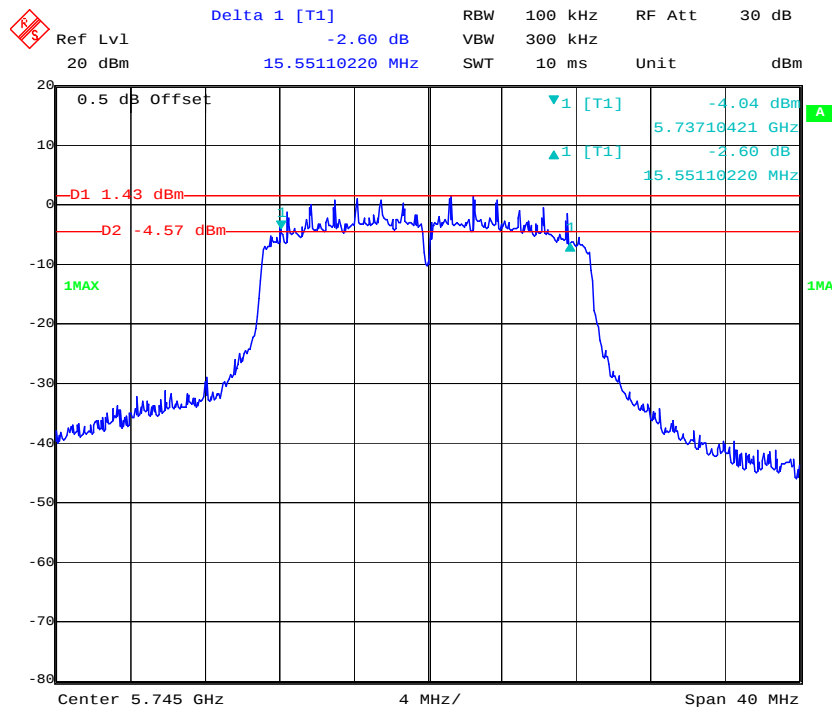

Date: 21. JAN. 2020 23:25:51

Ref Lvl 20 dBm
 Delta 1 [T1] -0.63 dB
 RBW 100 kHz
 VBW 300 kHz
 RF Att 30 dB
 20 dBm 15.63126253 MHz
 SWT 10 ms
 Unit dBm

0.5 dB Offset

D1 0.73 dBm
 D2 -5.27 dBm

1MAX

1 [T1] -5.30 dBm
 5.77716421 GHz
 -0.63 dB
 15.63126253 MHz

Center 5.785 GHz
 4 MHz/
 Span 40 MHz

Date: 21. JAN. 2020 23:27:07

Ref Lvl 20 dBm Delta 1 [T1] -0.54 dB RBW 100 kHz RF Att 30 dB

0.5 dB Offset 15.39078156 MHz SWT 10 ms Unit dBm

0.5 dB Offset

D1 1.18 dBm

D2 -4.82 dBm

1MAX

1 [T1] -5.06 dBm

1 [T1] -0.54 dBm

5.81734469 GHz

15.39078156 MHz

Center 5.825 GHz 4 MHz/ Span 40 MHz

Date: 21. JAN. 2020 23:28:52

Delta 1 [T1] 2.36 dB 35.43086172 MHz

Ref Lvl 20 dBm RBW 100 kHz RF Att 30 dB VBW 300 kHz Unit dBm

0.5 dB Offset

D1 -2.2 dBm D2 -8.2 dBm


1MAX

1 [T1] 1 [T1]

5.73712425 GHz -5.19 dBm 2.36 dB 35.43086172 MHz


Center 5.755 GHz 8 MHz/ Span 80 MHz

802.11n ht40 High Channel

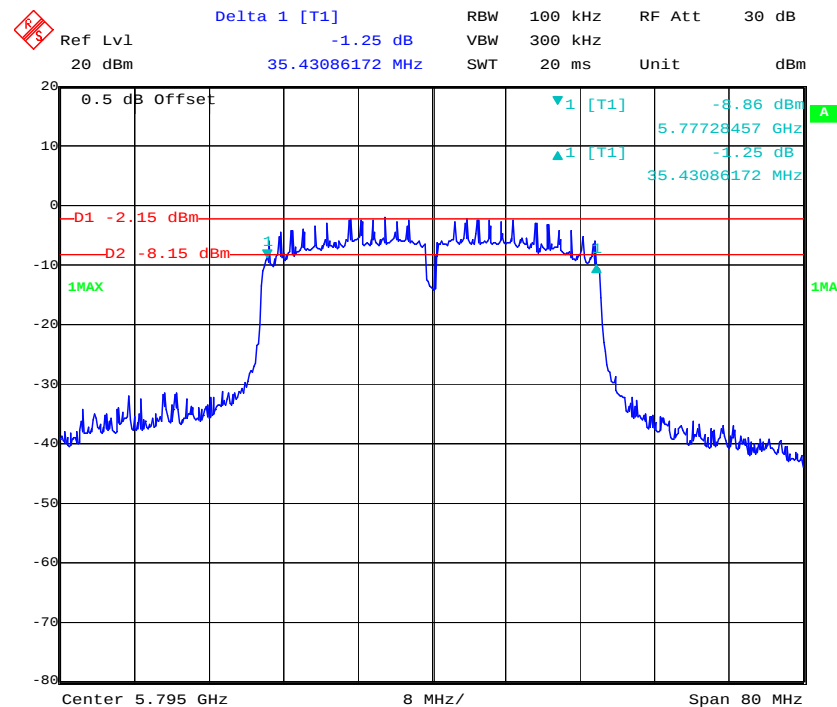


Page 52 of 83

802.11ac ht80 Meddle Channel

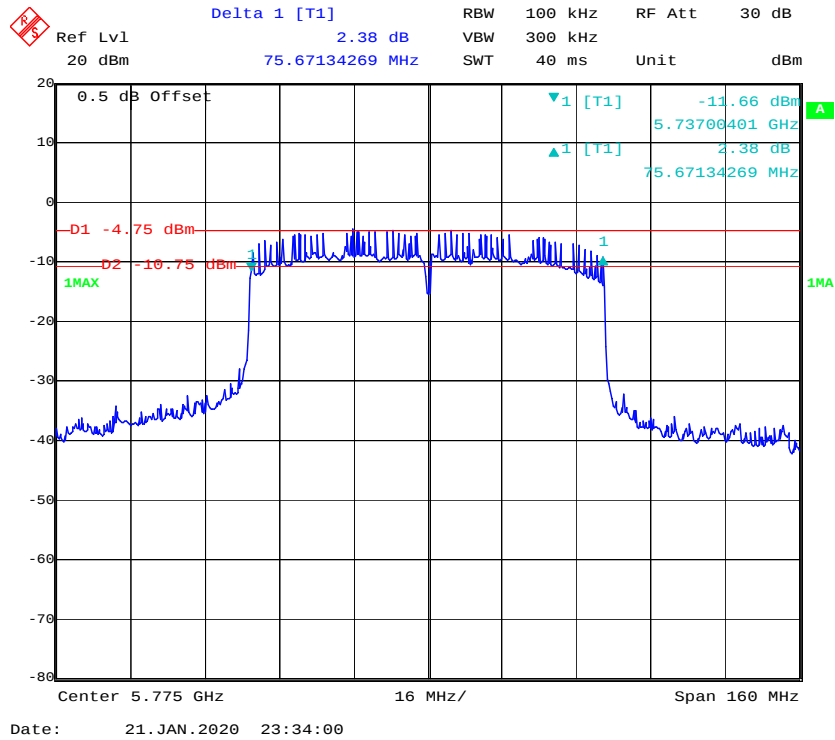


99% Occupied Bandwidth:

802.11a Low Channel

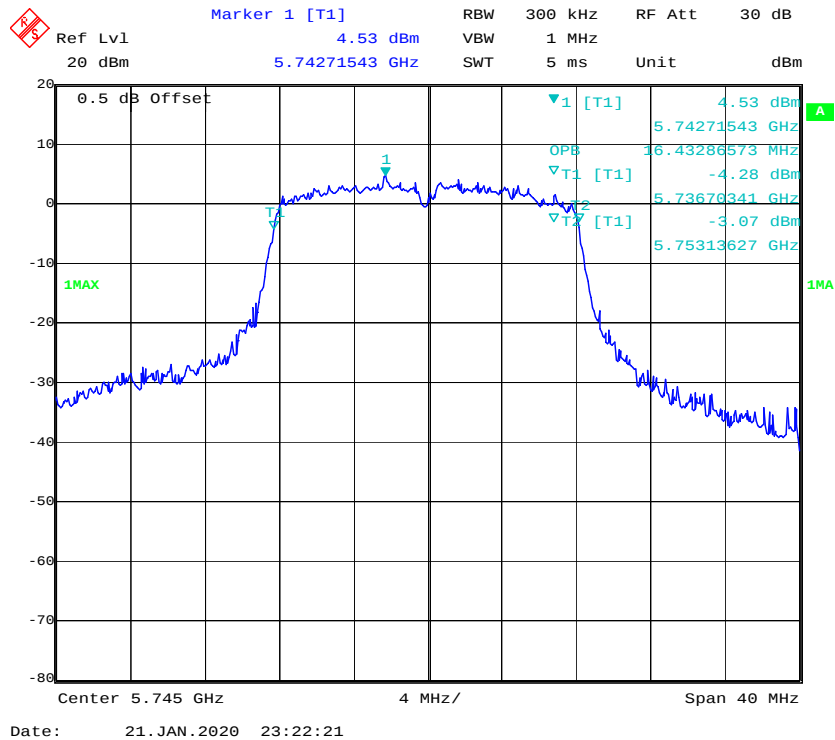


802.11a Middle Channel

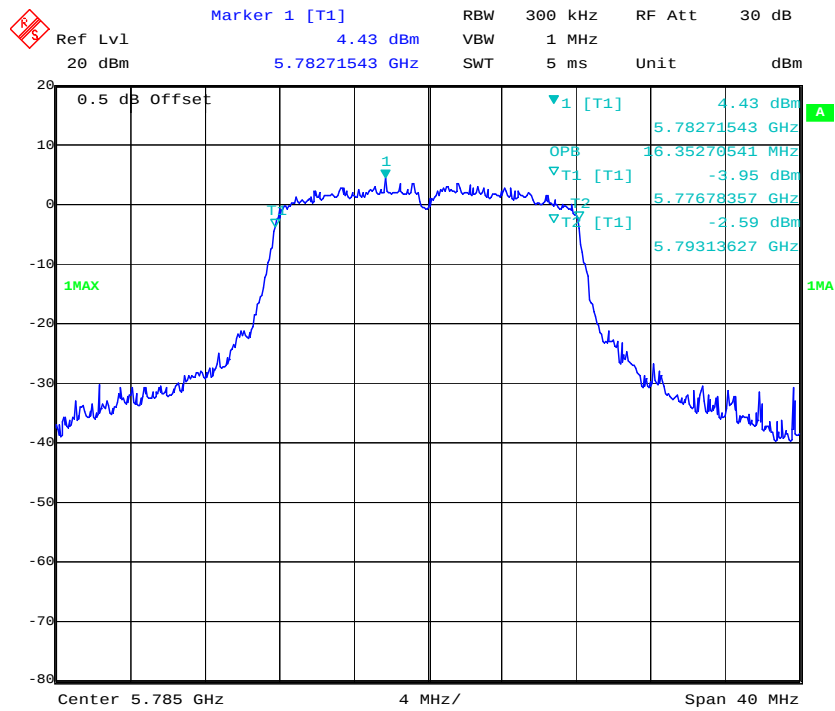

Date: 21.JAN.2020 23:23:45

802.11a High Channel

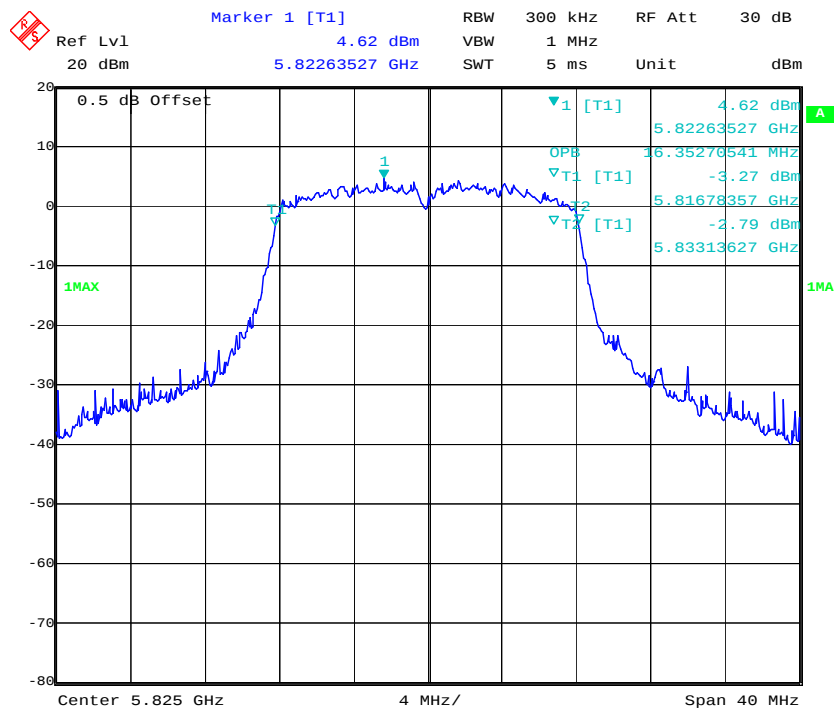

Date: 21.JAN.2020 23:24:51

Ref Lvl 20 dBm

Marker 1 [T1] 3.69 dBm

5.74415832 GHz

RBW 300 kHz

VBW 1 MHz

SWT 5 ms

RF Att Unit dBm

0.5 dB Offset

1 [T1] 3.69 dBm

5.74415832 GHz

OPB 17.55511022 MHz

T1 [T1] -4.33 dBm

5.73614228 GHz

T2 [T1] -4.13 dBm

5.75369739 GHz

1MAX

Center 5.745 GHz

4 MHz/

Span 40 MHz

Date: 21. JAN. 2020 23:26:03

Marker 1 [T1] 3.10 dBm

Ref Lvl 0.5 dB Offset

20 dBm 5.78415832 GHz

RBW 300 kHz RF Att 30 dB

VBW 1 MHz

SWT 5 ms Unit dBm

0.5 dB Offset

1 [T1] 3.10 dBm

OPB 5.78415832 GHz

T1 [T1] -4.04 dBm

T2 [T1] -4.05 dBm

5.77622244 GHz

5.79369739 GHz

1MAX


Center 5.785 GHz

4 MHz/


Span 40 MHz

Date: 21. JAN. 2020 23:27:19


802.11n ht20 High Channel

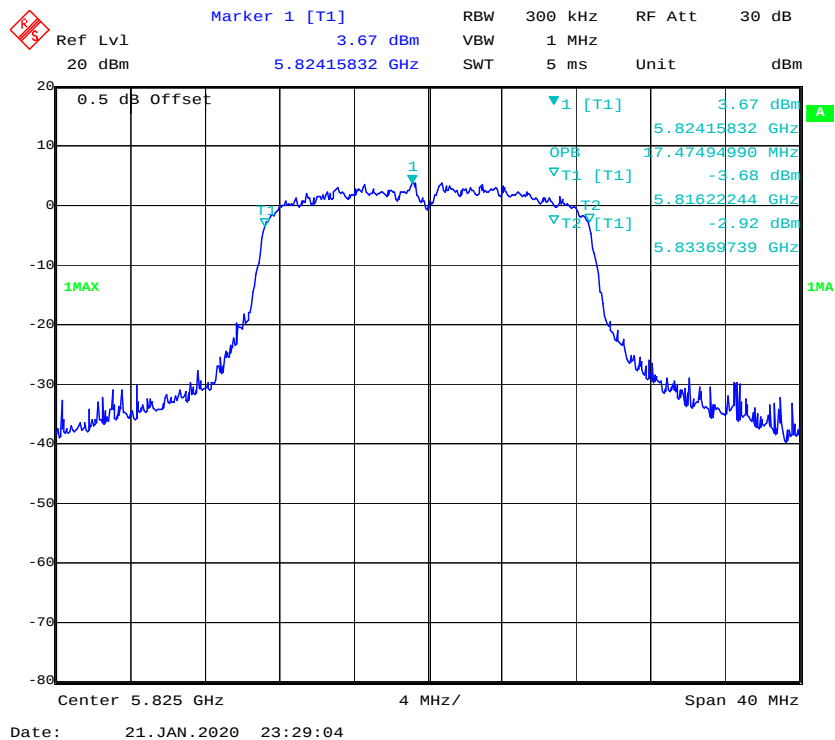


802.11n ht40 Low Channel

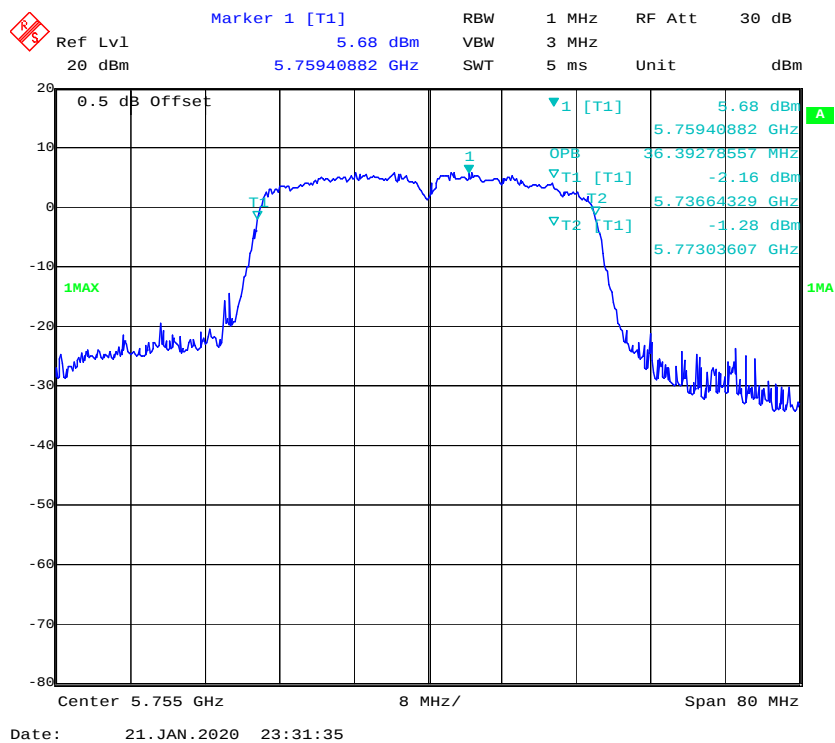

802.11n ht40 High Channel

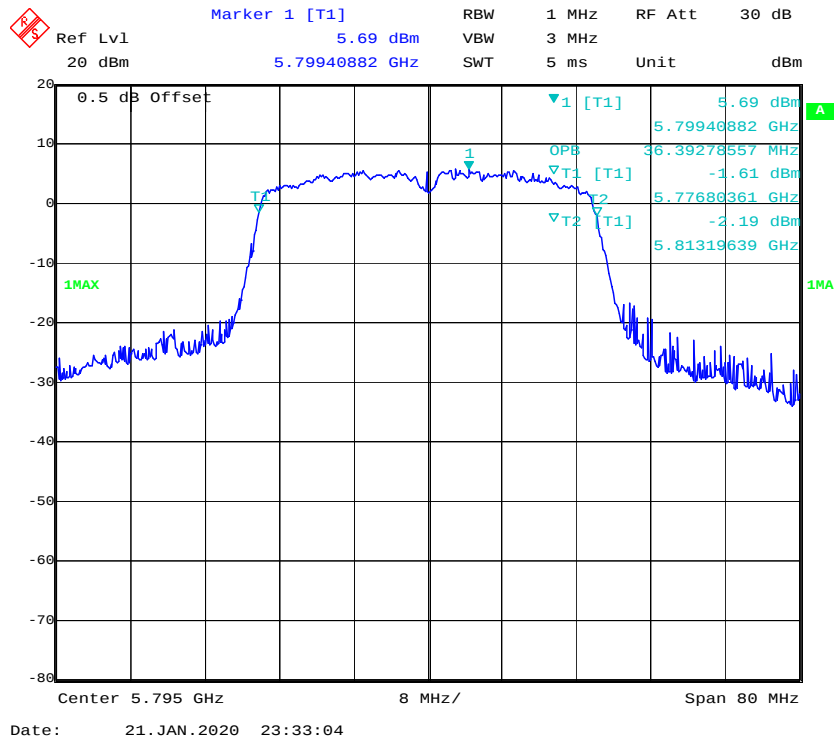

802.11ac ht80 Meddle Channel

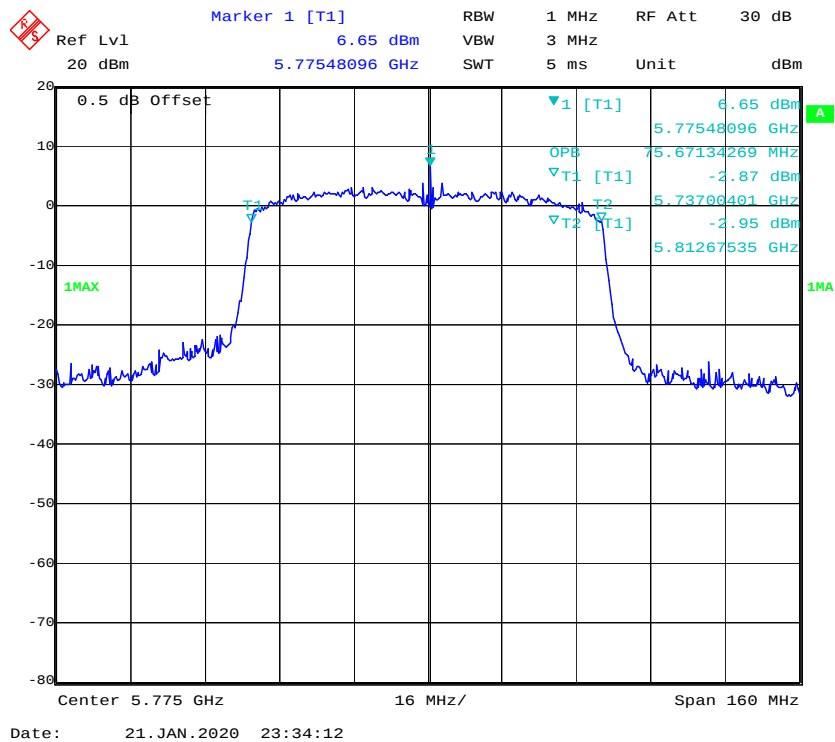

FCC §15.407(a) & RSS-247 CLAUSE 6.2 –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

According to RSS-247 Clause 6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint³ systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
E-Microwave	Coaxial Attenuators	EMCA10-5RN-6	OE01203239	Each time	N/A
Agilent	USB Wideband Power Sensor	U2021XA	MY5425009	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	23.1°C
Relative Humidity:	50 %
ATM Pressure:	102.1kPa
Tester:	Severn Zhu
Test Date:	2020-01-21

Test Mode: Transmitting

5150-5250 MHz:

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)				EIRP (dBm)	
		Chain 0	Chain 1	Total	FCC Limit	Result	RSS-247 Limit
802.11a	5180	12.75	13.02	15.90	24	18.4	22.14
	5200	12.97	13.24	16.12	24	18.62	22.14
	5240	12.89	13.15	16.03	24	18.53	22.14
802.11n ht20	5180	12.62	12.95	15.80	24	18.3	22.42
	5200	12.71	13.04	15.89	24	18.39	22.42
	5240	12.69	12.91	15.81	24	18.31	22.42
802.11n ht40	5190	12.53	12.54	15.55	24	18.05	23
	5230	12.66	12.97	15.83	24	18.33	23
802.11 ac80	5210	12.73	13.02	15.89	24	18.39	23

5725-5850MHz:

Mode	Frequency (MHz)	Conducted Average Output Power (dBm)				EIRP (dBm)	
		Chain 0	Chain 1	Total	FCC/RSS-247 Limit	Result	RSS-247 Limit
802.11a	5745	12.51	12.84	15.69	30	18.19	36
	5785	12.88	13.05	15.98	30	18.48	36
	5825	12.95	13.17	16.07	30	18.57	36
802.11n ht20	5745	12.51	12.83	15.68	30	18.18	36
	5785	12.79	13.01	15.91	30	18.41	36
	5825	12.81	13.09	15.96	30	18.46	36
802.11n ht40	5755	12.53	12.81	15.68	30	18.18	36
	5795	12.65	12.93	15.80	30	18.3	36
802.11 ac80	5775	12.92	13.15	16.05	30	18.55	36

Note: the duty cycle factor have been calculated into the Conducted power result. Antenna gain is 2.5dBi @ 5150-5850MHz.

FCC §15.407(a)& RSS-247 CLAUSE 6.2- POWER SPECTRAL DENSITY

Applicable Standard

According to FCC §15.407(a)

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

According to RSS-247 Clause 6.2:

Frequency band 5150-5250 MHz

6.2.1.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less stringent. Devices shall implement transmitter power control (TPC) in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

For other devices, the maximum e.i.r.p. shall not exceed 200 mW or $10 + 10 \log_{10}B$, dBm, whichever power is less. B is the 99% emission bandwidth in megahertz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

Frequency band 5250-5350 MHz

6.2.2.1 Power limits

For OEM devices installed in vehicles, the maximum e.i.r.p. shall not exceed 30 mW or $1.76 + 10 \log_{10}B$, dBm, whichever is less. Devices shall implement TPC in order to have the capability to operate at least 3 dB below the maximum permitted e.i.r.p. of 30 mW.

Devices, other than devices installed in vehicles, shall comply with the following:

- a) The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10}B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band;
- b) The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10}B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency bands 5470-5600 MHz and 5650-5725 MHz

6.2.3.1 Power limits

The maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz. Note that devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

Frequency band 5725-5850 MHz

6.2.4.1 Power limits

For equipment operating in the band 5725-5850 MHz, the minimum 6 dB bandwidth shall be at least 500 kHz.

The maximum conducted output power shall not exceed 1 W. The output power spectral density shall not exceed 30 dBm in any 500 kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the output power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed point-to-point operations exclude the use of point-to-multipoint³ systems, omnidirectional applications and multiple collocated transmitters transmitting the same information.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Signal Analyzer	FSIQ26	831929/005	2019-09-12	2020-09-12
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	23.1°C
Relative Humidity:	50 %
ATM Pressure:	102.1kPa
Tester:	Severn Zhu
Test Date:	2020-01-21

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250 MHz:

Mode	Frequency (MHz)	Maximum Power Spectral Density (dBm/MHz)				EIRP Power Spectral Density (dBm/MHz)	
		Chain 0	Chain 1	Total	FCC Limit	Result	RSS-247 Limit
802.11a	5180	2.87	3.77	6.35	11	8.85	10
	5200	3.09	4.31	6.75	11	9.25	10
	5240	2.95	4.32	6.70	11	9.2	10
802.11n ht20	5180	2.62	2.89	5.77	11	8.27	10
	5200	3.11	3.28	6.21	11	8.71	10
	5240	2.93	3.05	6.00	11	8.5	10
802.11n ht40	5190	-0.21	-0.20	2.81	11	5.31	10
	5230	-0.41	-0.04	2.79	11	5.29	10
802.11ac vht80	5210	-3.06	-3.10	-0.07	11	2.43	10

5725-5850MHz:

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Maximum Power Spectral Density (dBm/500kHz)			
		Chain 0	Chain 1	Chain 0	Chain 1	Total	Limit
802.11a	5745	0.26	0.67	2.48	2.89	5.70	30
	5785	0.76	0.62	2.98	2.84	5.92	30
	5825	0.11	0.51	2.33	2.73	5.54	30
802.11n ht20	5745	0.40	0.44	2.62	2.66	5.65	30
	5785	0.62	0.42	2.84	2.64	5.75	30
	5825	1.08	0.55	3.3	2.77	6.05	30
802.11n ht40	5755	-3.19	-2.97	-0.97	-0.75	2.15	30
	5795	-2.82	-2.79	-0.6	-0.57	2.43	30
802.11ac vht80	5775	-5.34	-5.05	-3.12	-2.83	0.04	30

Note:

The maximum antenna gain is 2.5dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:


$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 2.5\text{dBi} + 10 \cdot \log(2/1) = 5.5\text{dBi}$$

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


5150-5250MHz
Chain 0:

802.11a Low Channel

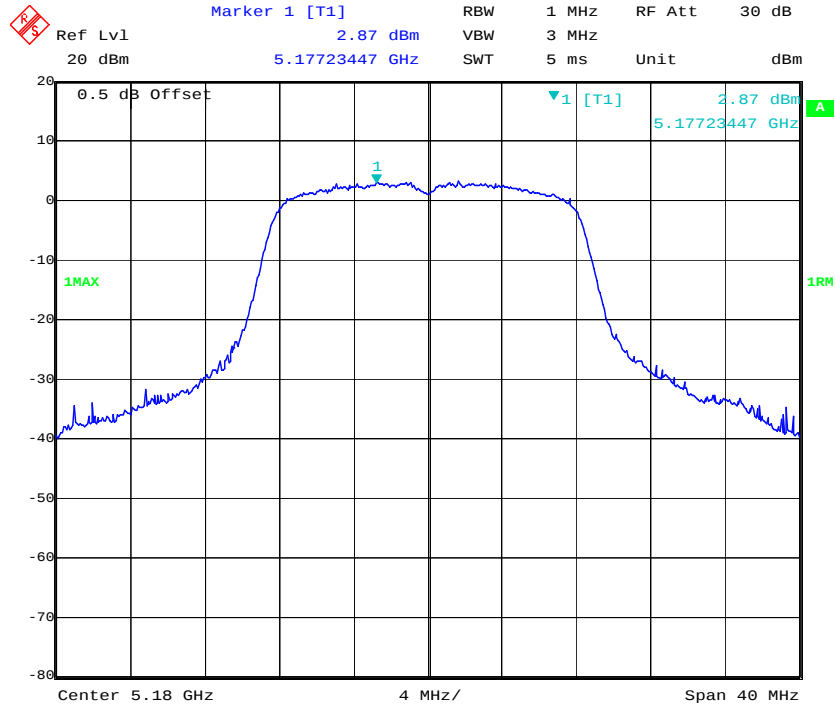


Date: 21.JAN.2020 22:45:41

802.11a Middle Channel

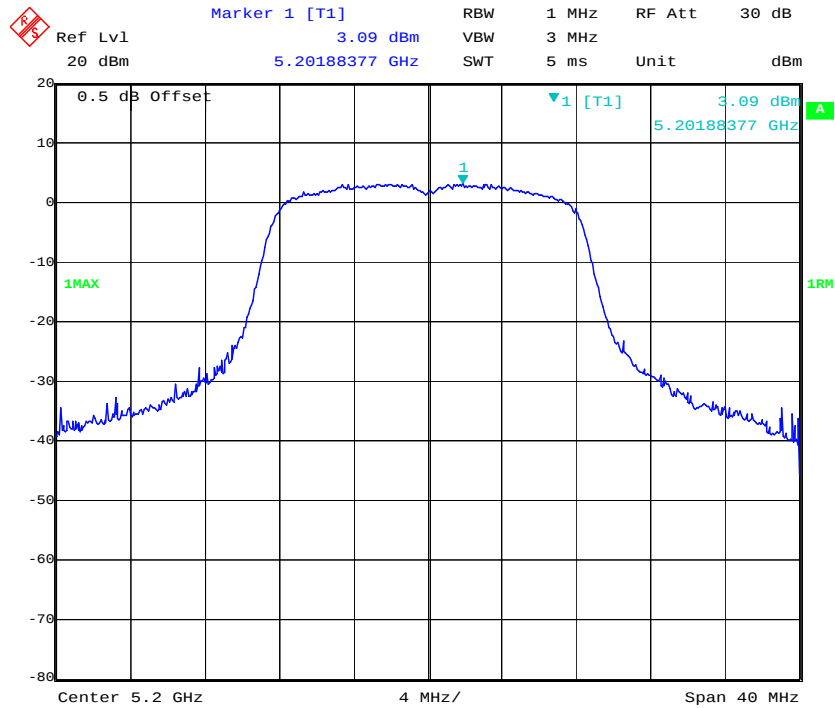


Date: 21.JAN.2020 22:53:42

802.11a High Channel

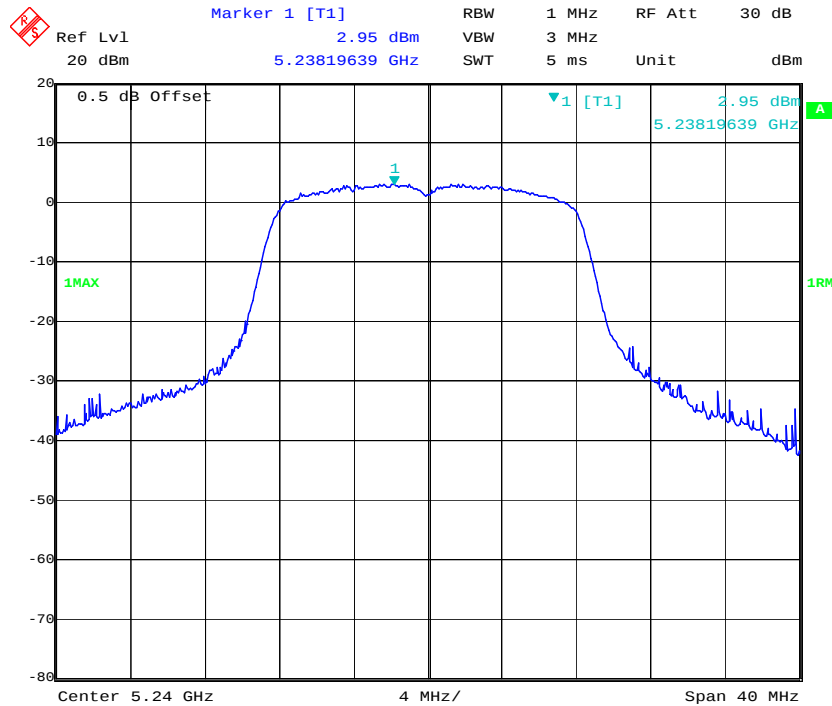


Date: 21. JAN. 2020 22:52:57

802.11n ht20 Low Channel

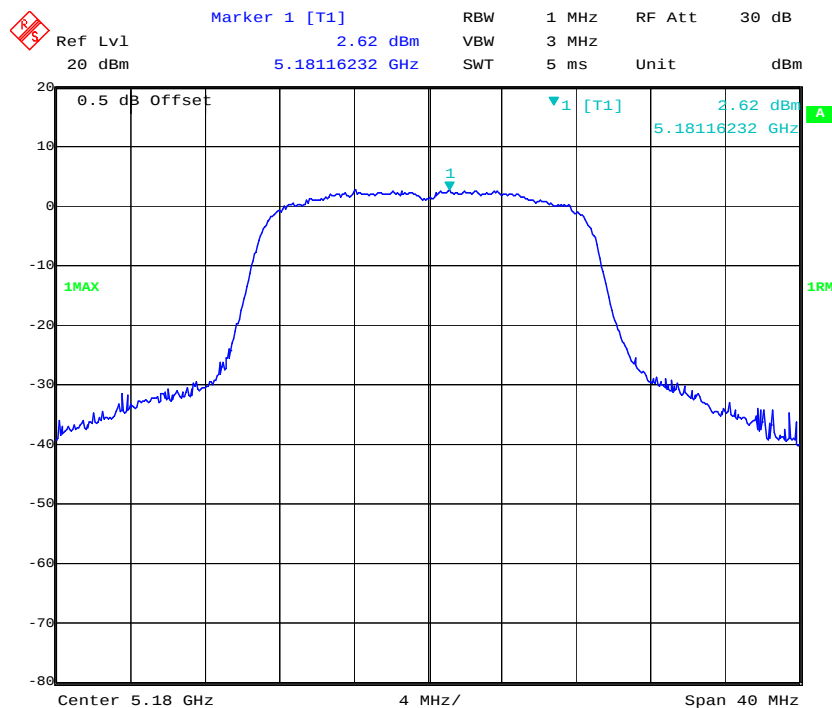


Date: 21. JAN. 2020 22:54:59


802.11n ht20 Middle Channel

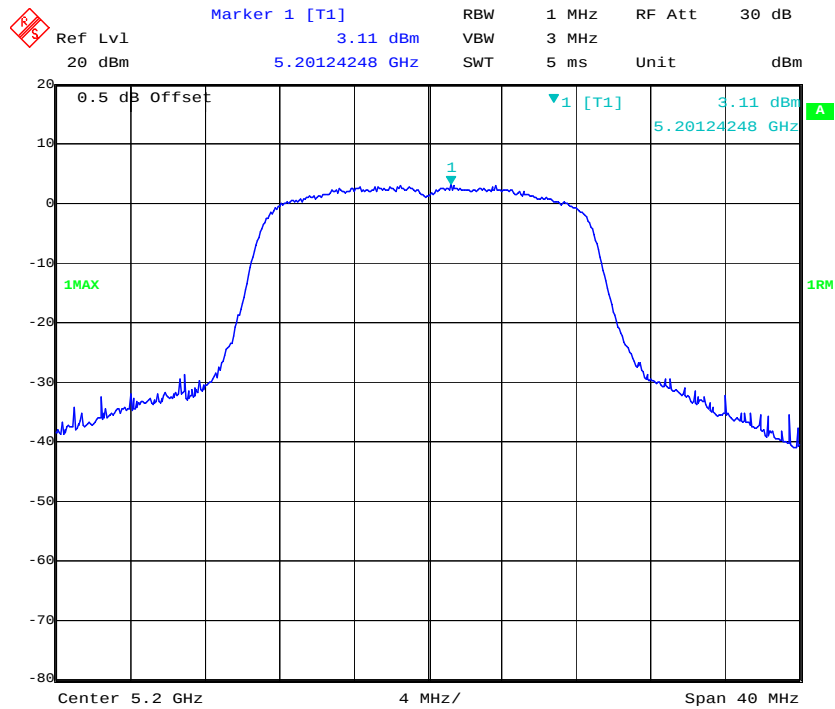

802.11n ht20 High Channel

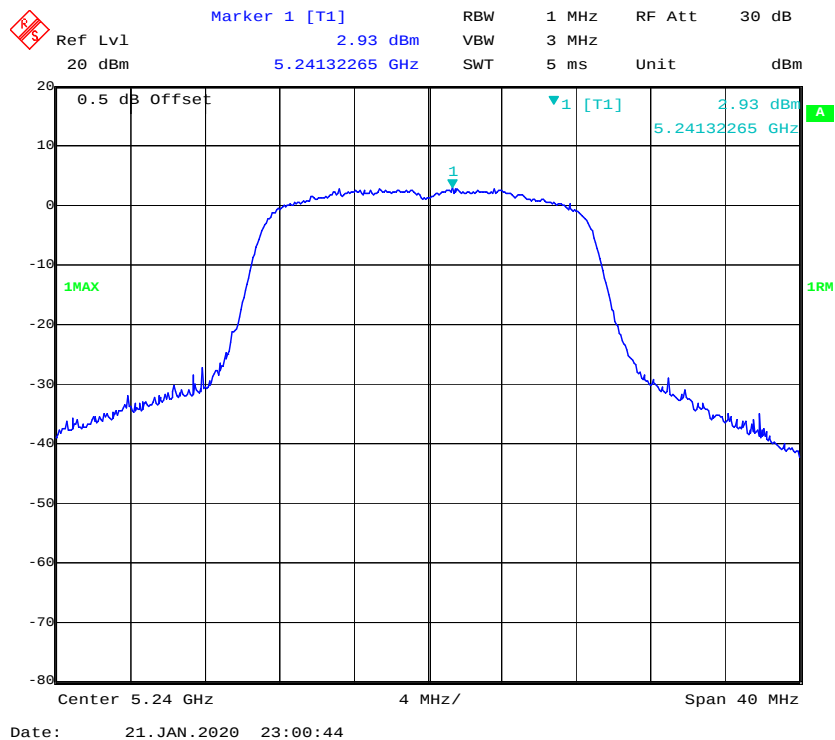


802.11n ht40 Low Channel

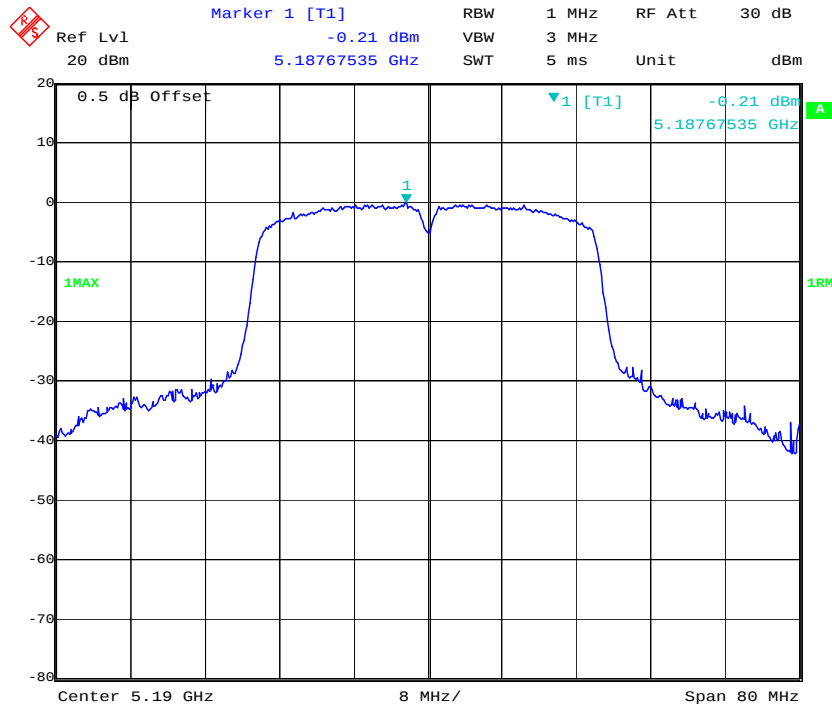


Date: 21. JAN. 2020 23:03:58

802.11n ht40 High Channel

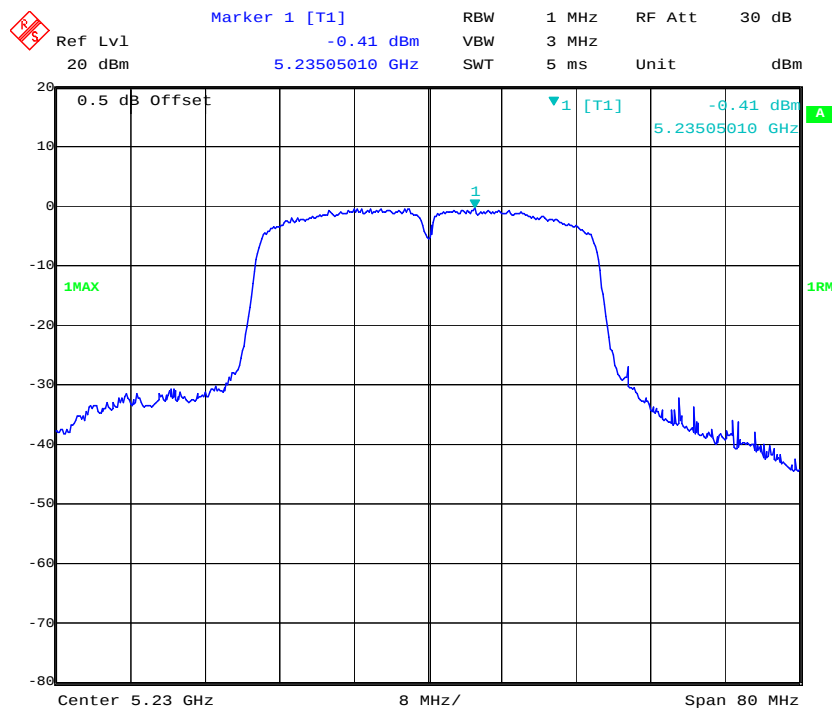

Date: 21. JAN. 2020 23:06:24


802.11ac vht80 Middle Channel

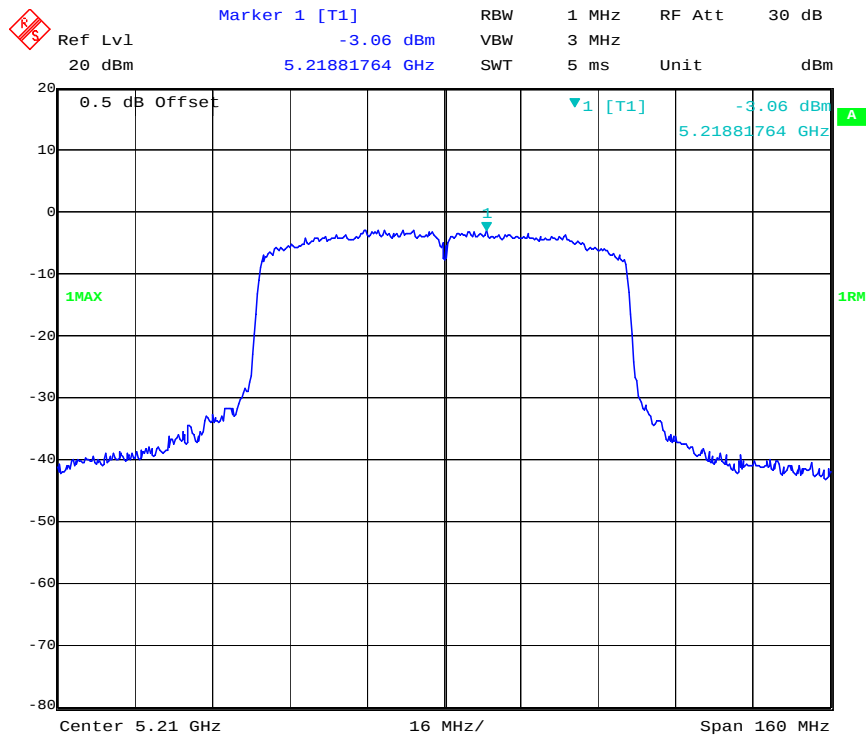

Date: 21.JAN.2020 23:07:42


Chain1:

802.11a Low Channel

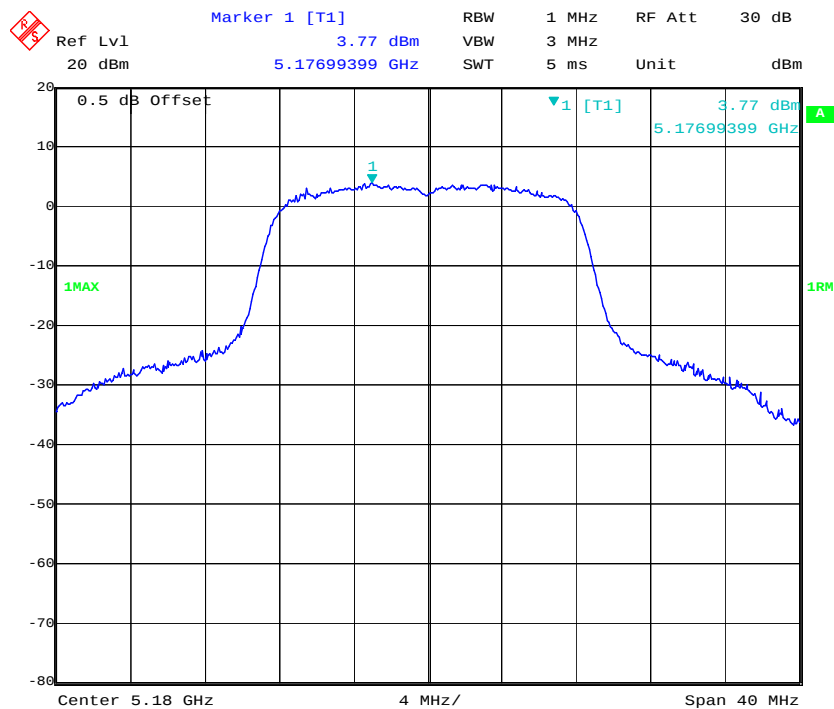


Date: 21.JAN.2020 23:10:20


802.11a Middle Channel

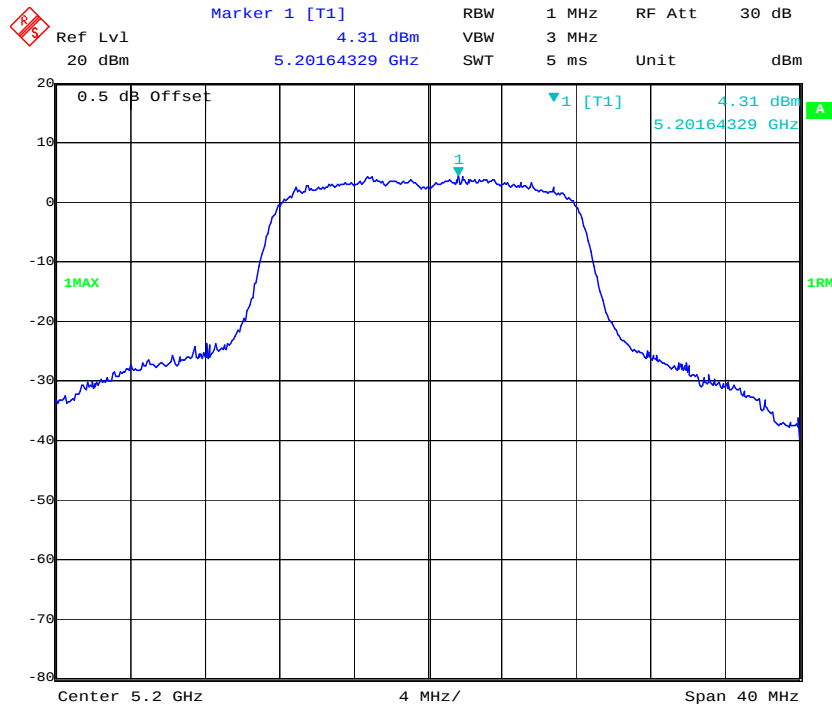


802.11a High Channel

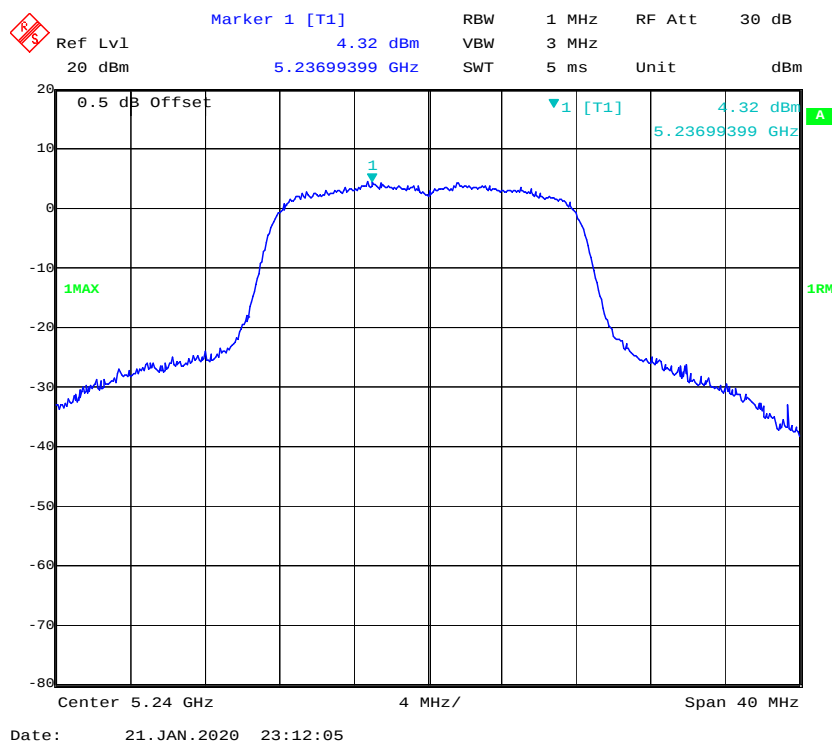


802.11n ht20 Low Channel

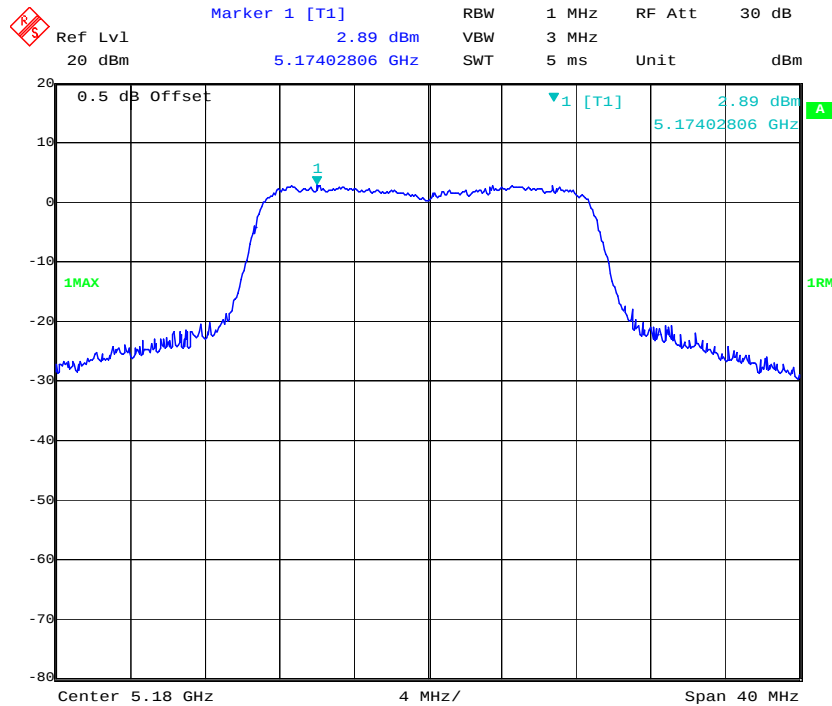

802.11n ht20 Middle Channel

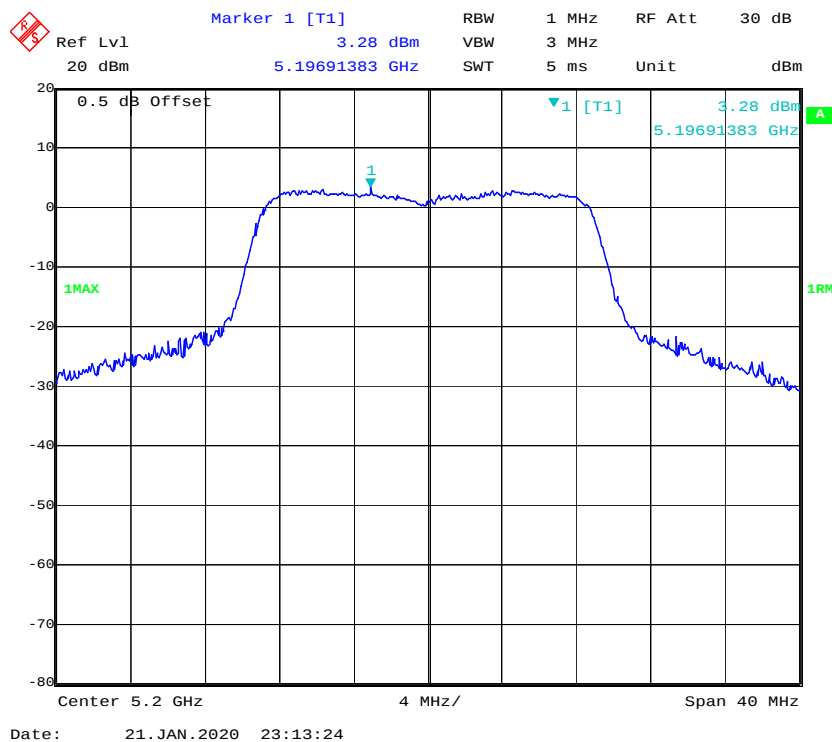


802.11n ht20 High Channel

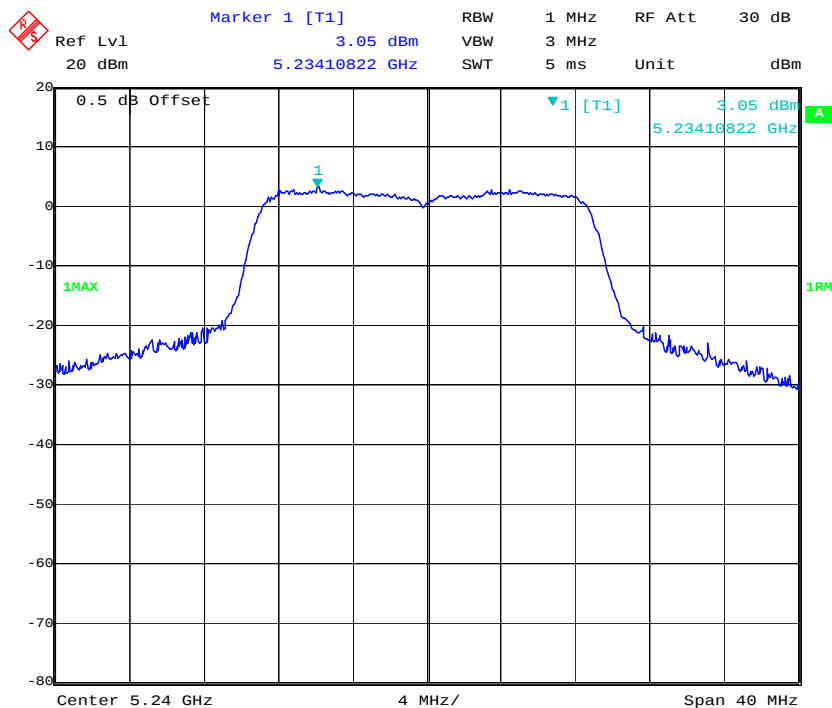


Date: 21.JAN.2020 23:13:51

802.11n ht40 Low Channel

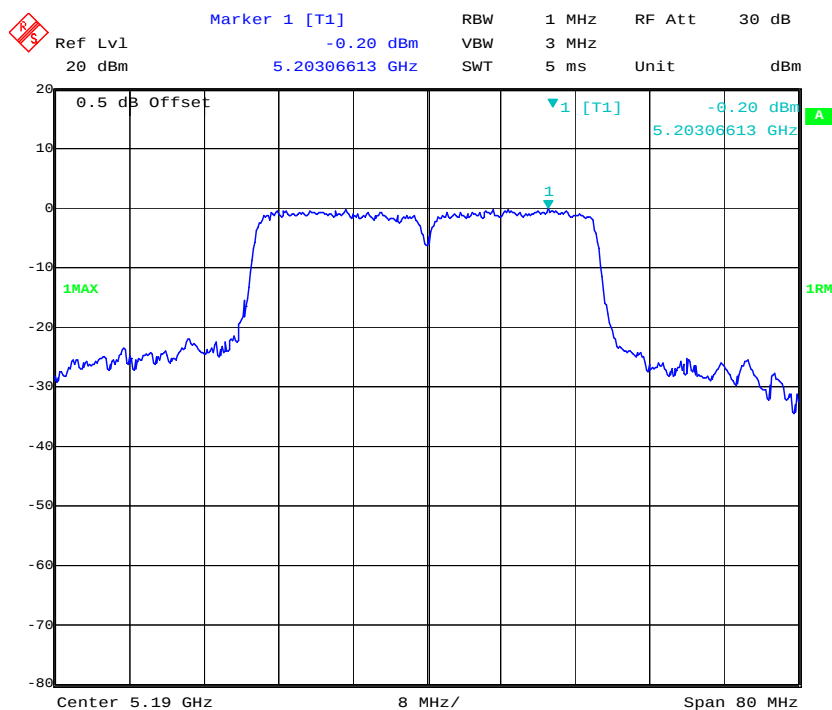


Date: 21.JAN.2020 23:14:31

802.11n ht40 High Channel

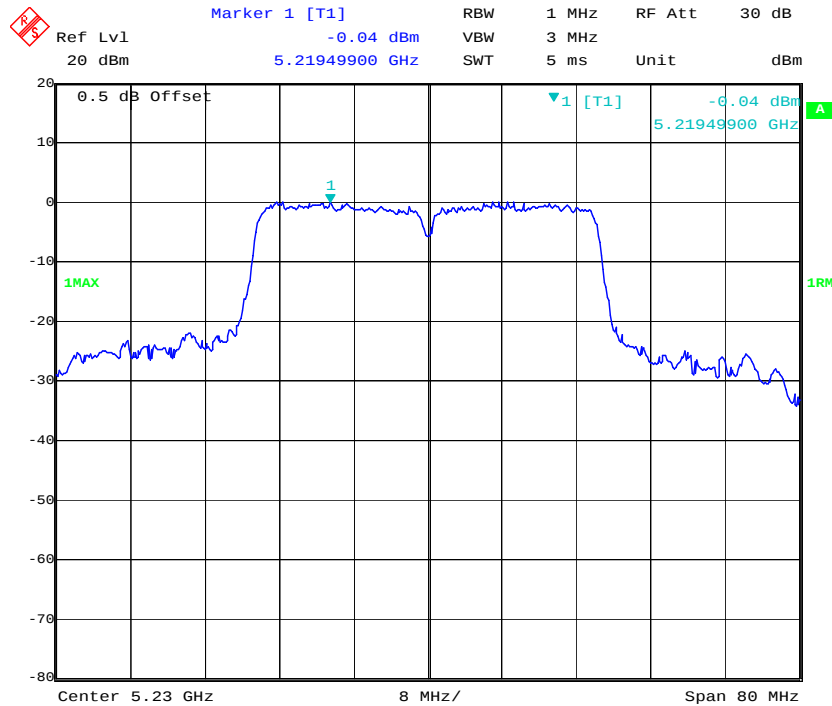


802.11ac vht80

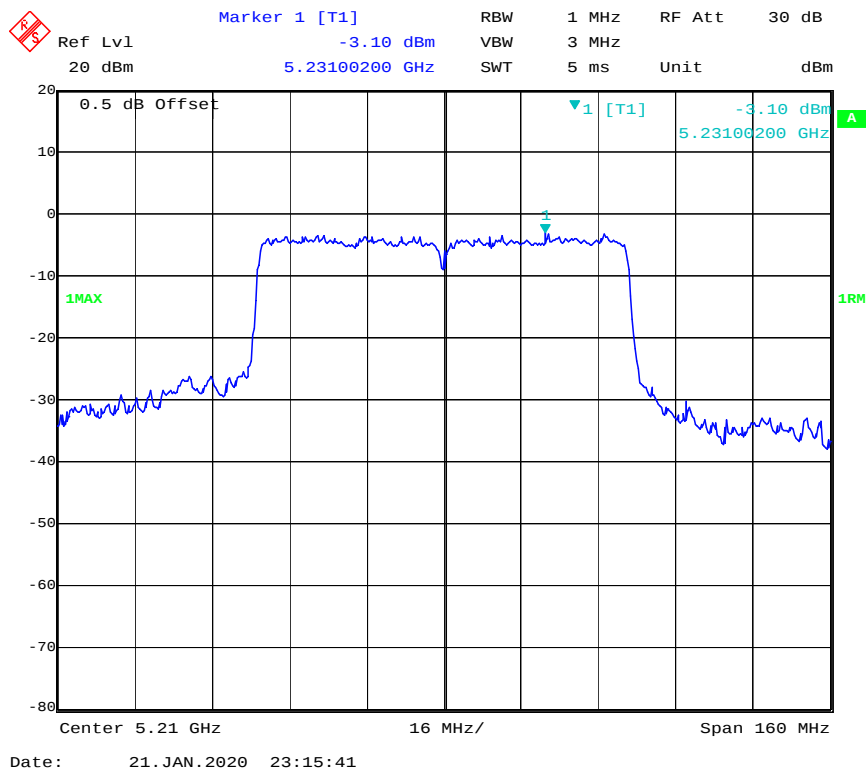


5725-5850MHz
Chain 0:

802.11a Low Channel

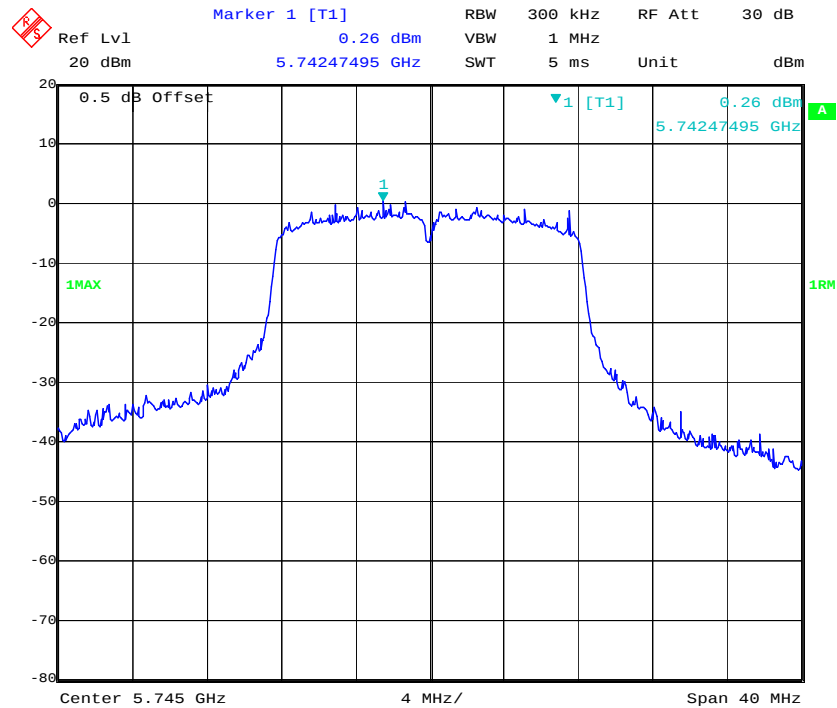


Date: 21.JAN.2020 23:22:32

802.11a Middle Channel

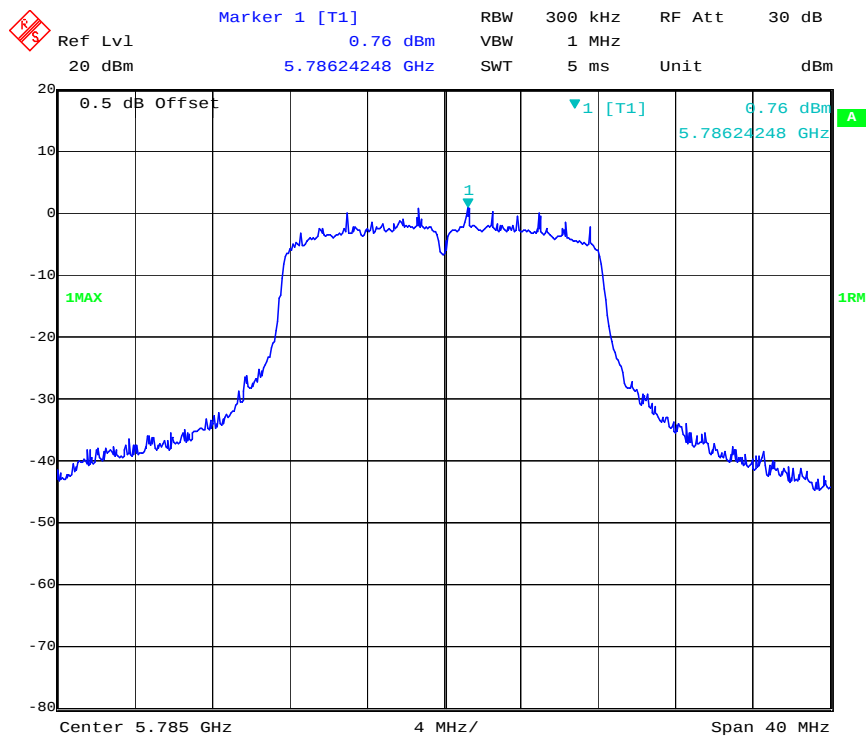


Date: 21.JAN.2020 23:23:59


802.11a High Channel

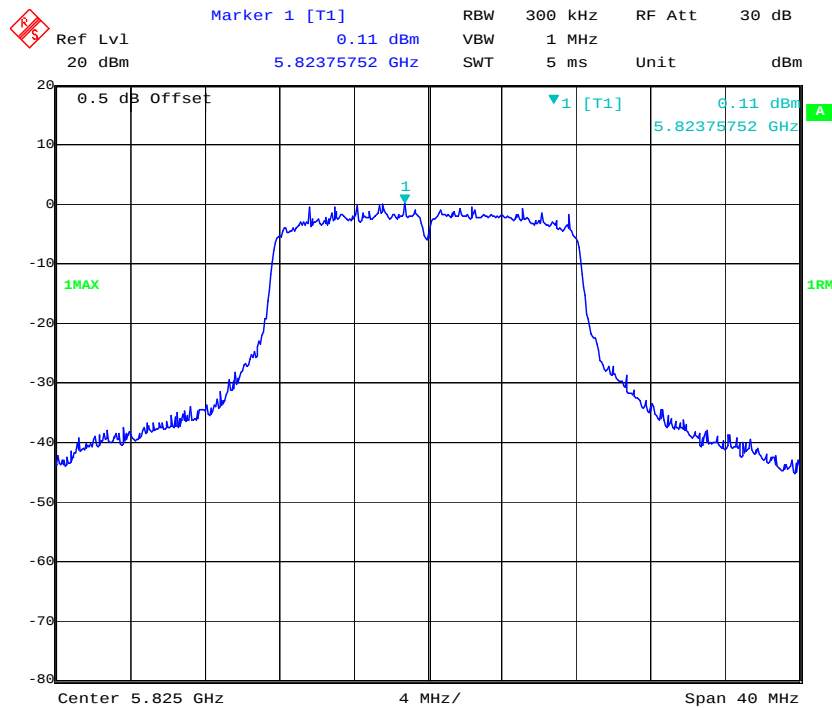


802.11n ht20 Low Channel

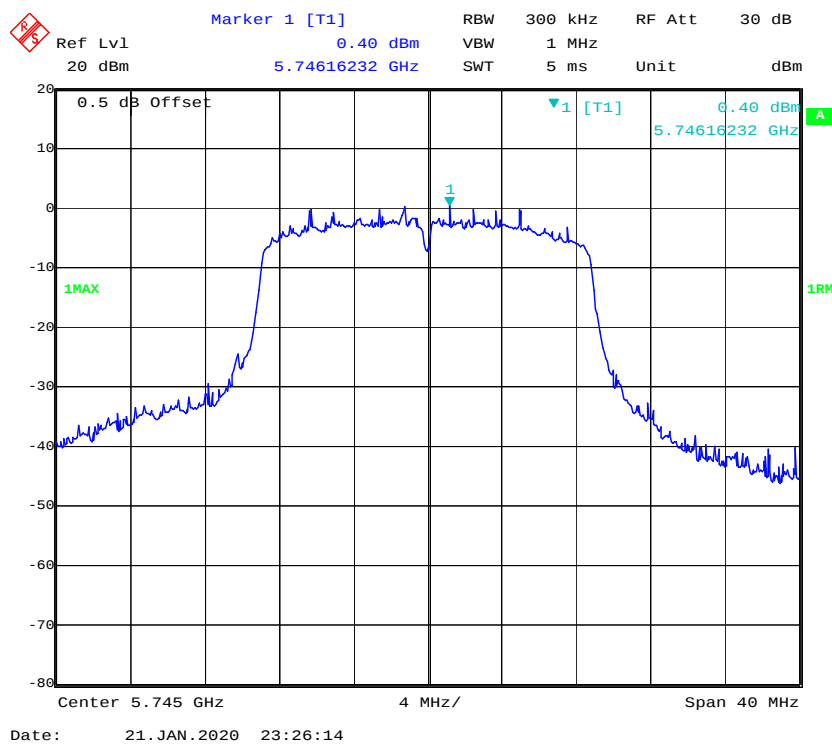


802.11n ht20 Middle Channel

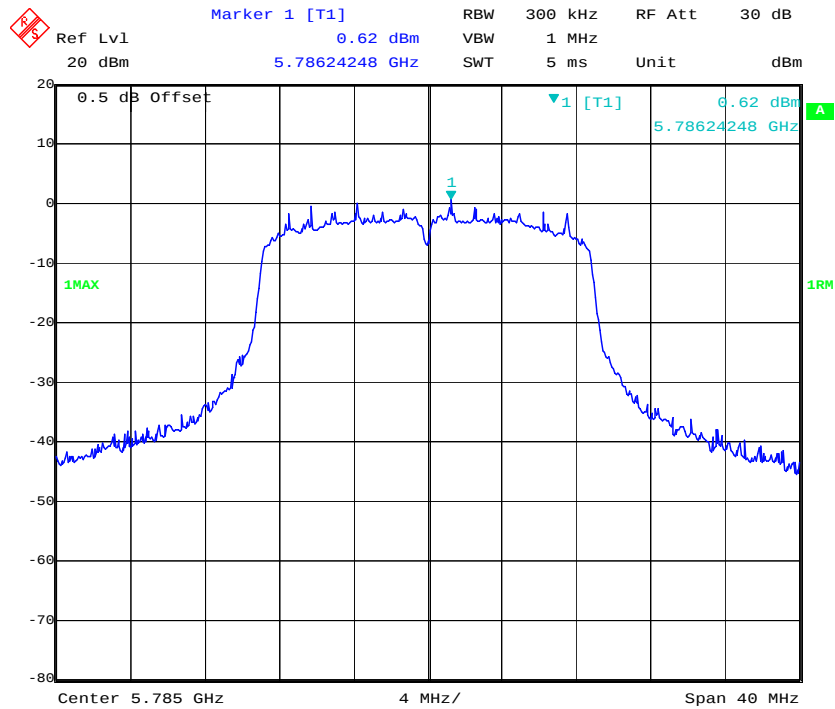

802.11n ht20 High Channel

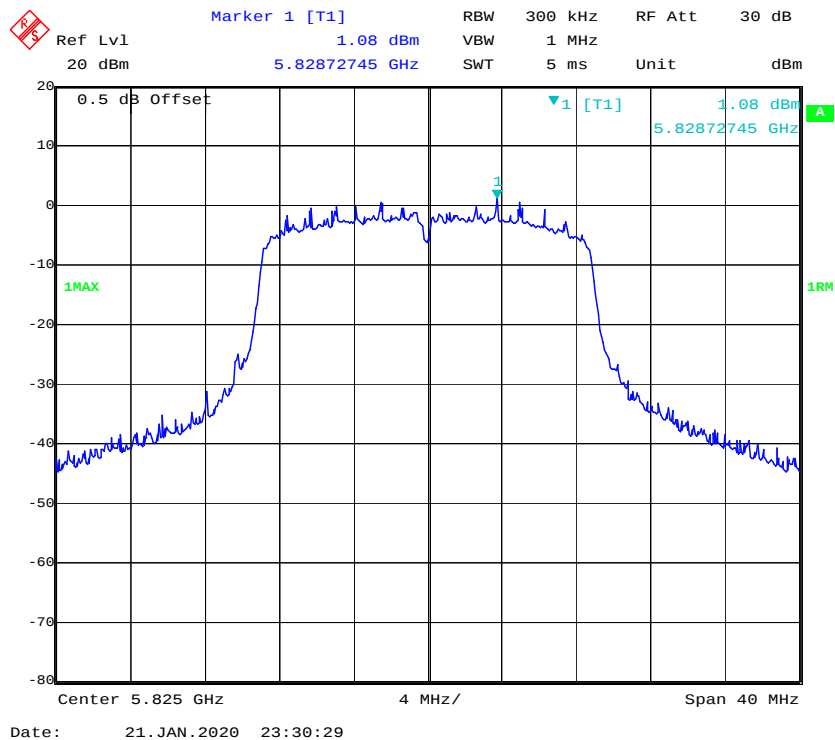


802.11n ht40 Low Channel

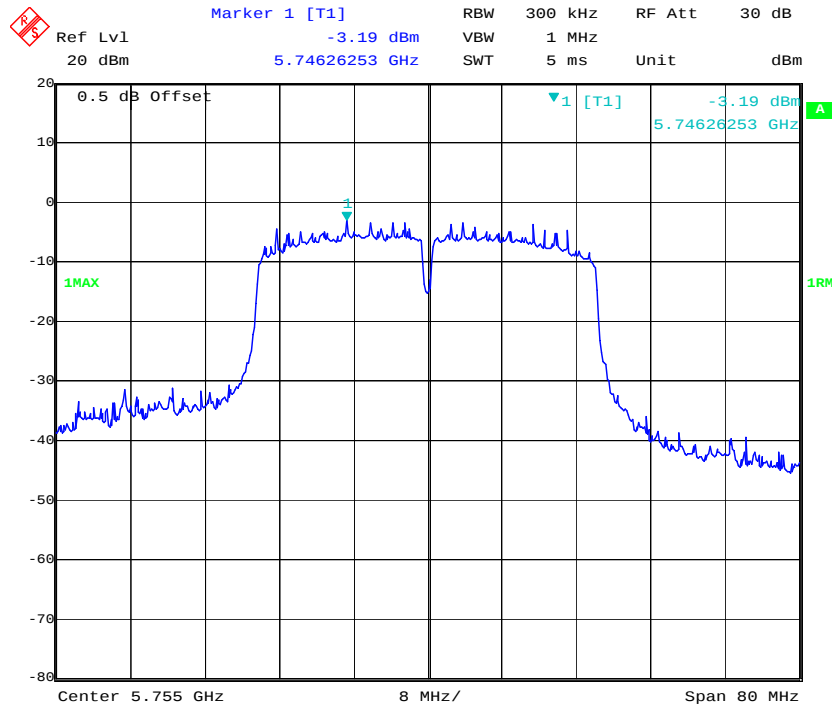


Date: 21. JAN. 2020 23:31:49

802.11n ht40 High Channel

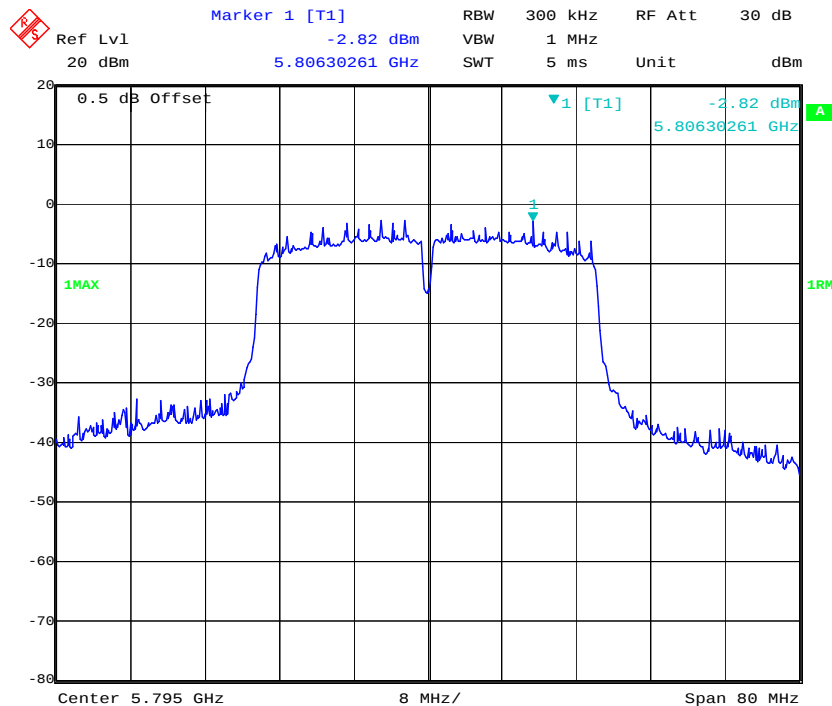


Date: 21. JAN. 2020 23:33:18

802.11ac vht80

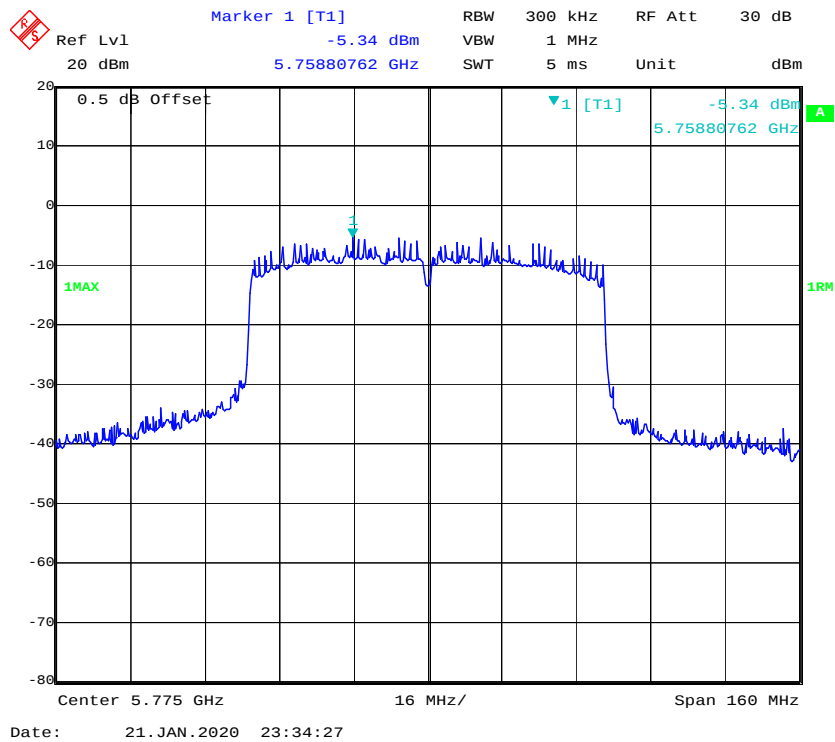


Chain 1:

802.11a Low Channel

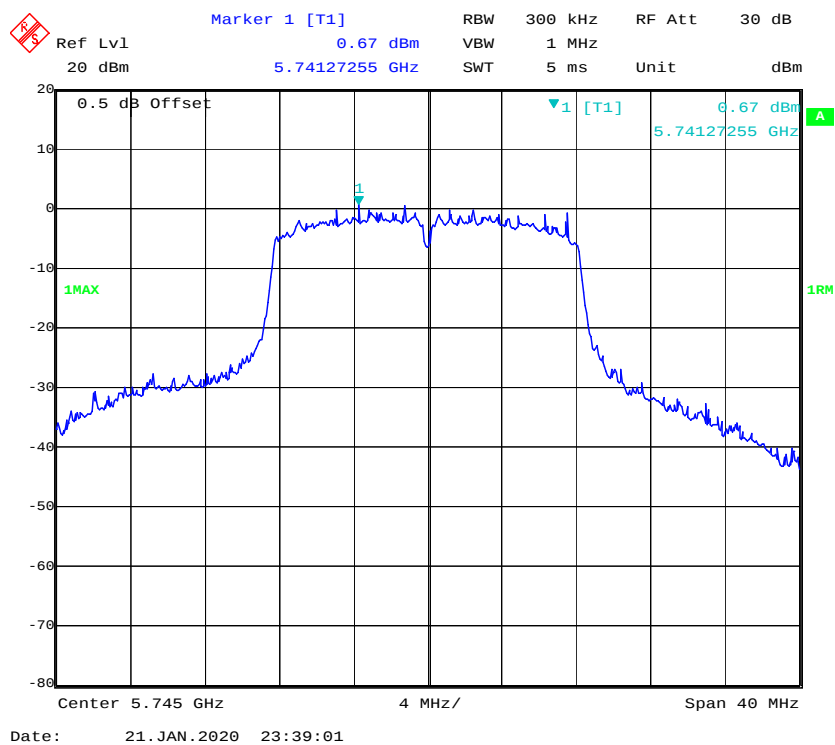


802.11a Middle Channel

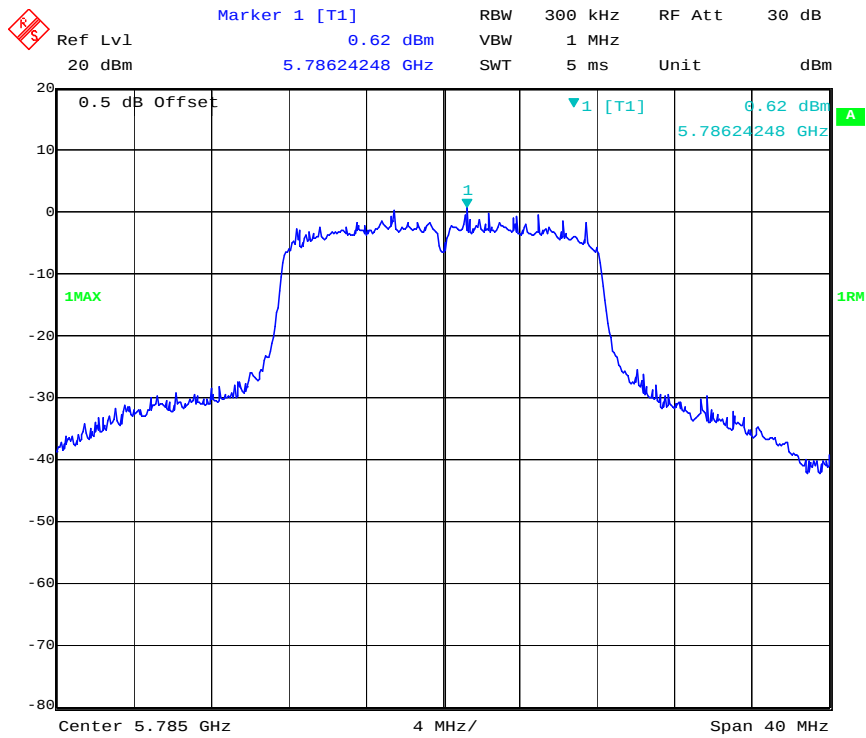


Date: 21.JAN.2020 23:39:27

802.11a High Channel

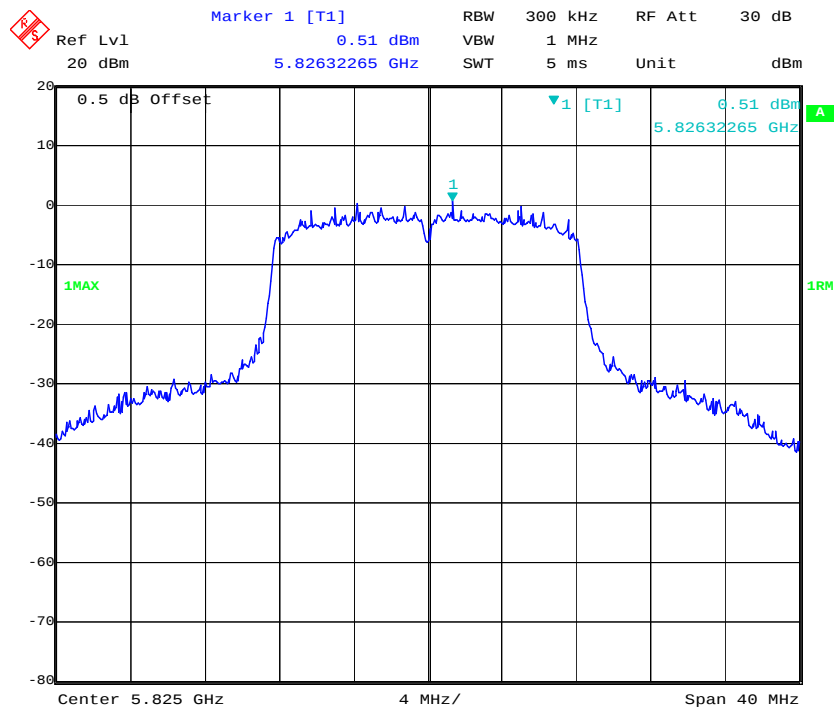


Date: 21.JAN.2020 23:40:06

802.11n ht20 Low Channel

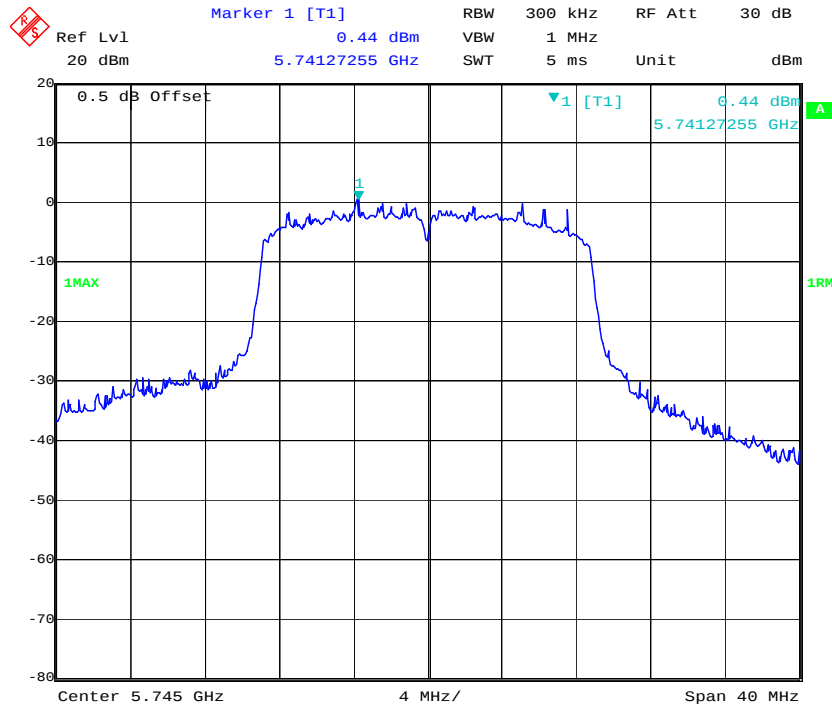


Date: 21. JAN. 2020 23:40:49

802.11n ht20 Middle Channel

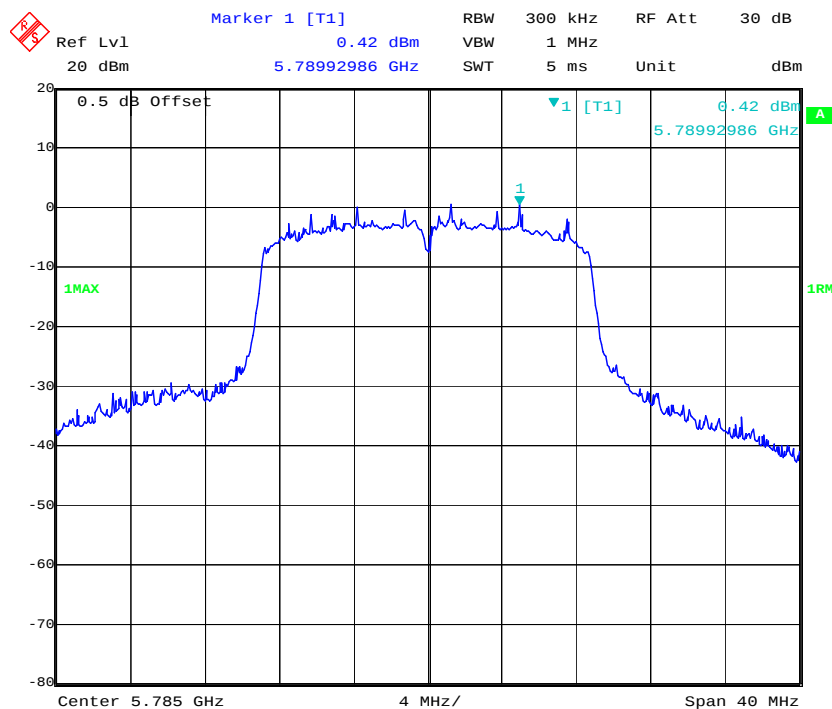



Date: 21. JAN. 2020 23:41:13

802.11n ht20 High Channel

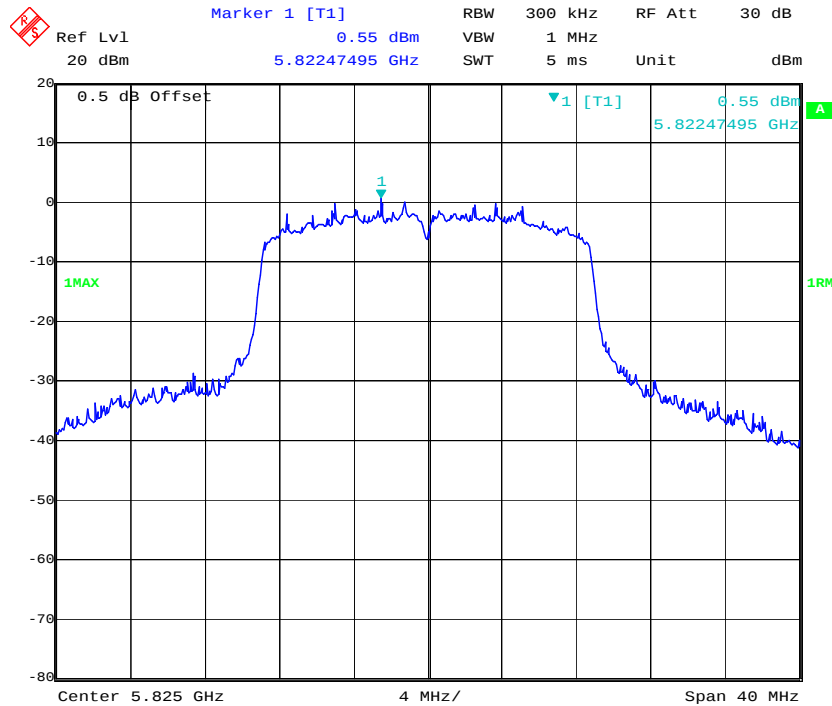


802.11n ht40 Low Channel

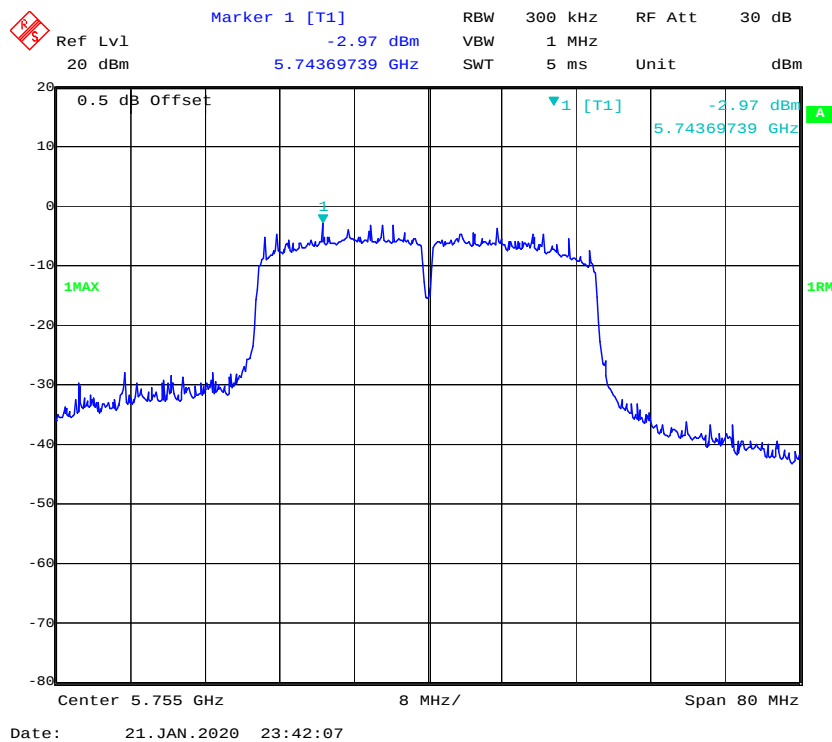

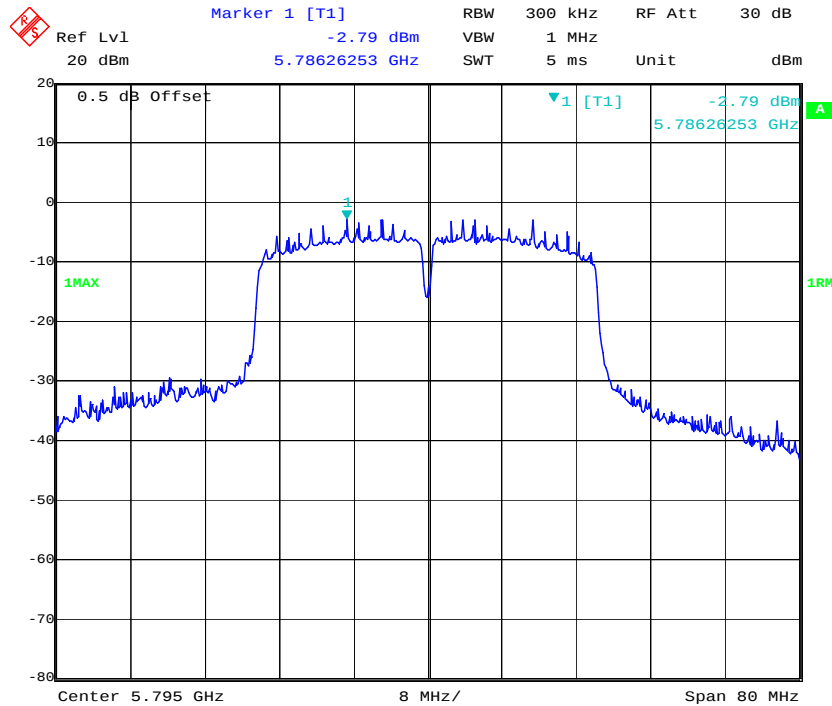802.11n ht40 High Channel

Date: 21. JAN. 2020 23:42:33

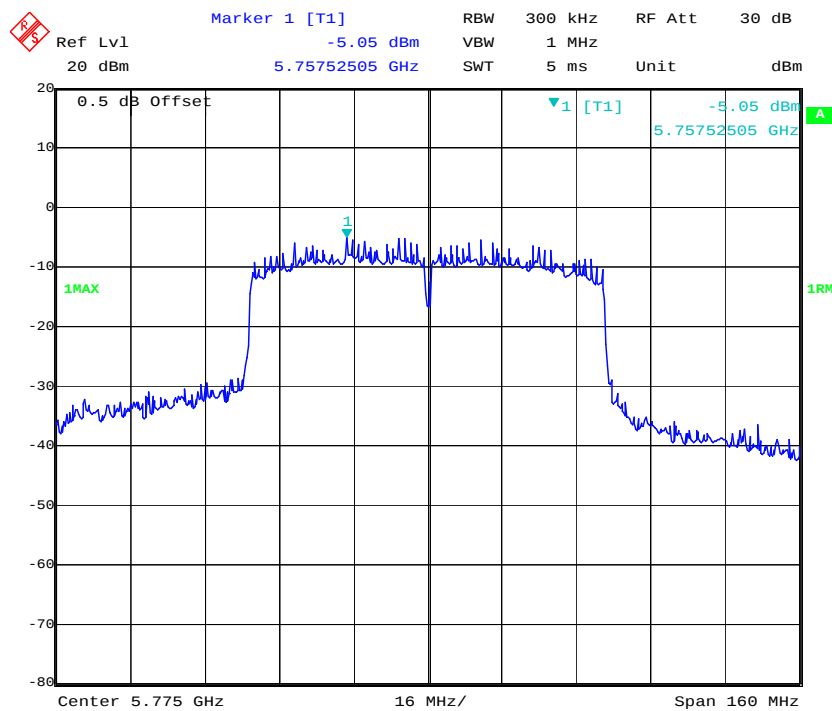802.11ac vht80

Date: 21. JAN. 2020 23:43:16

***** END OF REPORT *****