



EMC-TRF-01 Rev 1.0

Report No.: GZCR210802082806

Page: 1 of 252

FCC ID: SS3-RM51021

TEST REPORT

Application No.: GZCR2108020828AT
Applicant: SZ DJI TECHNOLOGY CO.,LTD.
Address of Applicant: 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China
Manufacturer: SZ DJI TECHNOLOGY CO.,LTD.
Address of Manufacturer: 14th floor, West Wing, Skyworth Semiconductor Design Building NO.18
Gaoxin South 4th Ave, Nanshan District, Shenzhen, Guangdong, China
Equipment Under Test (EUT):
EUT Name: DJI RC Pro
Model No.: RM510
Trade mark: DJI
Standard(s) : 47 CFR Part 15, Subpart E 15.407
Date of Receipt: 2021-08-19
Date of Test: 2021-08-20 to 2021-08-27
Date of Issue: 2021-08-30

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.

Kobe Jian
EMC Laboratory Manager



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd.
Guangzhou Branch EMC Laboratory

No.198 Kexu Road, Sciotech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-08-30		Original

Authorized for issue by			
Tested By			
	Curry Wu /Project Engineer		
Reviewed By			
	Ricky Liu/Reviewer		

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart E 15.407	N/A	47 CFR Part 15, Subpart C 15.203	Pass
Transmission in the Absence of Data		N/A	47 CFR Part 15, Subpart E 15.407 (c)	Pass
Frequency Stability		KDB 789033 II A 3	47 CFR Part 15, Subpart E 15.407 (g)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart E 15.407	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207 & E 15.407 b(6)	Pass
Duty Cycle		KDB 789033 II B 1	KDB 789033 D02 II B 1	Pass
99% Bandwidth		KDB 789033 II D	N/A	Pass
26dB Emission bandwidth		KDB 789033 D02 II C 1	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Minimum 6 dB bandwidth (5.725-5.85 GHz band)		KDB 789033 D02 II C 2	47 CFR Part 15, Subpart E 15.407 (e)	Pass
Maximum Conducted output power		KDB 789033 D02 II E	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Peak Power spectrum density		KDB 789033 D02 II F	47 CFR Part 15, Subpart E 15.407 (a)	Pass
Radiated Emissions		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & E 15.407(b)	Pass
Radiated Emissions which fall in the restricted bands		KDB 789033 D02 II G	47 CFR Part 15, Subpart C 15.209 & E 15.407(b)	Pass
Band Edge		KDB 789033 D02 II	47 CFR Part 15, Subpart E 15.407(b)	Pass

Note:

E.U.T./EUT means Equipment Under Test.

Pass means the test result passed the test standard requirement, please find the detailed decision rule in the report relative section.

KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02.

3 Contents

	Page
1 Cover Page	1
2 Test Summary	3
3 Contents	4
4 General Information.....	6
4.1 Details of E.U.T.	6
4.2 Description of Support Units	6
4.3 Measurement Uncertainty	7
4.4 Test Location.....	7
4.5 Test Facility	8
4.6 Deviation from Standards.....	8
4.7 Abnormalities from Standard Conditions	8
5 Equipment List	9
6 Radio Spectrum Technical Requirement	14
6.1 Antenna Requirement	14
6.1.1 Test Requirement:	14
6.1.2 Conclusion	14
6.2 Transmission in the Absence of Data	15
6.2.1 Test Requirement:	15
6.2.2 Conclusion	15
6.3 Frequency Stability	15
6.3.1 Test Requirement:	15
6.3.2 Conclusion	15
7 Radio Spectrum Matter Test Results	16
7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)	16
7.1.1 E.U.T. Operation	16
7.1.2 Test Mode Description	16
7.1.3 Test Setup Diagram	17
7.1.4 Measurement Procedure and Data.....	17
7.2 Duty Cycle	20
7.2.1 E.U.T. Operation	20
7.2.2 Test Mode Description	20
7.2.3 Test Setup Diagram	20
7.2.4 Measurement Procedure and Data.....	20
7.3 99% Bandwidth	21
7.3.1 E.U.T. Operation	21
7.3.1 Test Mode Description	21
7.3.2 Test Setup Diagram	22
7.3.3 Measurement Procedure and Data.....	22
7.4 26dB Emission bandwidth	23
7.4.1 E.U.T. Operation	23
7.4.1 Test Mode Description	23
7.4.2 Test Setup Diagram	24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.4.3	Measurement Procedure and Data.....	24
7.5	Minimum 6 dB bandwidth (5.725-5.85 GHz band).....	25
7.5.1	E.U.T. Operation	25
7.5.1	Test Mode Description	25
7.5.2	Test Setup Diagram	26
7.5.3	Measurement Procedure and Data.....	26
7.6	Maximum Conducted output power	27
7.6.1	E.U.T. Operation	27
7.6.1	Test Mode Description	27
7.6.2	Test Setup Diagram	28
7.6.3	Measurement Procedure and Data.....	28
7.7	Peak Power spectrum density.....	29
7.7.1	E.U.T. Operation	29
7.7.1	Test Mode Description	29
7.7.2	Test Setup Diagram	30
7.7.3	Measurement Procedure and Data.....	30
7.8	Radiated Emissions	31
7.8.1	E.U.T. Operation	31
7.8.2	Test Mode Description	32
7.8.3	Test Setup Diagram	33
7.8.4	Measurement Procedure and Data.....	34
7.9	Radiated Emissions which fall in the restricted bands	80
7.9.1	E.U.T. Operation	81
7.9.1	Test Mode Description	81
7.9.2	Test Setup Diagram	82
7.9.3	Measurement Procedure and Data.....	83
7.10	Band Edge.....	112
7.10.1	E.U.T. Operation.....	112
7.10.1	Test Mode Description.....	112
7.10.2	Test Setup Diagram.....	113
7.10.3	Measurement Procedure and Data	113
8	Test Setup Photo	114
9	EUT Constructional Details (EUT Photos)	114
10	Appendix.....	115



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

4 General Information

4.1 Details of E.U.T.

Power supply:	DC 7.2V Lithium-ion rechargeable battery (to be charged from type C port)
Operation Frequency:	1.4MHz BW:5728.5MHz-5846.5MHz; 1.4MHz BW CA:5730.12MHz-5848.12MHz; 3MHz BW:5727.5MHz-5844.5MHz; 3MHz BW CA:5730.2MHz-5847.2MHz; 10MHz BW:5730.5MHz-5844.5MHz; 20MHz BW:5735.5MHz-5839.5MHz; 40MHz BW:5745.5MHz-5829.5MHz
Modulation Type:	OFDM
Number of Channels:	1.4MHz BW:60; 1.4MHz BW CA:60; 3MHz BW:40; 3MHz BW CA:40; 10MHz BW:115; 20MHz BW:105; 40MHz BW:85
Channel Spacing:	1.4MHz BW:2MHz; 1.4MHz BW CA:2MHz; 3MHz BW:3MHz; 3MHz BW CA:3MHz; 10MHz BW:1MHz; 20MHz BW:1MHz; 40MHz BW:1MHz
Antenna Type:	Dipole Antenna
Antenna Gain:	Antenna 1&3: 3.5dBi; Antenna 2: 4dBi; Antenna 4: 4.5dBi Antenna 1&2 are TX Antennas; Antenna 3&4 are RX Antennas

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
AC/DC Adapter	DJI	PD-65US	N/A



4.3 Measurement Uncertainty

Test Item	Measurement Uncertainty
Conducted Emissions at AC Power Line (150kHz-30MHz)	3.12dB
Duty Cycle	± 0.37%
99% Bandwidth	± 3%
26dB Emission bandwidth	± 3%
Minimum 6 dB bandwidth (5.725-5.85 GHz band)	± 3%
Maximum Conducted output power	± 0.75dB
Peak Power spectrum density	± 2.84dB
Radiated Emissions	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Radiated Emissions which fall in the restricted bands	5.06dB (30MHz-1GHz ; 3m) 4.46dB (30MHz-1GHz ; 10m) 5.08dB (1GHz-6GHz) 5.14dB (above 6GHz)
Frequency Stability	± 7.25 x 10 ⁻⁸

4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou Branch EMC Laboratory,
198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District,
Guangzhou, China 510663

Tel: +86 20 82155555 Fax: +86 20 82075059

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **NVLAP (Lab Code: 200611-0)**

SGS-CSTC Standards Technical Services Co., Ltd., Guangzhou EMC Laboratory is accredited by the National Voluntary Laboratory Accreditation Program (NVLAP/NIST). NVLAP Code: 200611-0.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

- **ACMA**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory can also perform testing for the Australian/New Zealand Regulatory Compliance Mark (RCM).

- **SGS UK (Certificate No.: 32), SGS-TUV SAARLAND and SGS-FIMKO**

Have approved SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory as a supplier of EMC TESTING SERVICES and SAFETY TESTING SERVICES.

- **CNAS (Lab Code: L0167)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been assessed and in compliance with CNAS-CL01:2018 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2017 General Requirements) for the Competence of Testing Laboratories.

- **FCC Recognized Accredited Test Firm (Registration No.: 486818)**

SGS-CSTC Standards Technical Services Co., Ltd., EMC Laboratory has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: CN5016, Test Firm Registration Number: 486818.

- **ISED (Registration No.: 4620B, CAB identifier: CN0052)**

SGS-CSTC Standards Technical Services Co., Ltd., has been registered by Innovation Science and Economic Development Canada for Wireless Device Testing laboratories to test to Canadian radio equipment requirements. Registration No. 4620B, CAB identifier: CN0052.

- **VCCI (Registration No.: R-12460, C-12584, G-20107 and T-11179)**

The 10m Semi-anechoic chamber, 966 Anechoic Chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-12460, C-12584, G-20107 and T-11179 respectively.

- **CBTL (Lab Code: TL129)**

SGS-CSTC Standards Technical Services Co., Ltd., E&E Laboratory has been assessed and fully comply with the requirements of ISO/IEC 17025:2017, the Basic Rules, IECEE 01 and Rules of procedure IECEE 02, and the relevant IECEE CB-Scheme Operational documents.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ChangZhou ZhongYu	8m x 3m x 3.8m	EMC0306	N/A	N/A
Two-Line V-Network	Rohde & Schwarz	ENV216	EMC0118	2021-01-08	2022-01-06
Two-Line V-Network-GZ	Rohde & Schwarz	ENV216	EMC2135	2020-09-25	2021-09-24
Coaxial Cable	HangTianXing	2m	EMC0107	2020-09-09	2022-09-08
Test Software E3c	Audix	Ver. 5.4.1221b	GZE100-62	N/A	N/A
EMI Test Receiver(9kHz-3.6GHz)	Rohde & Schwarz	ESR4	EMC2221	2021/6/1	2022/5/31

Duty Cycle					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

99% Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18



Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

26dB Emission bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Minimum 6 dB bandwidth (5.725-5.85 GHz band)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz- 6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou branch: 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Maximum Conducted output power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

Peak Power spectrum density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
Power Meter (U2021XA_Ch2)	Agilent Technologies	U2021XA_Ch2	SEM009-02	2021-05-19	2022-05-18
Power Meter (U2021XA_Ch3)	Agilent Technologies	U2021XA_Ch3	SEM009-03	2021-05-19	2022-05-18
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch
No. 198 Kezhu Road, Science Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch Testing Laboratory EEC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Radiated Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/9/9	2022/9/8
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A
Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-28	2022-07-27
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver(20Hz-26.5GHz)	Rohde & Schwarz	ESIB26	EMC0522	2021-01-08	2022-01-07
Chamber cable(Above 1GHz)	Scoflex	KMKM-8.0m	EMC0545	2020/09/09	2022/09/08
Horn Antenna(1GHz-18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA 9120D	EMC2026	2019-09-25	2022-09-24
1GHz-26.5 GHz Pre-Amplifier	Agilent	8449B	EMC0521	2021-01-08	2022-01-07
966 Anechoic Chamber	C.R.T	9m x 6m x 6m	EMC2142	2020-12-20	2023-12-19
MXE EMI Receiver(10Hz-8.4GHz)	Keysight	N9038A	EMC2139	2020-11-13	2021-11-12
EXA Signal Analyzer(10Hz-44GHz)	Keysight	N9010A	EMC2138	2020-09-17	2021-09-16
Test Software E3	Audix	Ver.6.120110a	GZE100-61	N/A	N/A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services Co., Ltd. No. 198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgs.com.cn
Guangzhou Branch Testing Laboratory EEC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

Notch Filter (5150-5880)	Mico-Tronics	BRM50716	EMC2168	2021-07-28	2022-07-27
Horn Antenna(14-40GHz)	SCHWARZBECK	BBHA 9170	EMC2041	2020-06-28	2023-06-27
Microwave Broadband Preamplifier (18-40GHz)	SCHWARZBECK	BBV 9721	EMC2172	2020-09-09	2021-09-08

Band Edge					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
MXA Signal Analyzer(10Hz-8.4GHz)	Agilent Technologies	N9020A	SEM004-10	2021-03-02	2022-03-01
ESG Vector Signal Generator(250kHz-6GHz)	Keysight	E4438C	SEM006-03	2021-03-12	2022-03-11
EXG Analog Signal Generator(9kHz-3GHz)	Agilent Technologies	N5171B	SEM006-04	2020-07-15	2021-07-14
EXA Signal Analyzer(10Hz-44GHz)	Agilent Technologies	N9010A	EMC2138	2020-09-17	2021-09-16
6dB Attenuator	HP	8491A	EMC2062	2020-04-15	2022-04-14
Test Software JS1120-3	HangTianXing	V2.6	GZE100-69	N/A	N/A
MI CABLE	SGS-EMC	0.8M	EMC2136	2019-11-02	2021-11-01
MI CABLE	SGS-EMC	0.8M	EMC2137	2019-11-02	2021-11-01

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DMM	Fluke	73	EMC0006	2021-07-05	2022-07-05
DMM	Fluke	73	EMC0007	2021-07-05	2022-07-05



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203

6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the Antenna are Antenna 1&4: 3.5dBi; Antenna 2: 4dBi; Antenna 4: 4.5dBi.

Antenna location: Refer to internal photo.

6.2 Transmission in the Absence of Data

6.2.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (c)

6.2.2 Conclusion

Standard Requirement:

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

Applicants shall include in their application for equipment authorization a description of how this requirement is met.

EUT Details:

RF chip support automatically discontinue transmission in case of either absence of information to transmit or operational failure, if the chip detect absence of information to transmit or operational failure, it will be automatically shut off.

6.3 Frequency Stability

6.3.1 Test Requirement:

47 CFR Part 15, Subpart E 15.407 (g)

6.3.2 Conclusion

The grantee declared that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual, it comply the frequency stability requirement.

7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207 & E 15.407 b(6)

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 22.3 °C

Humidity: 62.8 % RH

Atmospheric Pressure: 1010 mbar

7.1.2 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	32	Charge + TX mode(1.4MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	33	Charge + TX mode(1.4MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	34	Charge + TX mode(3MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	35	Charge + TX mode(3MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	36	Charge + TX mode(10MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	37	Charge + TX mode(20MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	38	Charge + TX mode(40MHz)_Keep the EUT in charging and continuously transmitting mode with modulation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.1.3 Test Setup Diagram

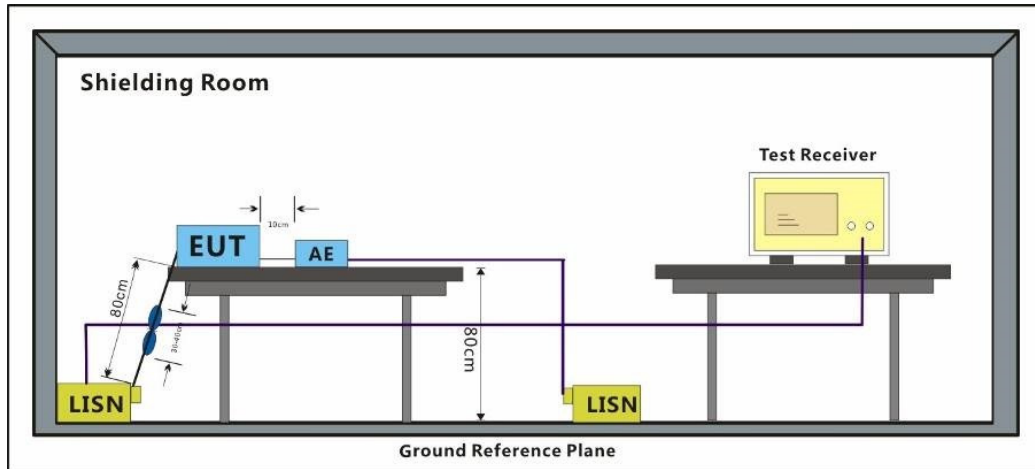


7.1.4 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Test Mode: 32; Line: Live line; Modulation:OFDM; Channel:Low

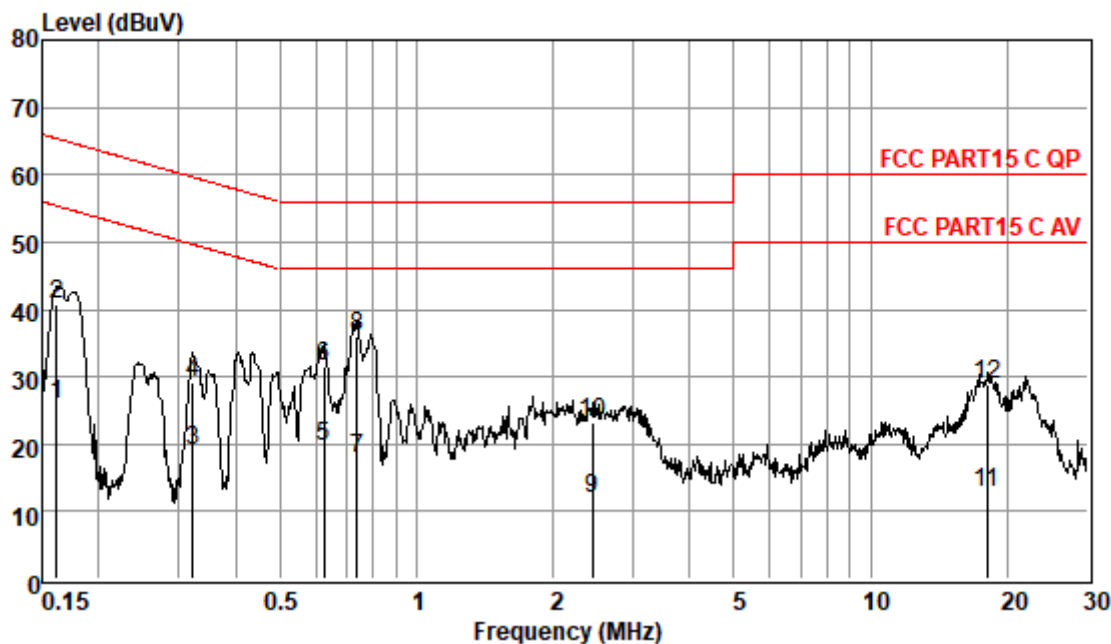Pol :LINE
Mode :
Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.16	16.09	0.06	9.62	25.77	55.38	-29.61	Average
0.16	31.06	0.06	9.62	40.74	65.38	-24.64	QP
0.32	9.49	0.06	9.62	19.17	49.66	-30.49	Average
0.32	19.56	0.06	9.62	29.24	59.66	-30.42	QP
0.63	9.83	0.07	9.63	19.53	46.00	-26.47	Average
0.63	21.88	0.07	9.63	31.58	56.00	-24.42	QP
0.74	8.15	0.07	9.63	17.85	46.00	-28.15	Average
0.74	26.25	0.07	9.63	35.95	56.00	-20.05	QP
2.43	2.05	0.13	9.62	11.80	46.00	-34.20	Average
2.43	13.41	0.13	9.62	23.16	56.00	-32.84	QP
18.04	2.67	0.34	9.75	12.76	50.00	-37.24	Average
18.04	18.79	0.34	9.75	28.88	60.00	-31.12	QP

Test Mode: 32; Line: Neutral Line; Modulation: OFDM; Channel: Low

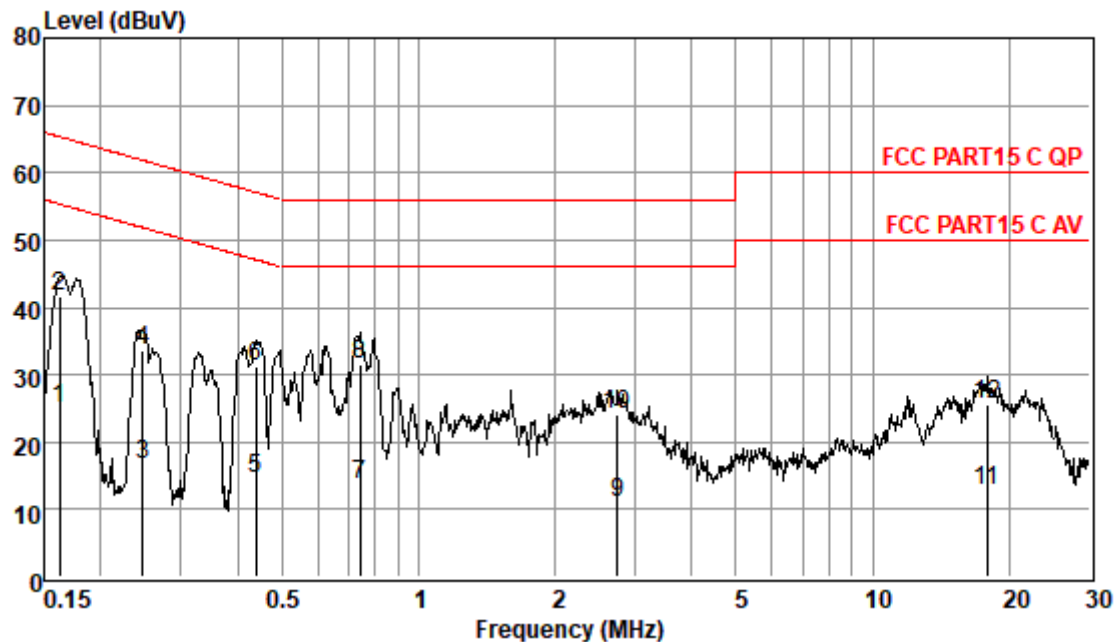

Pol : NEUTRAL

Mode :

Model :

Frequency MHz	Read Level dBuV	Cable Loss dB	LISN Factor dB	Measured Level dBuV	Limit Line dBuV	Over Limit dB	Remark
0.16	15.49	0.06	9.55	25.10	55.34	-30.24	Average
0.16	32.12	0.06	9.55	41.73	65.34	-23.61	QP
0.25	7.07	0.06	9.55	16.68	51.86	-35.18	Average
0.25	23.95	0.06	9.55	33.56	61.86	-28.30	QP
0.44	4.84	0.06	9.56	14.46	47.07	-32.61	Average
0.44	21.54	0.06	9.56	31.16	57.07	-25.91	QP
0.74	4.19	0.07	9.55	13.81	46.00	-32.19	Average
0.74	22.02	0.07	9.55	31.64	56.00	-24.36	QP
2.74	1.35	0.14	9.55	11.04	46.00	-34.96	Average
2.74	14.51	0.14	9.55	24.20	56.00	-31.80	QP
17.85	2.81	0.34	9.66	12.81	50.00	-37.19	Average
17.85	15.54	0.34	9.66	25.54	60.00	-34.46	QP

7.2 Duty Cycle

Test Requirement KDB 789033 D02 II B 1
Test Method: KDB 789033 D02 II B 2

7.2.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.2.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation

7.2.3 Test Setup Diagram

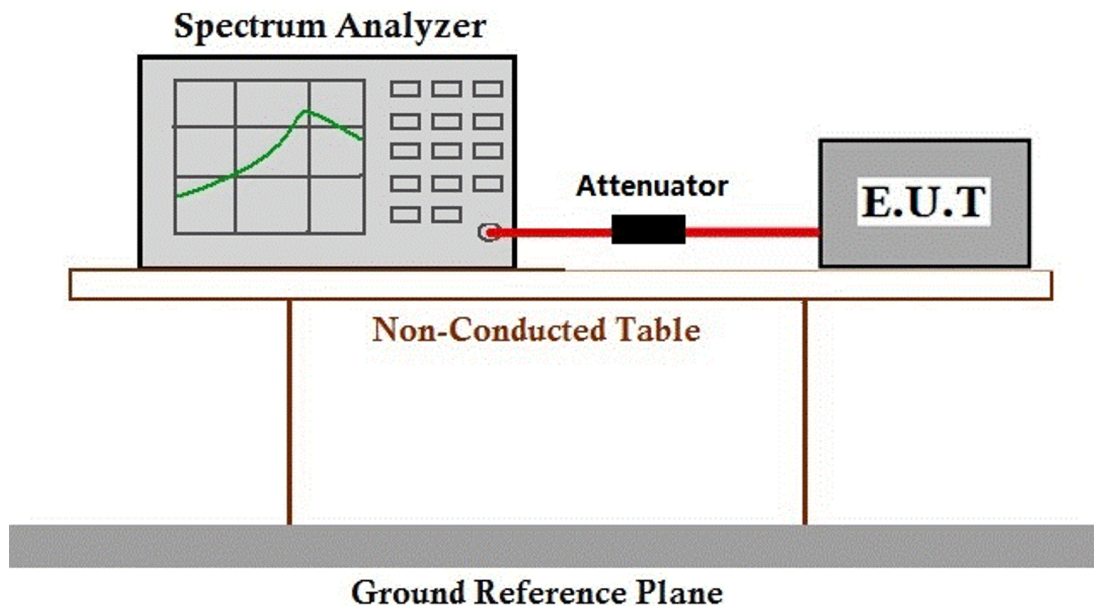

7.2.4 Measurement Procedure and Data

Please Refer To Appendix For Details



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
SGS-CSTC Standards Technical Services Co., Ltd. No.198 Kezhu Road, Sciencetech Park, Guangzhou Economic & Technology Development District, Guangzhou, China 510663 t (86-20) 82155555 f (86-20) 82075058 www.sgsgroup.com.cn
Guangzhou Branch EMC Laboratory 中国·广州·经济技术开发区科学城科珠路198号 邮编: 510663 t (86-20) 82155555 f (86-20) 82075058 sgs.china@sgs.com

7.3 99% Bandwidth

Test Requirement N/A
Test Method: KDB 789033 II D


7.3.1 E.U.T. Operation

Operating Environment:
Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.3.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation

7.3.2 Test Setup Diagram

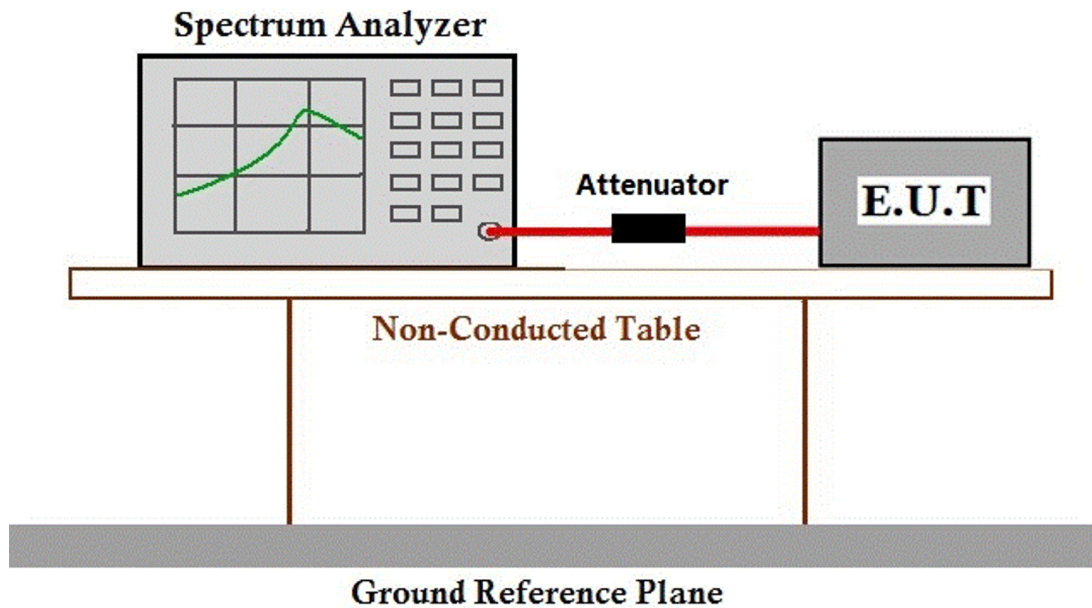

7.3.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.4 26dB Emission bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)
Test Method: KDB 789033 D02 II C 1

7.4.1 E.U.T. Operation


Operating Environment:

Temperature: 22.9 °C Humidity: 39.5 % RH Atmospheric Pressure: 1010 mbar

7.4.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation

7.4.2 Test Setup Diagram

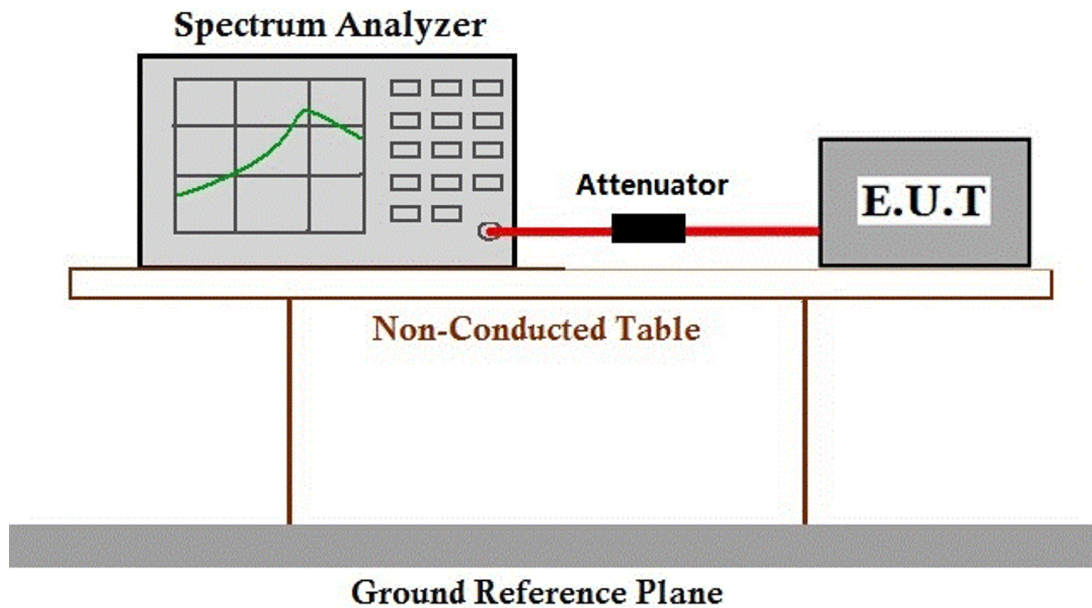

7.4.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.5 Minimum 6 dB bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: KDB 789033 D02 II C 2

Limit:

Frequency band(MHz)	Limit
5725-5850	≥500 kHz

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C

Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.5.1 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.5.2 Test Setup Diagram

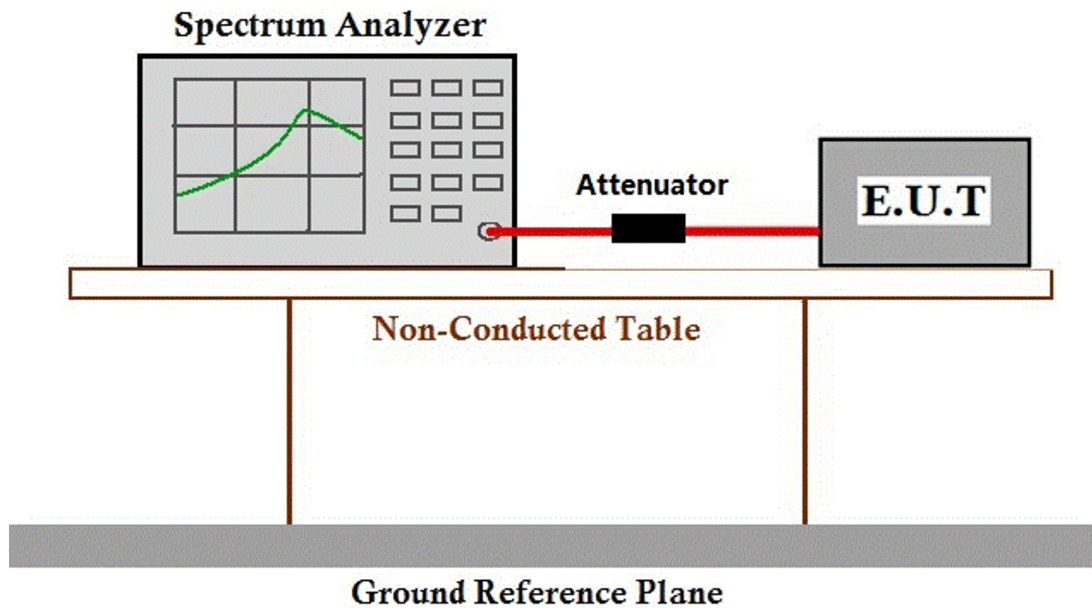

7.5.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.6 Maximum Conducted output power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II E

Limit:

Frequency band(MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250mW(24dBm) for client device
5250-5350	≤250mW(24dBm) for client device or 11dBm+10logB*
5470-5725	≤250mW(24dBm) for client device or 11dBm+10logB*
5725-5850	≤1W(30dBm)
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C

Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.6.1 Test Mode Description


Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.6.2 Test Setup Diagram

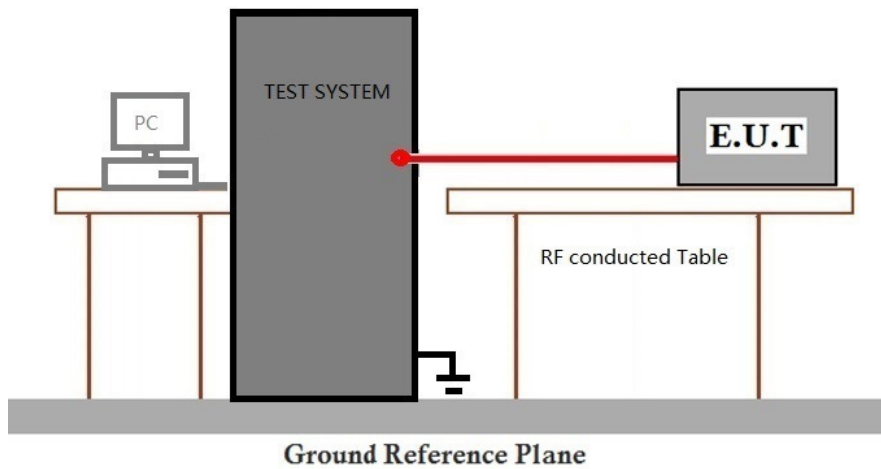

7.6.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.7 Peak Power spectrum density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: KDB 789033 D02 II F

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 22.9 °C


Humidity: 39.5 % RH

Atmospheric Pressure: 1010 mbar

7.7.1 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation

7.7.2 Test Setup Diagram

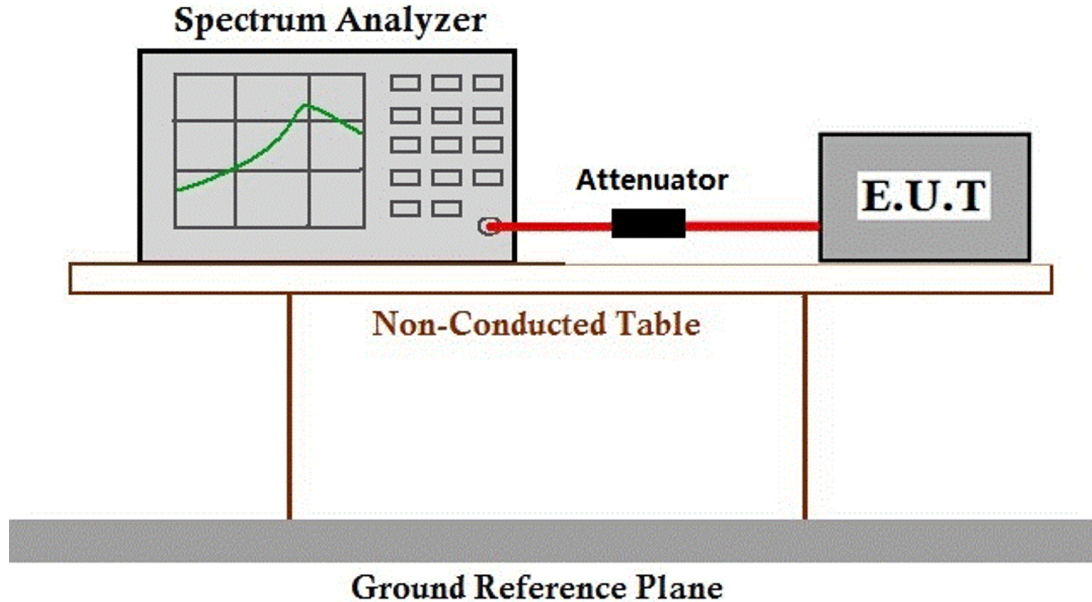

7.7.3 Measurement Procedure and Data

Please Refer To Appendix For Details

7.8 Radiated Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & E 15.407(b)

Test Method: KDB 789033 D02 II G

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

*(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 21.6 °C

Humidity: 51.9 % RH

Atmospheric Pressure: 1010 mbar




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	25	TX mode(1.4MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	26	TX mode(1.4MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	27	TX mode(3MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	28	TX mode(3MHz,CA)_Keep the EUT in continuously transmitting mode with modulation
Final test	29	TX mode(10MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	30	TX mode(20MHz)_Keep the EUT in continuously transmitting mode with modulation
Final test	31	TX mode(40MHz)_Keep the EUT in continuously transmitting mode with modulation
Pre-scan	32	Charge + TX mode(1.4MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	33	Charge + TX mode(1.4MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	34	Charge + TX mode(3MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	35	Charge + TX mode(3MHz,CA)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	36	Charge + TX mode(10MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	37	Charge + TX mode(20MHz)_Keep the EUT in charging and continuously transmitting mode with modulation
Pre-scan	38	Charge + TX mode(40MHz)_Keep the EUT in charging and continuously transmitting mode with modulation

7.8.3 Test Setup Diagram

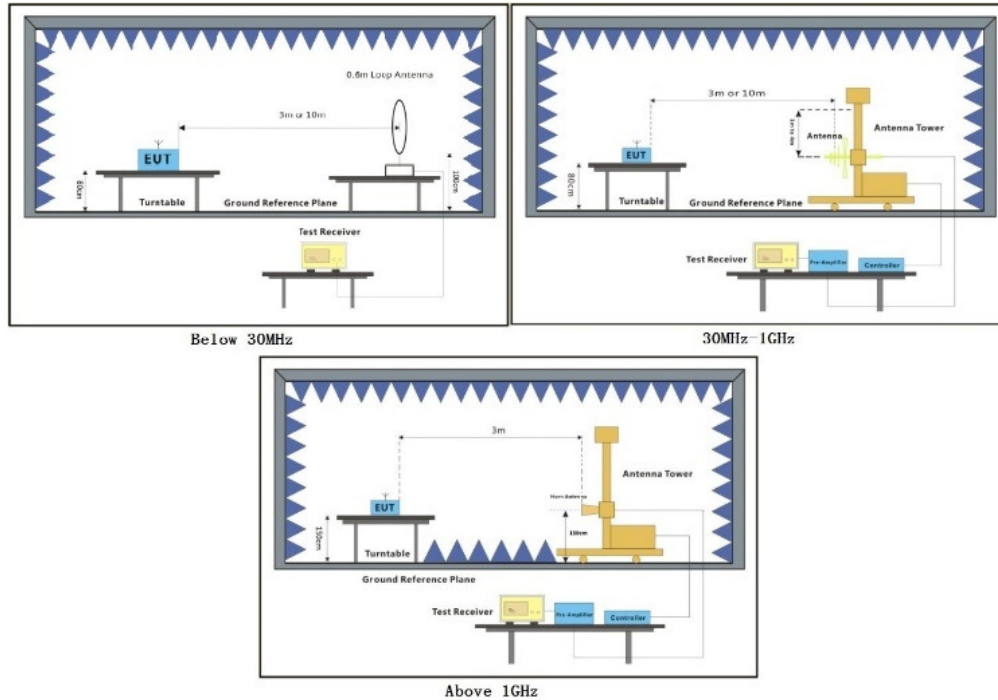

7.8.4 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark1:

1. Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor
2. For emission below 1GHz, through the pre-scan found the worst case is the lowest channel of 802.11ac. Only the worst case is recorded in the report.
3. Scan from 9kHz to 40GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
4. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

Remark2:


1. The disturbance below 30MHz and above 18GHz was very low, and the below harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.
2. Pretest the EUT at antenna 1 and antenna 2 and MIMO mode find the worst case is MIMO mode.
3. For 30-1000MHz, Pretest the EUT in BW 1.4MHz, 1.4MHz CA, 3MHz, 3MHz CA, 10MHz, 20MHz, 40MHz find the worst case are 1.4MHz, only record the worst case test data 1.4MHz in this report.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

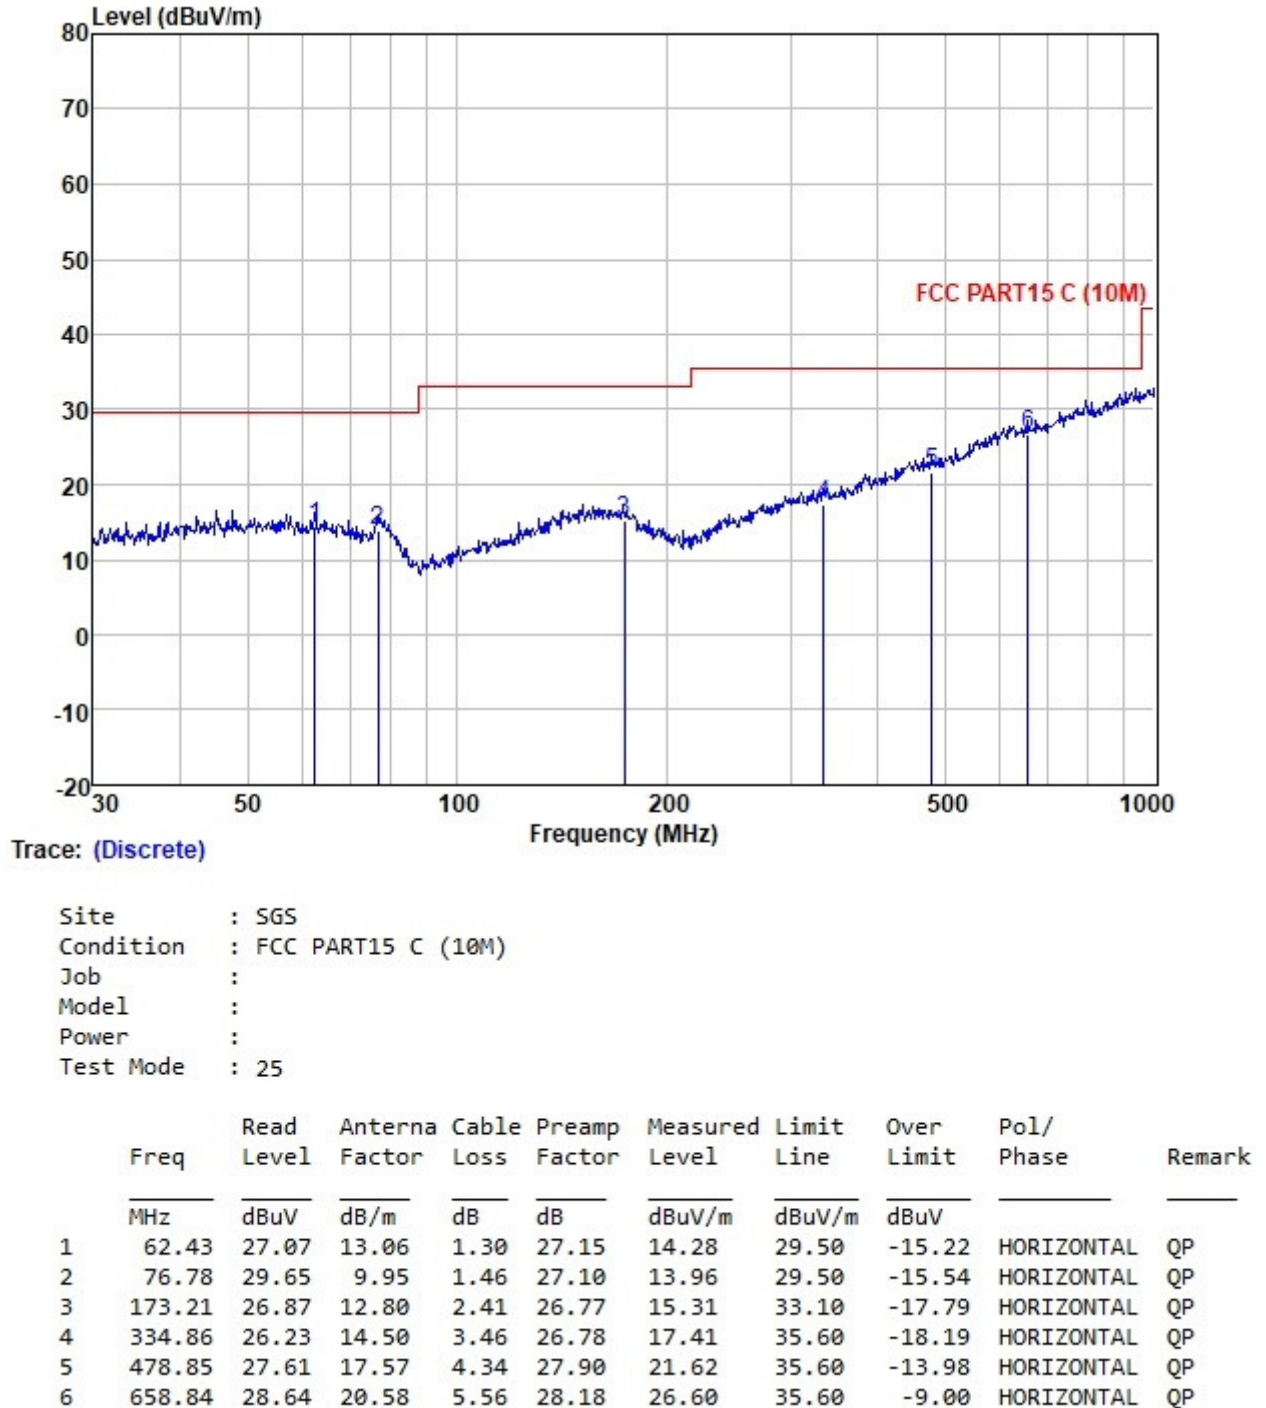

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

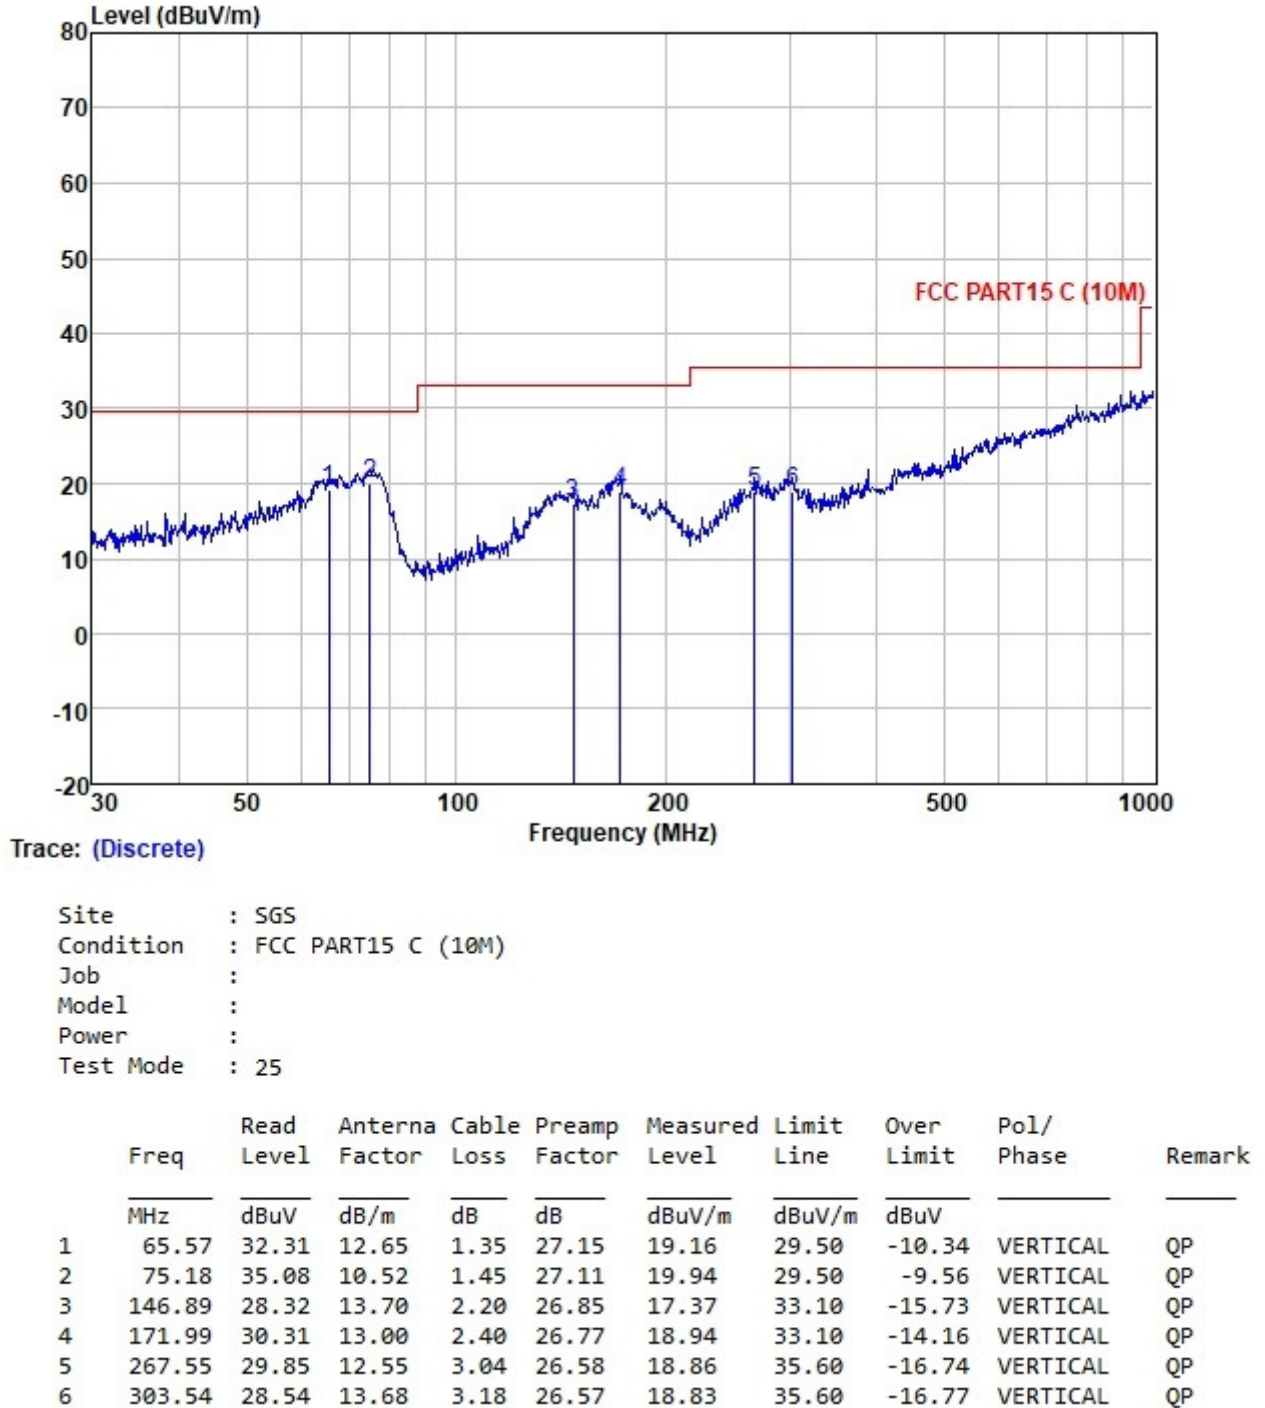

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;

L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m

D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:


Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
65.57	19.16	9.08	30.26	29.62	40.00	-10.38	H
75.18	19.94	9.93	33.10	30.40	40.00	-9.60	H
146.89	17.37	7.39	24.63	27.83	43.50	-15.67	H
172.00	18.94	8.85	29.50	29.40	43.50	-14.10	H
267.55	18.86	8.77	29.23	29.32	46.00	-16.68	H
303.54	18.83	8.74	29.13	29.29	46.00	-16.71	H
62.43	14.28	5.18	17.25	24.74	40.00	-15.26	V
76.78	13.96	4.99	16.63	24.42	40.00	-15.58	V
173.21	15.31	5.83	19.43	25.77	43.50	-17.73	V
334.86	17.41	7.42	24.74	27.87	46.00	-18.13	V
478.85	21.62	12.05	40.17	32.08	46.00	-13.92	V
658.84	26.60	21.38	71.27	37.06	46.00	-8.94	V



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: Low

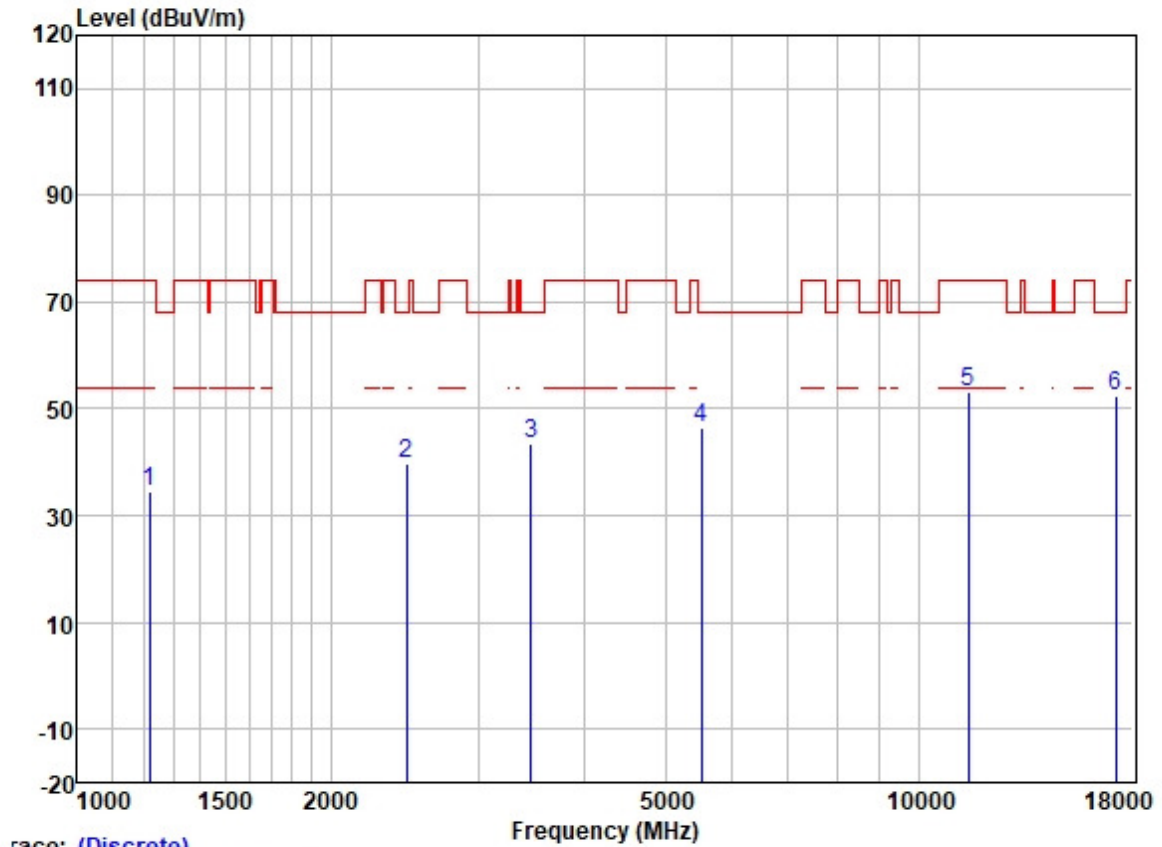


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1219.085	45.86	24.82	2.32	38.37	34.63	74.00	-39.37	HORIZONTAL	Peak
2	2463.000	46.28	27.45	3.50	37.57	39.66	68.20	-28.54	HORIZONTAL	Peak
3	3465.510	47.46	28.88	4.22	36.95	43.61	68.20	-24.59	HORIZONTAL	Peak
4	5521.556	45.16	31.81	6.38	36.89	46.46	68.20	-21.74	HORIZONTAL	Peak
5	11457.000	42.17	39.91	8.37	37.15	53.30	74.00	-20.70	HORIZONTAL	Peak
6	17185.500	34.87	42.79	9.92	35.33	52.25	68.20	-15.95	HORIZONTAL	Peak

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: Low

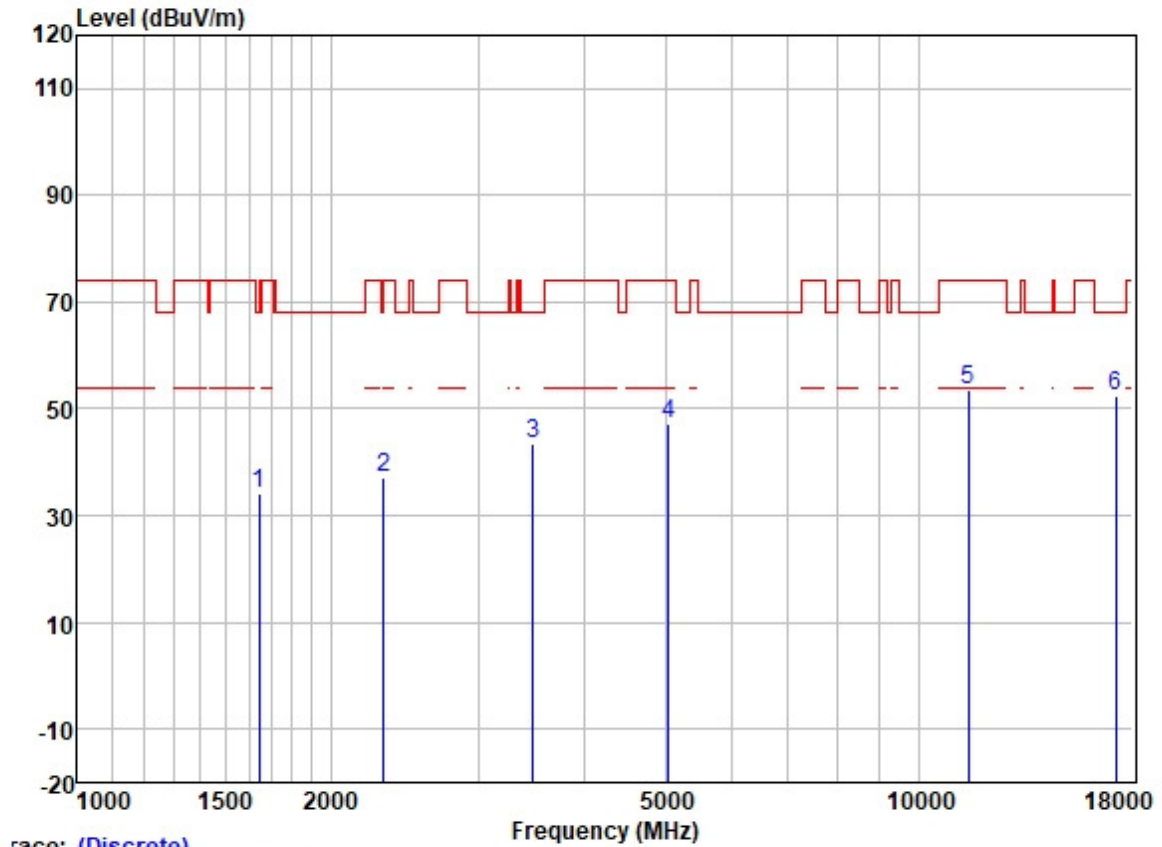


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1644.751	43.70	25.63	2.80	37.93	34.20	68.20	-34.00	VERTICAL	Peak
2	2315.000	44.14	27.15	3.32	37.62	36.99	74.00	-37.01	VERTICAL	Peak
3	3485.601	47.12	28.89	4.27	36.95	43.33	68.20	-24.87	VERTICAL	Peak
4	5044.705	46.55	31.71	5.68	36.86	47.08	74.00	-26.92	VERTICAL	Peak
5	11457.000	42.26	39.91	8.37	37.15	53.39	74.00	-20.61	VERTICAL	Peak
6	17185.500	35.17	42.79	9.92	35.33	52.55	68.20	-15.65	VERTICAL	Peak

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: middle

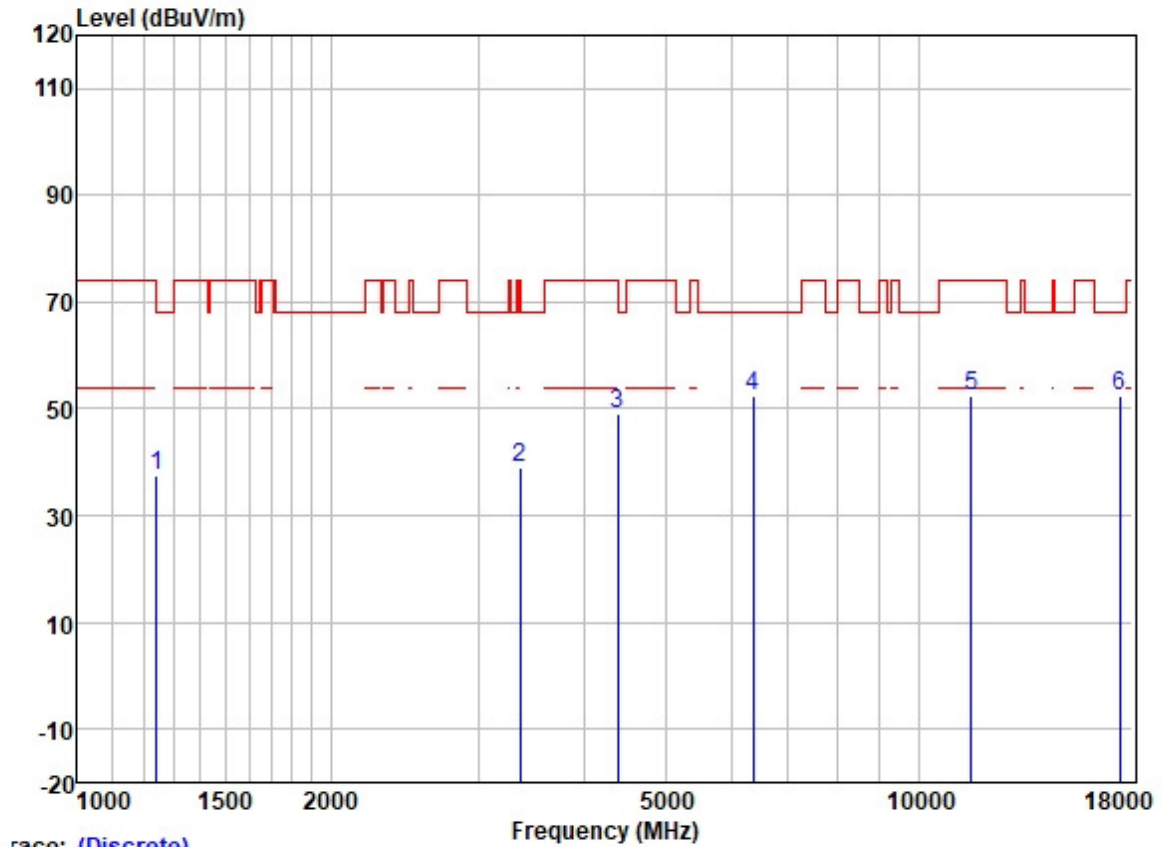


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1243.289	48.39	24.98	2.31	38.35	37.33	68.20	-30.87	HORIZONTAL	Peak
2	3356.153	43.17	28.81	4.09	37.01	39.06	74.00	-34.94	HORIZONTAL	Peak
3	4392.376	50.69	30.66	4.70	36.81	49.24	74.00	-24.76	HORIZONTAL	Peak
4	6354.000	49.68	33.63	5.92	36.97	52.26	68.20	-15.94	HORIZONTAL	Peak
5	11573.000	41.26	39.78	8.38	37.14	52.28	74.00	-21.72	HORIZONTAL	Peak
6	17359.500	34.11	43.40	10.39	35.32	52.58	68.20	-15.62	HORIZONTAL	Peak

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: middle

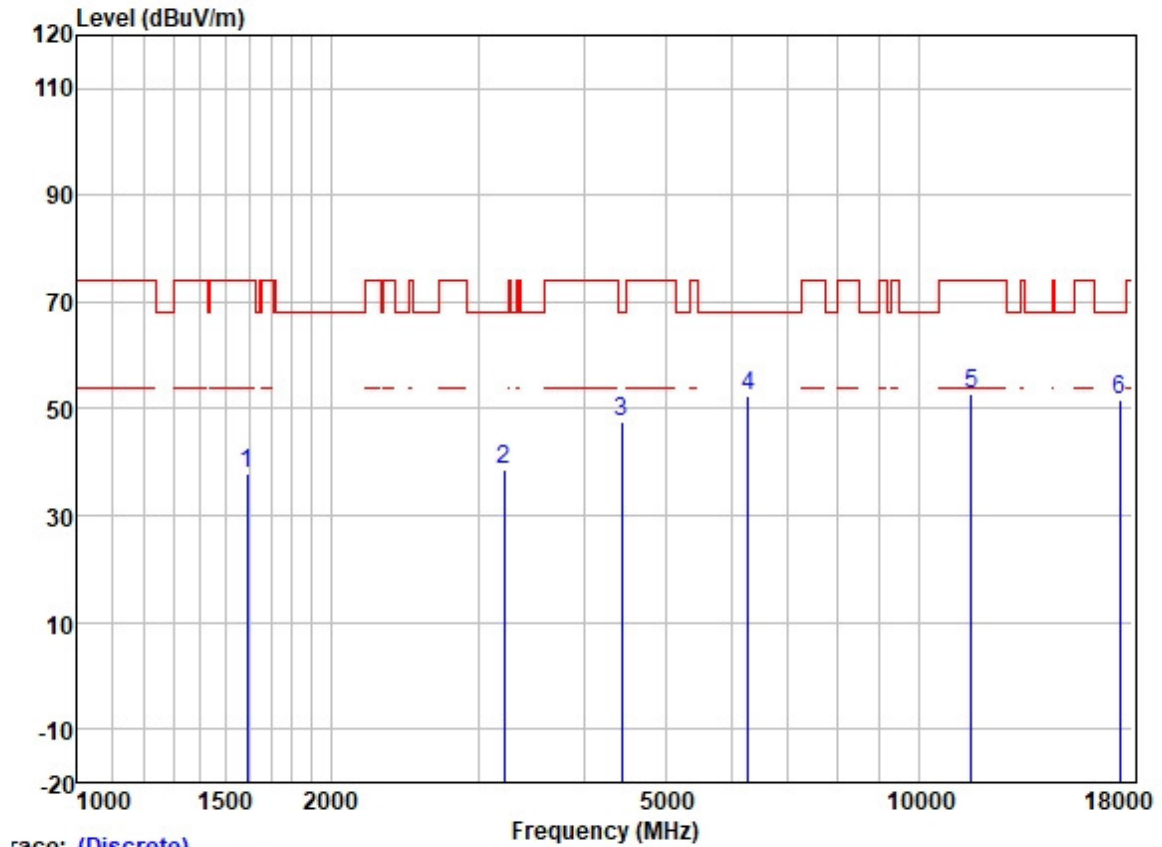

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1592.945	47.31	25.57	2.80	37.98	37.70	74.00	-36.30	VERTICAL	Peak
2	3218.478	43.18	28.61	4.01	37.07	38.73	68.20	-29.47	VERTICAL	Peak
3	4443.453	48.68	30.73	4.83	36.81	47.43	68.20	-20.77	VERTICAL	Peak
4	6277.361	49.91	33.37	5.98	36.95	52.31	68.20	-15.89	VERTICAL	Peak
5	11573.000	41.61	39.78	8.38	37.14	52.63	74.00	-21.37	VERTICAL	Peak
6	17359.500	33.37	43.40	10.39	35.32	51.84	68.20	-16.36	VERTICAL	Peak

Test Mode: 25; Polarity: Horizontal; Modulation: OFDM; Channel: High

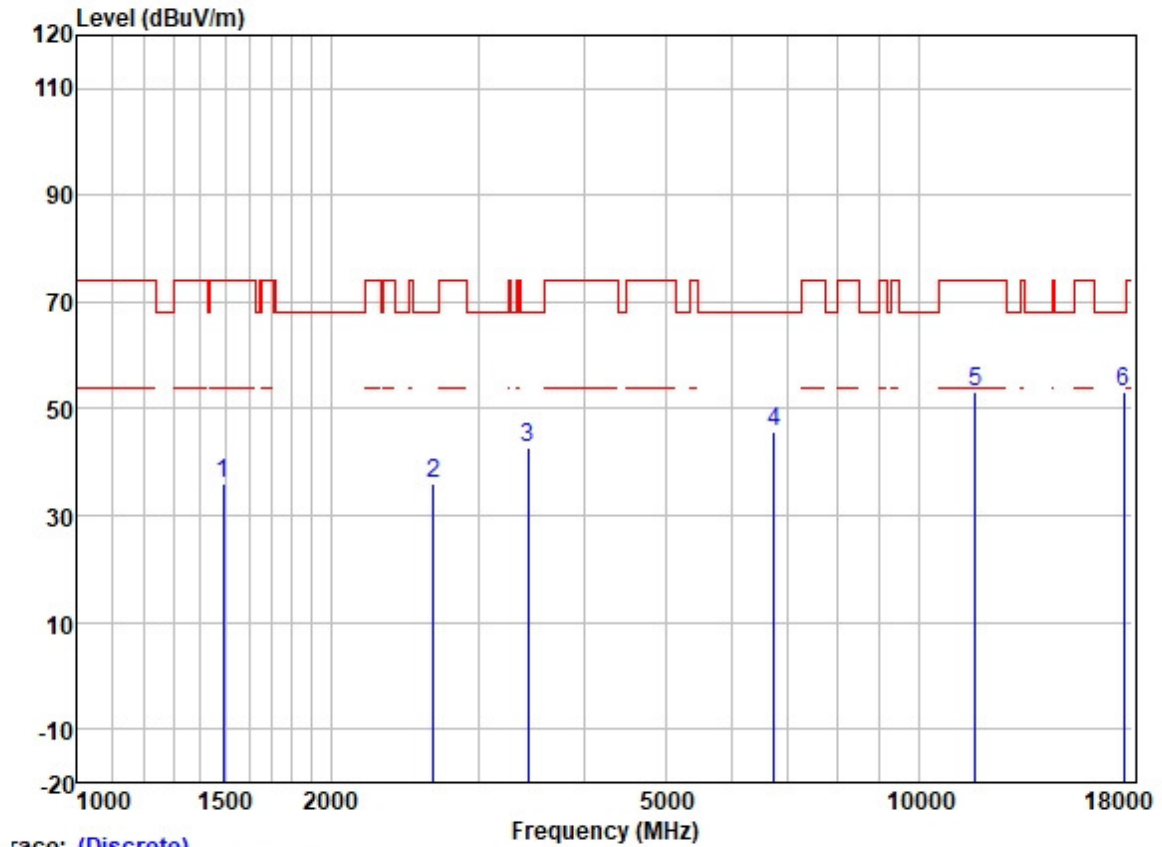


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1490.007	45.74	25.49	2.79	38.10	35.92	74.00	-38.08	HORIZONTAL Peak
2	2648.000	42.30	27.71	3.54	37.49	36.06	68.20	-32.14	HORIZONTAL Peak
3	3435.590	46.64	28.87	4.16	36.97	42.70	68.20	-25.50	HORIZONTAL Peak
4	6738.857	42.59	34.50	5.82	37.10	45.81	68.20	-22.39	HORIZONTAL Peak
5	11693.000	42.32	39.49	8.32	37.13	53.00	74.00	-21.00	HORIZONTAL Peak
6	17539.500	33.61	43.97	10.76	35.31	53.03	68.20	-15.17	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 25; Polarity: Vertical; Modulation: OFDM; Channel: High

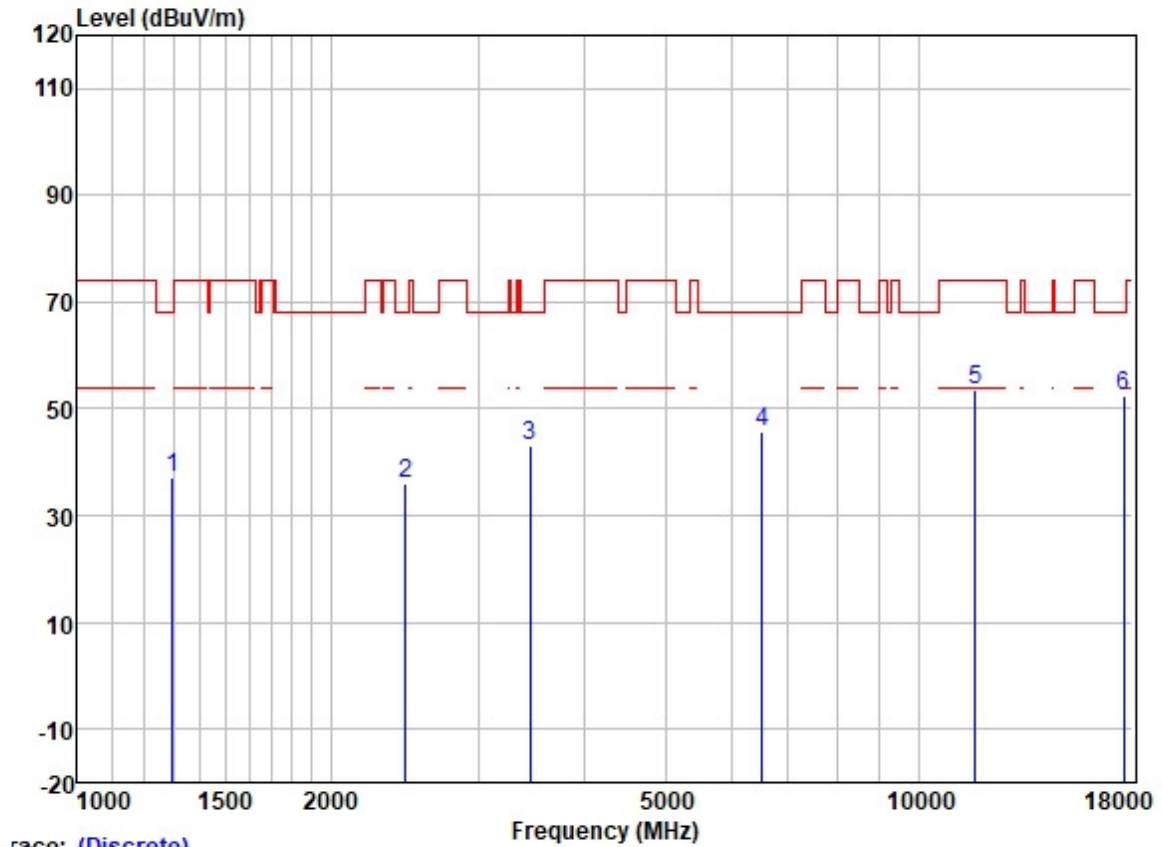


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1295.812	47.59	25.19	2.58	38.31	37.05	68.20	-31.15	VERTICAL	Peak
2	2457.000	42.64	27.44	3.45	37.58	35.95	68.20	-32.25	VERTICAL	Peak
3	3455.508	46.93	28.88	4.20	36.96	43.05	68.20	-25.15	VERTICAL	Peak
4	6514.374	42.85	34.00	5.84	37.02	45.67	68.20	-22.53	VERTICAL	Peak
5	11693.000	42.83	39.49	8.32	37.13	53.51	74.00	-20.49	VERTICAL	Peak
6	17539.500	32.92	43.97	10.76	35.31	52.34	68.20	-15.86	VERTICAL	Peak

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: Low

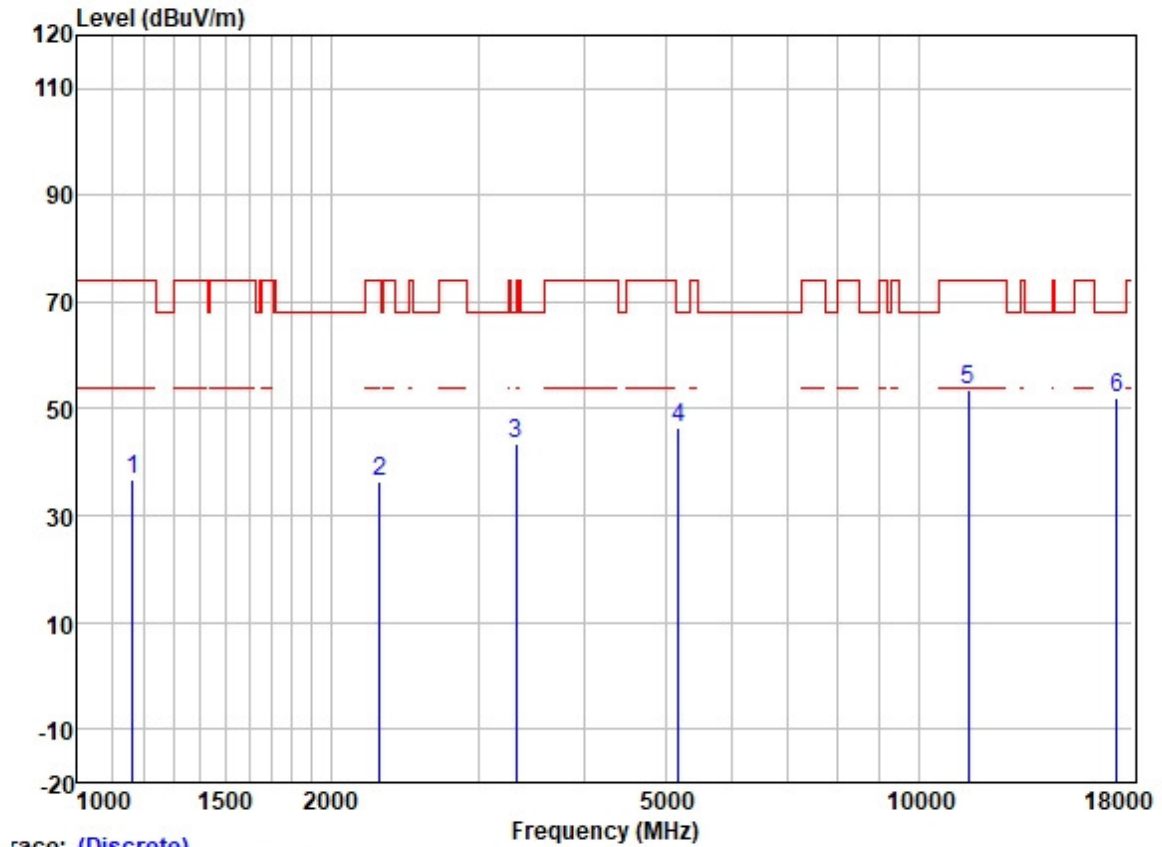

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1164.452	48.40	24.54	2.39	38.40	36.93	74.00	-37.07	HORIZONTAL	Peak
2	2287.000	43.53	27.06	3.29	37.63	36.25	74.00	-37.75	HORIZONTAL	Peak
3	3328.077	47.53	28.78	4.07	37.02	43.36	68.20	-24.84	HORIZONTAL	Peak
4	5179.929	45.88	31.73	5.61	36.87	46.35	68.20	-21.85	HORIZONTAL	Peak
5	11460.240	42.52	39.91	8.37	37.15	53.65	74.00	-20.35	HORIZONTAL	Peak
6	17190.360	34.80	42.79	9.92	35.33	52.18	68.20	-16.02	HORIZONTAL	Peak

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: Low

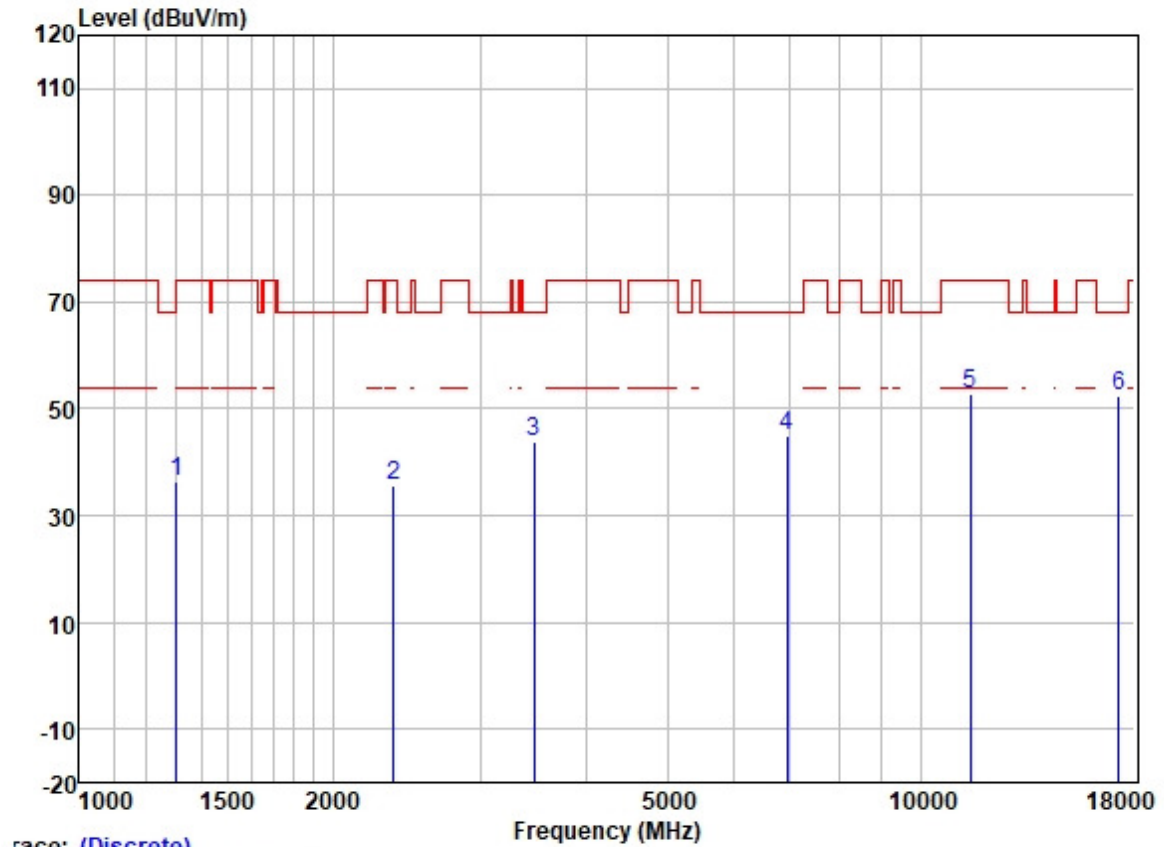

race: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1304.804	46.85	25.21	2.60	38.31	36.35	74.00	-37.65	VERTICAL Peak
2	2365.000	42.68	27.28	3.43	37.60	35.79	74.00	-38.21	VERTICAL Peak
3	3475.541	47.60	28.89	4.25	36.95	43.79	68.20	-24.41	VERTICAL Peak
4	6943.883	41.49	34.92	5.81	37.21	45.01	68.20	-23.19	VERTICAL Peak
5	11460.240	41.74	39.91	8.37	37.15	52.87	74.00	-21.13	VERTICAL Peak
6	17190.360	35.17	42.79	9.92	35.33	52.55	68.20	-15.65	VERTICAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: middle

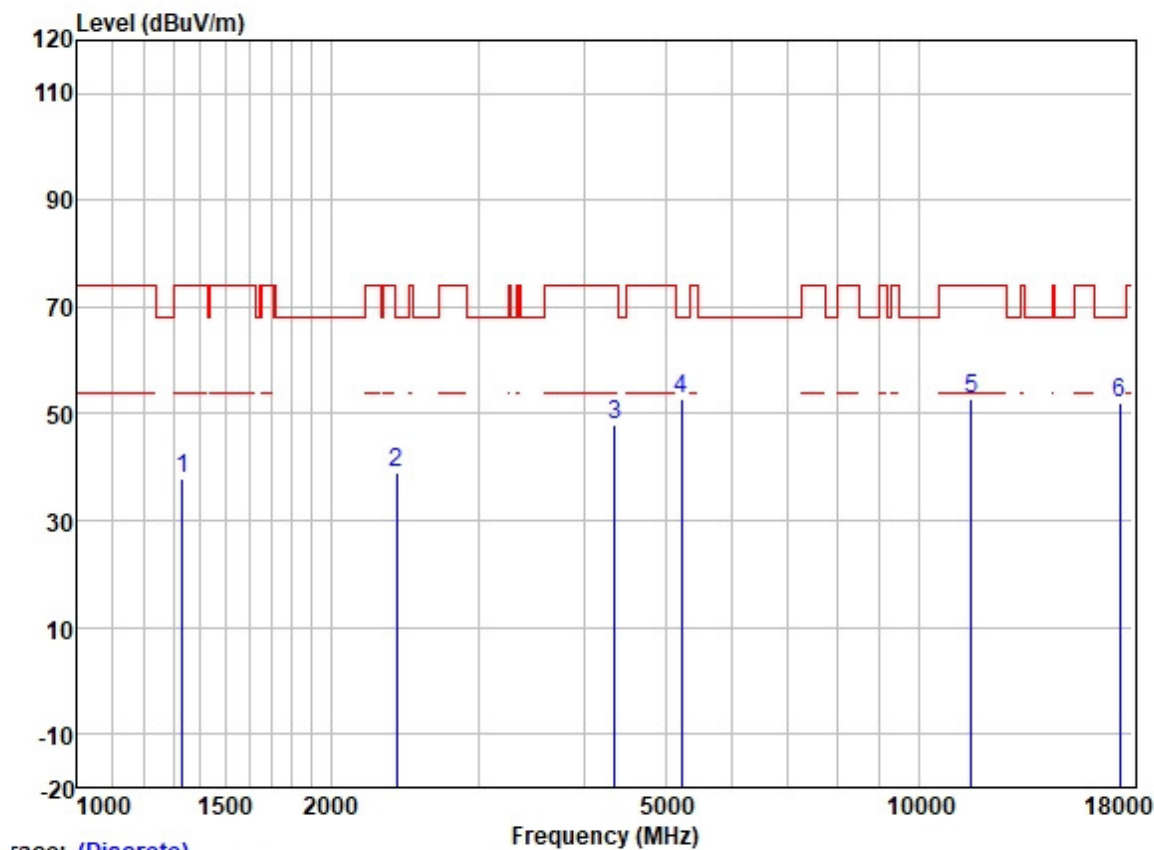


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1331.780	48.31	25.28	2.60	38.29	37.90	74.00	-36.10	HORIZONTAL	Peak
2	2398.000	45.60	27.35	3.50	37.59	38.86	68.20	-29.34	HORIZONTAL	Peak
3	4354.454	49.32	30.59	4.68	36.81	47.78	74.00	-26.22	HORIZONTAL	Peak
4	5231.464	52.34	31.74	5.70	36.87	52.91	68.20	-15.29	HORIZONTAL	Peak
5	11572.240	41.65	39.78	8.38	37.14	52.67	74.00	-21.33	HORIZONTAL	Peak
6	17358.360	33.50	43.40	10.39	35.32	51.97	68.20	-16.23	HORIZONTAL	Peak

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: middle

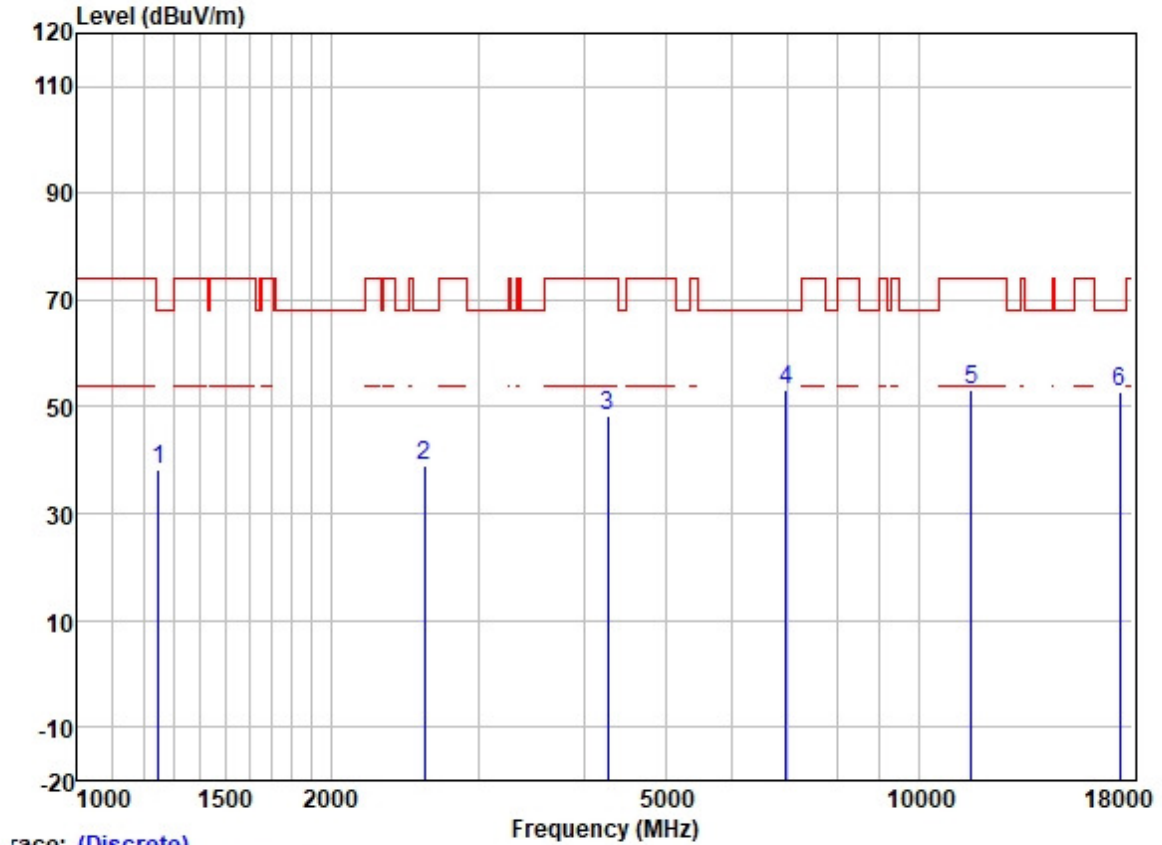


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1249.667	49.36	25.02	2.34	38.35	38.37	68.20	-29.83	VERTICAL	Peak
2	2587.000	45.36	27.61	3.49	37.53	38.93	68.20	-29.27	VERTICAL	Peak
3	4267.237	50.21	30.38	4.63	36.81	48.41	74.00	-25.59	VERTICAL	Peak
4	6964.487	49.51	34.95	5.81	37.23	53.04	68.20	-15.16	VERTICAL	Peak
5	11572.240	42.17	39.78	8.38	37.14	53.19	74.00	-20.81	VERTICAL	Peak
6	17358.360	34.20	43.40	10.39	35.32	52.67	68.20	-15.53	VERTICAL	Peak

Test Mode: 26; Polarity: Horizontal; Modulation: OFDM; Channel: High

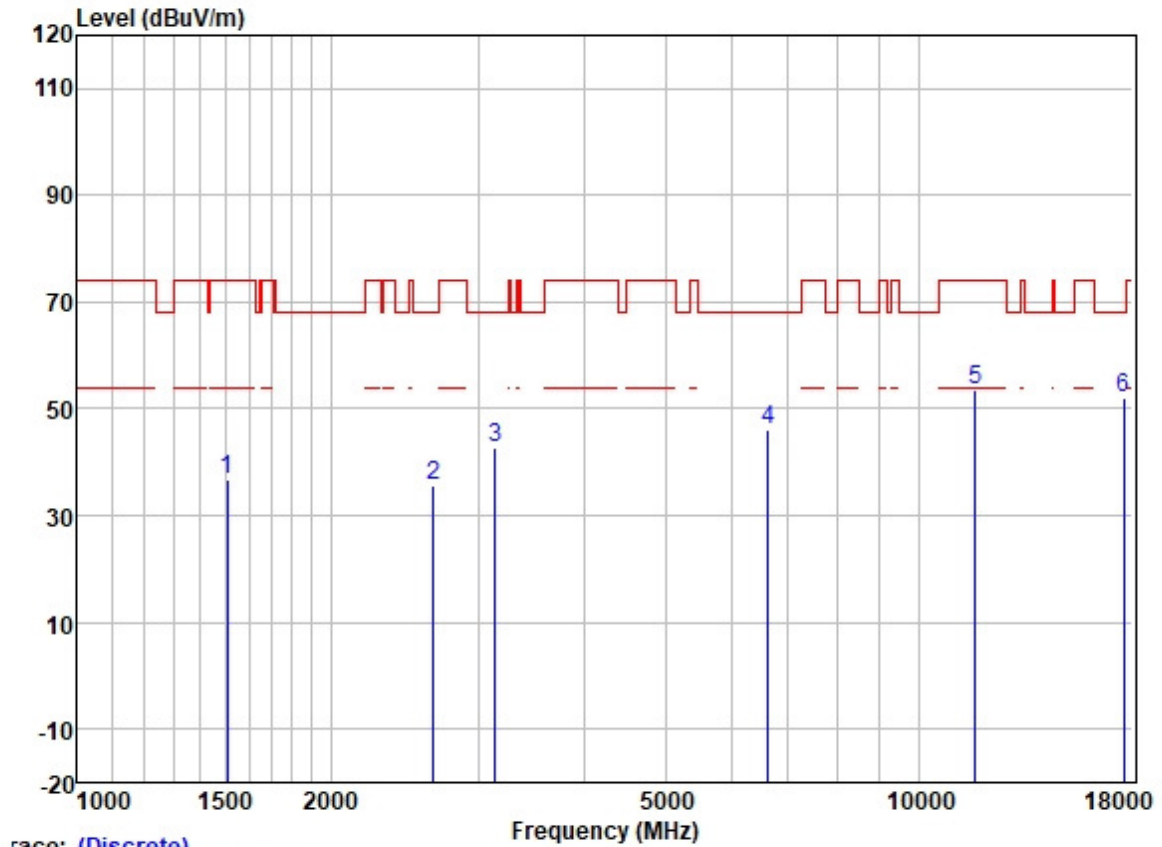


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1507.825	46.48	25.51	2.80	38.10	36.69	74.00	-37.31	HORIZONTAL	Peak
2	2647.000	41.78	27.71	3.54	37.49	35.54	68.20	-32.66	HORIZONTAL	Peak
3	3141.145	47.49	28.51	3.95	37.12	42.83	68.20	-25.37	HORIZONTAL	Peak
4	6628.661	43.05	34.20	5.83	37.05	46.03	68.20	-22.17	HORIZONTAL	Peak
5	11696.240	42.93	39.49	8.32	37.13	53.61	74.00	-20.39	HORIZONTAL	Peak
6	17544.360	32.78	43.97	10.76	35.31	52.20	68.20	-16.00	HORIZONTAL	Peak

Test Mode: 26; Polarity: Vertical; Modulation: OFDM; Channel: High

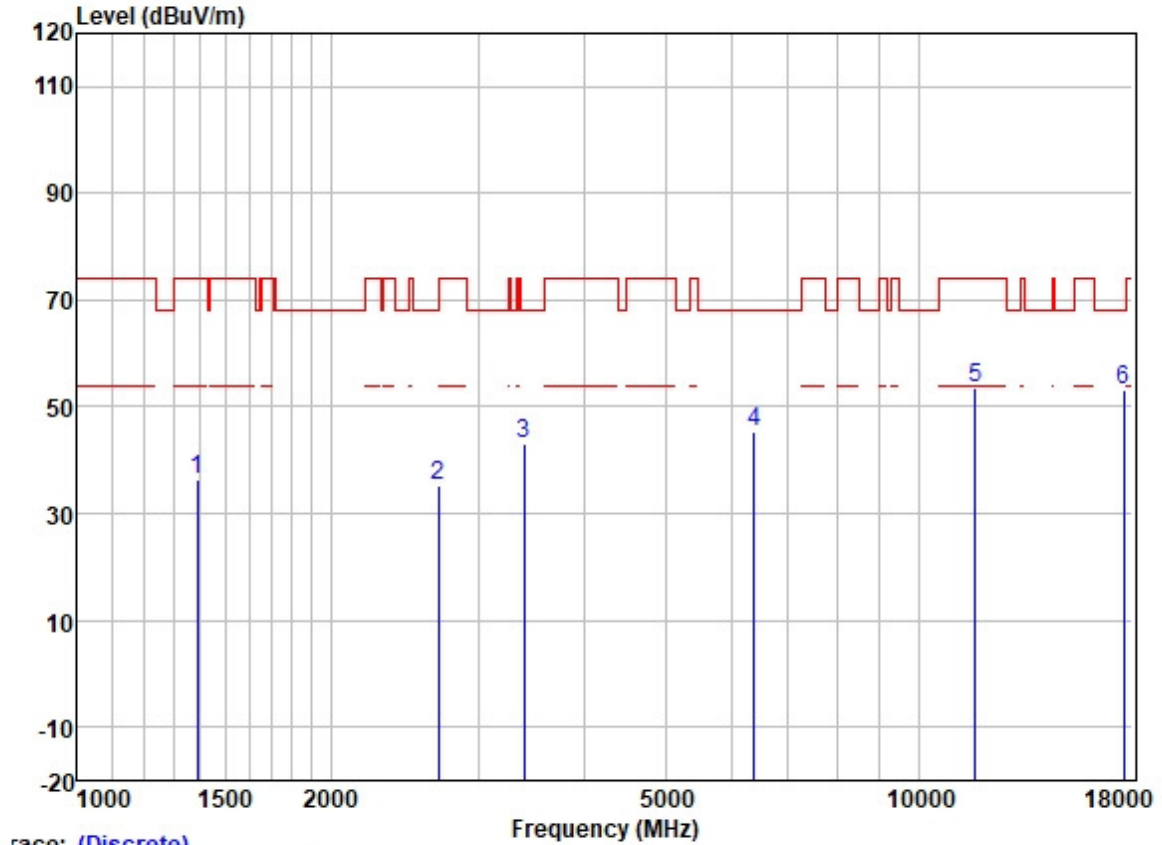


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1387.097	46.73	25.37	2.60	38.25	36.45	74.00	-37.55	VERTICAL	Peak
2	2688.000	41.49	27.80	3.59	37.47	35.41	68.20	-32.79	VERTICAL	Peak
3	3396.098	47.12	28.84	4.10	36.98	43.08	68.20	-25.12	VERTICAL	Peak
4	6384.764	42.73	33.68	5.91	36.98	45.34	68.20	-22.86	VERTICAL	Peak
5	11696.240	42.73	39.49	8.32	37.13	53.41	74.00	-20.59	VERTICAL	Peak
6	17544.360	33.59	43.97	10.76	35.31	53.01	68.20	-15.19	VERTICAL	Peak

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: Low

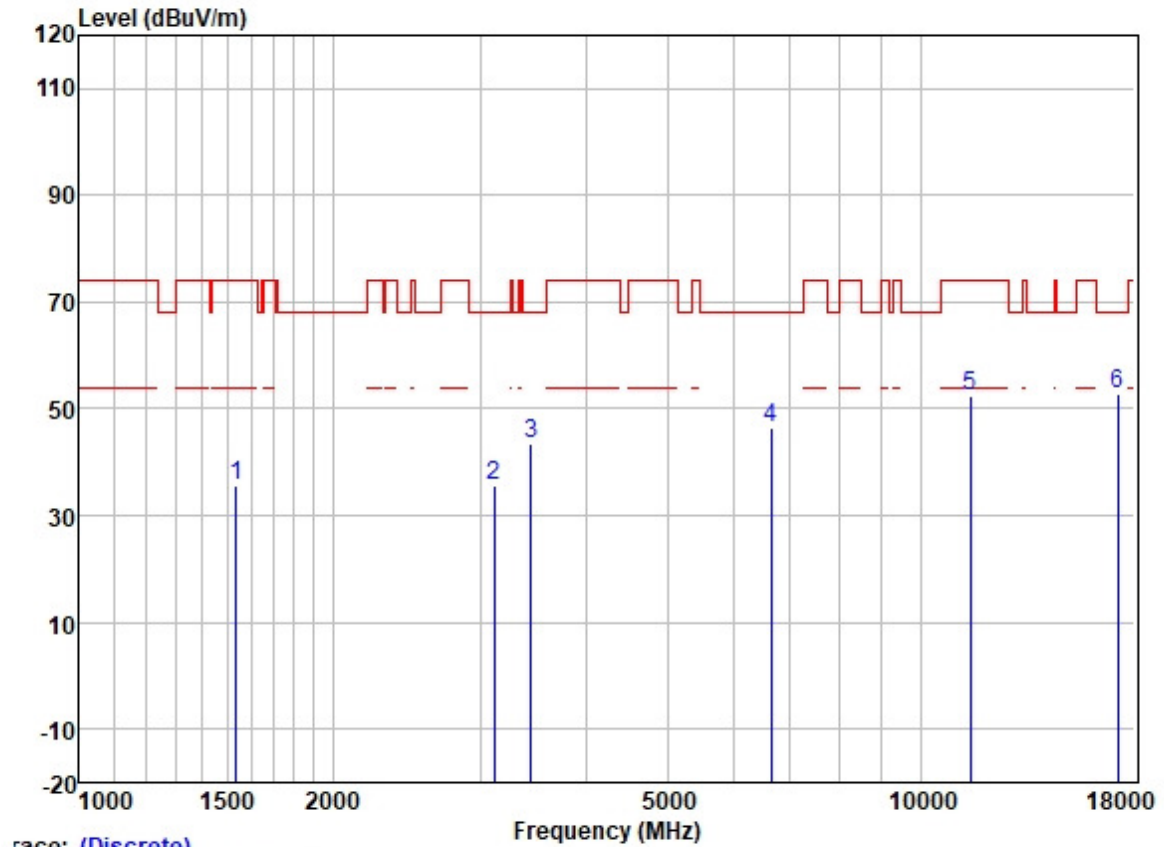


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1536.709	45.41	25.53	2.80	38.07	35.67	74.00	-38.33	HORIZONTAL	Peak
2	3109.175	40.56	28.48	3.91	37.16	35.79	68.20	-32.41	HORIZONTAL	Peak
3	3445.535	47.26	28.87	4.18	36.96	43.35	68.20	-24.85	HORIZONTAL	Peak
4	6648.685	43.34	34.24	5.83	37.06	46.35	68.20	-21.85	HORIZONTAL	Peak
5	11455.000	41.38	39.91	8.37	37.15	52.51	74.00	-21.49	HORIZONTAL	Peak
6	17182.500	35.60	42.79	9.92	35.33	52.98	68.20	-15.22	HORIZONTAL	Peak

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: Low

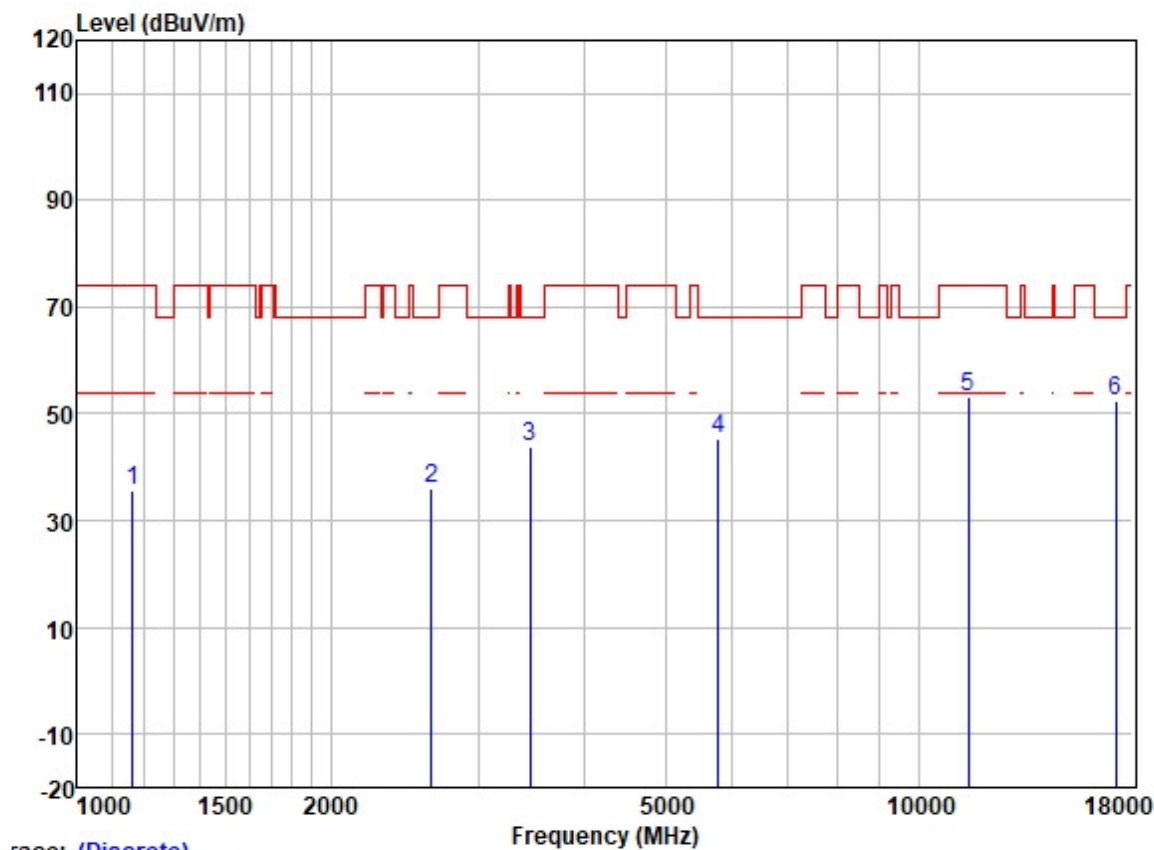


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1163.973	47.00	24.54	2.39	38.40	35.53	74.00	-38.47	VERTICAL	Peak
2	2635.000	42.16	27.68	3.53	37.51	35.86	68.20	-32.34	VERTICAL	Peak
3	3455.508	47.63	28.88	4.20	36.96	43.75	68.20	-24.45	VERTICAL	Peak
4	5778.563	44.03	32.16	6.10	36.89	45.40	68.20	-22.80	VERTICAL	Peak
5	11455.000	42.22	39.91	8.37	37.15	53.35	74.00	-20.65	VERTICAL	Peak
6	17182.500	35.08	42.79	9.92	35.33	52.46	68.20	-15.74	VERTICAL	Peak

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: middle

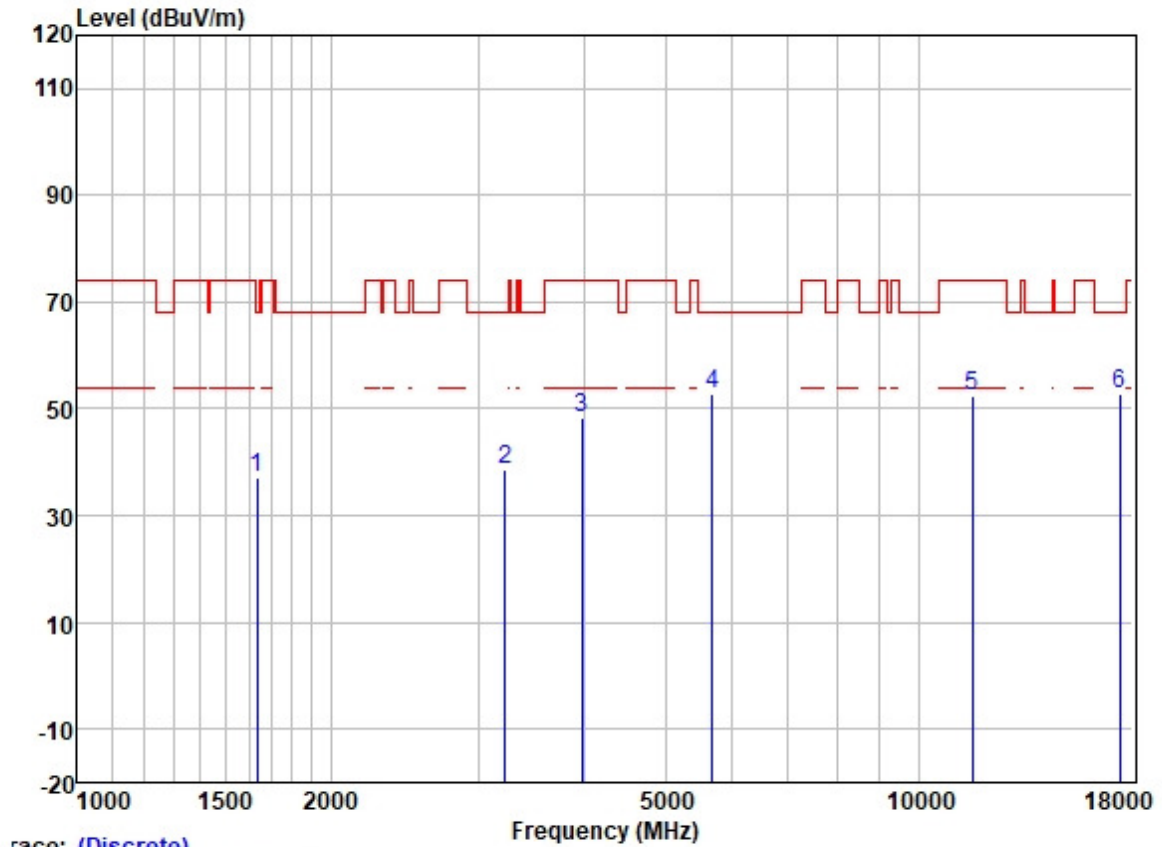


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1635.704	46.48	25.62	2.80	37.95	36.95	68.20	-31.25	HORIZONTAL	Peak
2	3226.347	43.15	28.63	4.01	37.07	38.72	68.20	-29.48	HORIZONTAL	Peak
3	3981.257	50.85	29.78	4.60	36.81	48.42	74.00	-25.58	HORIZONTAL	Peak
4	5681.854	51.43	31.99	6.38	36.89	52.91	68.20	-15.29	HORIZONTAL	Peak
5	11575.000	41.31	39.78	8.38	37.14	52.33	74.00	-21.67	HORIZONTAL	Peak
6	17362.500	33.88	43.57	10.53	35.32	52.66	68.20	-15.54	HORIZONTAL	Peak

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: middle

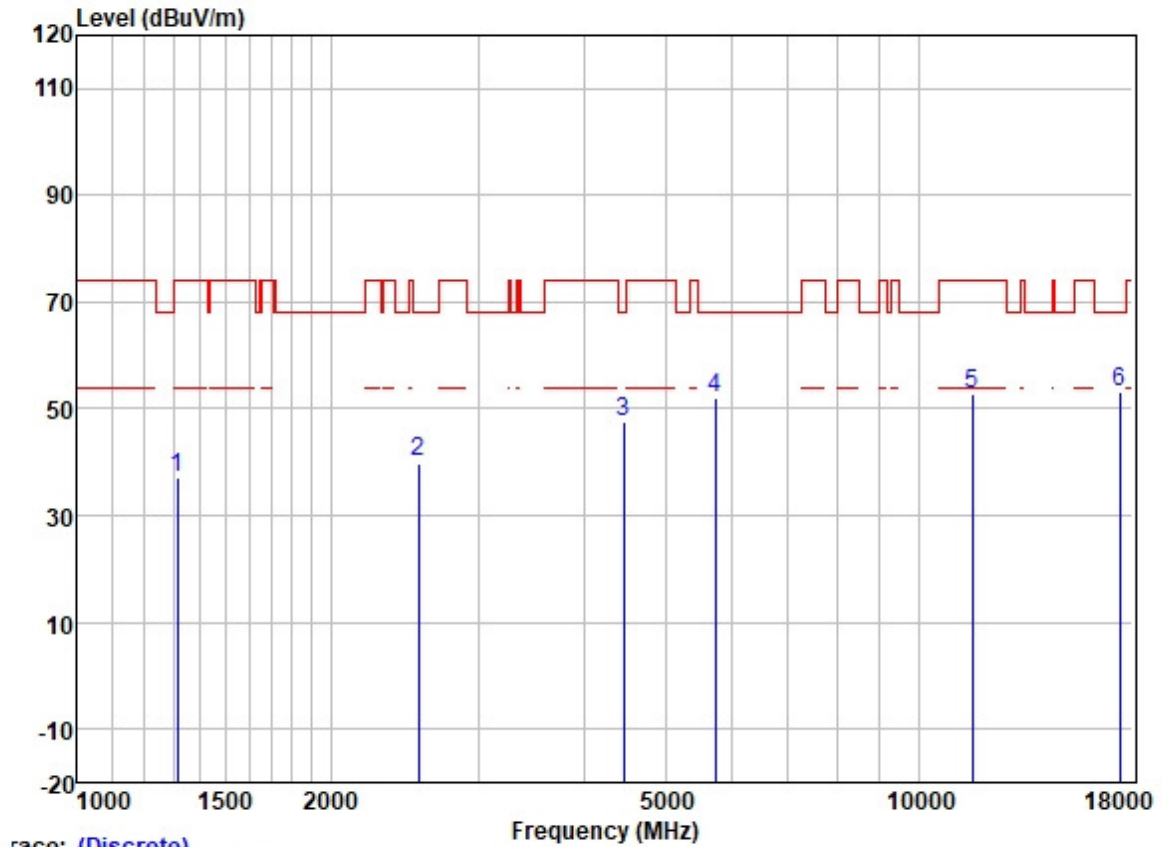


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1315.649	47.71	25.24	2.60	38.29	37.26	74.00	-36.74	VERTICAL Peak
2	2547.000	46.47	27.55	3.44	37.54	39.92	68.20	-28.28	VERTICAL Peak
3	4456.315	48.85	30.75	4.88	36.81	47.67	68.20	-20.53	VERTICAL Peak
4	5733.029	50.55	32.07	6.25	36.89	51.98	68.20	-16.22	VERTICAL Peak
5	11575.000	41.81	39.78	8.38	37.14	52.83	74.00	-21.17	VERTICAL Peak
6	17362.500	34.23	43.57	10.53	35.32	53.01	68.20	-15.19	VERTICAL Peak

Test Mode: 27; Polarity: Horizontal; Modulation: OFDM; Channel: High

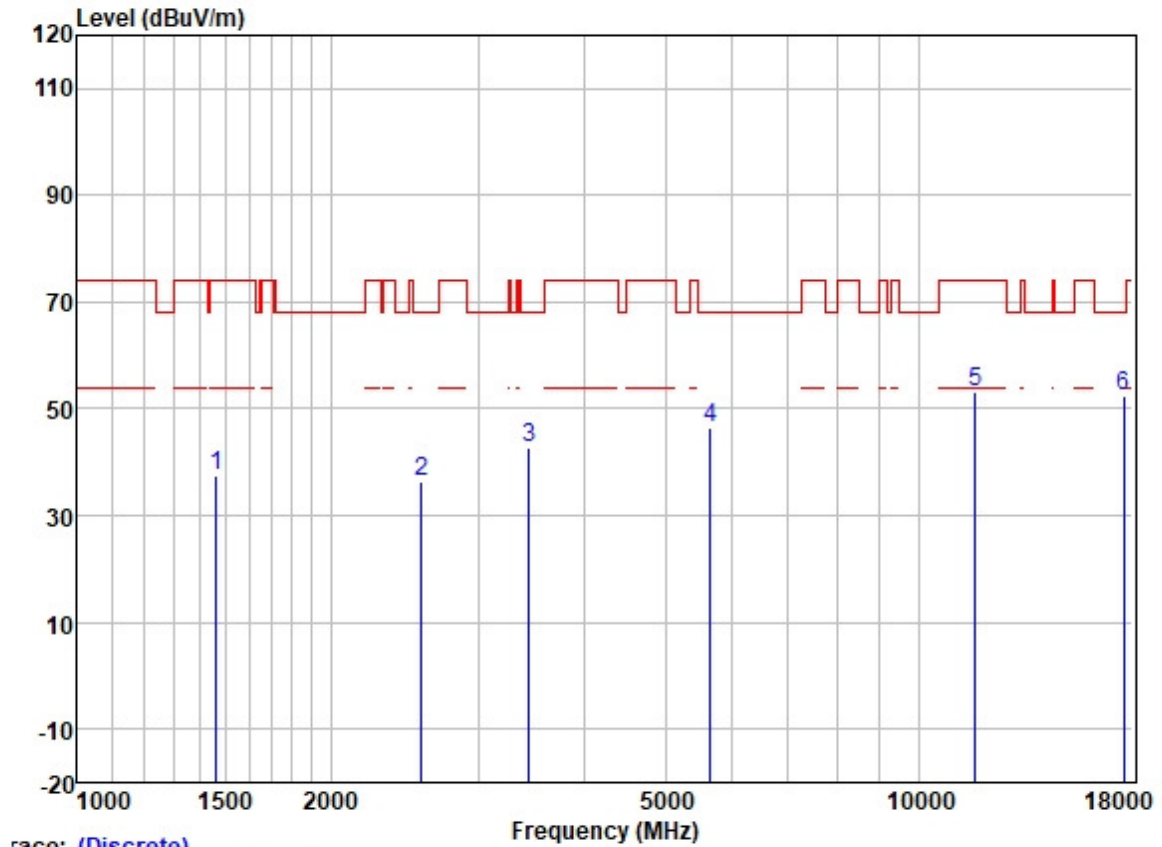


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1461.119	47.63	25.46	2.73	38.17	37.65	74.00	-36.35	HORIZONTAL	Peak
2	2563.000	42.86	27.58	3.47	37.53	36.38	68.20	-31.82	HORIZONTAL	Peak
3	3445.535	46.68	28.87	4.18	36.96	42.77	68.20	-25.43	HORIZONTAL	Peak
4	5651.367	44.91	31.95	6.35	36.89	46.32	68.20	-21.88	HORIZONTAL	Peak
5	11689.000	42.34	39.49	8.32	37.13	53.02	74.00	-20.98	HORIZONTAL	Peak
6	17533.500	33.06	43.97	10.76	35.31	52.48	68.20	-15.72	HORIZONTAL	Peak

Test Mode: 27; Polarity: Vertical; Modulation: OFDM; Channel: High

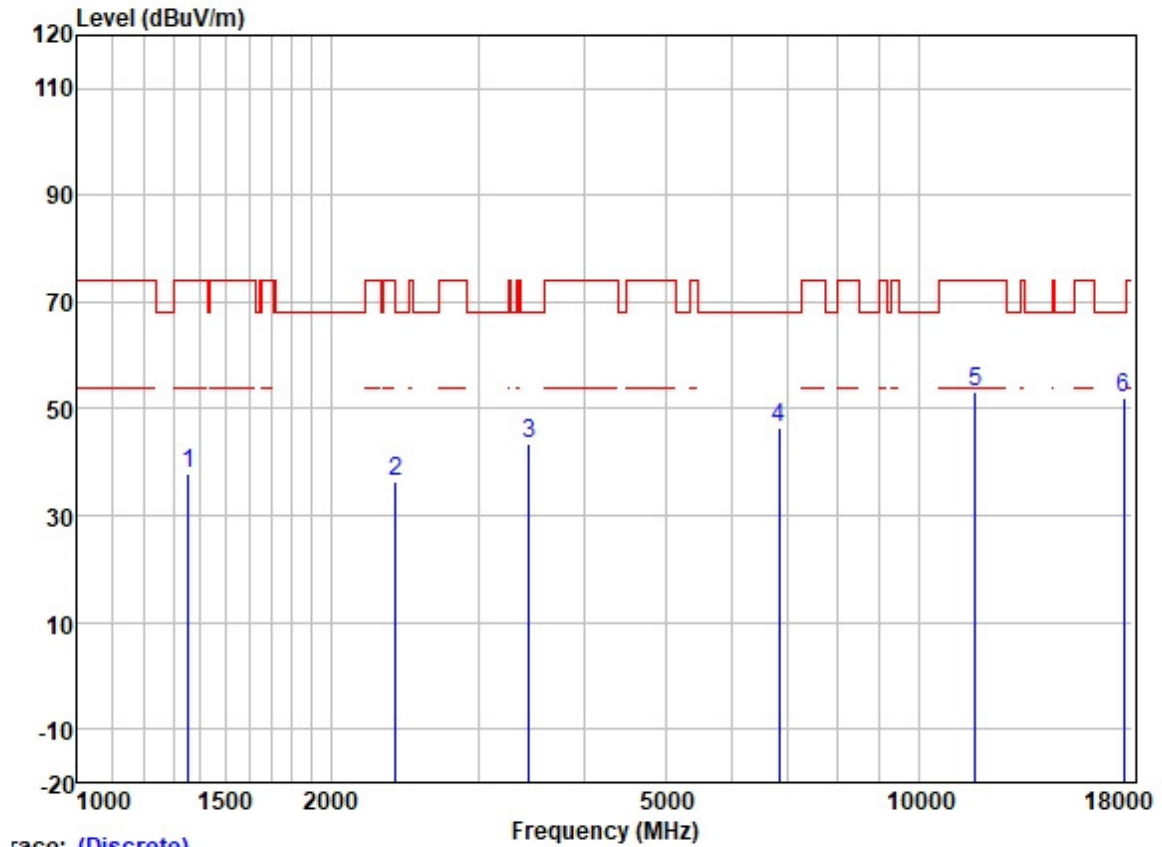

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1355.263	48.28	25.32	2.60	38.27	37.93	74.00	-36.07	VERTICAL	Peak
2	2387.000	42.99	27.33	3.48	37.60	36.20	74.00	-37.80	VERTICAL	Peak
3	3445.535	47.42	28.87	4.18	36.96	43.51	68.20	-24.69	VERTICAL	Peak
4	6820.407	42.93	34.70	5.82	37.13	46.32	68.20	-21.88	VERTICAL	Peak
5	11689.000	42.33	39.49	8.32	37.13	53.01	74.00	-20.99	VERTICAL	Peak
6	17533.500	32.55	43.97	10.76	35.31	51.97	68.20	-16.23	VERTICAL	Peak


Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: Low

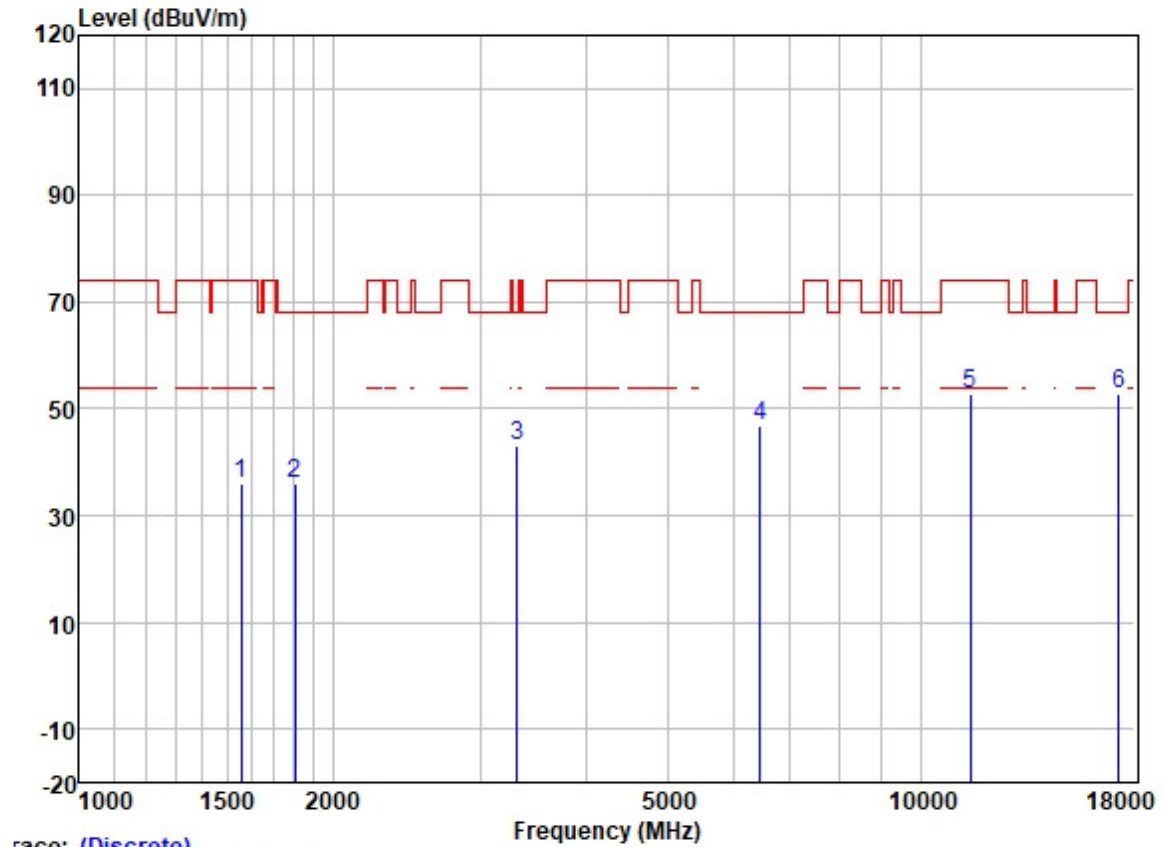

race: (Discrete)

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1559.423	45.61	25.54	2.80	38.03	35.92	74.00	-38.08	HORIZONTAL	Peak
2	1804.490	44.77	25.95	3.00	37.81	35.91	68.20	-32.29	HORIZONTAL	Peak
3	3315.073	47.23	28.77	4.07	37.02	43.05	68.20	-25.15	HORIZONTAL	Peak
4	6448.273	43.96	33.88	5.87	37.00	46.71	68.20	-21.49	HORIZONTAL	Peak
5	11460.400	41.84	39.91	8.37	37.15	52.97	74.00	-21.03	HORIZONTAL	Peak
6	17190.600	35.41	42.79	9.92	35.33	52.79	68.20	-15.41	HORIZONTAL	Peak


Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: Low

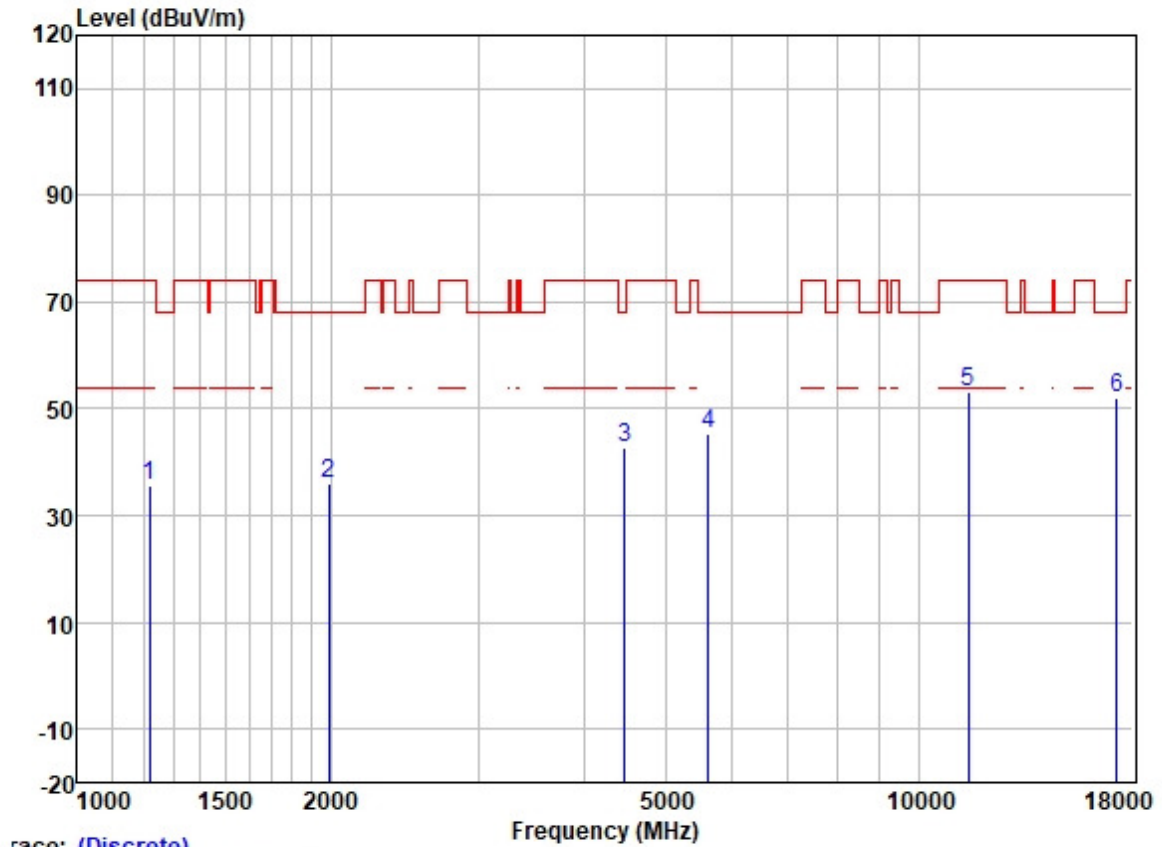

race: (Discrete)


	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1217.321	47.07	24.79	2.32	38.37	35.81	74.00	-38.19	VERTICAL	Peak
2	1989.476	44.69	26.09	3.08	37.70	36.16	68.20	-32.04	VERTICAL	Peak
3	4476.582	43.90	30.78	4.99	36.81	42.86	68.20	-25.34	VERTICAL	Peak
4	5628.075	43.96	31.93	6.33	36.89	45.33	68.20	-22.87	VERTICAL	Peak
5	11460.400	42.07	39.91	8.37	37.15	53.20	74.00	-20.80	VERTICAL	Peak
6	17190.600	34.71	42.79	9.92	35.33	52.09	68.20	-16.11	VERTICAL	Peak

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: middle

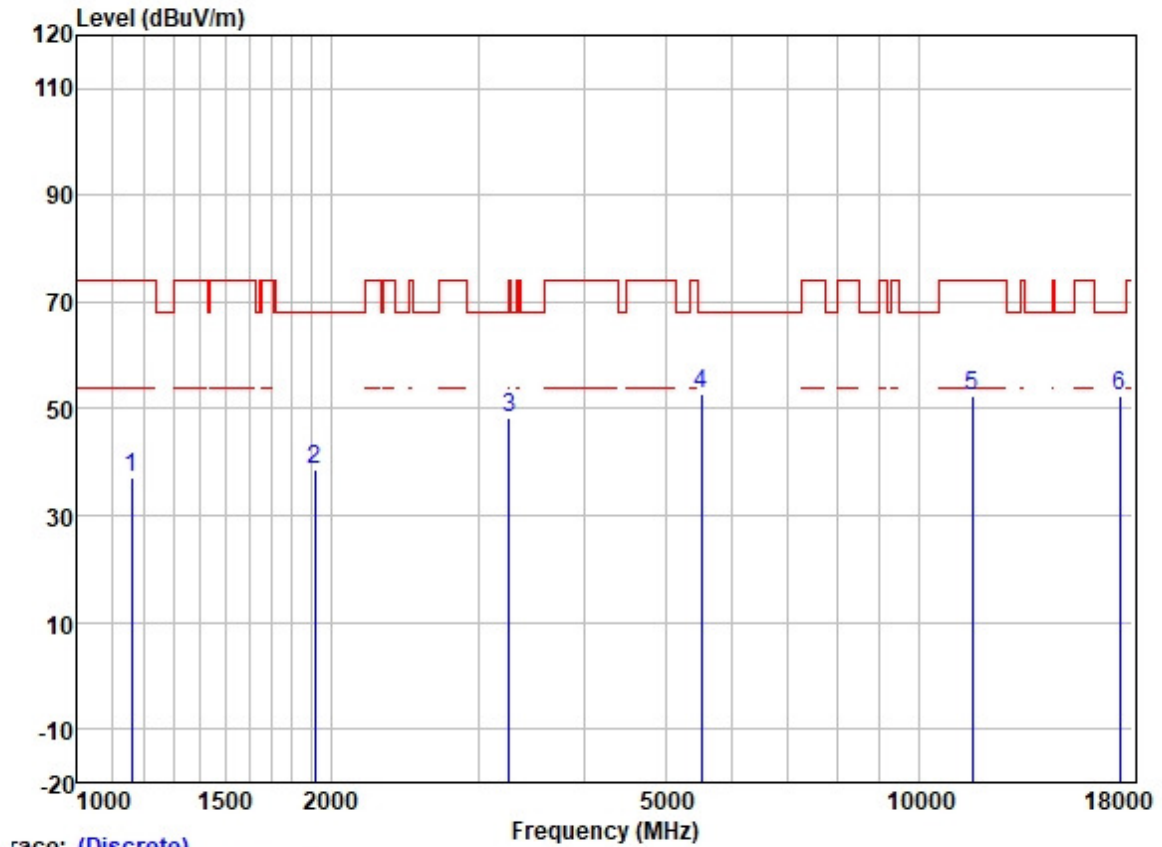

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1161.093	48.61	24.53	2.40	38.42	37.12	74.00	-36.88	HORIZONTAL	Peak
2	1917.476	47.24	26.05	2.93	37.74	38.48	68.20	-29.72	HORIZONTAL	Peak
3	3263.372	52.78	28.70	4.03	37.04	48.47	74.00	-25.53	HORIZONTAL	Peak
4	5516.598	51.41	31.81	6.38	36.89	52.71	68.20	-15.49	HORIZONTAL	Peak
5	11574.400	41.56	39.78	8.38	37.14	52.58	74.00	-21.42	HORIZONTAL	Peak
6	17361.600	33.79	43.57	10.53	35.32	52.57	68.20	-15.63	HORIZONTAL	Peak

Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: middle

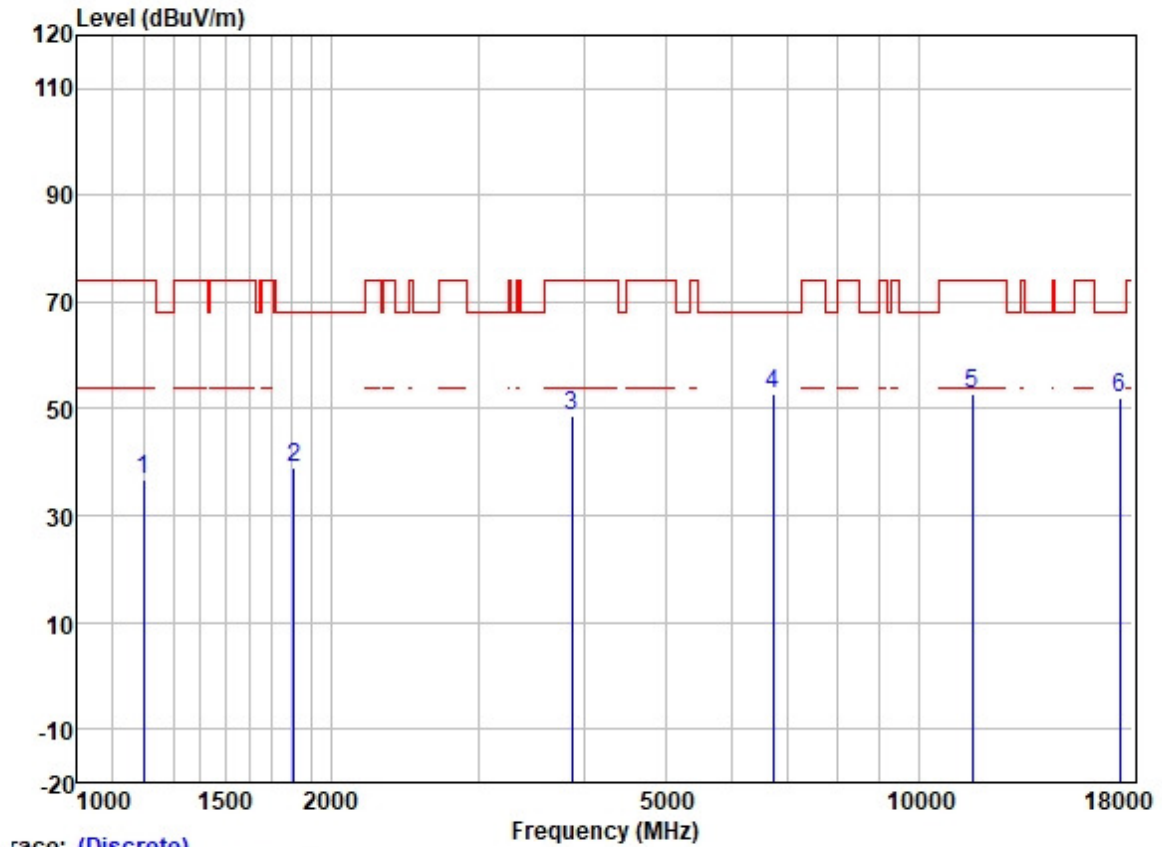

race: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1199.070	48.12	24.68	2.34	38.39	36.75	74.00	-37.25	VERTICAL Peak
2	1807.918	47.83	25.95	2.99	37.81	38.96	68.20	-29.24	VERTICAL Peak
3	3867.495	51.27	29.64	4.60	36.83	48.68	74.00	-25.32	VERTICAL Peak
4	6709.400	49.51	34.44	5.83	37.08	52.70	68.20	-15.50	VERTICAL Peak
5	11574.400	41.61	39.78	8.38	37.14	52.63	74.00	-21.37	VERTICAL Peak
6	17361.600	33.28	43.57	10.53	35.32	52.06	68.20	-16.14	VERTICAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

Test Mode: 28; Polarity: Horizontal; Modulation: OFDM; Channel: High

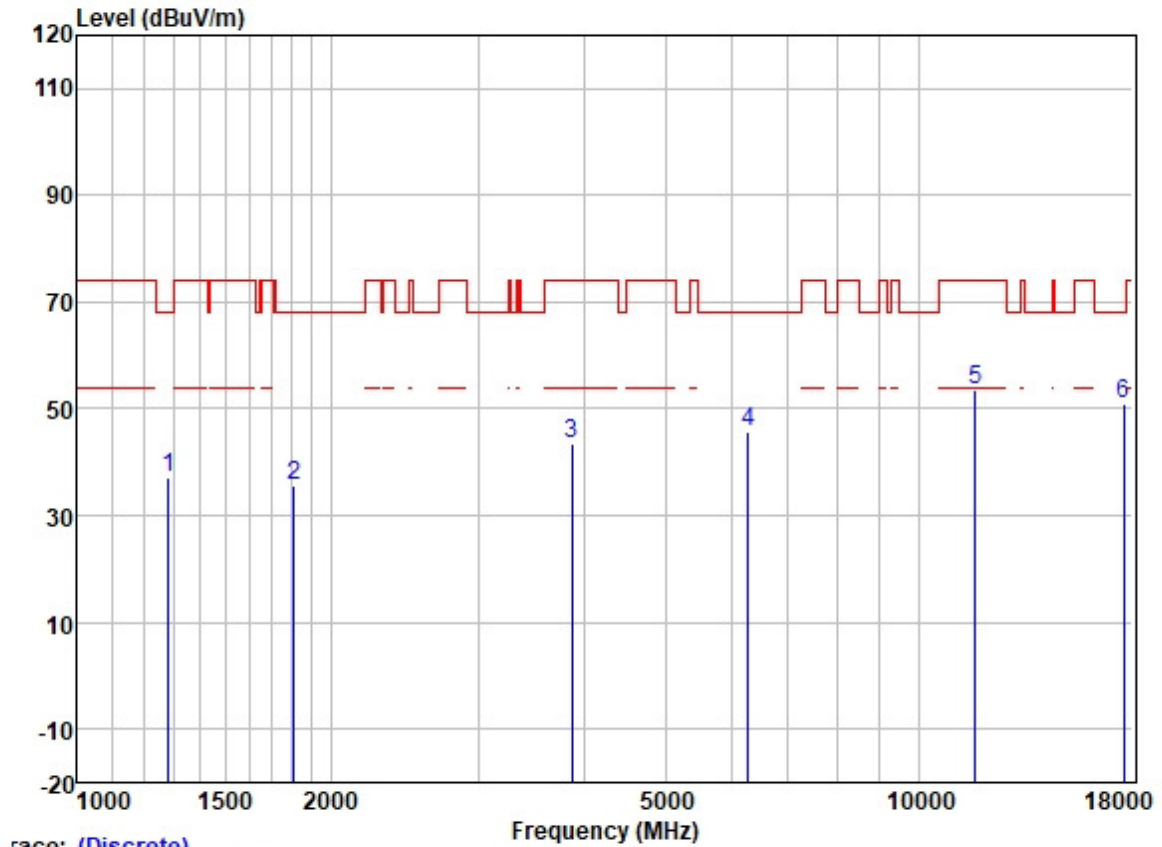

		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1284.409	47.82	25.16	2.53	38.33	37.18	68.20	-31.02	HORIZONTAL	Peak
2	1811.682	44.63	25.96	2.99	37.81	35.77	68.20	-32.43	HORIZONTAL	Peak
3	3876.430	45.87	29.66	4.60	36.83	43.30	74.00	-30.70	HORIZONTAL	Peak
4	6267.914	43.36	33.29	6.00	36.95	45.70	68.20	-22.50	HORIZONTAL	Peak
5	11694.400	42.69	39.49	8.32	37.13	53.37	74.00	-20.63	HORIZONTAL	Peak
6	17541.600	31.48	43.97	10.76	35.31	50.90	68.20	-17.30	HORIZONTAL	Peak


Test Mode: 28; Polarity: Vertical; Modulation: OFDM; Channel: High

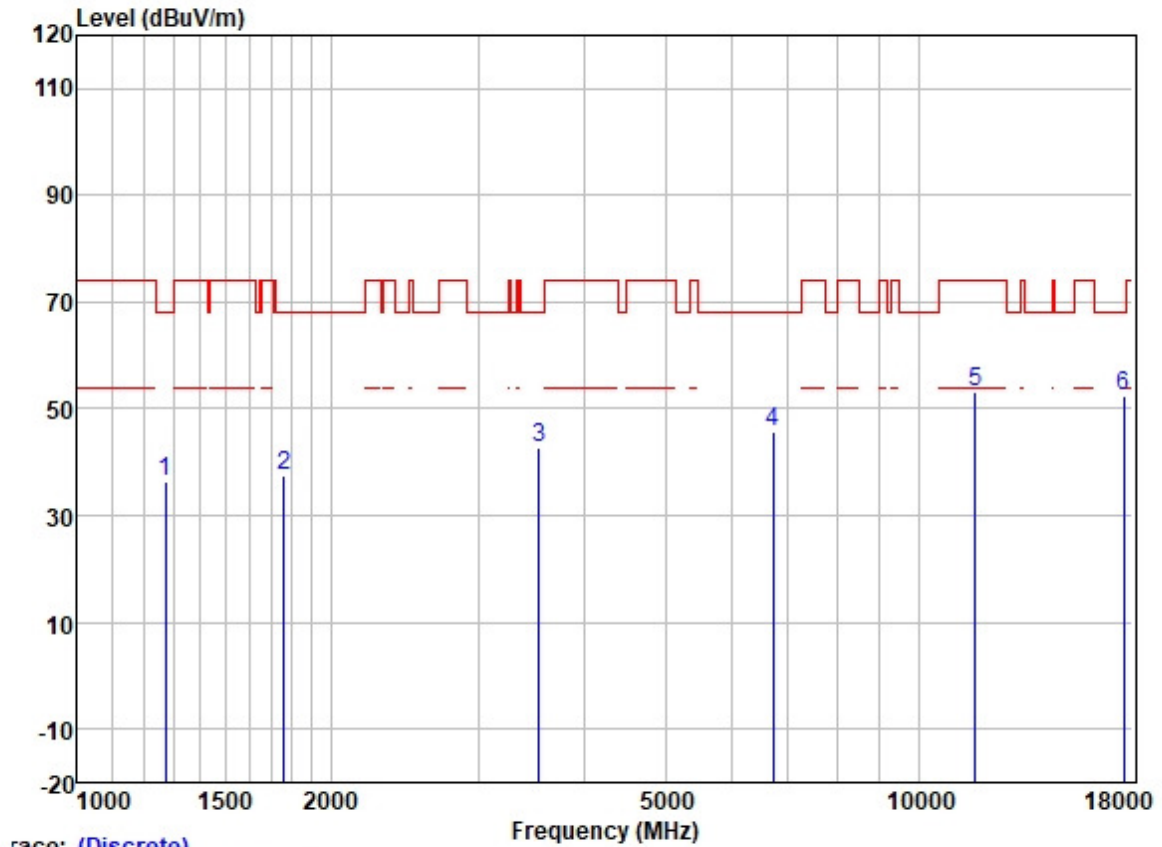

Trace: (Discrete)


	Freq	Read	Antenna	Cable	Preamp	Limit	Over		
	MHz	Level	Factor	Loss	Factor	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	1274.378	47.22	25.12	2.48	38.33	36.49	68.20	-31.71	VERTICAL Peak
2	1760.165	46.36	25.88	2.93	37.85	37.32	68.20	-30.88	VERTICAL Peak
3	3539.493	46.38	28.95	4.40	36.92	42.81	68.20	-25.39	VERTICAL Peak
4	6719.644	42.70	34.44	5.83	37.09	45.88	68.20	-22.32	VERTICAL Peak
5	11694.400	42.55	39.49	8.32	37.13	53.23	74.00	-20.77	VERTICAL Peak
6	17541.600	33.00	43.97	10.76	35.31	52.42	68.20	-15.78	VERTICAL Peak

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: Low

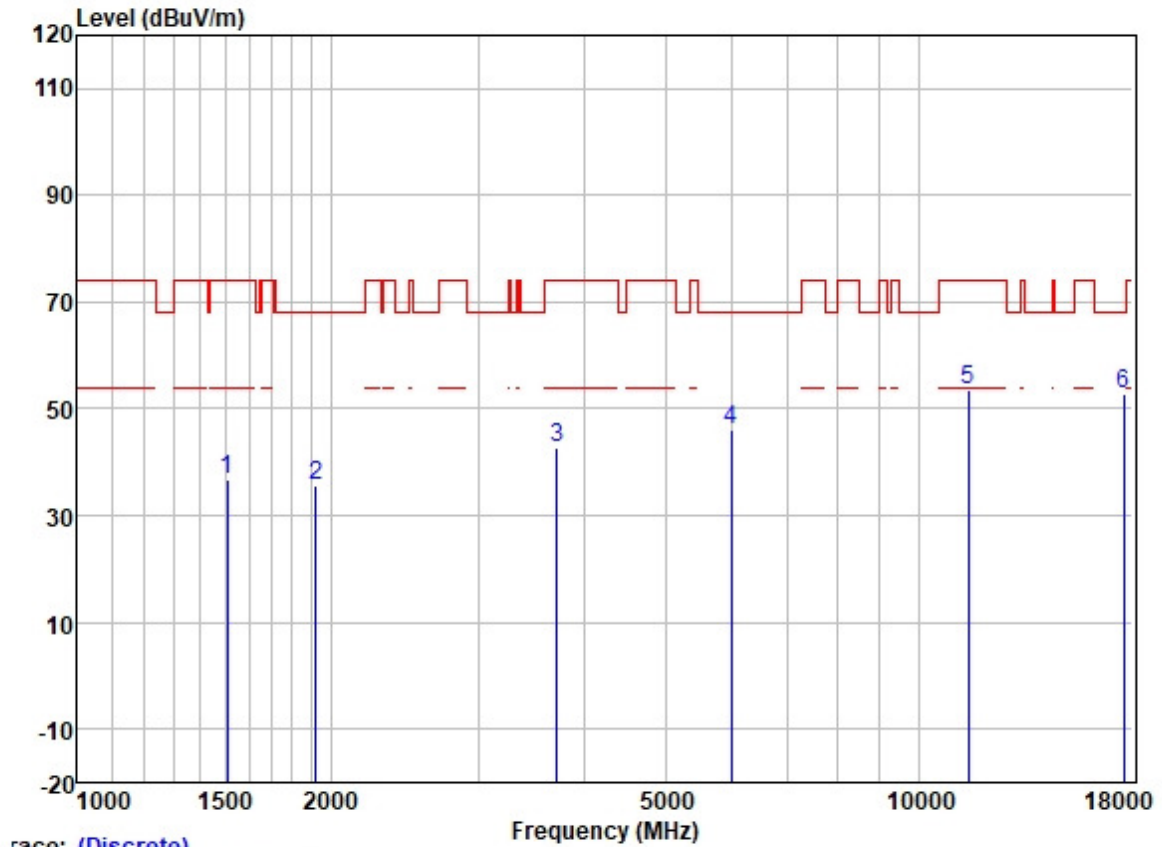


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1507.013	46.45	25.51	2.80	38.10	36.66	74.00	-37.34	HORIZONTAL	Peak
2	1920.761	44.25	26.06	2.94	37.74	35.51	68.20	-32.69	HORIZONTAL	Peak
3	3721.787	45.69	29.31	4.57	36.87	42.70	74.00	-31.30	HORIZONTAL	Peak
4	5991.675	44.35	32.39	6.15	36.90	45.99	68.20	-22.21	HORIZONTAL	Peak
5	11461.000	42.37	39.91	8.37	37.15	53.50	74.00	-20.50	HORIZONTAL	Peak
6	17533.500	33.21	43.97	10.76	35.31	52.63	68.20	-15.57	HORIZONTAL	Peak

Test Mode: 29; Polarity: Vertical; Modulation: OFDM; Channel: Low

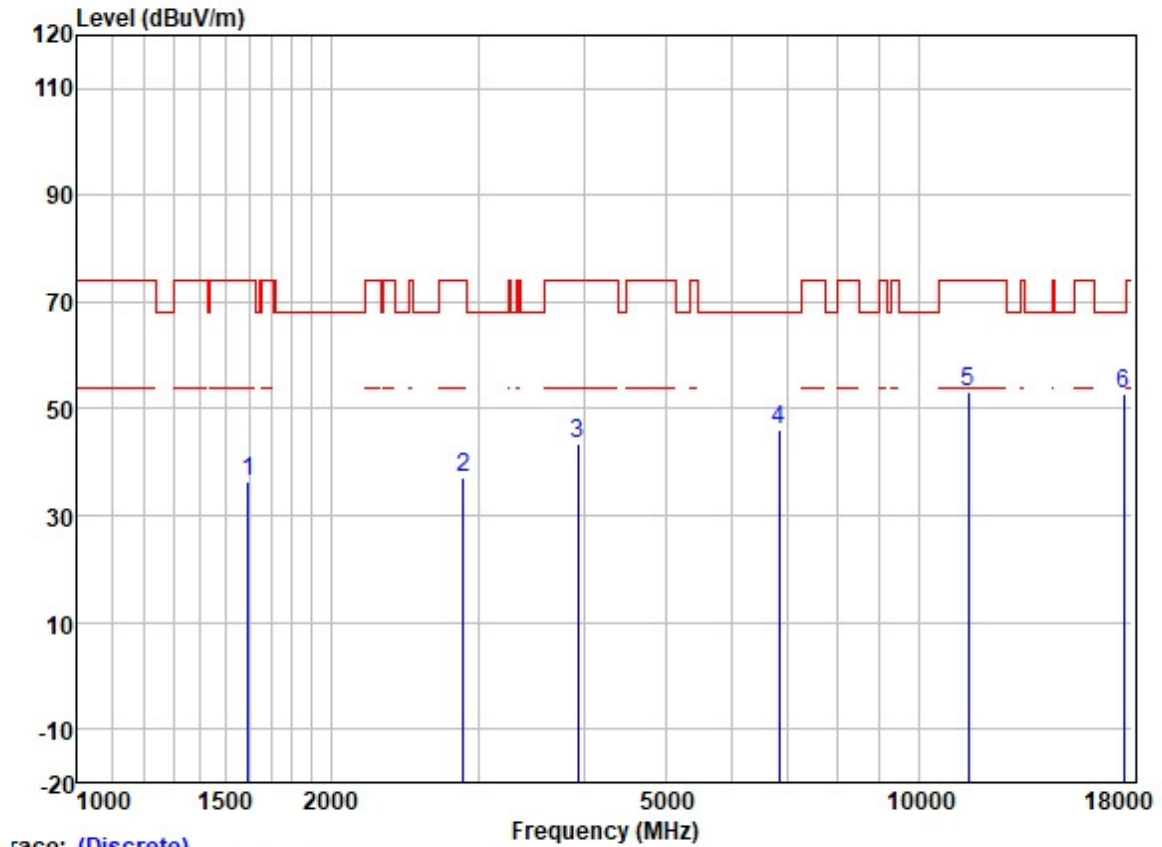


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1597.096	46.09	25.58	2.80	37.98	36.49	74.00	-37.51	VERTICAL	Peak
2	2876.000	42.67	28.26	3.70	37.36	37.27	74.00	-36.73	VERTICAL	Peak
3	3938.461	45.99	29.73	4.60	36.81	43.51	74.00	-30.49	VERTICAL	Peak
4	6823.154	42.59	34.70	5.82	37.13	45.98	68.20	-22.22	VERTICAL	Peak
5	11461.000	41.89	39.91	8.37	37.15	53.02	74.00	-20.98	VERTICAL	Peak
6	17533.500	33.48	43.97	10.76	35.31	52.90	68.20	-15.30	VERTICAL	Peak

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: middle

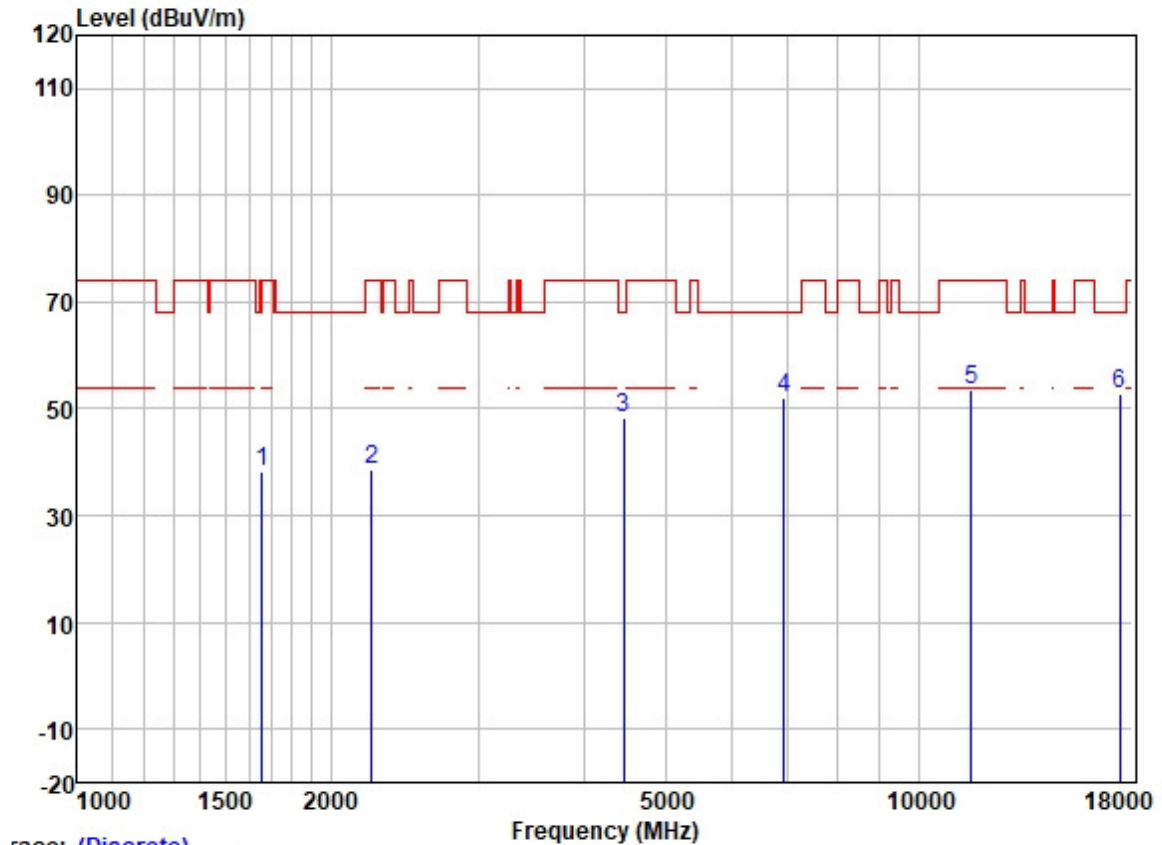


		Read	Antenna	Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1655.983	47.66	25.65	2.80	37.93	38.18	68.20	-30.02	HORIZONTAL	Peak
2	2236.172	46.37	26.80	3.23	37.64	38.76	74.00	-35.24	HORIZONTAL	Peak
3	4461.383	49.47	30.75	4.88	36.81	48.29	68.20	-19.91	HORIZONTAL	Peak
4	6916.484	48.56	34.89	5.81	37.19	52.07	68.20	-16.13	HORIZONTAL	Peak
5	11573.000	42.39	39.78	8.38	37.14	53.41	74.00	-20.59	HORIZONTAL	Peak
6	17359.500	34.35	43.40	10.39	35.32	52.82	68.20	-15.38	HORIZONTAL	Peak

Test Mode: 29; Polarity: Vertical; Modulation: OFDM; Channel: middle

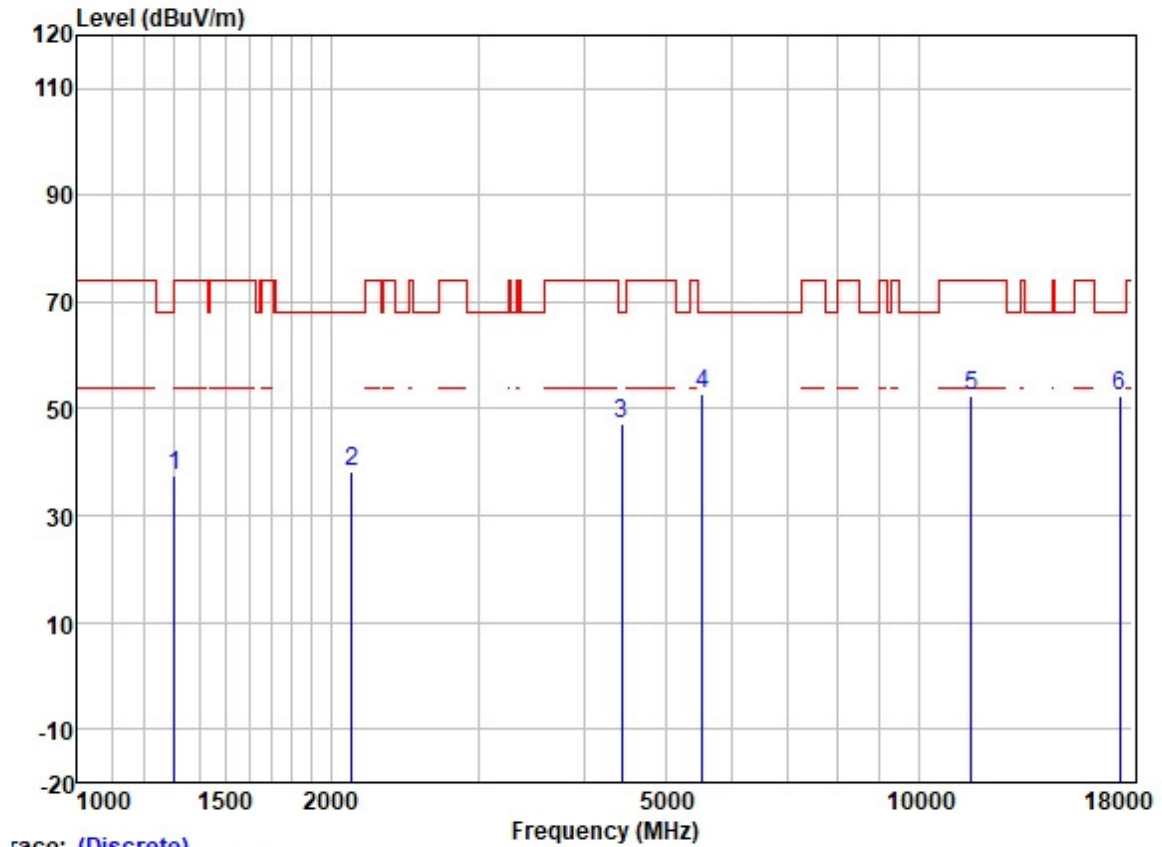


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1302.693	48.17	25.20	2.60	38.31	37.66	74.00	-36.34	VERTICAL	Peak
2	2117.937	46.24	26.34	3.17	37.67	38.08	68.20	-30.12	VERTICAL	Peak
3	4440.305	48.50	30.73	4.83	36.81	47.25	68.20	-20.95	VERTICAL	Peak
4	5536.251	51.36	31.83	6.37	36.89	52.67	68.20	-15.53	VERTICAL	Peak
5	11573.000	41.55	39.78	8.38	37.14	52.57	74.00	-21.43	VERTICAL	Peak
6	17359.500	34.04	43.40	10.39	35.32	52.51	68.20	-15.69	VERTICAL	Peak

Test Mode: 29; Polarity: Horizontal; Modulation: OFDM; Channel: High

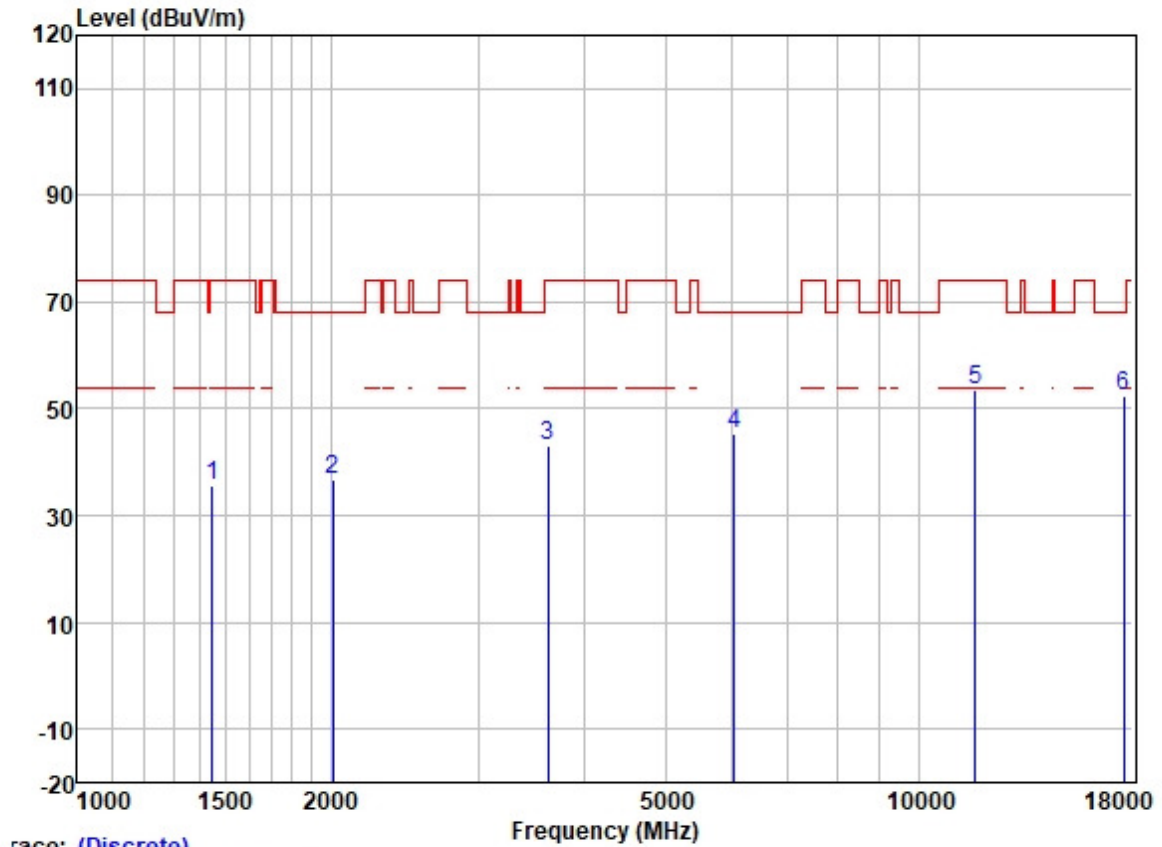


		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1447.565	45.69	25.45	2.70	38.17	35.67	74.00	-38.33	HORIZONTAL	Peak
2	2013.231	45.12	26.12	3.10	37.69	36.65	68.20	-31.55	HORIZONTAL	Peak
3	3626.512	46.30	29.09	4.51	36.90	43.00	74.00	-31.00	HORIZONTAL	Peak
4	6031.736	43.68	32.48	6.18	36.90	45.44	68.20	-22.76	HORIZONTAL	Peak
5	11689.000	42.94	39.49	8.32	37.13	53.62	74.00	-20.38	HORIZONTAL	Peak
6	17533.500	32.99	43.97	10.76	35.31	52.41	68.20	-15.79	HORIZONTAL	Peak

Test Mode: 29; Polarity: Vertical; Modulation:OFDM; Channel:High

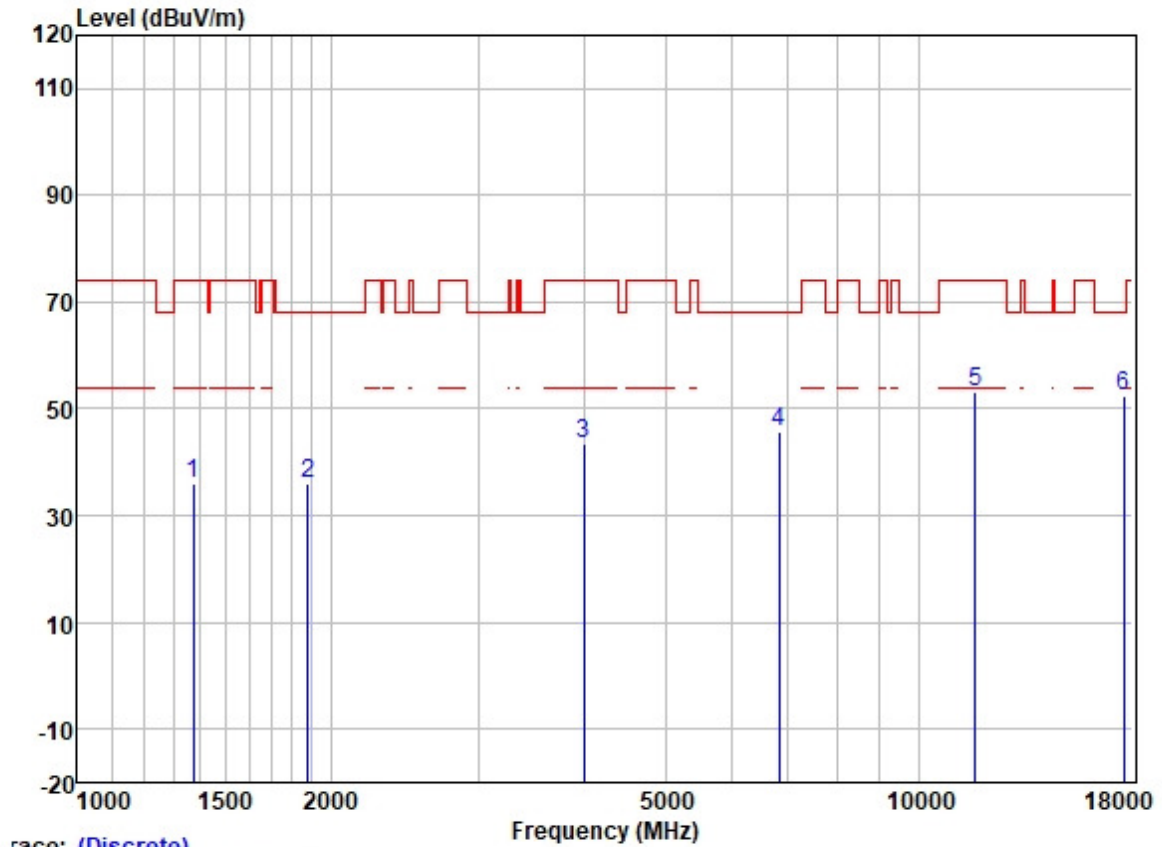

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1373.938	46.14	25.35	2.60	38.25	35.84	74.00	-38.16	VERTICAL	Peak
2	1880.489	44.96	26.02	2.92	37.77	36.13	68.20	-32.07	VERTICAL	Peak
3	3997.304	45.91	29.79	4.60	36.80	43.50	74.00	-30.50	VERTICAL	Peak
4	6831.762	42.15	34.74	5.82	37.13	45.58	68.20	-22.62	VERTICAL	Peak
5	11689.000	42.65	39.49	8.32	37.13	53.33	74.00	-20.67	VERTICAL	Peak
6	17533.500	33.09	43.97	10.76	35.31	52.51	68.20	-15.69	VERTICAL	Peak

Test Mode: 30; Polarity: Horizontal; Modulation: OFDM; Channel: Low

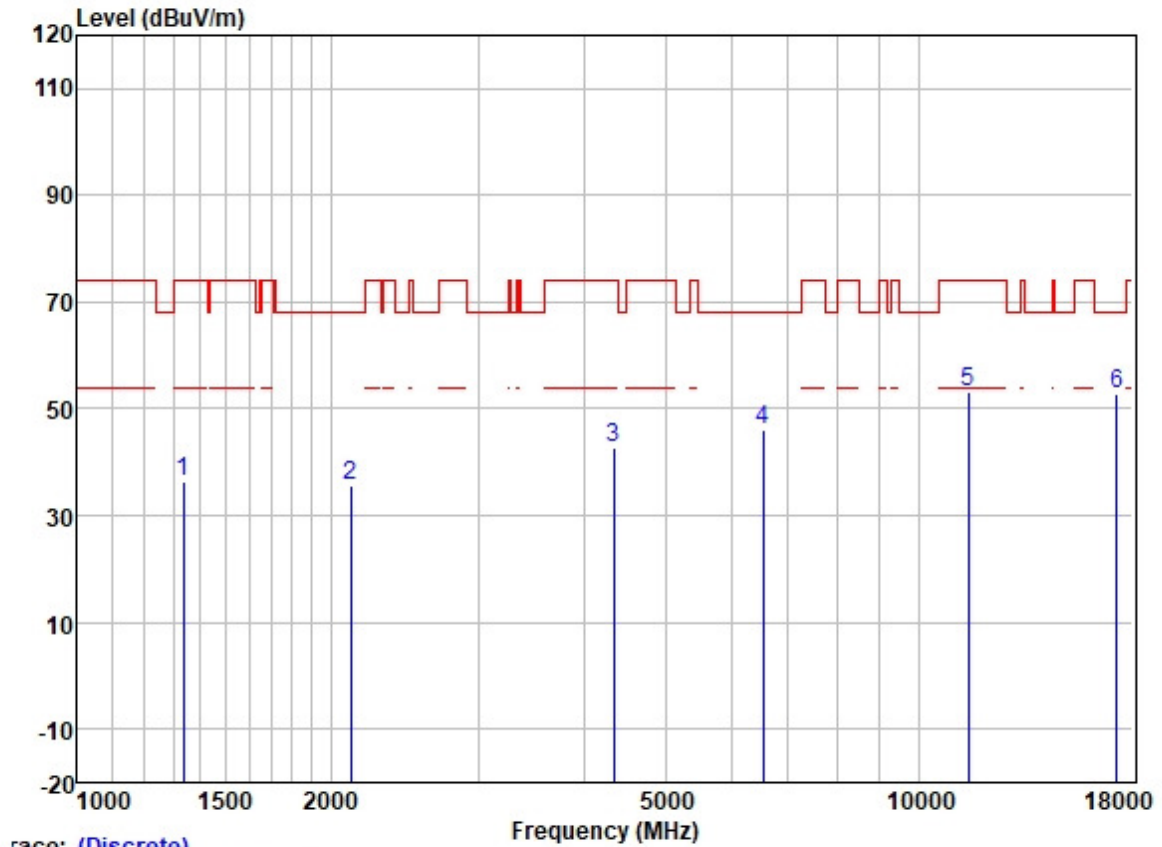

Trace: (Discrete)


	Read	Antenna	Cable	Preamp		Limit	Over		
Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1338.050	46.60	25.29	2.60	38.27	36.22	74.00	-37.78	HORIZONTAL Peak
2	2112.597	43.88	26.32	3.16	37.67	35.69	68.20	-32.51	HORIZONTAL Peak
3	4341.933	44.20	30.57	4.67	36.81	42.63	74.00	-31.37	HORIZONTAL Peak
4	6537.675	43.14	34.06	5.84	37.03	46.01	68.20	-22.19	HORIZONTAL Peak
5	11471.000	42.21	39.91	8.37	37.15	53.34	74.00	-20.66	HORIZONTAL Peak
6	17206.500	35.51	42.79	9.92	35.33	52.89	68.20	-15.31	HORIZONTAL Peak



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


Test Mode: 30; Polarity: Vertical; Modulation: OFDM; Channel: Low

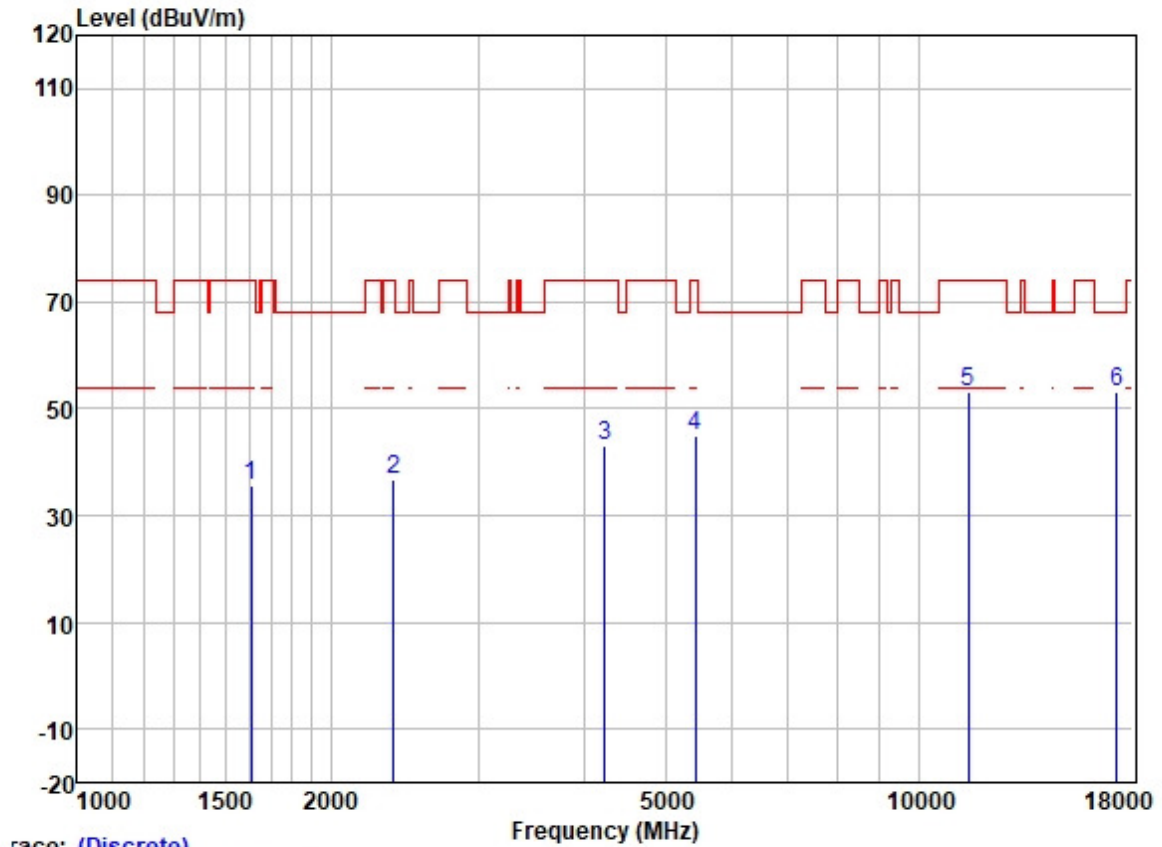

race: (Discrete)

	Freq	ReadAntenna	Cable	Preamp		Limit	Over			
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1608.533	45.33	25.59	2.80	37.98	35.74	74.00	-38.26	VERTICAL	Peak
2	2376.361	43.52	27.30	3.45	37.60	36.67	74.00	-37.33	VERTICAL	Peak
3	4232.843	45.05	30.26	4.61	36.81	43.11	74.00	-30.89	VERTICAL	Peak
4	5427.189	43.99	31.79	6.13	36.88	45.03	74.00	-28.97	VERTICAL	Peak
5	11471.000	42.18	39.91	8.37	37.15	53.31	74.00	-20.69	VERTICAL	Peak
6	17206.500	35.80	42.79	9.92	35.33	53.18	68.20	-15.02	VERTICAL	Peak

Test Mode: 30; Polarity: Horizontal; Modulation:OFDM; Channel:middle

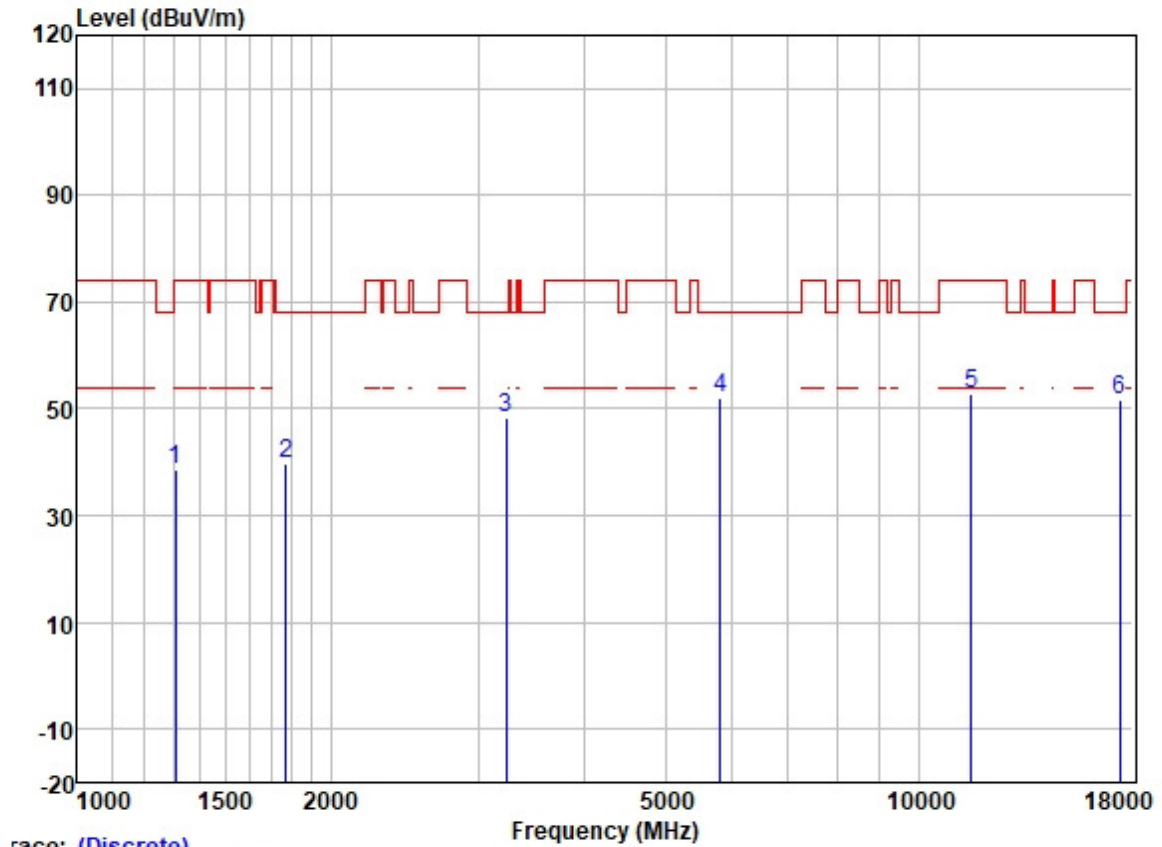

		ReadAntenna		Cable	Preamp		Limit	Over		
	Freq	Level	Factor	Loss	Factor	Level	Line	Limit	Pol/Phase	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB		
1	1309.033	48.94	25.22	2.60	38.31	38.45	74.00	-35.55	HORIZONTAL	Peak
2	1769.959	48.58	25.90	2.95	37.83	39.60	68.20	-28.60	HORIZONTAL	Peak
3	3238.011	52.69	28.67	4.02	37.06	48.32	68.20	-19.88	HORIZONTAL	Peak
4	5806.184	50.78	32.21	6.07	36.89	52.17	68.20	-16.03	HORIZONTAL	Peak
5	11573.000	41.96	39.78	8.38	37.14	52.98	74.00	-21.02	HORIZONTAL	Peak
6	17359.500	33.35	43.40	10.39	35.32	51.82	68.20	-16.38	HORIZONTAL	Peak