



FCC PART 15.407 TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave,
Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-RMS11902

Report Type: Original Report	Product Name: RoboMaster S1
Report Number:	RDG190215001-00C
Report Date:	2019-04-10
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “**”.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE.....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY.....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY.....	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION.....	5
EUT EXERCISE SOFTWARE.....	5
EQUIPMENT MODIFICATIONS.....	8
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	8
BLOCK DIAGRAM OF TEST SETUP.....	8
SUMMARY OF TEST RESULTS	9
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	10
APPLICABLE STANDARD.....	10
FCC §15.203 – ANTENNA REQUIREMENT	11
APPLICABLE STANDARD.....	11
ANTENNA CONNECTOR CONSTRUCTION.....	11
FCC §15.209, §15.205 & §15.407(b) –UNWANTED EMISSION	12
APPLICABLE STANDARD.....	12
EUT SETUP.....	13
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	14
TEST PROCEDURE.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	15
TEST EQUIPMENT LIST AND DETAILS.....	16
TEST DATA.....	16
FCC §15.407(a)(e) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH	28
APPLICABLE STANDARD.....	28
TEST EQUIPMENT LIST AND DETAILS.....	28
TEST PROCEDURE.....	28
TEST DATA.....	28
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER	46
APPLICABLE STANDARD.....	46
TEST EQUIPMENT LIST AND DETAILS.....	47
TEST PROCEDURE.....	47
TEST DATA.....	47
FCC §15.407(a) - POWER SPECTRAL DENSITY	49
APPLICABLE STANDARD.....	49
TEST PROCEDURE.....	50
TEST EQUIPMENT LIST AND DETAILS.....	50
TEST DATA.....	50

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	RoboMaster S1
EUT Model:	RMS1
Operation Frequency:	5180-5240(802.11a/n ht20) 5190-5230 MHz(802.11n ht40) 5745-5825(802.11a/n ht20) 5755-5795 MHz(802.11n ht40)
Maximum Peak Output Power (Conducted):	5150-5250 MHz:24.68 dBm 5725-5850 MHz:24.60 dBm
Modulation Type:	OFDM
Rated Input Voltage:	DC 10.8V from battery
External Dimension:	320mm(L)* 240mm(W)* 270mm(H)
Serial Number:	190215001
EUT Received Date:	2019-02-08

Objective

This type approval report is prepared on behalf of **SZ DJI TECHNOLOGY CO., LTD** in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: SS3-RMS11902.
FCC Part 15B JAB submissions with FCC ID: SS3-RMS11902.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system only supports 802.11a/n ht20/n ht40 in 5.2 GHz and 5.8GHz band.

For 5150~5250 MHz band, 6 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240

For 802.11a, 802.11n ht20 Channel 36, 40 and 48 was tested, for 802.11n ht40 Channel 38, 46 were tested.

For 5725~5850MHz band, 7 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	159	5795
151	5755	161	5805
153	5765	165	5825
157	5785	/	/

For 802.11a, 802.11n ht20 Channel 149, 157 and 165 was tested, for 802.11n ht40 Channel 151, 159 was tested.


EUT Exercise Software

The software “Certification.exe” was used for testing, which was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations. The device supports SISO and MIMO in all modes, per pretest, MIMO mode was the worst mode and reported for 802.11n modes. The maximum power was configured as below table, that provided by the manufacturer:

Band	Mode	Test Frequency (MHz)	Data rate	Power level Setting
5150-5250 MHz	802.11a	5180	6 Mbps	4
		5200	6 Mbps	6
		5240	6 Mbps	7
	802.11n ht20	5180	MCS8	4
		5200	MCS8	4
		5240	MCS8	4
802.11n ht40	5190	MCS8	2	
	5230	MCS8	5	
5725-5850 MHz	802.11a	5745	6 Mbps	4
		5785	6 Mbps	4
		5825	6 Mbps	5
	802.11n ht20	5745	MCS8	1
		5785	MCS8	1
		5825	MCS8	1
	802.11n Ht40	5755	MCS8	4
		5795	MCS8	5


The duty cycle as below:

Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle(x) (%)
802.11 a	2.063	2.106	97.96
802.11n ht20	0.981	1.026	95.61
802.11n ht40	0.506	0.535	94.58

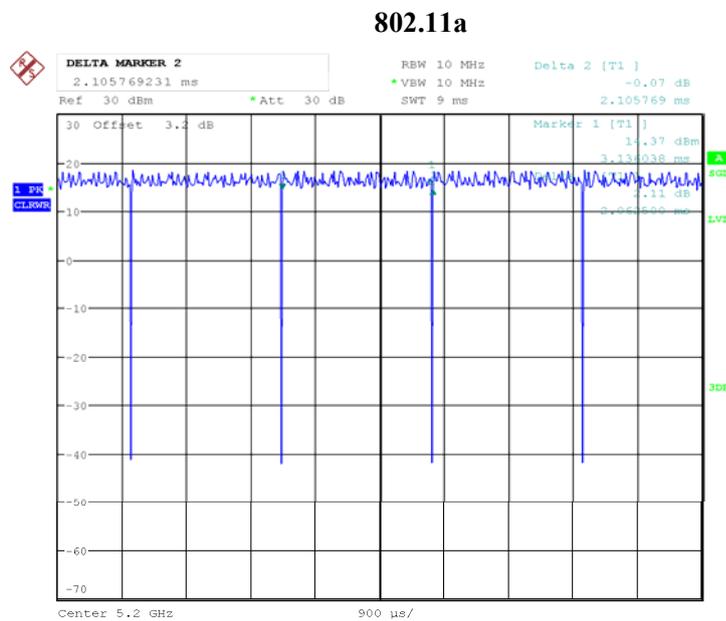


Date: 19.FEB.2019 20:49:32

802.11n ht20

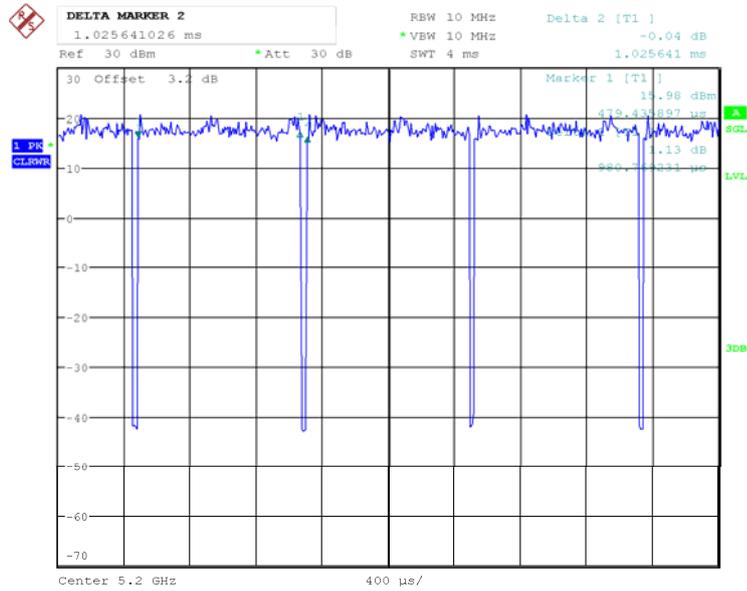

Date: 19.FEB.2019 20:50:33

802.11n ht40

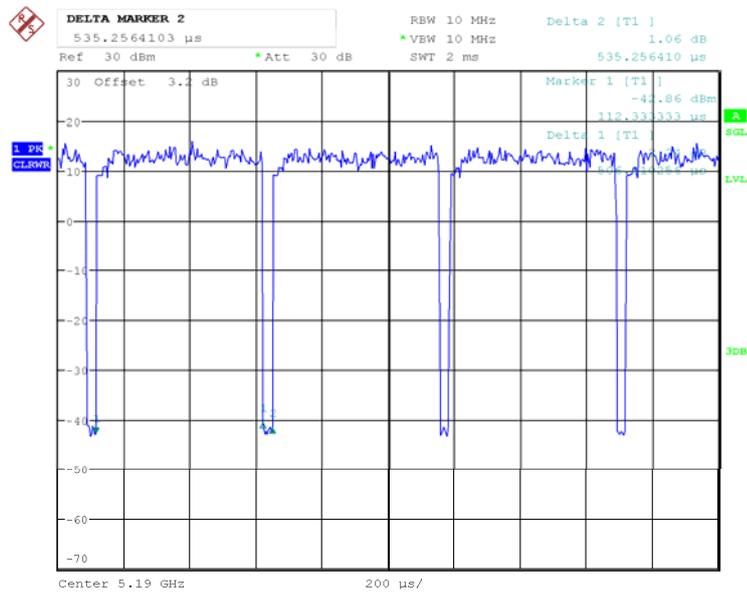

Date: 19.FEB.2019 20:51:38


Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Kingston	SD Card	4G	/

Block Diagram of Test Setup

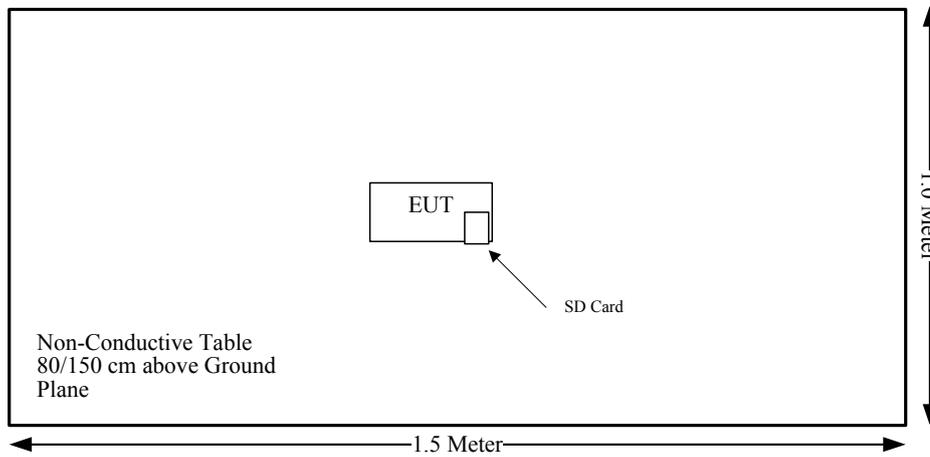

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Not Applicable*
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a) (e)	Emission Bandwidth	Compliance
§15.407(a)	Conducted Transmitter Output Power	Compliance
§15.407 (a)	Power Spectral Density	Compliance

Note:

Not Applicable*: The EUT was powered by battery.

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
WLAN	2412-2462	4.5	2.82	24	251.19	20.00	0.14	1.0
WLAN	5150-5250	4	2.51	25	316.23	20.00	0.16	1.0
WLAN	5725-5850	4	2.51	25	316.23	20.00	0.16	1.0

Note 1: the Max. Target Power including Tolerance was declared by manufacturer.

Note 2: The WLAN 2.4 GHz and 5 GHz can’t transmit simultaneously

Result: Compliance, The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance ≥20 cm.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.407 (a)(1), if transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has two external antenna permanently attached to the unit. fulfill the requirement of this section. Please refer to the EUT photos.

Antenna Type	input impedance (Ohm)	Antenna Gain /Frequency Range
PCB	50	4.5 dBi/2.4~2.5GHz 4.0 dBi/5.15~5.85GHz

Result: Compliance.

FCC §15.209, §15.205 & §15.407(b) –UNWANTED EMISSION**Applicable Standard**

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

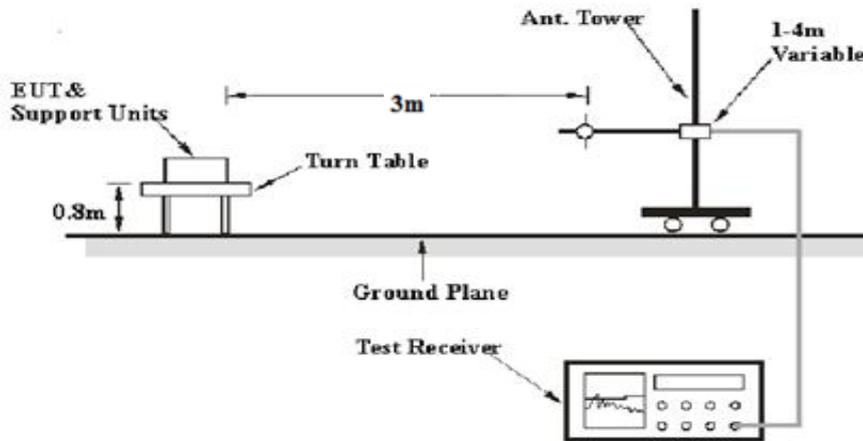

1-26.5 GHz:

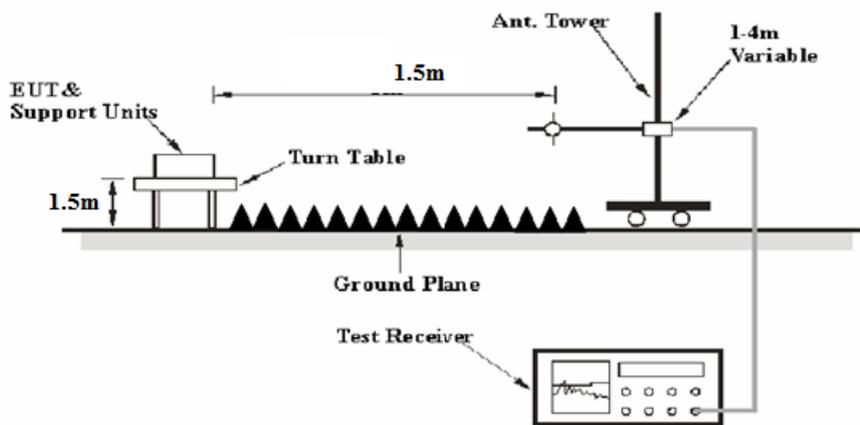

26.5-40 GHz:

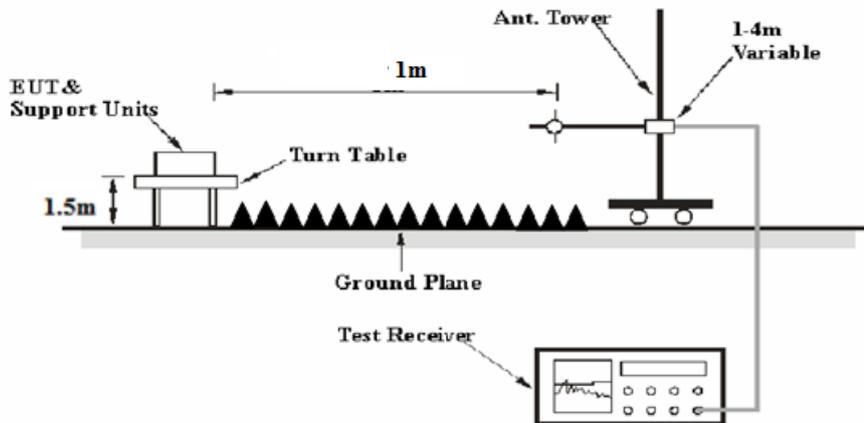

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A , above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m]/\text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
R&S	Spectrum Analyzer	FSP 38	100478	2018-12-10	2019-12-10
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2018-06-27	2019-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2018-06-27	2019-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2018-05-06	2019-05-06
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**


Temperature:	22.6~24°C
Relative Humidity:	51~55 %
ATM Pressure:	100.1kPa

* The testing was performed by Tyler Pan and Neil Liao on 2019-02-22.

Test Mode: Transmitting


1) Below 1GHz(802.11a 5825 MHz was the worst):

Horizontal

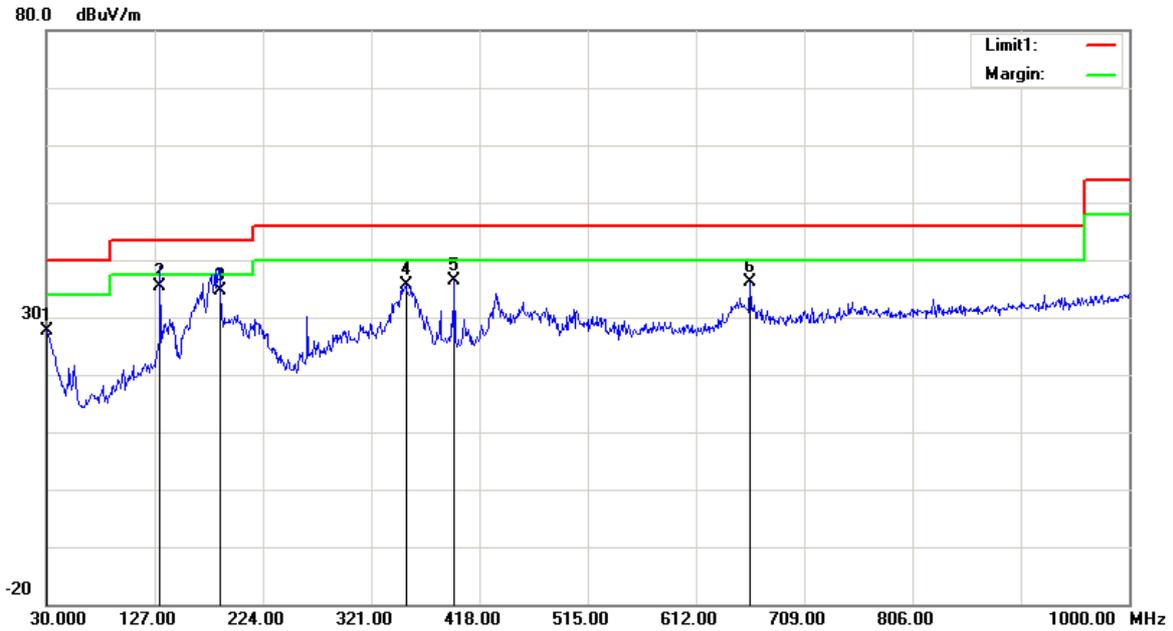

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	26.72	peak	0.91	27.63	40.00	12.37
131.8500	40.35	QP	-4.89	35.46	43.50	8.04
185.2000	42.12	QP	-7.40	34.72	43.50	8.78
352.0400	38.67	peak	-2.99	35.68	46.00	10.32
395.6900	38.46	peak	-2.07	36.39	46.00	9.61
660.5000	34.05	peak	2.15	36.20	46.00	9.80

Vertical

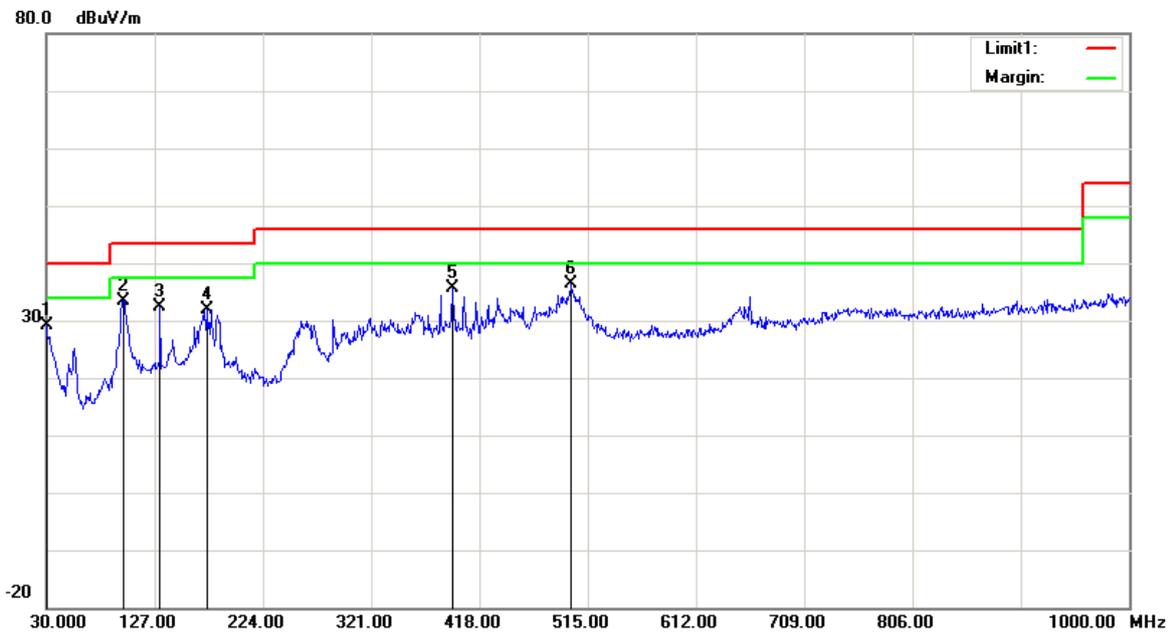

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	27.36	peak	1.72	29.08	40.00	10.92
98.8700	42.66	peak	-9.20	33.46	43.50	10.04
131.8500	37.16	peak	-4.89	32.27	43.50	11.23
173.5600	38.70	peak	-6.85	31.85	43.50	11.65
393.7500	37.73	peak	-2.14	35.59	46.00	10.41
500.4500	36.66	peak	-0.32	36.34	46.00	9.66

**2) 1GHz-40GHz:
5150-5250MHz
802.11a**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	69.46	PK	H	33.59	3.58	0.00	106.63	100.61	N/A	N/A
5180.00	59.63	AV	H	33.59	3.58	0.00	96.80	90.78	N/A	N/A
5180.00	82.81	PK	V	33.59	3.58	0.00	119.98	113.96	N/A	N/A
5180.00	72.33	AV	V	33.59	3.58	0.00	109.50	103.48	N/A	N/A
5150.00	35.92	PK	V	33.54	3.56	0.00	73.02	67	74.00	7.00
5150.00	18.98	AV	V	33.54	3.56	0.00	56.08	50.06	54.00	3.94
10360.00	46.61	PK	V	38.17	6.29	36.85	54.22	48.2	68.20	20.00
15540.00	48.97	PK	V	38.06	8.85	39.04	56.84	50.82	74.00	23.18
15540.00	36.92	AV	V	38.06	8.85	39.04	44.79	38.77	54.00	15.23
Middle Channel: 5200 MHz										
5200.00	74.69	PK	H	33.62	3.60	0.00	111.91	105.89	N/A	N/A
5200.00	64.55	AV	H	33.62	3.60	0.00	101.77	95.75	N/A	N/A
5200.00	86.05	PK	V	33.62	3.60	0.00	123.27	117.25	N/A	N/A
5200.00	75.92	AV	V	33.62	3.60	0.00	113.14	107.12	N/A	N/A
10400.00	48.80	PK	V	38.18	6.32	36.86	56.44	50.42	68.20	17.78
15600.00	49.48	PK	V	38.00	8.83	39.09	57.22	51.2	74.00	22.80
15600.00	37.01	AV	V	38.00	8.83	39.09	44.75	38.73	54.00	15.27
High Channel: 5240 MHz										
5240.00	75.29	PK	H	33.68	3.52	0.00	112.49	106.47	N/A	N/A
5240.00	64.96	AV	H	33.68	3.52	0.00	102.16	96.14	N/A	N/A
5240.00	86.36	PK	V	33.68	3.52	0.00	123.56	117.54	N/A	N/A
5240.00	76.02	AV	V	33.68	3.52	0.00	113.22	107.2	N/A	N/A
5350.00	28.29	PK	V	33.86	3.52	0.00	65.67	59.65	74.00	14.35
5350.00	16.03	AV	V	33.86	3.52	0.00	53.41	47.39	54.00	6.61
10480.00	51.78	PK	V	38.20	6.37	36.88	59.47	53.45	68.20	14.75
15720.00	49.00	PK	V	37.88	8.79	39.18	56.49	50.47	74.00	23.53
15720.00	38.48	AV	V	37.88	8.79	39.18	45.97	39.95	54.00	14.05

802.11n ht20

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	73.90	PK	H	33.59	3.58	0.00	111.07	105.05	N/A	N/A
5180.00	60.39	AV	H	33.59	3.58	0.00	97.56	91.54	N/A	N/A
5180.00	84.02	PK	V	33.59	3.58	0.00	121.19	115.17	N/A	N/A
5180.00	71.80	AV	V	33.59	3.58	0.00	108.97	102.95	N/A	N/A
5150.00	38.71	PK	V	33.54	3.56	0.00	75.81	69.79	74.00	4.21
5150.00	19.90	AV	V	33.54	3.56	0.00	57.00	50.98	54.00	3.02
10360.00	46.60	PK	V	38.17	6.29	36.85	54.21	48.19	68.20	20.01
15540.00	50.06	PK	V	38.06	8.85	39.04	57.93	51.91	74.00	22.09
15540.00	36.57	AV	V	38.06	8.85	39.04	44.44	38.42	54.00	15.58
Middle Channel: 5200 MHz										
5200.00	73.65	PK	H	33.62	3.60	0.00	110.87	104.85	N/A	N/A
5200.00	60.08	AV	H	33.62	3.60	0.00	97.30	91.28	N/A	N/A
5200.00	83.24	PK	V	33.62	3.60	0.00	120.46	114.44	N/A	N/A
5200.00	71.69	AV	V	33.62	3.60	0.00	108.91	102.89	N/A	N/A
10400.00	46.54	PK	V	38.18	6.32	36.86	54.18	48.16	68.20	20.04
15600.00	49.47	PK	V	38.00	8.83	39.09	57.21	51.19	74.00	22.81
15600.00	37.26	AV	V	38.00	8.83	39.09	45.00	38.98	54.00	15.02
High Channel: 5240 MHz										
5240.00	72.21	PK	H	33.68	3.52	0.00	109.41	103.39	N/A	N/A
5240.00	59.36	AV	H	33.68	3.52	0.00	96.56	90.54	N/A	N/A
5240.00	81.62	PK	V	33.68	3.52	0.00	118.82	112.8	N/A	N/A
5240.00	70.27	AV	V	33.68	3.52	0.00	107.47	101.45	N/A	N/A
5350.00	28.49	PK	V	33.86	3.52	0.00	65.87	59.85	74.00	14.15
5350.00	15.90	AV	V	33.86	3.52	0.00	53.28	47.26	54.00	6.74
10480.00	46.34	PK	V	38.20	6.37	36.88	54.03	48.01	68.20	20.19
15720.00	48.32	PK	V	37.88	8.79	39.18	55.81	49.79	74.00	24.21
15720.00	37.01	AV	V	37.88	8.79	39.18	44.50	38.48	54.00	15.52

802.11n ht40

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	65.68	PK	H	33.60	3.59	0.00	102.87	96.85	N/A	N/A
5190.00	54.38	AV	H	33.60	3.59	0.00	91.57	85.55	N/A	N/A
5190.00	75.33	PK	V	33.60	3.59	0.00	112.52	106.5	N/A	N/A
5190.00	64.47	AV	V	33.60	3.59	0.00	101.66	95.64	N/A	N/A
5150.00	34.30	PK	V	33.54	3.56	0.00	71.40	65.38	74.00	8.62
5150.00	19.41	AV	V	33.54	3.56	0.00	56.51	50.49	54.00	3.51
10380.00	47.96	PK	V	38.18	6.31	36.85	55.60	49.58	68.20	18.62
15570.00	48.59	PK	V	38.03	8.84	39.06	56.40	50.38	74.00	23.62
15570.00	36.10	AV	V	38.03	8.84	39.06	43.91	37.89	54.00	16.11
High Channel: 5230 MHz										
5230.00	71.95	PK	H	33.67	3.54	0.00	109.16	103.14	N/A	N/A
5230.00	60.51	AV	H	33.67	3.54	0.00	97.72	91.7	N/A	N/A
5230.00	81.32	PK	V	33.67	3.54	0.00	118.53	112.51	N/A	N/A
5230.00	68.99	AV	V	33.67	3.54	0.00	106.20	100.18	N/A	N/A
5350.00	29.21	PK	V	33.86	3.52	0.00	66.59	60.57	74.00	13.43
5350.00	16.68	AV	V	33.86	3.52	0.00	54.06	48.04	54.00	5.96
10460.00	46.63	PK	V	38.19	6.36	36.87	54.31	48.29	68.20	19.91
15690.00	48.86	PK	V	37.91	8.80	39.15	56.42	50.4	74.00	23.60
15690.00	36.62	AV	V	37.91	8.80	39.15	44.18	38.16	54.00	15.84

**5725-5850MHz
802.11a**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	76.26	PK	H	34.20	3.69	0.00	114.15	108.13	N/A	N/A
5745.00	65.74	AV	H	34.20	3.69	0.00	103.63	97.61	N/A	N/A
5745.00	87.24	PK	V	34.20	3.69	0.00	125.13	119.11	N/A	N/A
5745.00	76.25	AV	V	34.20	3.69	0.00	114.14	108.12	N/A	N/A
5725.00	65.30	PK	V	34.19	3.69	0.00	103.18	97.16	122.20	25.04
5720.00	55.70	PK	V	34.19	3.69	0.00	93.58	87.56	110.80	23.24
5700.00	48.82	PK	V	34.18	3.68	0.00	86.68	80.66	105.20	24.54
5650.00	28.40	PK	V	34.16	3.63	0.00	66.19	60.17	68.20	8.03
11490.00	47.63	PK	V	38.99	6.59	37.35	55.86	49.84	74.00	24.16
11490.00	34.69	AV	V	38.99	6.59	37.35	42.92	36.9	54.00	17.10
17235.00	47.59	PK	V	41.56	8.78	38.61	59.32	53.3	68.20	14.90
Middle Channel: 5785 MHz										
5785.00	76.09	PK	H	34.21	3.71	0.00	114.01	107.99	N/A	N/A
5785.00	64.63	AV	H	34.21	3.71	0.00	102.55	96.53	N/A	N/A
5785.00	87.23	PK	V	34.21	3.71	0.00	125.15	119.13	N/A	N/A
5785.00	76.59	AV	V	34.21	3.71	0.00	114.51	108.49	N/A	N/A
11570.00	47.59	PK	V	39.00	6.61	37.44	55.76	49.74	74.00	24.26
11570.00	35.61	AV	V	39.00	6.61	37.44	43.78	37.76	54.00	16.24
17355.00	47.21	PK	V	42.26	8.81	38.52	59.76	53.74	68.20	14.46
High Channel: 5825 MHz										
5825.00	76.11	PK	H	34.23	3.73	0.00	114.07	108.05	N/A	N/A
5825.00	65.29	AV	H	34.23	3.73	0.00	103.25	97.23	N/A	N/A
5825.00	87.41	PK	V	34.23	3.73	0.00	125.37	119.35	N/A	N/A
5825.00	76.93	AV	V	34.23	3.73	0.00	114.89	108.87	N/A	N/A
5850.00	58.94	PK	V	34.24	3.75	0.00	96.93	90.91	122.20	31.29
5855.00	52.70	PK	V	34.24	3.75	0.00	90.69	84.67	110.80	26.13
5875.00	40.13	PK	V	34.25	3.77	0.00	78.15	72.13	105.20	33.07
5925.00	27.77	PK	V	34.27	3.80	0.00	65.84	59.82	68.20	8.38
11650.00	48.07	PK	V	39.00	6.64	37.53	56.18	50.16	74.00	23.84
11650.00	35.85	AV	V	39.00	6.64	37.53	43.96	37.94	54.00	16.06
17475.00	47.10	PK	V	42.96	8.84	38.44	60.46	54.44	68.20	13.76

802.11n ht20




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Extrapolation result (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	73.89	PK	H	34.20	3.69	0.00	111.78	105.76	N/A	N/A
5745.00	62.71	AV	H	34.20	3.69	0.00	100.60	94.58	N/A	N/A
5745.00	83.65	PK	V	34.20	3.69	0.00	121.54	115.52	N/A	N/A
5745.00	72.53	AV	V	34.20	3.69	0.00	110.42	104.4	N/A	N/A
5725.00	55.14	PK	V	34.19	3.69	0.00	93.02	87	122.20	35.20
5720.00	49.34	PK	V	34.19	3.69	0.00	87.22	81.2	110.80	29.60
5700.00	34.12	PK	V	34.18	3.68	0.00	71.98	65.96	105.20	39.24
5650.00	27.65	PK	V	34.16	3.63	0.00	65.44	59.42	68.20	8.78
11490.00	48.29	PK	V	38.99	6.59	37.35	56.52	50.5	74.00	23.50
11490.00	36.31	AV	V	38.99	6.59	37.35	44.54	38.52	54.00	15.48
17235.00	47.93	PK	V	41.56	8.78	38.61	59.66	53.64	68.20	14.56
Middle Channel: 5785 MHz										
5785.00	72.46	PK	H	34.21	3.71	0.00	110.38	104.36	N/A	N/A
5785.00	62.60	AV	H	34.21	3.71	0.00	100.52	94.5	N/A	N/A
5785.00	82.81	PK	V	34.21	3.71	0.00	120.73	114.71	N/A	N/A
5785.00	72.29	AV	V	34.21	3.71	0.00	110.21	104.19	N/A	N/A
11570.00	48.66	PK	V	39.00	6.61	37.44	56.83	50.81	74.00	23.19
11570.00	36.59	AV	V	39.00	6.61	37.44	44.76	38.74	54.00	15.26
17355.00	48.19	PK	V	42.26	8.81	38.52	60.74	54.72	68.20	13.48
High Channel: 5825 MHz										
5825.00	72.69	PK	H	34.23	3.73	0.00	110.65	104.63	N/A	N/A
5825.00	62.10	AV	H	34.23	3.73	0.00	100.06	94.04	N/A	N/A
5825.00	82.74	PK	V	34.23	3.73	0.00	120.70	114.68	N/A	N/A
5825.00	71.58	AV	V	34.23	3.73	0.00	109.54	103.52	N/A	N/A
5850.00	44.03	PK	V	34.24	3.75	0.00	82.02	76	122.20	46.20
5855.00	39.59	PK	V	34.24	3.75	0.00	77.58	71.56	110.80	39.24
5875.00	27.88	PK	V	34.25	3.77	0.00	65.90	59.88	105.20	45.32
5925.00	27.32	PK	V	34.27	3.80	0.00	65.39	59.37	68.20	8.83
11650.00	48.47	PK	V	39.00	6.64	37.53	56.58	50.56	74.00	23.44
11650.00	36.20	AV	V	39.00	6.64	37.53	44.31	38.29	54.00	15.71
17475.00	47.59	PK	V	42.96	8.84	38.44	60.95	54.93	68.20	13.27


802.11n ht40

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	75.81	PK	H	34.20	3.70	0.00	113.71	107.69	N/A	N/A
5755.00	65.10	AV	H	34.20	3.70	0.00	103.00	96.98	N/A	N/A
5755.00	85.44	PK	V	34.20	3.70	0.00	123.34	117.32	N/A	N/A
5755.00	75.26	AV	V	34.20	3.70	0.00	113.16	107.14	N/A	N/A
5725.00	67.12	PK	V	34.19	3.69	0.00	105.00	98.98	122.20	23.22
5720.00	66.24	PK	V	34.19	3.69	0.00	104.12	98.1	110.80	12.70
5700.00	57.98	PK	V	34.18	3.68	0.00	95.84	89.82	105.20	15.38
5650.00	35.69	PK	V	34.16	3.63	0.00	73.48	67.46	68.20	0.74
11510.00	47.69	PK	V	39.00	6.59	37.37	55.91	49.89	74.00	24.11
11510.00	35.26	AV	V	39.00	6.59	37.37	43.48	37.46	54.00	16.54
17265.00	46.93	PK	V	41.74	8.79	38.58	58.88	52.86	68.20	15.34
High Channel: 5795 MHz										
5795.00	76.96	PK	H	34.22	3.71	0.00	114.89	108.87	N/A	N/A
5795.00	65.51	AV	H	34.22	3.71	0.00	103.44	97.42	N/A	N/A
5795.00	86.00	PK	V	34.22	3.71	0.00	123.93	117.91	N/A	N/A
5795.00	75.69	AV	V	34.22	3.71	0.00	113.62	107.6	N/A	N/A
5850.00	52.78	PK	V	34.24	3.75	0.00	90.77	84.75	122.20	37.45
5855.00	51.26	PK	V	34.24	3.75	0.00	89.25	83.23	110.80	27.57
5875.00	43.51	PK	V	34.25	3.77	0.00	81.53	75.51	105.20	29.69
5925.00	32.17	PK	V	34.27	3.80	0.00	70.24	64.22	68.20	3.98
11590.00	48.21	PK	V	39.00	6.62	37.46	56.37	50.35	74.00	23.65
11590.00	36.20	AV	V	39.00	6.62	37.46	44.36	38.34	54.00	15.66
17385.00	48.11	PK	V	42.43	8.82	38.50	60.86	54.84	68.20	13.36

**Test Plots(For worst mode 802.11a 5825MHz)
Horizontal**



Fundamental
Test with Band
Rejection Filter

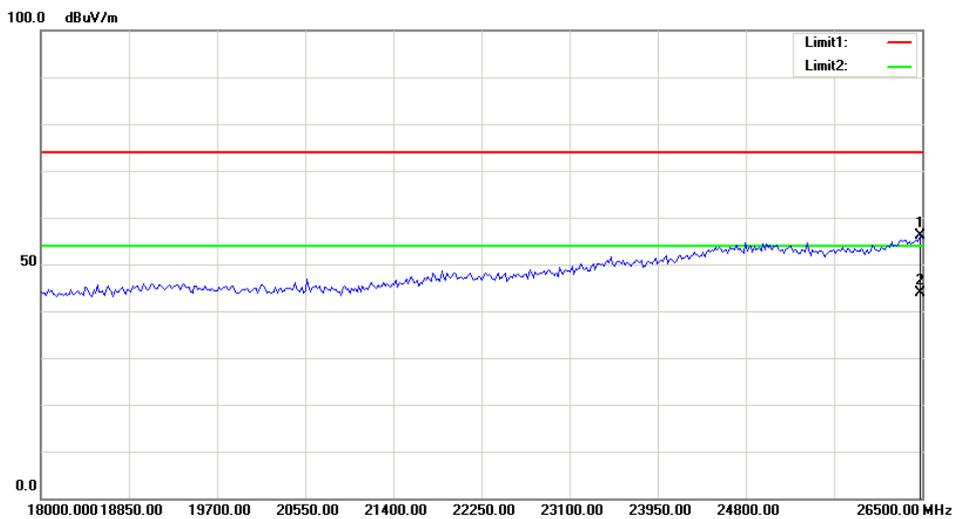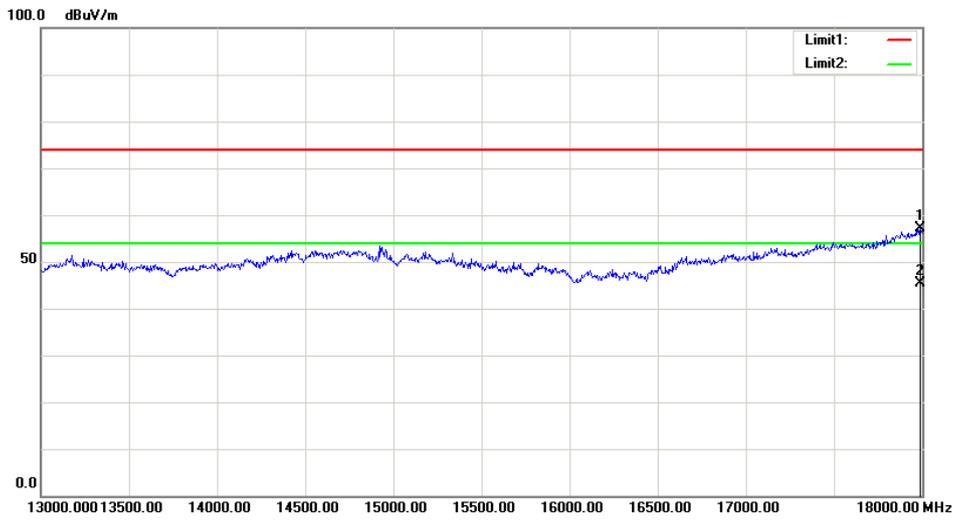
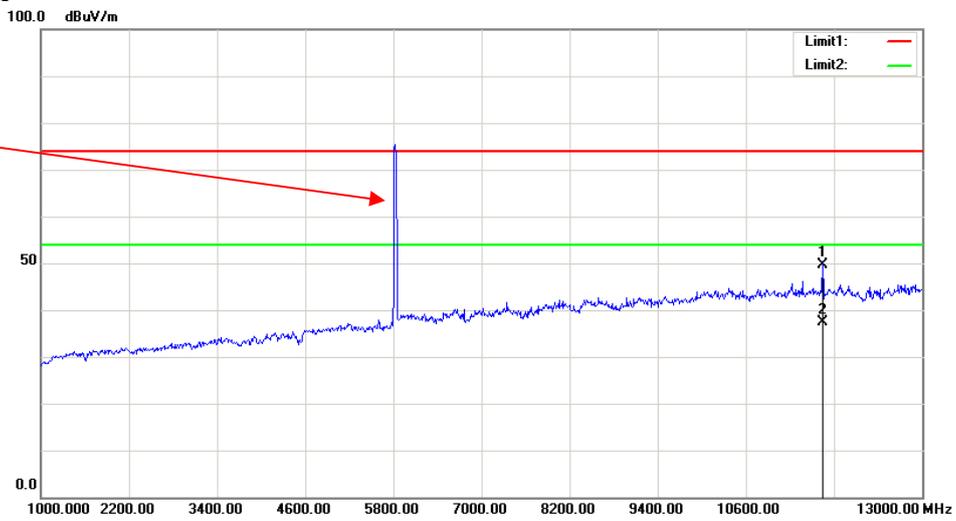


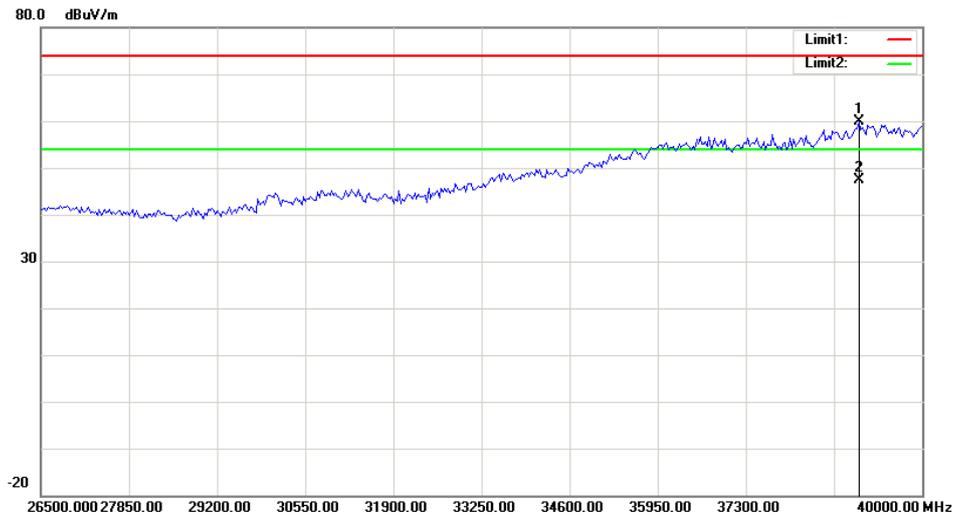

Vertical

Fundamental Test with Band Rejection Filter

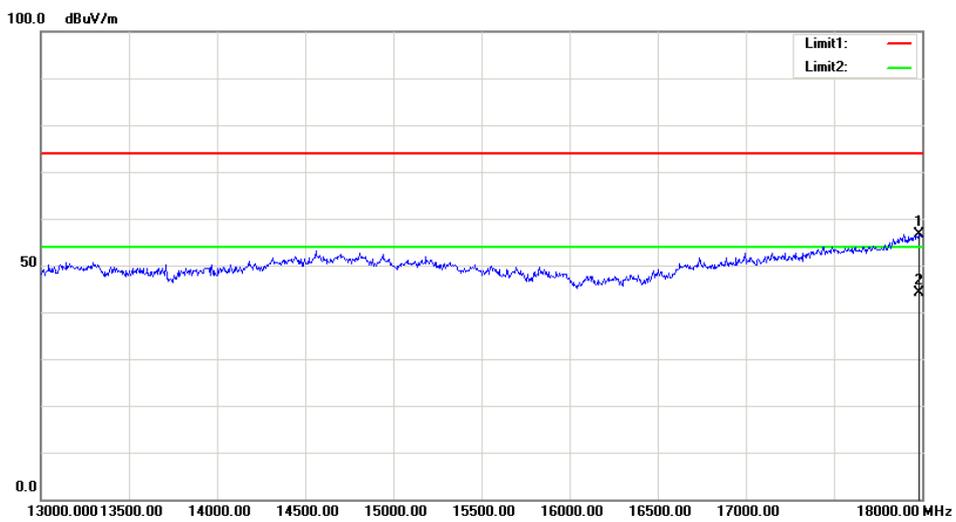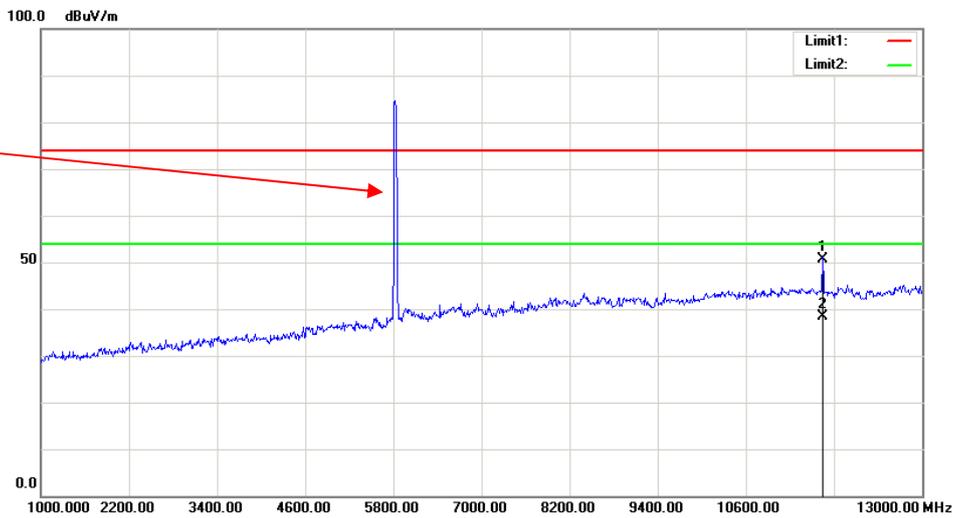

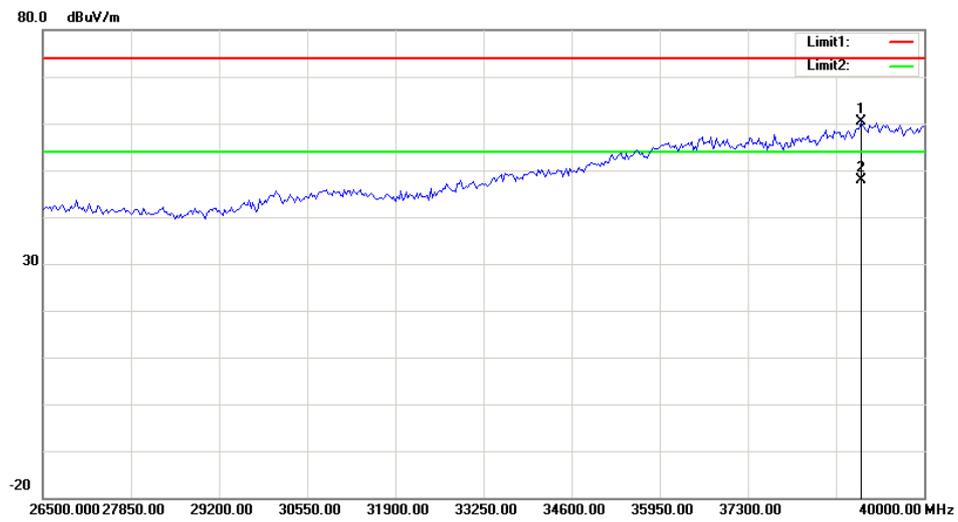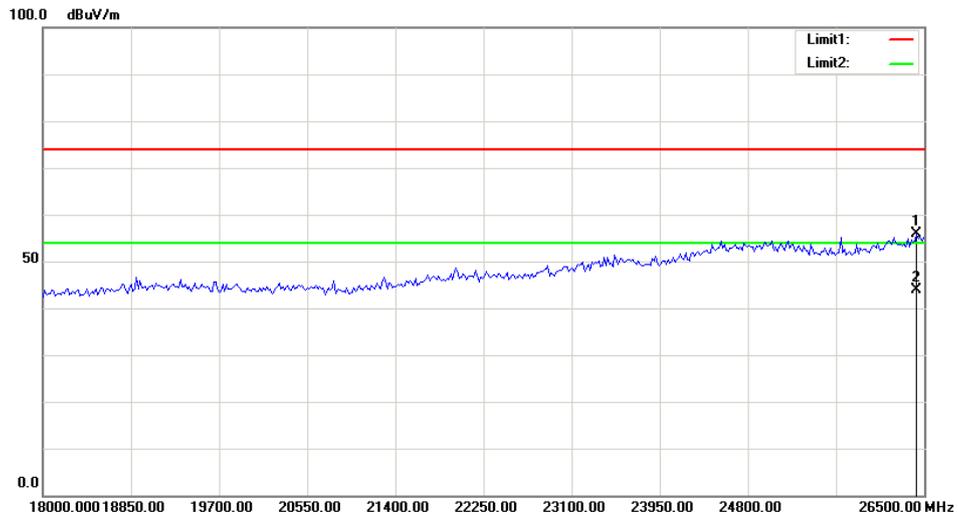

FCC §15.407(a)(e) –EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH

Applicable Standard

15.407(a) (e)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	24.4~25.1°C
Relative Humidity:	52~68 %
ATM Pressure:	100.5~101.4 kPa

The testing was performed by Tiago Huang from 2019-02-19 to 2019-03-27.

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting

5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	21.964	16.880
	5200	25.251	16.960
	5240	22.926	16.960
802.11n ht20	5180	21.964	17.840
	5200	21.563	17.840
	5240	21.723	17.840
802.11n ht40	5190	43.126	36.640
	5230	43.126	36.640


5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	15.792	20.32
	5785	15.631	20.72
	5825	15.230	25.92
802.11n ht20	5745	16.914	18.00
	5785	16.834	18.08
	5825	16.754	18.00
802.11n ht40	5755	35.431	37.12
	5795	35.431	40.51

Note: the 99% Occupied Bandwidth have not fall into the band 5150-5250MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.


**5150-5250MHz:
26dB Emission Bandwidth:**

802.11a Low Channel

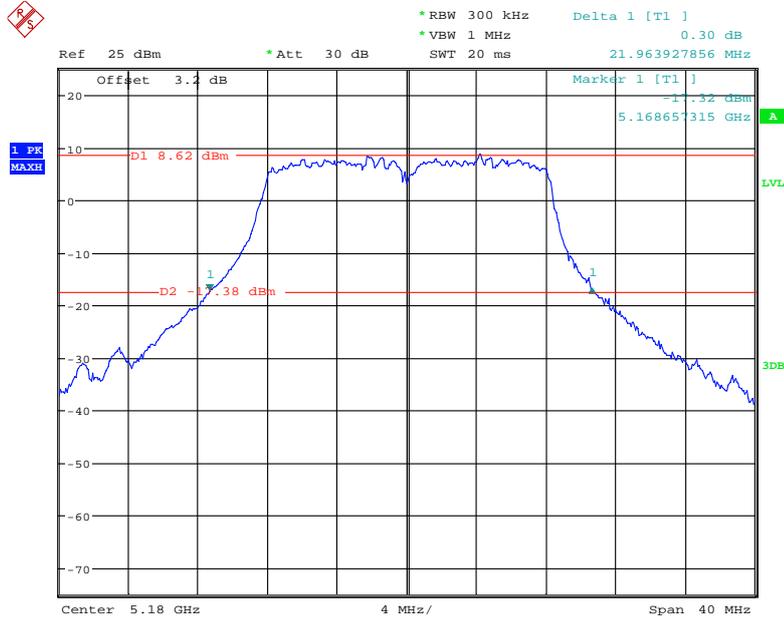


Date: 19.FEB.2019 23:57:01

802.11a Middle Channel

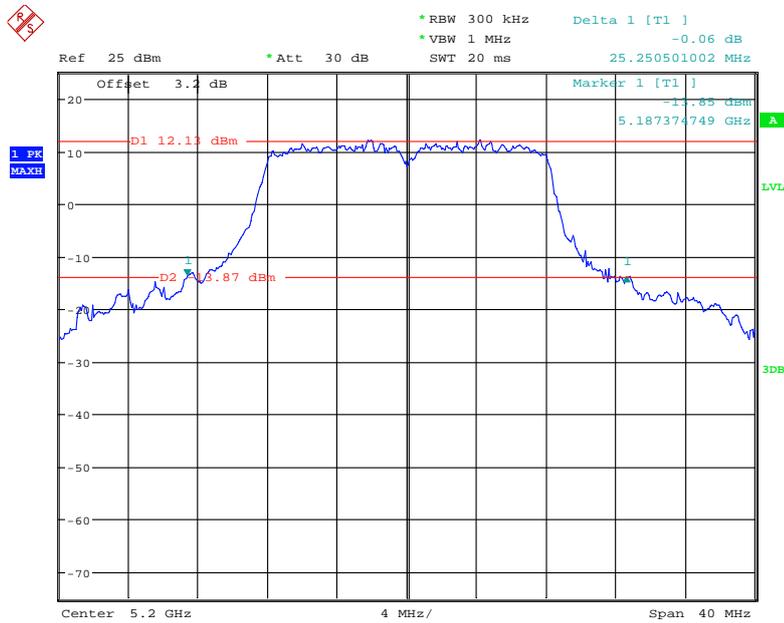


Date: 19.FEB.2019 23:22:33

802.11a High Channel

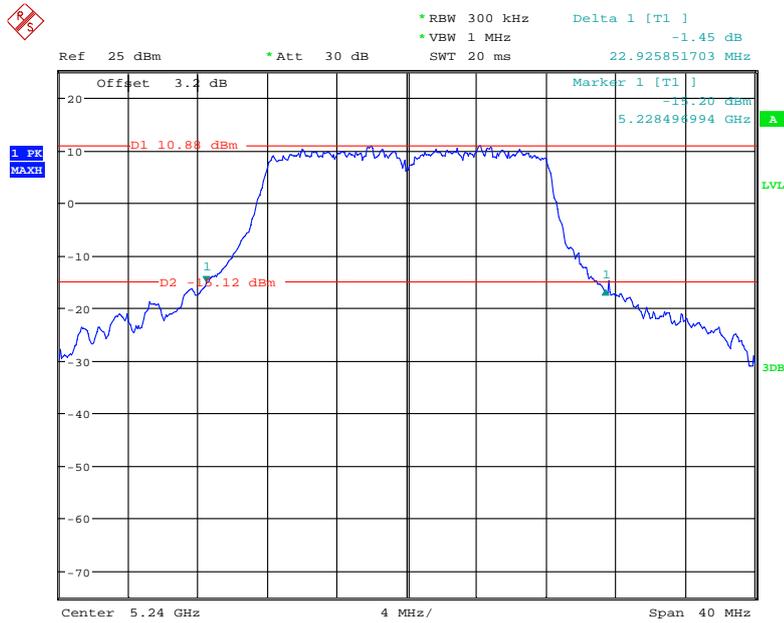


Date: 19.FEB.2019 23:23:53

802.11n ht20 Low Channel

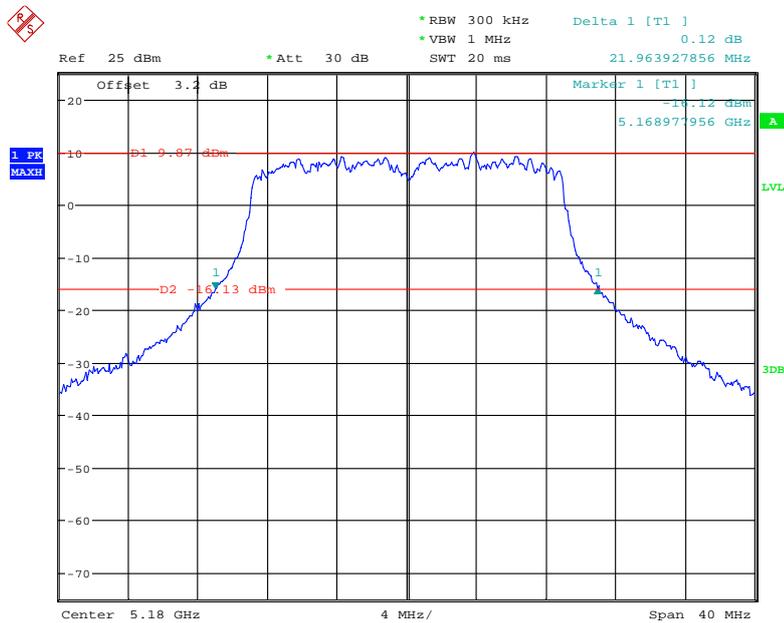


Date: 19.FEB.2019 23:45:30

802.11n ht20 Middle Channel

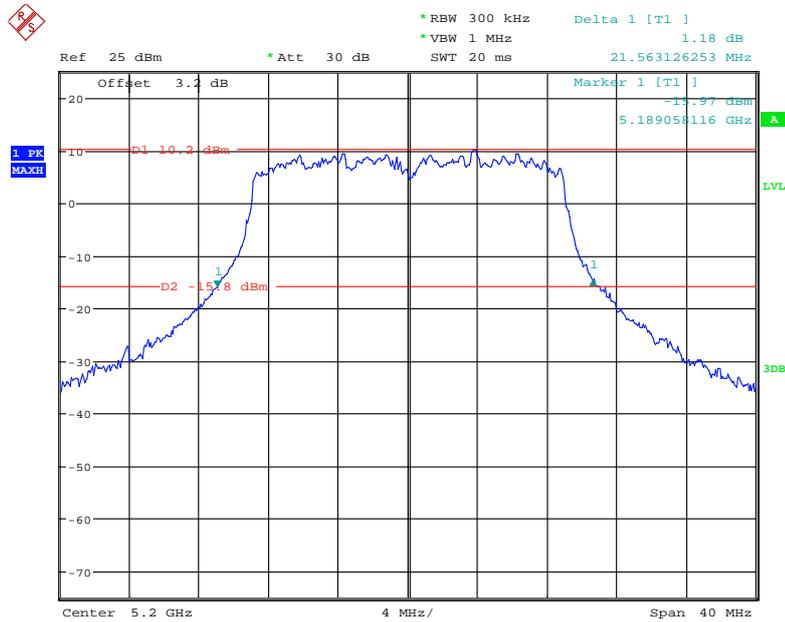


Date: 19.FEB.2019 23:47:55

802.11n ht20 High Channel

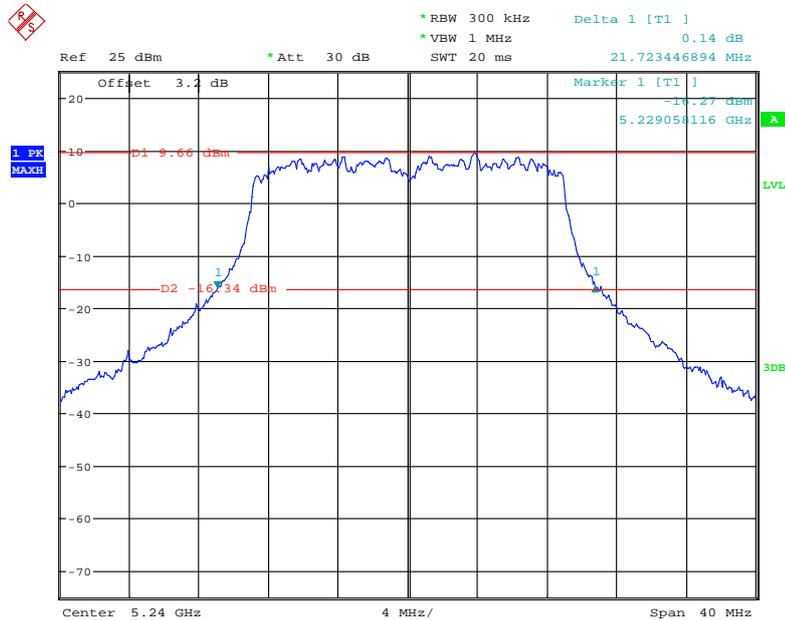


Date: 19.FEB.2019 23:49:19

802.11n ht40 Low Channel

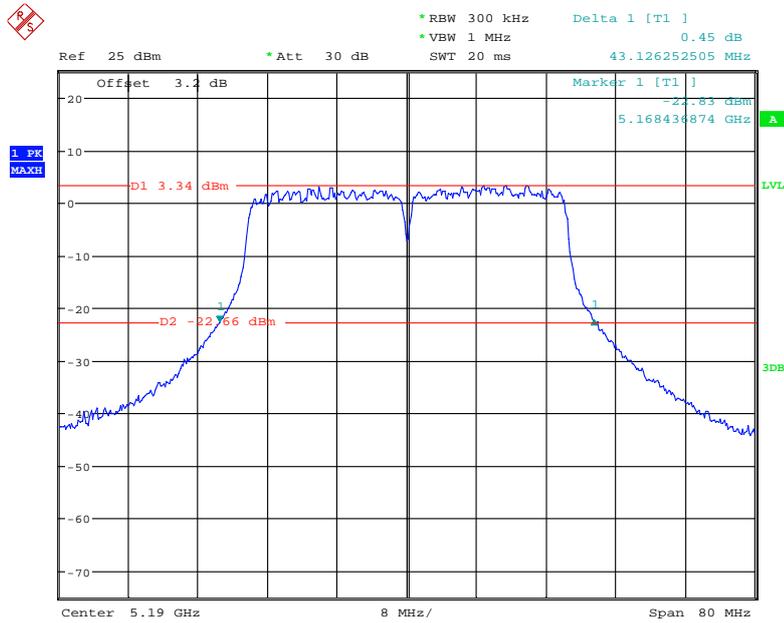


Date: 19.FEB.2019 23:52:29

802.11n ht40 High Channel

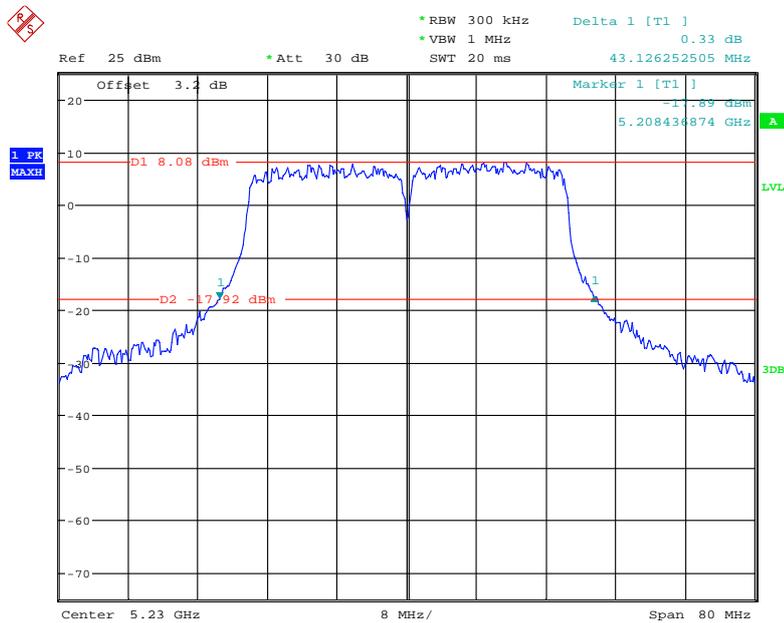


Date: 19.FEB.2019 23:54:53

802.11a High Channel

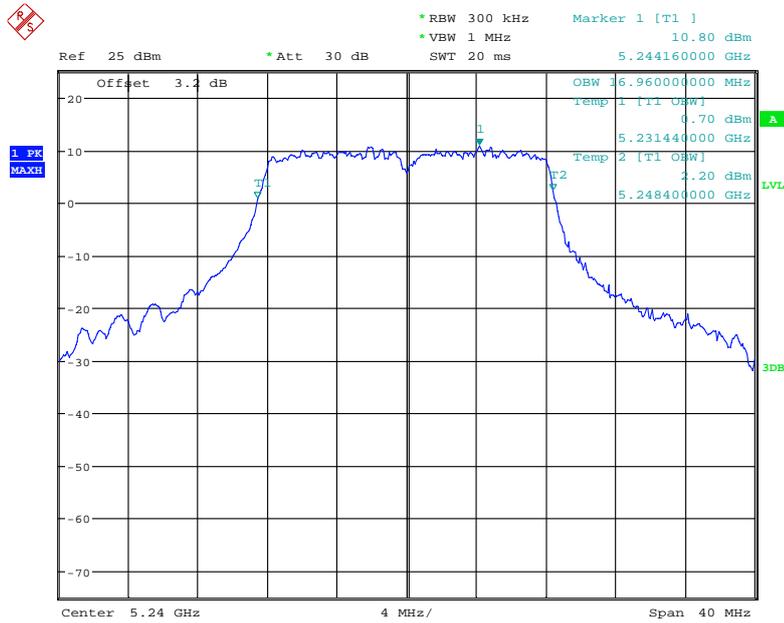


Date: 19.FEB.2019 23:24:08

802.11n ht20 Low Channel

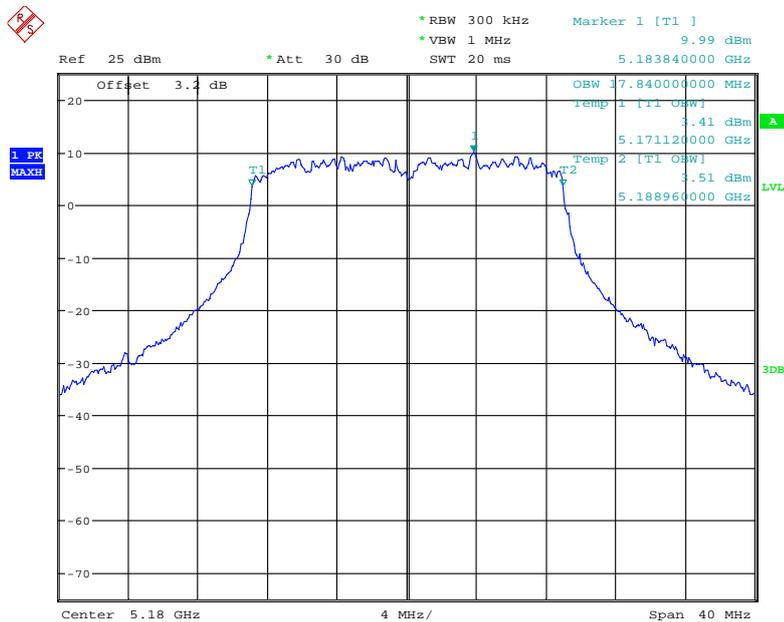


Date: 19.FEB.2019 23:45:52

802.11n ht20 Middle Channel

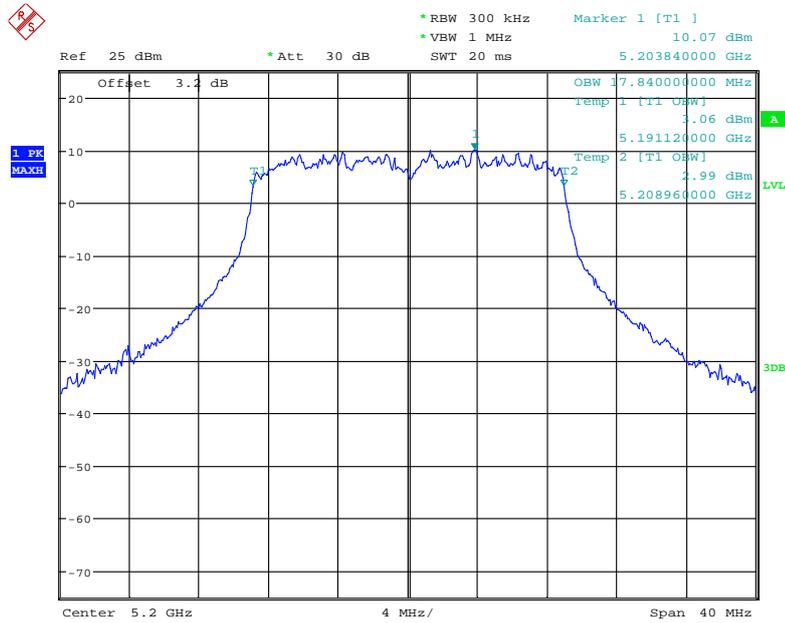


Date: 19.FEB.2019 23:48:24

802.11n ht20 High Channel

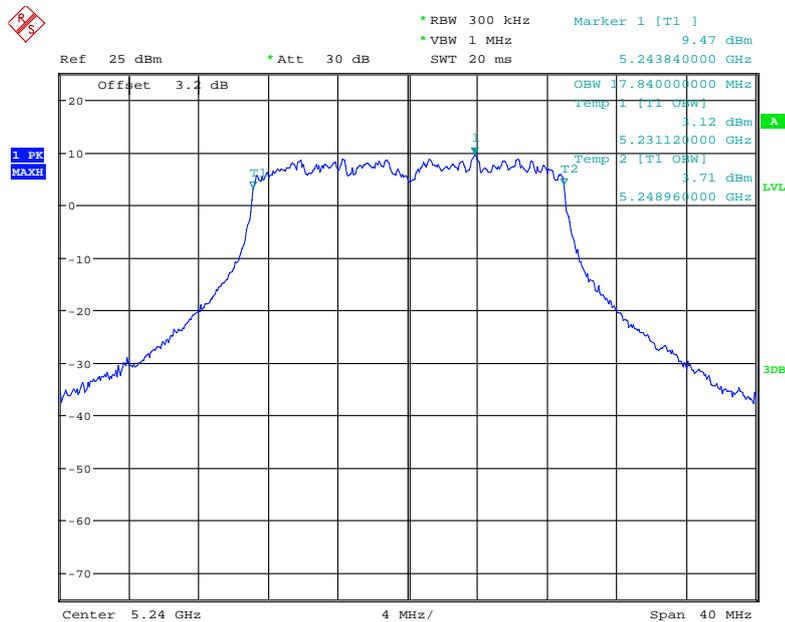


Date: 19.FEB.2019 23:49:41

802.11n ht40 Low Channel

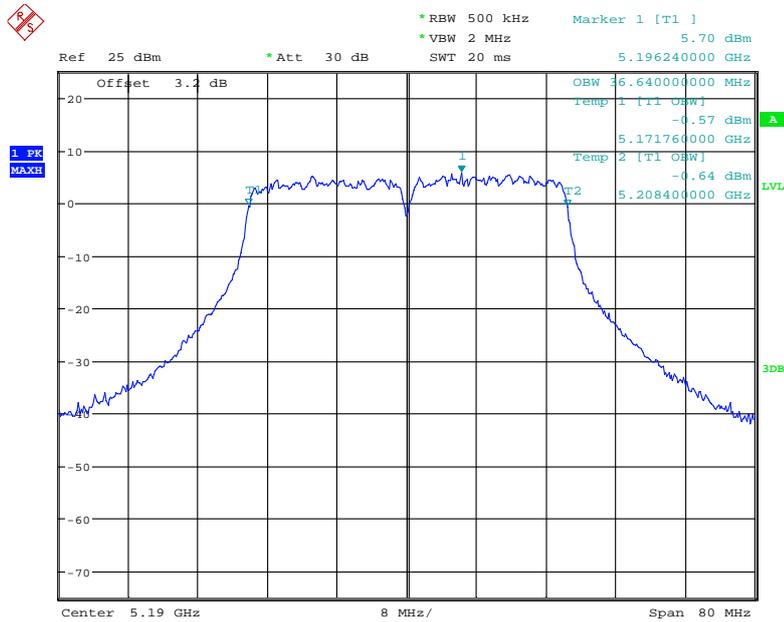

Date: 19.FEB.2019 23:52:48


802.11n ht40 High Channel

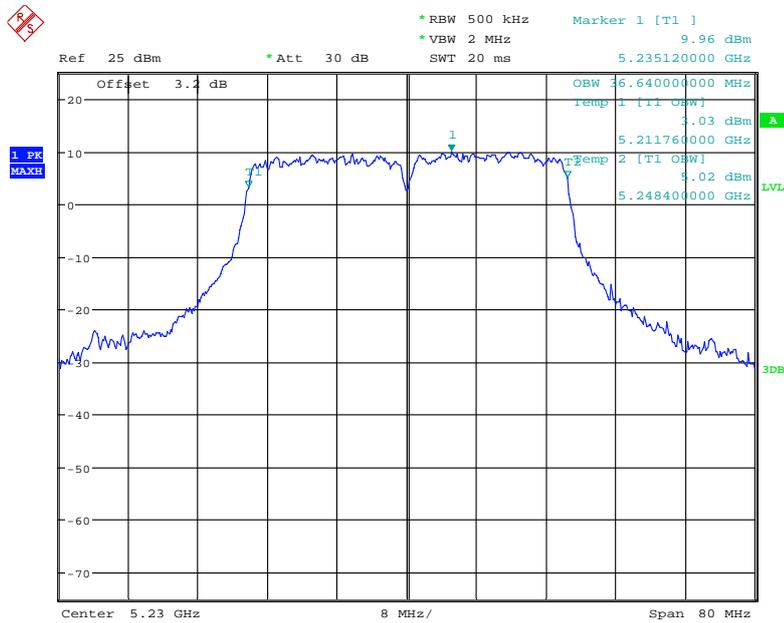

Date: 19.FEB.2019 23:55:15


**5725-5850MHz:
6dB Emission Bandwidth:**

802.11a Low Channel

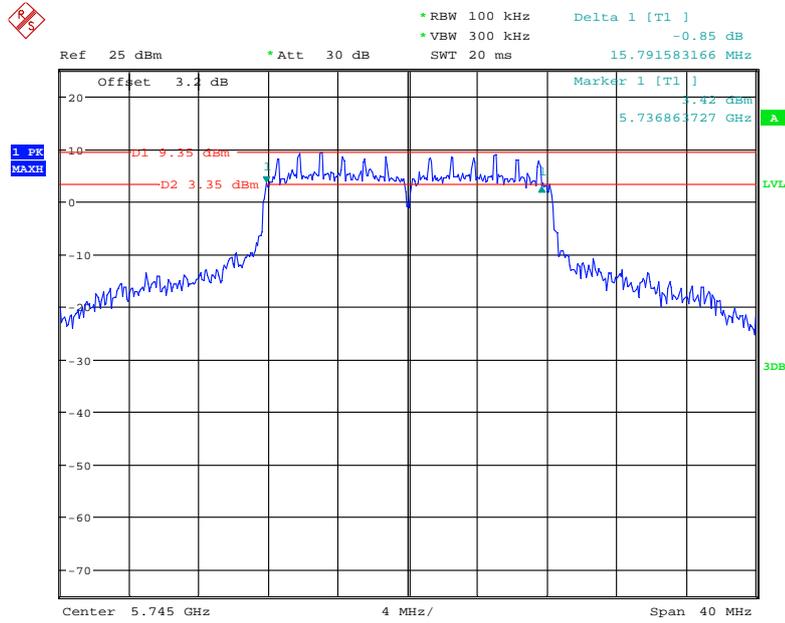


Date: 20.FEB.2019 13:36:48

802.11a Middle Channel

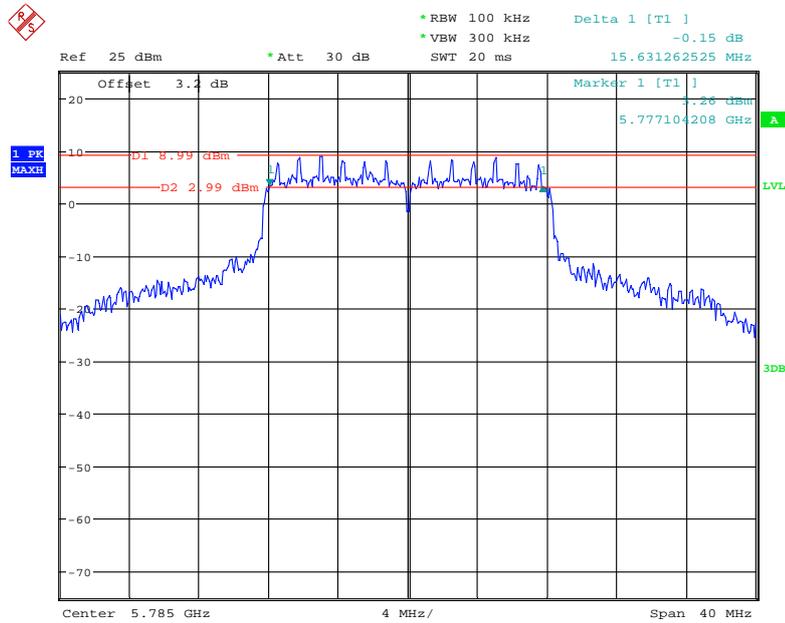


Date: 20.FEB.2019 13:39:32

802.11a High Channel

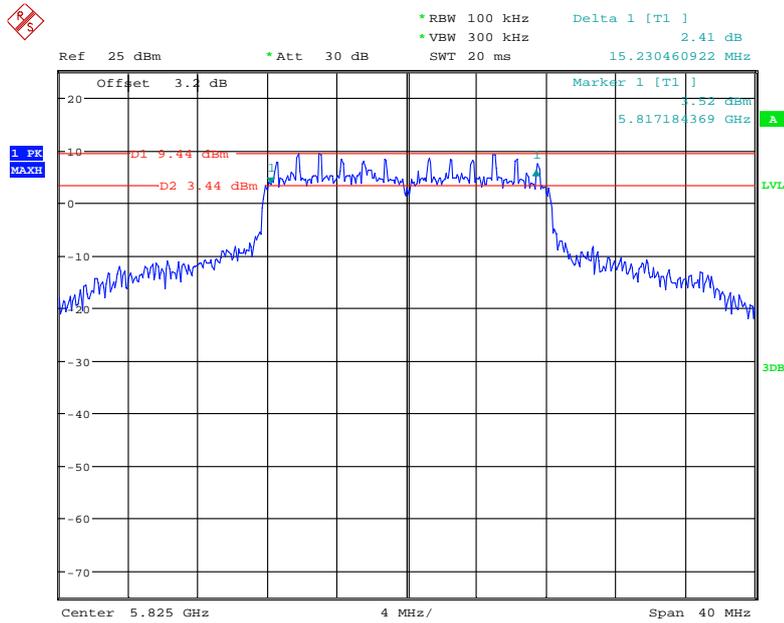


Date: 20.FEB.2019 13:43:48

802.11n ht20 Low Channel

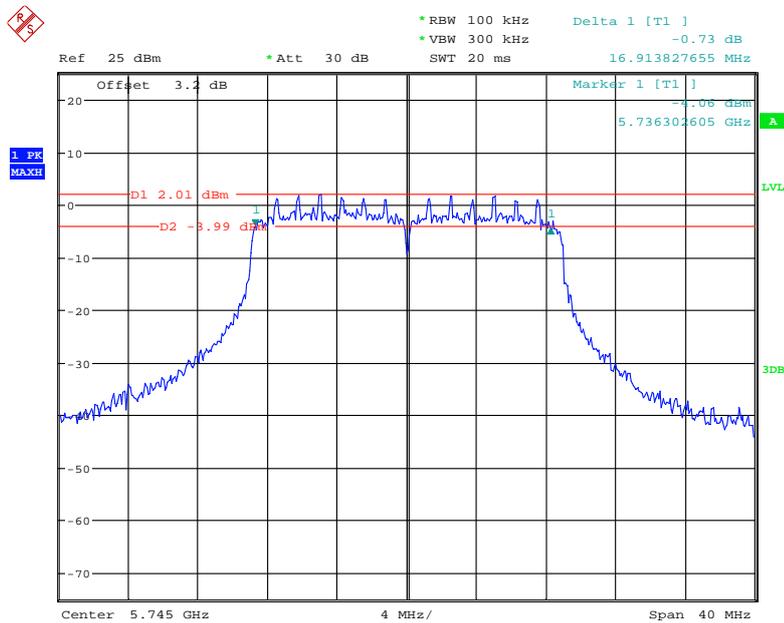


Date: 20.FEB.2019 14:14:00

802.11n ht20 Middle Channel

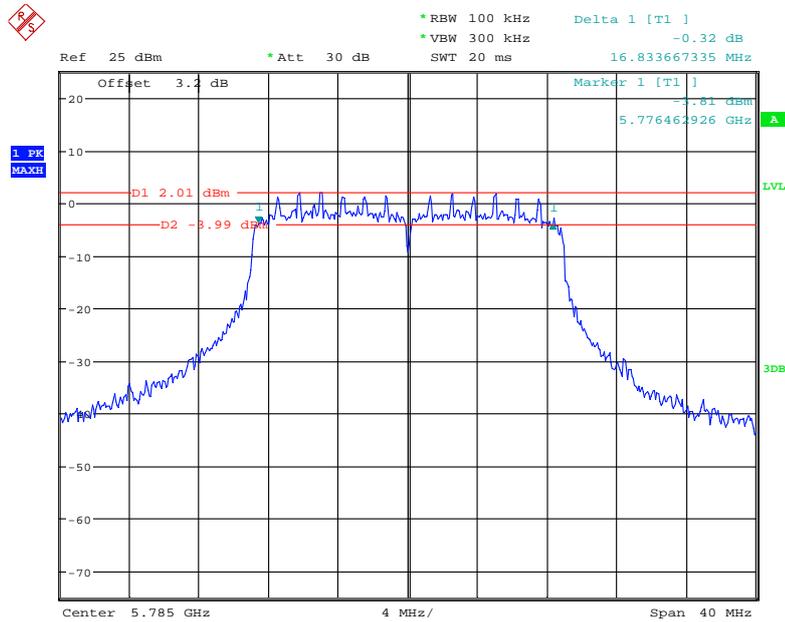


Date: 20.FEB.2019 14:16:39

802.11n ht20 High Channel

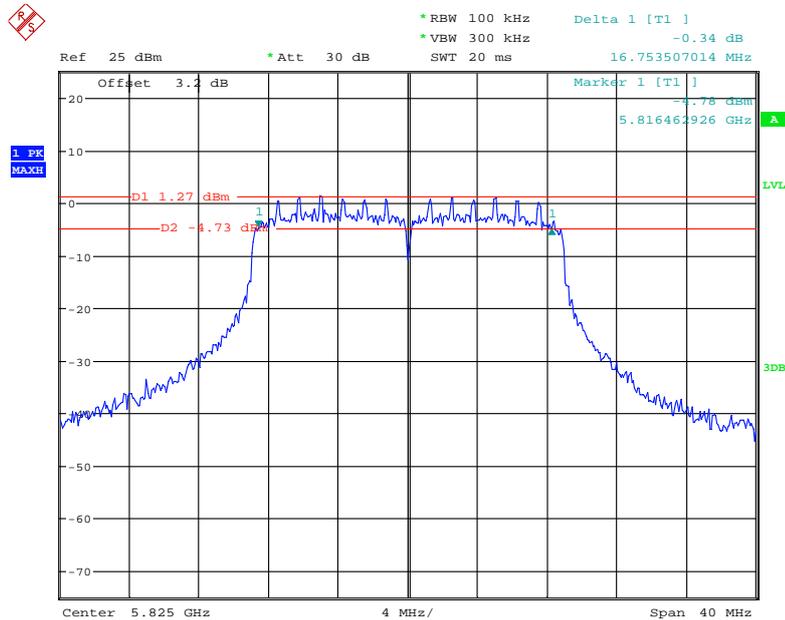


Date: 20.FEB.2019 14:11:29

802.11n ht40 Low Channel

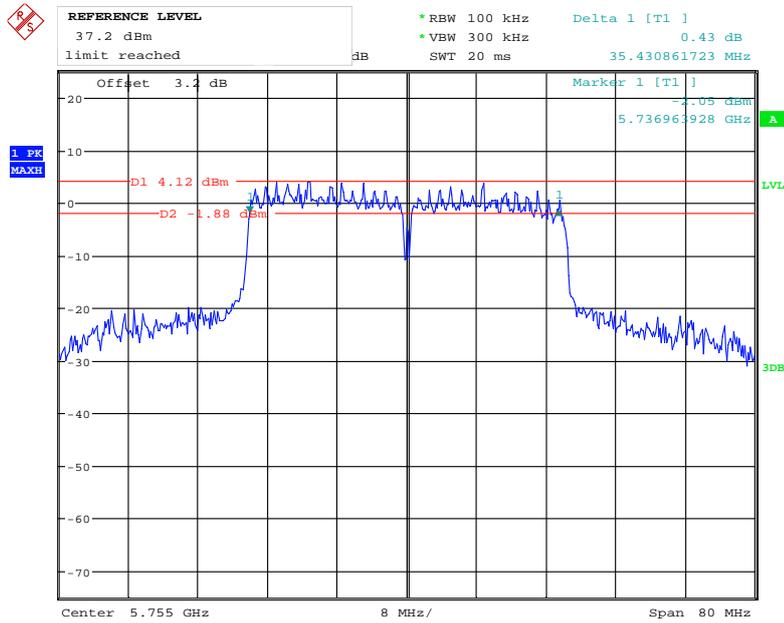

Date: 20.FEB.2019 14:32:00


802.11n ht40 High Channel

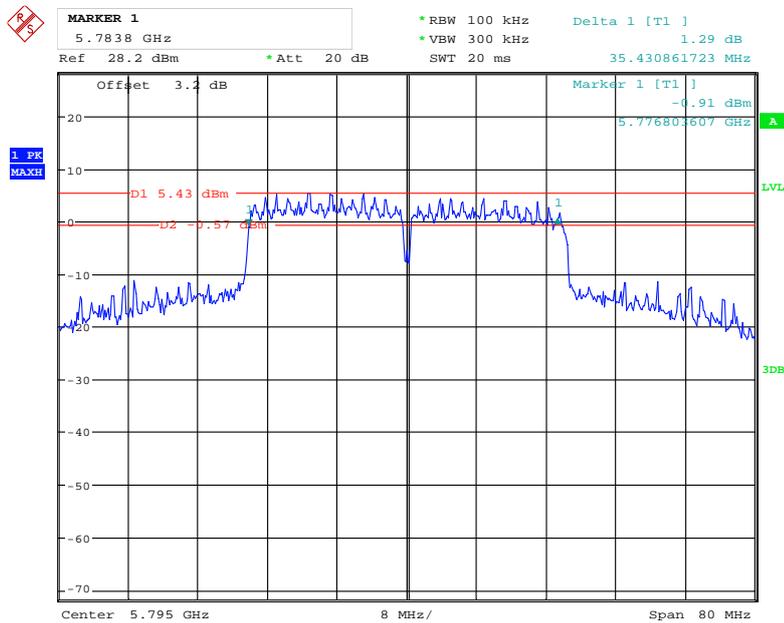

Date: 20.FEB.2019 14:24:06


99% Occupied Bandwidth:

802.11a Low Channel

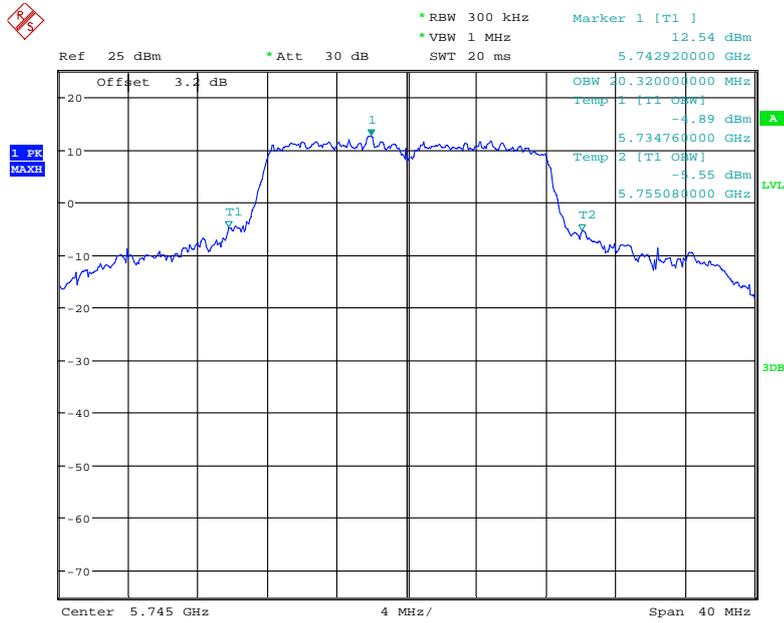


Date: 20.FEB.2019 13:37:10

802.11a Middle Channel

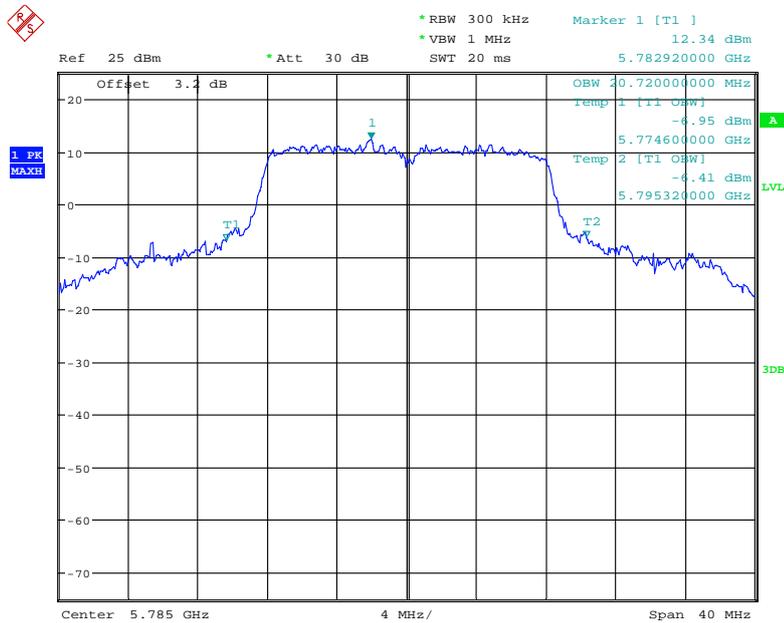


Date: 20.FEB.2019 13:40:01

802.11a High Channel

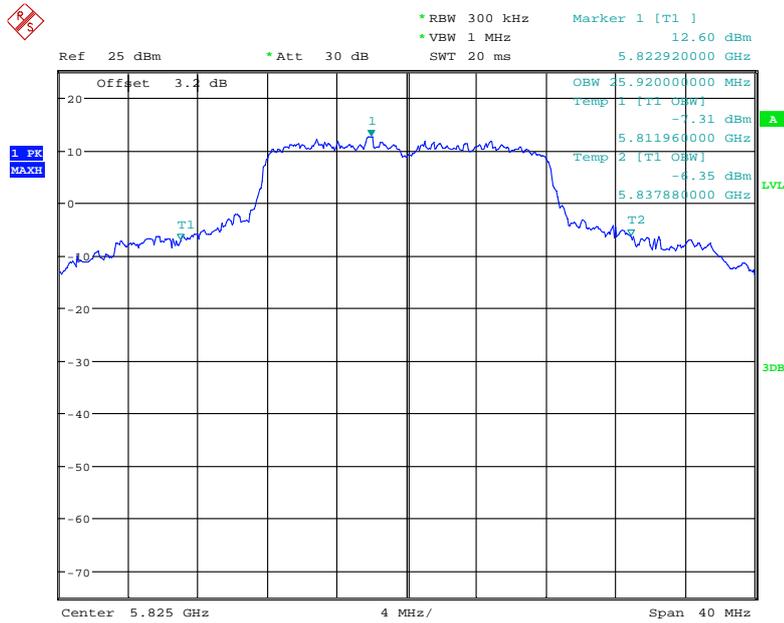


Date: 20.FEB.2019 13:44:21

802.11n ht20 Low Channel

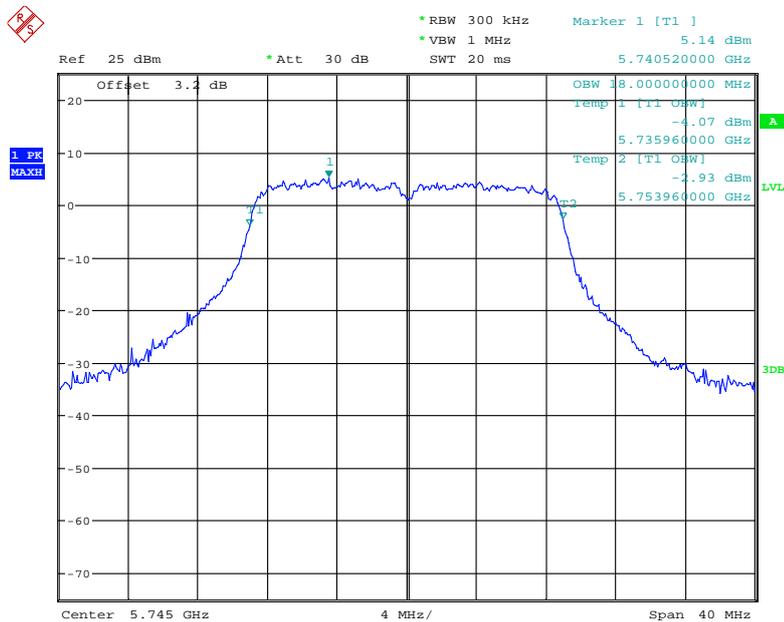


Date: 20.FEB.2019 14:14:23

802.11n ht20 Middle Channel

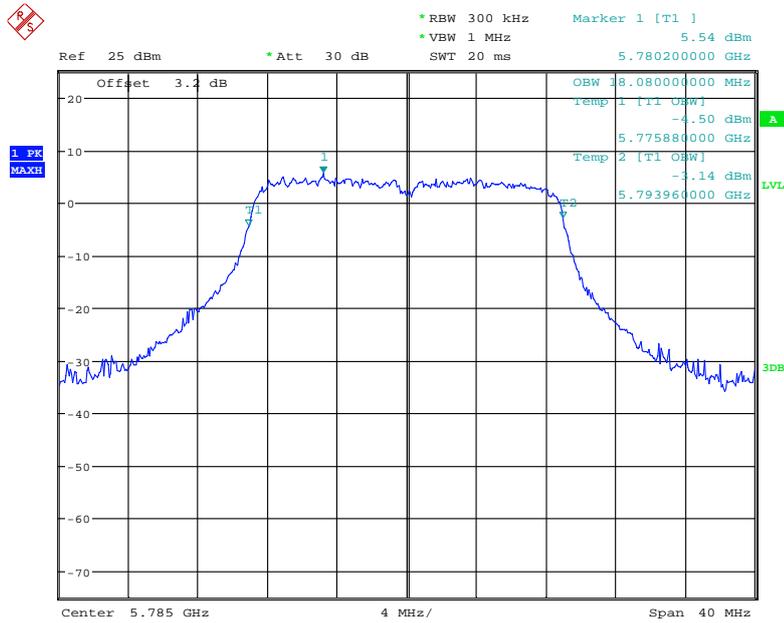


Date: 20.FEB.2019 14:17:08

802.11n ht20 High Channel

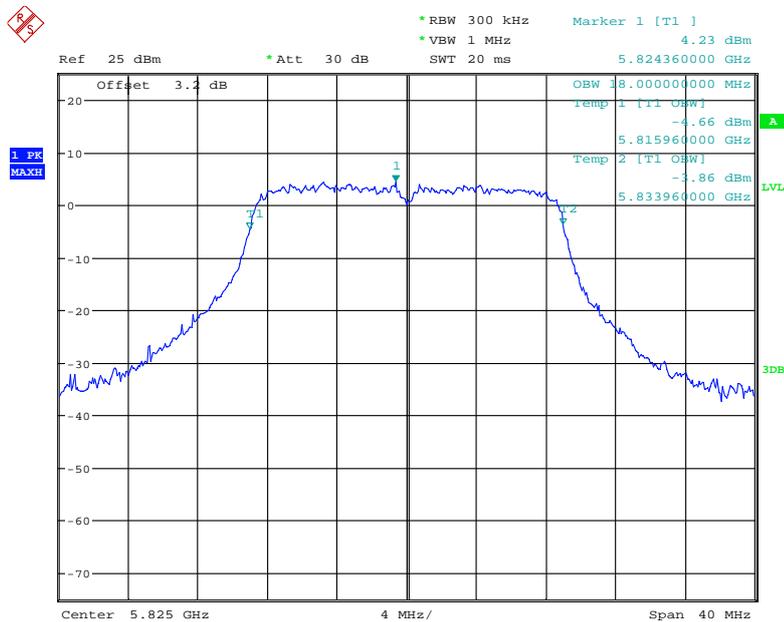


Date: 20.FEB.2019 14:11:49

802.11n ht40 Low Channel

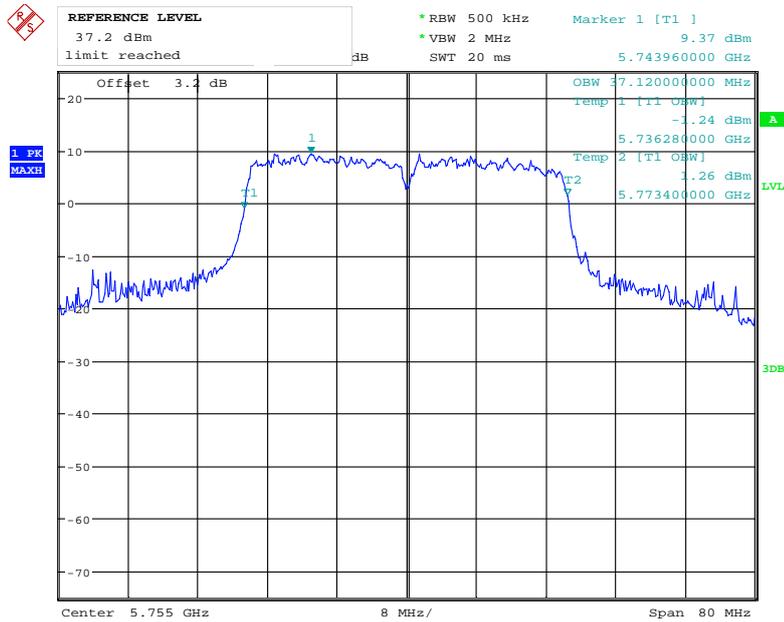

Date: 20.FEB.2019 14:32:30

802.11n ht40 High Channel

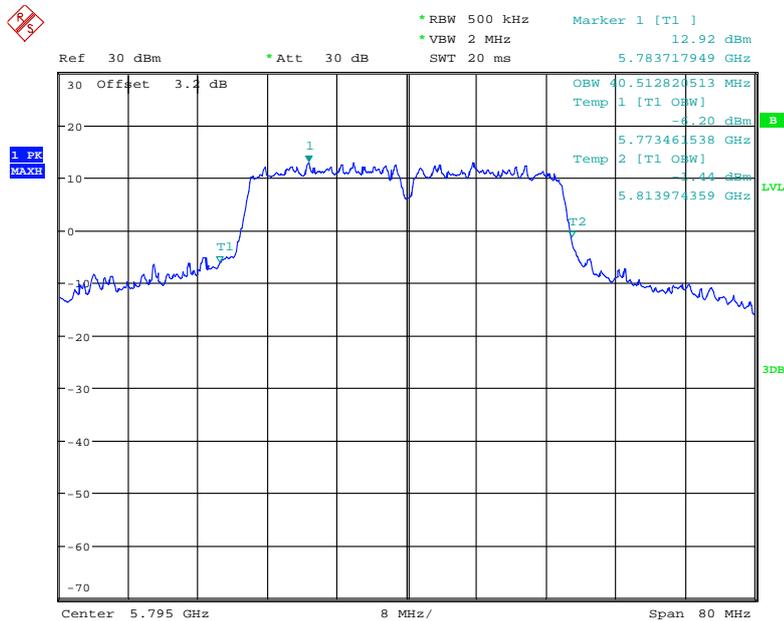

Date: 27.MAR.2019 17:56:35

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	24.6°C
Relative Humidity:	68 %
ATM Pressure:	100.5 kPa

The testing was performed by Tiago Huang on 2019-02-20.

Test Mode: Transmitting

Band	Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)	Result
			Chain 0	Chain 1	Total		
5150 - 5250 MHz	802.11 a	5180	17.83	19.51	21.76	30	PASS
		5200	19.63	20.90	23.32	30	PASS
		5240	20.76	22.42	24.68	30	PASS
	802.11n ht20	5180	15.66	17.10	19.45	30	PASS
		5200	16.46	16.47	19.48	30	PASS
		5240	16.28	15.93	19.12	30	PASS
	802.11n ht40	5190	13.28	13.19	16.25	30	PASS
		5230	19.34	19.44	22.40	30	PASS
	5745 - 5850 MHz	802.11 a	5745	20.98	21.59	24.31	30
5785			20.77	21.35	24.08	30	PASS
5825			20.35	21.66	24.06	30	PASS
802.11n ht20		5745	16.12	16.55	19.35	30	PASS
		5785	15.86	16.60	19.26	30	PASS
		5825	15.83	17.12	19.53	30	PASS
802.11n ht40		5755	21.08	21.38	24.24	30	PASS
		5795	21.19	21.95	24.60	30	PASS

Note:

The duty cycle was calculated into the reading already.

The maximum antenna gain is 4.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

So:

Directional gain = $G_{ANT} + \text{Array Gain} = 4.0 \text{ dBi} < 6\text{dBi}$

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	24.4~26.6°C
Relative Humidity:	62~68 %
ATM Pressure:	100.5~100.6 kPa

The testing was performed by Tiago Huang from 2019-02-19 to 2019-04-10.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz:

Mode	Channel	Frequency (MHz)	Result (dBm/MHz)			Limit (dBm/MHz)
			Chain 0	Chain 1	Total	
802.11a	Low	5180	7.60	9.20	11.48	16
	Middle	5200	9.67	10.09	12.90	
	High	5240	9.71	12.21	14.15	
802.11n ht20	Low	5180	6.55	6.49	9.53	
	Middle	5200	6.67	6.05	9.38	
	High	5240	6.14	5.62	8.90	
802.11n ht40	Low	5190	0.65	-0.87	2.97	
	High	5230	5.19	5.43	8.32	

5725-5850 MHz:

Mode	Channel	Frequency (MHz)	Reading (dBm/300kHz)		Result (dBm/500kHz)	Limit (dBm/500kHz)
			Chain 0	Chain 1	Total	
802.11a	Low	5745	6.15	6.91	11.78	29
	Middle	5785	5.76	7.30	11.83	
	High	5825	6.47	8.39	12.77	
802.11n ht20	Low	5745	-0.20	1.57	6.00	
	Middle	5785	-0.59	2.36	6.36	
	High	5825	-0.91	1.92	5.96	
802.11n ht40	Low	5755	1.44	3.24	7.66	
	High	5795	2.64	5.48	9.52	

Note 1: The maximum antenna gain is 4.0dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:


$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 4.0\text{dBi} + 10 * \log(2/1) = 7.0\text{dBi}$$

Note 2: For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Note 3: SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


**Chain 0:
5150-5250MHz**

802.11a Low Channel

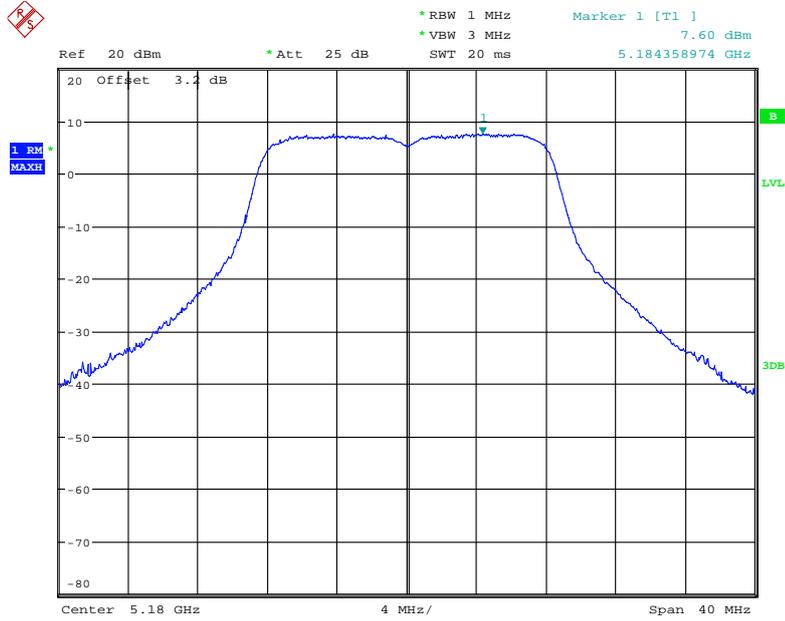


Date: 10.APR.2019 17:28:13

802.11a Middle Channel

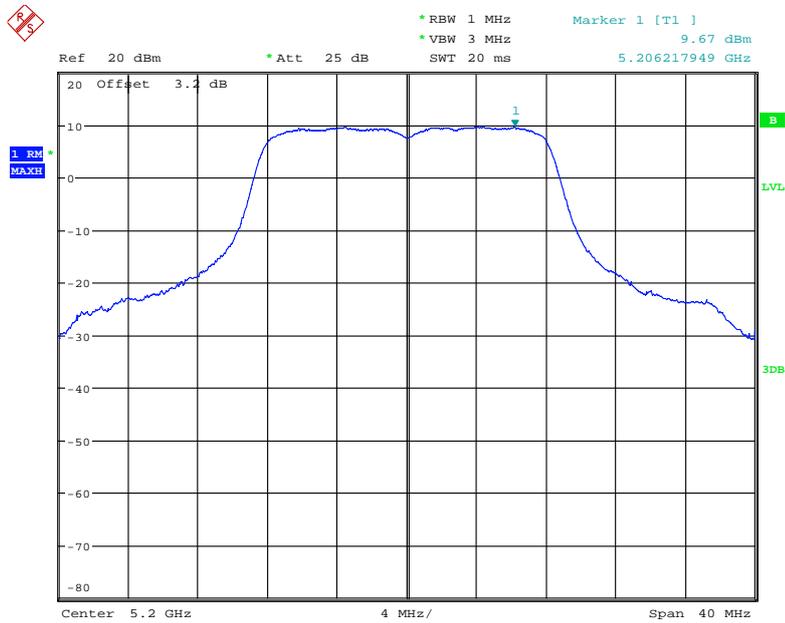


Date: 10.APR.2019 17:30:09

802.11a High Channel

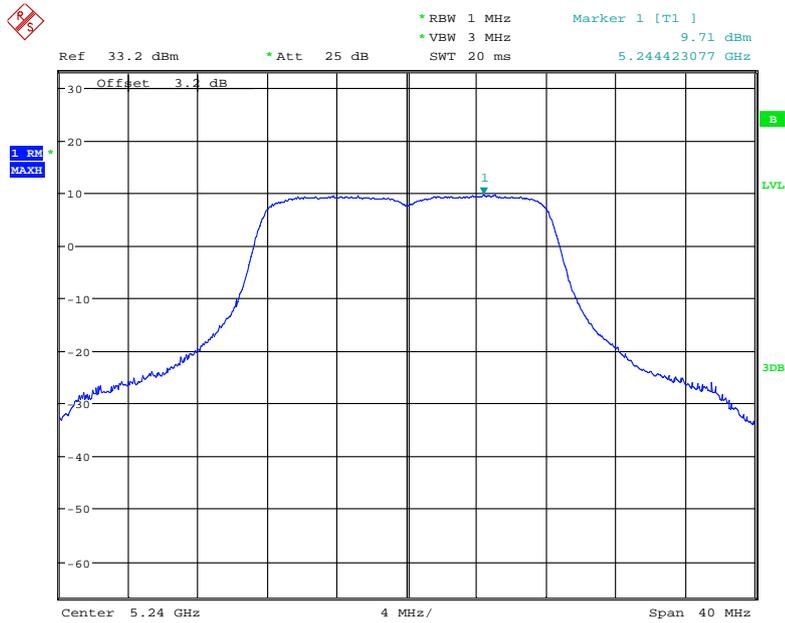


Date: 10.APR.2019 17:48:21

802.11n ht20 Low Channel

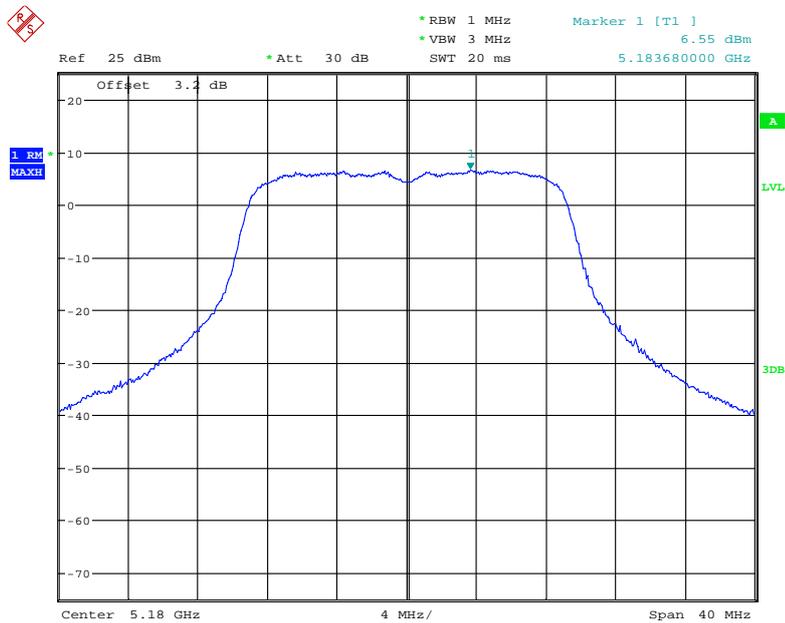


Date: 19.FEB.2019 23:46:10

802.11n ht20 Middle Channel

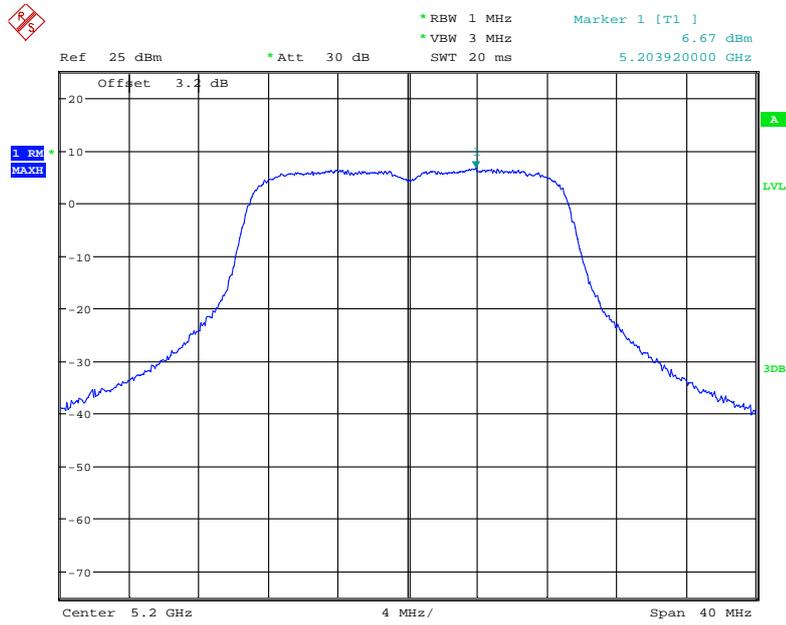


Date: 19.FEB.2019 23:48:41

802.11n ht20 High Channel

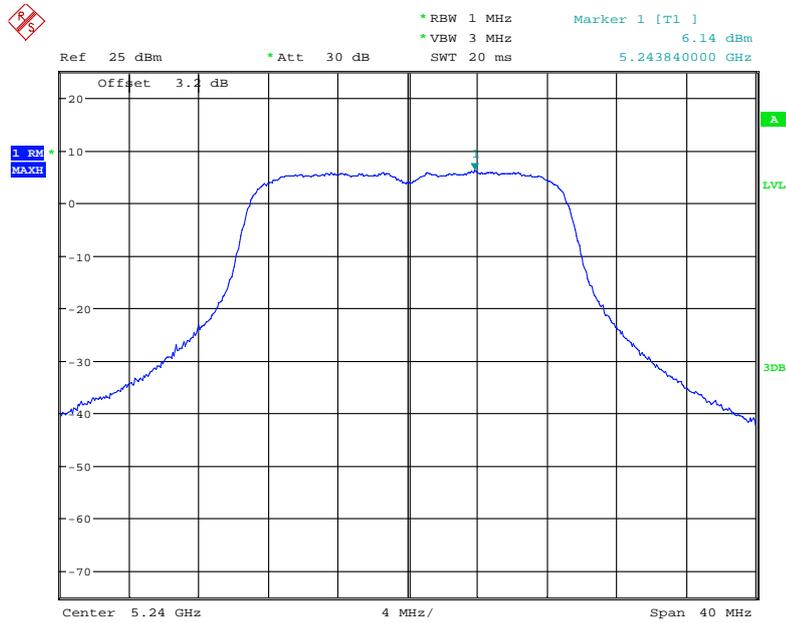


Date: 19.FEB.2019 23:49:58

802.11n ht40 Low Channel

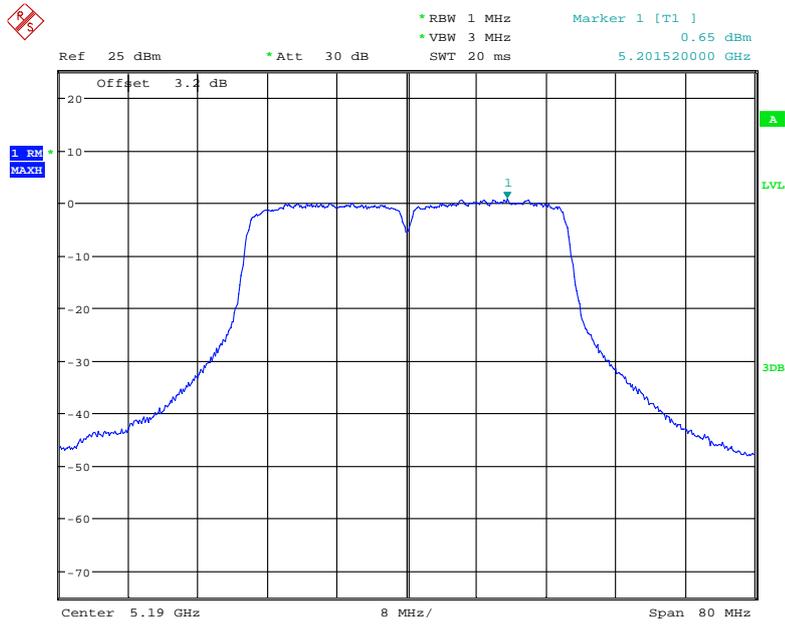

Date: 19.FEB.2019 23:53:02


802.11n ht40 High Channel

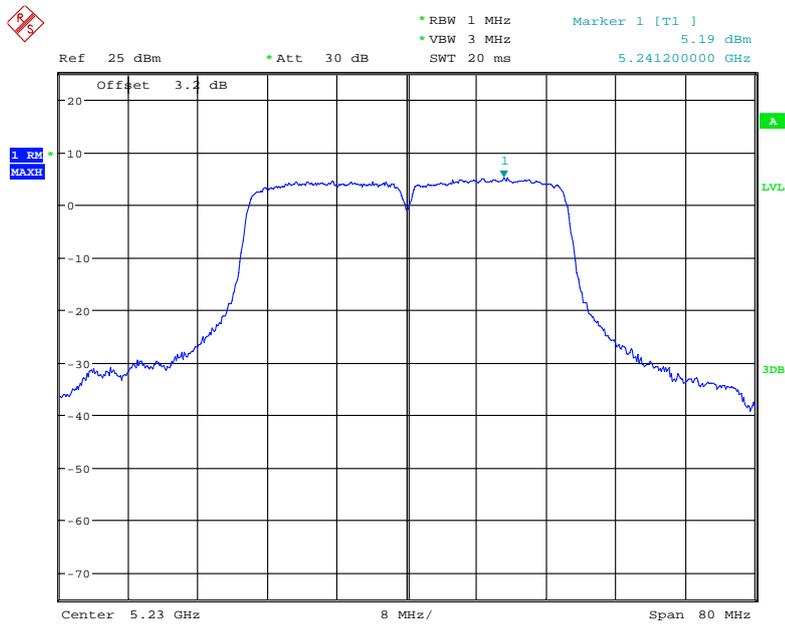

Date: 19.FEB.2019 23:55:33


5725-5850MHz

802.11a Low Channel

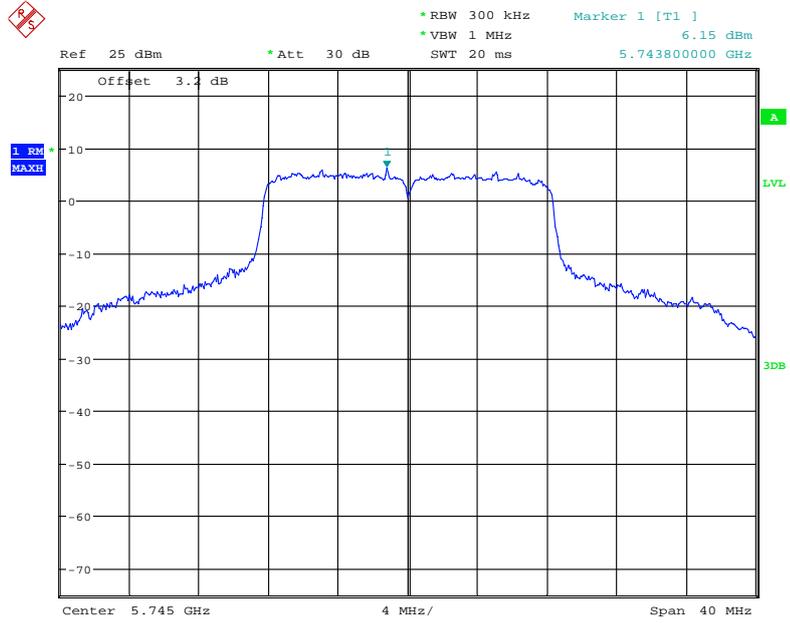


Date: 20.FEB.2019 13:37:28

802.11a Middle Channel

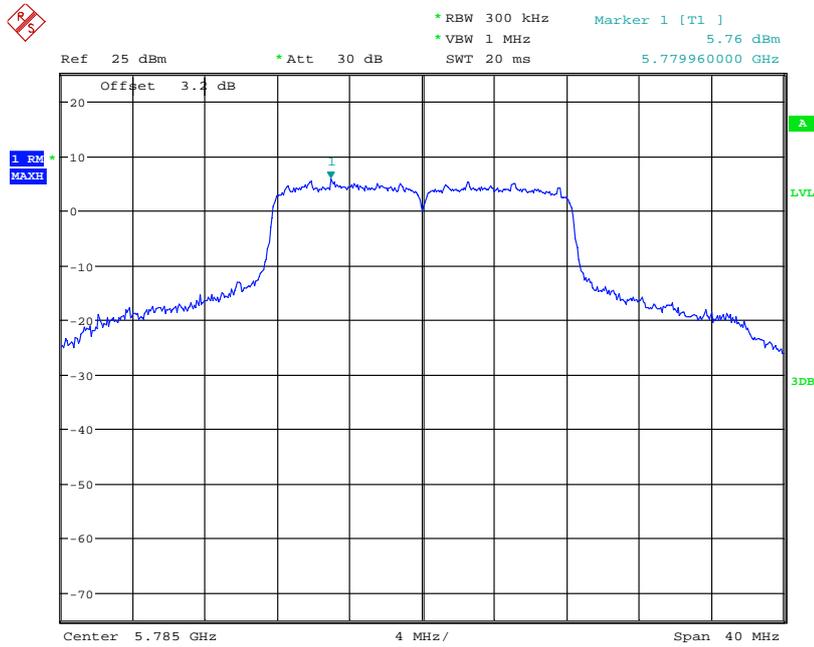


Date: 20.FEB.2019 13:40:23

802.11a High Channel

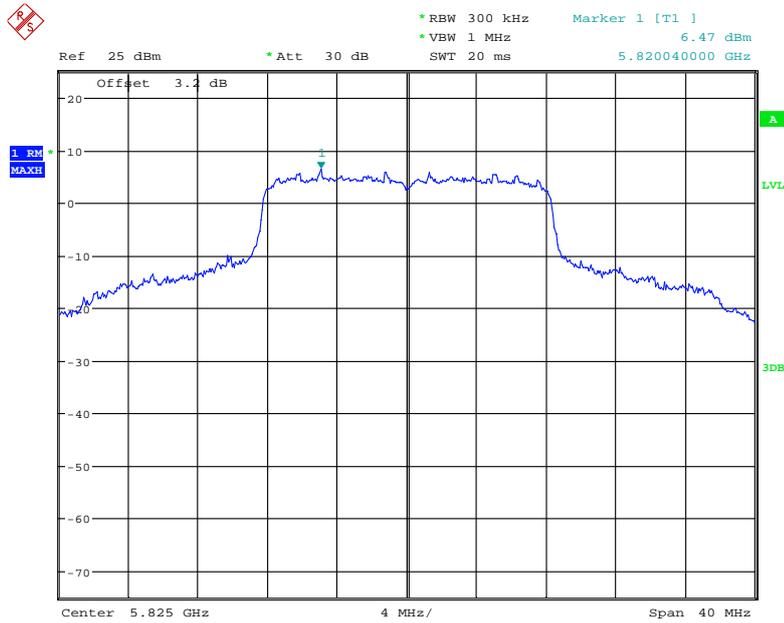


Date: 20.FEB.2019 13:44:38

802.11n ht20 Low Channel

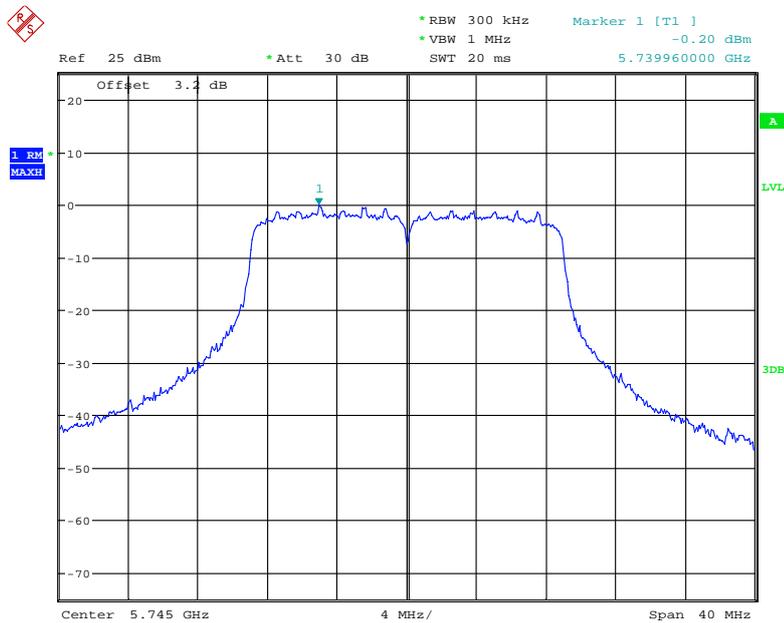


Date: 20.FEB.2019 14:14:47

802.11n ht20 Middle Channel

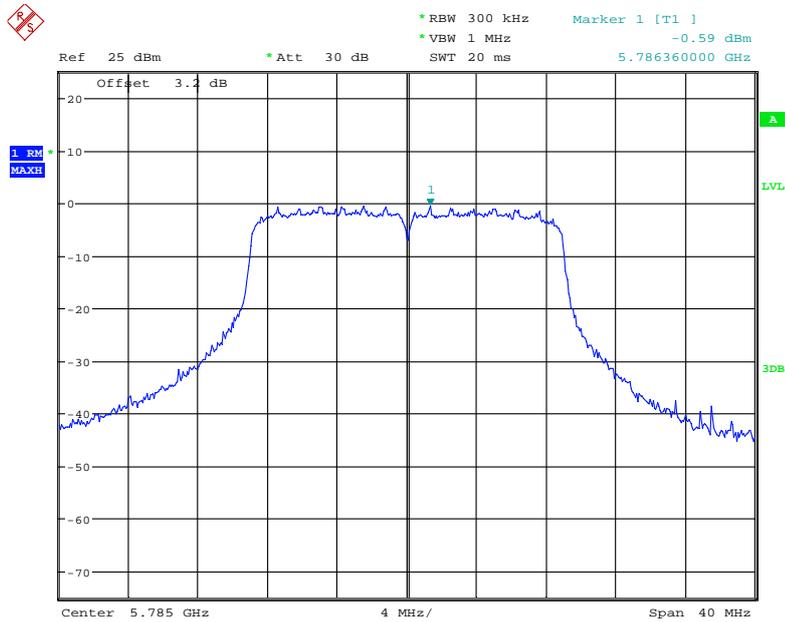


Date: 20.FEB.2019 14:17:33

802.11n ht20 High Channel

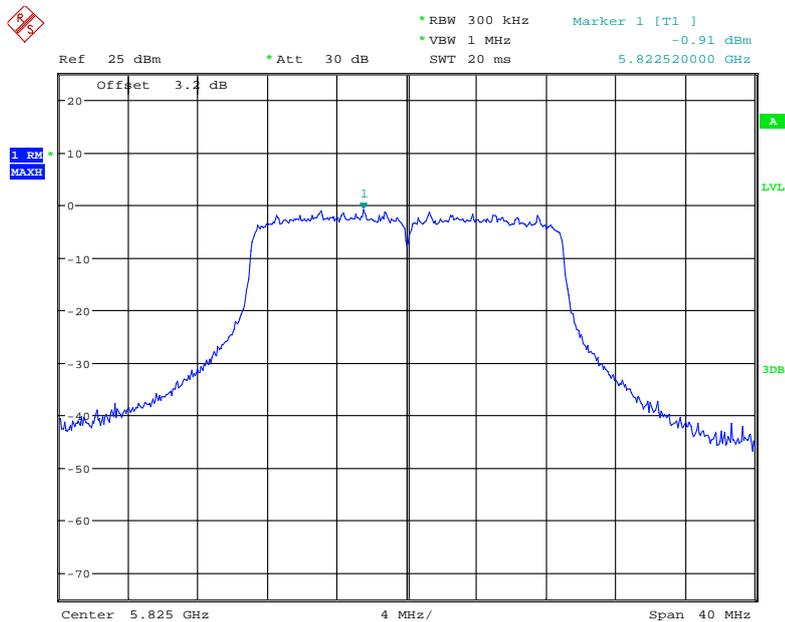


Date: 20.FEB.2019 14:12:14

802.11n ht40 Low Channel

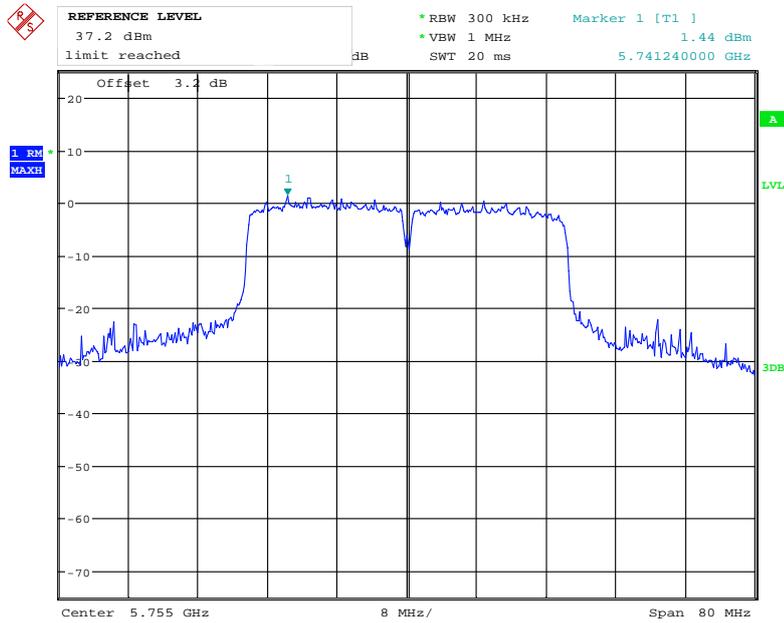

Date: 20.FEB.2019 14:32:52


802.11n ht40 High Channel

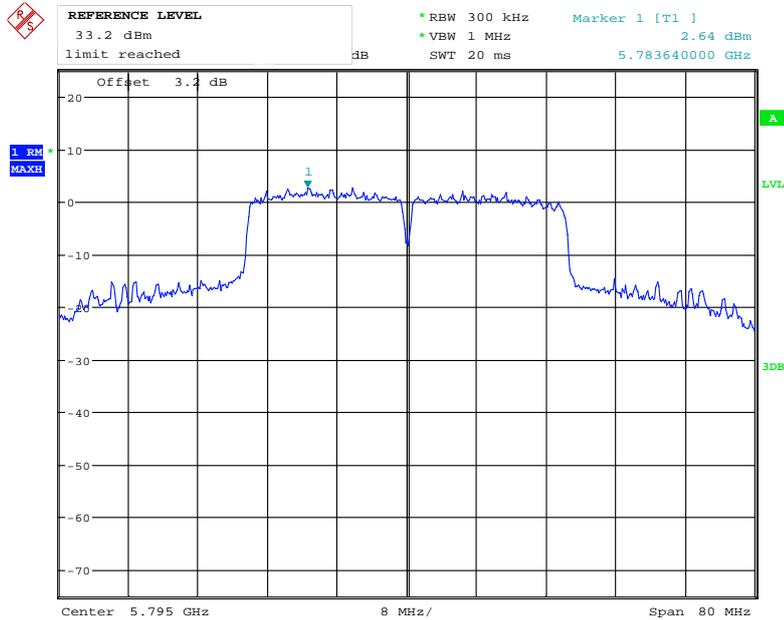

Date: 20.FEB.2019 14:24:51


**Chain 1:
5150-5250MHz**

802.11a Low Channel

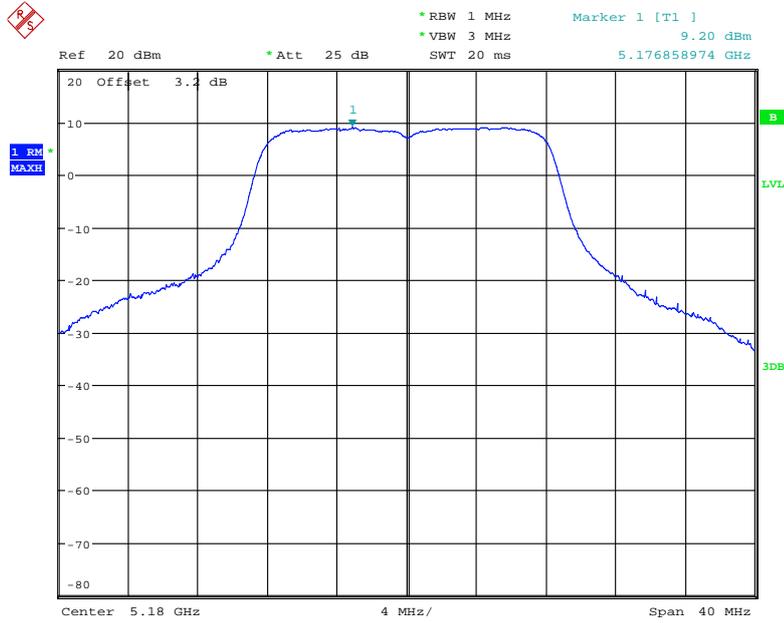


Date: 10.APR.2019 17:27:13

802.11a Middle Channel

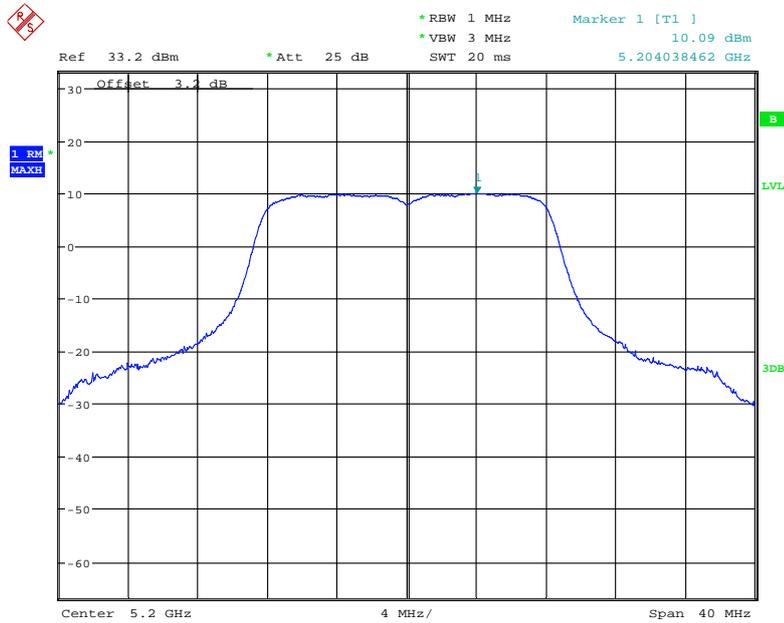


Date: 10.APR.2019 17:52:34

802.11a High Channel

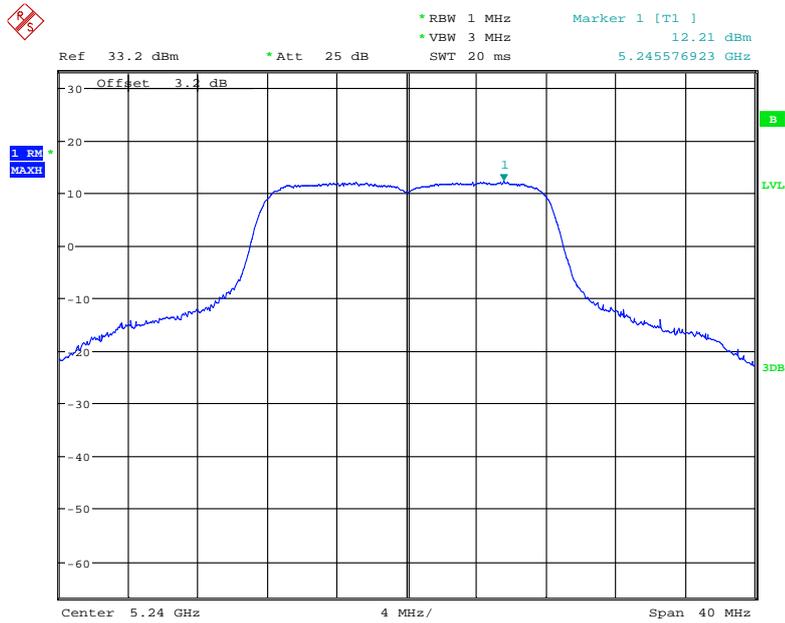


Date: 10.APR.2019 17:45:43

802.11n ht20 Low Channel

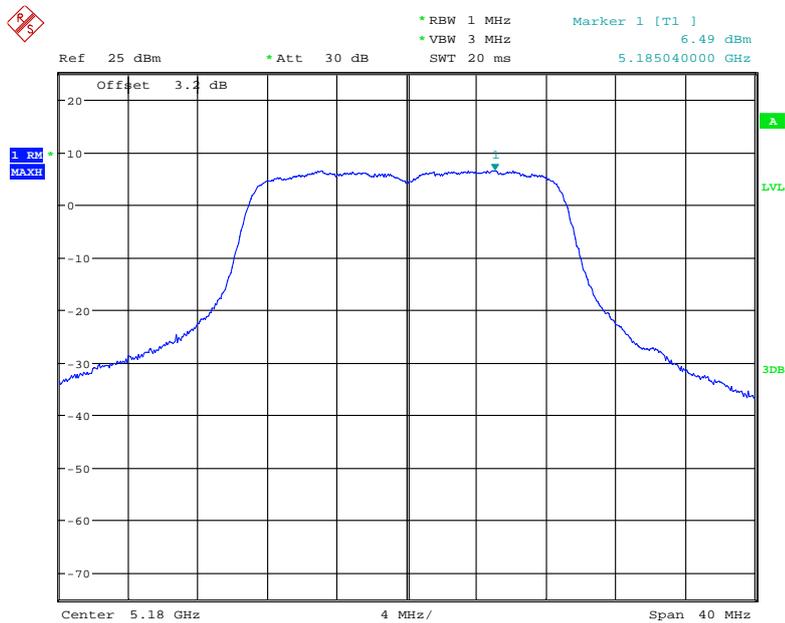


Date: 20.FEB.2019 00:00:19

802.11n ht20 Middle Channel

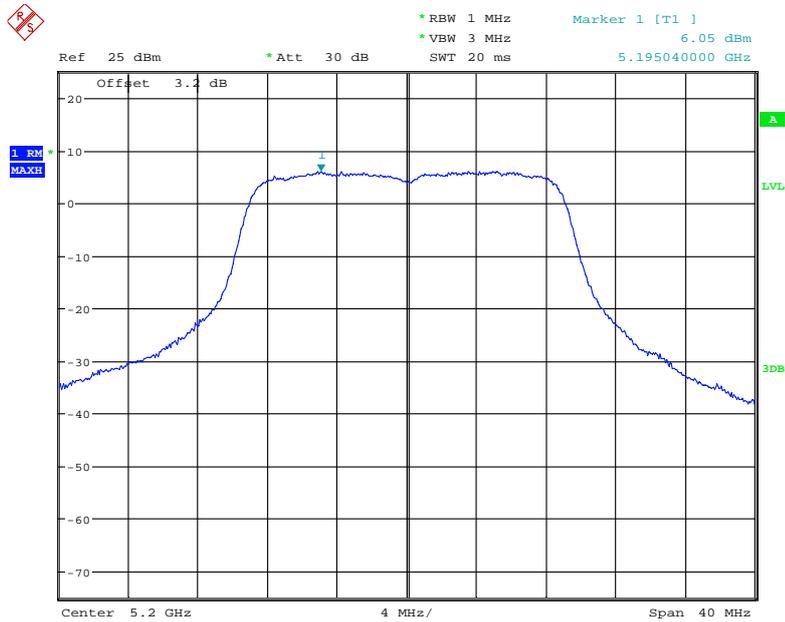


Date: 20.FEB.2019 00:01:50

802.11n ht20 High Channel

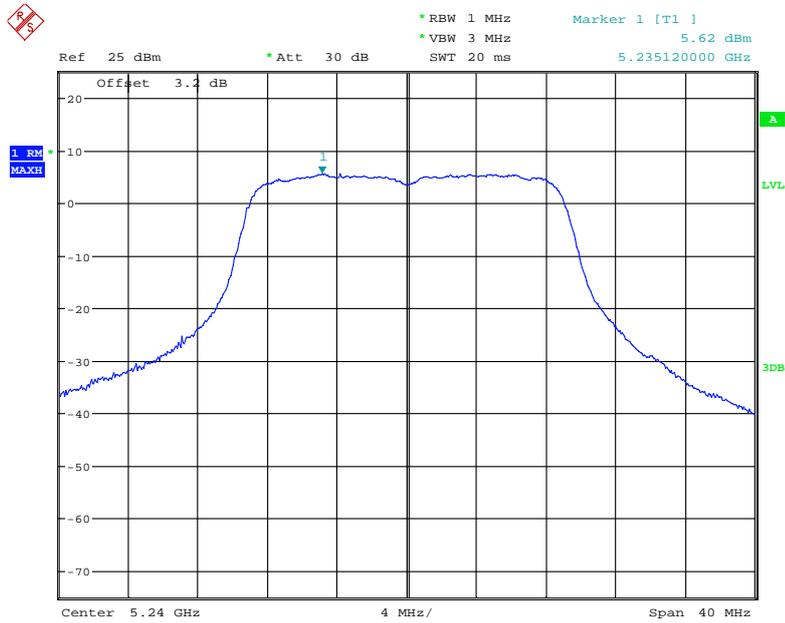


Date: 20.FEB.2019 00:03:25

802.11n ht40 Low Channel

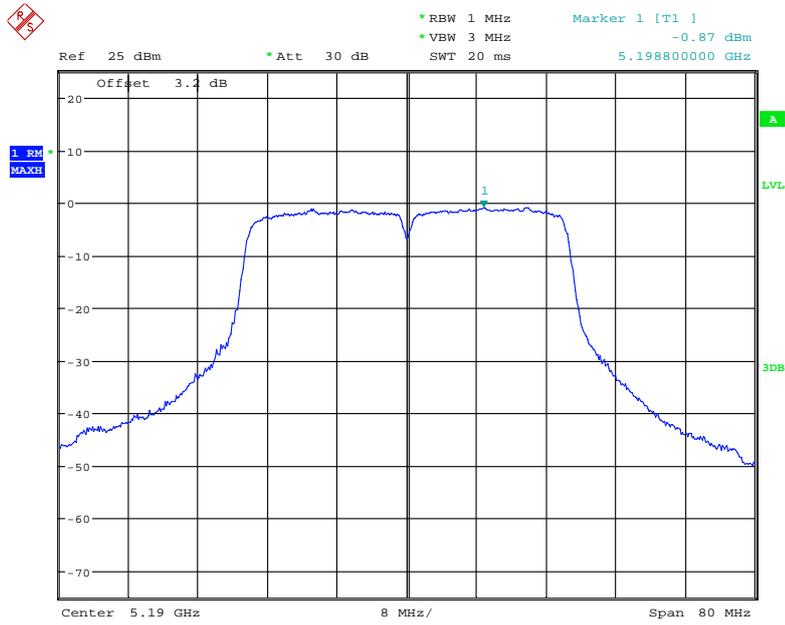

Date: 20.FEB.2019 00:05:50


802.11n ht40 High Channel

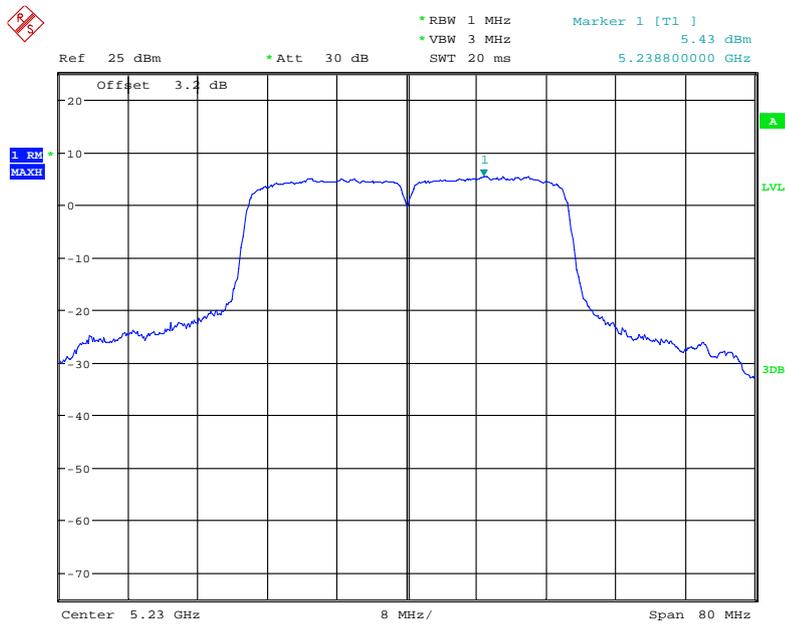

Date: 20.FEB.2019 00:07:45


5725-5850MHz

802.11a Low Channel

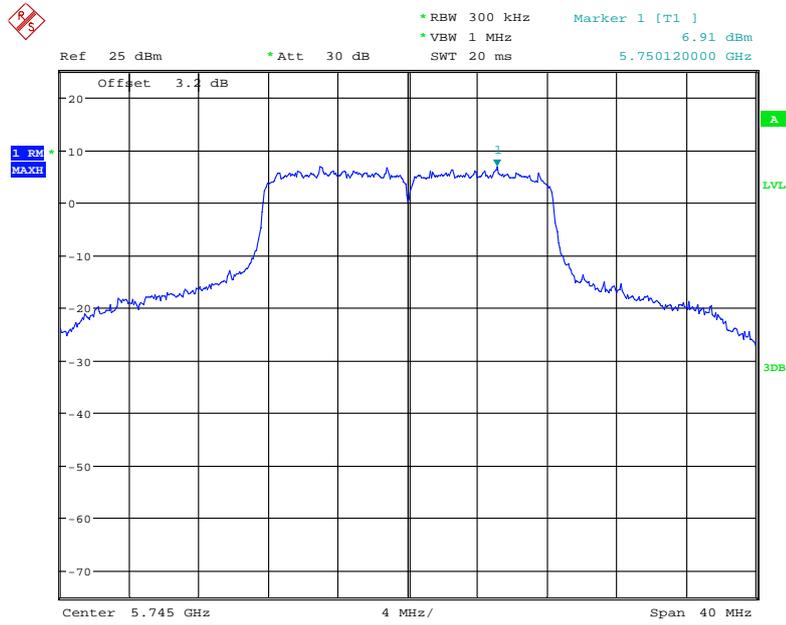


Date: 20.FEB.2019 13:49:07

802.11a Middle Channel

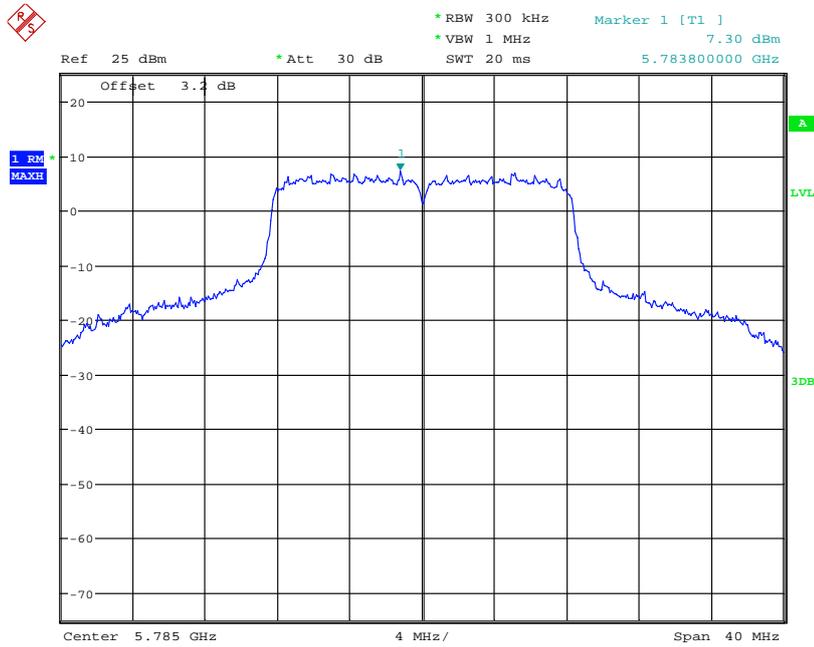


Date: 20.FEB.2019 13:51:51

802.11a High Channel

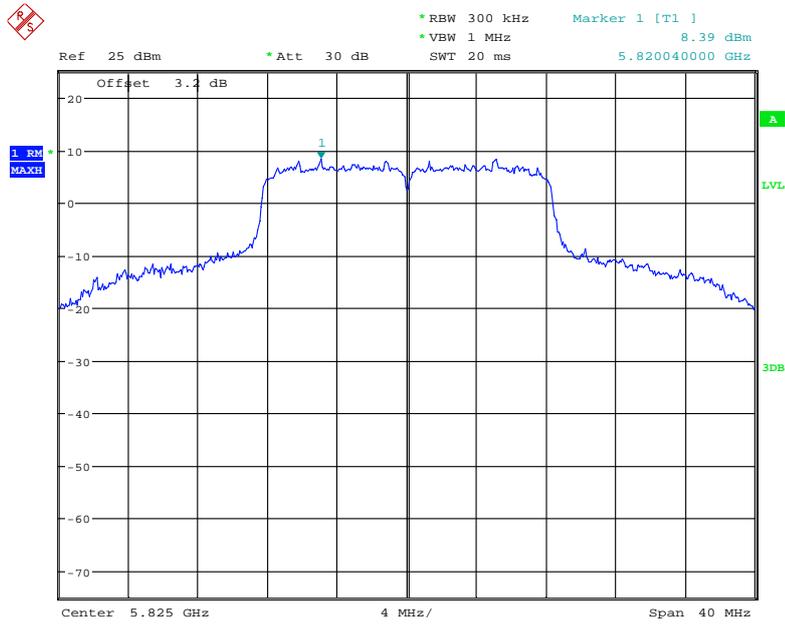


Date: 20.FEB.2019 13:46:53

802.11n ht20 Low Channel

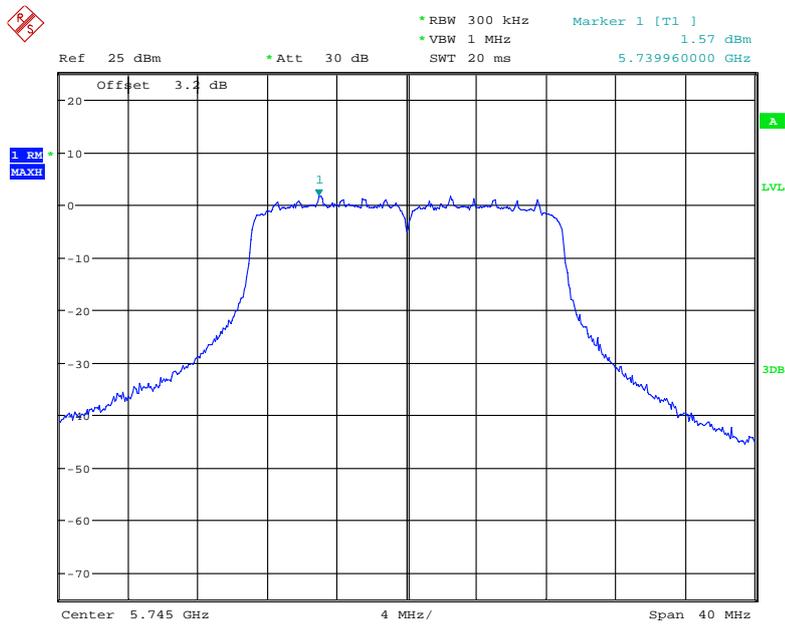


Date: 20.FEB.2019 13:56:46

802.11n ht20 Middle Channel

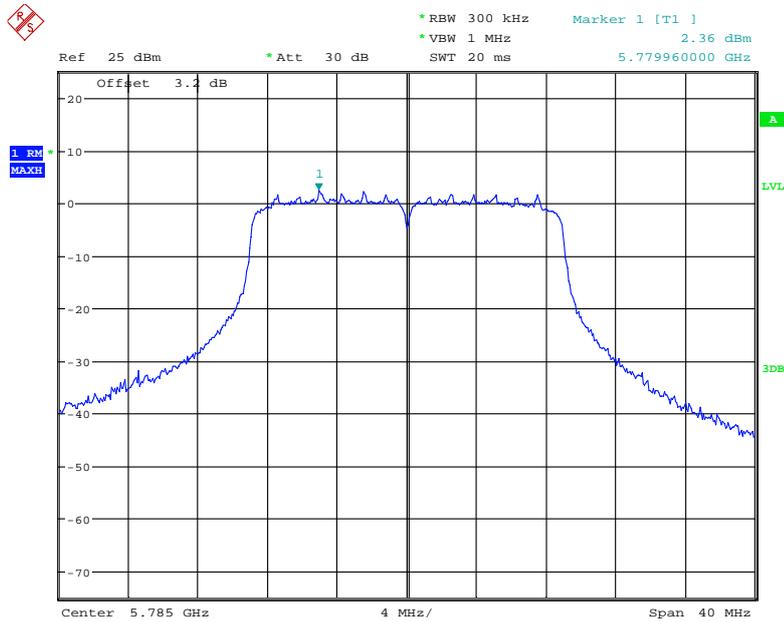


Date: 20.FEB.2019 13:53:57

802.11n ht20 High Channel

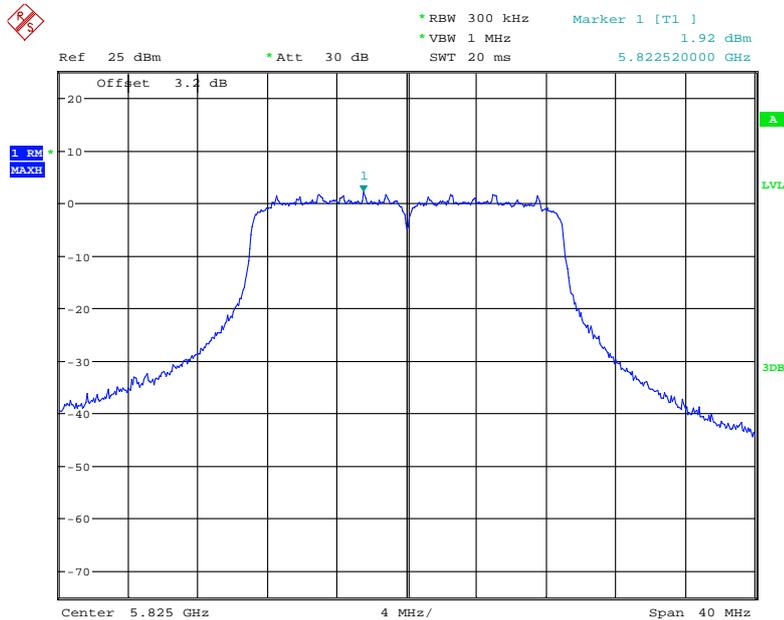


Date: 20.FEB.2019 14:00:19

802.11n ht40 Low Channel

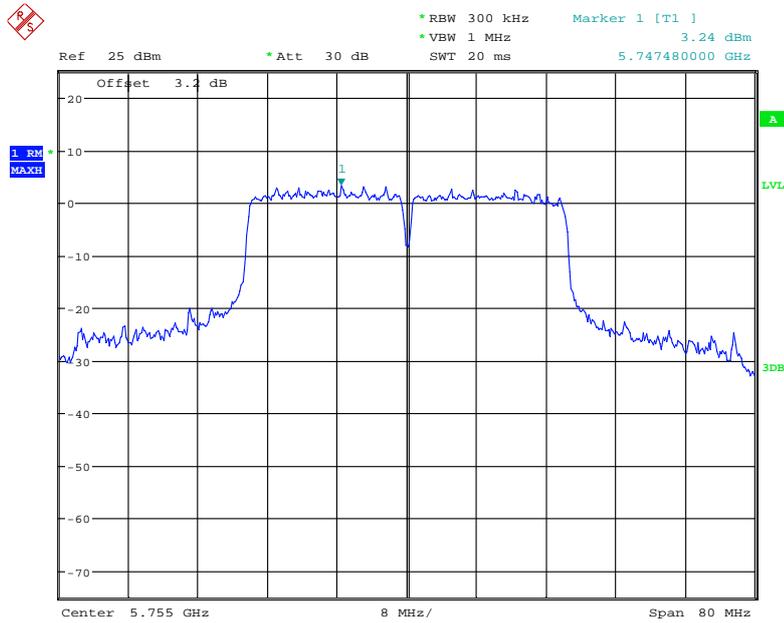

Date: 20.FEB.2019 14:34:54

802.11n ht40 High Channel

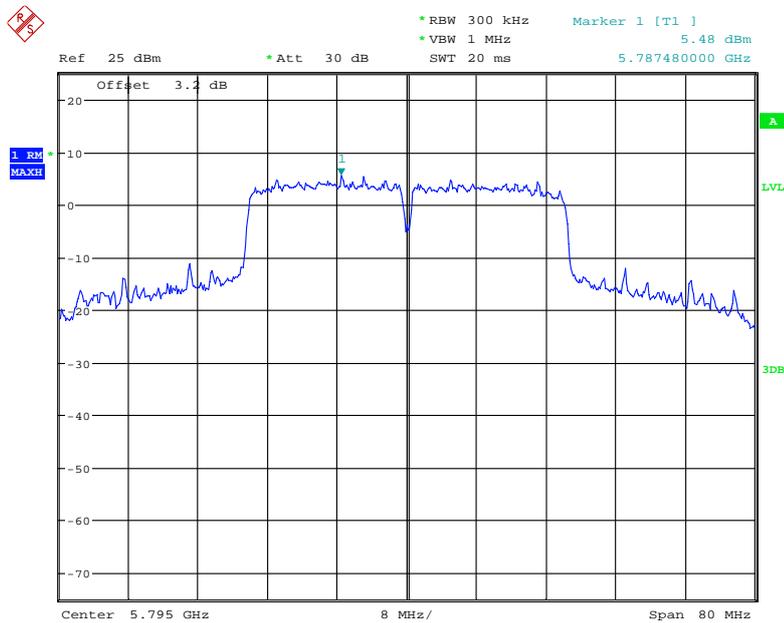

Date: 20.FEB.2019 14:36:52

***** END OF REPORT *****