



FCC PART 15.247

TEST REPORT

For

SZ DJI TECHNOLOGY CO., LTD

14th floor, West Wing, Skyworth Semiconductor Design Building NO.18 Gaoxin South 4th Ave, Nanshan, Shenzhen, Guangdong, China

FCC ID: SS3-WM3251511

Report Type: Original Report	Product Type: Phantom 3 4K
Test Engineer: Allen Qiao	<i>Allen Qiao</i>
Report Number: RDG151112002-00A	
Report Date: 2015-11-20	
Reviewed By: Sula Huang RF Leader	<i>Sula Huang</i>
Test Laboratory: Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	8
APPLICABLE STANDARD	8
FCC §15.203 - ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	11
TEST PROCEDURE	11
CORRECTED AMPLITUDE & MARGIN CALCULATION	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST RESULTS SUMMARY	12
TEST DATA	12
FCC §15.247(a) (2) – 6dB BANDWIDTH	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST EQUIPMENT LIST AND DETAILS.....	21
TEST DATA	21
FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER	29
APPLICABLE STANDARD	29
TEST PROCEDURE	29
TEST EQUIPMENT LIST AND DETAILS.....	29
TEST DATA	30
FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE	31
APPLICABLE STANDARD	31
TEST PROCEDURE	31
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §15.247(e) - POWER SPECTRAL DENSITY	36
APPLICABLE STANDARD	36

TEST PROCEDURE36
TEST EQUIPMENT LIST AND DETAILS.....36
TEST DATA36

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *SZ DJI TECHNOLOGY CO., LTD*'s product, model number: *W325 (FCC ID: SS3-WM3251511)* (the "EUT") in this report was a *Phantom 3 4K*, which was measured approximately: 50 cm (L) x 50 cm (W) x 18.5 cm(H), rated input voltage: DC 15.2V from lithium battery. And the battery can remove from the EUT and charged by adapter.

Adapter information:
Model:A14-057N1A
Input: AC 100-240V, 1.8A, 50-60Hz
Output: DC 17.4, 3.3A

** All measurement and test data in this report was gathered from production sample serial number: 151112002. (Assigned by BACL.Dongguan). The EUT was received on 2015-11-13.*

Objective

This report is prepared on behalf of *SZ DJI TECHNOLOGY CO., LTD* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communications Commission's rules

The tests were performed in order to determine the compliance of the EUT with FCC Part 15-Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industrial Zone, Tangxia, Dongguan, Guangdong, China

Test site at Bay Area Compliance Laboratories Corp. (Dongguan) has been fully described in reports submitted to the Federal Communications Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 06, 2015.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in Engineering Mode, which was provided by the manufacturer.

The system supports 802.11g and n ht20 mode, both modes supports MIMO function. And 11 channels employed by the system:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

For 802.11g, 802.11n 20 modes were tested with Channel 1, 6 and 11.

The worst-case data rates (54Mbps for 802.11g and MCS7 for 802.11 n ht20) are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

EUT Exercise Software

The worst condition (maximum power with 100% duty cycle) was setting by the software as following table:


Software and version			DJI-RF Certification		
Mode	Channel	Frequency (MHz)	Data Rate (Mbps)	Power Level	
				Chain 0	Chain 1
802.11 g	Low	2412	54	30	30
	Middle	2437	54	30	30
	High	2462	54	30	30
802.11 n20	Low	2412	MCS7	30	30
	Middle	2437	MCS7	30	30
	High	2462	MCS7	30	30

Equipment Modifications


No modification was made to the EUT.

Block Diagram of Test Setup

Below 1GHz:

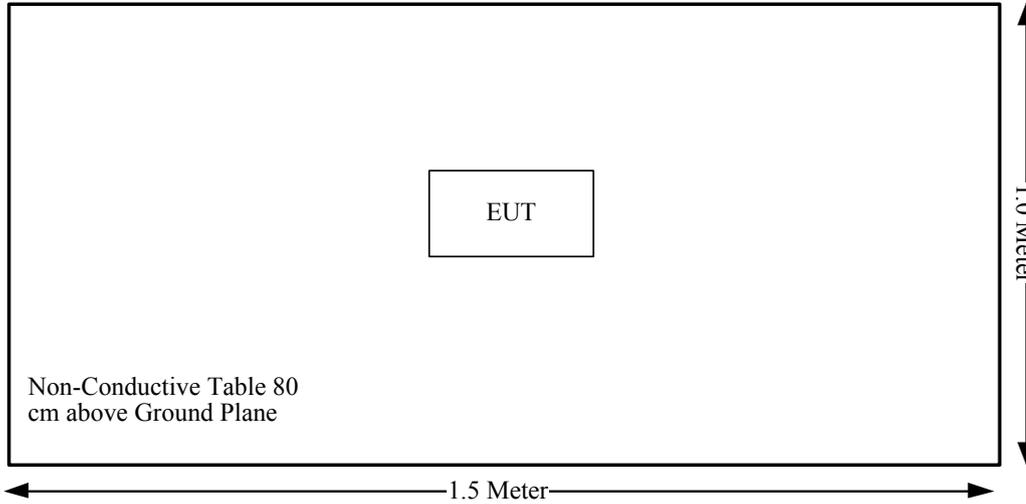

Above 1GHz:

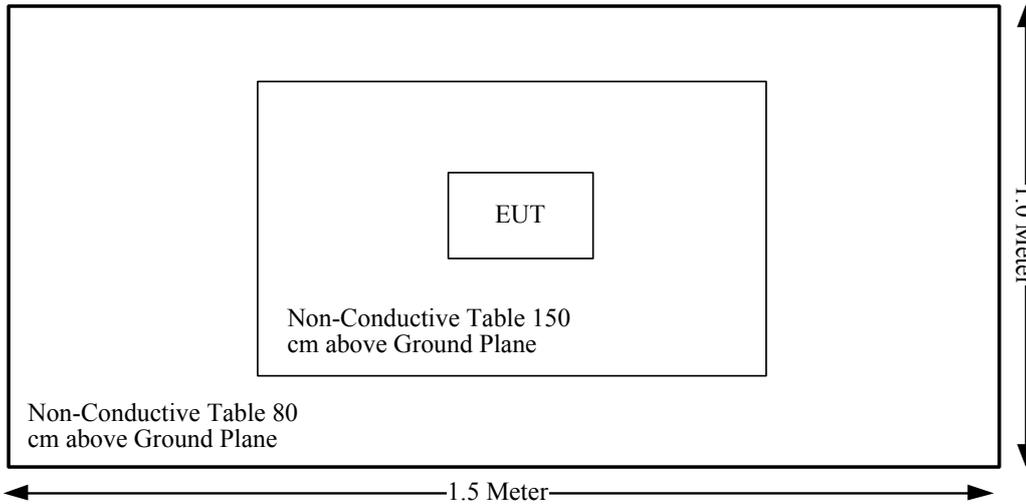

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Not Applicable
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Conducted Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

Not Applicable: The EUT powered by lithium battery.

FCC §15.247 (i) & §1.1307 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247(i) and subpart §1.1307, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Frequency (MHz)	Antenna Gain		Tune-up Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	2	1.58	25	316.23	20.00	0.10	1.0

Note: The tune-up power is 24+/-1dBm.

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Antenna Connector Construction

The EUT has 4 internal antennas arrangement, two antennas for 2.4G TX/RX and the gain is 2.0dBi, two antennas for 5G RX and the antenna gain is 1.5dBi, fulfill the requirement of the item. Please refer to the internal photos.

Result: Compliance.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard

FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

Compliance or non-compliance with a disturbance limit shall be determined in the following manner:

If U_{lab} is less than or equal to U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.

If U_{lab} is greater than U_{cispr} of Table 2, then:

- compliance is deemed to occur if no measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit;
- non-compliance is deemed to occur if any measured disturbance level, increased by $(U_{lab} - U_{cispr})$, exceeds the disturbance limit.

Based on CISPR 16-4-2-2011, measurement uncertainty of radiated emission at a distance of 3m at Bay Area Compliance Laboratories Corp. (Dongguan) is:


- 30M~200MHz: 5.0 dB
- 200M~1GHz: 6.2 dB
- 1G~6GHz: 4.45 dB
- 6G~18GHz: 5.23 dB

Table 2 – Values of U_{cispr}


Measurement	U_{cispr}
Radiated disturbance (electric field strength at an OATS or in a SAC) (30 MHz to 1000 MHz)	6.3 dB
Radiated disturbance (electric field strength in a FAR) (1 GHz to 6 GHz)	5.2 dB
Radiated disturbance (electric field strength in a FAR) (6 GHz to 18 GHz)	5.5 dB

EUT Setup

Below 1GHz:

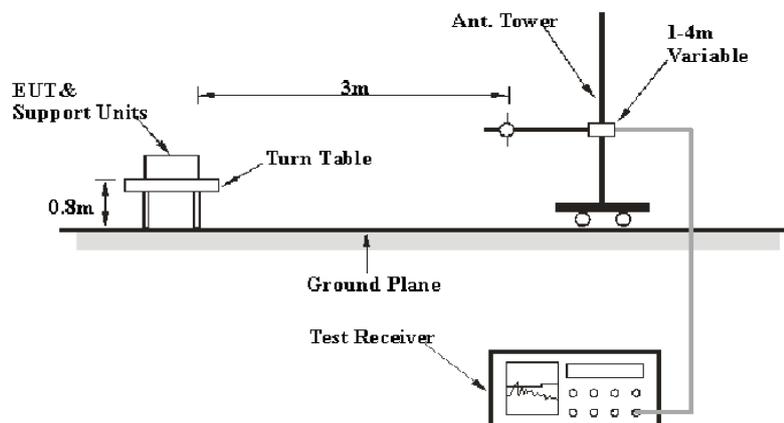

Above 1GHz:

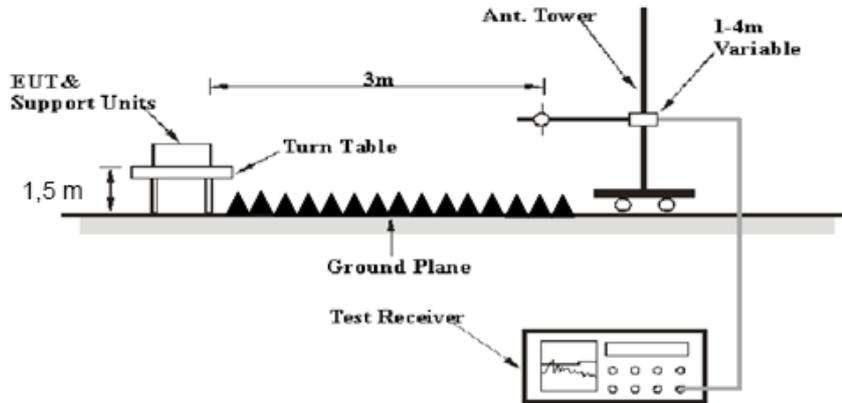

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Loss and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Loss} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2015-08-03	2016-08-02
Sunol Sciences	Antenna	JB3	A060611-3	2014-11-06	2017-11-05
HP	Amplifier	8447E	2434A02181	2015-09-01	2016-09-01
Agilent	Spectrum Analyzer	E4440A	SG43360054	2014-12-04	2015-12-04
ETS-Lindgren	Horn Antenna	3115	9808-5557	2015-09-06	2018-09-06
Mini-Circuit	Amplifier	ZVA-213-S+	054201245	2015-02-19	2016-02-19
R&S	Spectrum Analyzer	FSP 38	100478	2015-05-09	2016-05-09
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2014-06-16	2017-06-15
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2015-09-06	2016-09-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Section 15.205, 15.209 and 15.247, with the worst margin reading of:

5.36 dB at 2390 MHz in the **Vertical** polarization for 802.11g mode

Test Data

Environmental Conditions

Temperature:	28.9 °C
Relative Humidity:	45 %
ATM Pressure:	99.6 kPa

The testing was performed by Allen Qiao on 2015-11-17.

802.11g Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	74.47	PK	H	25.67	3.68	0.00	103.82	N/A	N/A
2412	63.36	AV	H	25.67	3.68	0.00	92.71	N/A	N/A
2412	81.55	PK	V	25.67	3.68	0.00	110.90	N/A	N/A
2412	70.56	AV	V	25.67	3.68	0.00	99.91	N/A	N/A
2390	36.5	PK	V	25.61	3.63	0.00	65.74	74.00	8.26
2390	19.4	AV	V	25.61	3.63	0.00	48.64	54.00	5.36
4824	35.03	PK	V	30.64	5.03	27.41	43.29	74.00	30.71
4824	21.78	AV	V	30.64	5.03	27.41	30.04	54.00	23.96
7236	32.5	PK	V	34.17	6.65	25.90	47.42	74.00	26.58
7236	19.22	AV	V	34.17	6.65	25.90	34.14	54.00	19.86
9648	30.14	PK	V	36.06	8.55	27.46	47.29	74.00	26.71
9648	17.14	AV	V	36.06	8.55	27.46	34.29	54.00	19.71
3190	36.01	PK	V	27.81	6.26	27.38	42.70	74.00	31.30
3190	22.98	AV	V	27.81	6.26	27.38	29.67	54.00	24.33
513.2	40.2	QP	V	18.08	2.77	22.05	39.00	46.00	7.00
Middle Channel: 2437 MHz									
2437	73.17	PK	H	25.74	3.75	0.00	102.66	N/A	N/A
2437	62.22	AV	H	25.74	3.75	0.00	91.71	N/A	N/A
2437	80.21	PK	V	25.74	3.75	0.00	109.70	N/A	N/A
2437	69.09	AV	V	25.74	3.75	0.00	98.58	N/A	N/A
4874	34.43	PK	V	30.77	5.14	27.42	42.92	74.00	31.08
4874	21.25	AV	V	30.77	5.14	27.42	29.74	54.00	24.26
7311	32.11	PK	V	34.35	6.74	25.88	47.32	74.00	26.68
7311	18.85	AV	V	34.35	6.74	25.88	34.06	54.00	19.94
9748	29.72	PK	V	36.30	8.61	27.24	47.39	74.00	26.61
9748	16.71	AV	V	36.30	8.61	27.24	34.38	54.00	19.62
4589	36.53	PK	V	30.03	5.38	27.31	44.63	74.00	29.37
4589	23.57	AV	V	30.03	5.38	27.31	31.67	54.00	22.33
3190	35.69	PK	V	27.81	6.26	27.38	42.38	74.00	31.62
3190	22.58	AV	V	27.81	6.26	27.38	29.27	54.00	24.73
513.2	40.6	QP	V	18.08	2.77	22.05	39.40	46.00	6.60
High Channel: 2462 MHz									
2462	73.36	PK	H	25.80	3.75	0.00	102.91	N/A	N/A
2462	62.41	AV	H	25.80	3.75	0.00	91.96	N/A	N/A
2462	80.44	PK	V	25.80	3.75	0.00	109.99	N/A	N/A
2462	69.57	AV	V	25.80	3.75	0.00	99.12	N/A	N/A
2483.5	32.7	PK	V	25.86	3.67	0.00	62.23	74.00	11.77
2483.5	16.22	AV	V	25.86	3.67	0.00	45.75	54.00	8.25
4924	34.78	PK	V	30.90	5.34	27.43	43.59	74.00	30.41
4924	21.51	AV	V	30.90	5.34	27.43	30.32	54.00	23.68
7386	32.23	PK	V	34.53	6.83	25.86	47.73	74.00	26.27
7386	19.05	AV	V	34.53	6.83	25.86	34.55	54.00	19.45
9848	29.97	PK	V	36.54	8.66	26.94	48.23	74.00	25.77
9848	16.9	AV	V	36.54	8.66	26.94	35.16	54.00	18.84
3190	35.99	PK	V	27.81	6.26	27.38	42.68	74.00	31.32
3190	22.68	AV	V	27.81	6.26	27.38	29.37	54.00	24.63
513.2	40.3	QP	V	18.08	2.77	22.05	39.10	46.00	6.90

802.11n20 Mode


Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Detector (PK/QP/AV)	Polar (H/V)	Factor (dB)					
Low Channel: 2412 MHz									
2412	73.65	PK	H	25.67	3.68	0.00	103.00	N/A	N/A
2412	62.84	AV	H	25.67	3.68	0.00	92.19	N/A	N/A
2412	80.75	PK	V	25.67	3.68	0.00	110.10	N/A	N/A
2412	69.88	AV	V	25.67	3.68	0.00	99.23	N/A	N/A
2390	34.23	PK	H	25.61	3.63	0.00	63.47	74.00	10.53
2390	18.03	AV	H	25.61	3.63	0.00	47.27	54.00	6.73
4824	34.16	PK	H	30.64	5.03	27.41	42.42	74.00	31.58
4824	20.77	AV	H	30.64	5.03	27.41	29.03	54.00	24.97
7236	32.36	PK	H	34.17	6.65	25.90	47.28	74.00	26.72
7236	19.37	AV	H	34.17	6.65	25.90	34.29	54.00	19.71
9648	30.34	PK	H	36.06	8.55	27.46	47.49	74.00	26.51
9648	17.22	AV	H	36.06	8.55	27.46	34.37	54.00	19.63
3194	37.27	PK	H	27.82	6.19	27.37	43.91	74.00	30.09
3194	24.13	AV	H	27.82	6.19	27.37	30.77	54.00	23.23
513.2	40.7	QP	V	18.08	2.77	22.05	39.50	46.00	6.50
Middle Channel: 2437 MHz									
2437	72.58	PK	H	25.74	3.75	0.00	102.07	N/A	N/A
2437	61.53	AV	H	25.74	3.75	0.00	91.02	N/A	N/A
2437	79.61	PK	V	25.74	3.75	0.00	109.10	N/A	N/A
2437	68.66	AV	V	25.74	3.75	0.00	98.15	N/A	N/A
4874	33.55	PK	V	30.77	5.14	27.42	42.04	74.00	31.96
4874	20.27	AV	V	30.77	5.14	27.42	28.76	54.00	25.24
7311	31.96	PK	V	34.35	6.74	25.88	47.17	74.00	26.83
7311	18.87	AV	V	34.35	6.74	25.88	34.08	54.00	19.92
9748	29.84	PK	V	36.30	8.61	27.24	47.51	74.00	26.49
9748	16.72	AV	V	36.30	8.61	27.24	34.39	54.00	19.61
4589	36.77	PK	V	30.03	5.38	27.31	44.87	74.00	29.13
4589	23.46	AV	V	30.03	5.38	27.31	31.56	54.00	22.44
3194	36.86	PK	V	27.82	6.19	27.37	43.50	74.00	30.50
3194	23.64	AV	V	27.82	6.19	27.37	30.28	54.00	23.72
513.2	40.4	QP	V	18.08	2.77	22.05	39.20	46.00	6.80
High Channel: 2462 MHz									
2462	73.52	PK	H	25.80	3.75	0.00	103.07	N/A	N/A
2462	62.58	AV	H	25.80	3.75	0.00	92.13	N/A	N/A
2462	80.64	PK	V	25.80	3.75	0.00	110.19	N/A	N/A
2462	69.62	AV	V	25.80	3.75	0.00	99.17	N/A	N/A
2483.5	31.71	PK	V	25.86	3.67	0.00	61.24	74.00	12.76
2483.5	16.72	AV	V	25.86	3.67	0.00	46.25	54.00	7.75
4924	33.96	PK	V	30.90	5.34	27.43	42.77	74.00	31.23
4924	20.4	AV	V	30.90	5.34	27.43	29.21	54.00	24.79
7386	32.06	PK	V	34.53	6.83	25.86	47.56	74.00	26.44
7386	18.95	AV	V	34.53	6.83	25.86	34.45	54.00	19.55
9848	30.06	PK	V	36.54	8.66	26.94	48.32	74.00	25.68
9848	16.82	AV	V	36.54	8.66	26.94	35.08	54.00	18.92
3194	37.05	PK	V	27.82	6.19	27.37	43.69	74.00	30.31
3194	23.82	AV	V	27.82	6.19	27.37	30.46	54.00	23.54
513.2	40.1	QP	V	18.08	2.77	22.05	38.90	46.00	7.10

Conducted Spurious Emissions at Antenna Port


Chain 0 802.11g Low Channel

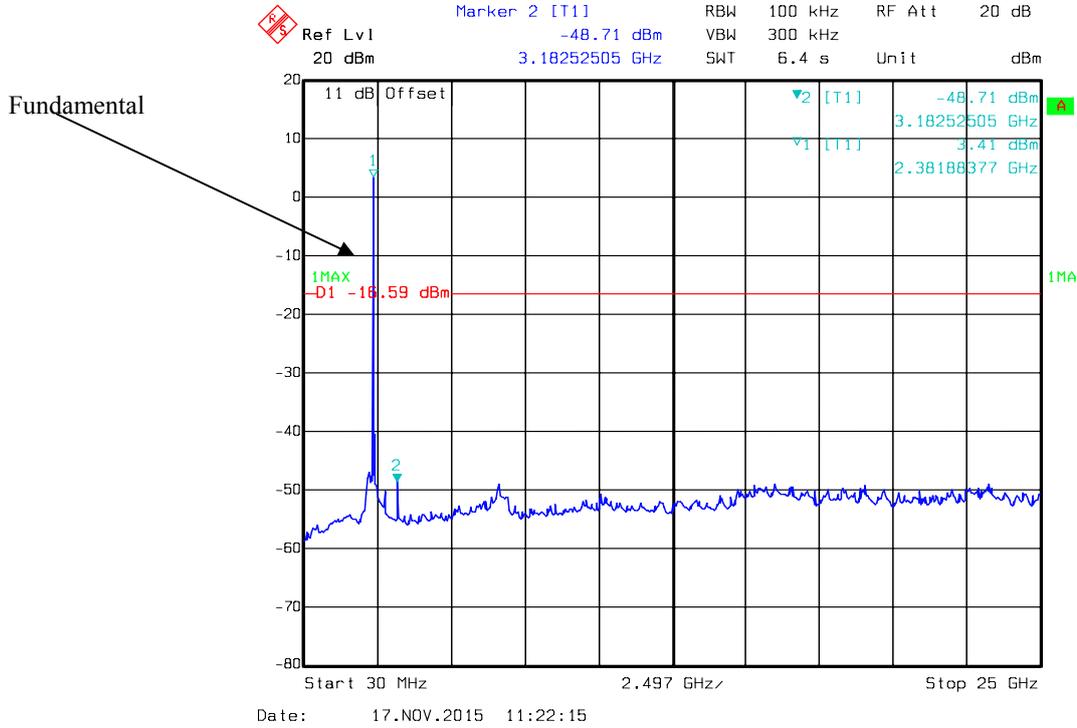

Chain 0 802.11g Middle Channel

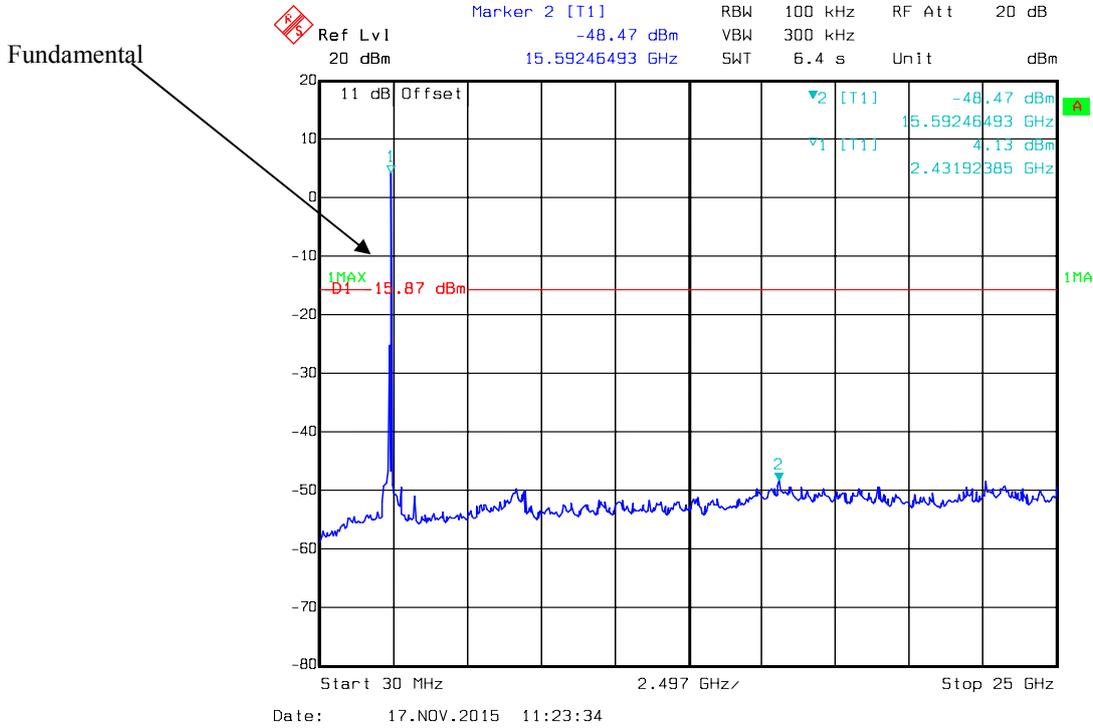


Chain 0 802.11g High Channel

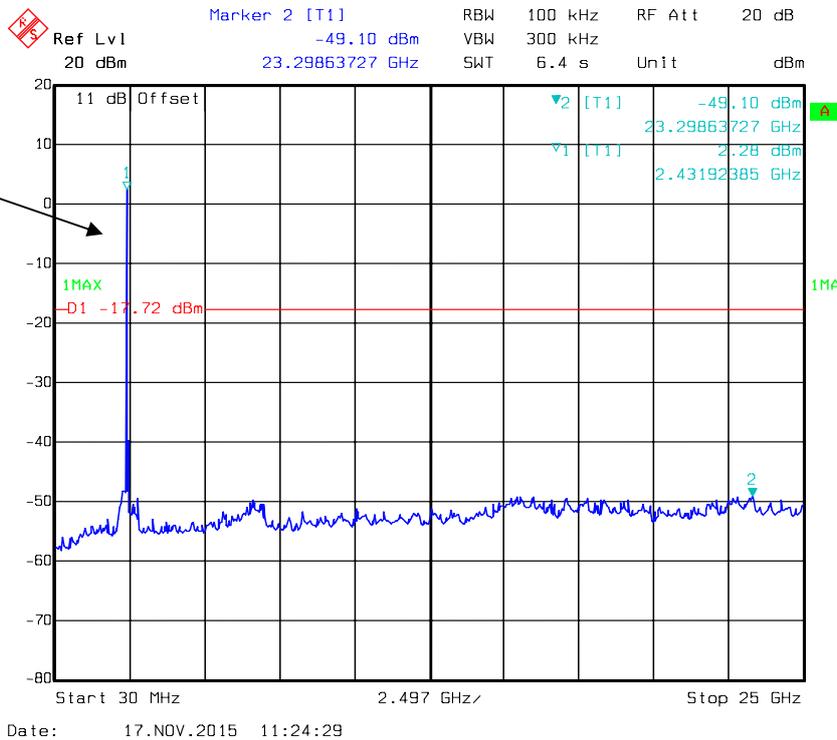


Fundamental

Chain 0 802.11n20 Low Channel

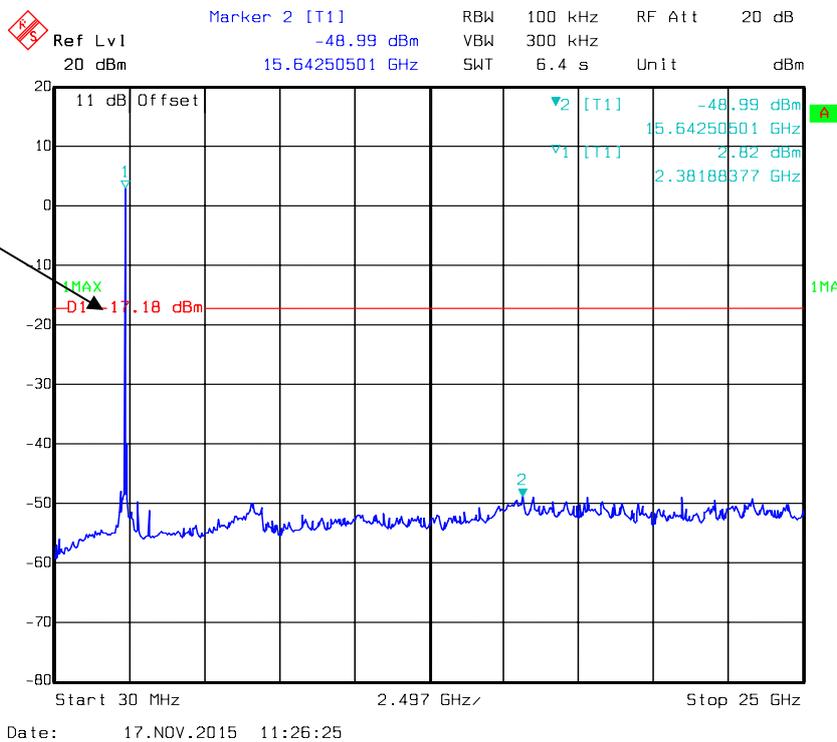


Fundamental

Chain 0 802.11n20 Middle Channel

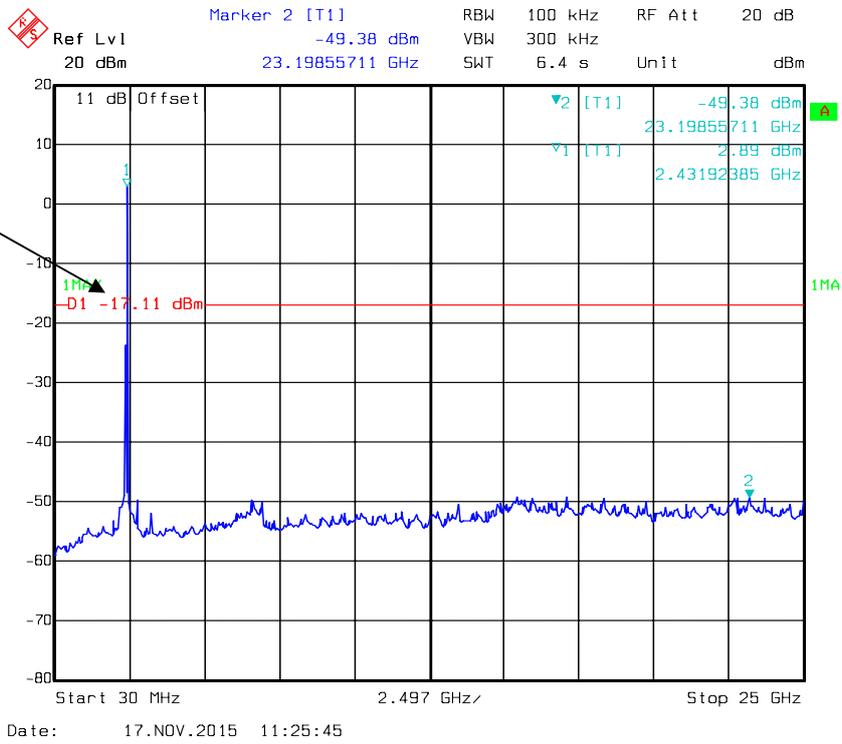


Fundamental

Chain 0 802.11n20 High Channel

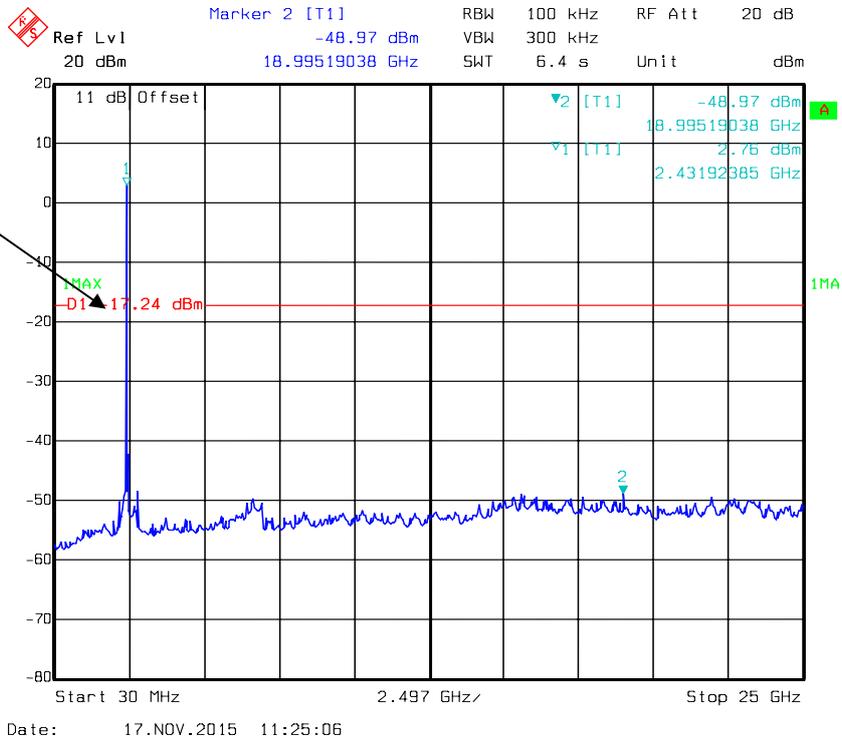


Fundamental


Chain 1 802.11g Low Channel

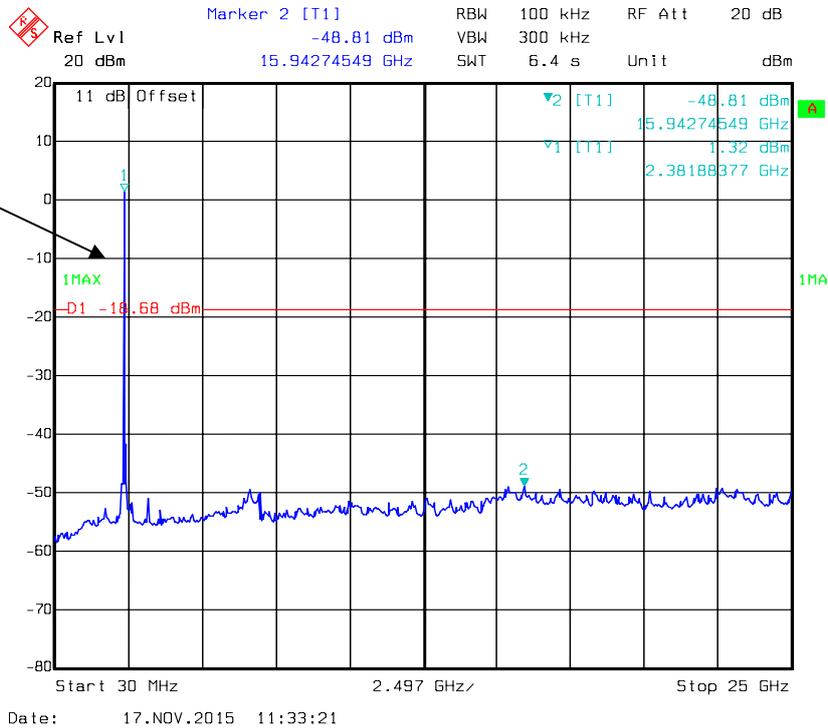

Chain 1 802.11g Middle Channel

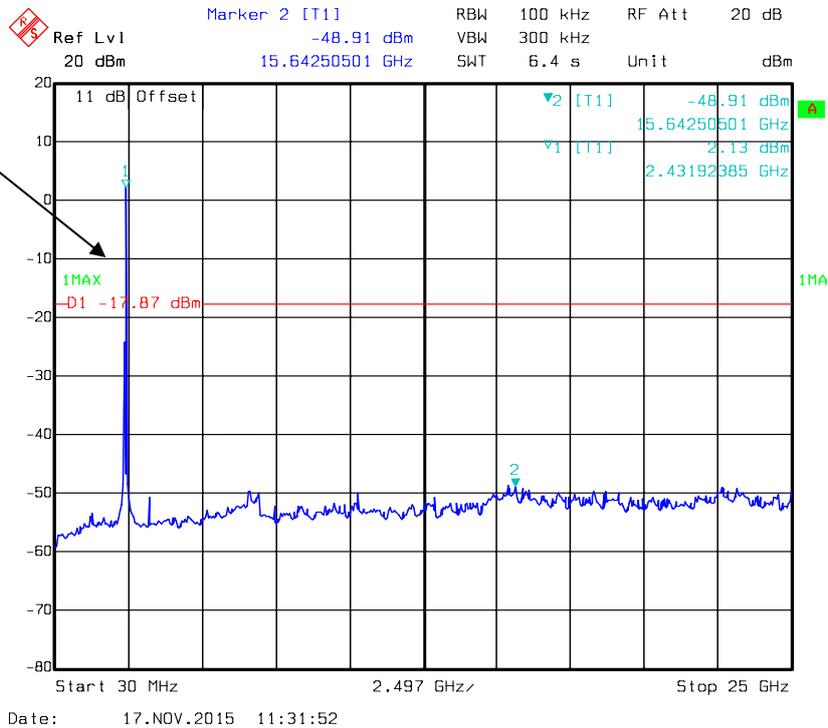


Chain 1 802.11g High Channel

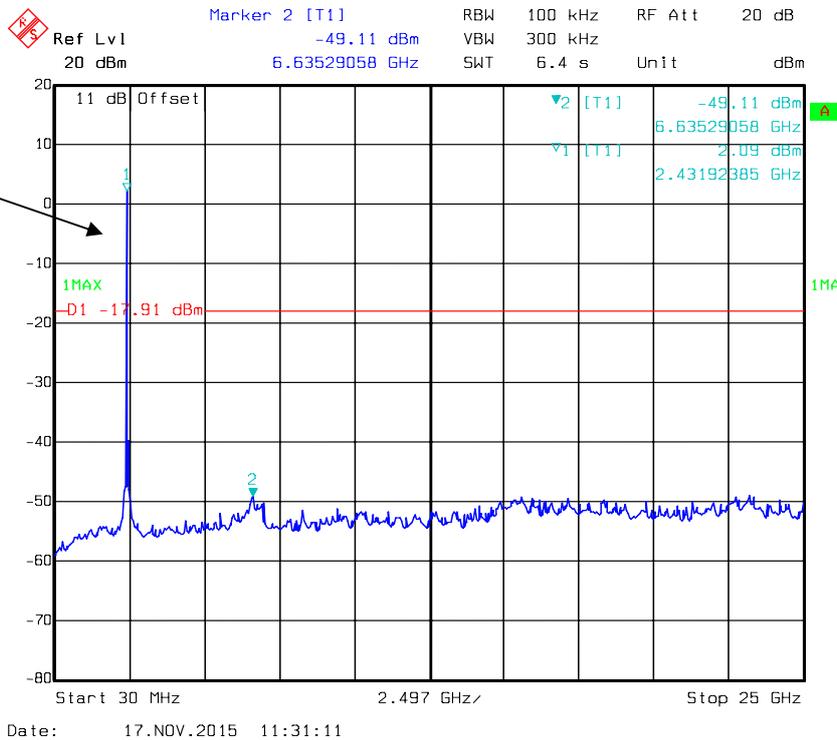


Fundamental

Chain 1 802.11n20 Low Channel

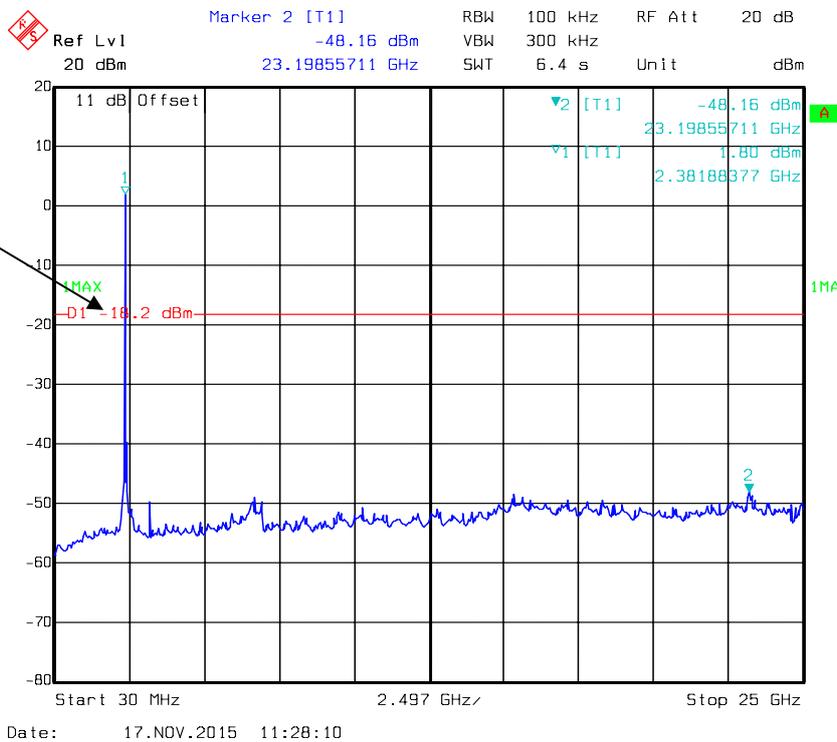


Fundamental

Chain 1 802.11n20 Middle Channel

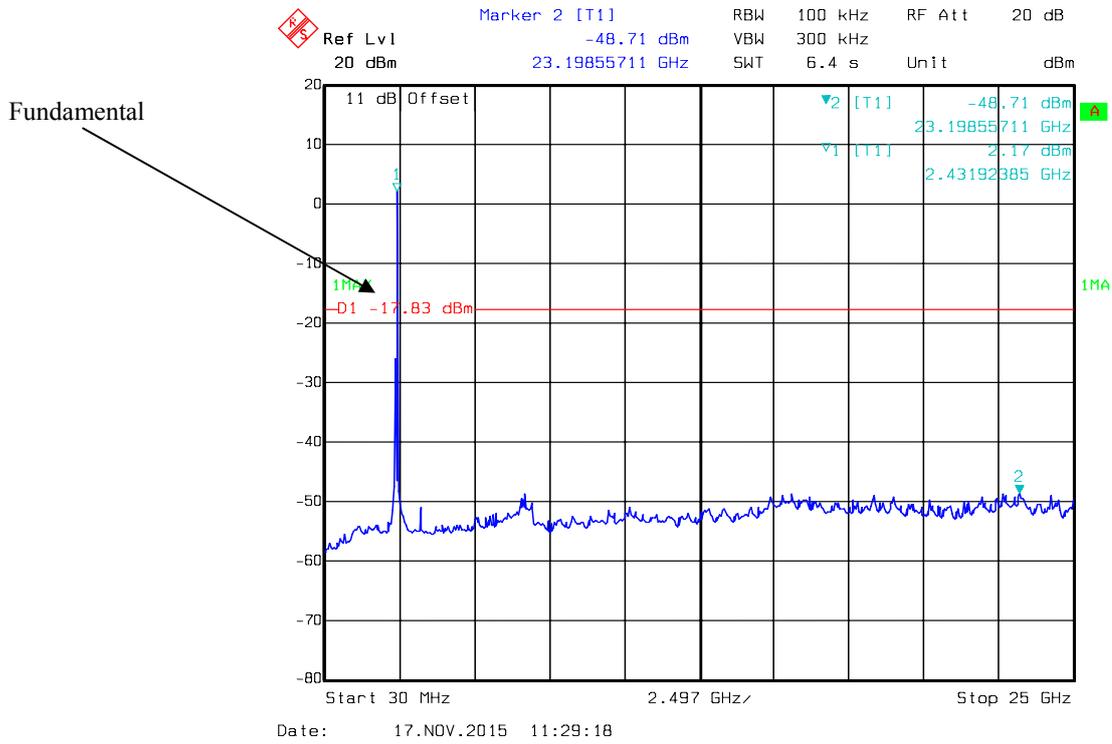

Chain 1 802.11n20 High Channel

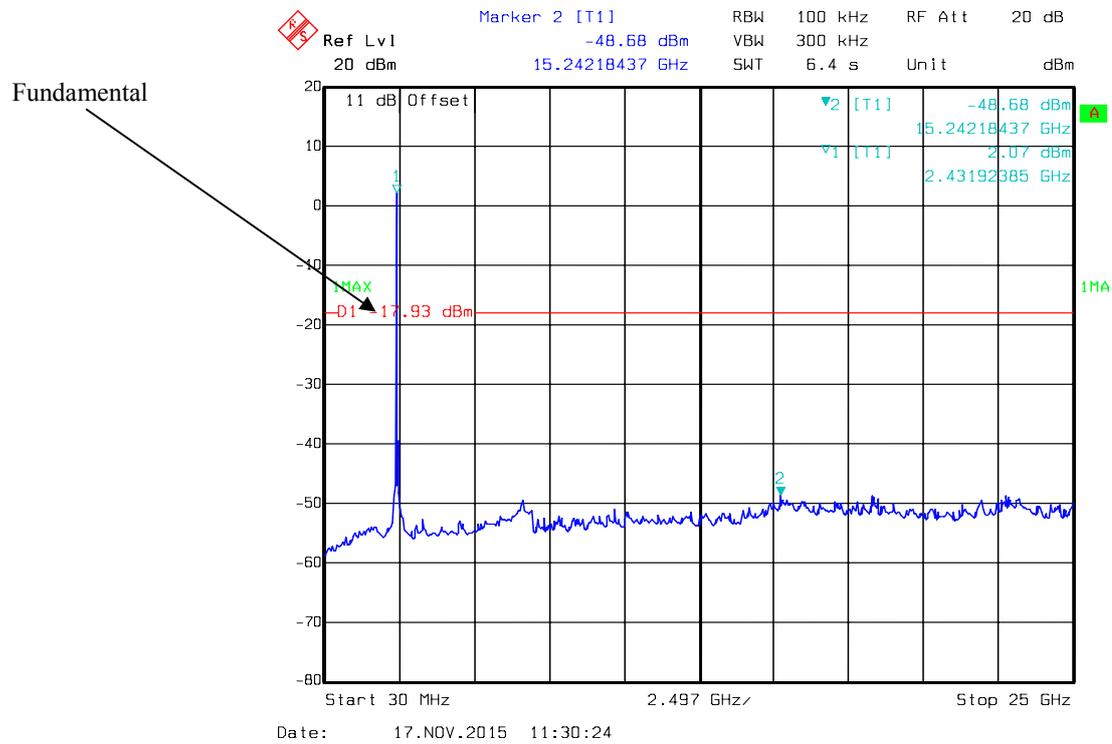


FCC §15.247(a) (2) – 6dB BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.1 °C
Relative Humidity:	58 %
ATM Pressure:	99.4 kPa

The testing was performed by Allen Qiao on 2015-11-16.

Test Result: Compliance.


Please refer to the following tables and plots.

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	6dB Bandwidth (MHz)		Limit (MHz)
			Chain 0	Chain 1	
802.11 g	Low	2412	16.56	16.64	0.5
	Middle	2437	16.56	16.64	0.5
	High	2462	16.56	16.64	0.5
802.11 n20	Low	2412	17.76	17.76	0.5
	Middle	2437	17.76	17.84	0.5
	High	2462	17.84	17.76	0.5


6 dB Bandwidth:

Chain 0 802.11g Low Channel

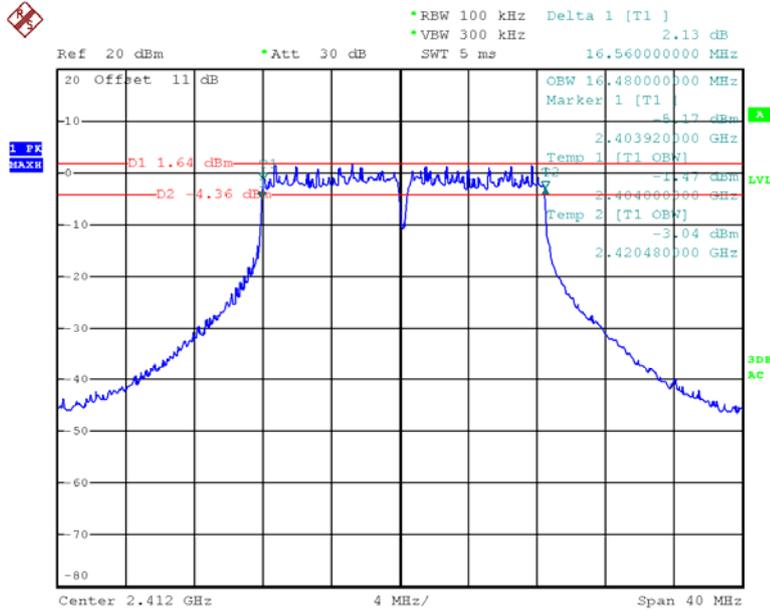


Date: 16.NOV.2015 13:17:14

Chain 0 802.11g Middle Channel

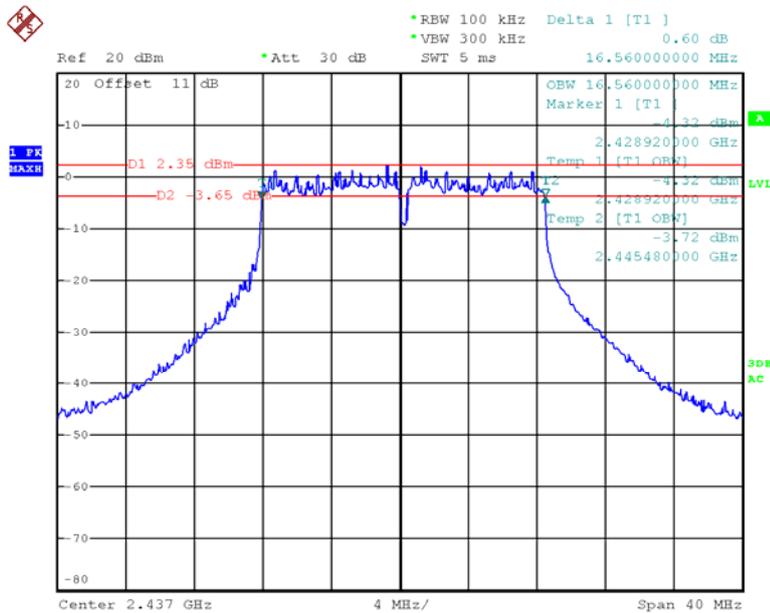


Date: 16.NOV.2015 13:18:20

Chain 0 802.11g High Channel

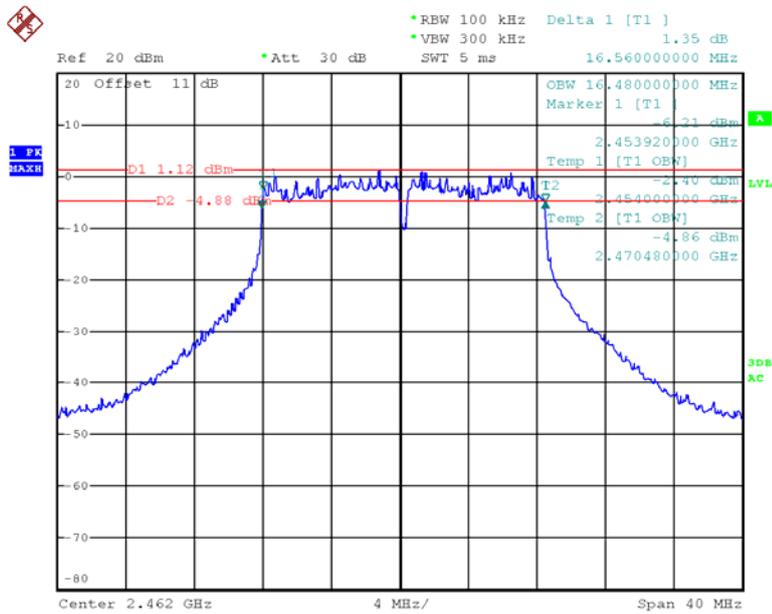


Date: 16.NOV.2015 13:19:44

Chain 0 802.11n20 Low Channel

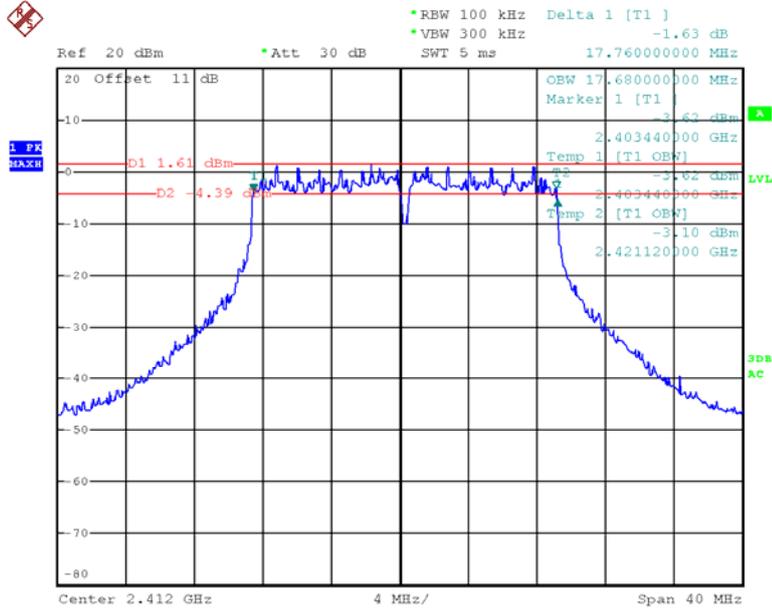


Date: 16.NOV.2015 13:23:43

Chain 0 802.11n20 Middle Channel

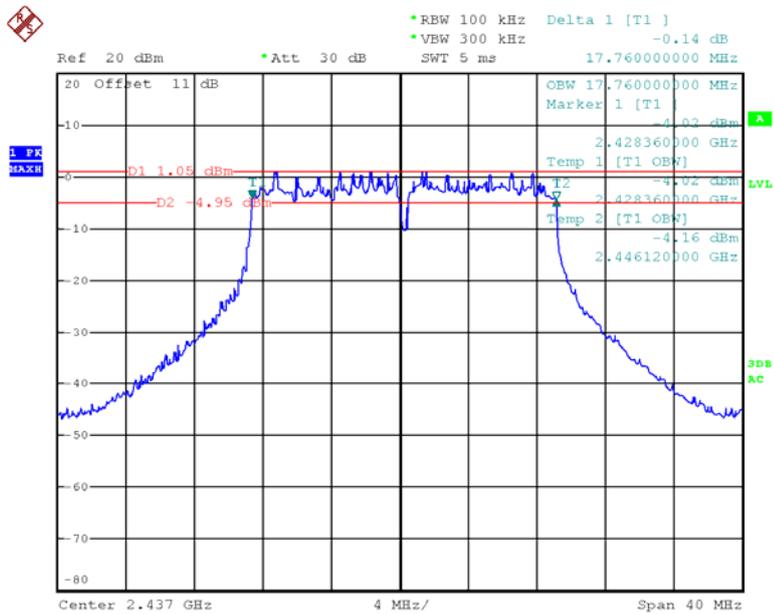


Date: 16.NOV.2015 13:22:01

Chain 0 802.11n20 High Channel

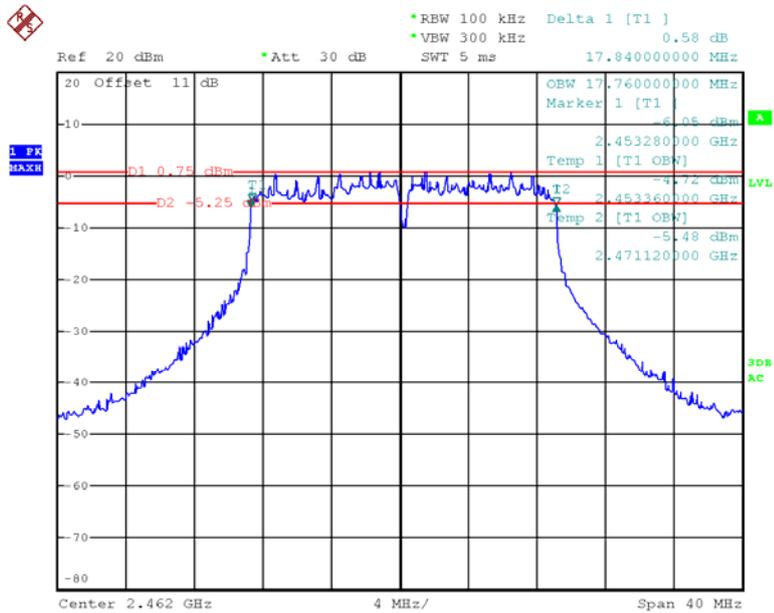


Date: 16.NOV.2015 13:21:04

Chain 1 802.11g Low Channel

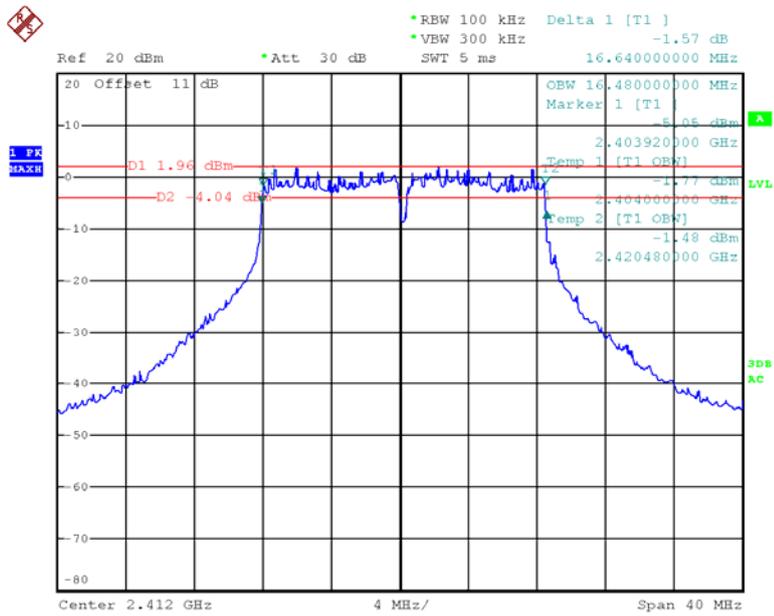


Date: 16.NOV.2015 16:25:32

Chain 1 802.11g Middle Channel

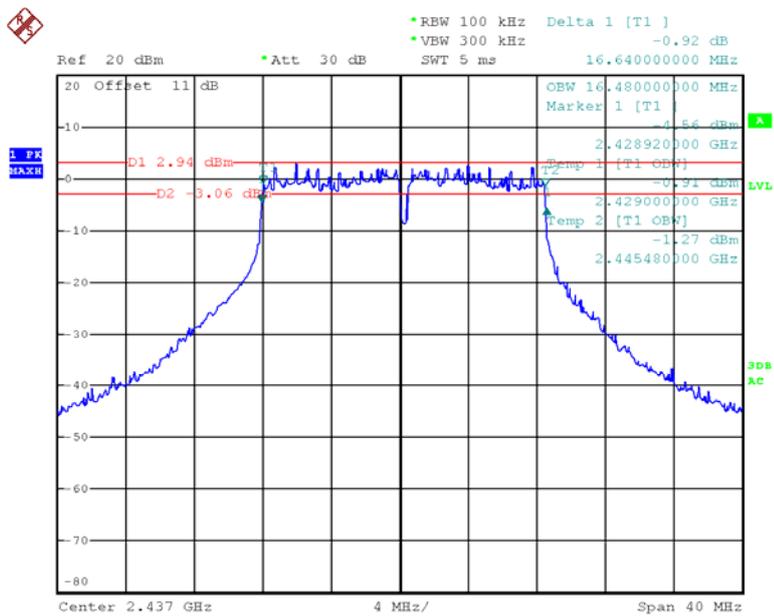


Date: 16.NOV.2015 16:26:21

Chain 1 802.11g High Channel

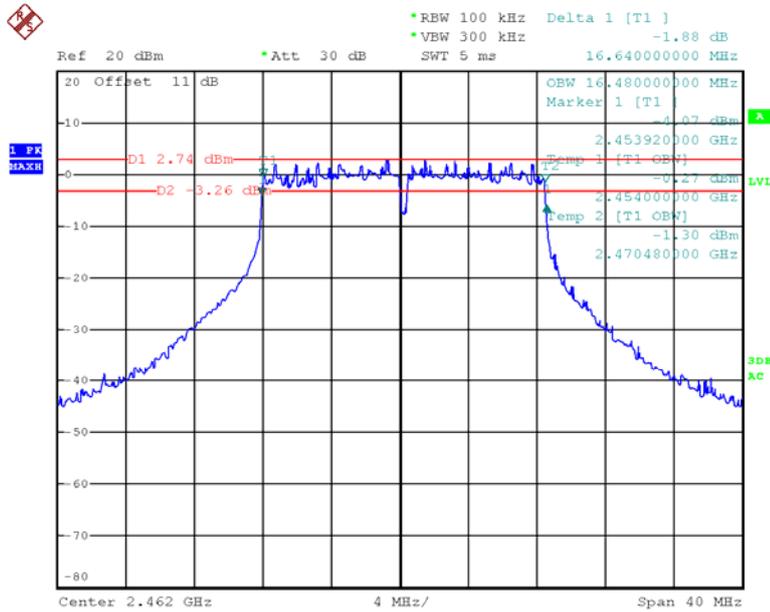


Date: 16.NOV.2015 16:27:13

Chain 1 802.11n20 Low Channel

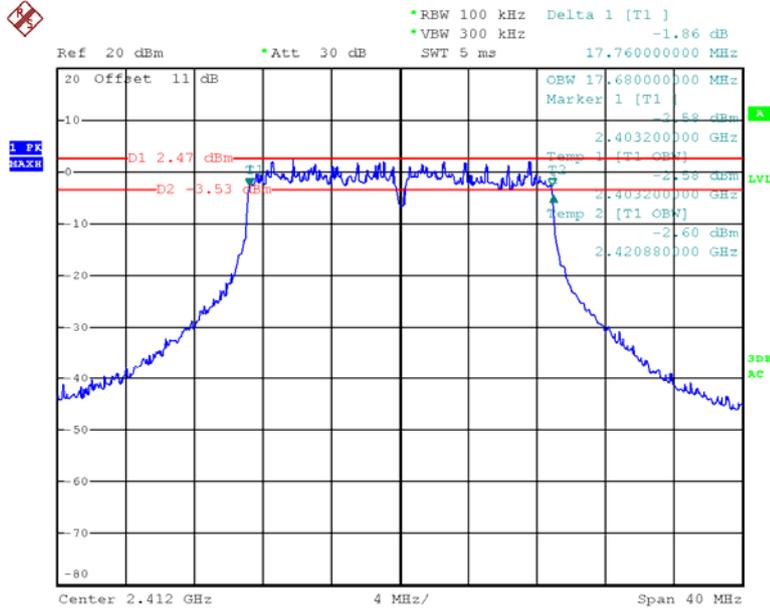


Date: 16.NOV.2015 17:12:57

Chain 1 802.11n20 Middle Channel

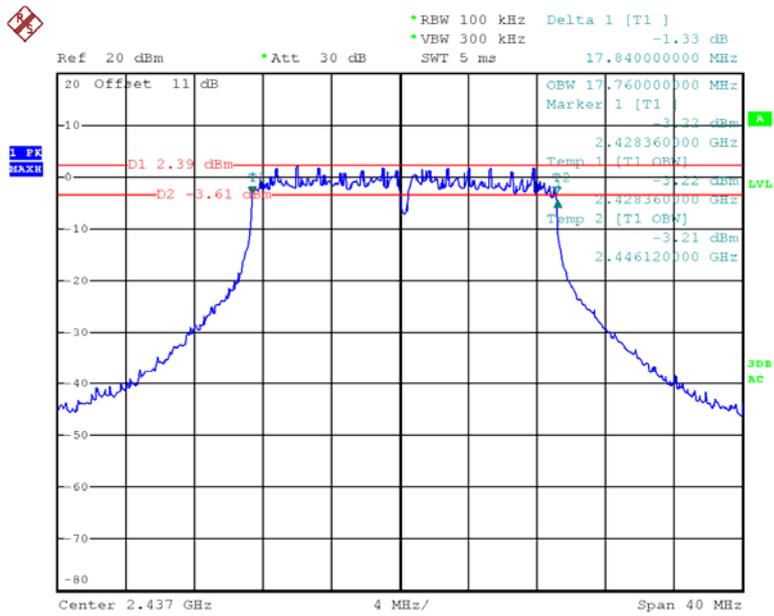

Date: 16.NOV.2015 16:29:30

Chain 1 802.11n20 High Channel

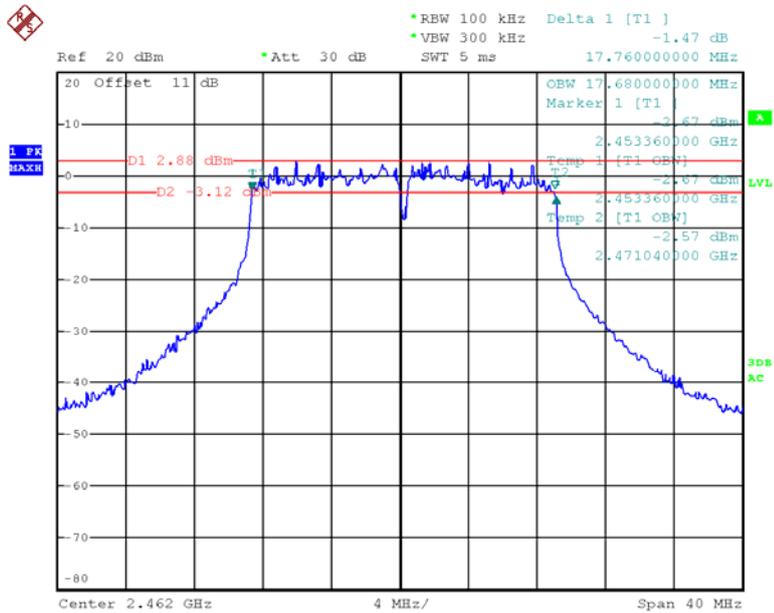

Date: 16.NOV.2015 16:28:03


FCC §15.247(b) (3) - MAXIMUM PEAK CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. According to KDB 558074 D01 DTS Meas Guidance v03r03, place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Test Equipment.



Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Wideband Power Sensor	N1921A	MY54210016	2015-11-03	2016-11-03
Agilent	Wideband Power Sensor	N1921A	MY54170013	2015-11-03	2016-11-03
Agilent	P-Series Power Meter	N1912A	MY5000448	2015-11-03	2016-11-03

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.3 °C
Relative Humidity:	57 %
ATM Pressure:	99.6 kPa

The testing was performed by Allen Qiao on 2015-11-16.

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Maximum Conducted Peak Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
802.11 g	Low	2412	20.6	21.18	23.91	30
	Middle	2437	20.93	21.47	24.22	30
	High	2462	20.09	21.45	23.83	30
802.11 n20	Low	2412	20.4	20.75	23.59	30
	Middle	2437	20.24	21.58	23.97	30
	High	2462	20.01	21.72	23.96	30

FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	23.8 °C
Relative Humidity:	53 %
ATM Pressure:	99.6 kPa

The testing was performed by Allen Qiao on 2015-11-16.

Test Result: *Compliance*


Please refer to following plots.

Chain 0 802.11g: Band Edge, Left Side

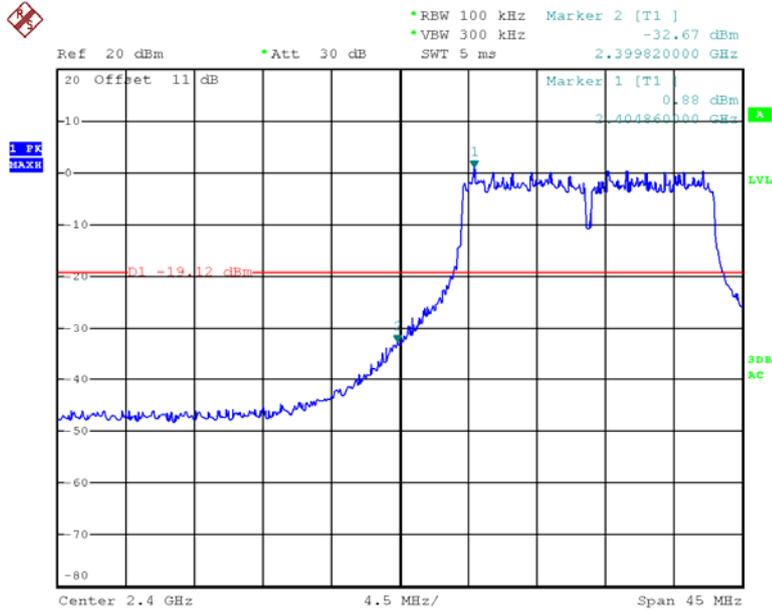


Date: 16.NOV.2015 13:27:33

Chain 0 802.11g: Band Edge, Right Side

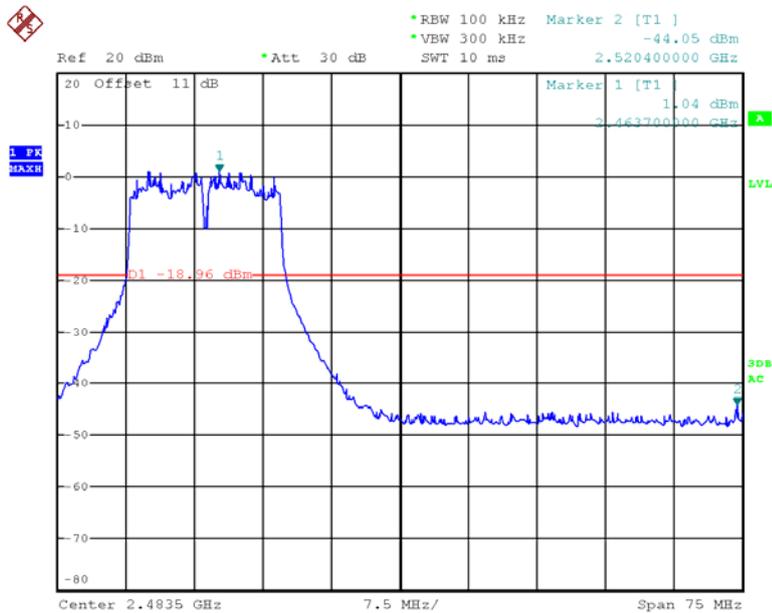


Date: 16.NOV.2015 17:41:19

Chain 0 802.11n20: Band Edge, Left Side

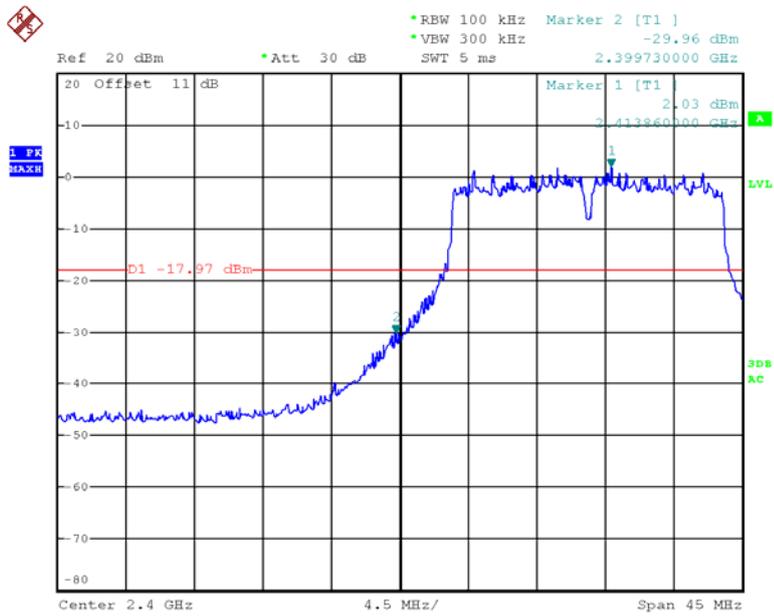


Date: 16.NOV.2015 13:26:39

Chain 0 802.11n20: Band Edge, Right Side

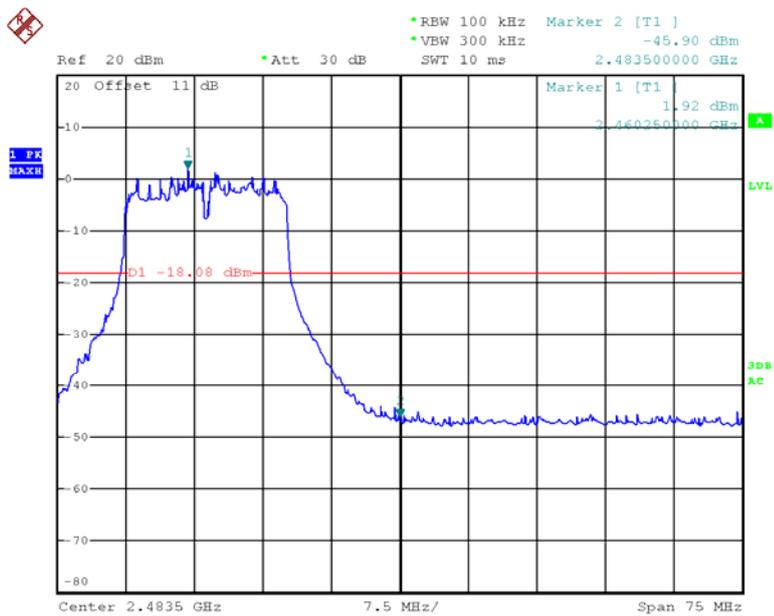


Date: 16.NOV.2015 17:43:13

Chain 1 802.11g: Band Edge, Left Side

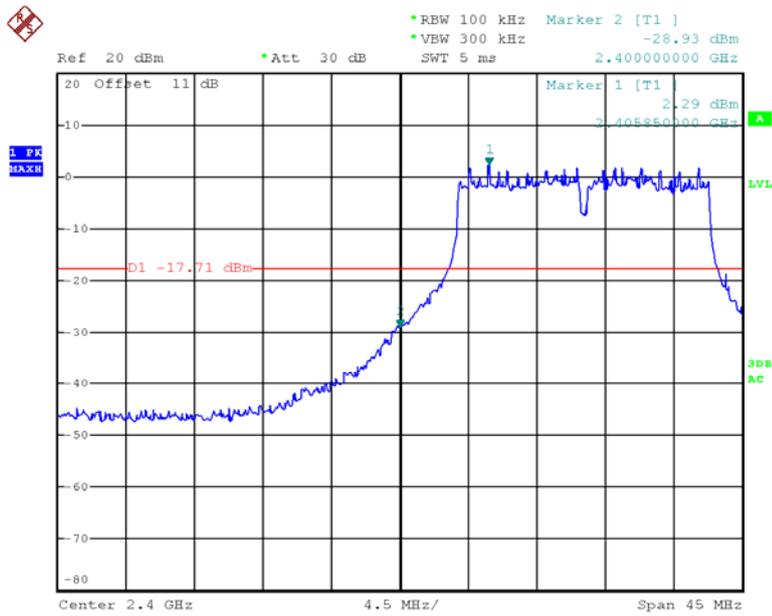


Date: 16.NOV.2015 17:14:49

Chain 1 802.11g: Band Edge, Right Side

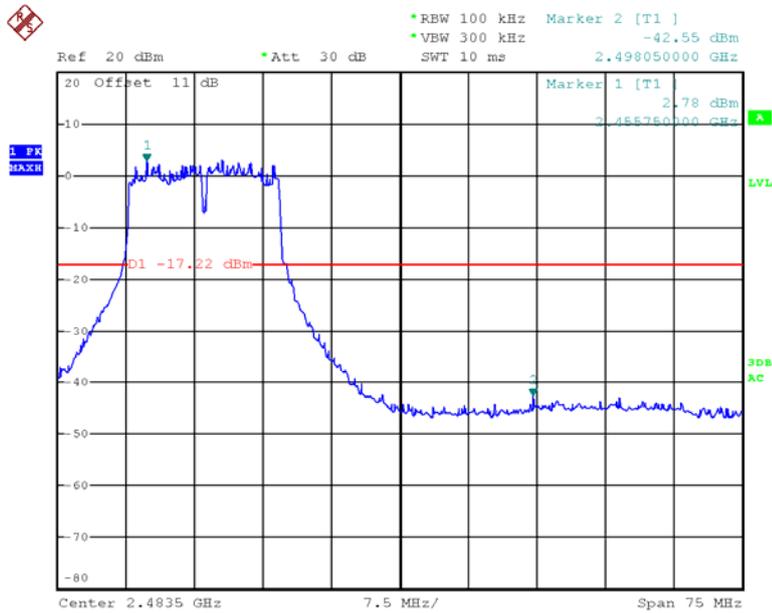


Date: 16.NOV.2015 17:15:48

Chain 1 802.11n20: Band Edge, Left Side

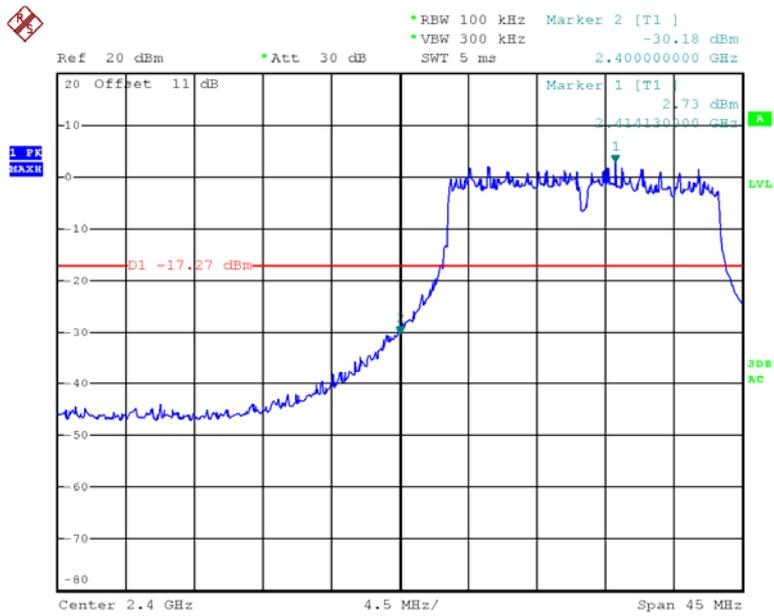

Date: 16.NOV.2015 17:13:55

Chain 1 802.11n20: Band Edge, Right Side

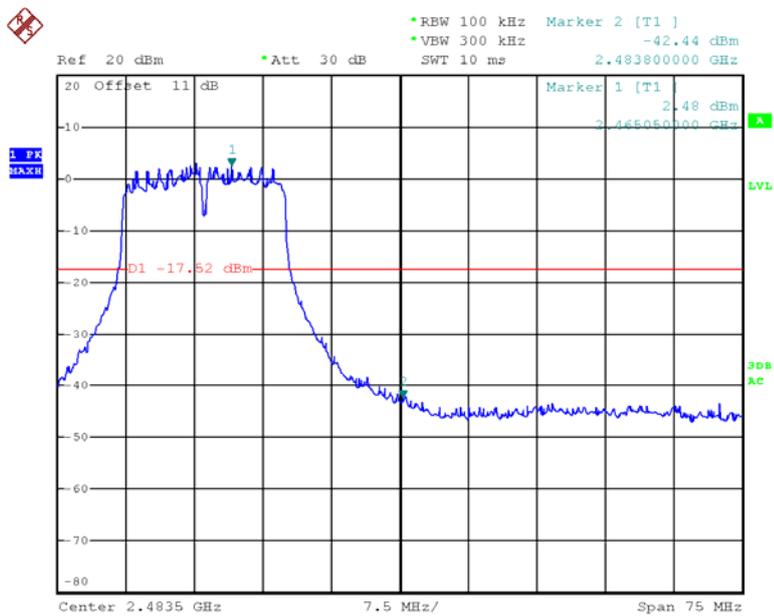

Date: 16.NOV.2015 17:17:00

FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set the RBW = 3 kHz, VBW = 10 kHz, Set the span to 1.5 times the DTS bandwidth.
4. Use the peak marker function to determine the maximum amplitude level.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSEM	831259/019	2015-07-28	2016-07-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	27.4-28.1 °C
Relative Humidity:	59-60 %
ATM Pressure:	100.8 kPa

The testing was performed by Allen Qiao on 2015-11-16 & 2015-11-17.

Test Mode: Transmitting


Test Result: Compliance

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)			Limit (dBm/3kHz)
			Chain 0	Chain 1	Total	
802.11 b	Low	2412	-12.94	-12.74	-9.83	8
	Middle	2437	-13.4	-12.48	-9.91	8
	High	2462	-13.48	-12.52	-9.96	8
802.11 g	Low	2412	-13.14	-13.1	-10.11	8
	Middle	2437	-13.24	-12.38	-9.78	8
	High	2462	-13.25	-12.19	-9.68	8


Please refer to the following plots

Chain 0 802.11g Low Channel

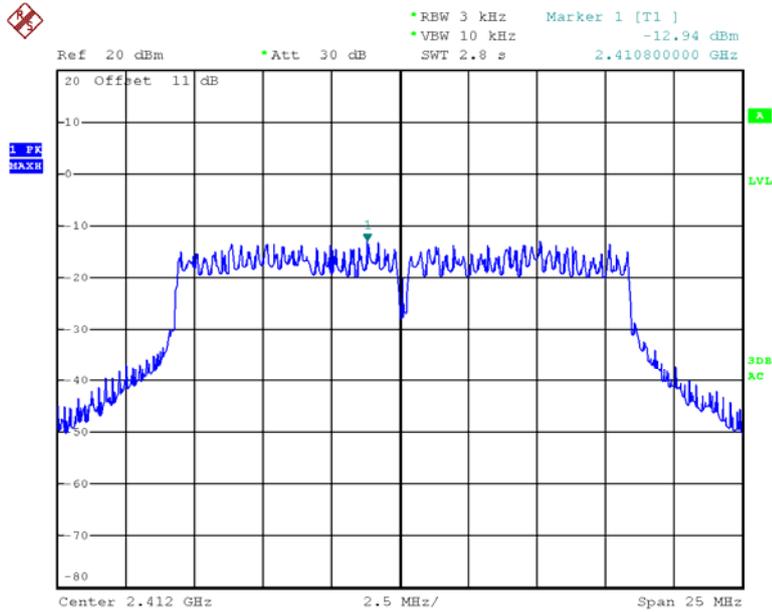


Date: 16.NOV.2015 17:29:24

Chain 0 802.11g Middle Channel

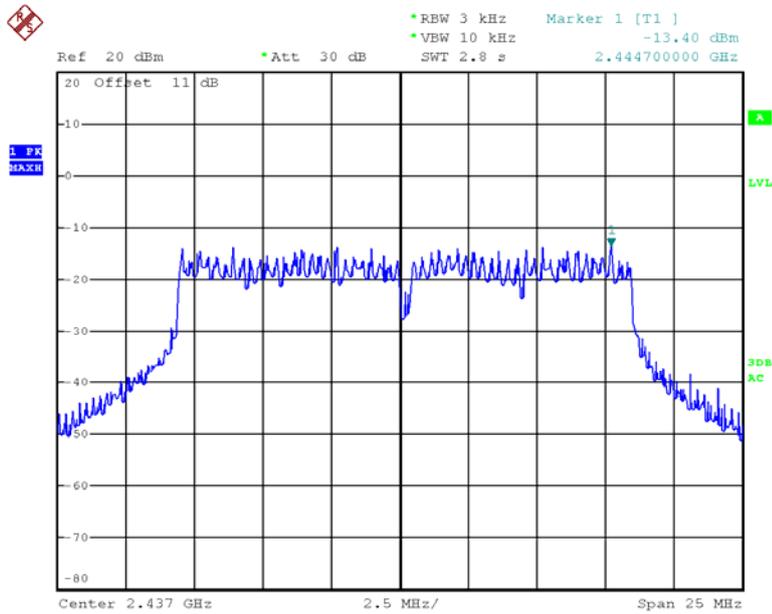


Date: 16.NOV.2015 17:31:43

Chain 0 802.11g High Channel

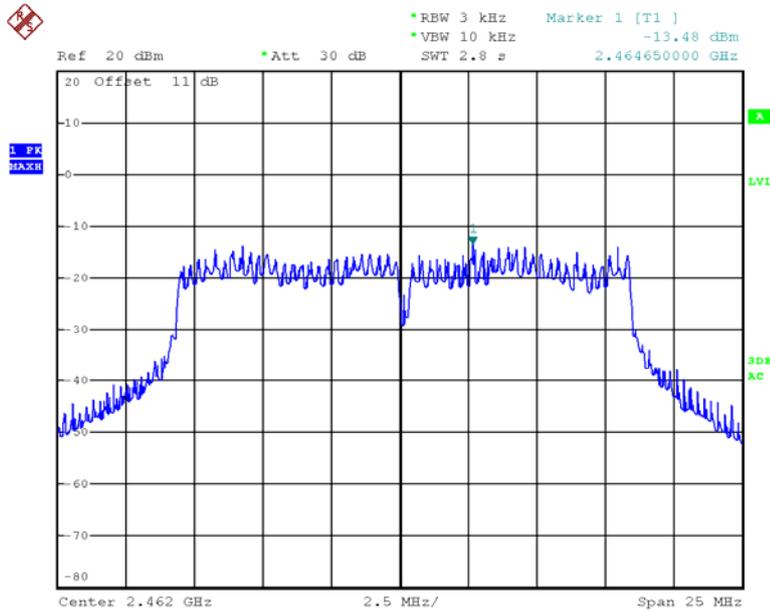


Date: 16.NOV.2015 17:30:56

Chain 0 802.11n20 Low Channel

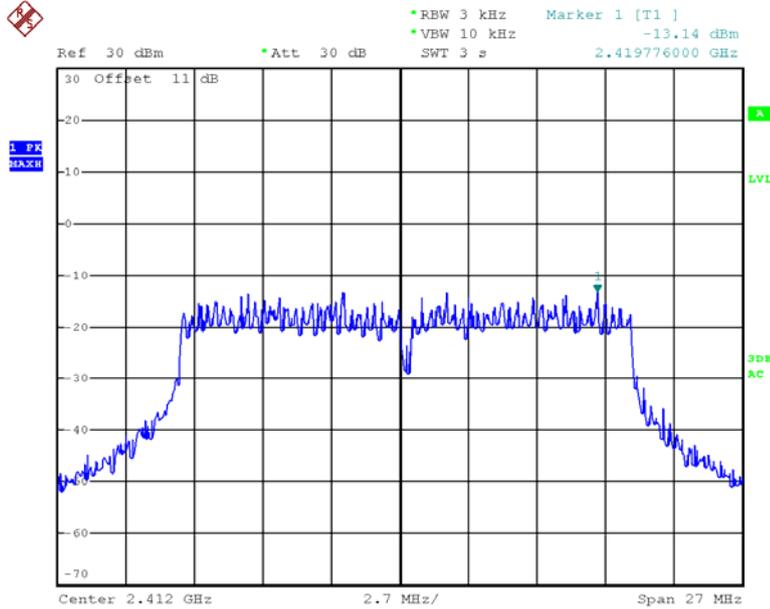


Date: 17.NOV.2015 11:07:44

Chain 0 802.11n20 Middle Channel

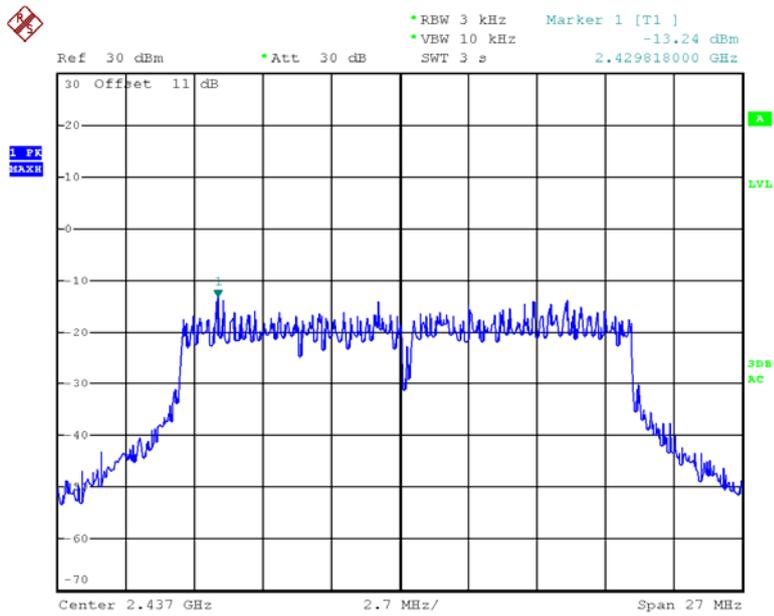


Date: 17.NOV.2015 11:08:34

Chain 0 802.11n20 High Channel

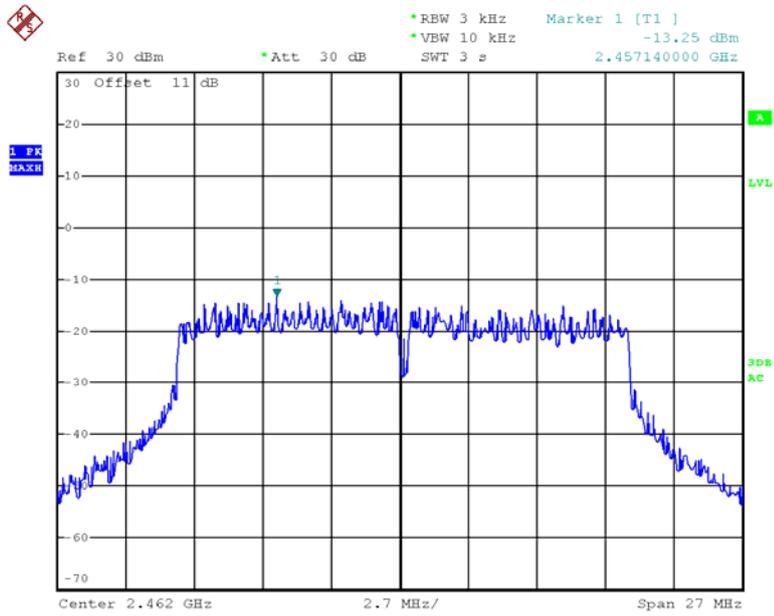


Date: 17.NOV.2015 11:10:41

Chain 1 802.11g Low Channel

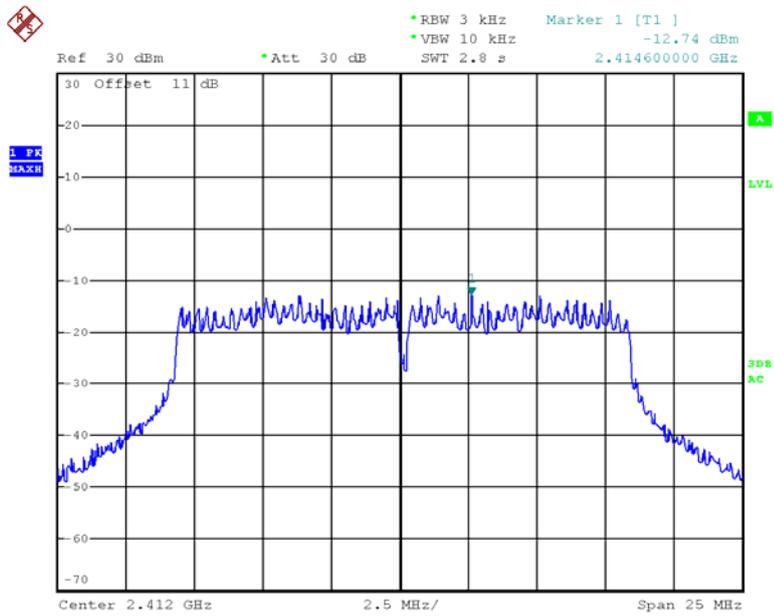


Date: 17.NOV.2015 11:04:13

Chain 1 802.11g Middle Channel

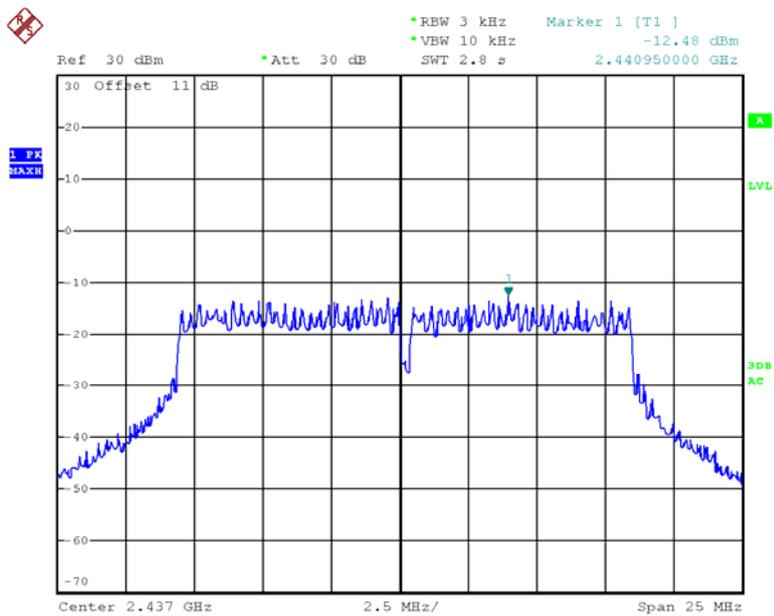


Date: 17.NOV.2015 11:05:39

Chain 1 802.11g High Channel

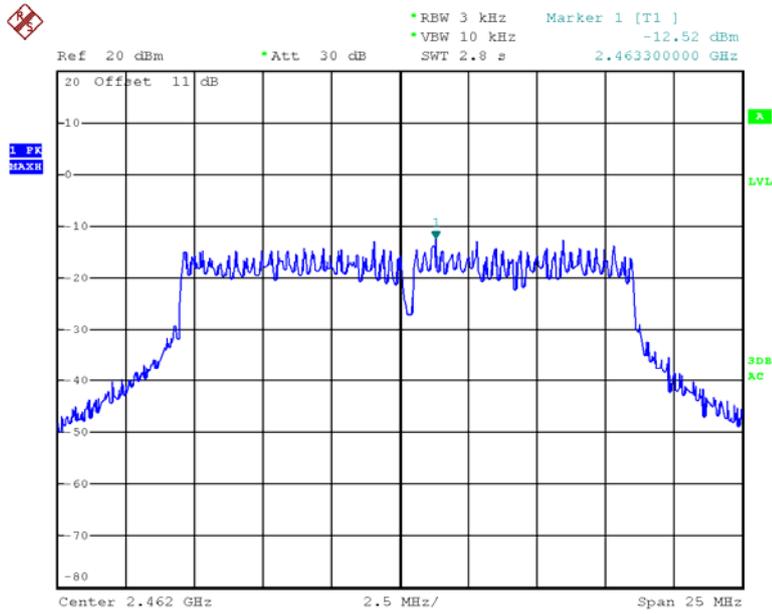


Date: 16.NOV.2015 17:24:15

Chain 1 802.11n20 Low Channel

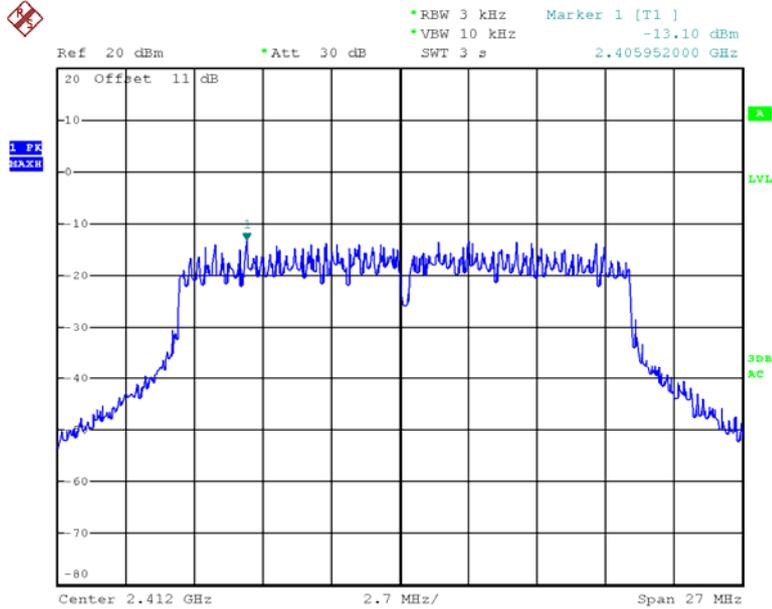


Date: 16.NOV.2015 17:20:39

Chain 1 802.11n20 Middle Channel

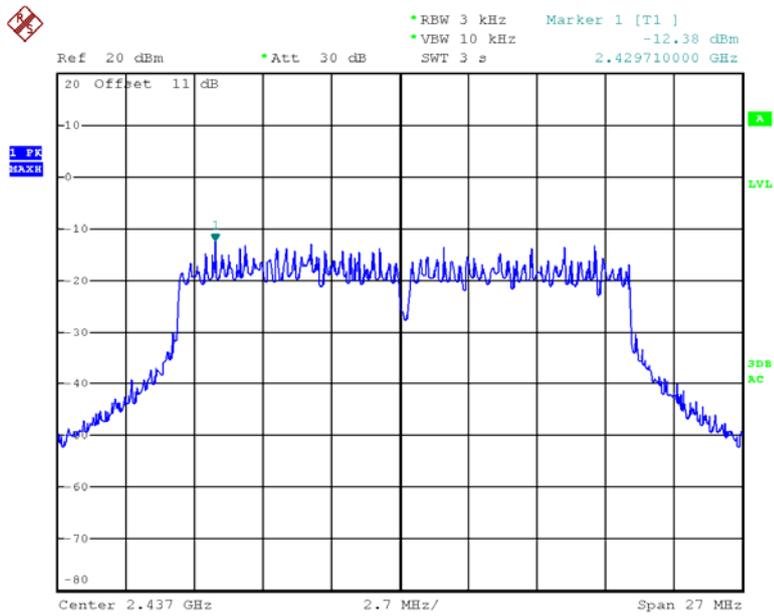

Date: 16.NOV.2015 17:19:11

Chain 1 802.11n20 High Channel

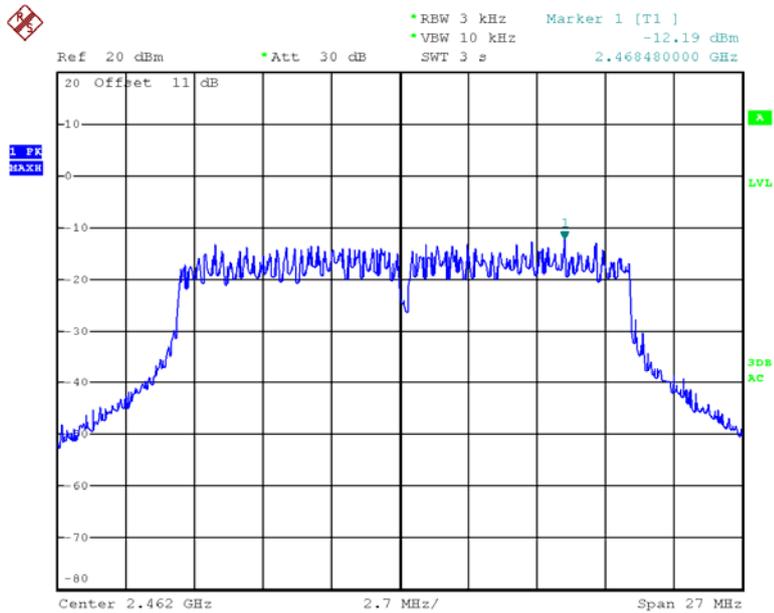

Date: 16.NOV.2015 17:19:46

*****END OF REPORT*****