

Report Number: F690501/RF-RTL006486 Page: 1 of 17

TEST REPORT

of

FCC Part 15 Subpart C §15.225 FCC ID: SS4BP50

Equipment Under Test : Android Business Pad

Model Name : BP50 Serial No. : N/A

Applicant : Bluebird Soft Inc.

Manufacturer : Bluebird Soft Inc.

Date of Test(s) : 2013.04.24 ~ 2013.04.26

Date of Issue : 2013.04.30

In the configuration tested, the EUT complied with the standards specified above.

Tested By:

| Date: 2013.04.30 |
| Harim Lee |
| Date: 2013.04.30 |
| Date: 2013.04.30 |
| Hyunchae You |



Report Number: F690501/RF-RTL006486 Page: 2 of 17

INDEX

TABLE OF CONTENTS	Page
1. General Information	3
2. Transmitter AC Power Line Conducted Emissions	5
3. Radiated Emissions	10
4. Frequency Stability	14
5. 20 dB Bandwidth	16



Report Number: F690501/RF-RTL006486 Page: 3 of 17

1. General Information

1.1. Testing laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

Wireless Div. 3FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx.

Phone No. : +82 31 428 5700 Fax No. : +82 31 427 2371

1.2. Details of Applicant

Applicant : Bluebird Soft Inc.

Address : SEI Tower 13~14F, 467-14, Dogok-dong, Kangnam-gu, Seoul, Korea

Contact Person : Lee, Sang-Gon Phone No. : +82 07 7730 8755

1.3. Description of EUT

Kind of Product	Android Business Pad
Model Name	BP50
Serial Number	N/A
Power Supply	DC 3.7 V
Frequency Range	13.56 Mb
Modulation Technique	ASK
Number of Channels	1
Antenna Type	Internal Type

1.4. Declaration by the manufacturer

- N/A



Report Number: F690501/RF-RTL006486 Page: 4 of 17

1.5. Test Equipment List

Equipment	Manufacturer	Model	S/N	Cal Date	Cal Interval	Cal Due.
Signal Generator	R&S	SMBV100A	255834	Jul. 02, 2012	Annual	Jul. 02, 2013
Spectrum Analyzer	Agilent	N9030A	US51350132	Oct. 30, 2012	Annual	Oct. 30, 2013
DC power Supply	Agilent	U8002A	MY49030063	Dec. 20, 2012	Annual	Dec. 20, 2013
Temperature Chamber	Hangil Technics	HGTP-4050	HGTP-4050-04-01	Aug. 17, 2012	Annual	Aug. 17, 2013
Preamplifier	R&S	8447F	2944A03909	Jul. 03, 2012	Annual	Jul. 03, 2013
Test Receiver	R&S	ESU26	100109	Feb. 28, 2013	Annual	Feb. 28, 2014
Bilog Antenna	SCHWARZBECK	VULB9163	396	May 12, 2011	Biennial	May 12, 2013
Loop Antenna	R&S	HFH2-Z2	100118	Aug. 24, 2011	Biennial	Aug. 24, 2013
Antenna Master	INN-CO	MM4000	N/A	N/A	N/A	N.C.R.
Turn Table	INN-CO	DS 1200 S	N/A	N/A	N/A	N.C.R.
Test Receiver	R&S	ESHS10	863365/018	Jul, 03. 2012	Annual	Jul, 03. 2013
Two-Line V-Network	R&S	ENV216	100190	Jan. 04, 2013	Annual	Jan. 04, 2014
Anechoic Chamber	SY Corporation	L × W × H (6.5 m × 3.5 m × 3.5 m)	N/A	N/A	N/A	N.C.R.
Anechoic Chamber	SY Corporation	L x W x H (9.6 m x 6.4 m x 6.6 m)	N/A	N/A	N/A	N.C.R.

1.6. Summary of Test Results

The EUT has been tested according to the following specifications:

Applied standard : FCC Part15 subpart C								
Standard section Test item Result								
15.207	Transmitter AC Power Line Conducted Emission	Complied						
15.225(a)(b)(c)(d) 15.209	Radiated emission	Complied						
15.225(e)	Frequency Stability	Complied						
15.215(c)	20 dB Bandwidth	-						

1.7. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL006486	Initial


The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL006486 Page: 5 of 17

2. Transmitter AC power line conducted emission

2.1. Test Setup

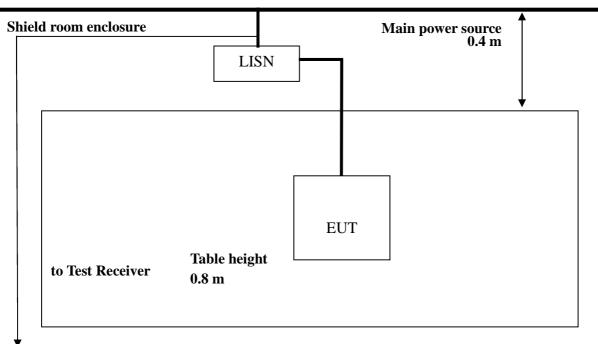

2.2. Limit

According to §15.207(a) for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 \(\mathbb{k}\mathbb{L}\) to 30 \(\mathbb{k}\mathbb{L}\), shall not exceed the limits in the following table, as measured using a 50 uH/50 ohm line impedance stabilization network (LISN).

Compliance with the provision of this paragraph shall on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower applies at the boundary between the frequency ranges.

Francisco (III.)	Conducted limit (dB μV)				
Frequency of Emission (服)	Quasi-peak	Average			
0.15 – 0.50	66-56*	56-46*			
0.50 - 5.00	56	46			
5.00 – 30.0	60	50			

^{*} Decreases with the logarithm of the frequency.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL006486 Page: 6 of 17

2.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

- 1. The test procedure is performed in a 6.5 m × 3.6 m× 3.6 m (LxWxH) shielded room. The EUT along with its peripherals were placed on a 1.0 m(W)x 1.5 m(L) and 0.8 m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane.
- 2. The EUT was connected to power mains through a line impedance stabilization network (LISN) which provides 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room.
- 3. All peripherals were connected to the second LISN and the chassis ground also bounded to the horizontal ground plane of shielded room.
- 4. The excess power cable between the EUT and the LISN was bundled. The power cables of peripherals were unbundled. All connecting cables of EUT and peripherals were moved to find the maximum emission.



Report Number: F690501/RF-RTL006486 Page: 7 of 17

2.4. Test Results

Ambient temperature : (23 \pm 2) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Frequency range : 0.15 MHz - 30 MHz

Measured Bandwidth : 9 kHz

FREQ.	LEVEL((dB uV)	LINE	LIMIT(dB uV)	MARG	IN(dB)
(MHz)	Q-Peak	Average	LINE	Q-Peak	Average	Q-Peak	Average
0.15	54.28	34.58	Н	65.84	55.84	11.56	21.26
0.19	50.84	36.04	Н	64.21	54.21	13.37	18.17
0.20	47.37	31.97	Н	63.49	53.49	16.12	21.52
0.22	48.69	34.39	Н	62.93	52.93	14.24	18.54
0.33	38.03	20.83	Н	59.40	49.40	21.37	28.57
0.40	36.56	25.86	Н	57.96	47.96	21.40	22.10
0.15	53.06	35.06	N	65.78	55.78	12.72	20.72
0.17	49.79	32.09	N	64.96	54.96	15.17	22.87
0.20	48.45	26.85	N	63.65	53.65	15.20	26.80
0.21	48.66	31.76	N	63.05	53.05	14.39	21.29
0.37	37.89	25.29	N	58.55	48.55	20.66	23.26
0.42	35.29	21.39	N	57.47	47.47	22.18	26.08

Note;

1. Line (H): Hot, Line (N): Neutral


2. Traces shown in plot made using a peak detector and average detector



Report Number: F690501/RF-RTL006486 Page: 8 of 17

Plot of Conducted Power line


Test mode: (Hot)

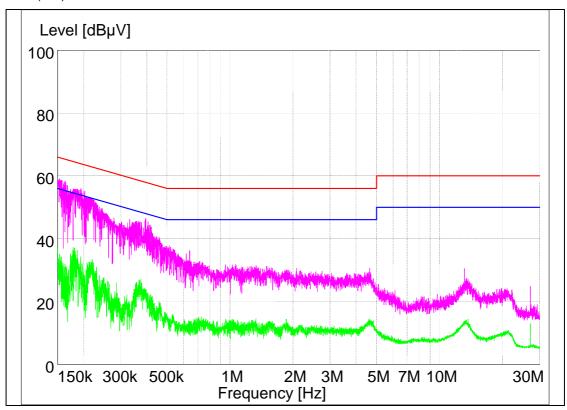



Report Number: F690501/RF-RTL006486 Page: 9 of 17

Test mode: (Neutral)

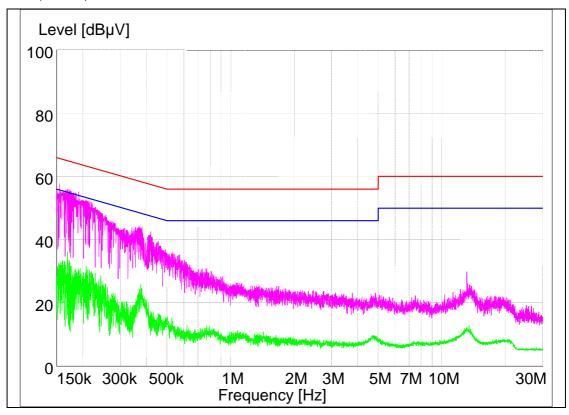




Report Number: F690501/RF-RTL006486 17 Page: 10 of


3. Radiated Emissions

3.1. Test Setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 9 klb to 30 Mb Emissions.

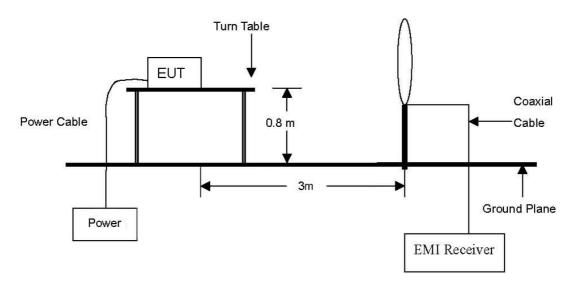

The diagram below shows the test setup that is utilized to make the measurements for emission .The spurious emissions were investigated form 1 % to the 10th harmonic of the highest fundamental frequency or 40 %, whichever is lower.

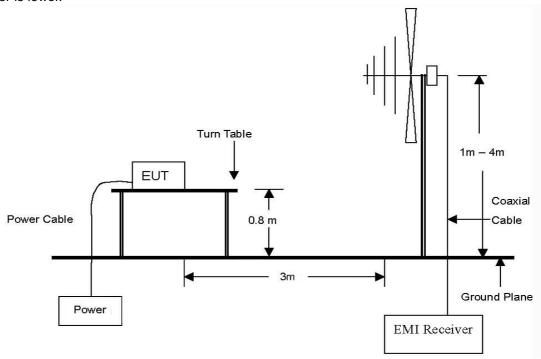

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL006486 Page: 11 of 17

3.2. Limit

According to §15.225,

- (a) The field strength of any emissions within the band 13.553 − 13.567 № shall not exceed 15.848 microvolts / meter at 30 meters.
- (b) Within the bands 13.410 13.553 Mb and 13.567 13.710 Mb, the field strength of any emissions shall not exceed 334 microvolts / meter at 30 meters.
- (c) Within the bands 13.110 − 13.410 № and 13.710 − 14.010 № the field strength of any emissions shall not exceed 106 microvolts / meter at 30 meters.
- (d) The field strength of any emissions appearing outside of the 13.110 − 14.010 № and shall not exceed the general radiated emission limits in §15.209.

3.3. Test Procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4-2003

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic chamber test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. Then antenna is a loop antenna is fixed at one meter above the ground to determine the maximum value of the field strength. Both parallel and perpendicular of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- d. The test-receiver system was set to Average Detect Function and Specified Bandwidth with Maximum Hold Mode.
- e. To get a maximum emission level from the EUT, the EUT is manipulated through three orthogonal planes.



Report Number: F690501/RF-RTL006486 Page: 12 of 17

3.4. Test Result

Ambient temperature : (23 \pm 2) $^{\circ}$ C Relative humidity : 47 $^{\circ}$ R.H.

The following table shows the highest levels of radiated emissions.

-Fundamental within the band 13.553 - 13.567 ₩z

Radia	ated Emiss	ions	Ant	Corre Fac		То	tal	FCC L	imit
Freq. (Mb)	Reading (dB uV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual Actual (dB uV/m) at 3 m at 30 m		Limit (dB uV/m) at 30 m	Margin (dB)
13.560	39.78	Q.Peak	Н	17.32	0.47	57.57	17.57	84.00	66.43

-Spurious emission within the bands 13.410 – 13.553 № and 13.567 -13.710 №

Radia	Radiated Emissions		Ant.	Corre Fac		То	tal	FCC L	imit
Freq. (雌)	Reading (dB uV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB uV/m) at 3 m	Actual (dB uV/m) at 30 m	Limit (dB uV/m) at 30 m	Margin (dB)
13.456	14.30	Q.Peak	Н	17.32	0.47	32.09	-7.91	50.47	58.38
13.665	13.50	Q.Peak	Н	17.31	0.48	31.29	-8.71	50.47	59.18

- Spurious emission within the bands 13.110 - 13.410 № and 13.710 - 14.010 №

Radiated Emissions		Ant.	Corre Fac	ection tors	То	tal	FCC L	imit	
Freq. (畑)	Reading (dB uV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB uV/m) at 3 m	Actual (dB uV/m) at 30 m	Limit (dB uV/m) at 30 m	Margin (dB)
13.348	17.30	Q.Peak	Н	17.33	0.47	35.10	-4.90	40.51	45.41
13.773	15.20	Q.Peak	Н	17.30	0.48	32.98	-7.02	40.51	47.53



Report Number: F690501/RF-RTL006486 Page: 13 17 of

- Spurious emission below 30 Mb except for 13.110 – 14.010 Mb

<u> </u>	opariodo difficación de mas except for ferrito 1-416 for mas									
Radiated Emissions		Ant.	Corre Fac	ection tors	То	tal	FCC L	imit		
Freq.	Reading (dB uV)	Detect Mode	Pol.	Ant. (dB/m)	Cable (dB)	Actual (dB uV/m) at 3 m	Actual (dB uV/m) at 30 m	Limit (dB uV/m) at 30 m	Margin (dB)	
6.161	5.00	Q.Peak	Н	17.91	0.29	23.20	-16.80	29.54	46.34	
25.846	5.40	Q.Peak	Н	17.38	0.67	23.45	-16.55	29.54	46.09	

- Spurious emission above 30 Mb

Rac	Radiated Emissions			Correctio	n Factors	Total	FCC	Limit
Freq.	Reading (dB uV)	Detect Mode	Pol.	Ant. Cable loss & Amp (dB)		Actual (dB uV/m) at 3 m	Limit (dB uV/m) at 3 m	Margin (dB)
103.54	26.40	Q.Peak	V	11.40	-26.20	11.60	43.50	31.90
519.99	35.70	Q.Peak	٧	16.30	-25.40	26.60	46.00	19.40
857.99	37.80	Q.Peak	٧	22.40	-24.20	36.00	46.00	10.00
Above 900.00	Not detected	-	-	-	-	-	-	-

Note:


- 30 m Limit (uV/m) 1. = $20\log (15.848) = 84.00 \text{ dB}\mu\text{V/m}$
- 2. 3 m distance compensation = $40 \log (3/30) = -40 \text{ dB}\mu V/m$
- 3. Other Spurious Emission Frequencies were not detected up to 1 000 Mb.
- The worst case is y-plane. 4.



Report Number: F690501/RF-RTL006486 Page: 14 17

4. Frequency Stability

4.1. Test Setup

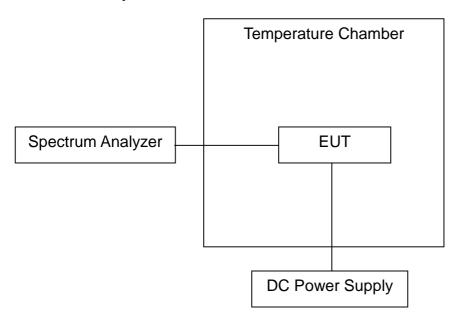

4.2. Limit

According to §15.225(e), the frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

4.3. Test Procedures

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set the environment into appropriate environment.
- d. Set the spectrum analyzer as RBW=100 Hz, VBW = RBW, Span = 10 kHz, Sweep = auto.
- e. Mark the peak frequency and measure the frequency tolerance using frequency counter function.
- f. Repeat until all the results are investigated.



Report Number: F690501/RF-RTL006486 Page: 15 of 17

4.4. Test Result

Ambient temperature : (23 ± 2) °C Relative humidity : 47 % R.H.

Operating Frequency: 13.56 № Reference Voltage: 3.7 V_{DC}

Temperature Variations

Power (V _{DC})	Temperature (℃)	Frequency (썐)	Deviation (%)
3.7	-20	13.559 833	-0.000 059
	-10	13.559 835	-0.000 044
	0	13.559 839	-0.000 015
	10	13.559 839	-0.000 015
	20(Ref)	13.559 841	-
	30	13.559 843	0.000 015
	40	13.559 848	0.000 052
	50	13.559 850	0.000 066

Voltage Variations

Power (V _{DC})	Temperature (℃)	Frequency (쌘)	Deviation (%)
3.12(Batt. End point)	20	13.559 835	-0.000 044
3.700	20	13.559 841	-
4.255	20	13.559 841	0



Report Number: F690501/RF-RTL006486 Page: 16 of 17

5. 20 dB Bandwidth

5.1. Test Setup

Spectrum Analyzer	FUT

5.2. Limit

None; for reporting purposes only.

5.3. Test Procedures

- a. Place the EUT on the table and set it in the transmitting mode.
- b. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- c. Set the spectrum analyzer as RBW=1 kHz, VBW = RBW, Span = 100 kHz, Sweep = sweep.
- d. Mark the peak frequency and 20 $\ensuremath{\mathrm{dB}}$ (upper and lower) frequency.
- e. Repeat until all the rest channels are investigated.



of Report Number: F690501/RF-RTL006486 17 Page: 17

5.4. Test Result

Ambient temperature : **(23** ± **2)** ℃ Relative humidity : 47 % R.H.

Frequency	20 dB Bandwidth
(MEz)	(kHz)
13.56	6.50

