

FCC TEST REPORT

Product Name: Enterprise Key-Based Touch Mobile Computer

Trade Mark:



Model No.: EK430

Add. Model No.: N/A

Report Number: 210520024RFC-4

Test Standards: FCC 47 CFR Part 15 Subpart E

FCC ID: SS4EK430

Test Result: PASS

Date of Issue: September 30, 2021

Prepared for:

Bluebird Inc.

3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

Kieron Luo
Project Engineer

Reviewed by:

Henry Lu
Team Leader

Approved by:

Kevin Liang
Assistant Manager

Date: September 30, 2021

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

Version

Version No.	Date	Description
V1.0	September 30, 2021	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 OTHER INFORMATION	7
1.5 DESCRIPTION OF SUPPORT UNITS	7
1.6 TEST LOCATION	7
1.7 TEST FACILITY	7
1.8 DEVIATION FROM STANDARDS	8
1.9 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.11 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	10
4. TEST CONFIGURATION	11
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	11
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	11
4.1.2 RECORD OF NORMAL ENVIRONMENT	11
4.2 TEST CHANNELS	12
4.3 EUT TEST STATUS	12
4.4 PRE-SCAN	13
4.5 TEST SETUP	14
4.5.1 FOR RADIATED EMISSIONS TEST SETUP	14
4.5.2 FOR CONDUCTED EMISSIONS TEST SETUP	15
4.5.3 FOR CONDUCTED RF TEST SETUP	16
4.6 SYSTEM TEST CONFIGURATION	17
4.7 DUTY CYCLE	18
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	22
5.1 REFERENCE DOCUMENTS FOR TESTING	22
5.2 ANTENNA REQUIREMENT	22
5.3 26 DB BANDWIDTH	23
5.4 6 DB BANDWIDTH	39
5.5 MAXIMUM CONDUCTED OUTPUT POWER	45
5.6 PEAK POWER SPECTRAL DENSITY	49
5.7 RADIATED EMISSIONS AND BAND EDGE MEASUREMENT	74
5.8 DYNAMIC FREQUENCY SELECTION	126
5.9 AC POWER LINE CONDUCTED EMISSION	136
APPENDIX 1 PHOTOS OF TEST SETUP	139
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	139

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Bluebird Inc.
Address of Applicant:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Manufacturer:	Bluebird Inc.
Address of Manufacturer:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Enterprise Key-Based Touch Mobile Computer		
Model No.:	EK430		
Add. Model No.:	N/A		
Trade Mark:			
DUT Stage:	Identical Prototype		
EUT Supports Function:	UTRA Bands:	Band II/ Band V	
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 250 MHz to 5 350 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
RNSS Bands:	1559 MHz to 1610 MHz	GPS/ GLONASS/ BDS	
NFC:	13.553 MHz to 13.567 MHz		
Software Version:	EK430-VX500-AND10-EN-20210510_R1.00-user		
Hardware Version:	0.2		
Sample Received Date:	May 21, 2021		
Sample Tested Date:	May 31, 2021 to June 18, 2021		

1.2.2 Description of Accessories

Adapter	
Model No.:	XSD-0503000DEXU
Input:	100-240 V~50/60 Hz 0.5 A Max
Output:	5.0 V $\pm$ 3.0A
AC Cable:	N/A
DC Cable:	N/A

Battery (Main)	
Model No.:	BAT-680001
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.6 Vdc
Limited Charge Voltage:	4.2 Vdc
Rated Capacity:	6700 mAh

Battery (Sub)	
Model No.:	VK401324PH-Q5
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.7 Vdc
Limited Charge Voltage:	4.2 Vdc
Rated Capacity:	65 mAh

Cable	
Model No.:	N/A
Description:	USB Type-C Plug Cable
Cable Type:	Shielded without ferrite
Length:	1 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Frequency Bands:	5150 MHz to 5250 MHz (U-NII-1)
	5250 MHz to 5350 MHz (U-NII-2A)
	5470 MHz to 5725 MHz (U-NII-2C)
	5 725 MHz to 5 850 MHz (U-NII-3)
Frequency Ranges:	5180 MHz to 5240 MHz
	5260 MHz to 5320 MHz
	5500 MHz to 5700 MHz
	5 745 MHz to 5 825 MHz
Support Standards:	IEEE 802.11a/n/ac
TPC Function:	Not Support
DFS Operational mode:	Slave without radar Interference detection function
Type of Modulation:	IEEE 802.11a: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11n: OFDM (64QAM, 16QAM, QPSK, BPSK)
	IEEE 802.11ac: OFDM (256QAM, 64QAM, 16QAM, QPSK, BPSK)
Channel Spacing:	IEEE 802.11a/n-HT20/ac-VHT20: 20 MHz
	IEEE 802.11n-HT40/ac-VHT40: 40 MHz
	IEEE 802.11ac-VHT80: 80 MHz

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

Data Rate:	IEEE 802.11a: Up to 54 Mbps				
	IEEE 802.11n-HT20: Up to MCS15				
	IEEE 802.11n-HT40: Up to MCS15				
	IEEE 802.11ac-VHT20: Up to MCS8				
	IEEE 802.11ac-VHT40: Up to MCS9				
	IEEE 802.11ac-VHT80: Up to MCS9				
Number of Channels:	5150 MHz to 5250 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5250 MHz to 5350 MHz: 4 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11acVHT80				
	5470 MHz to 5725 MHz: 11 for IEEE 802.11a/n-HT20/ac-VHT20 5 for IEEE 802.11n-HT40/ac-VHT40 2 for IEEE 802.11ac-VHT80				
	5725 MHz to 5850 MHz: 5 for IEEE 802.11a/n-HT20/ac-VHT20 2 for IEEE 802.11n-HT40/ac-VHT40 1 for IEEE 802.11ac-VHT80				
Antenna Type:	Chain 0	PIFA Antenna			
	Chain 1	PIFA Antenna			
Antenna Gain:	Chain 0	5150 MHz to 5250 MHz: 1.46 dBi			
		5250 MHz to 5350 MHz: 1.25 dBi			
		5470 MHz to 5725 MHz: 2.77 dBi			
		5725 MHz to 5850 MHz: 1.62 dBi			
	Chain 1	5150 MHz to 5250 MHz: 0.24 dBi			
		5250 MHz to 5350 MHz: 0.46 dBi			
		5470 MHz to 5725 MHz: 1.83 dBi			
		5725 MHz to 5850 MHz: 1.60 dBi			
Maximum EIRP (dBm):	SISO_Chain 0	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11a:	15.59	15.66	15.60	15.47
	SISO_Chain 1	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11a:	16.53	16.18	16.53	16.09
	MIMO_Chain 0+1	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
	IEEE 802.11n-HT20:	15.97	15.67	15.81	16.04
	IEEE 802.11n-HT40:	15.25	15.09	15.23	14.81
	IEEE 802.11ac-VHT20:	16.01	15.68	15.80	16.08
	IEEE 802.11ac-VHT40:	15.30	15.09	15.31	14.93
	IEEE 802.11ac-VHT80:	14.43	14.40	14.59	13.63
Normal Test Voltage:	3.9 Vdc				

1.4 OTHER INFORMATION

Operation Frequency Each of Channel				
	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
IEEE 802.11a, IEEE 802.11n-HT20, IEEE 802.11ac-VHT20	f = 5000 + 5k, k = 32 + 4n			f = 5000 + 5k, k = 145 + 4n
	n = 1,..., 4	n = 5,..., 8	n = 17,..., 27	n = 1,..., 5
IEEE 802.11n-HT40, IEEE 802.11ac-VHT40	f = 5000 + 5k, k = 30 + 8n			f = 5000 + 5k, k = 143 + 8n
	n = 1, 2	n = 1,..., 5	n = 9,..., 13	n = 1, 2
IEEE 802.11ac-VHT80	f = 5000 + 5k, k = 26 + 16n			f = 5000 + 5k, k = 155
	n = 1	n = 1, 2	n = 5, 6	
Note: f is the operating frequency (MHz); k is the operating channel.				

1.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	FCC ID	Supplied by
Notebook	DELL	Inspiron 5409	N/A	N/A	UnionTrust
Wireless Home Router	SAGEMCOM	FAST5280	N/A	VW3FAST5280	UnionTrust

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	SMA Cable	SMA	0.2 Meter	Bluebird

1.6 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.7 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.8 DEVIATION FROM STANDARDS

None.

1.9 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.11 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated emission 9kHz-30MHz	±4.7 dB
4	Radiated emission 30MHz-1GHz	±4.6 dB
5	Radiated emission 1GHz-18GHz	±4.4 dB
6	Radiated emission 18GHz-26GHz	±4.6 dB
7	Radiated emission 26GHz-40GHz	±4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart E Test Cases			
Test Item	Test Requirement	Test Method	Result
Antenna Requirement	FCC 47 CFR Part 15 Subpart C Section 15.203 FCC 47 CFR Part 15 Subpart C Section 15.407(a)(1)(2)	N/A	PASS
26 dB emission bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(2)(5)	KDB 789033 D02 v02r01 Section C.1	PASS
6 dB bandwidth	FCC 47 CFR Part 15 Subpart E Section 15.407 (e)	KDB 789033 D02 v02r01 Section C.2	PASS
Maximum conducted output power	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section E.3.a (Method PM)	PASS
Peak Power Spectral Density	FCC 47 CFR Part 15 Subpart E Section 15.407 (a)(1)(2)(3)	KDB 789033 D02 v02r01 Section F	PASS
Radiated Emissions and Band Edge Measurement	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(1)(2)(3)(4)(6) FCC 47 CFR Part 15 Subpart C Section 15.209/205	KDB 789033 D02 v02r01 Section G.3, G.4, G.5, and G.6	PASS
Dynamic Frequency Selection	FCC 47 CFR Part 15 Subpart E Section 15.407 (h)	KDB 905462 D03 Client Without DFS New Rules v01r02	PASS
AC Power Line Conducted Emission	FCC 47 CFR Part 15 Subpart E Section 15.407 (b)(6) FCC 47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013, Section 6.2.	PASS

For Dynamic Frequency Selection

Test Case	Result
Channel Availability Check Time	N/A ¹
U-NII Detection Bandwidth	N/A ¹
Channel Closing Transmission Time	PASS
Channel Move Time	PASS
DFS Detection Threshold	N/A ¹
Non- Occupancy Period	N/A ¹
Note:	
1) The EUT is slave, NA In this whole report not applicable.	

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3m SAC	ETS-LINDGREN	3m	N/A	Jan. 22, 2021	Jan. 21, 2024
☒	Receiver	R&S	ESIB26	100114	Nov. 18, 2020	Nov. 17, 2021
☒	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 14, 2020	Nov. 13, 2022
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 14, 2020	Nov. 13, 2022
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 14, 2020	Nov. 13, 2022
☒	Preamplifier	HP	8447F	2805A02960	Nov. 10, 2020	Nov. 9, 2021
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	Apr. 30, 2021	Apr. 29, 2023
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	Nov. 10, 2020	Nov. 9, 2021
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 17, 2020	Nov. 16, 2022
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	Nov. 17, 2020	Nov. 16, 2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 18, 2020	Nov. 17, 2021
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	Nov. 18, 2020	Nov. 17, 2021
☒	LISN	R&S	ESH2-Z5	860014/024	Nov. 18, 2020	Nov. 17, 2021
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted RF test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Apr. 22, 2021	Apr. 21, 2022
☒	EXA Spectrum Analyzer	KEYSIGHT	N9020B	MY57120179	Apr. 22, 2021	Apr. 21, 2022
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	Apr. 22, 2021	Apr. 21, 2022
☐	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430023	Nov. 10, 2020	Nov. 9, 2021
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	Nov. 10, 2020	Nov. 9, 2021

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage	Relative Humidity (%)
NT/NV	+15 to +35	3.9Vdc	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
AC Power Line Conducted Emission	27.2	52	99.4	David Zhang
26 dB emission bandwidth	24.0	45	101.0	Evan Ouyang
Maximum conducted output power				
Peak Power Spectral Density				
6 dB bandwidth				
Dynamic Frequency Selection	25.6	51	100.1	Fire Huo
Radiated Emissions				
Band Edge Measurement	24.4	47	100.1	Asia Yan

4.2 TEST CHANNELS

Mode	Tx/Rx Frequency	Test RF Channel Lists		
		Lowest(L)	Middle(M)	Highest(H)
IEEE 802.11a IEEE 802.11n-HT20 IEEE 802.11ac-VHT20	5150 MHz to 5250 MHz	Channel 36	Channel 44	Channel 48
		5180 MHz	5220 MHz	5240 MHz
	5250 MHz to 5350 MHz	Channel 52	Channel 60	Channel 64
		5260 MHz	5300 MHz	5320 MHz
	5470 MHz to 5725 MHz	Channel 100	Channel 120	Channel 140
		5500 MHz	5600 MHz	5700 MHz
	5725 MHz to 5850 MHz	Channel 149	Channel 157	Channel 165
		5745 MHz	5785 MHz	5825 MHz
IEEE 802.11n-HT40 IEEE 802.11ac-VHT40	5150 MHz to 5250 MHz	Channel 38	--	Channel 46
		5190 MHz	--	5230 MHz
	5250 MHz to 5350 MHz	Channel 54	--	Channel 62
		5270 MHz	--	5310 MHz
	5470 MHz to 5725 MHz	Channel 102	Channel 118	Channel 134
		5510 MHz	5590 MHz	5670 MHz
	5725 MHz to 5850 MHz	Channel 151	--	Channel 159
		5755 MHz	--	5795 MHz
IEEE 802.11ac-VHT80	5150 MHz to 5250 MHz	--	Channel 42	--
		--	5210 MHz	--
	5250 MHz to 5350 MHz	--	Channel 58	--
		--	5290 MHz	--
	5470 MHz to 5725 MHz	Channel 106	--	Channel 122
		5530 MHz	--	5610 MHz
	5725 MHz to 5850 MHz	--	Channel 155	--
		--	5775 MHz	--

4.3 EUT TEST STATUS

Mode	Tx/Rx Function	Description
IEEE 802.11a/n/ac	1Tx/1Rx or 2Tx/2Rx	1. Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.

Power Setting								
Mode	U-NII-1		U-NII-2A		U-NII-2C		U-NII-3	
	Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
IEEE 802.11a	17	17	17	17	14	14	13	13
IEEE 802.11n-HT20	14	14	14	14	11	11	10	10
IEEE 802.11n-HT40	13	13	13	13	10	10	9	9
IEEE 802.11ac-VHT20	14	14	14	14	11	11	10	10
IEEE 802.11ac-VHT40	13	13	13	13	10	10	9	9
IEEE 802.11ac-VHT80	13	13	13	13	10	10	9	9

Test Software
Test software name: QRCT 4;

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

4.4PRE-SCAN

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and data rate. Following data rate was (were) selected for the final test as listed below

Mode	Worst-case data rates
IEEE 802.11a	6 Mbps
IEEE 802.11n-HT20	MCS0
IEEE 802.11n-HT40	MCS0
IEEE 802.11ac-VHT20	MCS0
IEEE 802.11ac-VHT40	MCS0
IEEE 802.11ac-VHT80	MCS0

4.5 TEST SETUP

4.5.1 For Radiated Emissions test setup

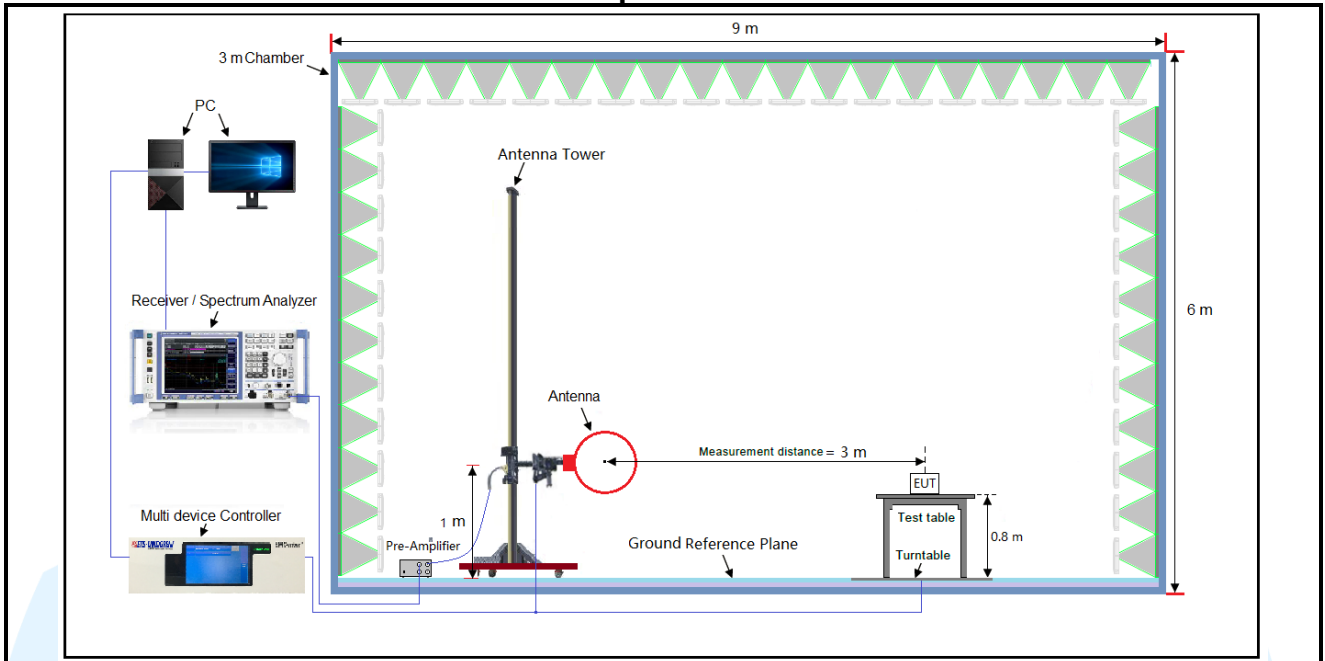


Figure 1. Below 30MHz



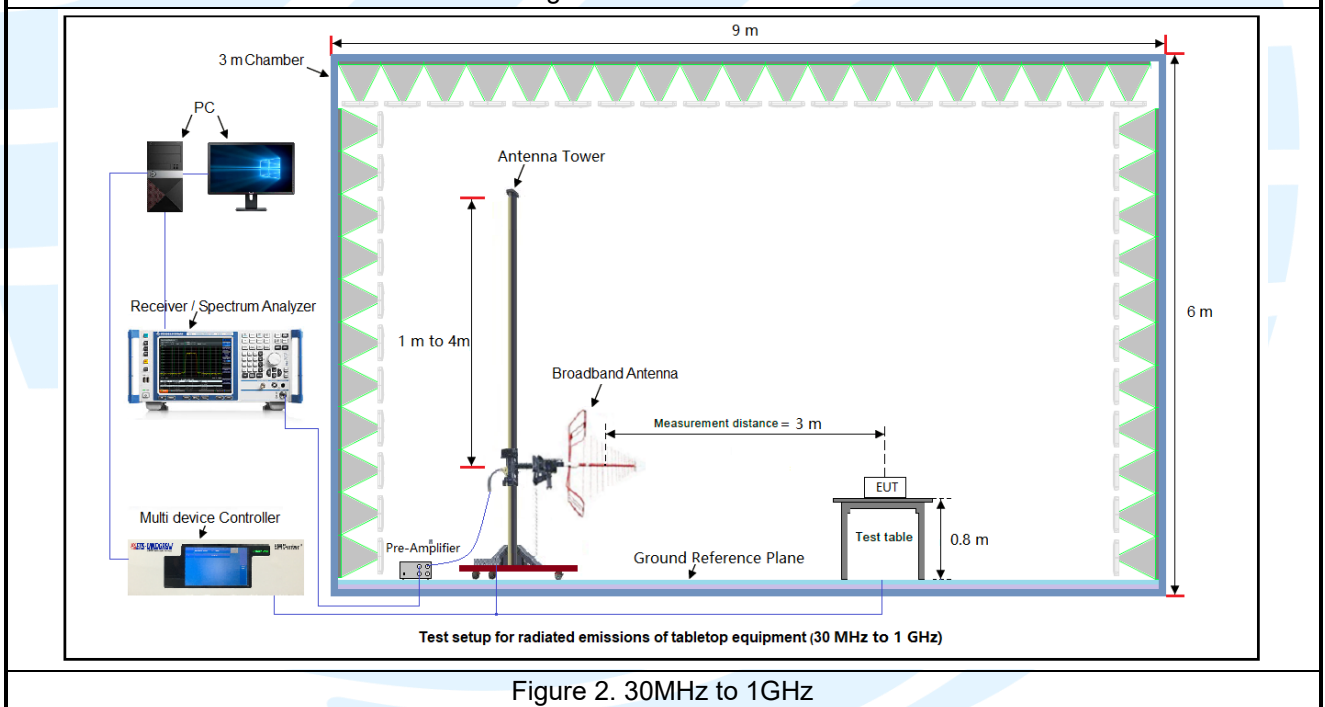



Figure 2. 30MHz to 1GHz

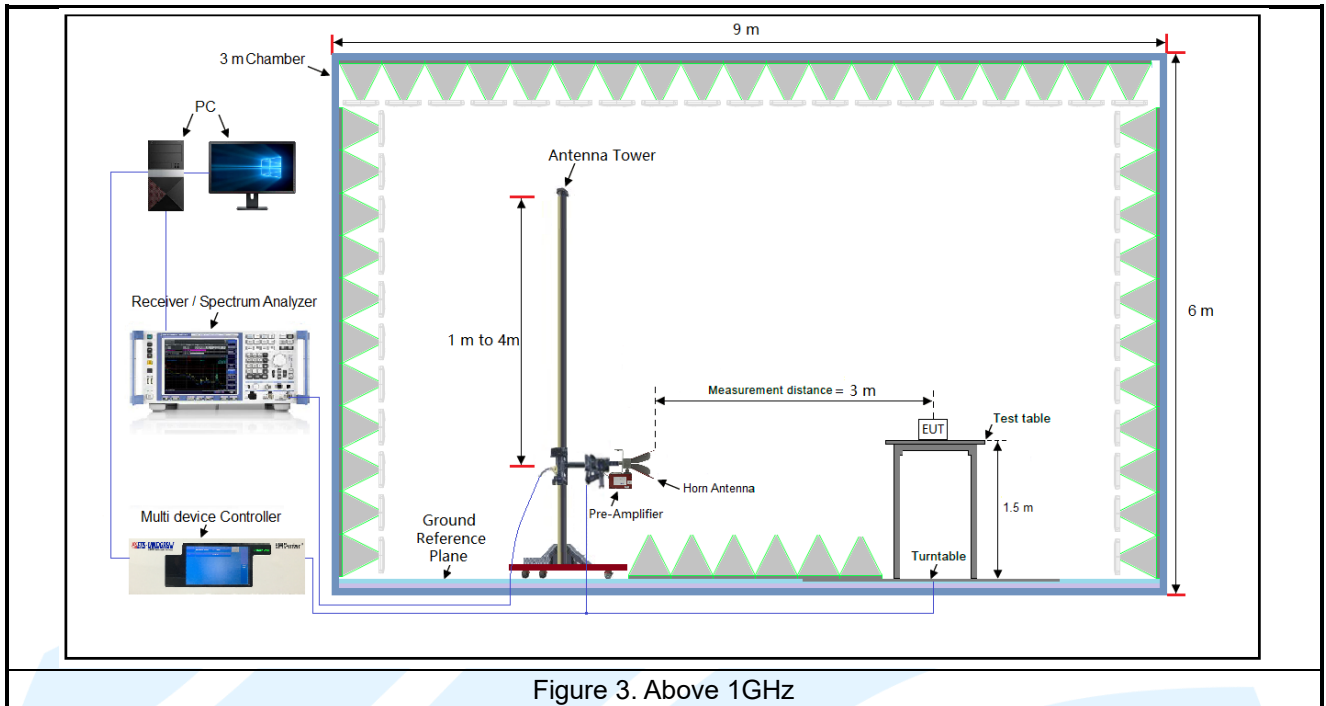

4.5.2 For Conducted Emissions test setup

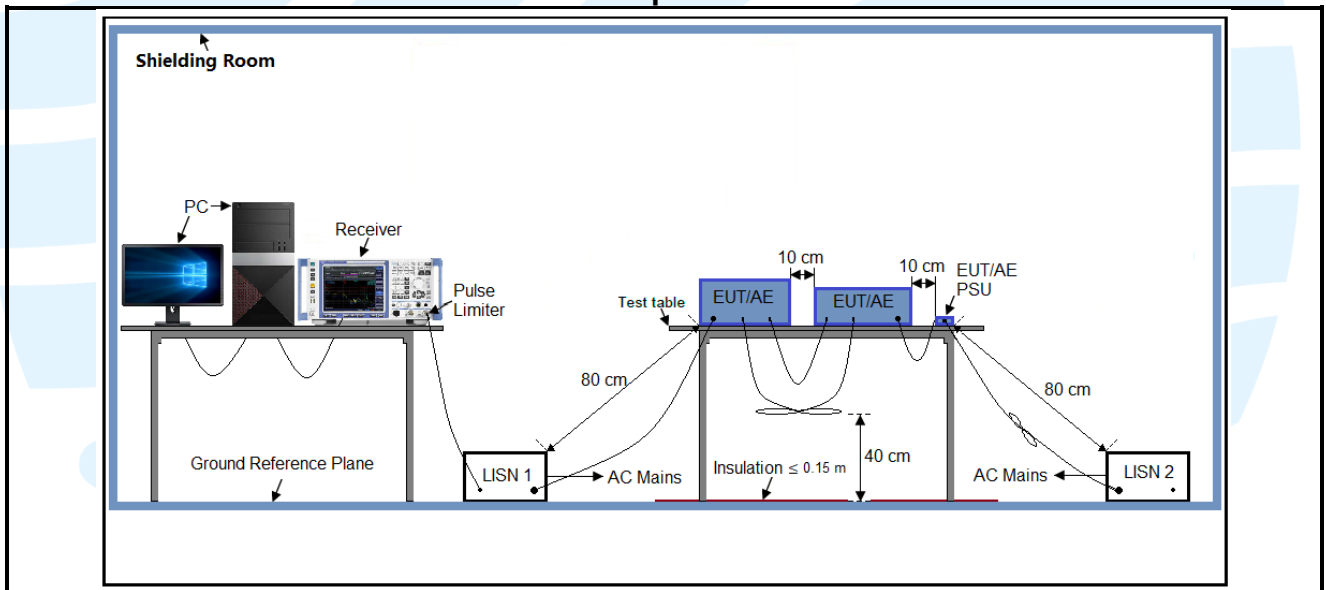

4.5.3 For Conducted RF test setup

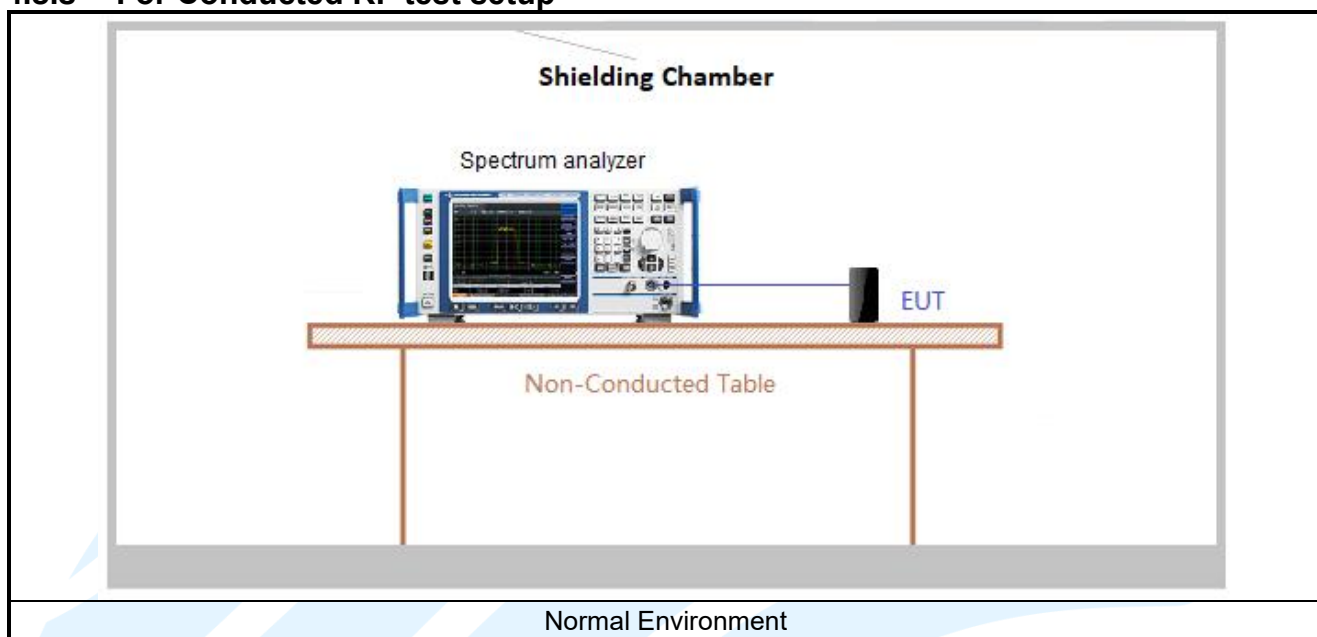

4.6 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.9V battery. Only the worst case data were recorded in this test report.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters. Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. Therefore, all final radiated testing was performed with the EUT in (see table below) orientation.

Frequency	Mode	Antenna Port	Worst-case axis positioning
Above 1GHz	1TX	Chain 0	Y axis
	1TX	Chain 1	Y axis
	2TX	Chain 0+1	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000 MHz. The resolution is 1 MHz or greater for frequencies above 1000 MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.7 DUTY CYCLE

Test Procedure: ANSI C63.10-2013 Clause 12.2.


Test Results



Mode	Data rates (Mbps)	On Time (msec)	Period (msec)	Duty Cycle (linear)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11a	6	2.0500	2.1000	0.98	97.62	0.10	0.49	-0.21
IEEE 802.11n-HT20	MCS0	1.9100	1.9600	0.97	97.45	0.11	0.52	-0.22
IEEE 802.11n-HT40	MCS0	0.9300	0.9900	0.94	93.94	0.27	1.08	-0.54
IEEE 802.11ac-VHT20	MCS0	1.9100	1.9700	0.97	96.95	0.13	0.52	-0.27
IEEE 802.11ac-VHT40	MCS0	0.9400	1.0200	0.92	92.16	0.35	1.06	-0.71
IEEE 802.11ac-VHT80	MCS0	0.4600	0.5000	0.92	92.00	0.36	2.17	-0.72

Remark:

- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor = $10 * \log(1/ \text{Duty cycle})$;
- 3) Average factor = $20 \log_{10} \text{Duty Cycle}$.

The test plots as follows

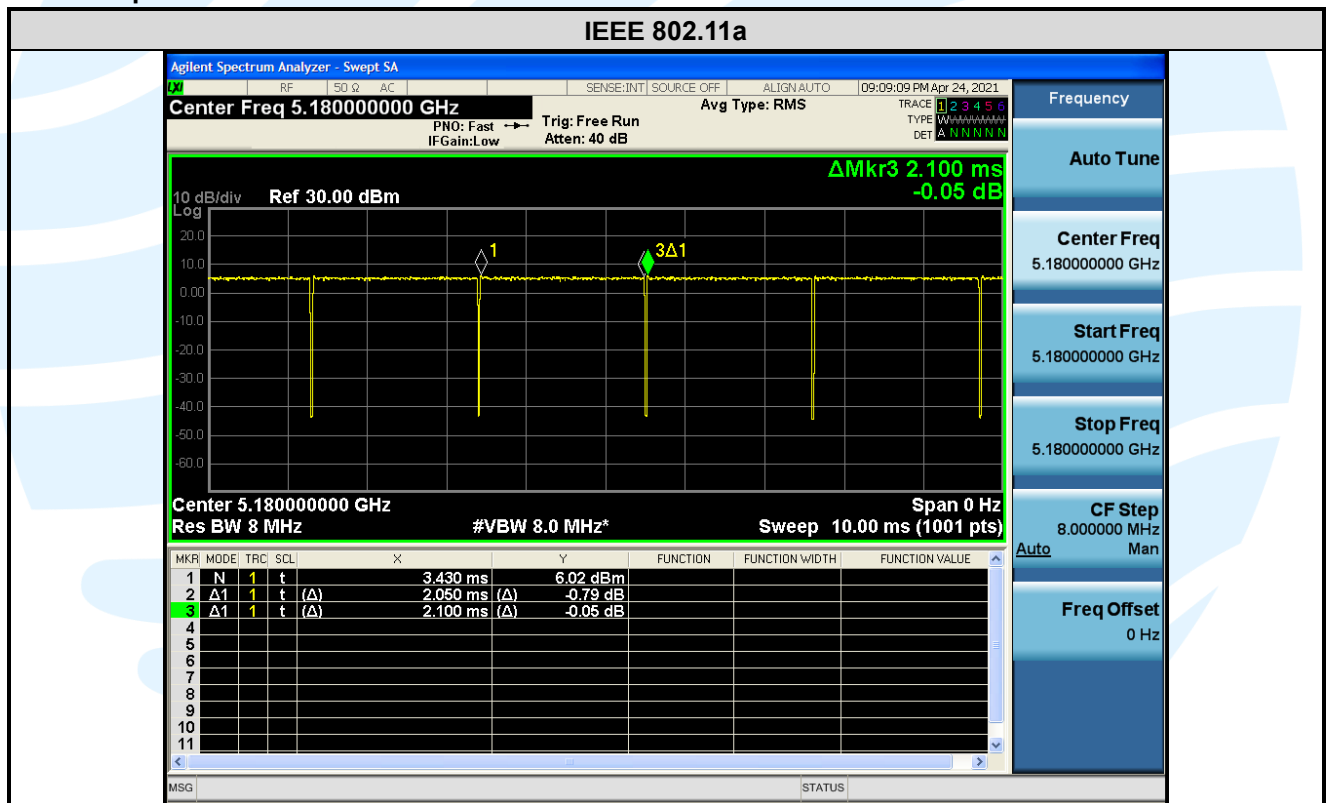

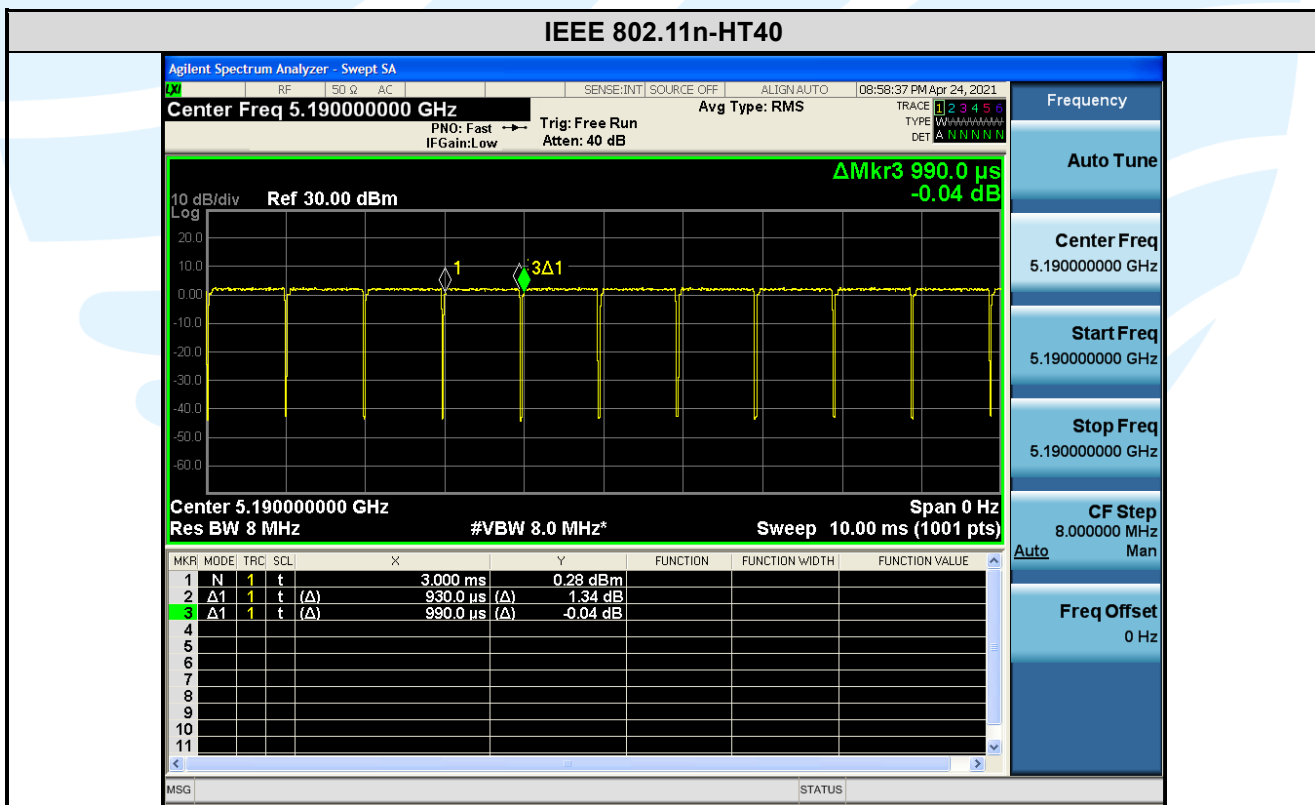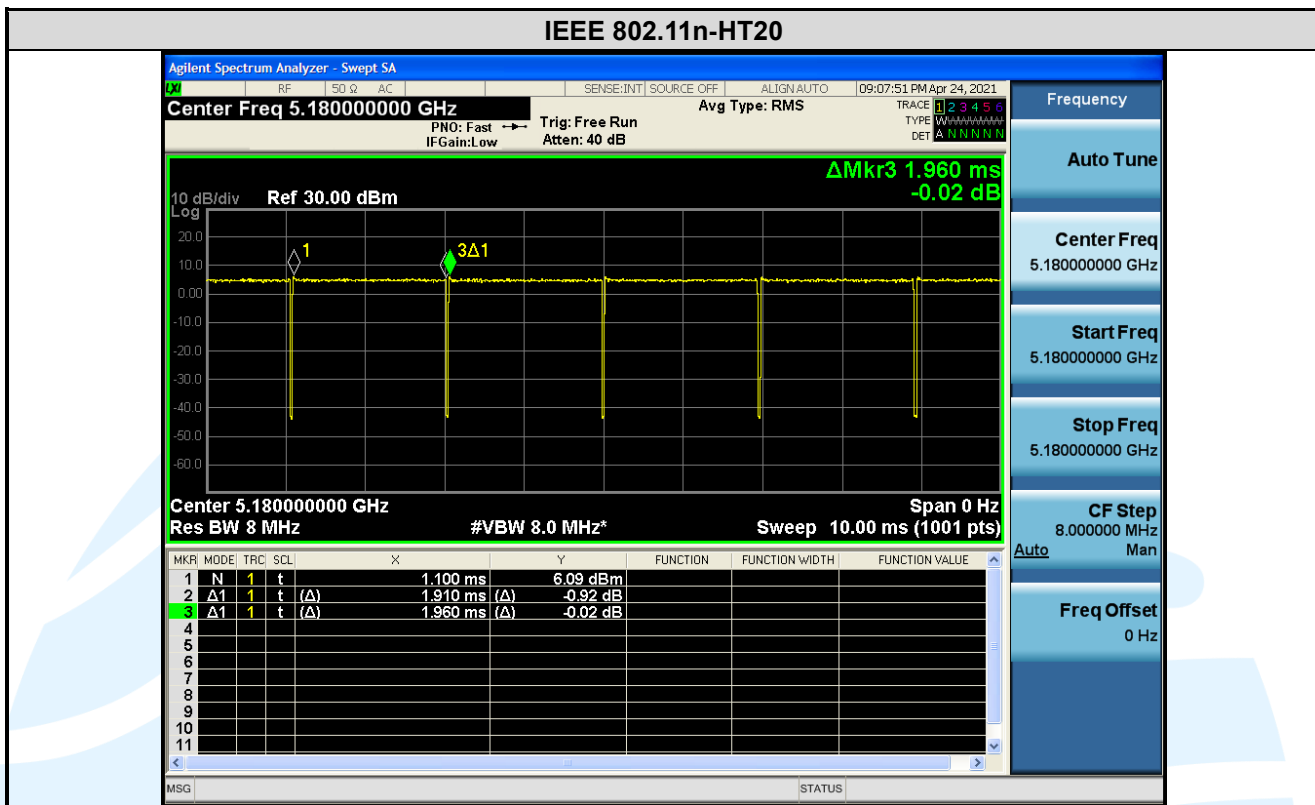

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China



Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

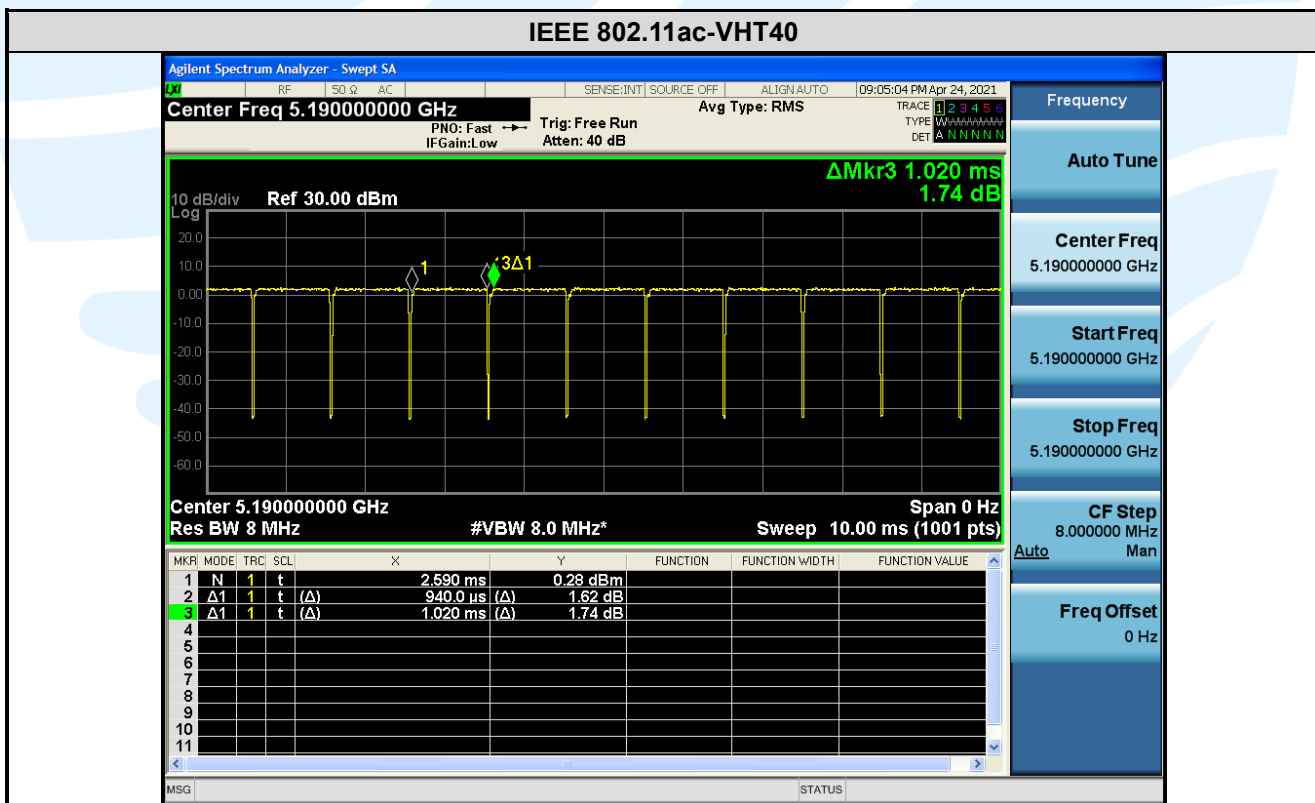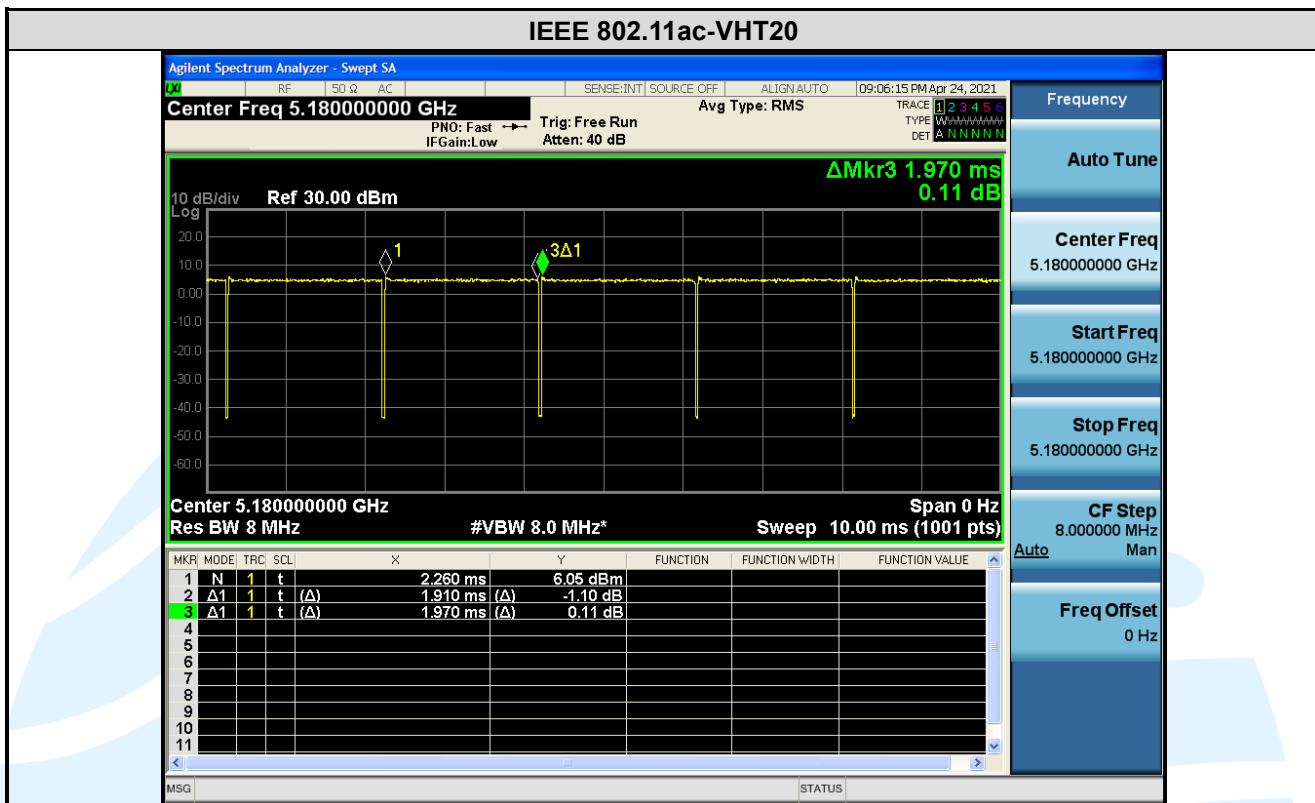

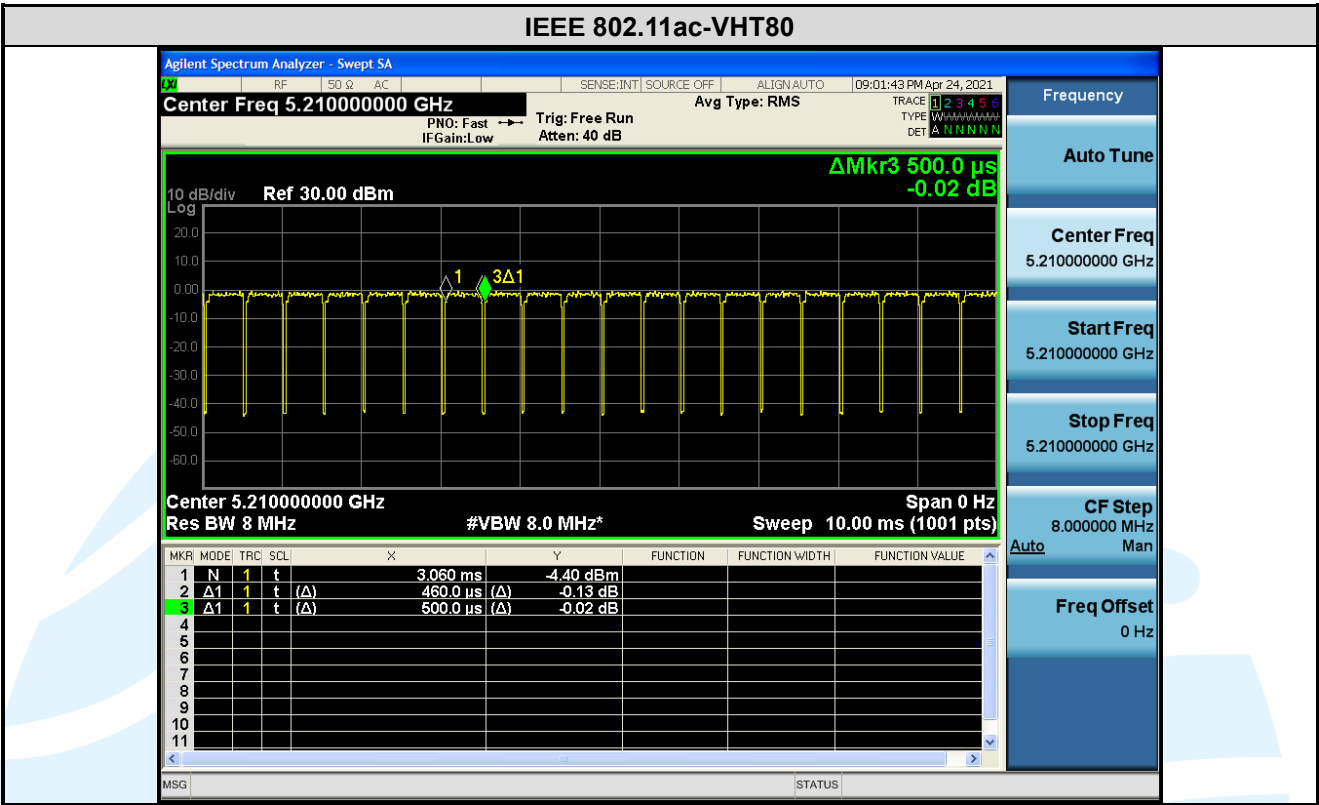

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
UTTR-RF-FCCPART15.407-V1.1

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
4	KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for compliance testing of unlicensed national information infrastructure (U-NII) device part 15, subpart E
5	KDB 905462 D06 802.11 Channel Plans New Rules v02	Operation in U-NII bands -802.11 channel PLAN(§15.407)
6	KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02	Compliance measurement procedures for Unlicensed –National Information Infrastructure devices operates in the frequency bands 5250 MHz to 5350 MHz and 5470 MHz to 5725 MHz bands incorporating dynamic frequency selection
7	KDB 905462 D03 Client Without DFS New Rules v01r02	U-NII client devices without radar detection capability
8	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band

5.2 ANTENNA REQUIREMENT

Standard Requirement
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.407(a)(1) (2) requirement: The conducted output power limit specified in paragraph (a) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (a) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power and the peak power spectral density shall be reduced by the by the amount in dB that the directional gain of the antenna exceeds 6 dBi. EUT Antenna: Both antenna in the interior of the equipment and no consideration of replacement. The transmit signals are correlated with each other and the antenna gain of both chains is are not the same, the best case directional gain of the antenna is 5.32 dBi (See section 5.5).

5.326 DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 15 Subpart E Section 15.407 (a) (2)(5)

Test Method: KDB 789033 D02 v02r01 Section C.1

Limit: None; for reporting purposes only.

Test Procedure:

The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum analyzer.

Spectrum analyzer according to the following Settings:

a) Set RBW = approximately 1 % of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1 %.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.5.3 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Transmitter mode

Test Results: Pass

Mode	Channel	26 dB Bandwidth (MHz)		99% Bandwidth (MHz)	
		Chain 0	Chain 1	Chain 0	Chain 1
IEEE 802.11a	36 (5180)	23.03	24.34	16.732	16.656
	44 (5220)	23.42	23.61	16.683	16.630
	48 (5240)	22.59	23.54	16.663	16.619
	52 (5260)	22.81	23.92	16.625	16.662
	60 (5300)	22.59	23.96	16.652	16.649
	64 (5320)	24.19	24.25	16.649	16.703
	100 (5500)	22.82	23.95	16.593	16.676
	120 (5600)	22.01	23.84	16.577	16.640
	140 (5700)	21.62	23.71	16.619	16.605
IEEE 802.11n-HT20	36 (5180)	23.29	23.40	17.839	17.771
	44 (5220)	23.02	23.26	17.845	17.815
	48 (5240)	23.49	23.76	17.826	17.760
	52 (5260)	23.41	23.48	17.824	17.778
	60 (5300)	22.71	23.37	17.810	17.779
	64 (5320)	23.18	23.42	17.826	17.778
	100 (5500)	23.45	22.97	17.793	17.793
	120 (5600)	23.42	23.49	17.794	17.775
	140 (5700)	23.12	22.56	17.807	17.741
IEEE 802.11n-HT40	38 (5190)	41.25	41.05	36.259	36.214
	46 (5230)	41.22	40.95	36.200	36.184
	54 (5270)	40.76	41.01	36.189	36.187
	62 (5310)	40.97	41.07	36.149	36.176
	102 (5510)	40.99	41.06	36.224	36.166
	118 (5590)	41.42	41.65	36.170	36.193
	134 (5670)	41.26	40.89	36.204	36.181

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

IEEE 802.11ac-VHT20	36 (5180)	22.91	22.78	17.801	17.789
	44 (5220)	23.77	23.20	17.810	17.783
	48 (5240)	23.03	23.48	17.832	17.778
	52 (5260)	23.25	23.33	17.813	17.781
	60 (5300)	23.32	23.54	17.828	17.781
	64 (5320)	23.54	23.50	17.832	17.765
	100 (5500)	22.56	25.01	17.838	17.834
	120 (5600)	23.14	25.02	17.802	17.853
	140 (5700)	23.21	23.43	17.788	17.829
IEEE 802.11ac-VHT40	38 (5190)	41.66	40.84	36.198	36.211
	46 (5230)	41.22	41.22	36.215	36.196
	54 (5270)	41.08	41.24	36.217	36.183
	62 (5310)	41.20	41.03	36.192	36.195
	102 (5510)	40.83	40.73	36.203	36.173
	118 (5590)	40.99	41.16	36.204	36.183
	134 (5670)	41.46	40.93	36.202	36.195
IEEE 802.11ac-VHT80	42 (5230)	82.59	82.35	75.888	75.881
	58 (5290)	82.62	82.84	75.903	75.904
	106 (5530)	82.59	82.50	75.903	75.908
	122 (5610)	83.37	82.69	75.958	75.970

The test plots as follows:

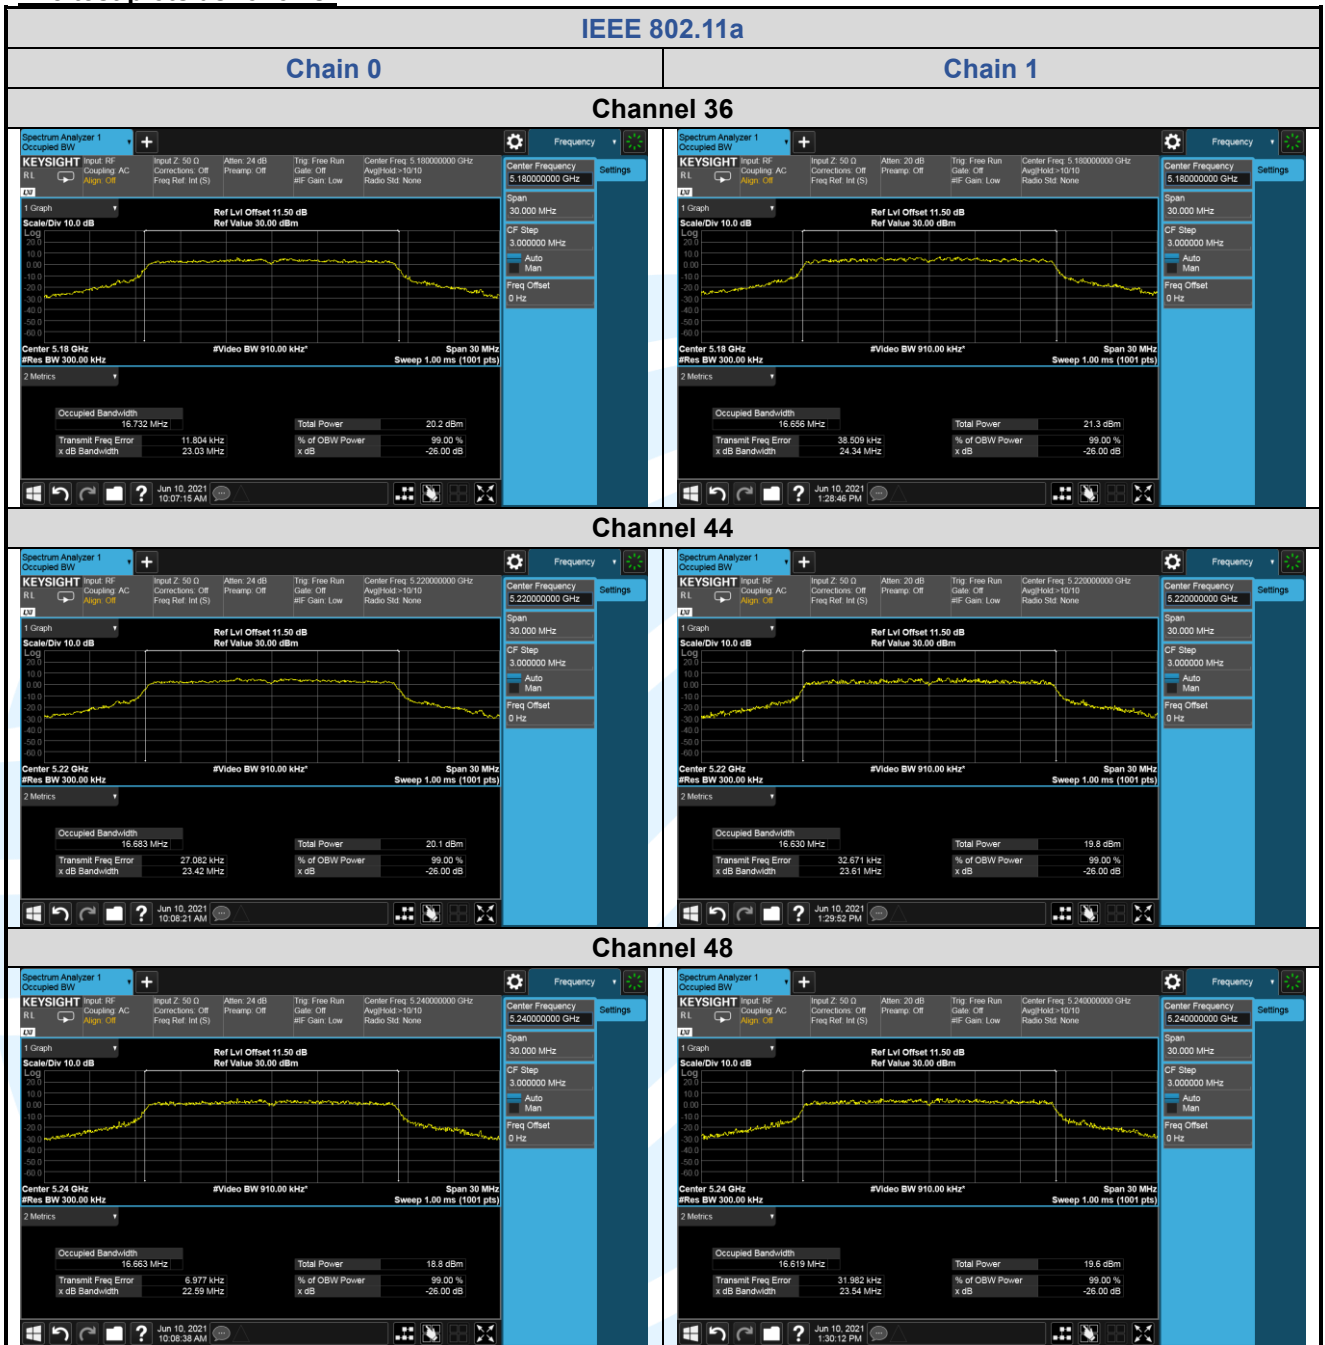

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

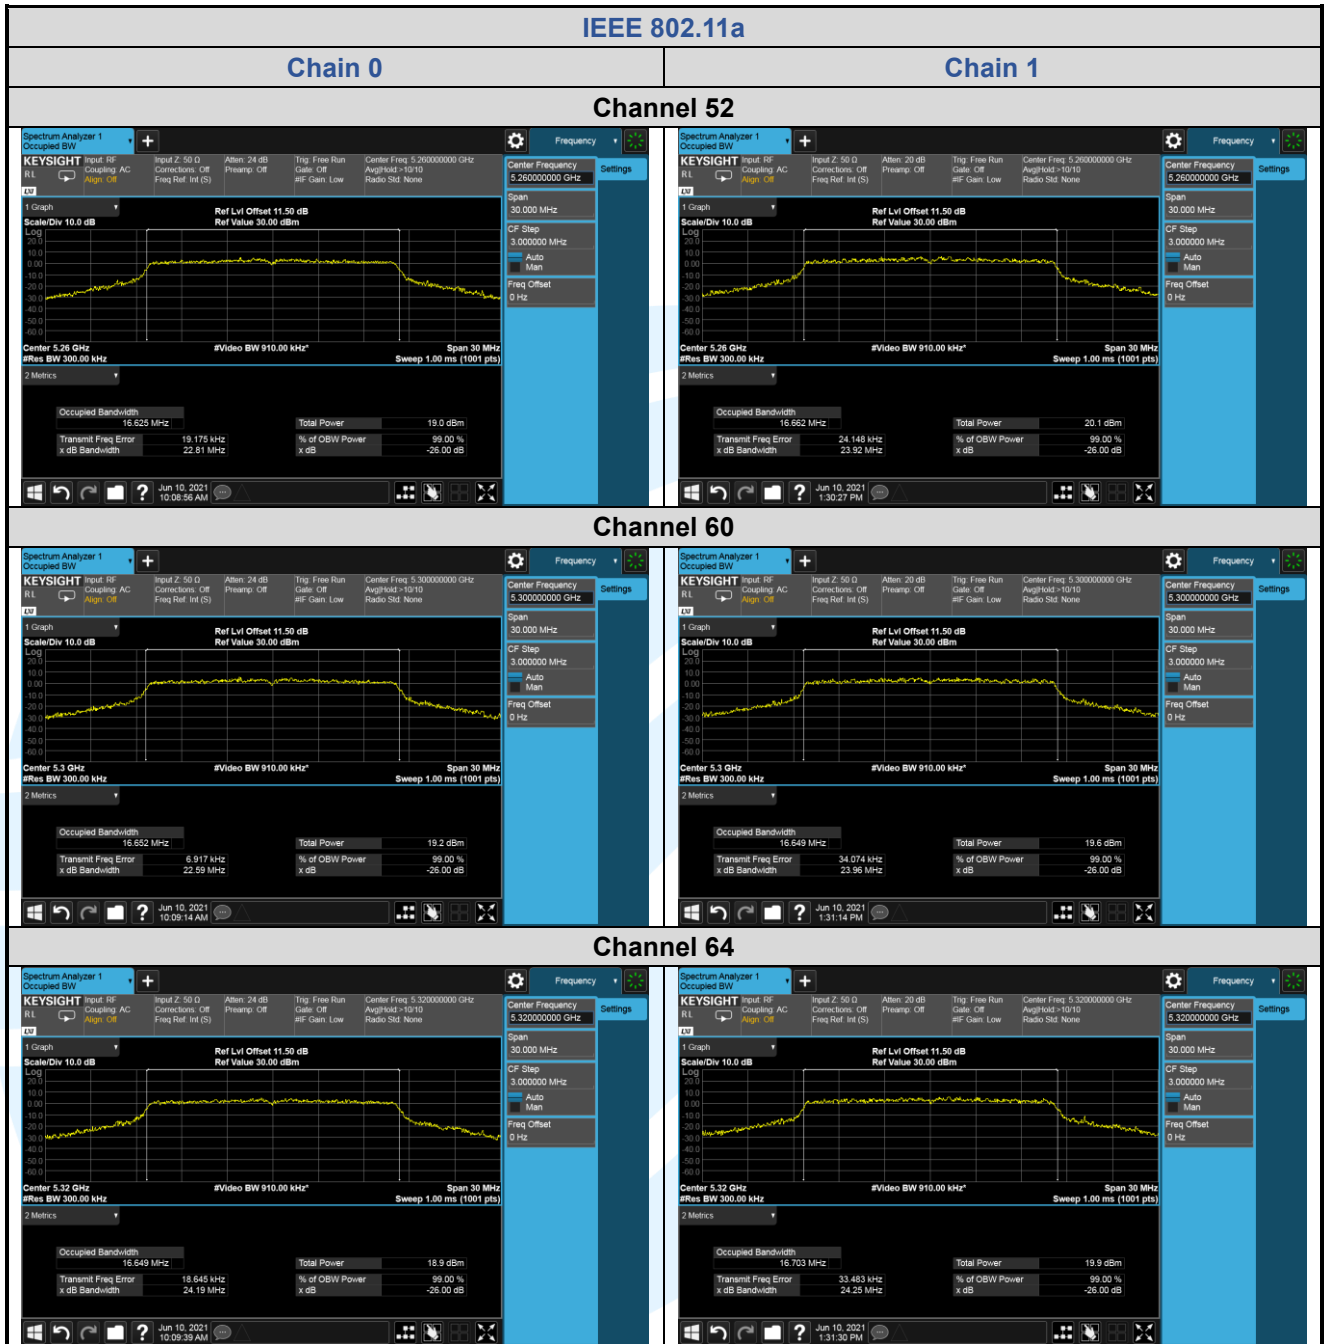

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888


Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

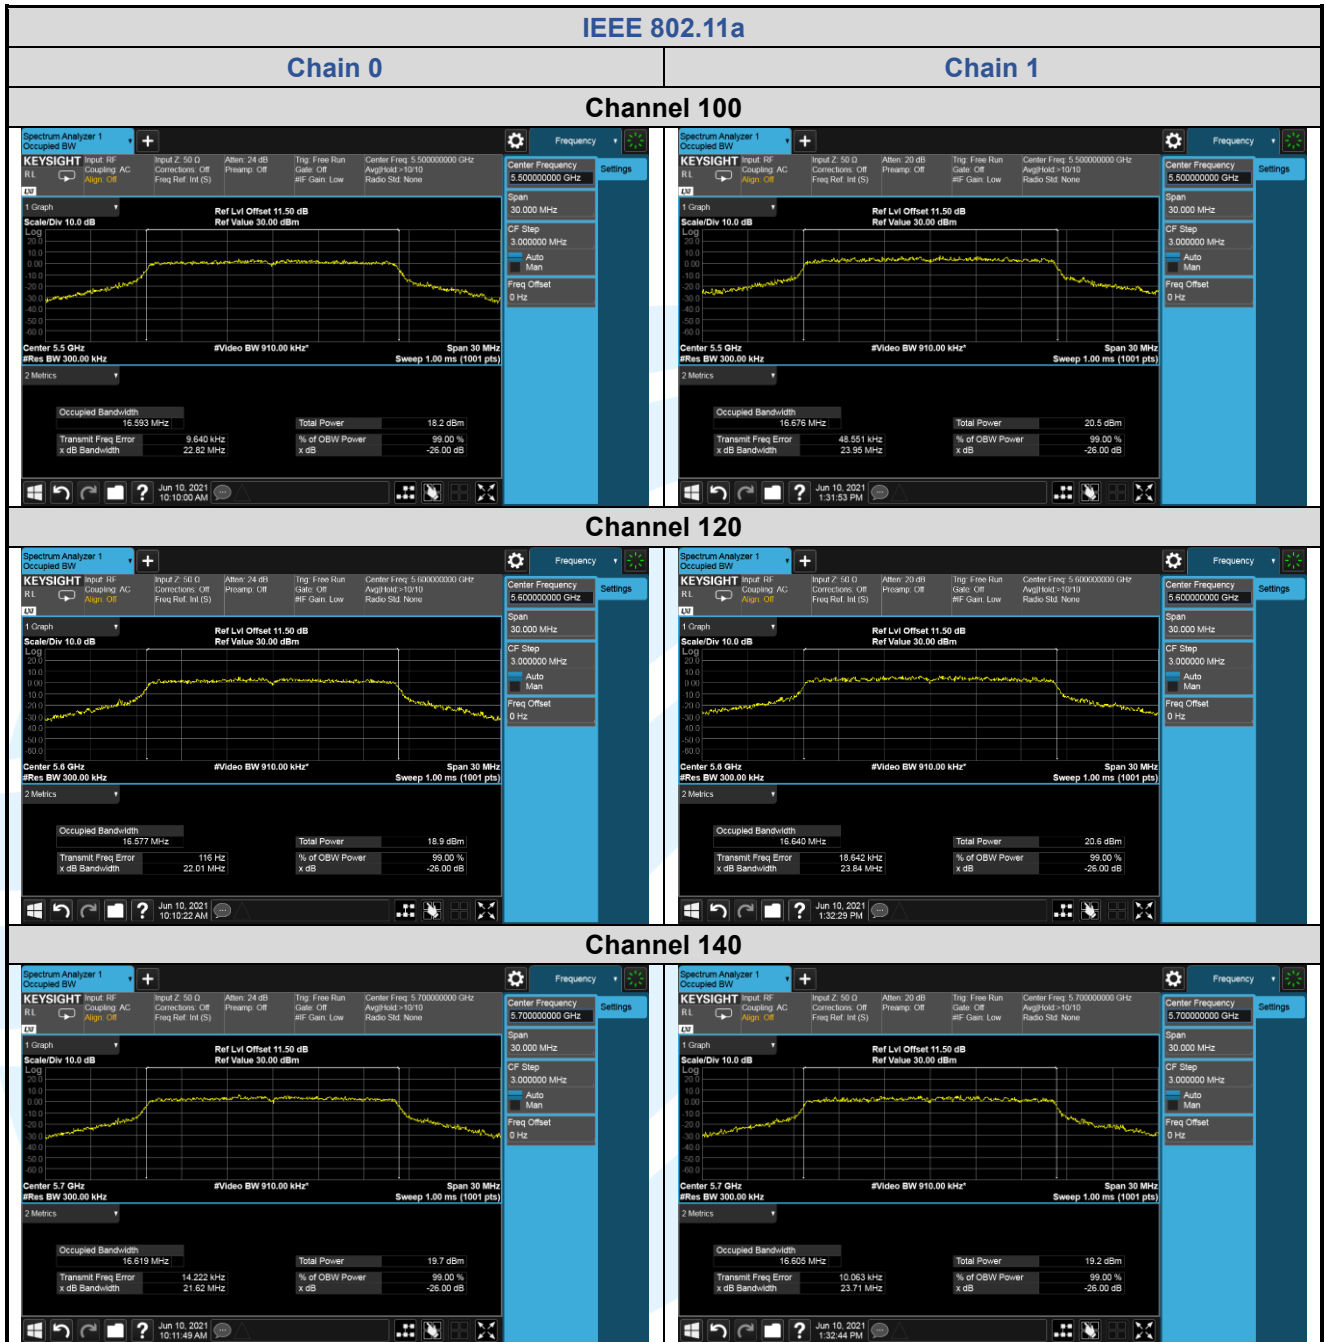

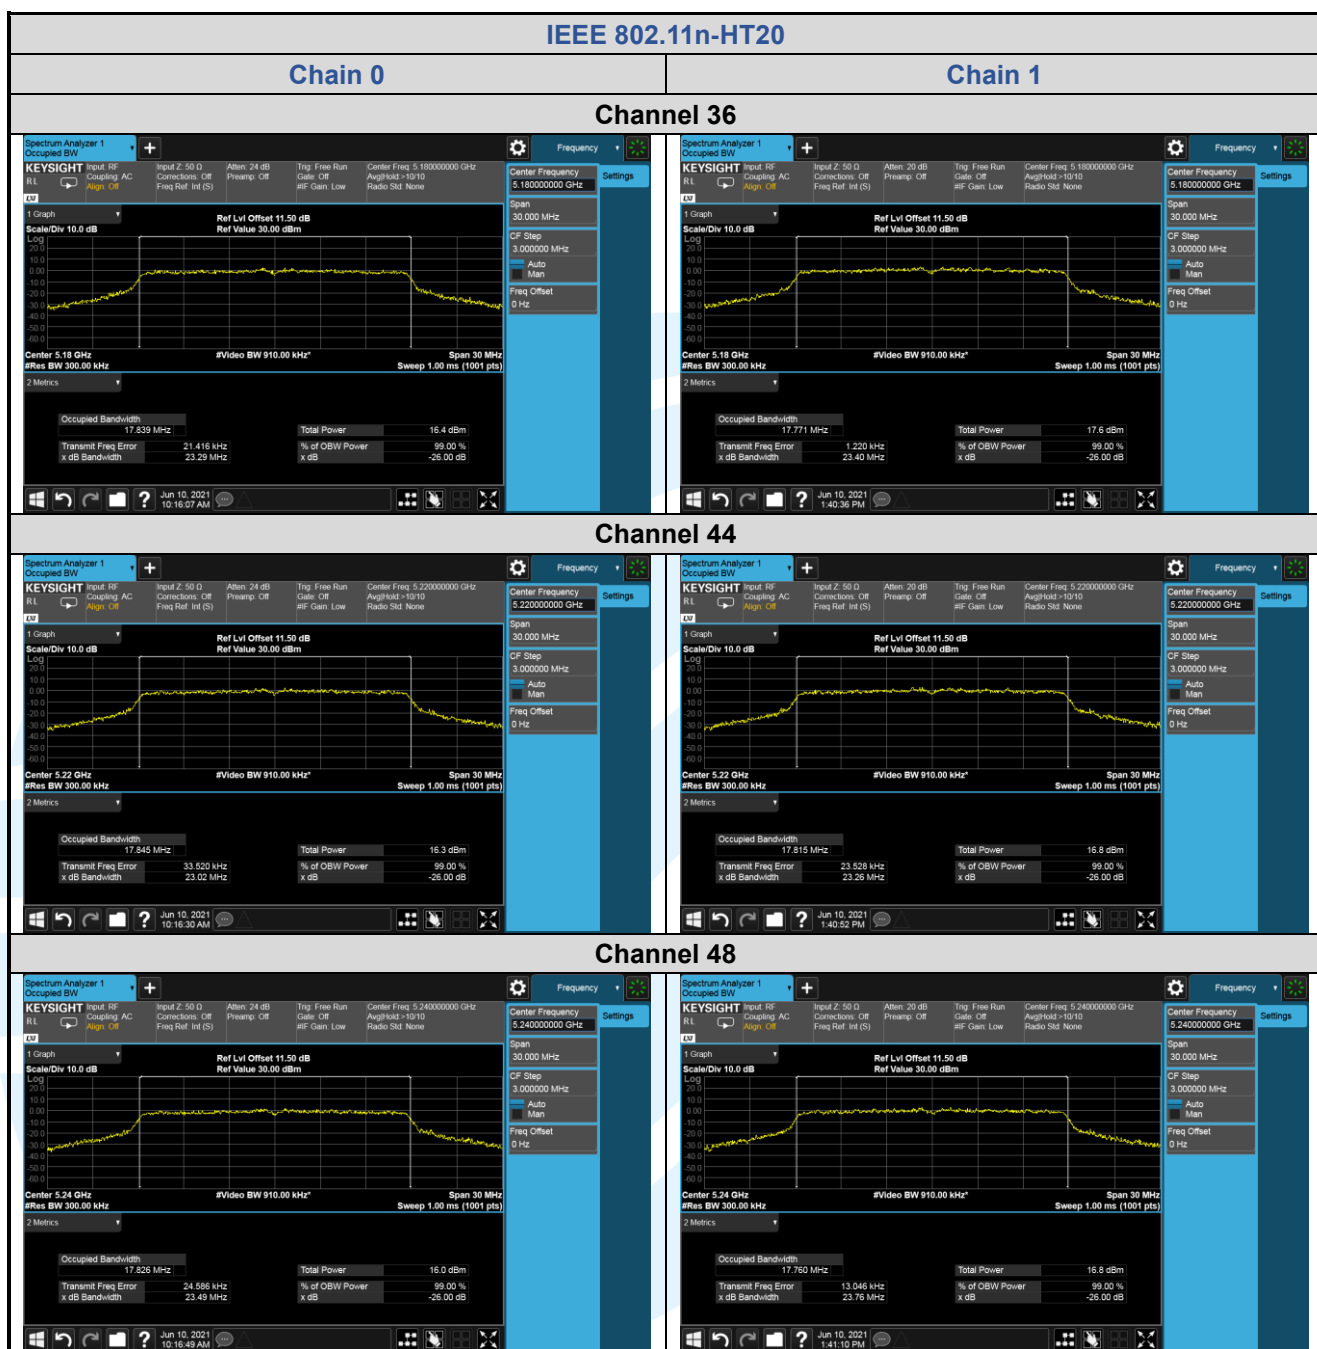

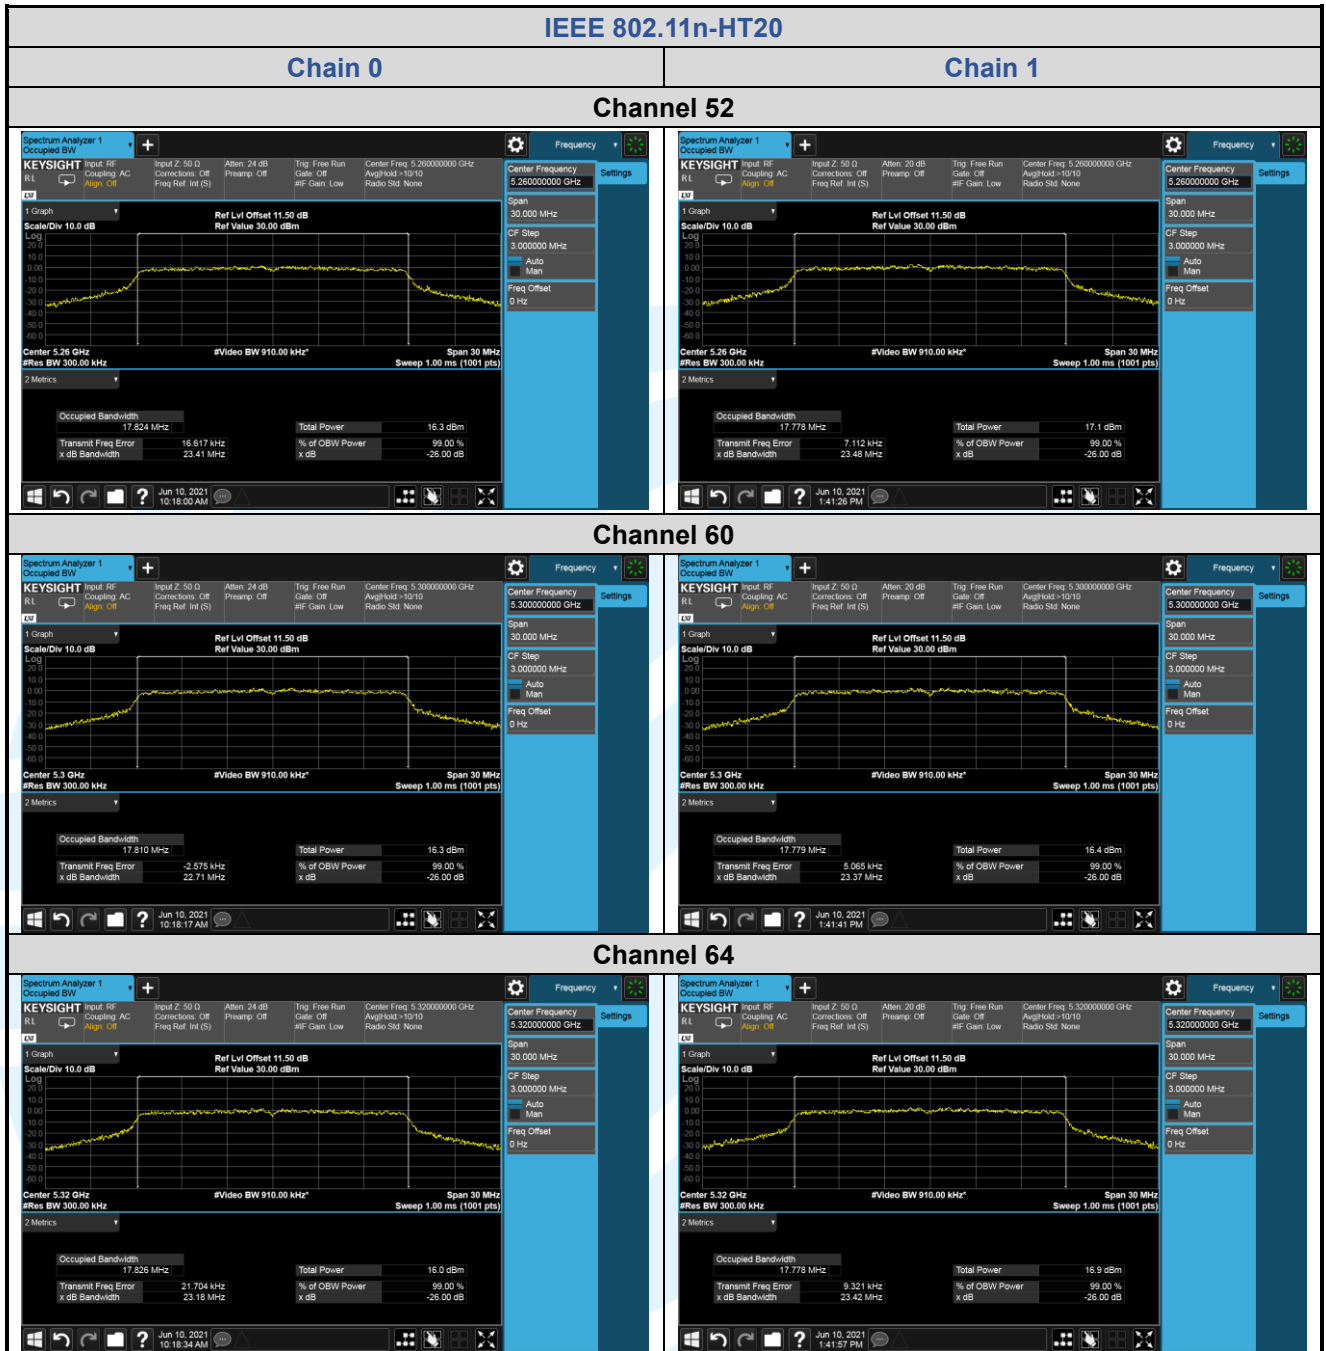

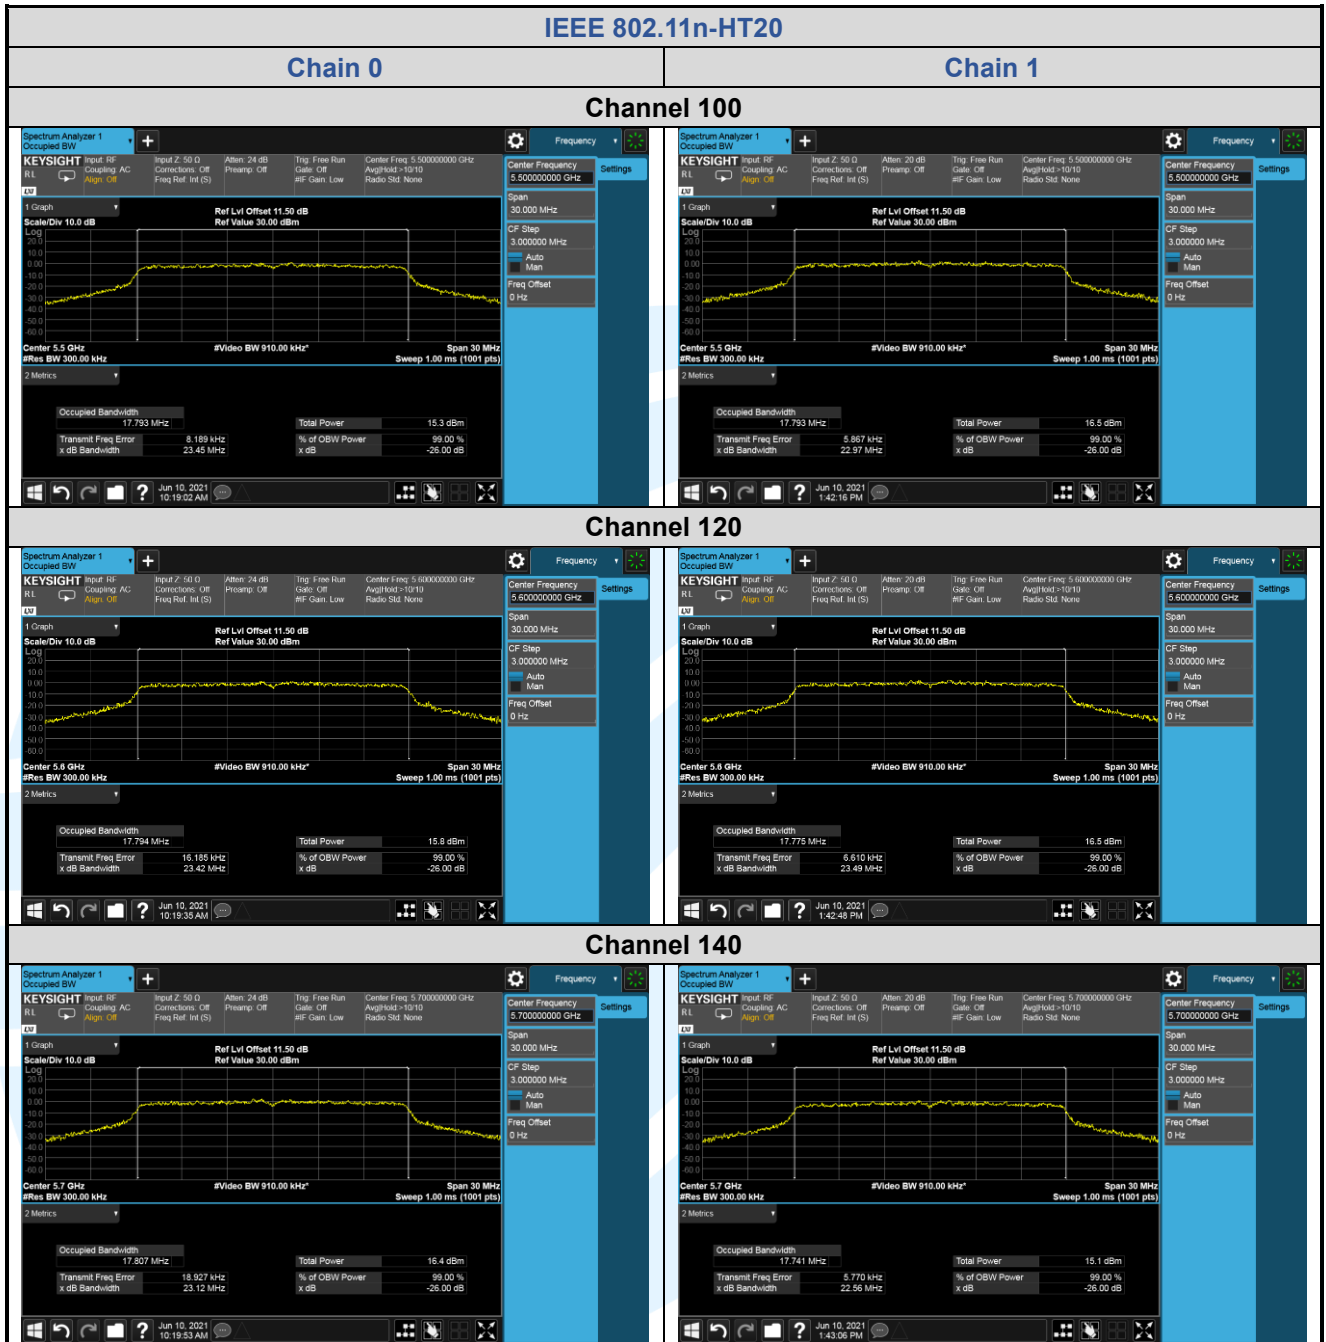

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1

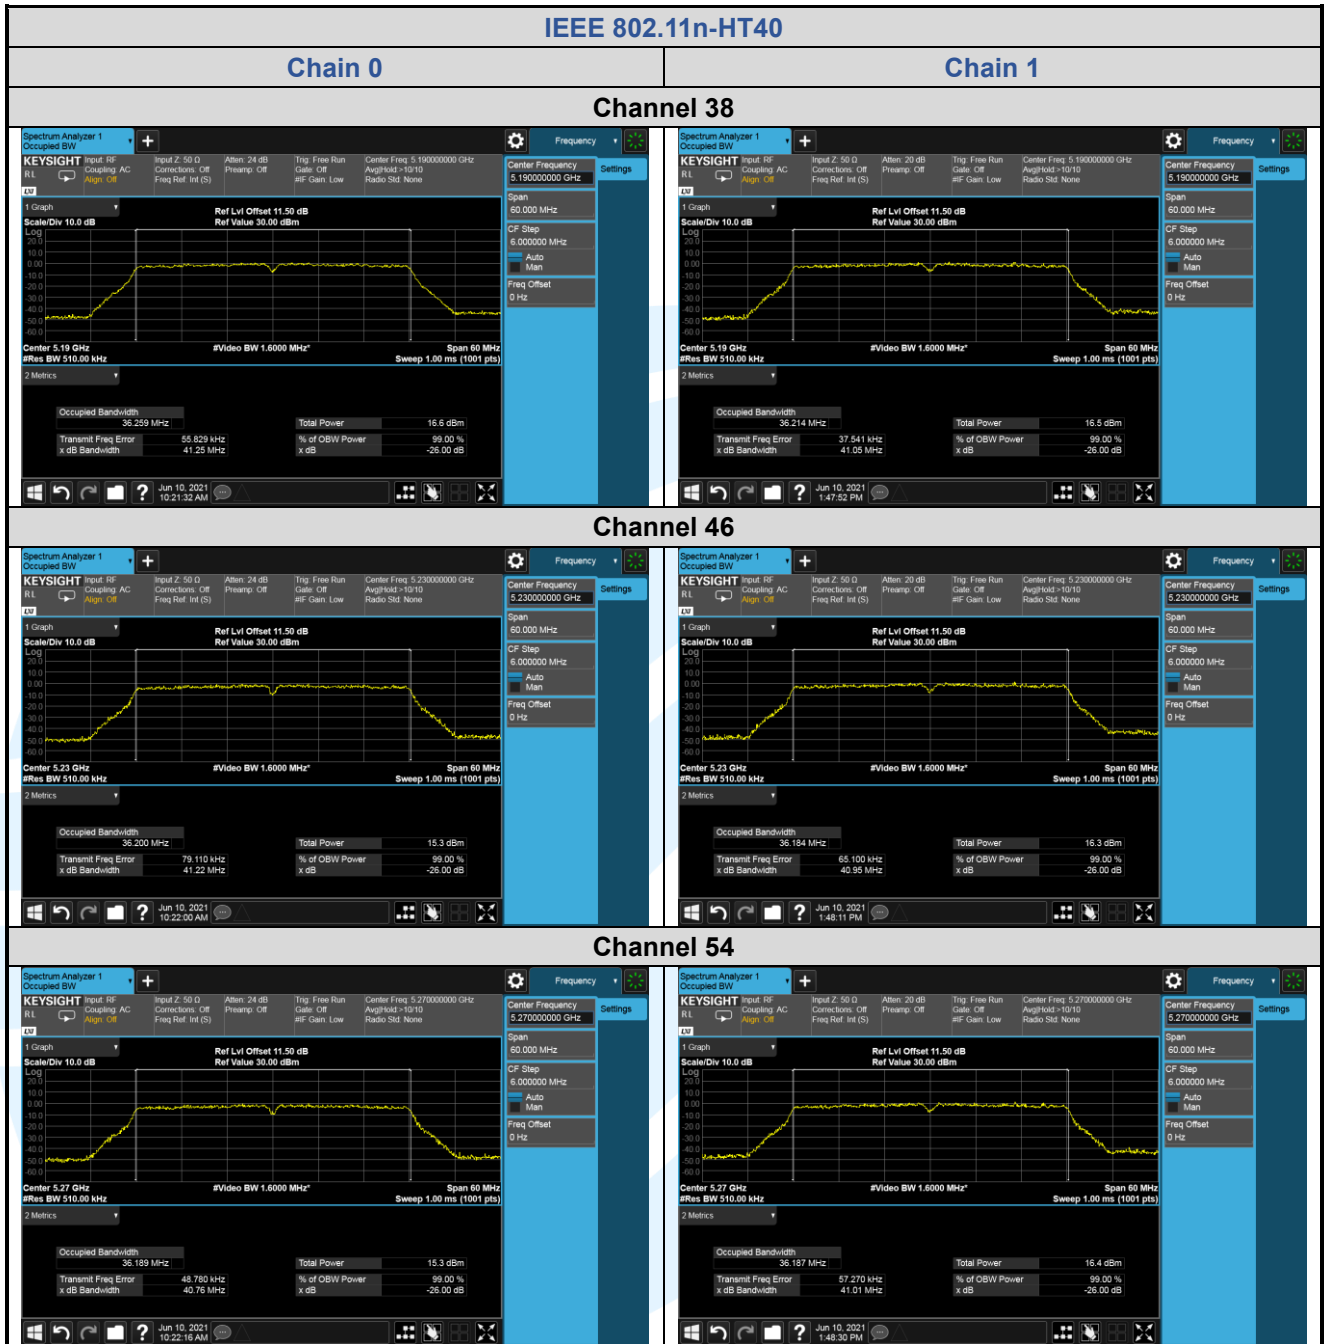

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCCPART15.407-V1.1