

WIFI 2.4G_802.11b_Right Cheek_13**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x111x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.219 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.82 V/m; Power Drift = -0.152 dB

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.075 mW/g

Maximum value of SAR (measured) = 0.262 mW/g

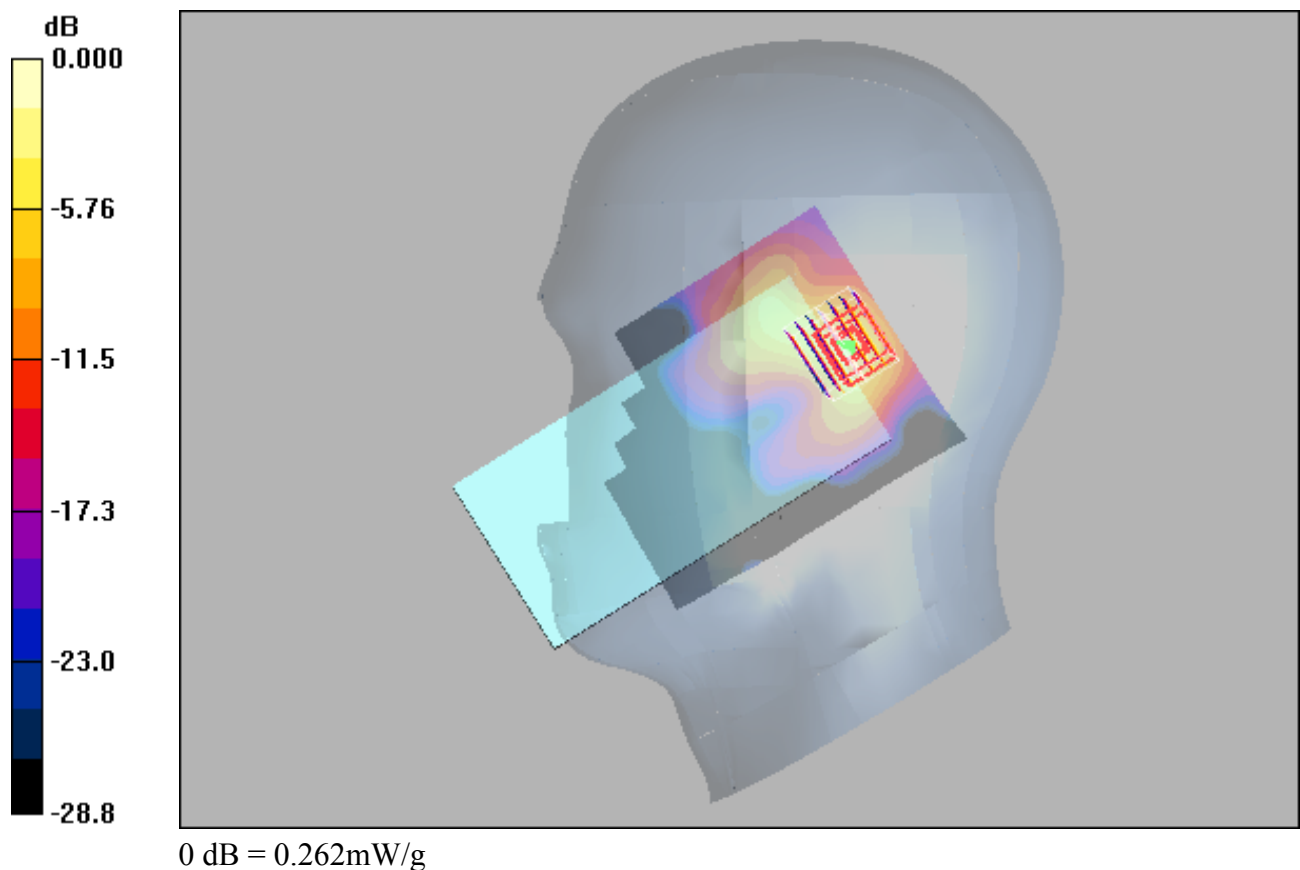

WIFI 2.4G_802.11b_Left Cheek_12**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2467 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2467$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x111x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.399 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.82 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.597 W/kg

SAR(1 g) = 0.311 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.388 mW/g

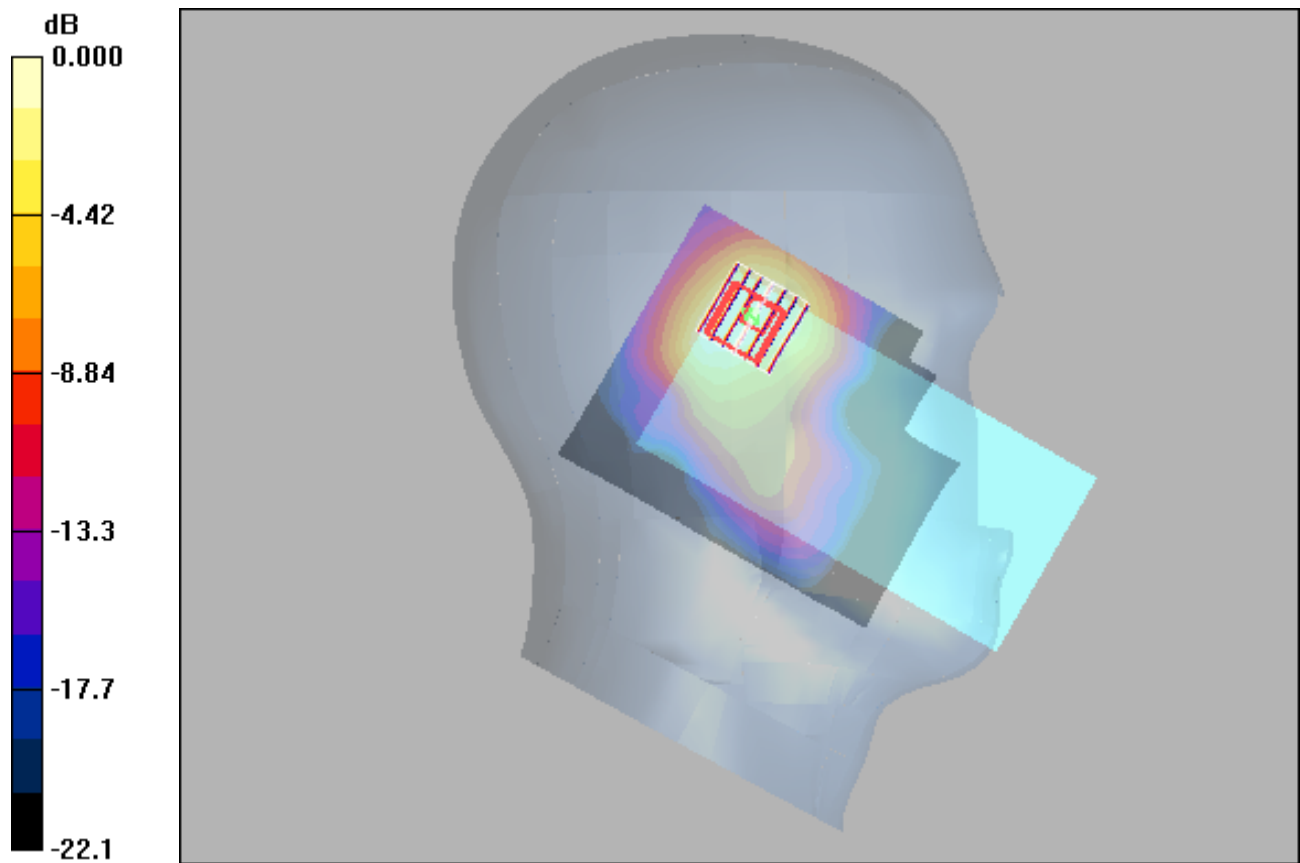

0 dB = 0.388mW/g

WIFI 2.4G_802.11n40_Left Cheek_10**DUT: EUT**


Communication System: 802.11n (HT40); Frequency: 2457 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2457$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.183 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.32 V/m; Power Drift = -0.025 dB
Peak SAR (extrapolated) = 0.270 W/kg
SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.072 mW/g
Maximum value of SAR (measured) = 0.180 mW/g

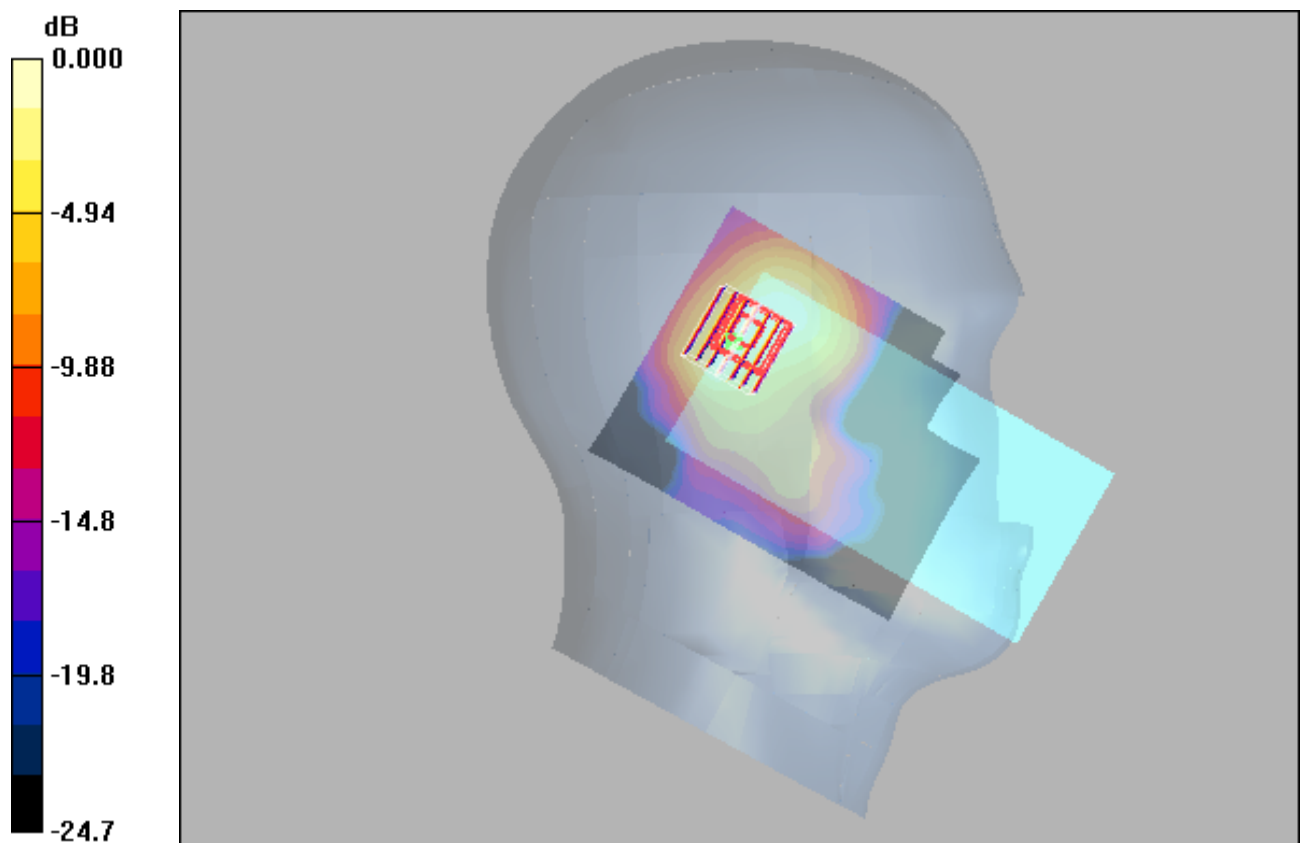

0 dB = 0.180mW/g

EDR_DH5_Right Cheek_78**DUT: EUT**

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x111x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.046 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.64 V/m; Power Drift = -0.066 dB

Peak SAR (extrapolated) = 0.029 W/kg

SAR(1 g) = 0.013 mW/g; SAR(10 g) = 0.00463 mW/g

Maximum value of SAR (measured) = 0.019 mW/g

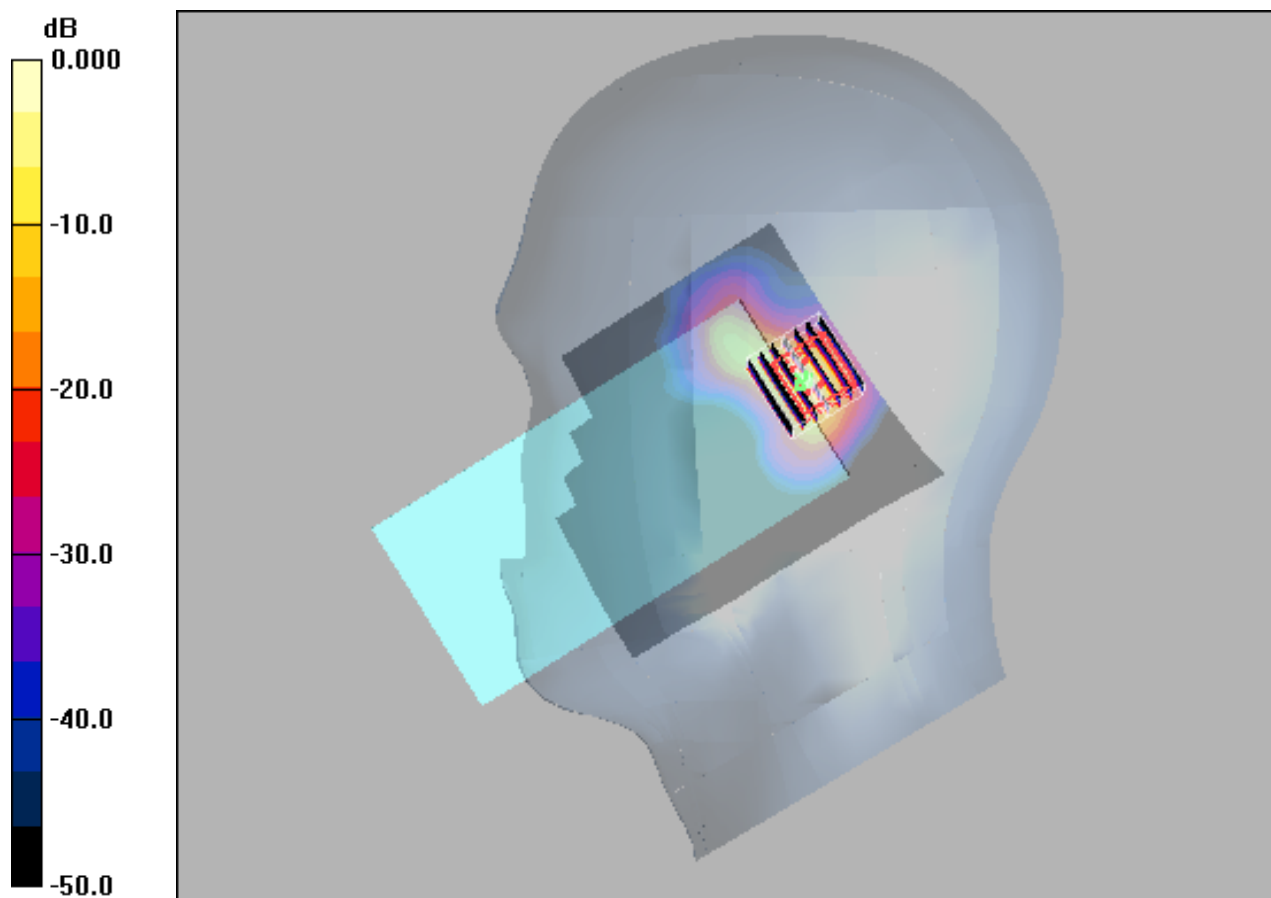

0 dB = 0.019mW/g

WIFI 5G_802.11a_Right Cheek_44**DUT: EUT**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.249 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.70 V/m; Power Drift = -0.111 dB

Peak SAR (extrapolated) = 0.670 W/kg

SAR(1 g) = 0.147 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.249 mW/g

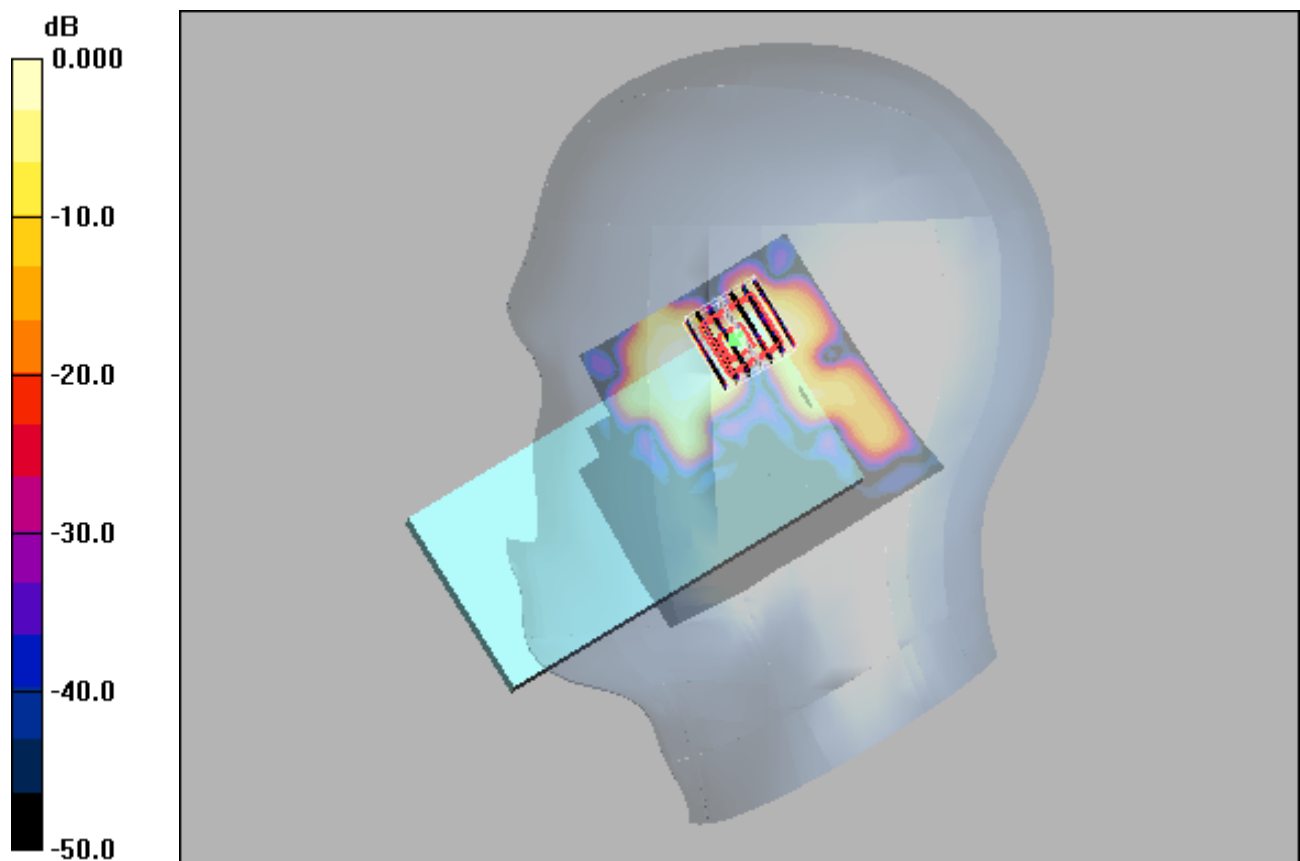

0 dB = 0.249mW/g

WIFI 5G_802.11a_Left Cheek_48**DUT: EUT**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.309 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.00 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.404 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.113 mW/g

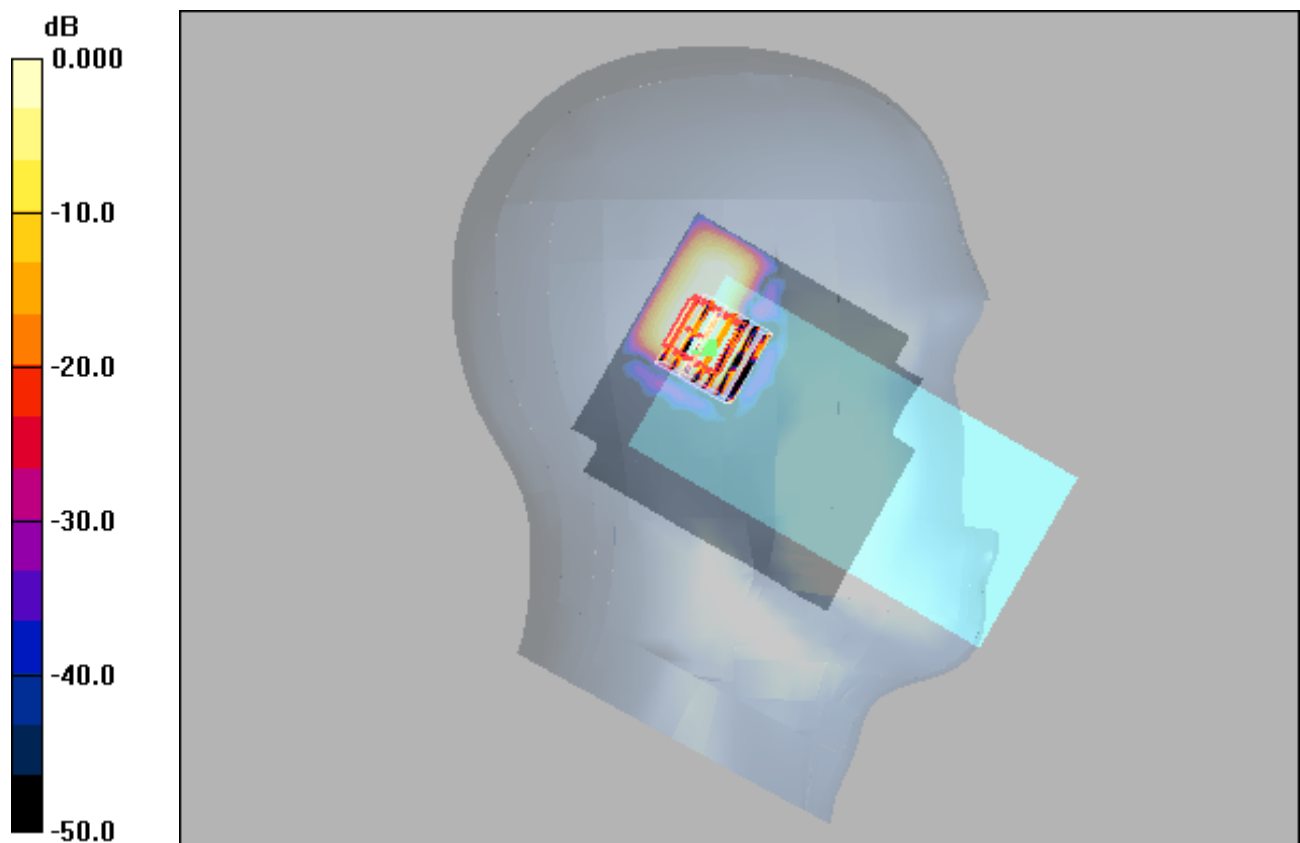

0 dB = 0.113mW/g

WIFI 5G_802.11n20_Right Tilted_44**DUT: EUT**

Communication System: 802.11n20; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.112 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.32 V/m; Power Drift = 0.184 dB

Peak SAR (extrapolated) = 0.422 W/kg

SAR(1 g) = 0.075 mW/g; SAR(10 g) = 0.020 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

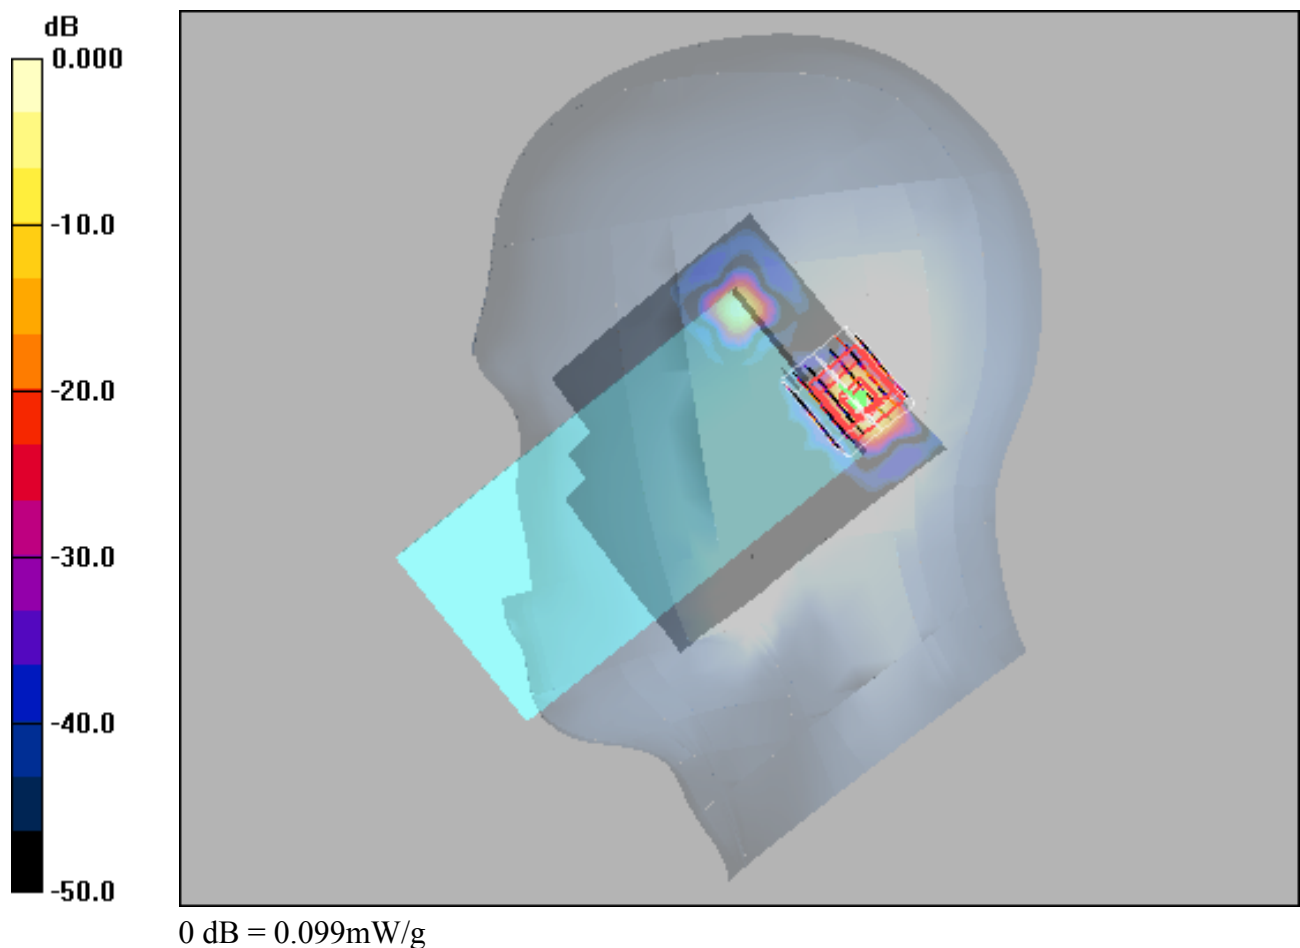

WIFI 5G_802.11a_Right Cheek_60**DUT: EUT**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.402 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.74 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.826 W/kg

SAR(1 g) = 0.247 mW/g; SAR(10 g) = 0.070 mW/g

Maximum value of SAR (measured) = 0.415 mW/g

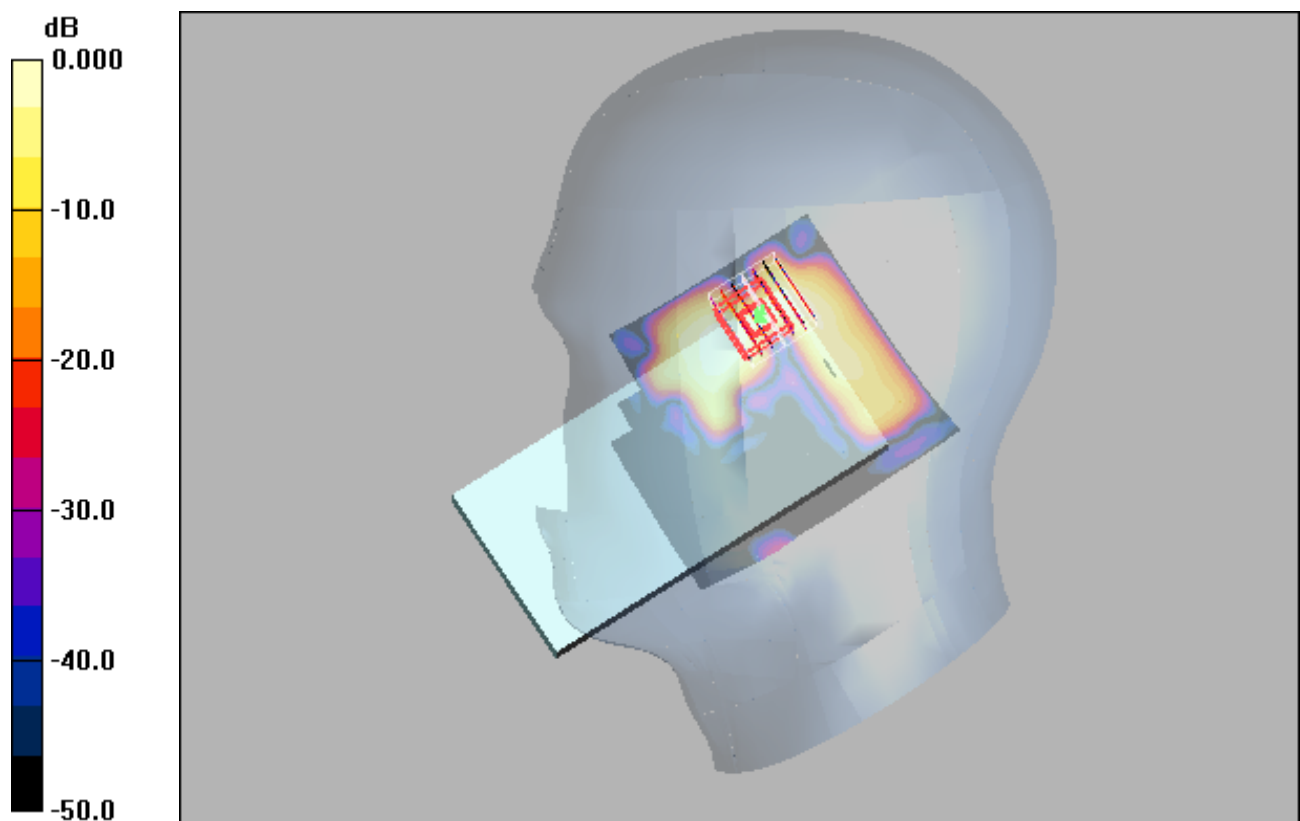

0 dB = 0.415mW/g

WIFI 5G_802.11a_Right Tilted_64**DUT: EUT**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.167 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.497 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.461 W/kg

SAR(1 g) = 0.080 mW/g; SAR(10 g) = 0.019 mW/g

Maximum value of SAR (measured) = 0.110 mW/g

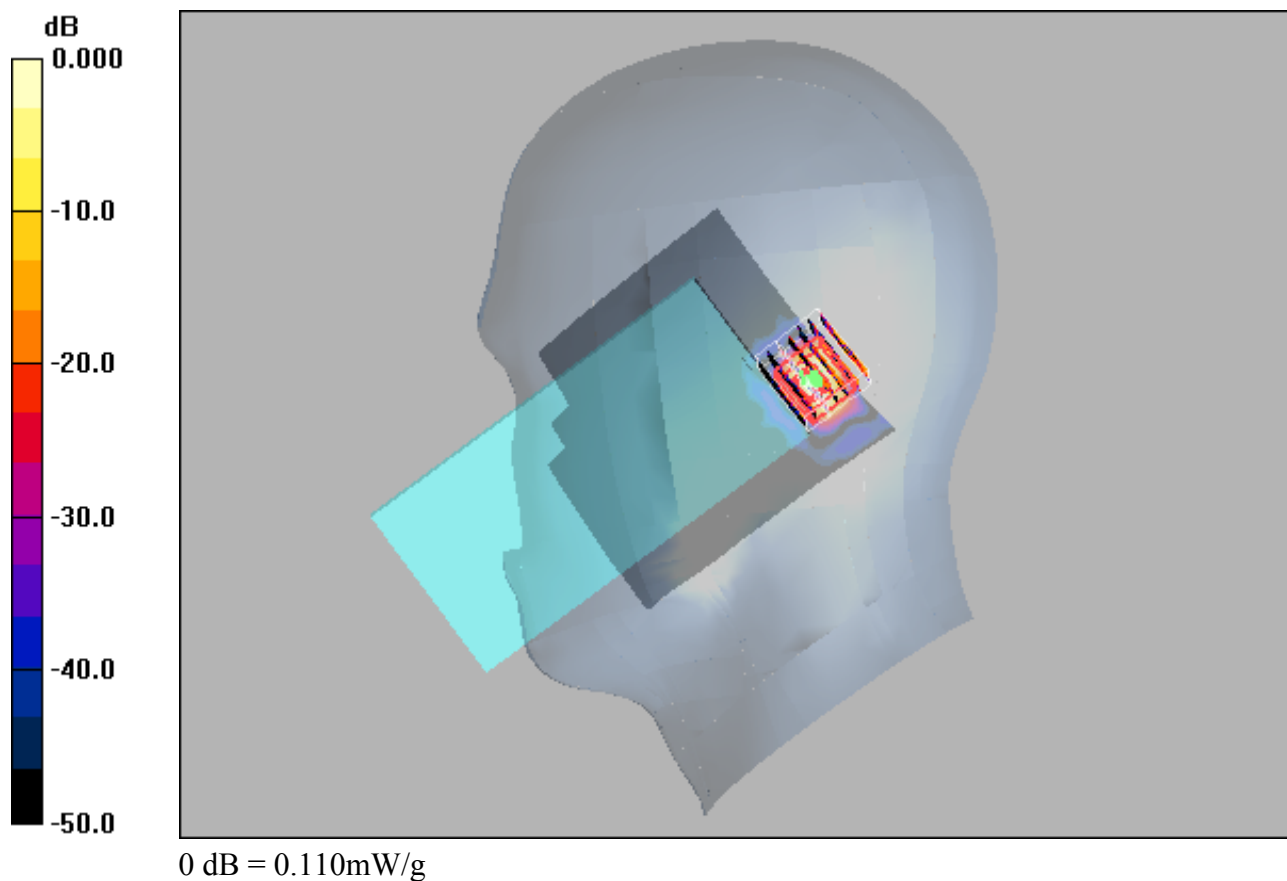

WIFI 5G_802.11n20_Right Cheek_60**DUT: EUT**

Communication System: 802.11n20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.176 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.56 V/m; Power Drift = 0.045 dB

Peak SAR (extrapolated) = 0.698 W/kg

SAR(1 g) = 0.114 mW/g; SAR(10 g) = 0.027 mW/g

Maximum value of SAR (measured) = 0.179 mW/g

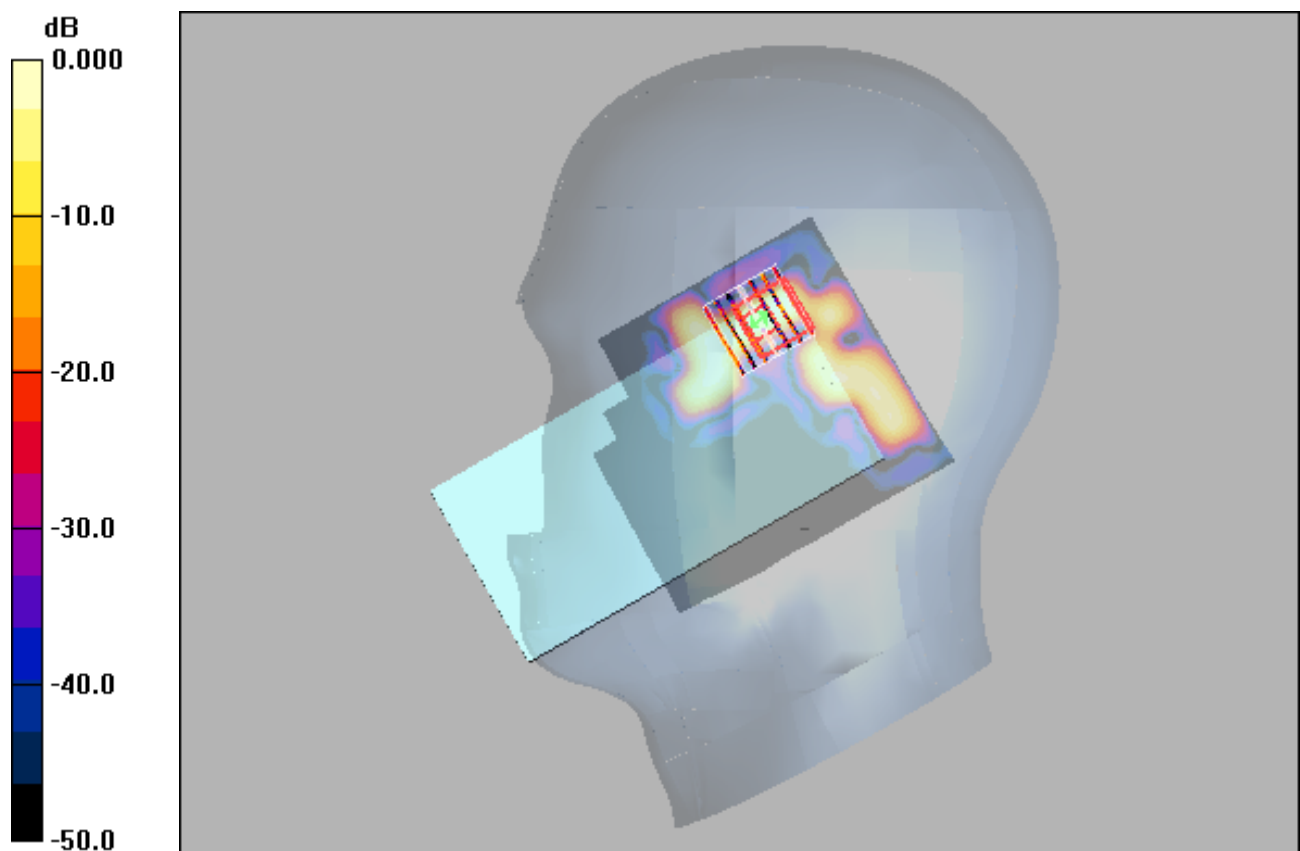

0 dB = 0.179mW/g

WIFI 5G_802.11a_Right Tilted_140**DUT: EUT**

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.08

Medium: H5600 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.115 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.748 V/m; Power Drift = 0.067 dB

Peak SAR (extrapolated) = 0.624 W/kg

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.022 mW/g

Maximum value of SAR (measured) = 0.165 mW/g

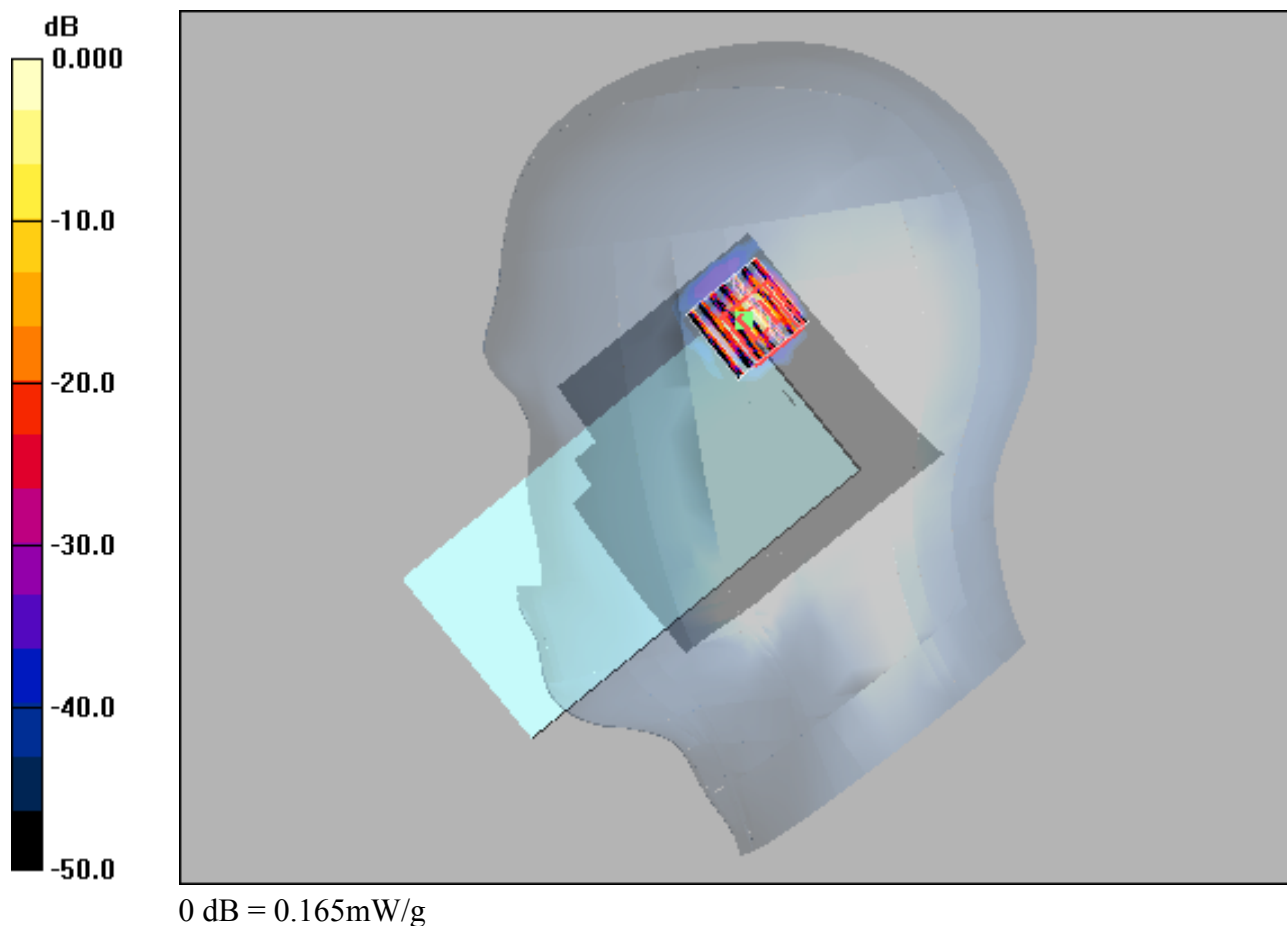

WIFI 5G_802.11a_Left Tilted_100**DUT: EUT**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.213 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.18 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.474 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.135 mW/g

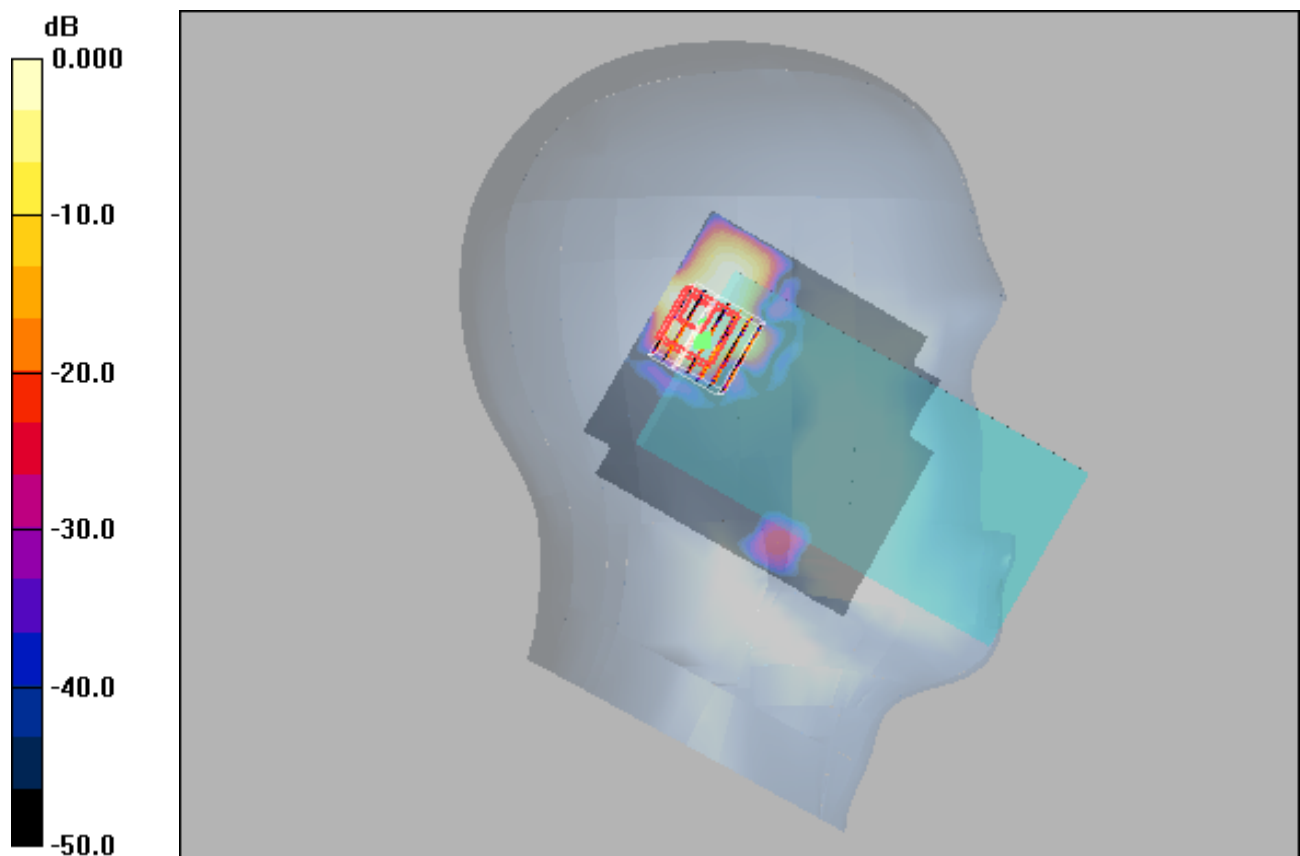

0 dB = 0.135mW/g

WIFI 5G_802.11n20_Right Cheek_140**DUT: EUT**

Communication System: 802.11n20; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5600 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.054 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.41 V/m; Power Drift = 0.185 dB

Peak SAR (extrapolated) = 0.170 W/kg

SAR(1 g) = 0.022 mW/g; SAR(10 g) = 0.00312 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

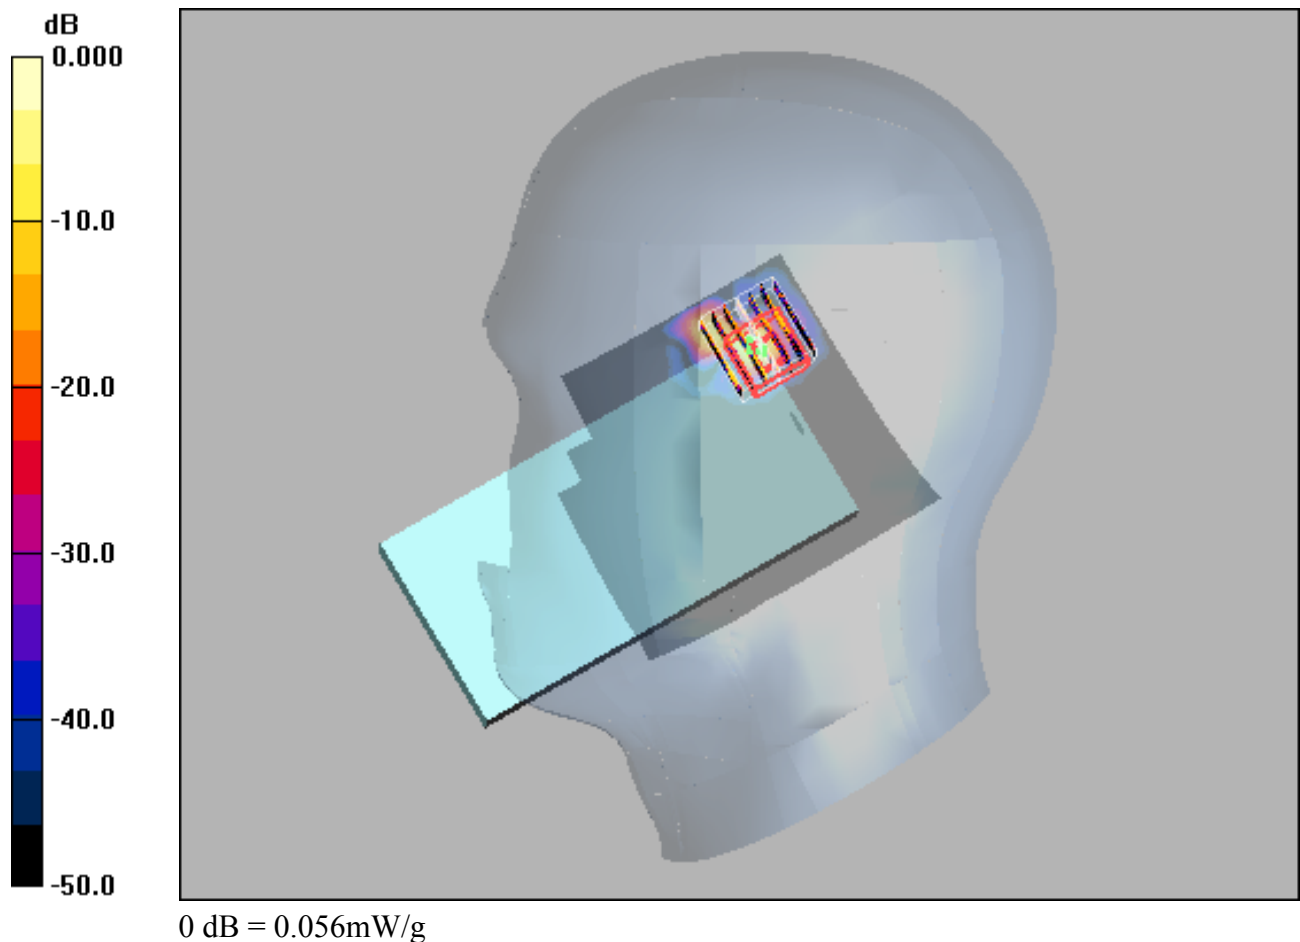

WIFI 5G_802.11a_Right Tilted_149**DUT: EUT**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.140 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.878 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.554 W/kg

SAR(1 g) = 0.087 mW/g; SAR(10 g) = 0.016 mW/g

Maximum value of SAR (measured) = 0.144 mW/g

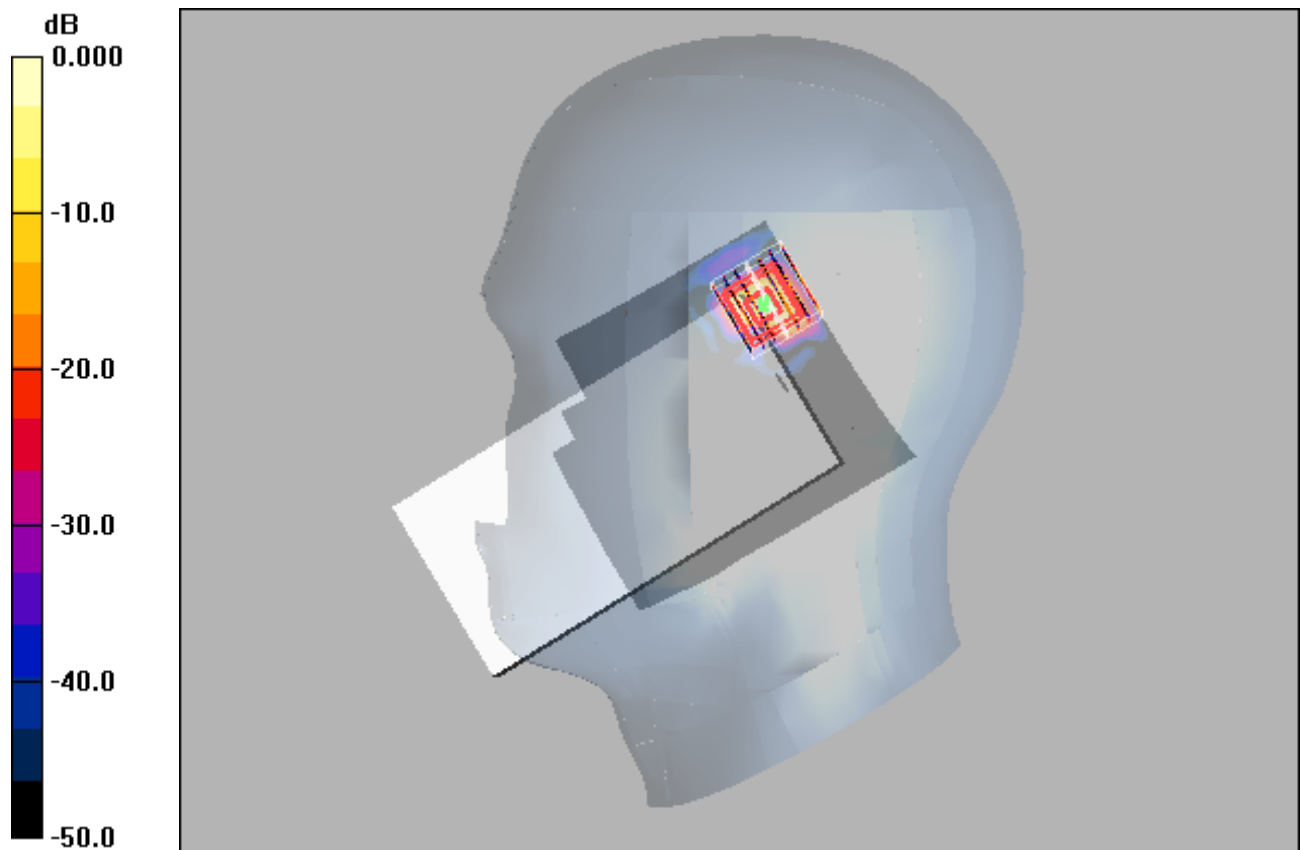

0 dB = 0.144mW/g

WIFI 5G_802.11a_Left Cheek_149**DUT: EUT**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.371 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.36 V/m; Power Drift = 0.039 dB

Peak SAR (extrapolated) = 0.550 W/kg

SAR(1 g) = 0.094 mW/g; SAR(10 g) = 0.035 mW/g

Maximum value of SAR (measured) = 0.148 mW/g

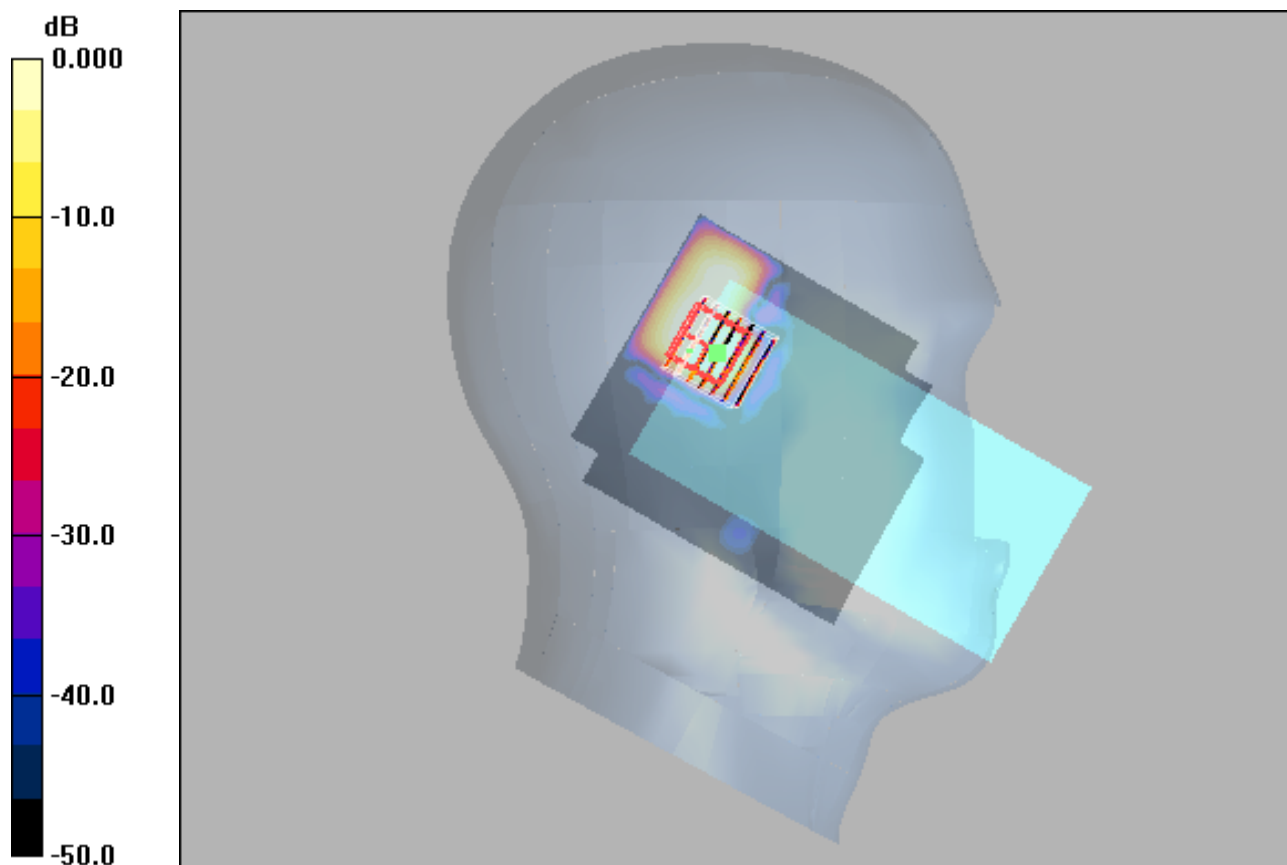

0 dB = 0.148mW/g

WIFI 5G_802.11n20_Right Cheek_149**DUT: EUT**

Communication System: 802.11n20; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.038 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.267 V/m; Power Drift = 0.133 dB

Peak SAR (extrapolated) = 0.166 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00221 mW/g

Maximum value of SAR (measured) = 0.054 mW/g

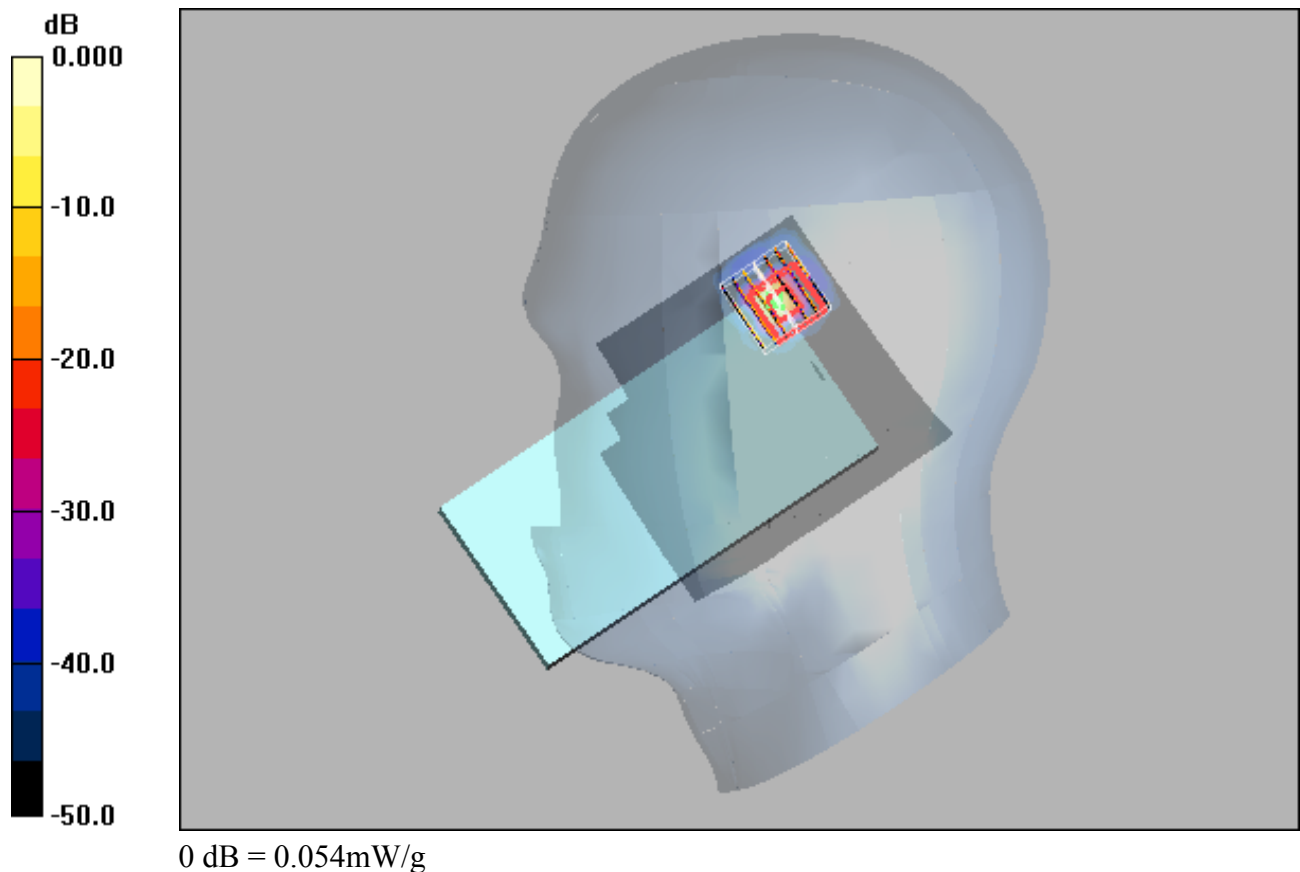

WIFI 2.4G_802.11b_Rear Face 10mm_13**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2472 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2472$ MHz; $\sigma = 1.84$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.196 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.369 W/kg

SAR(1 g) = 0.165 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.222 mW/g

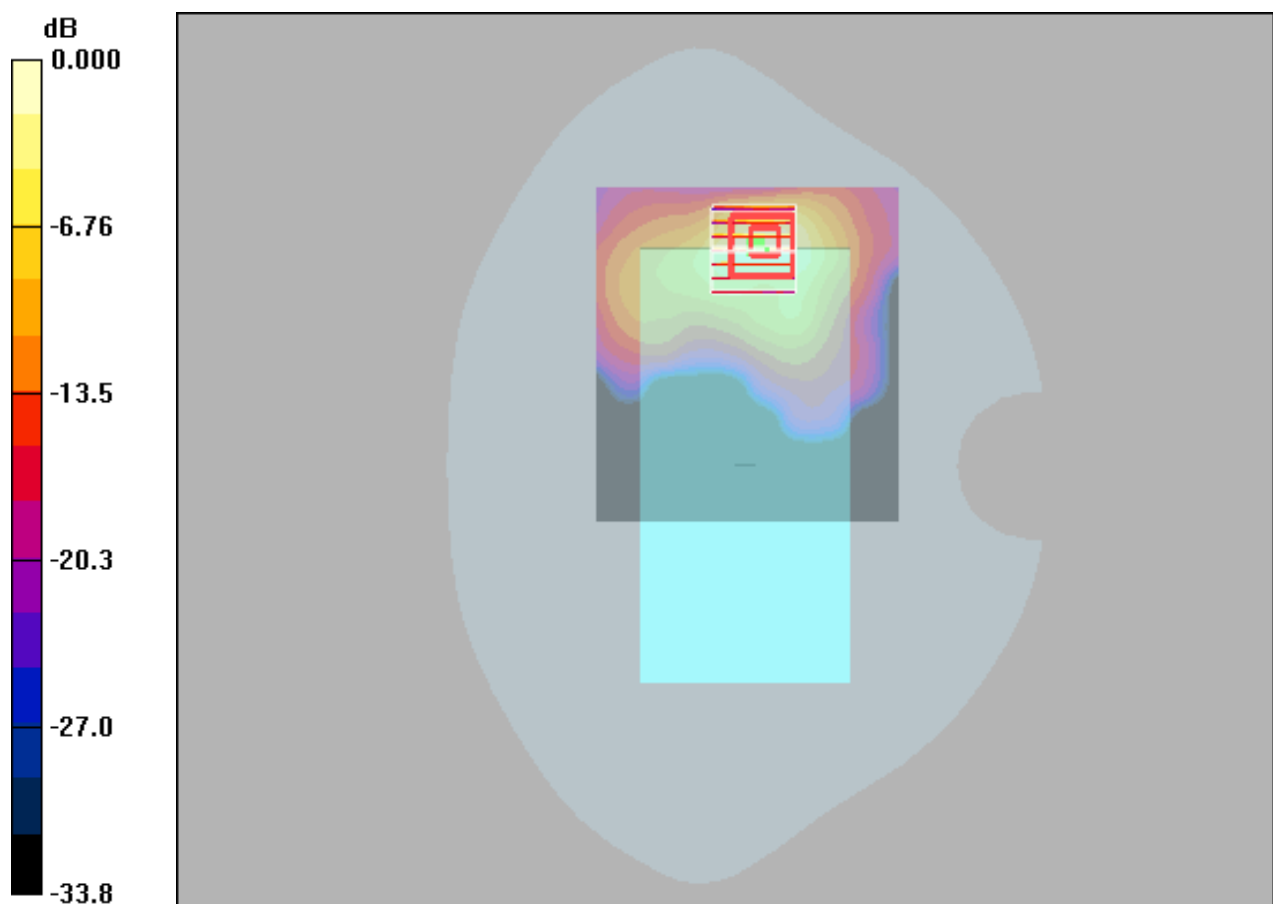

0 dB = 0.222mW/g

WIFI 2.4G_802.11b_Rear Face 10mm_12**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2467 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2467$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.271 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.45 V/m; Power Drift = 0.036 dB

Peak SAR (extrapolated) = 0.440 W/kg

SAR(1 g) = 0.210 mW/g; SAR(10 g) = 0.104 mW/g

Maximum value of SAR (measured) = 0.270 mW/g

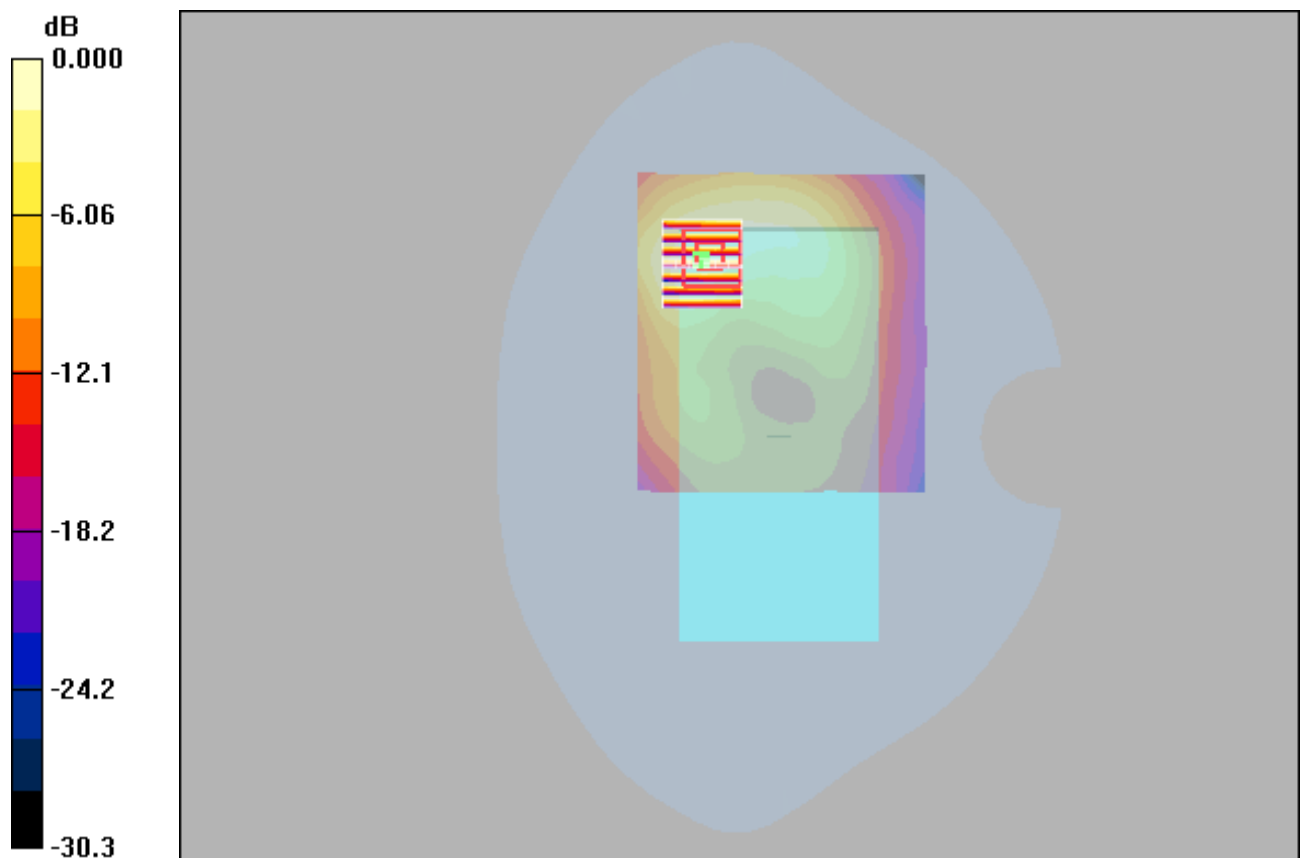

0 dB = 0.270mW/g

WIFI 2.4G_802.11n40_Rear Face 10mm_10**DUT: EUT**


Communication System: 802.11n (HT40); Frequency: 2457 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2457$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 39.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.142 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 1.89 V/m; Power Drift = 0.144 dB
Peak SAR (extrapolated) = 0.253 W/kg
SAR(1 g) = 0.121 mW/g; SAR(10 g) = 0.056 mW/g
Maximum value of SAR (measured) = 0.154 mW/g

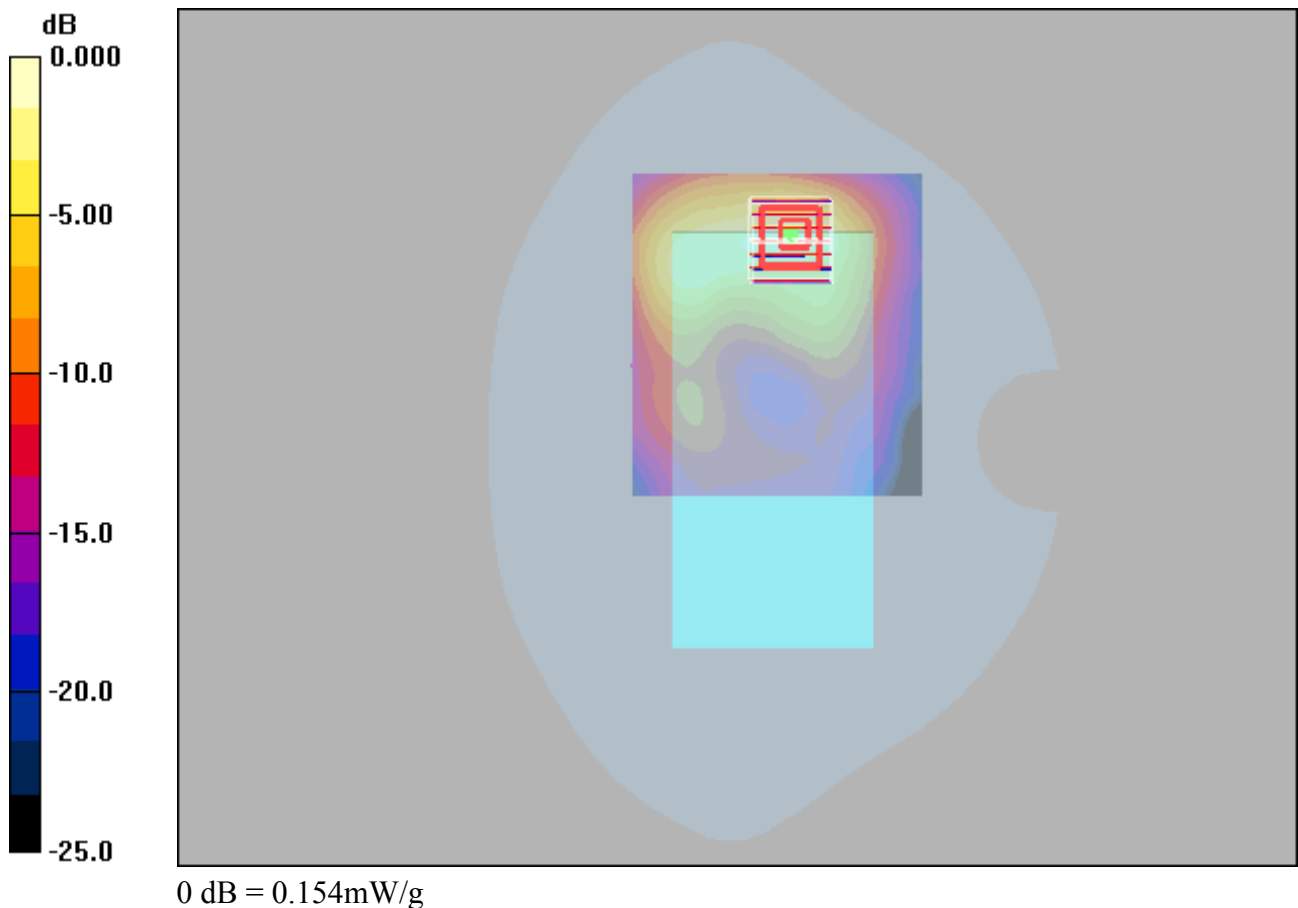

EDR_DH5_Rear Face_10MM_78**DUT: EUT**

Communication System: Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.85$ mho/m; $\epsilon_r = 39.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.57, 4.57, 4.57); Calibrated: 2022/4/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.024 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.039 W/kg

SAR(1 g) = 0.016 mW/g; SAR(10 g) = 0.00627 mW/g

Maximum value of SAR (measured) = 0.022 mW/g

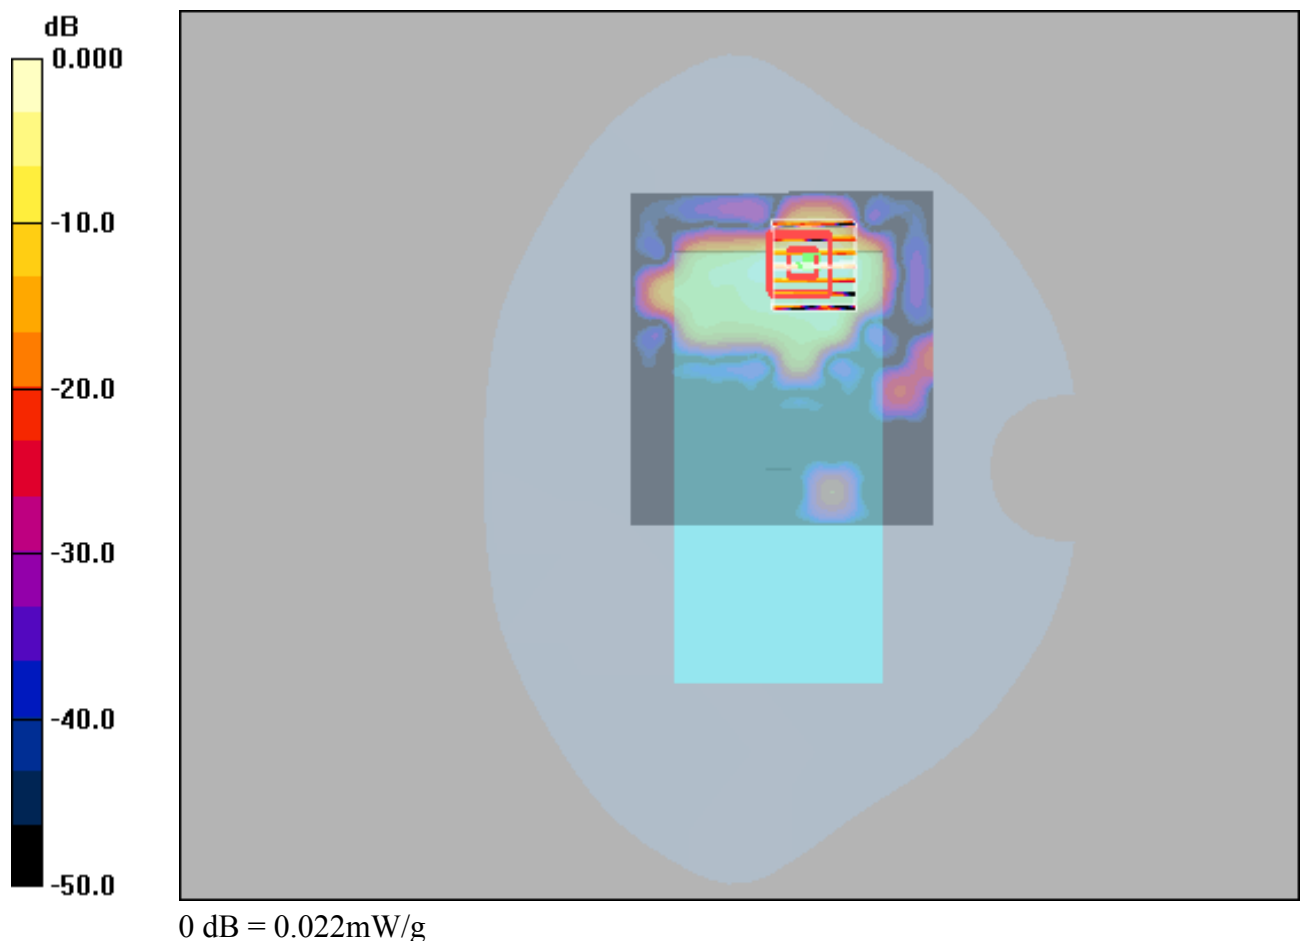

WIFI 5G_802.11a_Rear Face_10mm_44**DUT: EUT**

Communication System: 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.500 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.301 V/m; Power Drift = -0.100 dB

Peak SAR (extrapolated) = 0.916 W/kg

SAR(1 g) = 0.275 mW/g; SAR(10 g) = 0.078 mW/g

Maximum value of SAR (measured) = 0.460 mW/g

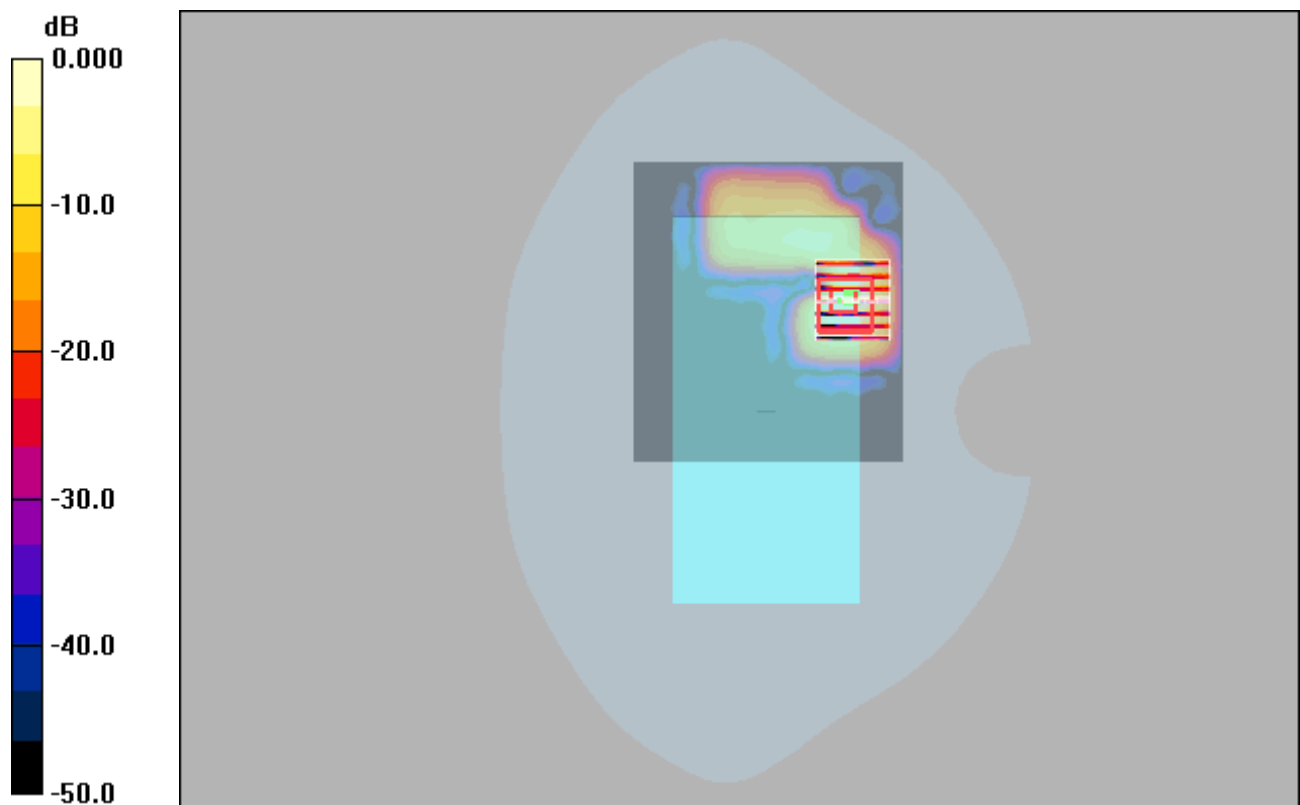

0 dB = 0.460mW/g

WIFI 5G_802.11a_Rear Face_10mm_48**DUT: EUT**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.748 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.607 V/m; Power Drift = 0.063 dB

Peak SAR (extrapolated) = 0.540 W/kg

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.052 mW/g

Maximum value of SAR (measured) = 0.292 mW/g

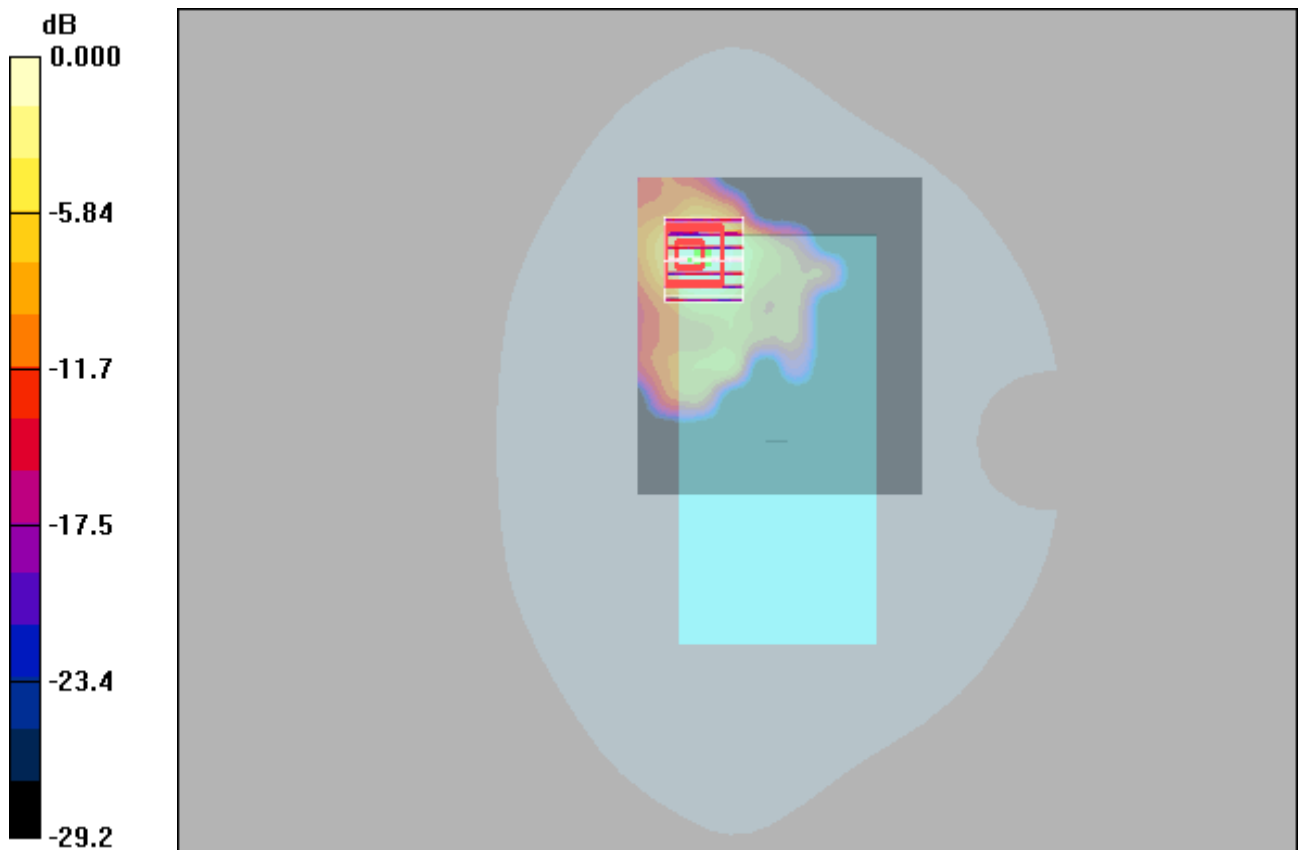

0 dB = 0.292mW/g

WIFI 5G_802.11a_Top Side_10mm_48**DUT: EUT**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.82$ mho/m; $\epsilon_r = 36.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.361 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.18 V/m; Power Drift = -0.092 dB

Peak SAR (extrapolated) = 0.645 W/kg

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.316 mW/g

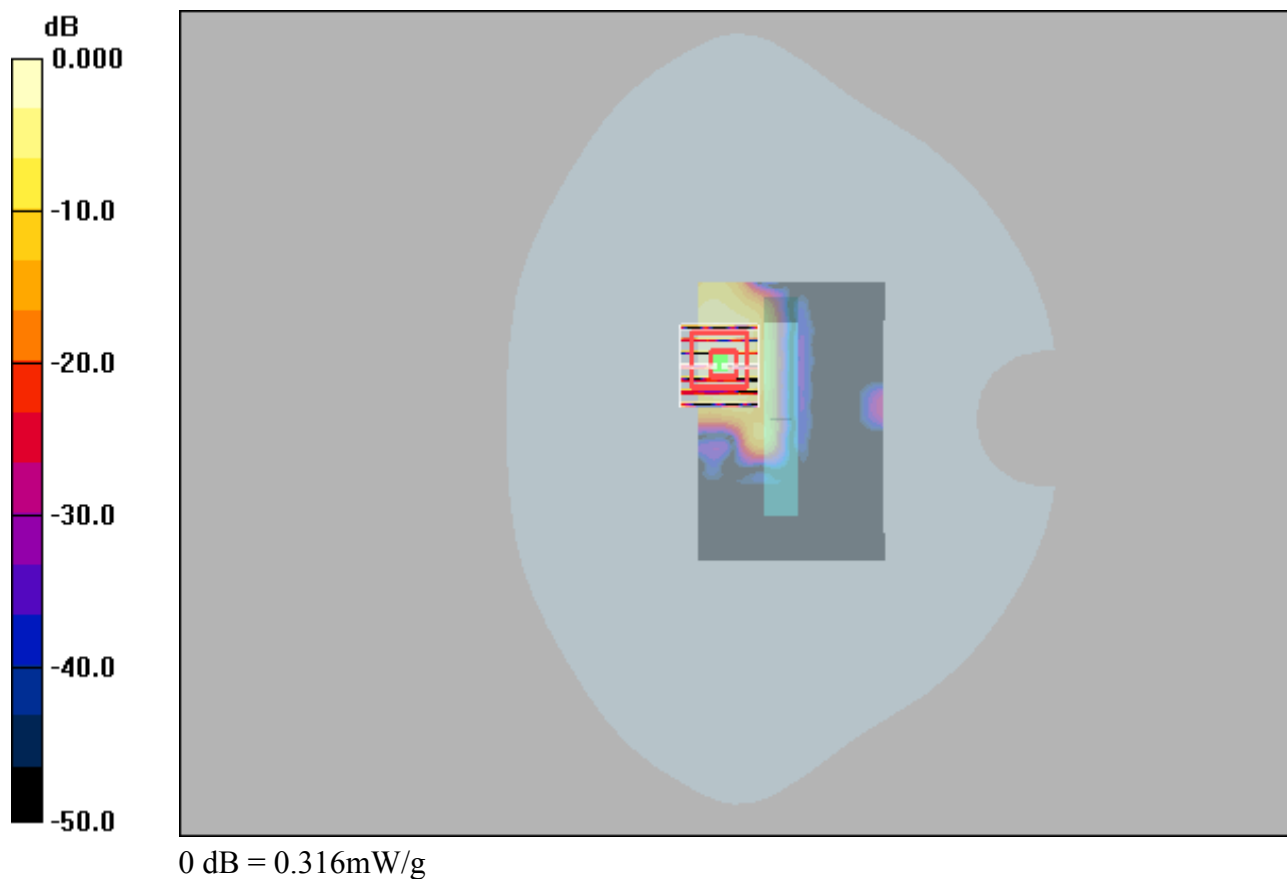

WIFI 5G_802.11n20_Rear Face_10mm_44**DUT: EUT**

Communication System: 802.11n20; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: H5250 Medium parameters used: $f = 5220$ MHz; $\sigma = 4.81$ mho/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.349 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.839 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.175 mW/g

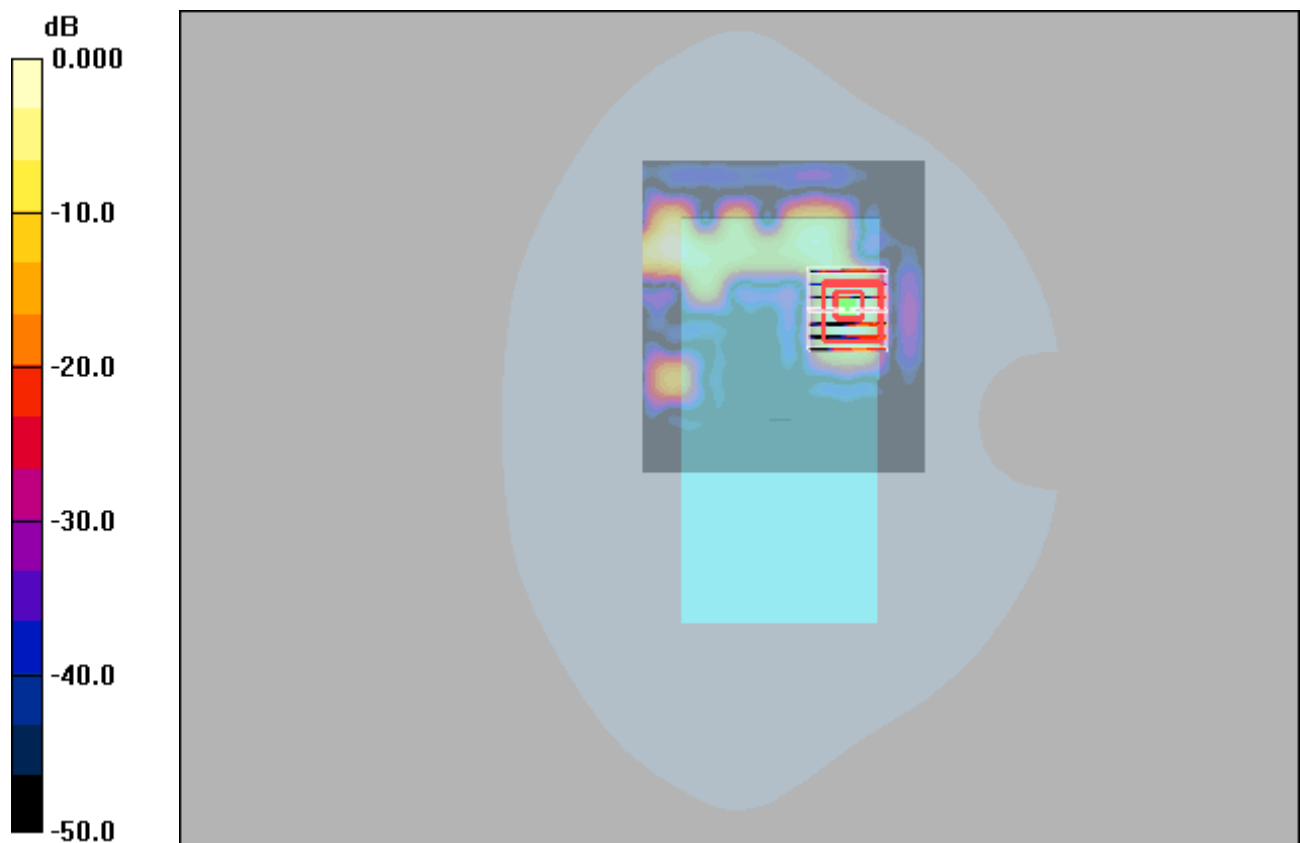

0 dB = 0.175mW/g

WIFI 5G_802.11a_Rear Face_10mm_60**DUT: EUT**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.352 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.34 V/m; Power Drift = -0.051 dB

Peak SAR (extrapolated) = 0.562 W/kg

SAR(1 g) = 0.173 mW/g; SAR(10 g) = 0.054 mW/g

Maximum value of SAR (measured) = 0.278 mW/g

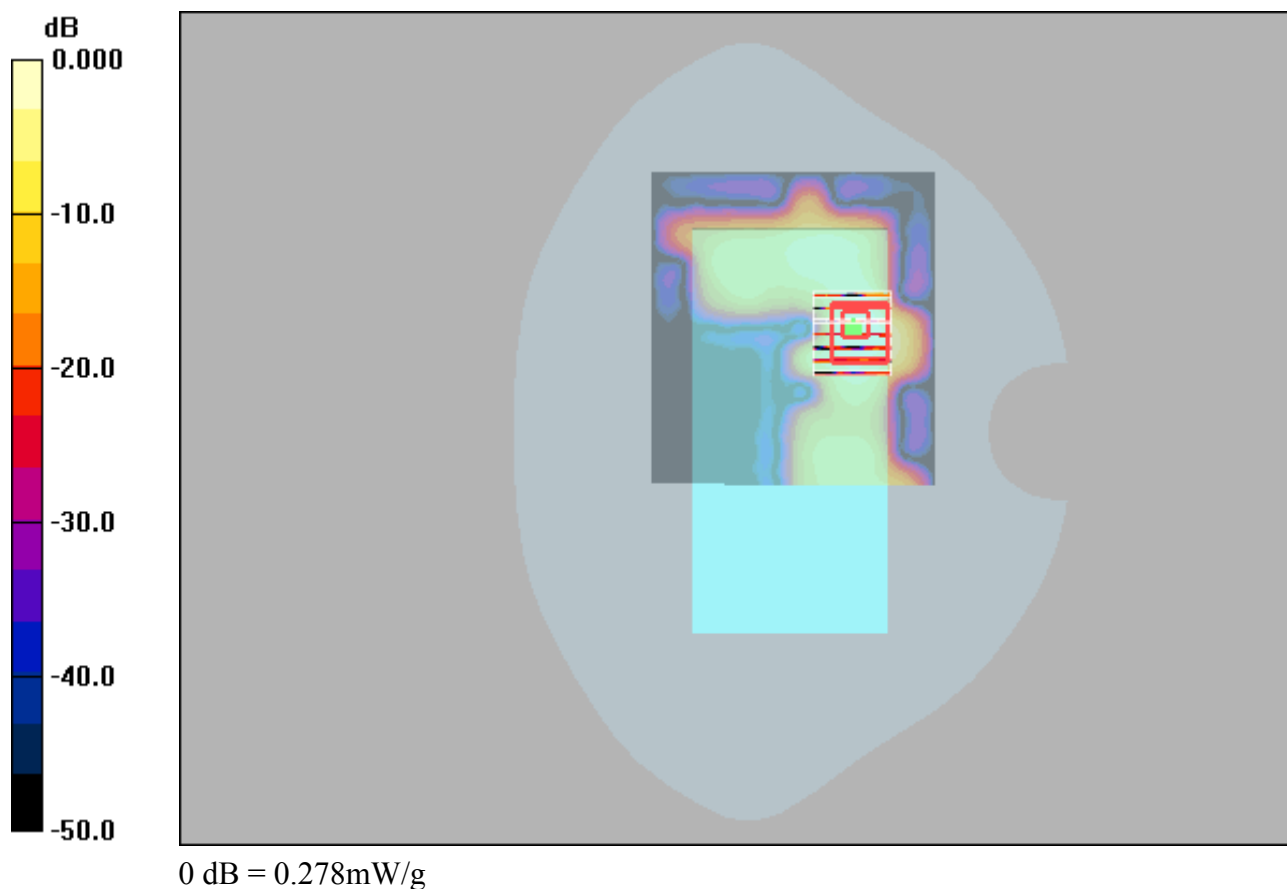

WIFI 5G_802.11a_Left Side_10mm_60**DUT: EUT**

Communication System: 802.11a; Frequency: 5300 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.304 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.53 V/m; Power Drift = -0.126 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.207 mW/g; SAR(10 g) = 0.074 mW/g

Maximum value of SAR (measured) = 0.319 mW/g

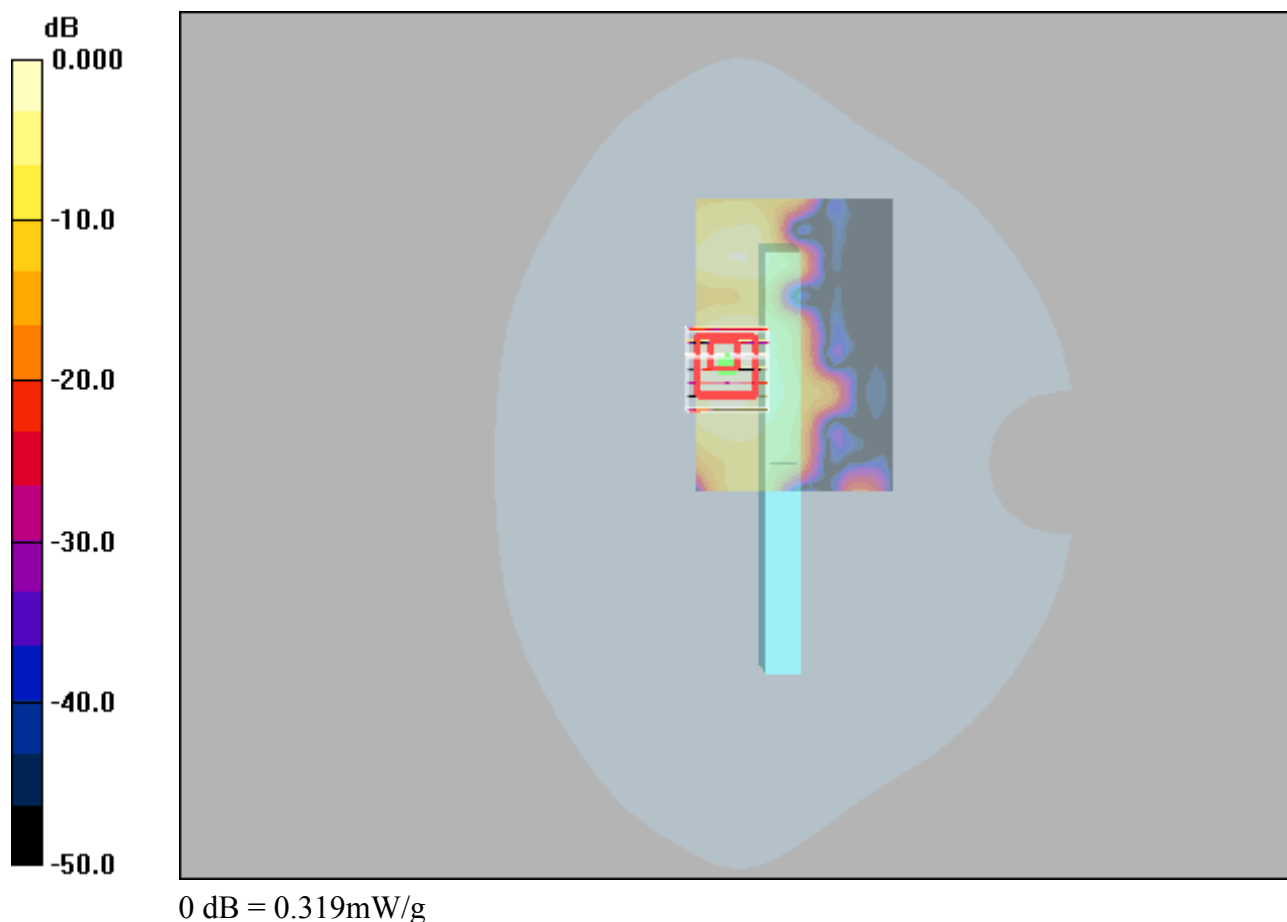

WIFI 5G_802.11a_Rear Face_10mm_64**DUT: EUT**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.230 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.47 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.601 W/kg

SAR(1 g) = 0.181 mW/g; SAR(10 g) = 0.051 mW/g

Maximum value of SAR (measured) = 0.297 mW/g

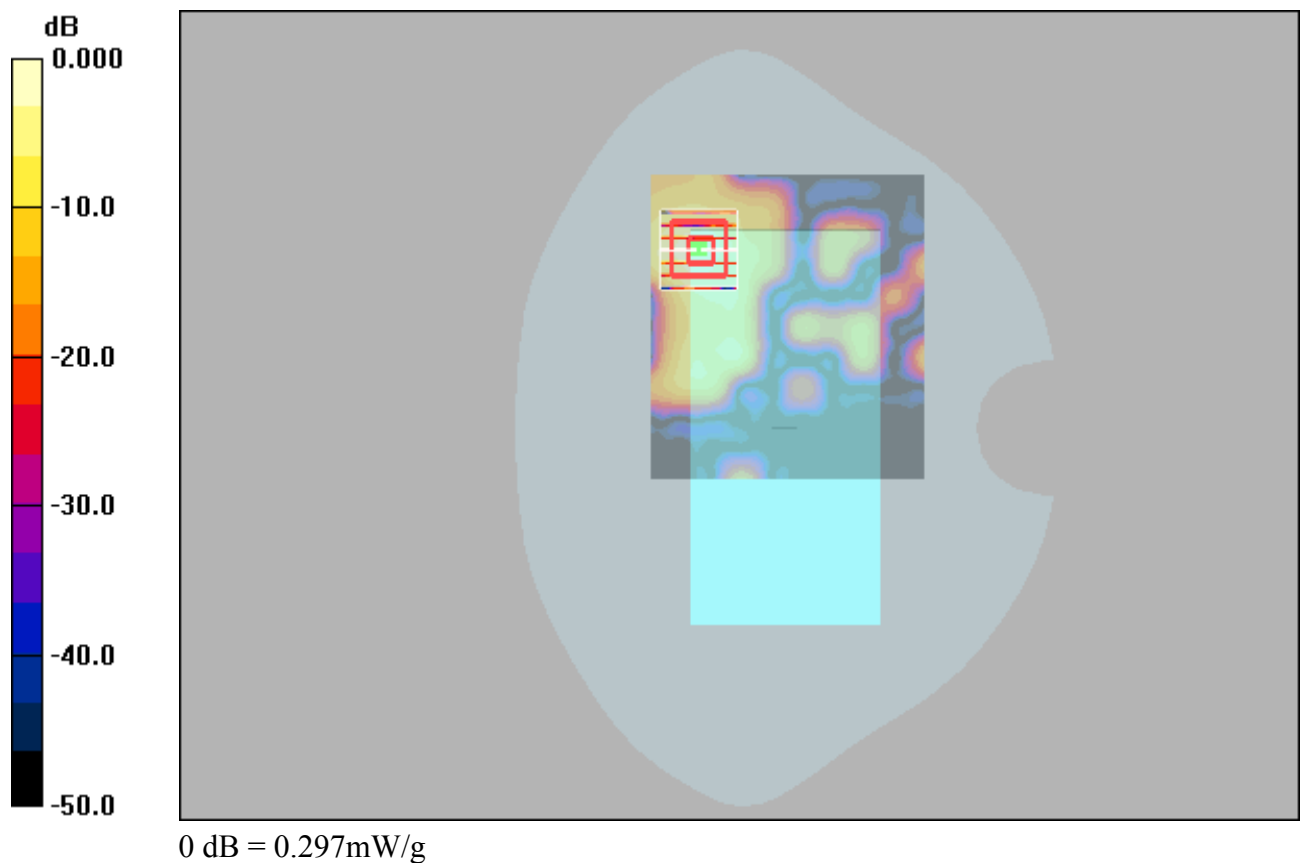

WIFI 5G_802.11a_Top Side_10mm_64**DUT: EUT**

Communication System: 802.11a; Frequency: 5320 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.92$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.437 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.24 V/m; Power Drift = -0.055 dB

Peak SAR (extrapolated) = 0.680 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.076 mW/g

Maximum value of SAR (measured) = 0.336 mW/g

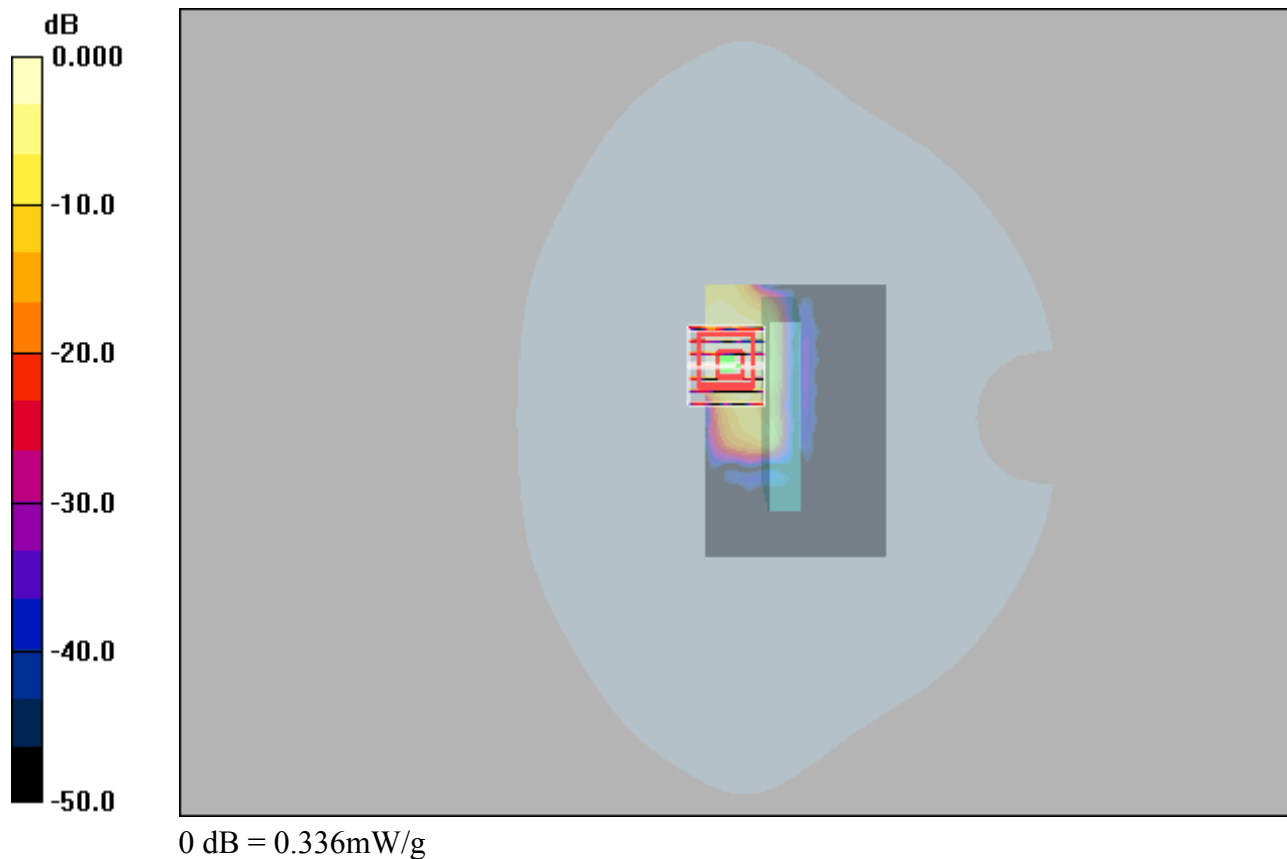

WIFI 5G_802.11n20_Left Side_10mm_60**DUT: EUT**

Communication System: 802.11n20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.259 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.97 V/m; Power Drift = 0.124 dB

Peak SAR (extrapolated) = 0.497 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.131 mW/g

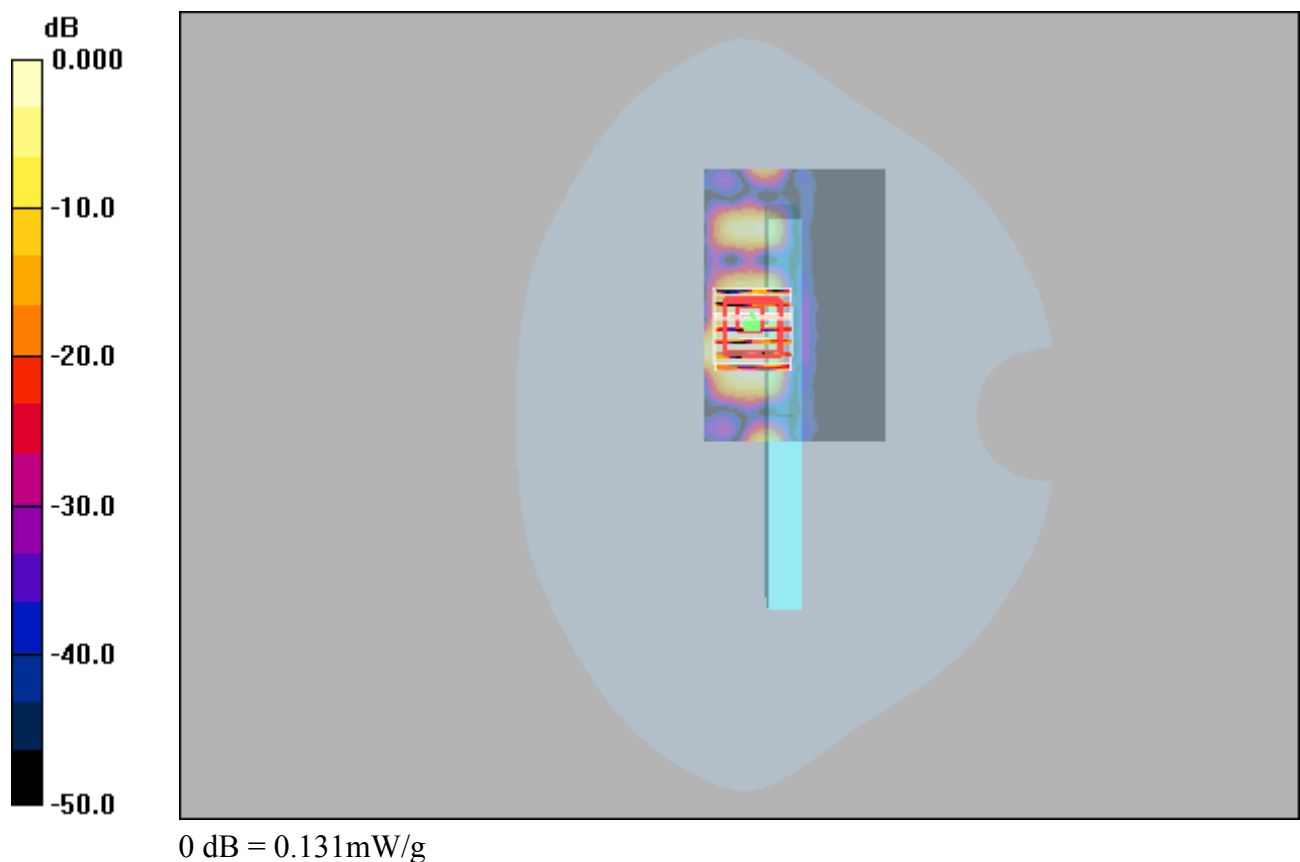

WIFI 5G_802.11n20_Rear Face_10mm_60**DUT: EUT**

Communication System: 802.11n20; Frequency: 5300 MHz; Duty Cycle: 1:1

Medium: H5250 Medium parameters used: $f = 5300$ MHz; $\sigma = 4.9$ mho/m; $\epsilon_r = 35.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(5.55, 5.55, 5.55); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.106 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.710 V/m; Power Drift = 0.059 dB

Peak SAR (extrapolated) = 0.401 W/kg

SAR(1 g) = 0.069 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.099 mW/g

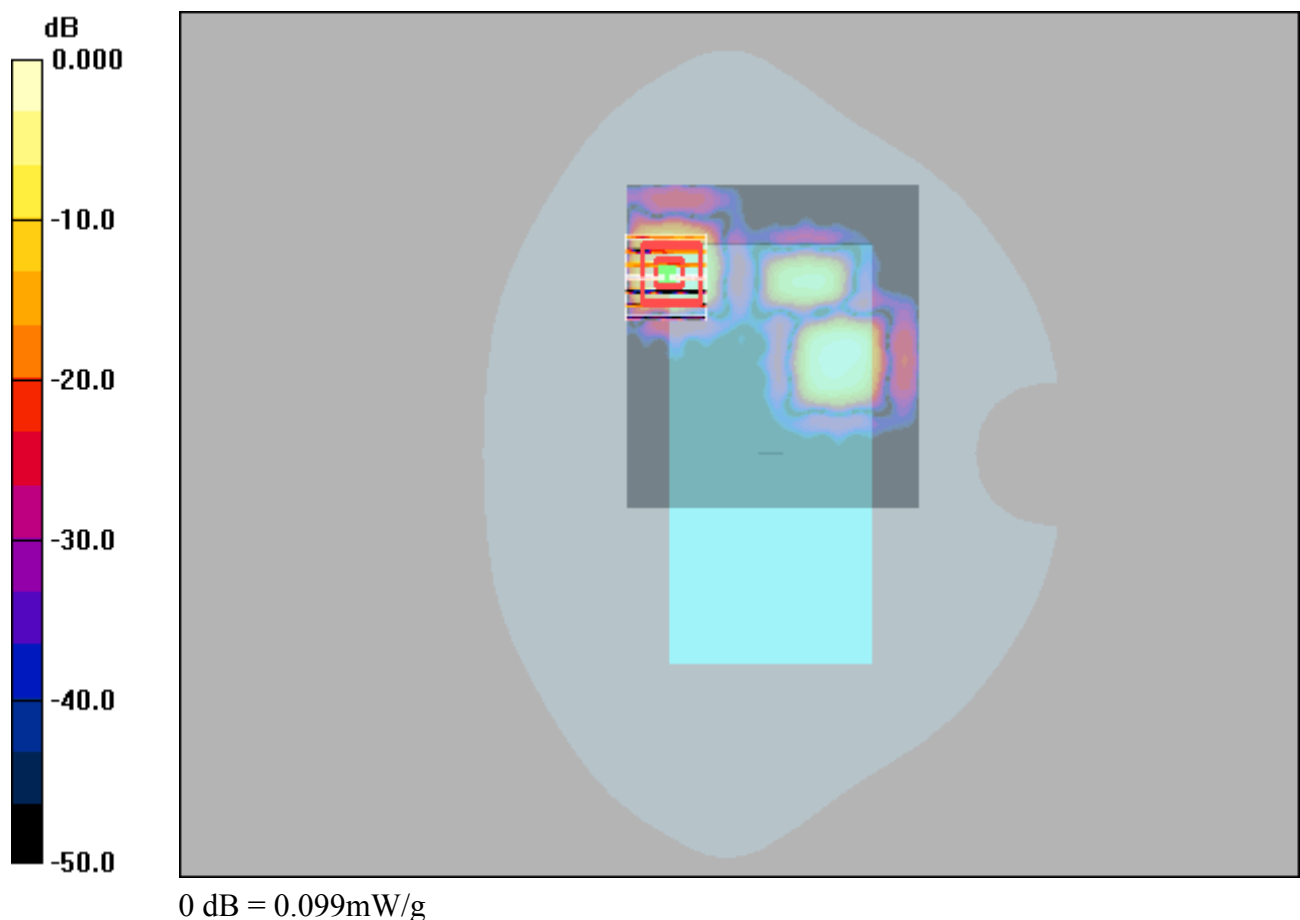

WIFI 5G_802.11a_Rear Face_10mm_140**DUT: EUT**

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.08

Medium: H5600 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.052 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.234 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.00927 mW/g

Maximum value of SAR (measured) = 0.056 mW/g

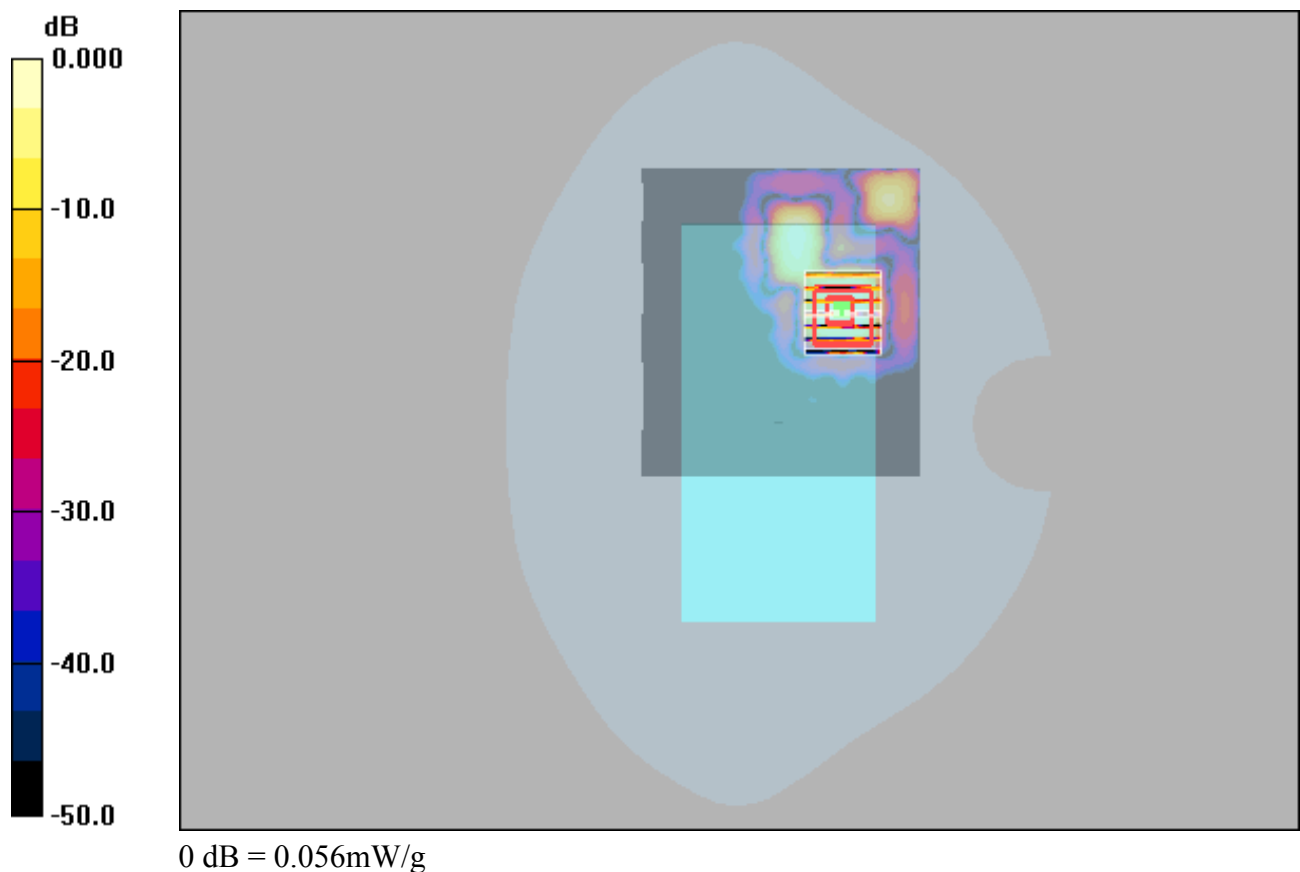

WIFI 5G_802.11a_Top Side_10mm_140**DUT: EUT**

Communication System: 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1.08

Medium: H5600 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.156 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.42 V/m; Power Drift = -0.049 dB

Peak SAR (extrapolated) = 0.354 W/kg

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.087 mW/g

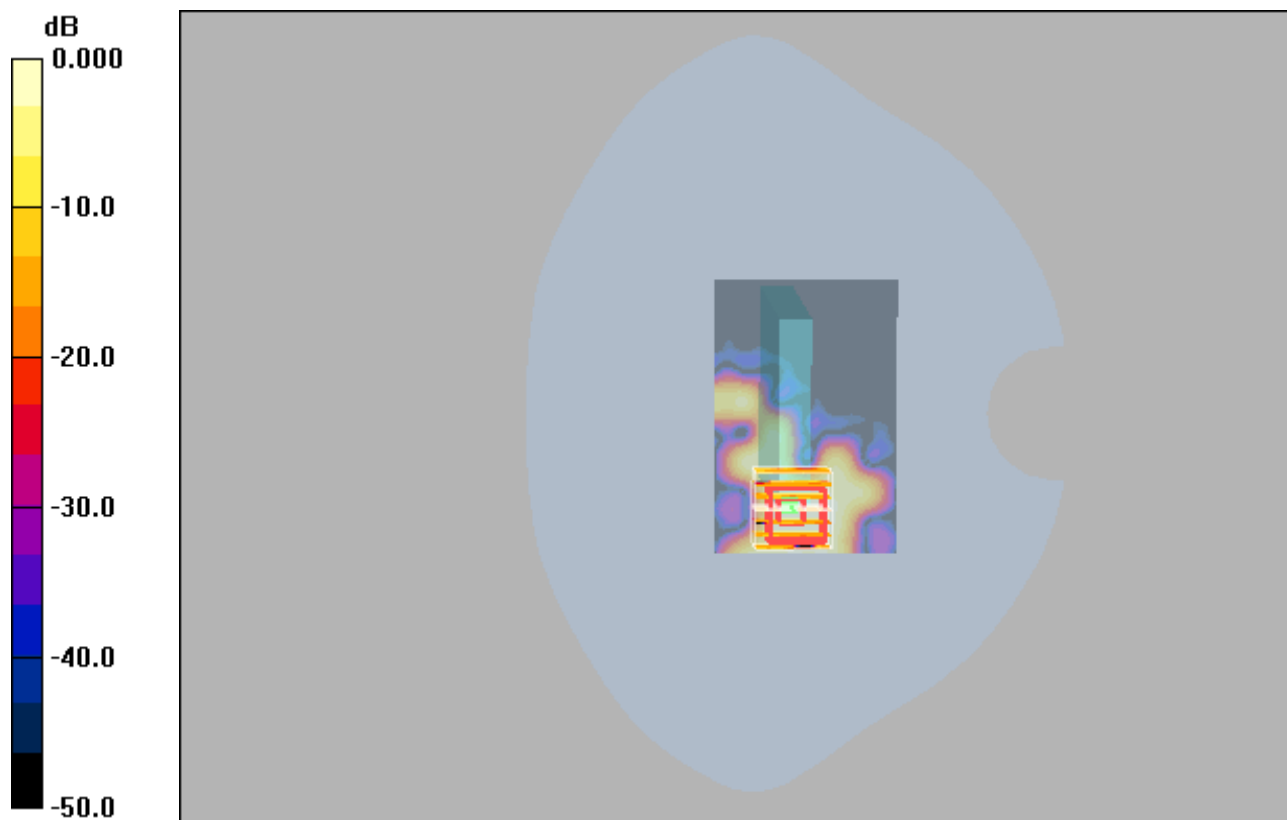

WIFI 5G_802.11a_Rear Face_10mm_100**DUT: EUT**

Communication System: 802.11a; Frequency: 5500 MHz; Duty Cycle: 1:1.08

Medium: H5600 Medium parameters used: $f = 5500$ MHz; $\sigma = 5.13$ mho/m; $\epsilon_r = 35.4$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.82, 4.82, 4.82); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.380 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.928 V/m; Power Drift = -0.133 dB

Peak SAR (extrapolated) = 0.693 W/kg

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.064 mW/g

Maximum value of SAR (measured) = 0.366 mW/g

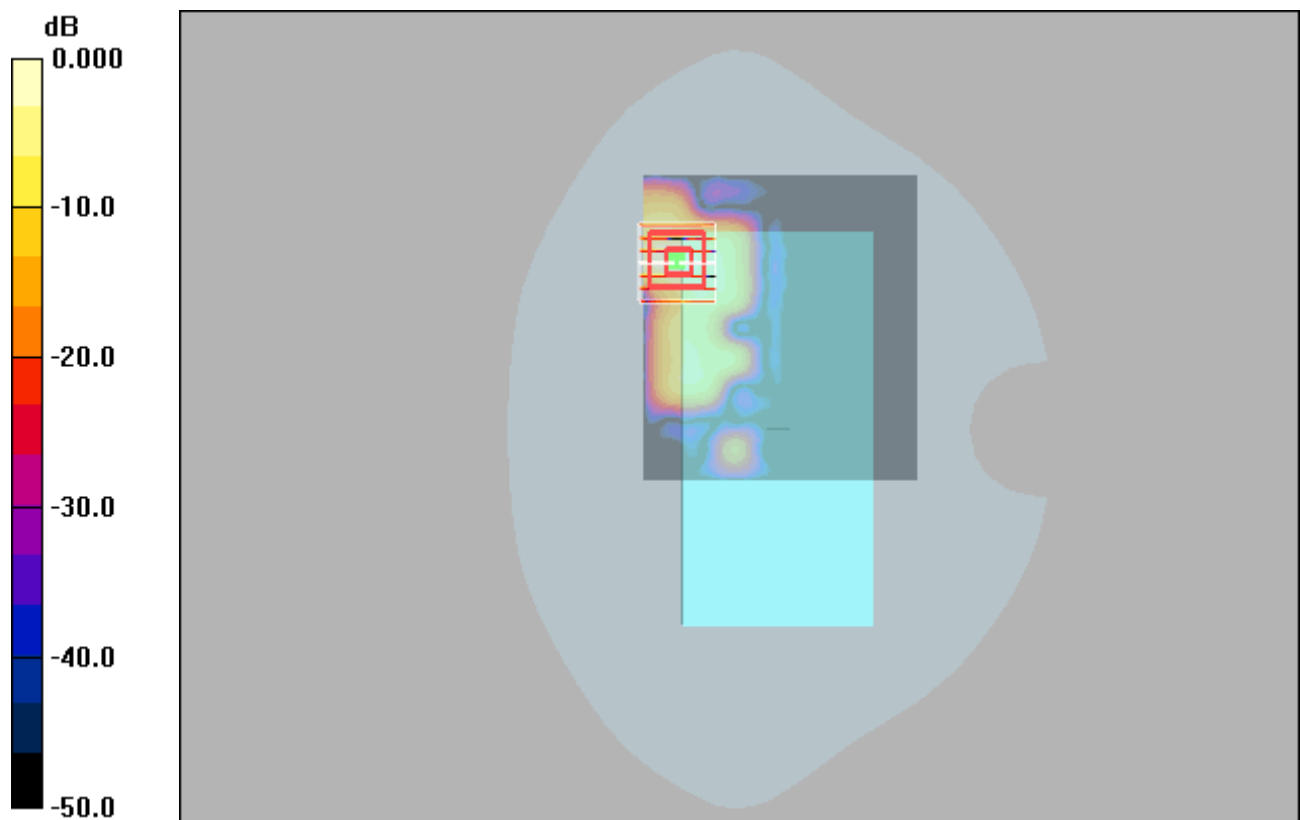

WIFI 5G_802.11n20_Left Side_10mm_140**DUT: EUT**

Communication System: 802.11n20; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5600 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.39$ mho/m; $\epsilon_r = 34.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.033 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.11 V/m; Power Drift = -0.022 dB

Peak SAR (extrapolated) = 0.149 W/kg

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00276 mW/g

Maximum value of SAR (measured) = 0.036 mW/g

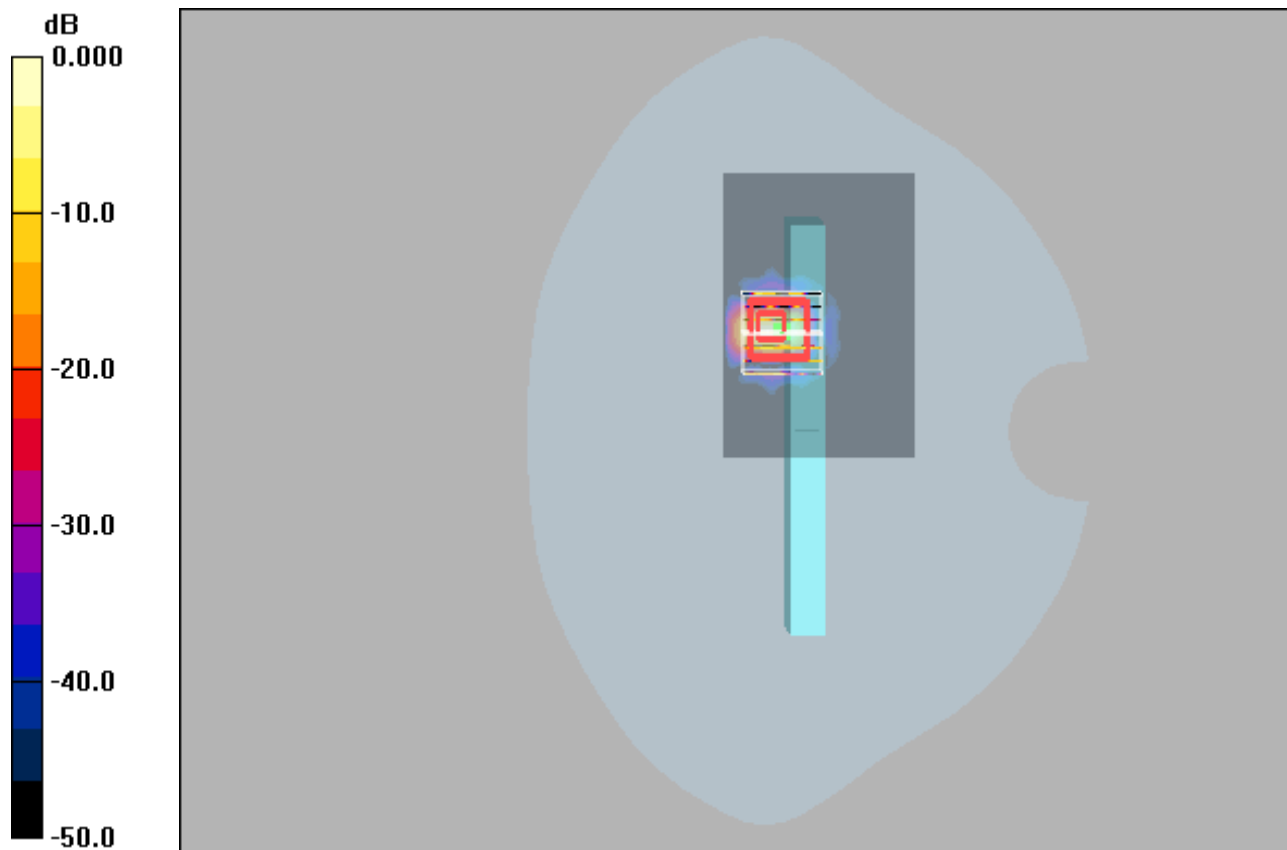

0 dB = 0.036mW/g

WIFI 5G_802.11a_Rear Face_10mm_149**DUT: EUT**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: H5250 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.073 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.010 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.043 mW/g; SAR(10 g) = 0.0075 mW/g

Maximum value of SAR (measured) = 0.060 mW/g

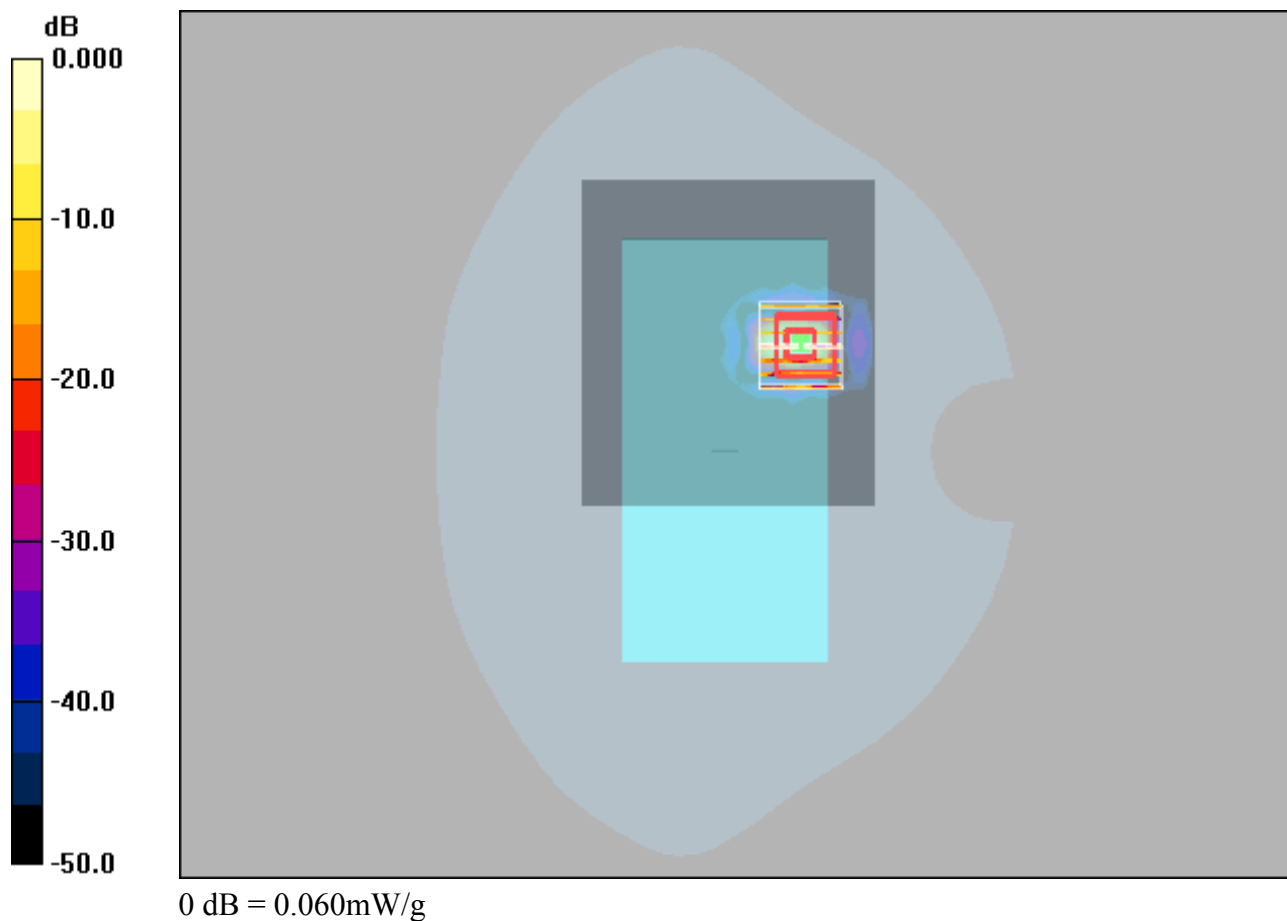

WIFI 5G_802.11a_Left Side_10mm_149**DUT: EUT**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x91x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.117 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.19 V/m; Power Drift = 0.048 dB

Peak SAR (extrapolated) = 0.307 W/kg

SAR(1 g) = 0.057 mW/g; SAR(10 g) = 0.018 mW/g

Maximum value of SAR (measured) = 0.073 mW/g

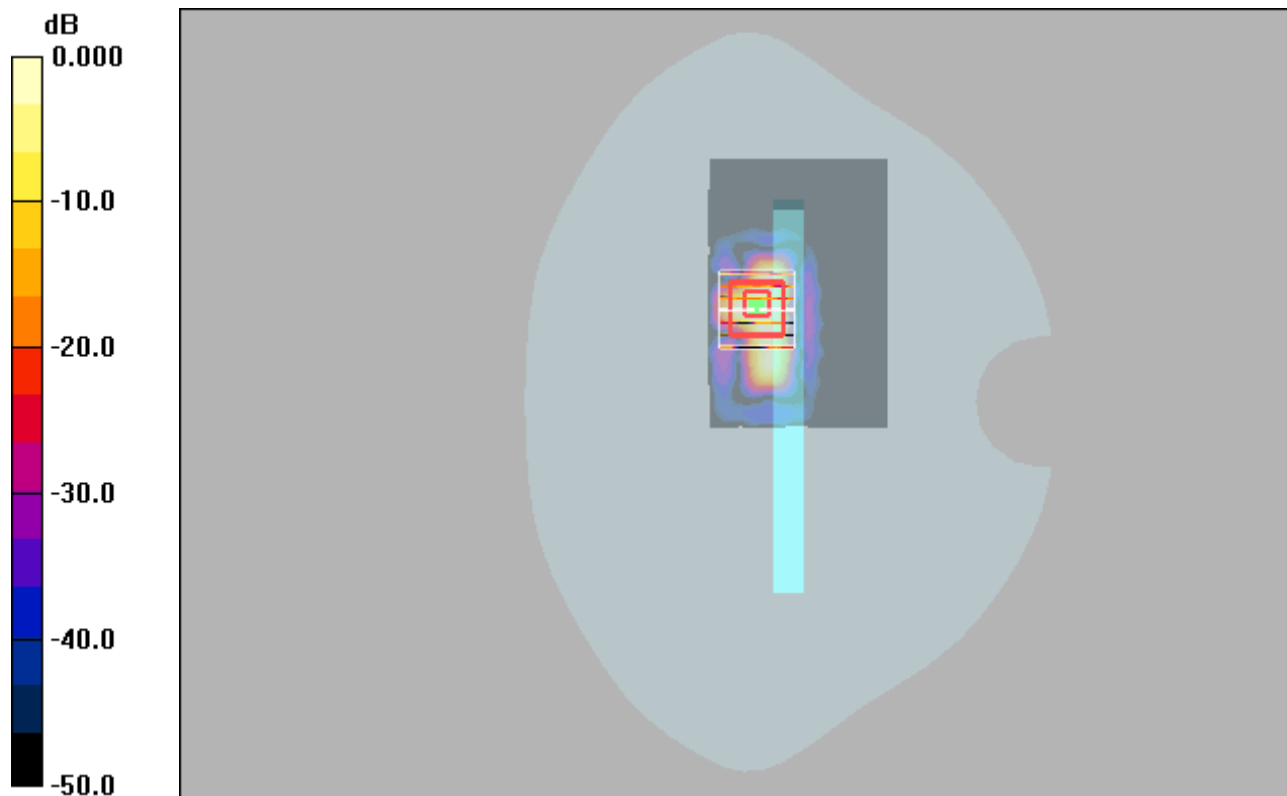

0 dB = 0.073mW/g

WIFI 5G_802.11a_Rear Face_10mm_149**DUT: EUT**

Communication System: 802.11a; Frequency: 5745 MHz; Duty Cycle: 1:1.08

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.420 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.765 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 0.779 W/kg

SAR(1 g) = 0.235 mW/g; SAR(10 g) = 0.067 mW/g

Maximum value of SAR (measured) = 0.384 mW/g

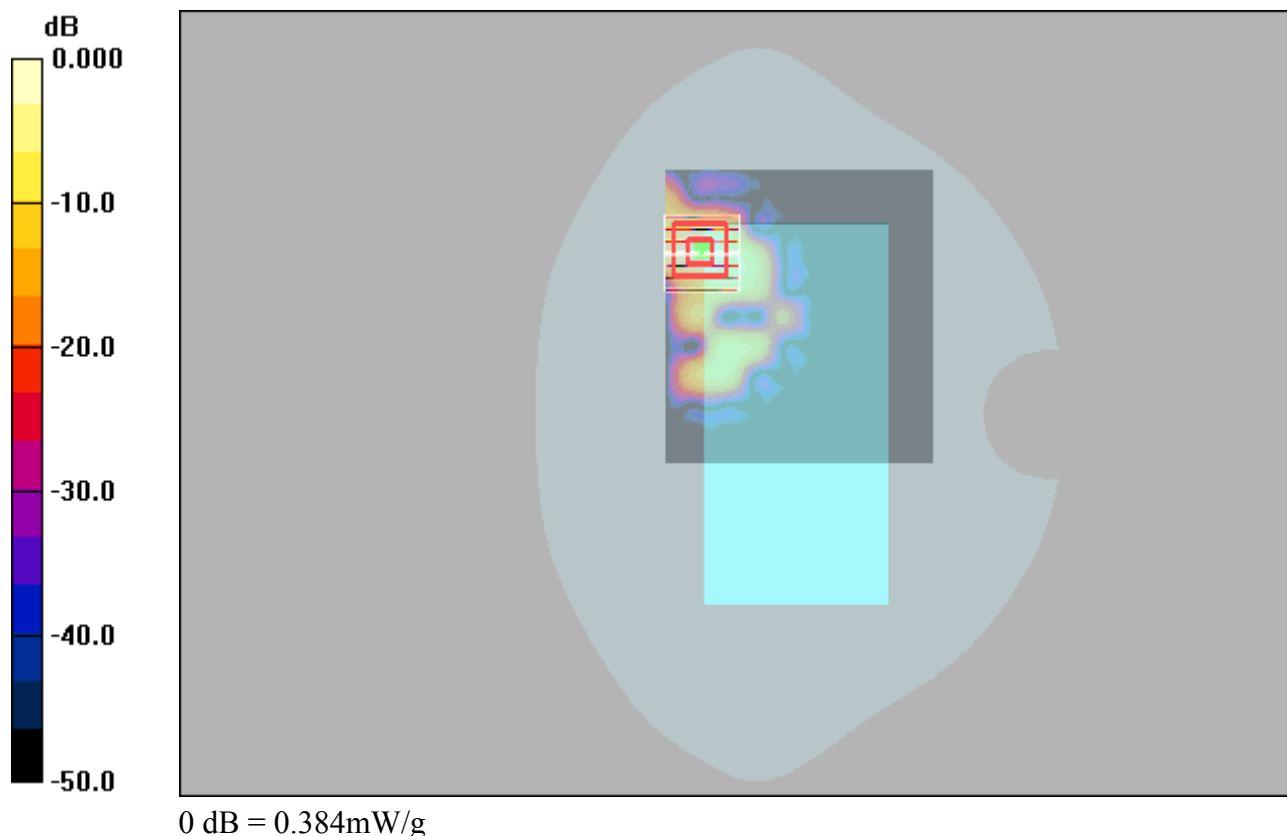

WIFI 5G_802.11n20_Front Face_10mm_149**DUT: EUT**

Communication System: 802.11n20; Frequency: 5745 MHz; Duty Cycle: 1:1

Medium: H5800 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 34.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN3818; ConvF(4.92, 4.92, 4.92); Calibrated: 2022/8/6
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2022/3/24
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x101x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.005 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.000 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.014 W/kg

SAR(1 g) = 0.000245 mW/g; SAR(10 g) = 2.46e-005 mW/g

Maximum value of SAR (measured) = 0.009 mW/g

