

FCC TEST REPORT

For

BLUEBIRD INC.

LTE Phone

Test Model: SF550

Prepared for : BLUEBIRD INC.
Address : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu,
Seoul, South Korea

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd.
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : December 16, 2015
Number of tested samples : 1
Sample number : 15121446
Date of Test : January 04, 2016 - January 10, 2016
Date of Report : January 14, 2016

FCC TEST REPORT**FCC CFR 47 PART 15 E(15.407): 2015****Report Reference No.** : **LCS1512161385E**

Date of Issue : January 14, 2016

Testing Laboratory Name : **Shenzhen LCS Compliance Testing Laboratory Ltd.**

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name** : **BLUEBIRD INC.**

Address : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul, South Korea

Test Specification

Standard : FCC CFR 47 PART 15 E(15.407): 2015 / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description : **LTE Phone**

Trade Mark : Bluebird


Test Model : SF550

Ratings : DC 3.8V by lithium polymer battery(2600mAh)
Recharge Voltage: DC 5V/2AResult : **Positive****Compiled by:**

Leo Lee/ File administrators

Supervised by:

Glin Lu/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1512161385E	<u>January 14, 2016</u> Date of issue
---	--

Test Model..... : SF550

EUT..... : LTE Phone

Applicant..... : BLUEBIRD INC.

Address..... : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul, South Korea

Telephone..... : /

Fax..... : /

Manufacturer..... : BLUEBIRD INC.

Address..... : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul, South Korea

Telephone..... : /

Fax..... : /

Factory..... : BLUEBIRD INC.

Address..... : (Dogok-dong, SEI Tower 13,14) 39, Eonjuro30-gil, Gangnam-gu, Seoul, South Korea

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....	5
1.1. DESCRIPTION OF DEVICE (EUT).....	5
1.2. SUPPORT EQUIPMENT LIST	6
1.3. EXTERNAL I/O.....	6
1.4. DESCRIPTION OF TEST FACILITY	6
1.5. LIST OF MEASURING EQUIPMENT	7
1.6. STATEMENT OF THE MEASUREMENT UNCERTAINTY	8
1.7. MEASUREMENT UNCERTAINTY	8
1.8. DESCRIPTION OF TEST MODES	8
2. TEST METHODOLOGY	10
2.1. EUT CONFIGURATION.....	10
2.2. EUT EXERCISE.....	10
2.3. GENERAL TEST PROCEDURES.....	10
3. SYSTEM TEST CONFIGURATION	11
3.1. JUSTIFICATION.....	11
3.2. EUT EXERCISE SOFTWARE.....	11
3.3. SPECIAL ACCESSORIES	11
3.4. BLOCK DIAGRAM/SCHEMATICS.....	11
3.5. EQUIPMENT MODIFICATIONS.....	11
3.6. TEST SETUP	11
4. SUMMARY OF TEST RESULTS	12
5. TEST RESULT	13
5.1. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	13
5.2. POWER SPECTRAL DENSITY MEASUREMENT	15
5.3. 6dB & 26dB BANDWIDTH MEASUREMENT	25
5.4. RADIATED EMISSIONS MEASUREMENT.....	36
5.5. POWER LINE CONDUCTED EMISSIONS.....	55
5.6. ANTENNA REQUIREMENTS	57

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: LTE Phone
Test Model	: SF550
Hardware Version	: P1
Software Version	: B20151124_R0.07
Power Supply	: DC 3.8V by lithium polymer battery(2600mAh) Recharge Voltage: DC 5V/2A
EUT Supports	: GSM/GPRS/EGPRS/WCDMA/HSDPA/HSUPA/LTE/
Radios Application	2.4GHz WIFI/5GHz WIFI/Bluetooth/GPS(RX Only)
WIFI(5GHz Band)	:
Operating Frequency	: 5180.00-5240.00MHz / 5745.00-5825.00MHz
Channel Number	: 9 Channel for 20MHz Bandwidth (802.11a/n(HT20)) 4 channels for 40MHz Bandwidth (802.11a/n(HT40))
Modulation Type	: 802.11a/n: OFDM
Antenna Description	: PIFA Antenna, 0.8dBi(Max.) For 5GHz Band

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
KUANTECH CO LTD	AC ADAPTOR	KSA29B05002 00D5	/	VOC

1.3. External I/O

I/O Port Description	Quantity	Cable
Earphone Jack	1	N/A
USB Port	1	1.0m, unshielded

1.4. Description of Test Facility

CNAS Registration Number. is L4595.

FCC Registration Number. is 899208.

Industry Canada Registration Number. is 9642A-1.

VCCI Registration Number. is C-4260 and R-3804.

ESMD Registration Number. is ARCB0108.

UL Registration Number. is 100571-492.

TUV SUD Registration Number. is SCN1081.

TUV RH Registration Number. is UA 50296516-001

There is one 3m semi-anechoic chamber and one line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4:2014, CISPR 22/EN 55022 and CISPR16-4-1 SVSWR requirements.

1.5. List Of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2015	June 17,2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2015	June 17,2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2015	June 17,2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2015	June 17,2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2015	June 17,2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2015	June 17,2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2015	June 17,2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2015	July 15,2016
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2015	June 17,2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2015	June 09,2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2015	June 09,2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2015	June 09,2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2015	June 17,2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2015	June 17,2016
Spectrum Meter	R&S	FSP 30	100023	9kHz-30GHz	July 16,2015	July 15,2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2015	June 17,2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2015	June 17,2016
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2015	June 17,2016

Note: All equipment through GRGT EST calibration

1.6. Statement of The Measurement Uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	3.80dB	(1)
	26.5GHz~40GHz	3.90dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description Of Test Modes

The EUT has been tested under operating condition.

The EUT was set to transmit at 100% duty cycle. This test was performed with EUT in X, Y, Z position and the worse case was found when EUT in Y position.

For pre-testing, when performed power line conducted emission measurement, the input Voltage/Frequency AC 120V/60Hz and AC 240V/60Hz were used. Only recorded the worst case in this report.

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was determined to be 802.11a mode (Low Channel, 5180-5240MHz Band).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was determined to be 802.11a mode(Low Channel, 5180-5240MHz Band).

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11a Mode: 6 Mbps, OFDM.

802.11n(HT20) Mode: MCS0, OFDM.

802.11n(HT40) Mode: MCS0, OFDM.

Support Bandwidth For 5G WIFI Part:

Bandwidth Mode	20MHz	40MHz	80MHz
802.11a	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.11n(HT20)	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
802.11n(HT40)	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Channel & Frequency:

Frequency Band	Channel No.	Frequency(MHz)	Channel No.	Frequency(MHz)
	36	5180	44	5220
5180~5240MHz	38	5190	46	5230
	40	5200	48	5240

For 802.11a/n(HT20), Channel 36, 40 and 48 were tested.

For 802.11n(HT40), Channel 38 and 46 were tested.

5745~5825MHz	149	5745	159	5795
	151	5755	161	5805
	153	5765	165	5825
	157	5785	/	/

For 802.11a/n(HT20), Channel 149, 157 and 165 were tested.

For 802.11n(HT40), Channel 151 and 159 were tested.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to FCC's request, Test Procedure 789033 D02 General UNII Test Procedures New Rules v01 is required to be used for this kind of FCC 15.407 UII device.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.407 under the FCC Rules Part 15 Subpart E

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. SYSTEM TEST CONFIGURATION

3.1. Justification

The system was configured for testing in a continuous transmits condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

Applied Standard: FCC Part 15 Subpart E		
FCC Rules	Description of Test	Result
§15.407(a)	Maximum Conducted Output Power	Compliant
§15.407(a)	Power Spectral Density	Compliant
§15.407(e)	6dB & 26dB Bandwidth	Compliant
§15.205, §15.407(b)	Radiated Spurious Emissions and Band Edge	Compliant
§15.407(g)	Frequency Stability	N/A
§15.407(h)	Transmit Power Control (TPC)	N/A
§15.207(a)	Line Conducted Emissions	Compliant
§15.203	Antenna Requirements	Compliant

Note: The customer declared frequency stability is better than 20ppm which ensures that the signal remains in the allocated bands under all operational conditions stated in the user manual.

5. TEST RESULT

5.1. Maximum Conducted Output Power Measurement

5.1.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

5.1.2. Test Procedures

The transmitter output (antenna port) was connected to the power meter.

5.1.3. Test Setup Layout

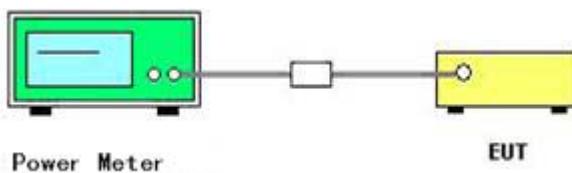

5.1.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.1.5. Test Result of Maximum Conducted Output Power

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	802.11a/n

Maximum Conducted Output Power Measurement Result for 5180~5240MHz Band

Mode	Channel	Frequency (MHz)	Conducted Power (dBm, Average)	Max. Limit (dBm)	Result
802.11a	36	5180	15.81	24	Complies
	40	5200	15.05	24	Complies
	48	5240	14.97	24	Complies
802.11n(HT20)	36	5180	14.66	24	Complies
	40	5200	14.53	24	Complies
	48	5240	14.56	24	Complies
802.11n(HT40)	38	5190	14.89	24	Complies
	46	5230	14.55	24	Complies

Maximum Conducted Output Power Measurement Result for 5745~5825MHz Band

Mode	Channel	Frequency (MHz)	Conducted Power (dBm, Average)	Max. Limit (dBm)	Result
802.11a	149	5745	12.11	30	Complies
	157	5785	12.43	30	Complies
	165	5825	13.78	30	Complies
802.11n(HT20)	149	5745	12.33	30	Complies
	157	5785	12.28	30	Complies
	165	5825	13.40	30	Complies
802.11n(HT40)	151	5755	11.99	30	Complies
	159	5795	12.56	30	Complies

5.2. Power Spectral Density Measurement

5.2.1. Standard Applicable

According to §15.407(a)(1)(i), For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

According to §15.407(a)(1)(ii), For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.


According to §15.407(a)(1)(iv), For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

According to §15.407(a)(3), For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

5.2.2. Test Procedures

- 1) The transmitter was connected directly to a Spectrum Analyzer through a directional couple.
- 2) The power was monitored at the coupler port with a Spectrum Analyzer. The power level was set to the maximum level.
- 3) Set the RBW/VBW = 1MHz/3MHz For the 5.15-5.25GHz band;
Set the RBW/VBW = 100KHz/300KHz For the 5.725-5.85GHz band.
- 4) Set the span to encompass the entire emission bandwidth of the signal.
- 5) Detector = RMS.
- 6) Sweep time = auto couple.
- 7) Trace mode = max hold.
- 8) Allow trace to fully stabilize.
- 9) Use the peak marker function to determine the maximum amplitude level.

5.2.3. Test Setup Layout

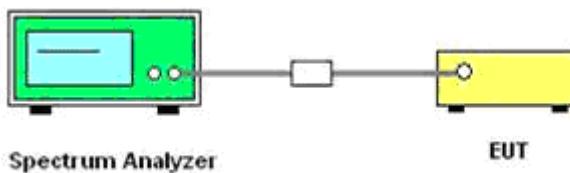

5.2.4. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.2.5. Test Result of Power Spectral Density

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	802.11a/n

Power Spectral Density Measurement Result for 5180~5240MHz Band

Mode	Channel	Frequency (MHz)	Power Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
802.11a	36	5180	5.87	11	Complies
	40	5200	5.18	11	Complies
	48	5240	5.37	11	Complies
802.11n(HT20)	36	5180	5.83	11	Complies
	40	5200	5.17	11	Complies
	48	5240	4.88	11	Complies
802.11n(HT40)	38	5190	2.59	11	Complies
	46	5230	2.53	11	Complies

Power Spectral Density Measurement Result for 5745~5825MHz Band

Mode	Channel	Frequency (MHz)	Power Density (dBm/500KHz)	Max. Limit (dBm/500KHz)	Result
802.11a	149	5745	0.52	30	Complies
	157	5785	1.20	30	Complies
	165	5825	1.80	30	Complies
802.11n(HT20)	149	5745	0.32	30	Complies
	157	5785	0.79	30	Complies
	165	5825	1.33	30	Complies
802.11n(HT40)	151	5755	-3.13	30	Complies
	159	5795	-2.74	30	Complies

Note: BW correction factor = $10 \cdot \log(500\text{kHz}/\text{RBW}) = 10 \cdot \log(500\text{kHz}/100\text{KHz})$



The measured power density (dBm) has the offset with cable loss already.



Test Plot for 802.11a-5180M



Test Plot for 802.11a-5200M

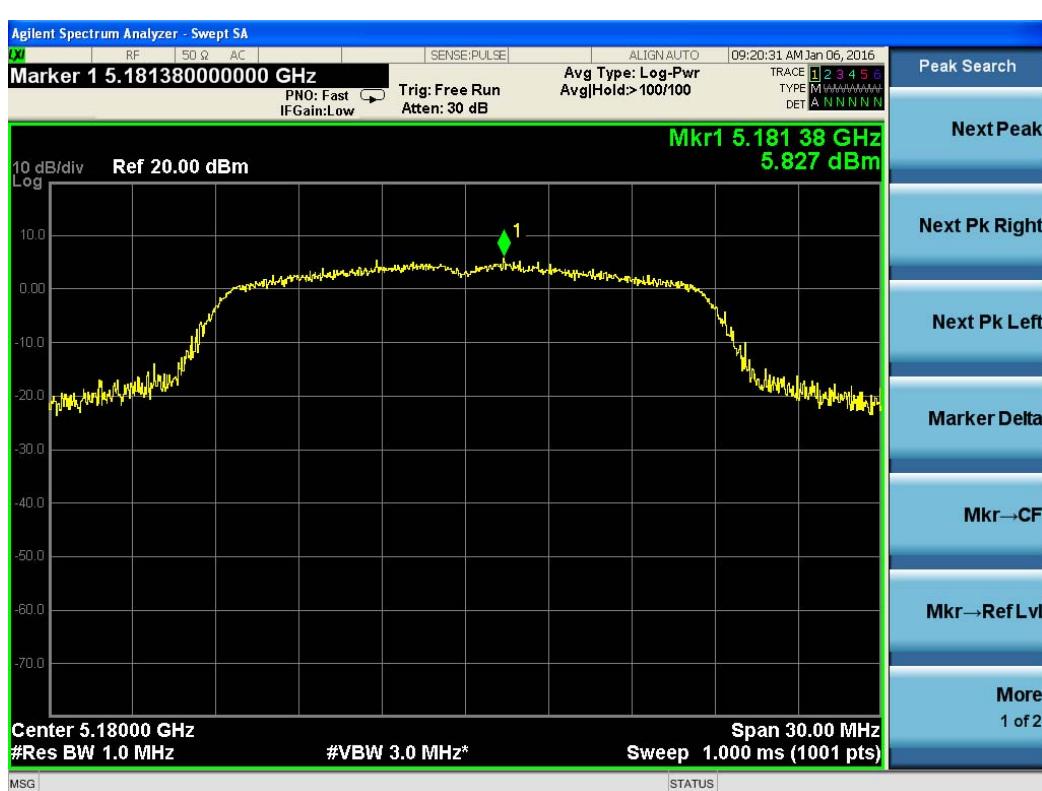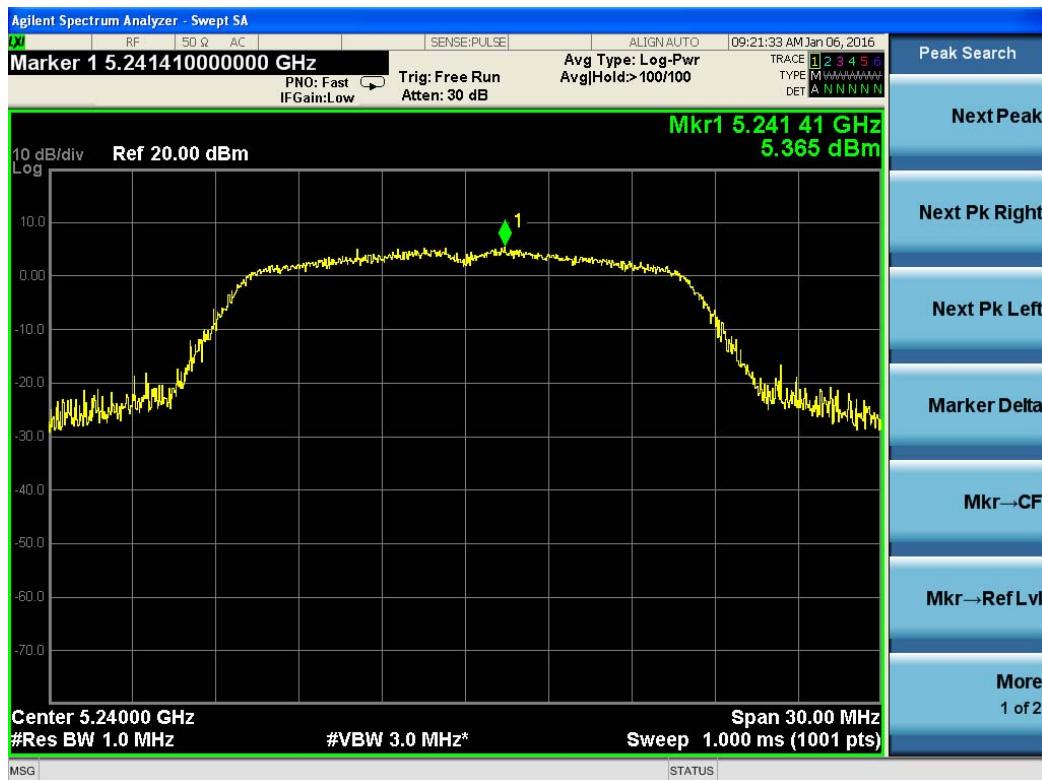



Test Plot for 802.11n (HT20)-5200M



Test Plot for 802.11n (HT20)-5240M





Test Plot for 802.11n (HT40)-5190M



Test Plot for 802.11n (HT40)-5230M



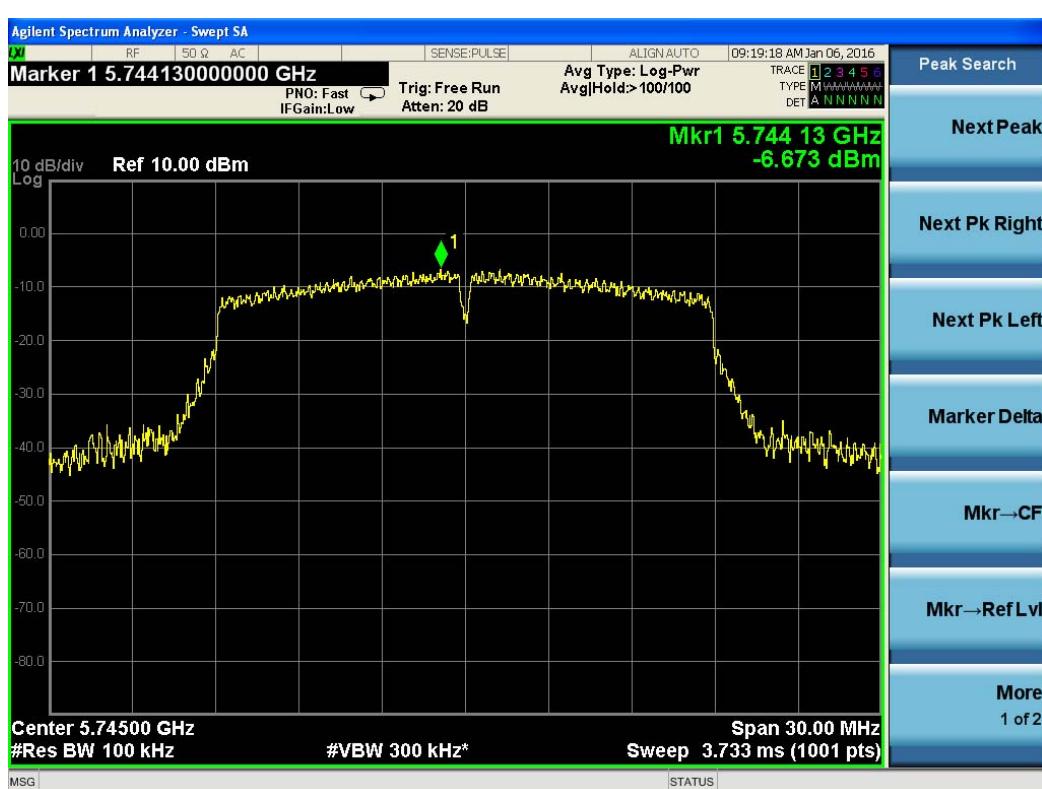

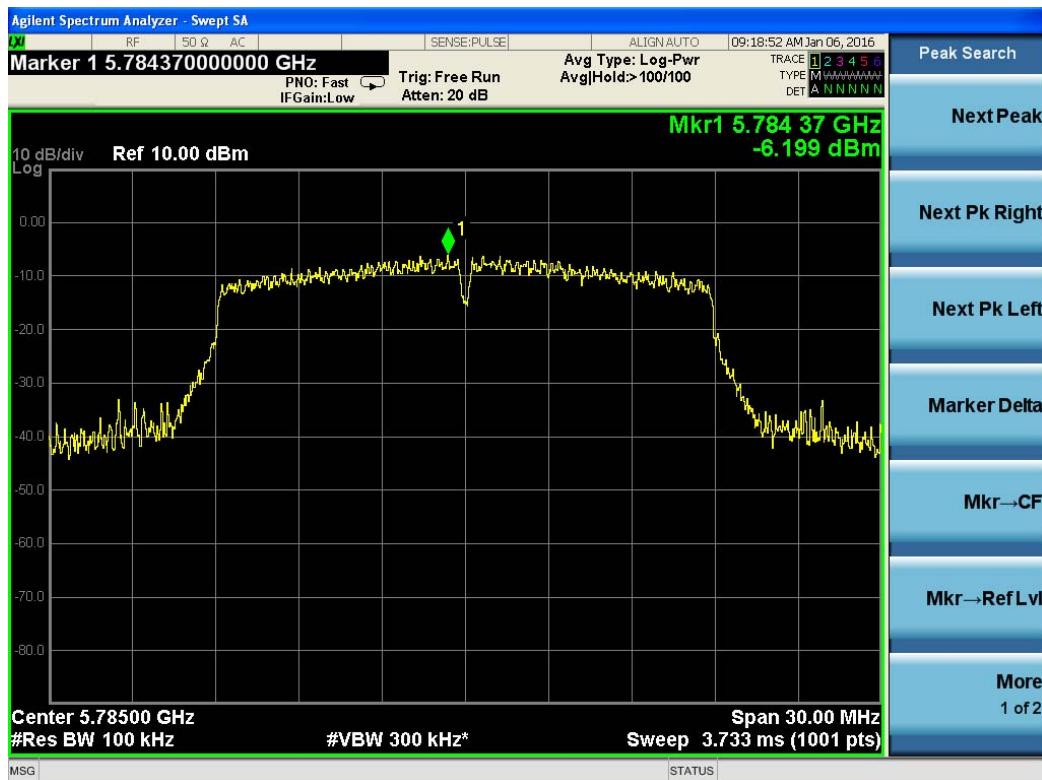


Test Plot for 802.11n (HT20)-5785M



Test Plot for 802.11n (HT20)-5825M



Test Plot for 802.11n (HT40)-5755M

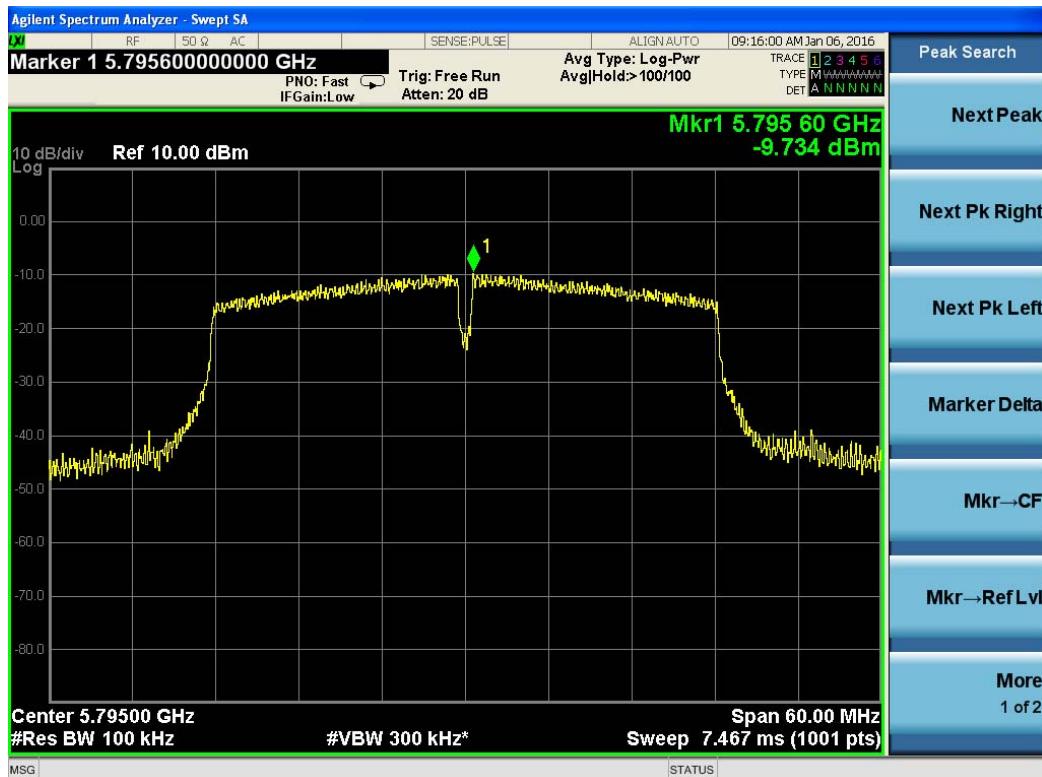

Test Plot for 802.11n (HT40)-5795M

5.3. 6dB & 26dB Bandwidth Measurement

5.3.1. Standard Applicable

According to §15.407(e): Within the 5.725-5.85 GHz band, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

There is no restriction limits for 26dB & 99% occupied bandwidth, report only for reference.

5.3.2. Instruments Setting

The following table is the setting of the Spectrum Analyzer.

6dB Bandwidth Measurement (Only For 5745~5825MHz Band)	
Spectrum Parameter	Setting
Attenuation	Auto
RBW	100KHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold


26dB & 99%Bandwidth Measurement (Only For 5180~5240MHz Band)	
Spectrum Parameter	Setting
Attenuation	Auto
RBW	approximately 1% of the emission bandwidth
VBW	\geq RBW
Detector	Peak
Trace	Max Hold

5

5.3.3. Test Procedures

- 1) The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- 2) The resolution bandwidth and the video bandwidth were set according to KDB 789033 D02 General UNII Test Procedures New Rules v01
- 3) For 5745~5825MHz Band, Measured the maximum width of the emission that is 6dB down from the peak of the emission.
- 4) For 5180~5240MHz Band, Measured the maximum width of the emission that is 26dB down from the peak of the emission. Record the 26dB & 99% Bandwidth.

5.3.4. Test Setup Layout

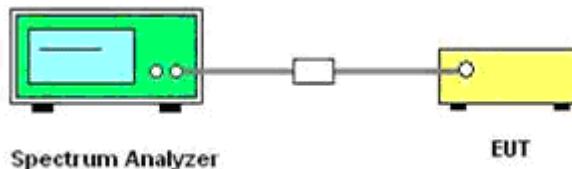

5.3.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


5.3.6. Test Result of Spectrum Bandwidth

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	802.11a/n

Mode	Channel	Frequency	6dB Bandwidth (MHz)	Min. Limit (kHz)	Result
802.11a	149	5745	16.35	500	Complies
	157	5785	16.36	500	Complies
	165	5825	16.09	500	Complies
802.11n(HT20)	149	5745	17.58	500	Complies
	157	5785	17.61	500	Complies
	165	5825	17.37	500	Complies
802.11n(HT40)	151	5755	36.05	500	Complies
	159	5795	35.91	500	Complies



Test Plot For 802.11a-6dB BW-5745M

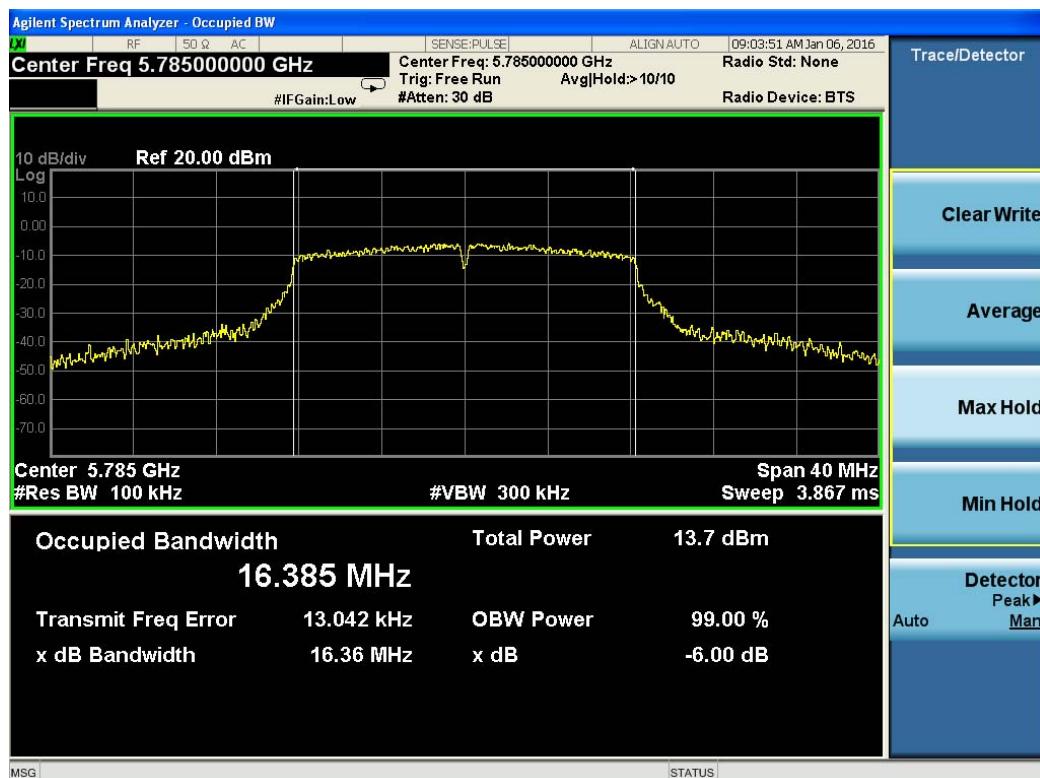


Test Plot For 802.11a-6dB BW-5785M



Test Plot For 802.11a-6dB BW-5825M



Test Plot For 802.11n(HT20)-6dB BW-5745M

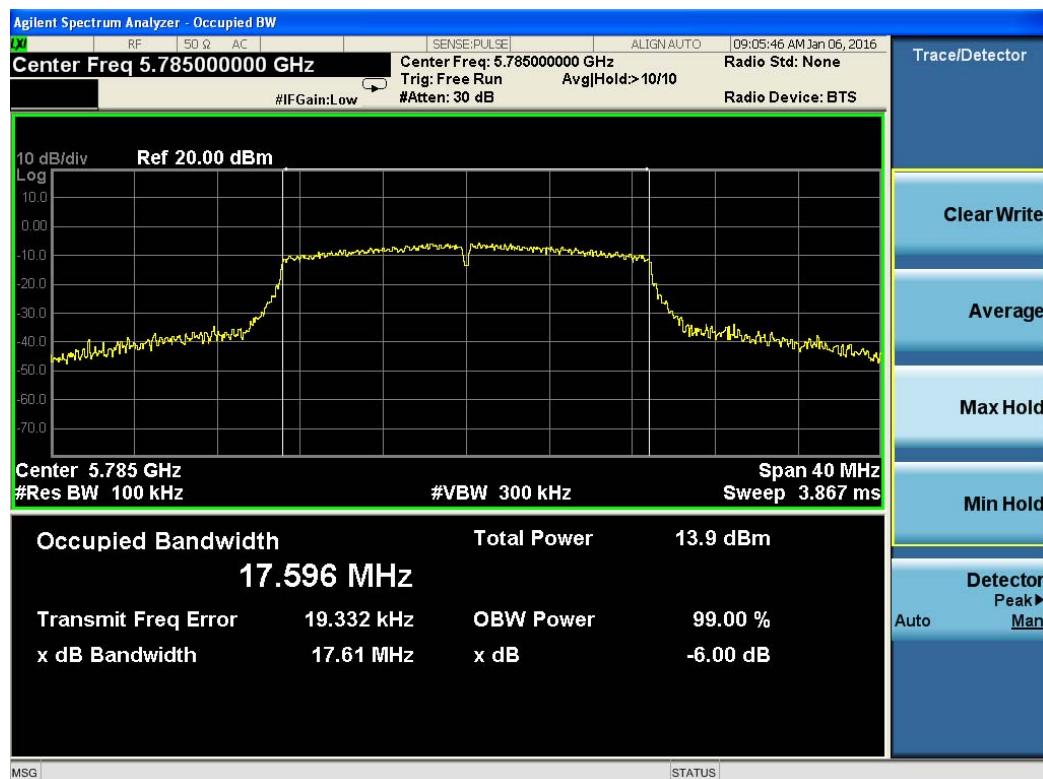


Test Plot For 802.11n(HT20)-6dB BW-5785M



Test Plot For 802.11n(HT20)-6dB BW-5825M



Test Plot For 802.11n(HT40)-6dB BW-5755M

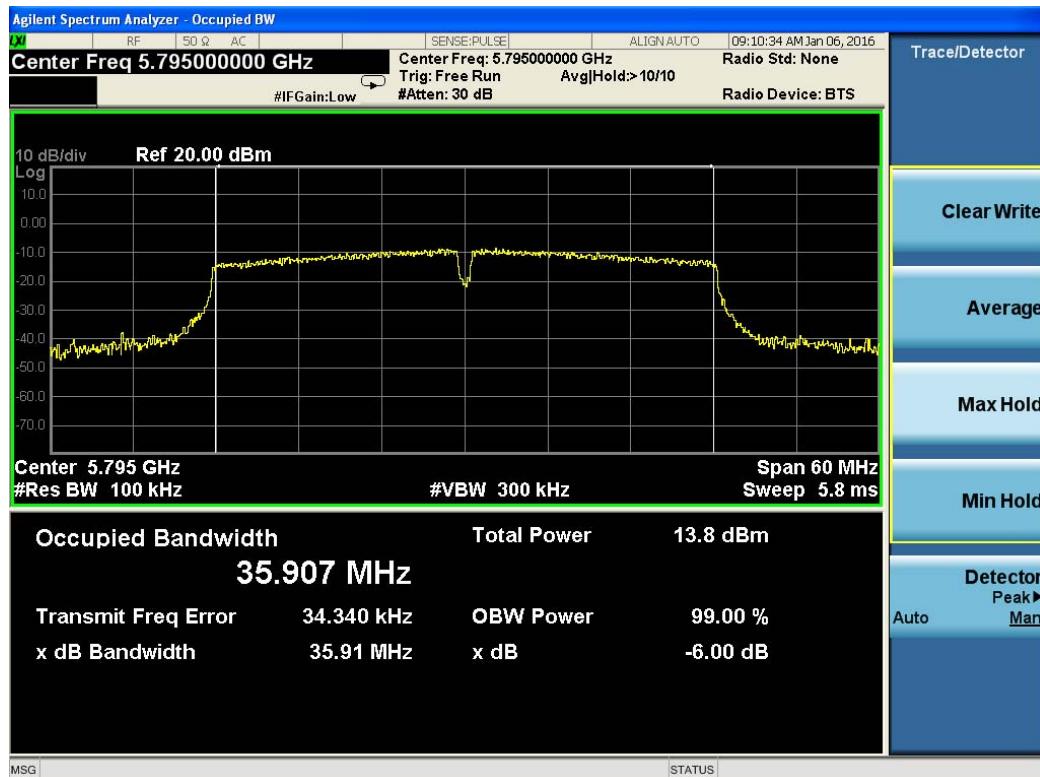


Test Plot For 802.11n(HT40)-6dB BW-5795M

Mode	Channel	Frequency (MHz)	26dB BW (MHz)	99% BW (MHz)	Limit
802.11a	36	5180	21.46	17.02	Non-specified
	40	5200	21.27	16.71	
	48	5240	21.08	16.67	
802.11n(HT20)	36	5180	22.88	17.98	Non-specified
	40	5200	22.31	17.77	
	48	5240	21.46	17.68	
802.11n(HT40)	38	5190	42.34	36.93	Non-specified
	46	5230	41.71	36.31	



Test Plot For 802.11a-26dB BW-5180M

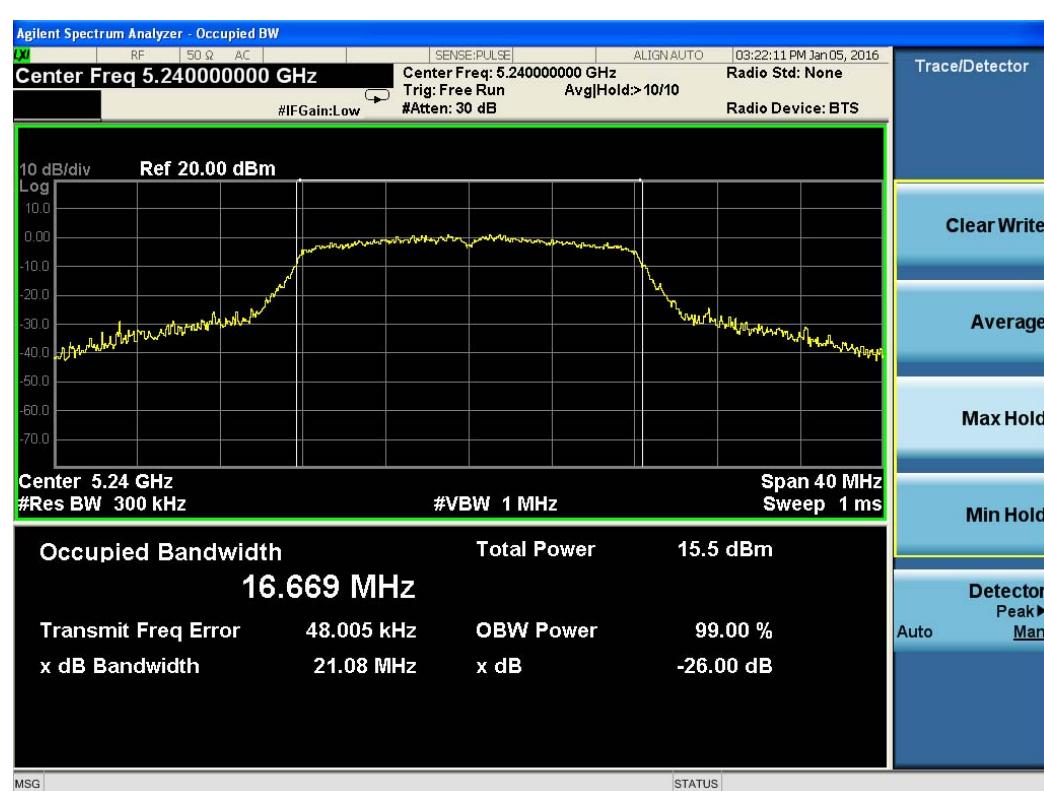



Test Plot For 802.11n(HT20)-26dB BW-5180M




Test Plot For 802.11n(HT20)-26dB BW-5200M



Test Plot For 802.11n(HT20)-26dB BW-5240M



Test Plot For 802.11n(HT40)-26dB BW-5190M

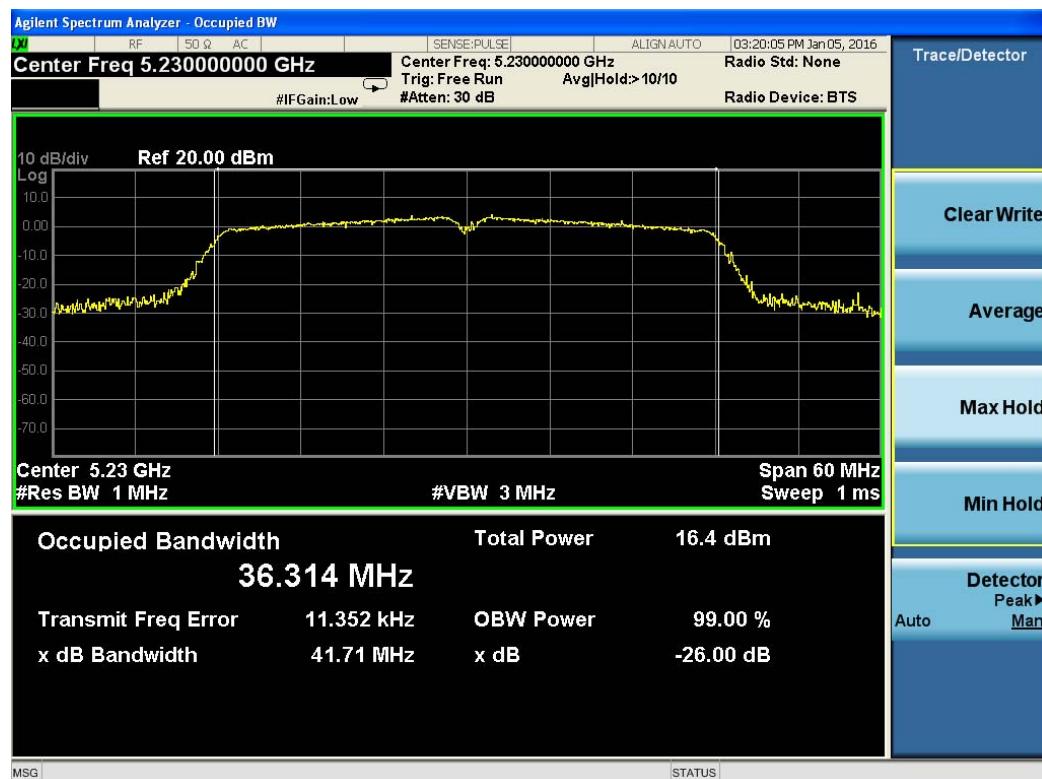

Test Plot for 802.11n (HT40)-26dB BW-5230M

5.4. Radiated Emissions Measurement

5.4.1. Standard Applicable

According to §15.407 (b)(1) to (6):

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz (68.3dBuV/m at 3m).

For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz (68.3dBuV/m at 3m).

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies(MHz)	Field Strength(microvolts/meter)	Measurement Distance(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

5.4.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 100kHz for QP

5.4.3. Test Procedures

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.



Premeasurement:


- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

5.4.4. Test Setup Layout

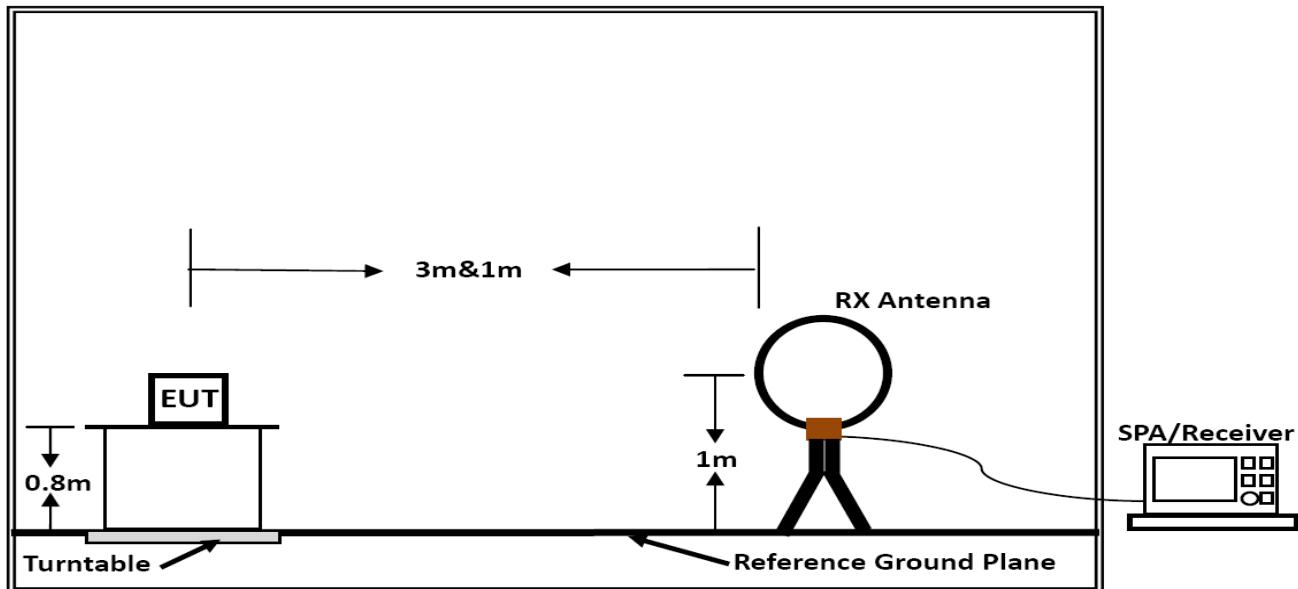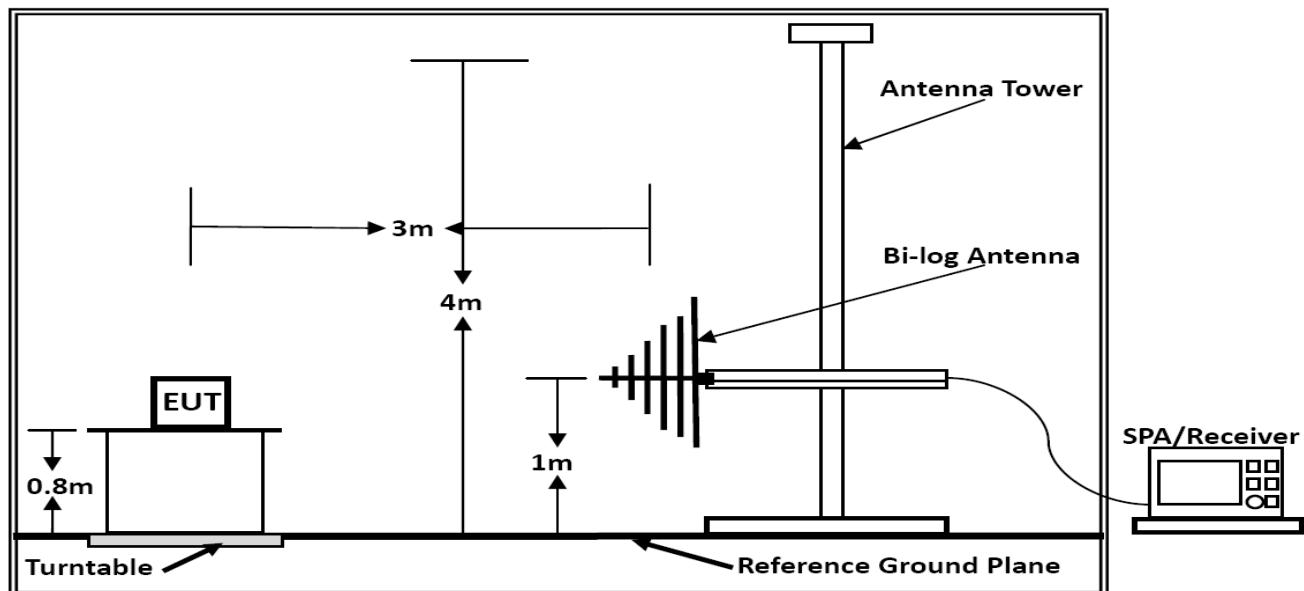**Below 30MHz****Below 1GHz**

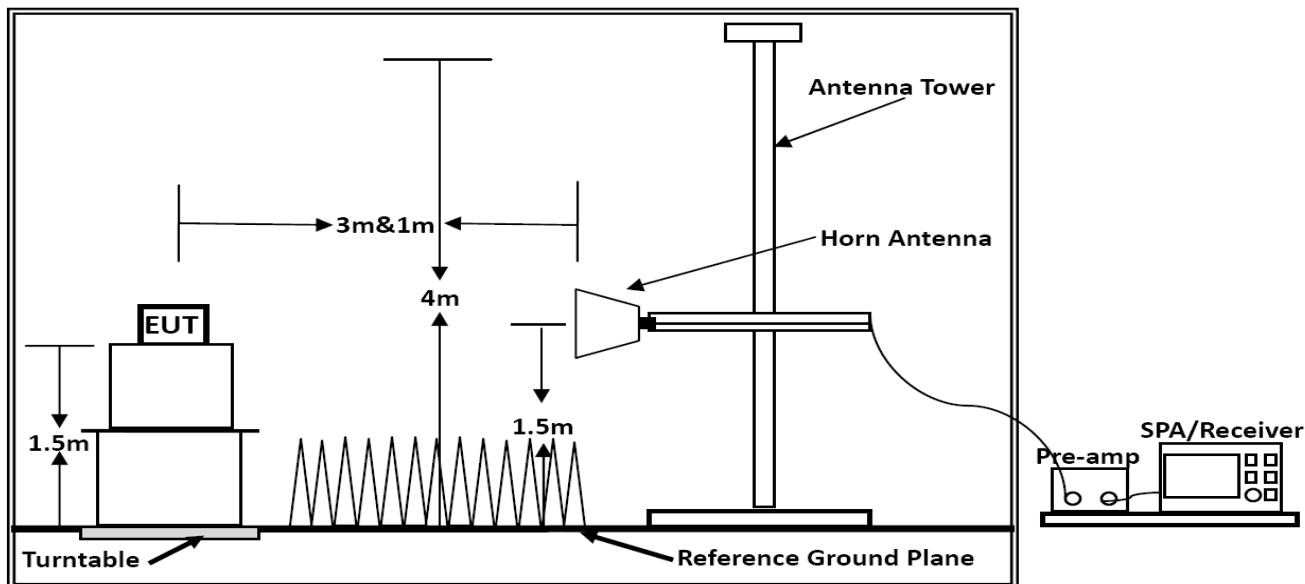

Above 1GHz

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

5.4.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

5.4.6. Results of Radiated Emissions (9kHz~30MHz)

Temperature	25°C	Humidity	60%
Test Engineer	Leo	Configurations	802.11a/n


Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

5.4.7. Results of Radiated Emissions (30MHz~1GHz)


Note: Only record the worst test result in this report.

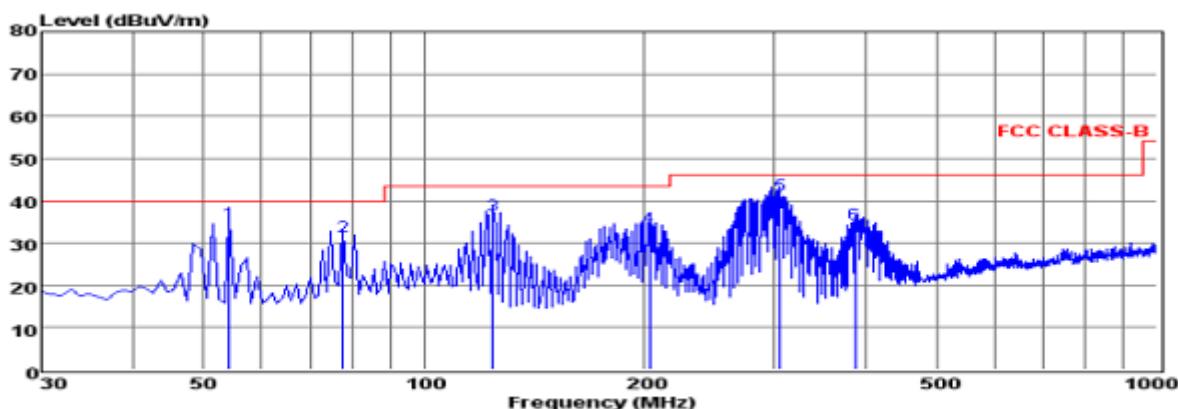

Env. / Ins: 24 °C / 568
 EUT:
 M/N: SF550
 Power Rating: AC 120V / 60Hz
 Test Mode: TX-Low Channel (802.11a)
 Operator: Leo
 Memo: 5180-5240MHz Band
 pol: HORIZONTAL

Freq MHz	Reading dBuV	CabLos dB	Antfac dB/m	Measured		Limit dBuV/m	Over dB	Remark
				Measured dBuV/m	Limit dBuV/m			
1 54.25	21.19	0.46	13.05	34.70	40.00	-5.30	QP	
2 77.53	22.76	0.47	8.17	31.40	40.00	-8.60	QP	
3 124.09	26.13	0.71	9.85	36.69	43.50	-6.81	QP	
4 202.66	22.16	0.82	10.65	33.63	43.50	-9.87	QP	
5 306.45	27.17	1.05	13.15	41.37	46.00	-4.63	QP	
6 386.96	18.57	1.32	14.75	34.64	46.00	-11.36	QP	

Note: 1. All readings are Quasi-peak values.
 2. Measured= Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the official limit are not reported

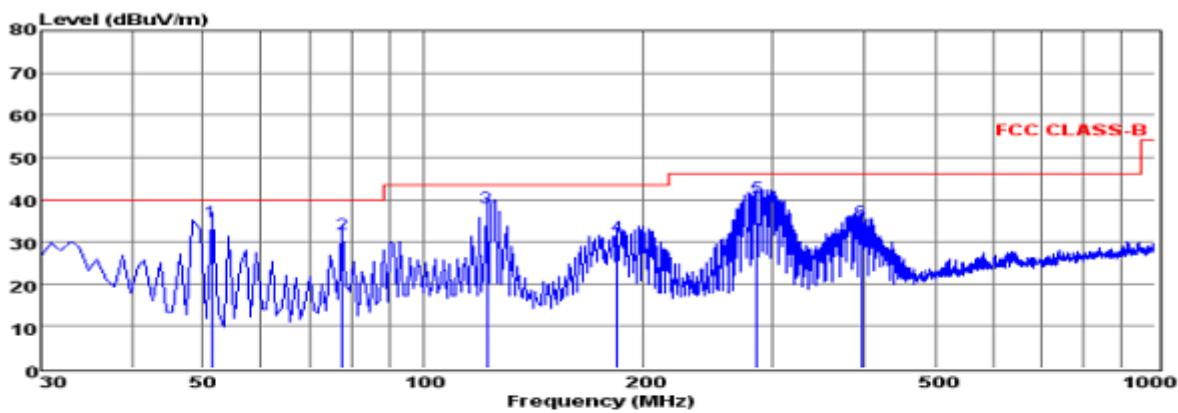

Env./Ins: 24°C / 56%

EUT:

M/N:

Power Rating: AC 120V/60Hz

Test Mode: TX-Low Channel (802.11a)

Operator: Leo

Memo: 5180-5240MHz Band

pol: VERTICAL

Freq	Reading	CabLos	Antfac	Measured		Limit	Over	Remark			
				MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	51.34			21.19	0.54	13.19	34.92	40.00	-5.08	QP	
2	77.53			23.12	0.47	8.17	31.76	40.00	-8.24	QP	
3	122.15			27.32	0.70	10.15	38.17	43.50	-5.33	QP	
4	184.23			20.49	0.70	10.05	31.24	43.50	-12.26	QP	
5	286.08			26.65	1.00	12.79	40.44	46.00	-5.56	QP	
6	397.63			18.58	1.22	15.00	34.80	46.00	-11.20	QP	

Note: 1. All readings are Quasi-peak values.

2. Measured= Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

***Note:

Pre-scan all mode and recorded the worst case results in this report (802.11a mode(Low Channel, 5180-5240MHz Band)).

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Only recorded the worst test case in this report.

5.4.8. Results for Radiated Emissions (Above 1GHz)

Note: Only recorded the worst test result in this report.

The Worst Test Result For 5180~5240MHz Band.

802.11a / Channel 36

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.54	47.20	33.21	35.82	9.52	54.11	74	-19.89	Peak	Horizontal
15.54	36.25	33.21	35.82	9.52	43.16	54	-10.84	Average	Horizontal
15.54	48.32	32.82	35.82	9.52	54.84	74	-19.16	Peak	Vertical
15.54	36.62	32.82	35.82	9.52	43.14	54	-10.86	Average	Vertical

802.11a / Channel 40

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.60	46.85	33.21	35.82	9.52	53.76	74	-20.24	Peak	Horizontal
15.60	36.03	33.21	35.82	9.52	42.94	54	-11.06	Average	Horizontal
15.60	48.08	32.82	35.82	9.52	54.60	74	-19.40	Peak	Vertical
15.60	36.56	32.82	35.82	9.52	43.08	54	-10.92	Average	Vertical

802.11a / Channel 48

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.72	46.58	33.21	35.82	9.52	53.49	74	-20.51	Peak	Horizontal
15.72	35.56	33.21	35.82	9.52	42.47	54	-11.53	Average	Horizontal
15.72	47.78	32.82	35.82	9.52	54.30	74	-19.70	Peak	Vertical
15.72	36.21	32.82	35.82	9.52	42.73	54	-11.27	Average	Vertical

802.11n(HT20) / Channel 36

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.54	47.15	33.21	35.82	9.52	54.06	74	-19.94	Peak	Horizontal
15.54	36.32	33.21	35.82	9.52	43.23	54	-10.77	Average	Horizontal
15.54	48.36	32.82	35.82	9.52	54.88	74	-19.12	Peak	Vertical
15.54	36.59	32.82	35.82	9.52	43.11	54	-10.89	Average	Vertical

802.11n(HT20) / Channel 40

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.60	46.64	33.21	35.82	9.52	53.55	74	-20.45	Peak	Horizontal
15.60	36.03	33.21	35.82	9.52	42.94	54	-11.06	Average	Horizontal
15.60	47.82	32.82	35.82	9.52	54.34	74	-19.66	Peak	Vertical
15.60	36.40	32.82	35.82	9.52	42.92	54	-11.08	Average	Vertical

802.11n(HT20) / Channel 48

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.72	46.50	33.21	35.82	9.52	53.41	74	-20.59	Peak	Horizontal
15.72	35.70	33.21	35.82	9.52	42.61	54	-11.39	Average	Horizontal
15.72	47.61	32.82	35.82	9.52	54.13	74	-19.87	Peak	Vertical
15.72	36.32	32.82	35.82	9.52	42.84	54	-11.16	Average	Vertical

802.11n(HT40) / Channel 38

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.57	46.75	33.21	35.82	9.52	53.66	74	-20.34	Peak	Horizontal
15.57	36.13	33.21	35.82	9.52	43.04	54	-10.96	Average	Horizontal
15.57	48.13	32.82	35.82	9.52	54.65	74	-19.35	Peak	Vertical
15.57	36.41	32.82	35.82	9.52	42.93	54	-11.07	Average	Vertical

802.11n(HT40) / Channel 46

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
15.69	46.61	33.21	35.82	9.52	53.52	74	-20.48	Peak	Horizontal
15.69	35.79	33.21	35.82	9.52	42.70	54	-11.30	Average	Horizontal
15.69	47.74	32.82	35.82	9.52	54.26	74	-19.74	Peak	Vertical
15.69	36.37	32.82	35.82	9.52	42.89	54	-11.11	Average	Vertical

Notes:

1. Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~40GH were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 40GHz are at least 20dB below the official limit and no need to report.

The Worst Test Result For 5745~5825MHz Band.

802.11a / Channel 149

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.235	49.15	33.92	36.09	10.26	57.24	74	-16.76	Peak	Horizontal
17.235	38.57	33.92	36.09	10.26	46.66	54	-7.34	Average	Horizontal
17.235	50.20	33.99	35.99	10.26	58.46	74	-15.54	Peak	Vertical
17.235	38.71	33.99	35.99	10.26	46.97	54	-7.03	Average	Vertical

802.11a / Channel 157

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.355	49.06	33.92	36.09	10.26	57.15	74	-16.85	Peak	Horizontal
17.355	38.43	33.92	36.09	10.26	46.52	54	-7.48	Average	Horizontal
17.355	49.95	33.99	35.99	10.26	58.21	74	-15.79	Peak	Vertical
17.355	38.64	33.99	35.99	10.26	46.90	54	-7.10	Average	Vertical

802.11a / Channel 165

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.475	49.60	33.92	36.09	10.26	57.69	74	-16.31	Peak	Horizontal
17.475	38.86	33.92	36.09	10.26	46.95	54	-7.05	Average	Horizontal
17.475	50.59	33.99	35.99	10.26	58.85	74	-15.15	Peak	Vertical
17.475	39.30	33.99	35.99	10.26	47.56	54	-6.44	Average	Vertical

802.11n(HT20) / Channel 149

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.235	48.84	33.92	36.09	10.26	56.93	74	-17.07	Peak	Horizontal
17.235	38.23	33.92	36.09	10.26	46.32	54	-7.68	Average	Horizontal
17.235	49.88	33.99	35.99	10.26	58.14	74	-15.86	Peak	Vertical
17.235	38.76	33.99	35.99	10.26	47.02	54	-6.98	Average	Vertical

802.11n(HT20) / Channel 157

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.355	49.27	33.92	36.09	10.26	57.36	74	-16.64	Peak	Horizontal
17.355	38.66	33.92	36.09	10.26	46.75	54	-7.25	Average	Horizontal
17.355	50.60	33.99	35.99	10.26	58.86	74	-15.14	Peak	Vertical
17.355	39.13	33.99	35.99	10.26	47.39	54	-6.61	Average	Vertical

802.11n(HT20) / Channel 165

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.475	49.04	33.92	36.09	10.26	57.13	74	-16.87	Peak	Horizontal
17.475	38.32	33.92	36.09	10.26	46.41	54	-7.59	Average	Horizontal
17.475	49.91	33.99	35.99	10.26	58.17	74	-15.83	Peak	Vertical
17.475	38.54	33.99	35.99	10.26	46.80	54	-7.20	Average	Vertical

802.11n(HT40) / Channel 151

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.265	49.02	33.92	36.09	10.26	57.11	74	-16.89	Peak	Horizontal
17.265	38.62	33.92	36.09	10.26	46.71	54	-7.29	Average	Horizontal
17.265	50.23	33.99	35.99	10.26	58.49	74	-15.51	Peak	Vertical
17.265	38.82	33.99	35.99	10.26	47.08	54	-6.92	Average	Vertical

802.11n(HT40) / Channel 159

Freq. GHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
17.385	49.20	33.92	36.09	10.26	57.29	74	-16.71	Peak	Horizontal
17.385	38.41	33.92	36.09	10.26	46.50	54	-7.50	Average	Horizontal
17.385	50.14	33.99	35.99	10.26	58.40	74	-15.60	Peak	Vertical
17.385	38.74	33.99	35.99	10.26	47.00	54	-7.00	Average	Vertical

Notes:

1. Measuring frequencies from 9k~40GHz, No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 30MHz~40GH were made with an instrument using Peak detector mode.
3. The radiated emissions from 18GHz to 40GHz are at least 20dB below the official limit and no need to report.

5.4.9. Results of Band Edges Test (Radiated)

Note: Only recorded the worst test result in this report.

The Worst Test Result For 5180~5240MHz Band.

802.11a / Channel 36

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5150.00	48.73	33.79	36.42	7.80	53.90	74	-20.10	Peak	Horizontal
5150.00	38.53	33.79	36.42	7.80	43.70	54	-10.30	Average	Horizontal
5150.00	49.95	34.24	36.42	7.80	55.57	74	-18.43	Peak	Vertical
5150.00	39.04	34.24	36.42	7.80	44.66	54	-9.34	Average	Vertical

802.11a / Channel 48

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5350.00	49.86	34.66	36.59	7.98	55.91	74	-18.09	Peak	Horizontal
5350.00	39.01	34.66	36.59	7.98	45.06	54	-8.94	Average	Horizontal
5350.00	51.38	34.69	36.59	7.98	57.46	74	-16.54	Peak	Vertical
5350.00	41.37	34.69	36.59	7.98	47.45	54	-6.55	Average	Vertical

802.11n(HT20) / Channel 36

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5150.00	48.34	33.79	36.42	7.80	53.51	74	-20.49	Peak	Horizontal
5150.00	38.49	33.79	36.42	7.80	43.66	54	-10.34	Average	Horizontal
5150.00	49.71	34.24	36.42	7.80	55.33	74	-18.67	Peak	Vertical
5150.00	38.81	34.24	36.42	7.80	44.43	54	-9.57	Average	Vertical

802.11n(HT20) / Channel 48

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5350.00	49.26	34.66	36.59	7.98	55.31	74	-18.69	Peak	Horizontal
5350.00	38.58	34.66	36.59	7.98	44.63	54	-9.37	Average	Horizontal
5350.00	51.05	34.69	36.59	7.98	57.13	74	-16.87	Peak	Vertical
5350.00	40.68	34.69	36.59	7.98	46.76	54	-7.24	Average	Vertical

802.11n(HT40) / Channel 38

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5150.00	48.20	33.79	36.42	7.80	53.37	74	-20.63	Peak	Horizontal
5150.00	37.76	33.79	36.42	7.80	42.93	54	-11.07	Average	Horizontal
5150.00	49.34	34.24	36.42	7.80	54.96	74	-19.04	Peak	Vertical
5150.00	38.43	34.24	36.42	7.80	44.05	54	-9.95	Average	Vertical

802.11n(HT40) / Channel 46

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5350.00	49.05	34.66	36.59	7.98	55.10	74	-18.90	Peak	Horizontal
5350.00	38.31	34.66	36.59	7.98	44.36	54	-9.64	Average	Horizontal
5350.00	50.90	34.69	36.59	7.98	56.98	74	-17.02	Peak	Vertical
5350.00	40.60	34.69	36.59	7.98	46.68	54	-7.32	Average	Vertical

The Worst Test Result For 5745~5825MHz Band.

802.11a / Channel 149

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5725.00	49.76	34.46	36.75	8.19	55.66	74	-18.34	Peak	Horizontal
5725.00	38.20	34.46	36.75	8.19	44.10	54	-9.90	Average	Horizontal
5725.00	51.10	34.52	36.75	8.19	57.06	74	-16.94	Peak	Vertical
5725.00	39.44	34.52	36.75	8.19	45.40	54	-8.60	Average	Vertical

802.11a / Channel 165

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5850.00	50.85	34.82	36.80	8.30	57.17	74	-16.83	Peak	Horizontal
5850.00	39.45	34.82	36.80	8.30	45.77	54	-8.23	Average	Horizontal
5850.00	52.54	34.86	36.80	8.30	58.90	74	-15.10	Peak	Vertical
5850.00	41.56	34.86	36.80	8.30	47.92	54	-6.08	Average	Vertical

802.11n(HT20) / Channel 149

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5725.00	49.43	34.46	36.75	8.19	55.33	74	-18.67	Peak	Horizontal
5725.00	38.15	34.46	36.75	8.19	44.05	54	-9.95	Average	Horizontal
5725.00	50.83	34.52	36.75	8.19	56.79	74	-17.21	Peak	Vertical
5725.00	39.36	34.52	36.75	8.19	45.32	54	-8.68	Average	Vertical

802.11n(HT20) / Channel 165

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5850.00	51.05	34.82	36.80	8.30	57.37	74	-16.63	Peak	Horizontal
5850.00	39.44	34.82	36.80	8.30	45.76	54	-8.24	Average	Horizontal
5850.00	52.47	34.86	36.80	8.30	58.83	74	-15.17	Peak	Vertical
5850.00	41.40	34.86	36.80	8.30	47.76	54	-6.24	Average	Vertical

802.11n(HT40) / Channel 151

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5725.00	49.64	34.46	36.75	8.19	55.54	74	-18.46	Peak	Horizontal
5725.00	38.25	34.46	36.75	8.19	44.15	54	-9.85	Average	Horizontal
5725.00	50.93	34.52	36.75	8.19	56.89	74	-17.11	Peak	Vertical
5725.00	39.47	34.52	36.75	8.19	45.43	54	-8.57	Average	Vertical

802.11n(HT40) / Channel 159

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
5850.00	51.13	34.82	36.80	8.30	57.45	74	-16.55	Peak	Horizontal
5850.00	39.50	34.82	36.80	8.30	45.82	54	-8.18	Average	Horizontal
5850.00	52.24	34.86	36.80	8.30	58.60	74	-15.40	Peak	Vertical
5850.00	41.58	34.86	36.80	8.30	47.94	54	-6.06	Average	Vertical


5.5. Power line conducted emissions

5.5.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

5.5.2 Block Diagram of Test Setup

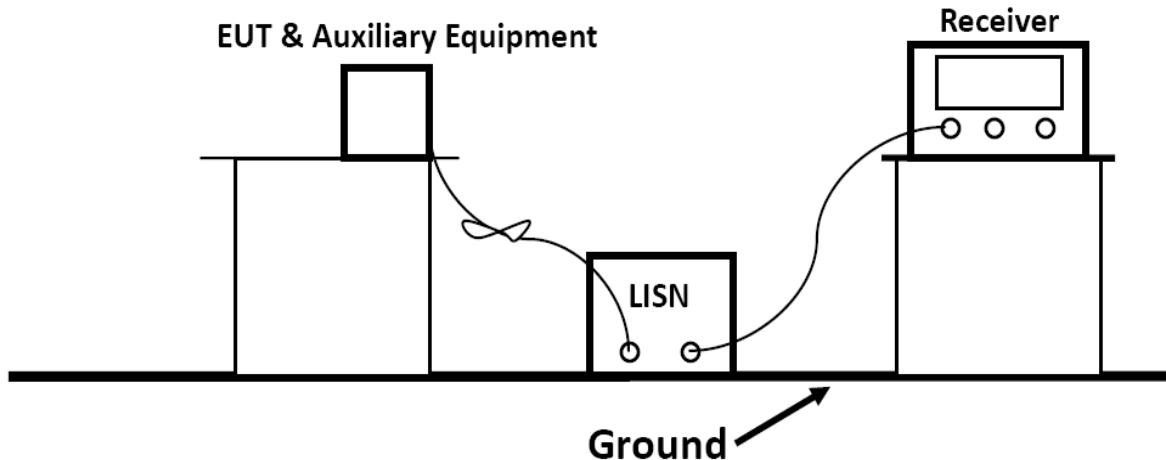


5.5.3 Test Results

PASS.

Only recorded the worst test case in this report.

The test data please refer to following page.


Test Result For Line Power Input AC 120V/60Hz (Worst Case)

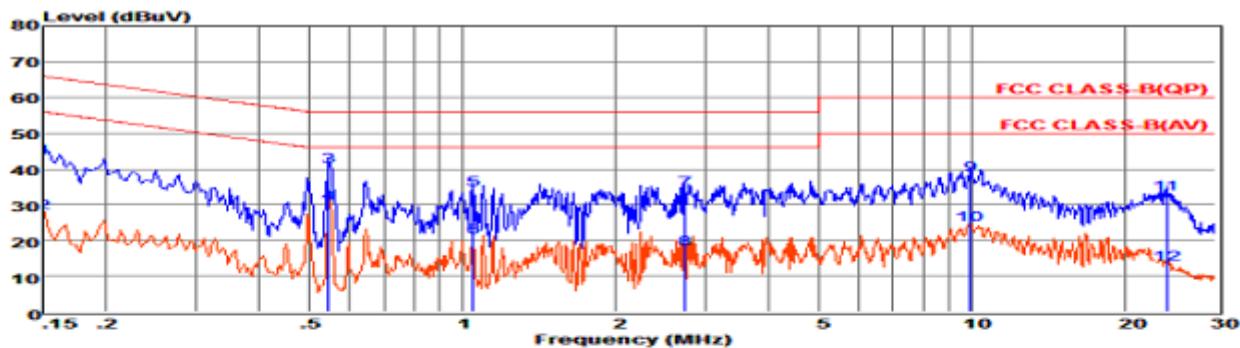

Env. Inst: 24*/56%
 EUT: SF550
 M/N: AC 120V/60Hz
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (802.11b)
 Operator: Leo
 Memo: 5180-5240MHz Band
 Pol: LINE

Freq	Reading	LianFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	23.67	9.57	0.02	10.00	43.26	66.00	-22.74	QP
2 0.15010	7.95	9.57	0.02	10.00	27.54	55.99	-28.45	Average
3 0.54644	21.10	9.63	0.04	10.00	40.77	56.00	-15.23	QP
4 0.54654	10.53	9.63	0.04	10.00	30.20	46.00	-15.80	Average
5 1.04850	14.47	9.63	0.05	10.00	34.15	56.00	-21.85	QP
6 1.04950	1.12	9.63	0.05	10.00	20.80	46.00	-25.20	Average
7 2.73562	14.62	9.64	0.05	10.00	34.31	56.00	-21.69	QP
8 2.73662	-2.21	9.64	0.05	10.00	17.48	46.00	-28.52	Average
9 9.91302	18.53	9.69	0.08	10.00	38.30	60.00	-21.70	QP
10 9.91402	4.57	9.69	0.08	10.00	24.34	50.00	-25.66	Average
11 24.01475	13.31	9.71	0.13	10.00	33.15	60.00	-26.85	QP
12 24.01575	-6.52	9.71	0.13	10.00	13.32	50.00	-36.68	Average

Remarks: 1. Measured = Reading + Lian Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

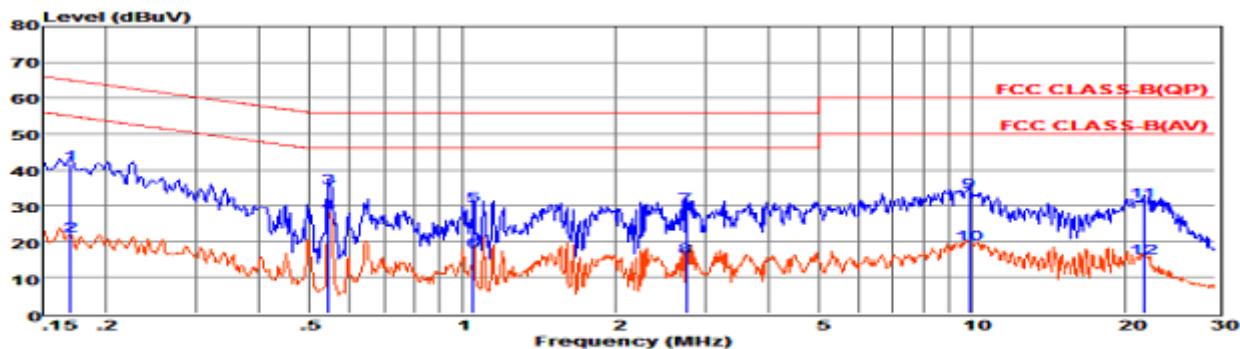

Env. Inst: 24*/56%
 EUT: SF550
 M/N: AC 120V/60Hz
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel (802.11a)
 Operator: Leo
 Memo: 5180-5240MHz Band
 Pol: NEUTRAL

Freq	Reading	LianFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.17034	21.91	9.65	0.02	10.00	41.58	64.94	-23.36	QP
2 0.17044	2.00	9.65	0.02	10.00	21.67	54.94	-33.27	Average
3 0.54644	15.38	9.62	0.04	10.00	35.04	56.00	-20.96	QP
4 0.54654	8.30	9.62	0.04	10.00	27.96	46.00	-18.04	Average
5 1.04850	10.36	9.63	0.05	10.00	30.04	56.00	-25.96	QP
6 1.04950	-2.41	9.63	0.05	10.00	17.27	46.00	-28.73	Average
7 2.75015	10.06	9.64	0.05	10.00	29.75	56.00	-26.25	QP
8 2.75115	-4.02	9.64	0.05	10.00	15.67	46.00	-30.33	Average
9 9.86064	14.15	9.72	0.08	10.00	33.95	60.00	-26.05	QP
10 9.86164	-0.36	9.72	0.08	10.00	19.44	50.00	-30.56	Average
11 21.71493	11.16	9.82	0.12	10.00	31.10	60.00	-28.90	QP
12 21.71593	-4.49	9.82	0.12	10.00	15.45	50.00	-34.55	Average

Remarks: 1. Measured = Reading + Lian Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

5.6. Antenna Requirements

5.6.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

8.2 Antenna Connected Construction

8.2.1. Antenna Connector Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

The BT and WLAN share same PIFA antenna, the maximum gain is 0.8dBi for 5GWLAN; more information as follows

8.2.2. Results: Compliance.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module.

Conducted power refer ANSI C63.10:2013 Output power test procedure for UNI devices
Radiated power refers to ANSI C63.10:2013 Radiated emissions tests.

Measurement parameters

Measurement parameter	
Detector:	Peak
Sweep time:	Auto
Resolution bandwidth:	1MHz
Video bandwidth:	3MHz
Trace-Mode:	Max hold

Limits

FCC	IC
Antenna Gain	
6 dBi	

Note: The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For 5.8G WLAN devices, the 802.11a mode is used;

T _{nom}	V _{nom}	lowest channel 5180 MHz	middle channel 5200 MHz	highest channel 5240 MHz	
Conducted power [dBm] Measured with 802.11a modulation		11.27	11.61	12.03	
Radiated power [dBm] Measured with 802.11a modulation		10.93	11.86	11.44	
Gain [dBi] Calculated		-0.34	0.25	-0.59	
Measurement uncertainty		\pm 1.6 dB (cond.) / \pm 3.8 dB (rad.)			

T _{nom}	V _{nom}	lowest channel 5745 MHz	middle channel 5785 MHz	highest channel 5825 MHz	
Conducted power [dBm] Measured with 802.11a modulation		9.41	9.48	9.82	
Radiated power [dBm] Measured with 802.11a modulation		8.66	9.07	9.15	
Gain [dBi] Calculated		-0.75	-0.41	-0.67	
Measurement uncertainty		\pm 1.6 dB (cond.) / \pm 3.8 dB (rad.)			

Result: -/-

-----THE END OF REPORT-----