




Z Axis Scan



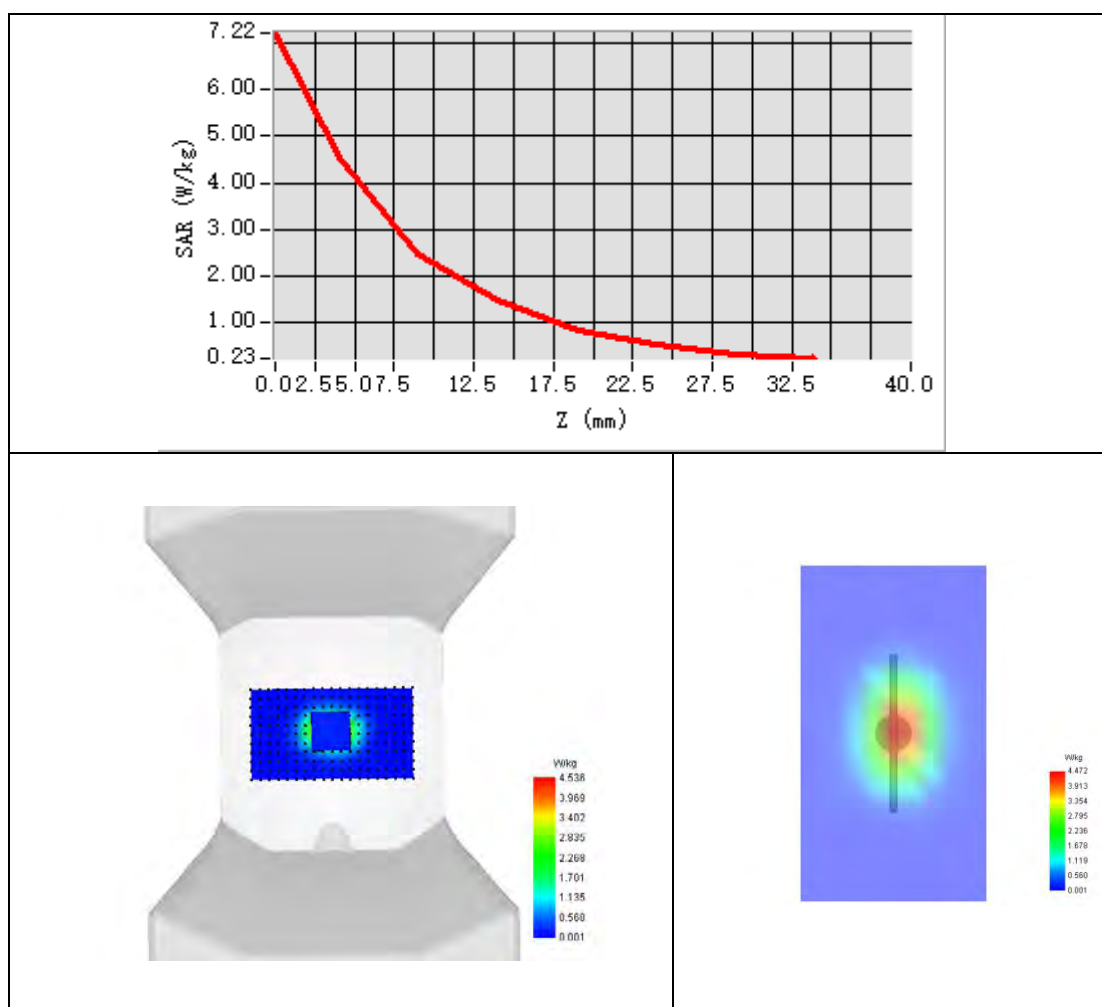

System Performance Check Data (2450MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2024-12-07

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2450
Channels	Middle
Signal	CW
Frequency (MHz)	39.44
Relative permittivity	1.83
Conductivity (S/m)	1.799
Probe	SN 04/22 EPGO364
ConvF	2.30
Crest factor:	1:1

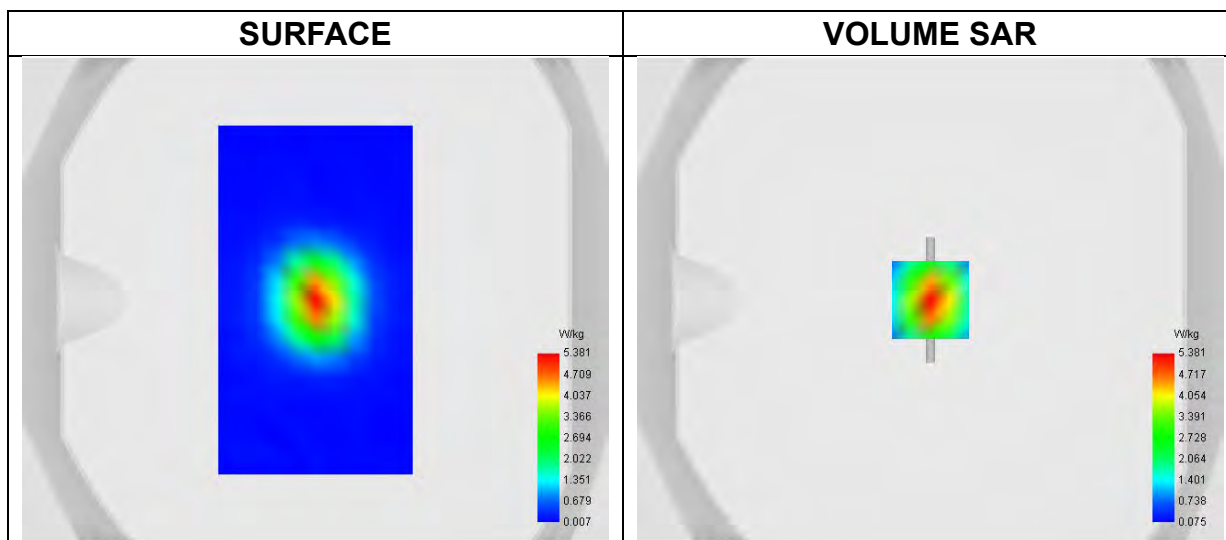


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 8.61 W/kg

SAR 10g (W/Kg)	2.404
SAR 1g (W/Kg)	5.408



Z Axis Scan

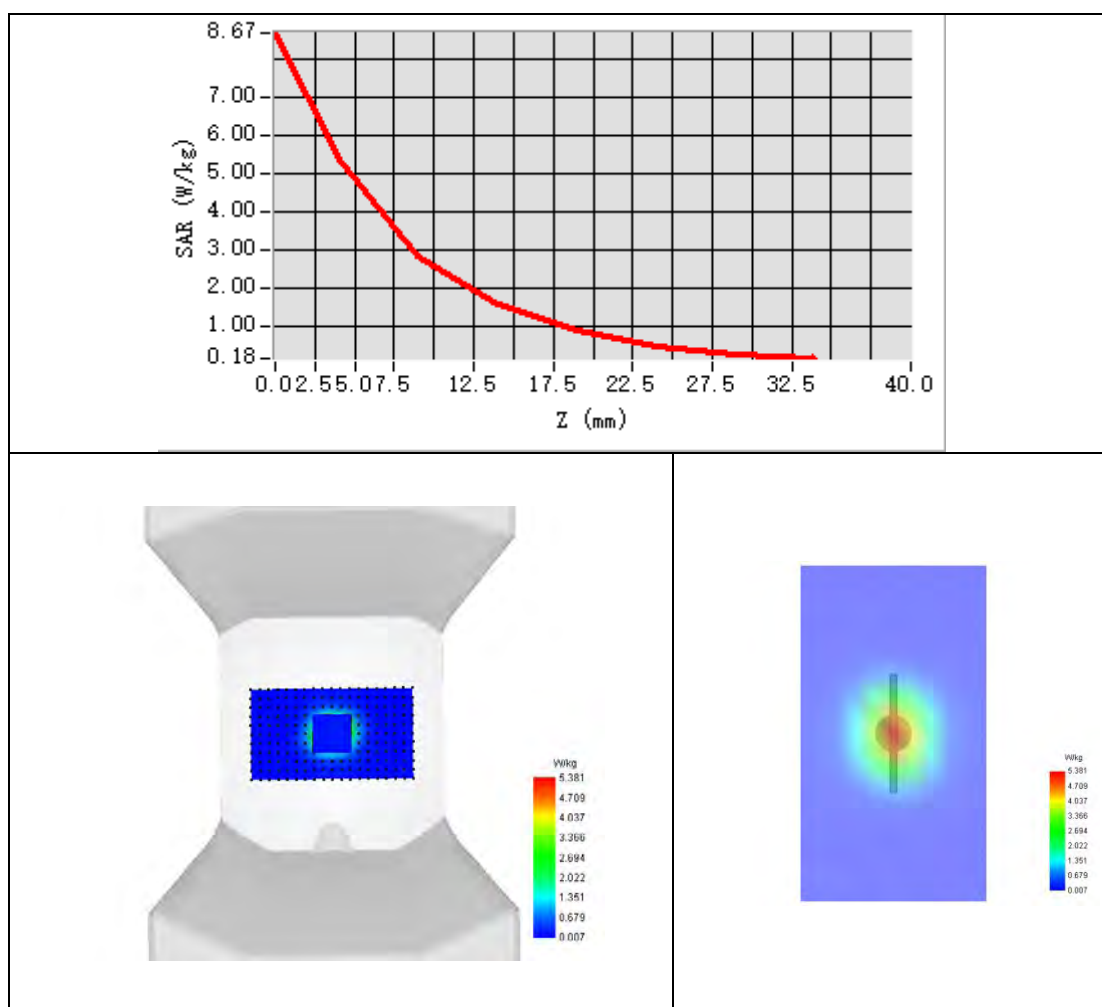



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2024-12-24

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	40.10
Conductivity (S/m)	1.97
Probe	SN 04/22 EPGO364
ConvF	2.35
Crest factor:	1:1

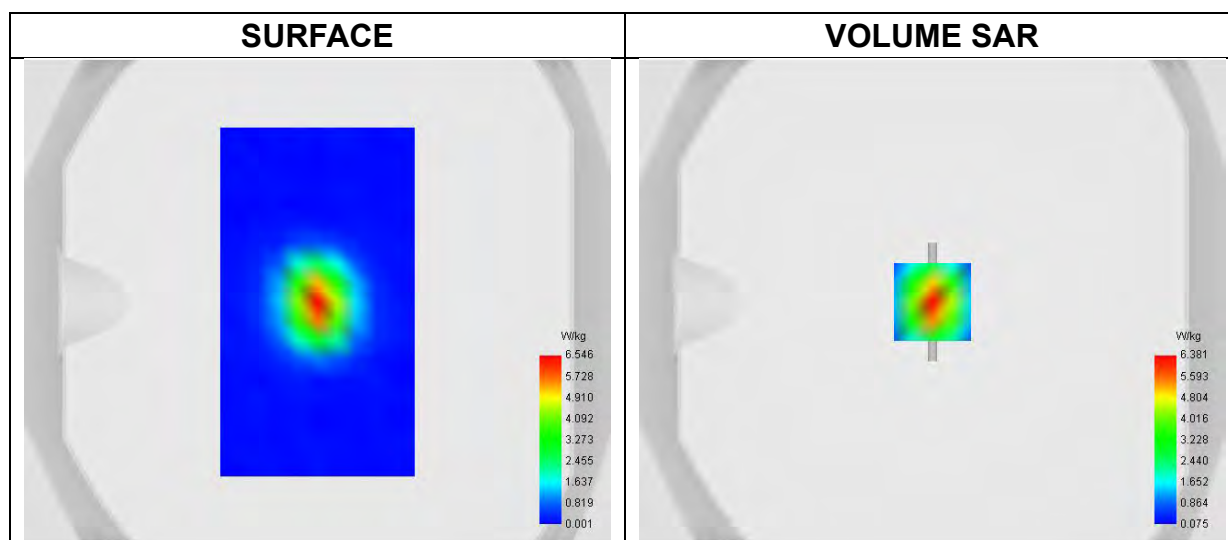


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 10.40 W/kg

SAR 10g (W/Kg)	2.411
SAR 1g (W/Kg)	5.645



Z Axis Scan

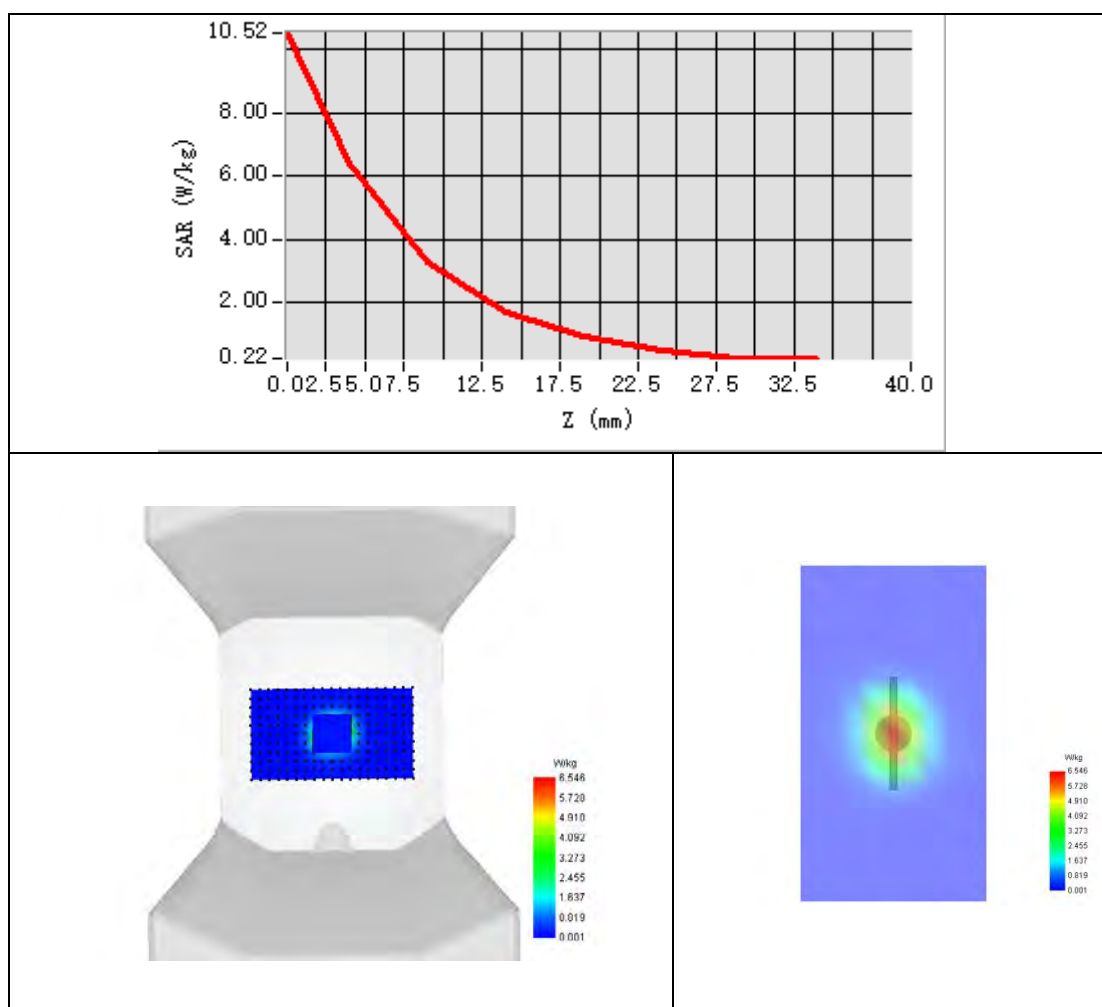



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2024-12-22

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.71
Conductivity (S/m)	2.00
Probe	SN 04/22 EPGO364
ConvF	2.35
Crest factor:	1:1

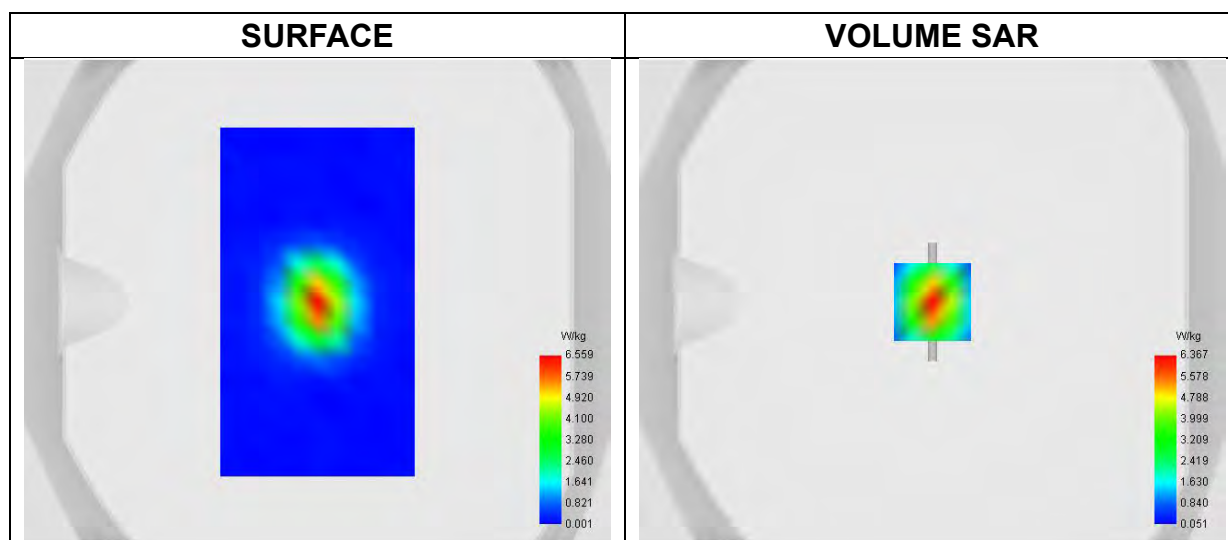


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 10.45 W/kg

SAR 10g (W/Kg)	2.414
SAR 1g (W/Kg)	5.682



Z Axis Scan

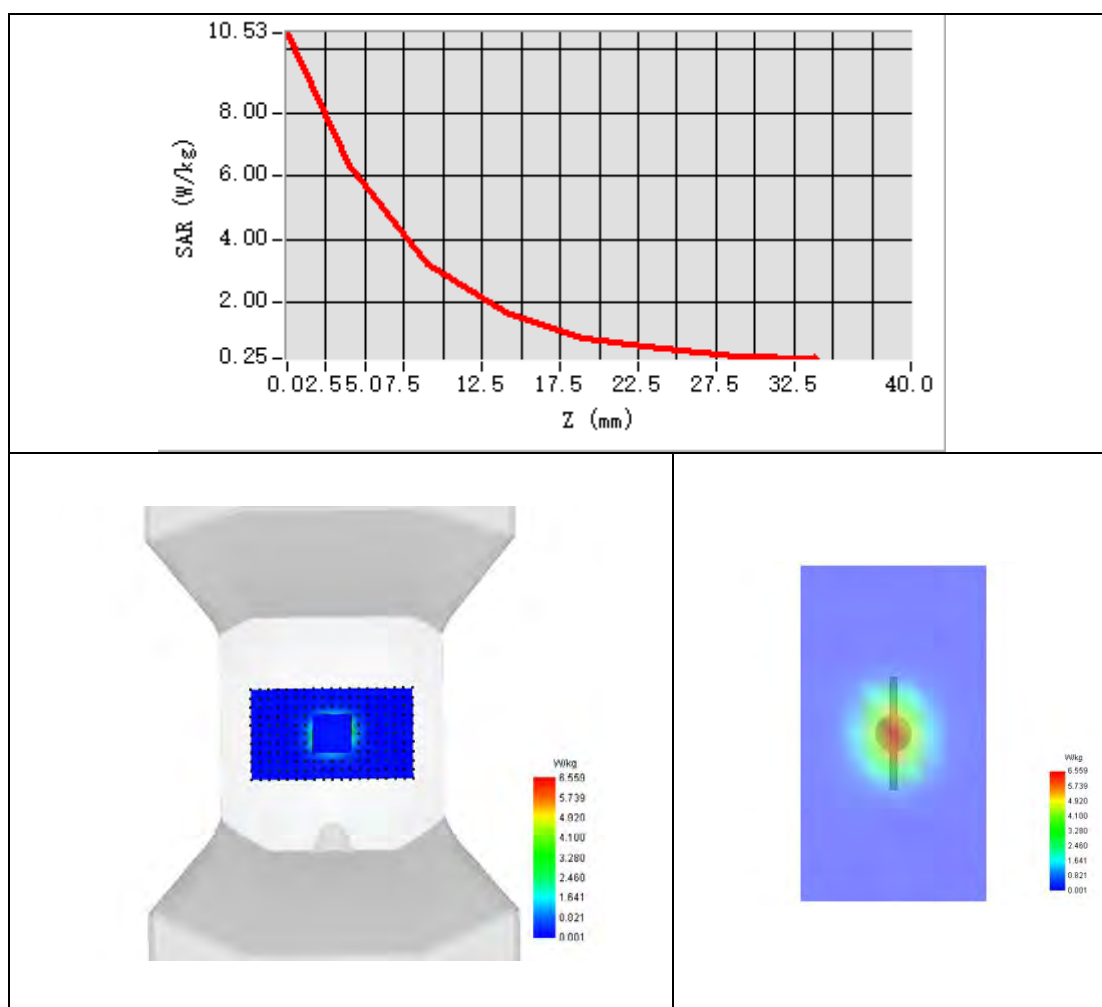



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2024-12-31

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.05
Conductivity (S/m)	1.94
Probe	SN 04/22 EPGO364
ConvF	2.35
Crest factor:	1:1

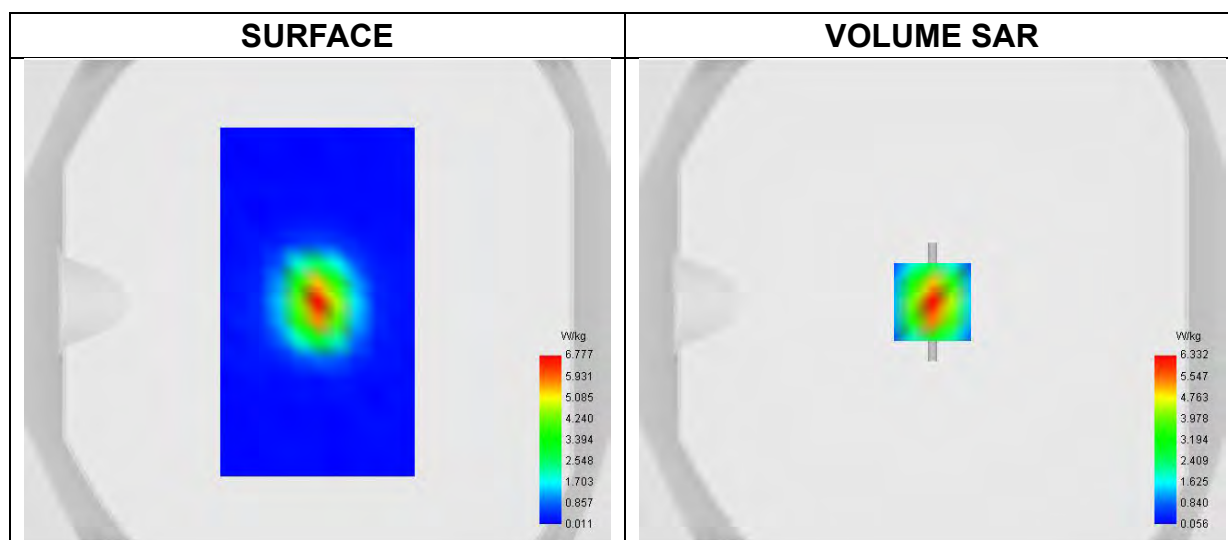


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 10.41 W/kg

SAR 10g (W/Kg)	2.444
SAR 1g (W/Kg)	5.650



Z Axis Scan

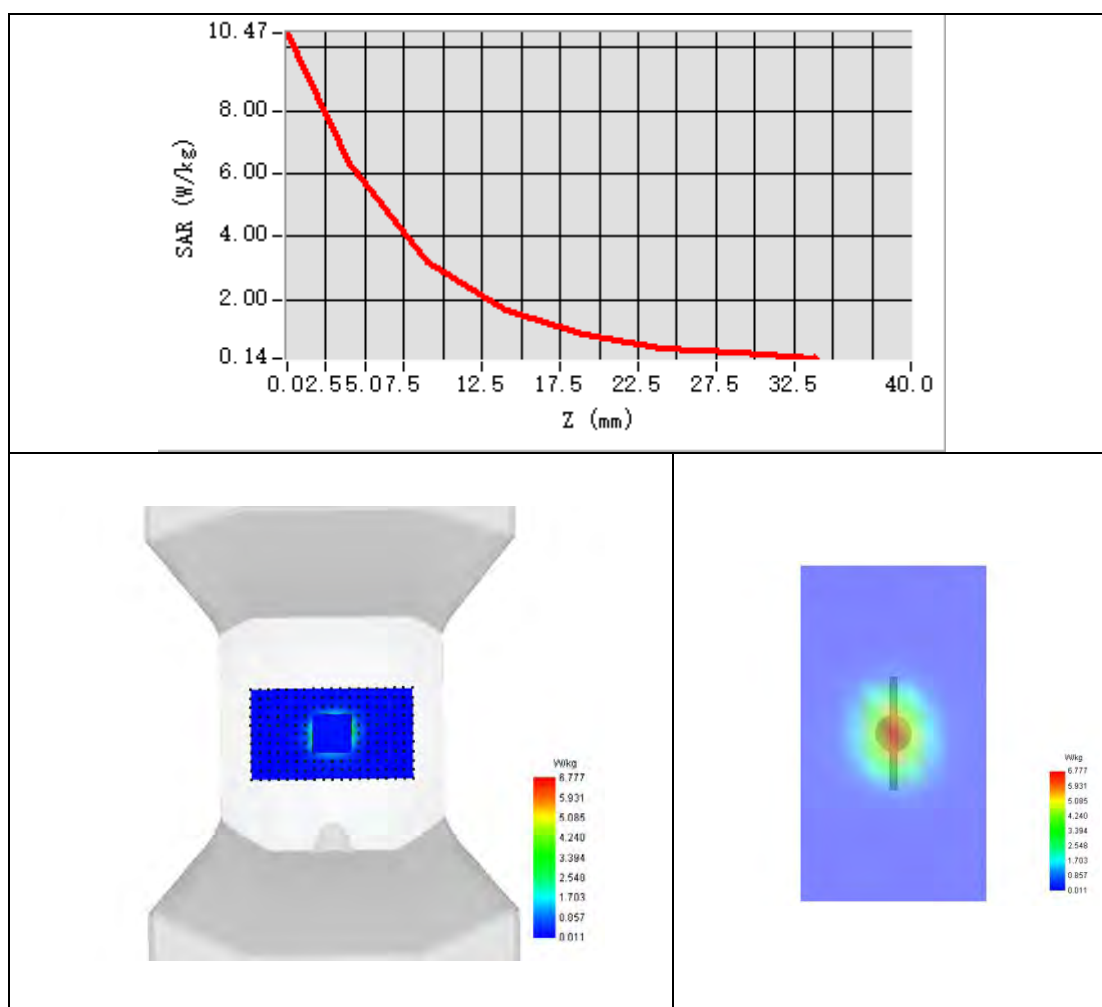



System Performance Check Data (2600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=8mm, dy=8mm, dz=5mm

Date of measurement:2025-01-02

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW2600
Channels	Middle
Signal	CW
Frequency (MHz)	2600.000
Relative permittivity	39.38
Conductivity (S/m)	1.91
Probe	SN 04/22 EPGO364
ConvF	2.35
Crest factor:	1:1

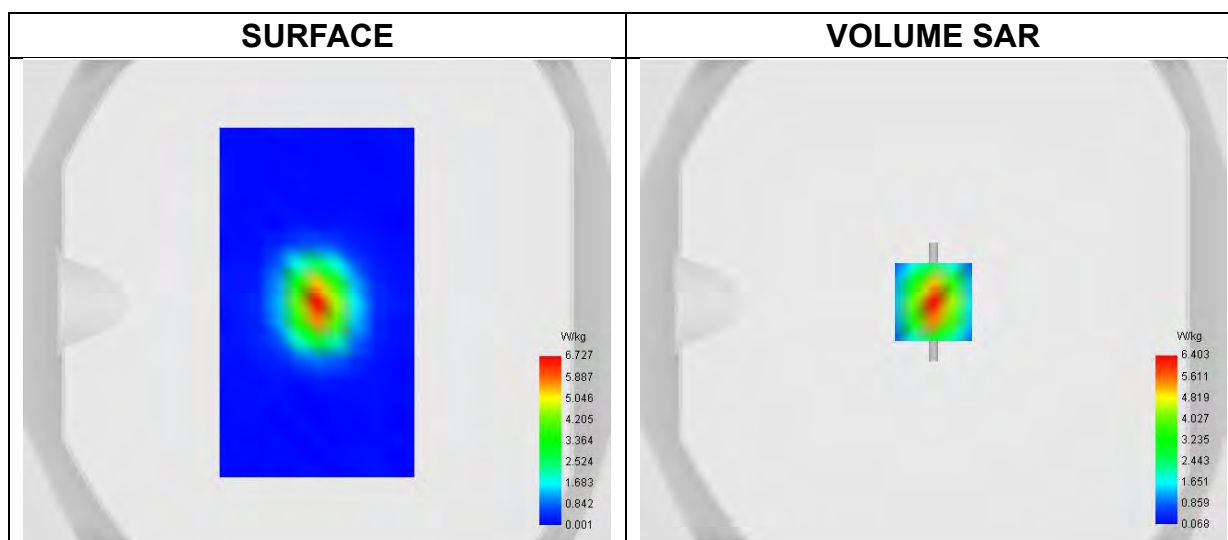


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 10.67 W/kg

SAR 10g (W/Kg)	2.388
SAR 1g (W/Kg)	5.681



Z Axis Scan

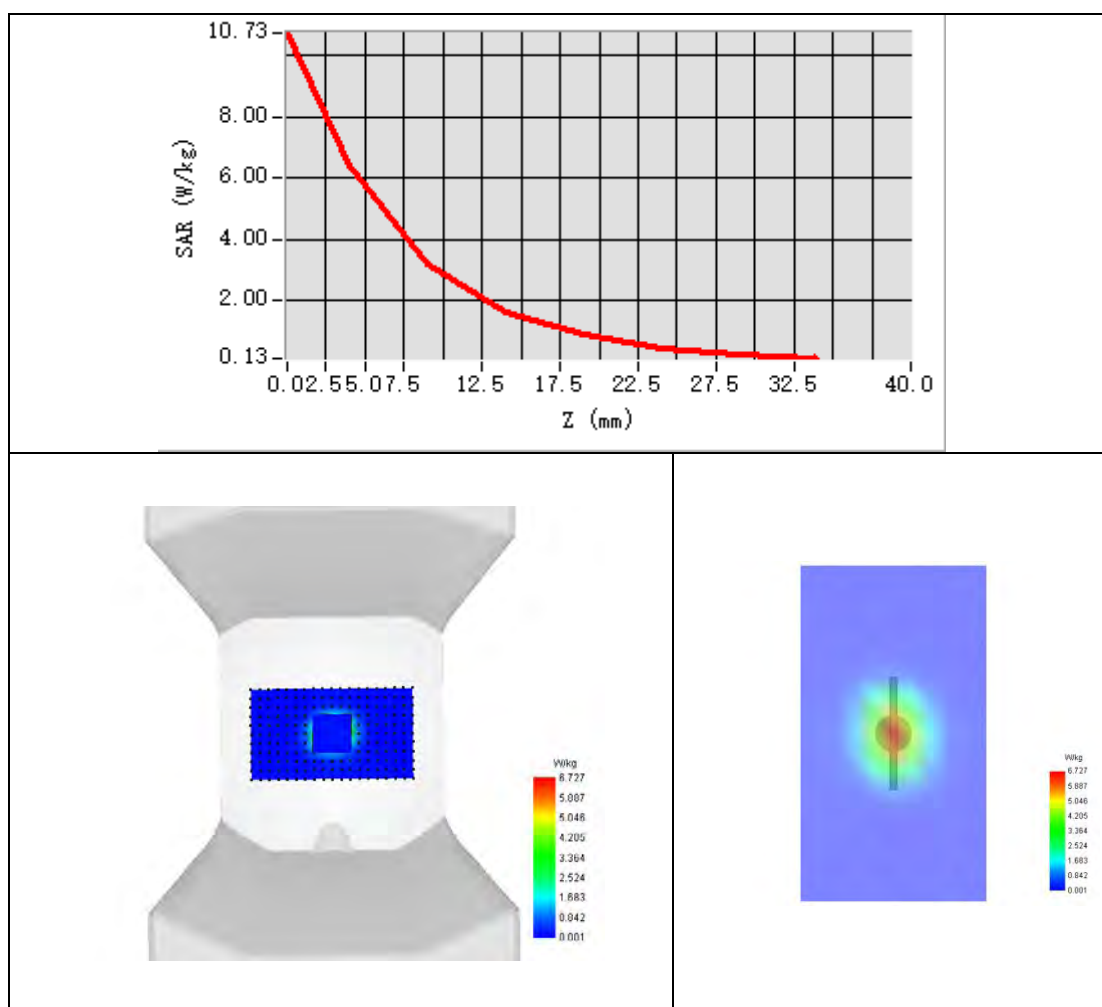



System Performance Check Data (5200MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2024-12-06

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5200
Channels	Middle
Signal	CW
Frequency (MHz)	5200.000
Relative permittivity	36.48
Conductivity (S/m)	4.65
Probe	SN 04/22 EPG0364
ConvF	1.98
Crest factor:	1:1

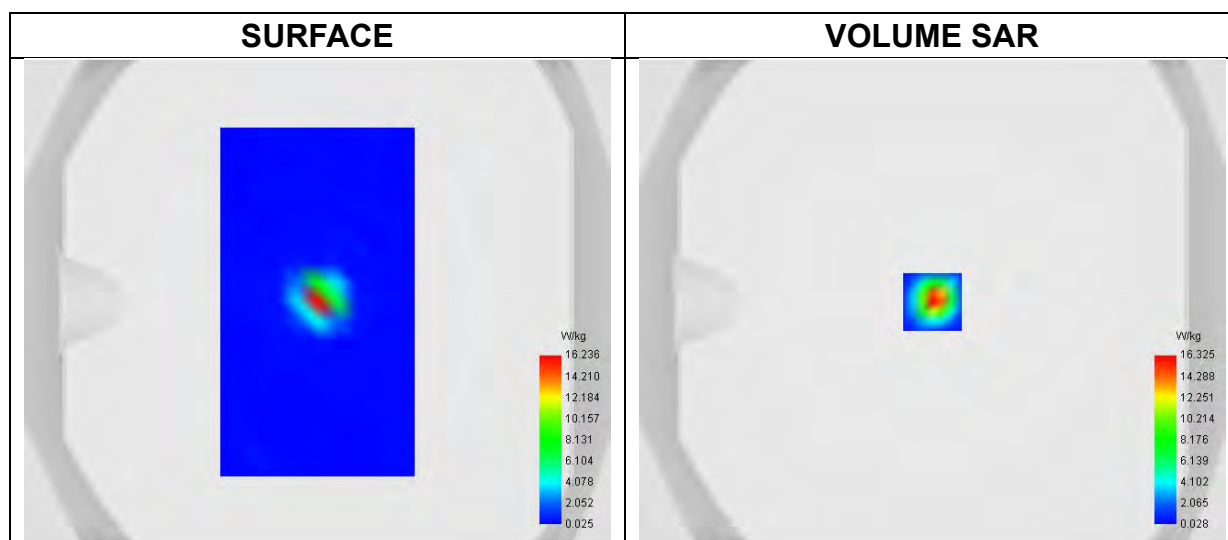


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 28.79 W/kg

SAR 10g (W/Kg)	2.312
SAR 1g (W/Kg)	8.105



Z Axis Scan

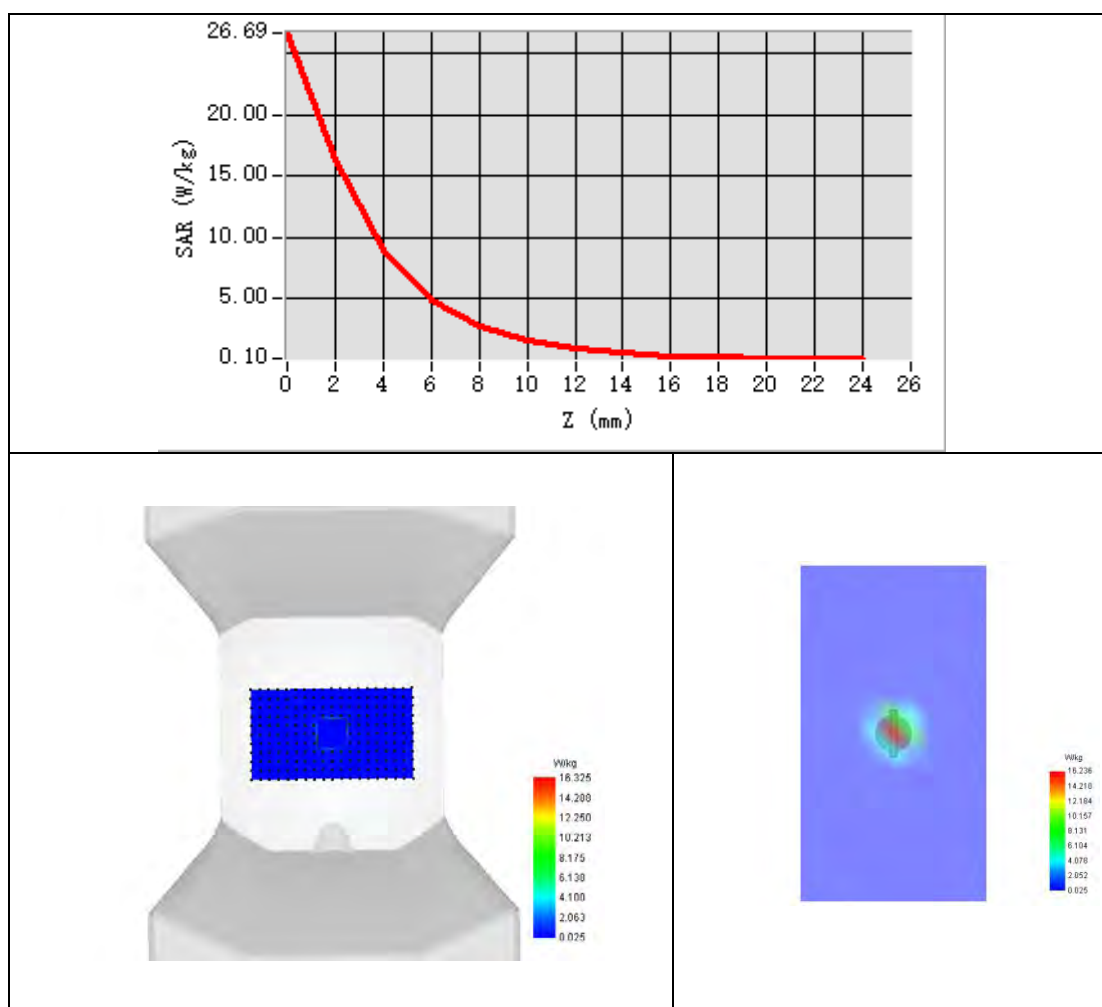



System Performance Check Data (5400MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2024-12-10

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5400
Channels	Middle
Signal	CW
Frequency (MHz)	5400.000
Relative permittivity	36.58
Conductivity (S/m)	4.83
Probe	SN 04/22 EPG0364
ConvF	1.83
Crest factor:	1:1

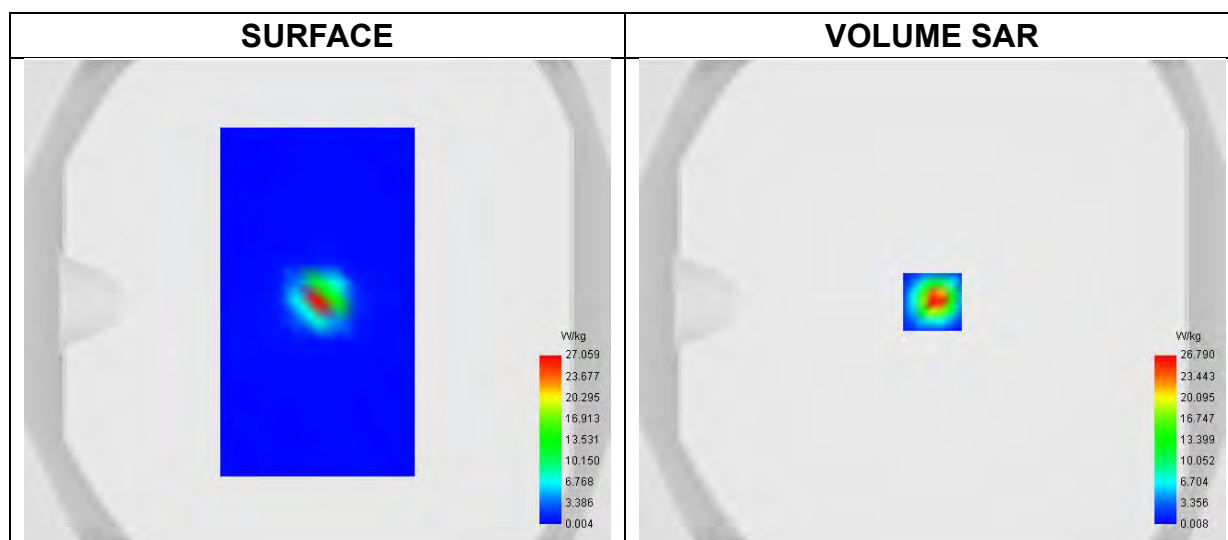


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 46.43 W/kg

SAR 10g (W/Kg)	2.384
SAR 1g (W/Kg)	8.458



Z Axis Scan

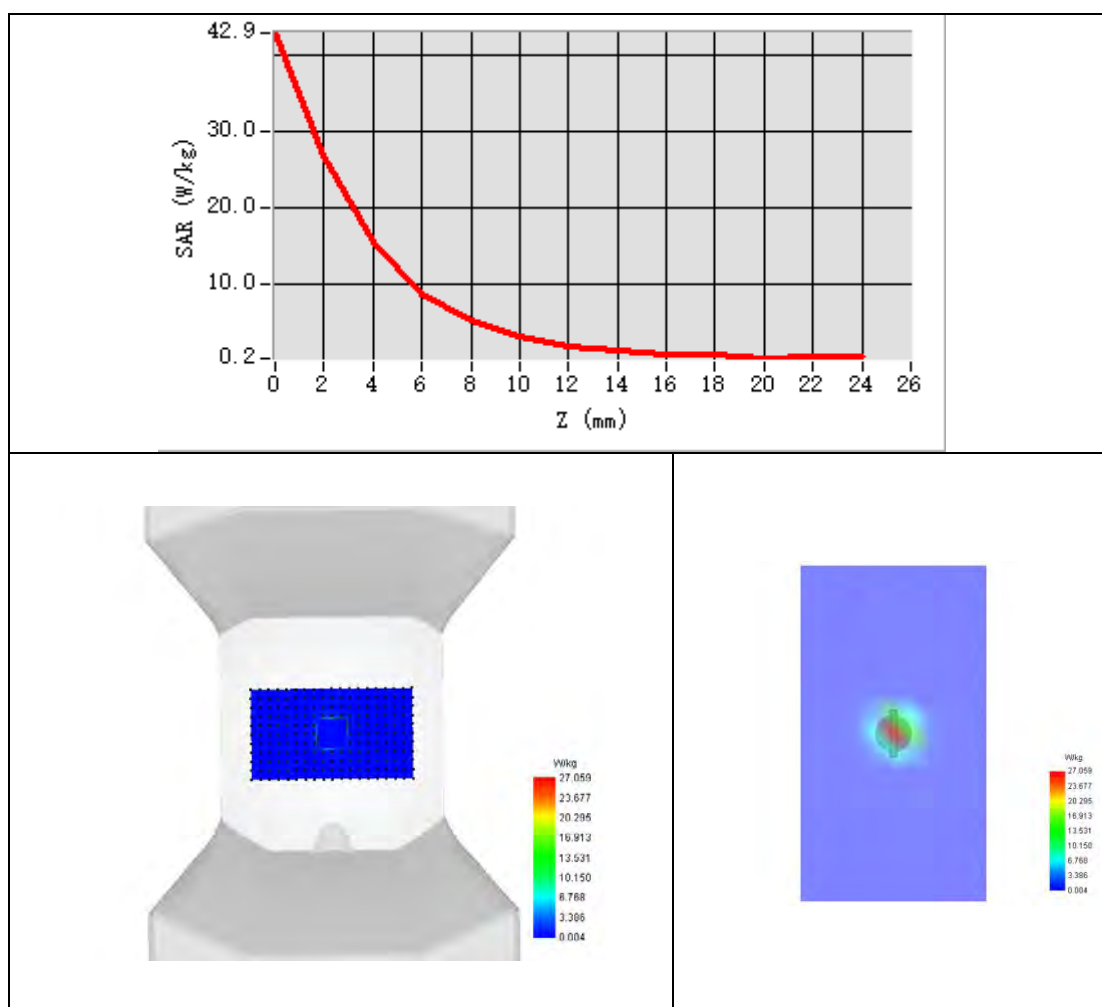



System Performance Check Data (5600MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2024-12-08

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5600
Channels	Middle
Signal	CW
Frequency (MHz)	5600.000
Relative permittivity	36.68
Conductivity (S/m)	5.08
Probe	SN 04/22 EPG0364
ConvF	1.86
Crest factor:	1:1

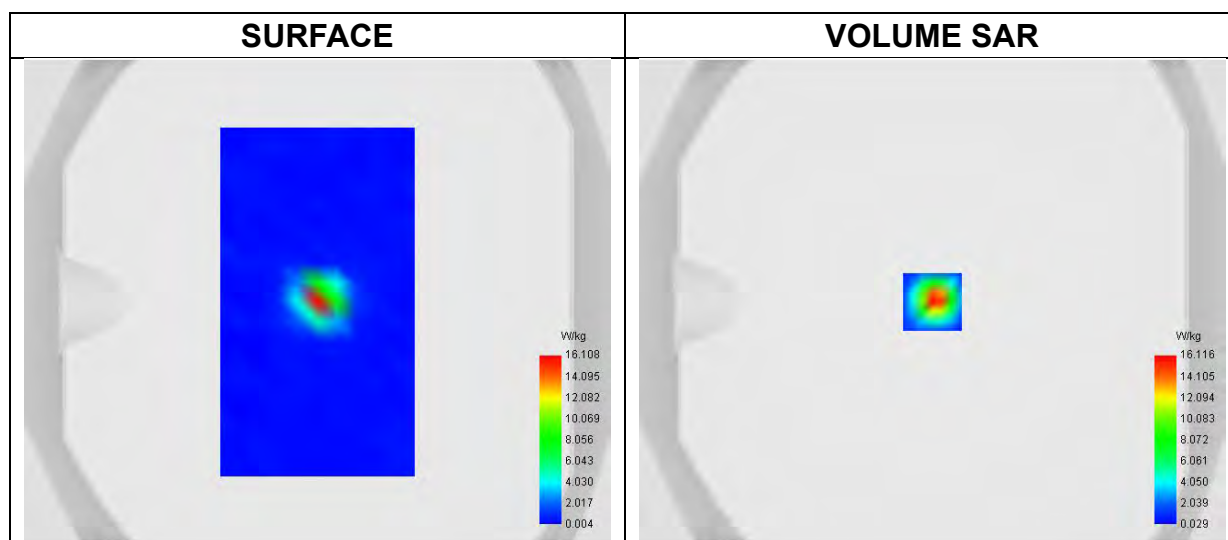


Maximum location: X=-0.00, Y=0.00 ; SAR Peak: 27.99 W/kg

SAR 10g (W/Kg)	2.374
SAR 1g (W/Kg)	8.065



Z Axis Scan

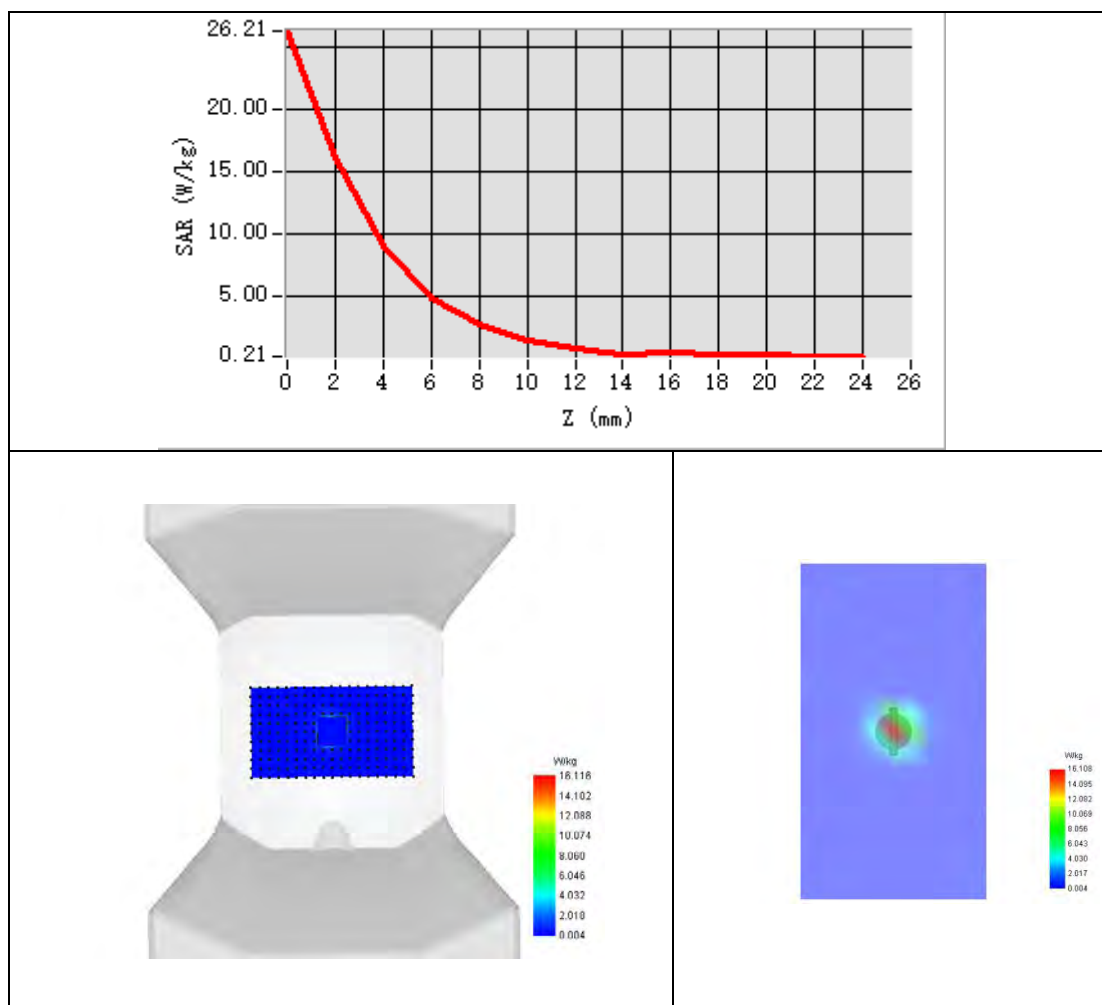



System Performance Check Data (5800MHz)

Type: Phone measurement (Complete)


Area scan resolution: dx=8mm, dy=8mm

Zoom scan resolution: dx=4mm, dy=4mm, dz=2mm

Date of measurement:2024-12-28

Experimental conditions.

Phantom	Validation plane
Device Position	Dipole
Band	CW5800
Channels	Middle
Signal	CW
Frequency (MHz)	5800.000
Relative permittivity	36.02
Conductivity (S/m)	5.31
Probe	SN 04/22 EPGO364
ConvF	1.71
Crest factor:	1:1

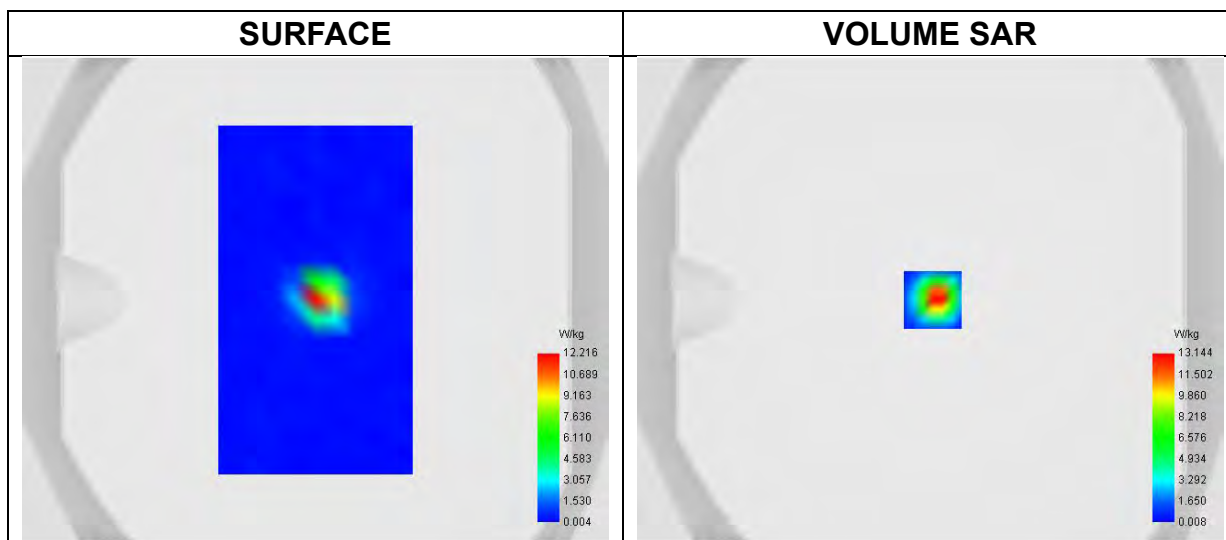


Maximum location: X=0.00, Y=0.00 ; SAR Peak: 24.09 W/kg

SAR 10g (W/Kg)	2.354
SAR 1g (W/Kg)	8.176



Z Axis Scan

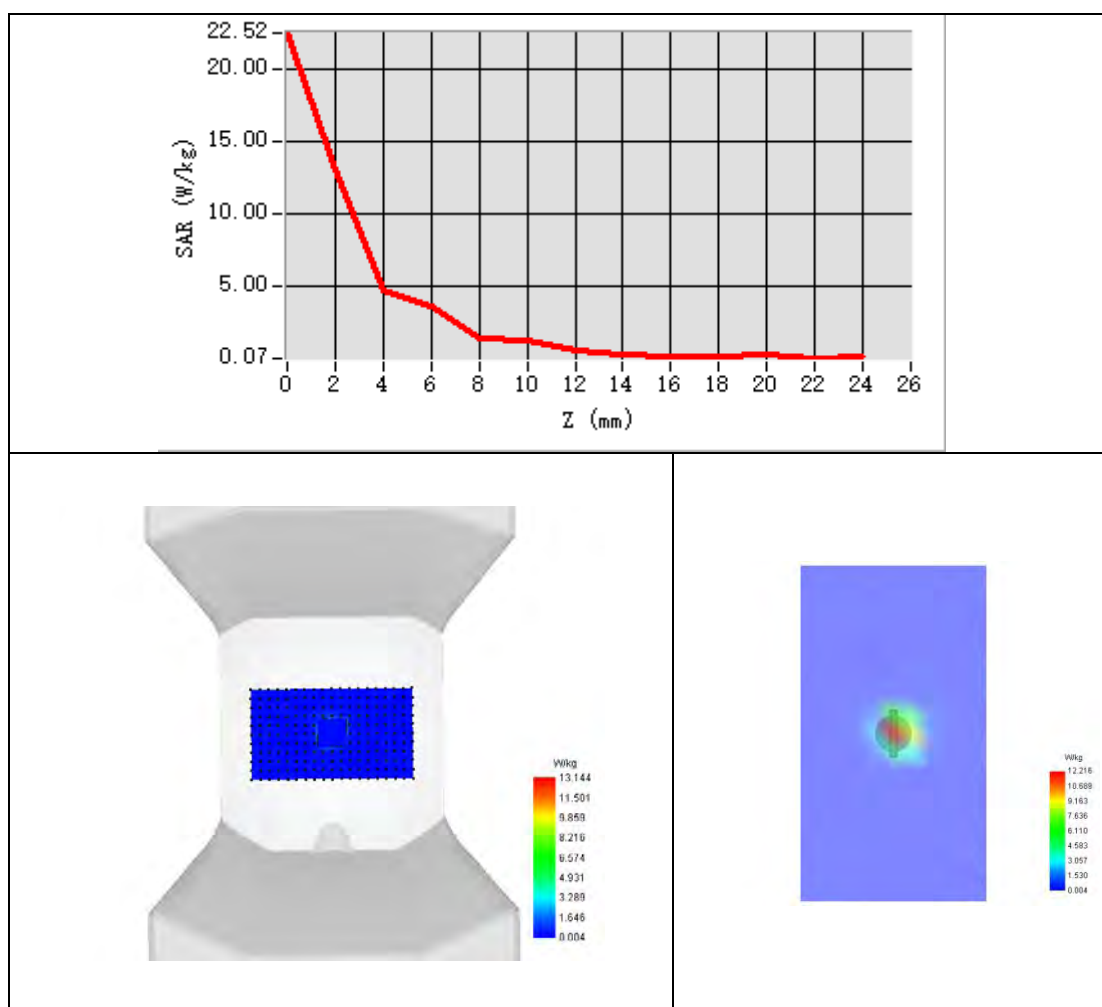




Appendix B. SAR Test Plots

Plot 1:

Test Date	2025-01-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GSM)
Frequency	848.5
SAR 10g (W/Kg)	0.556
SAR 1g (W/Kg)	0.865
ConvF	1.70
Relative permittivity	41.48
Conductivity (S/m)	0.92

Maximum location: X=-7.00, Y=-16.00 ; SAR Peak: 1.25 W/kg

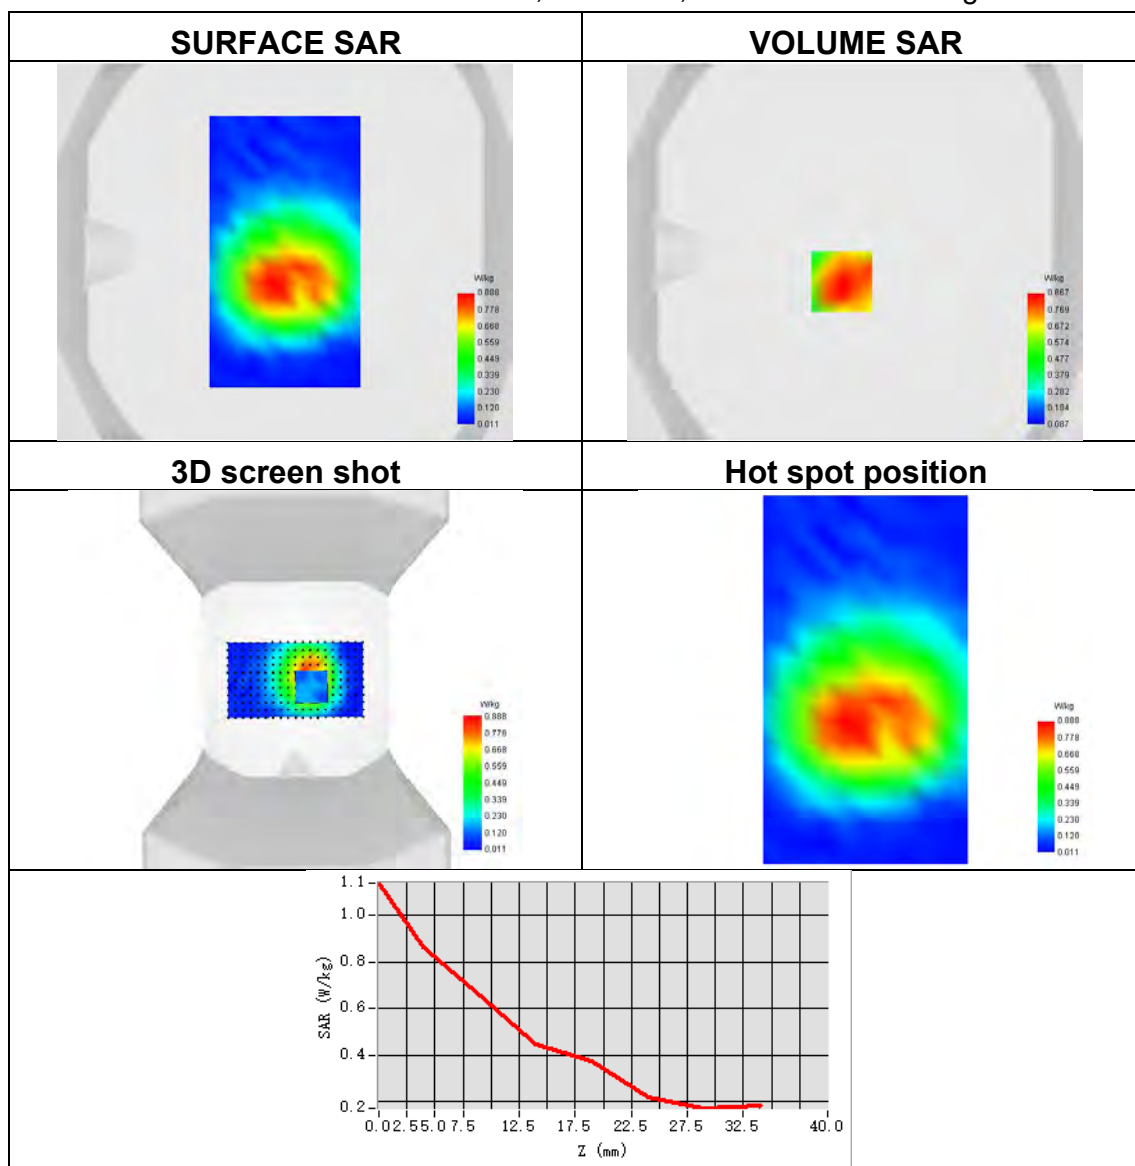




Plot 2:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.224
SAR 1g (W/Kg)	0.383
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=9.00, Y=-24.00 ; SAR Peak: 0.57 W/kg

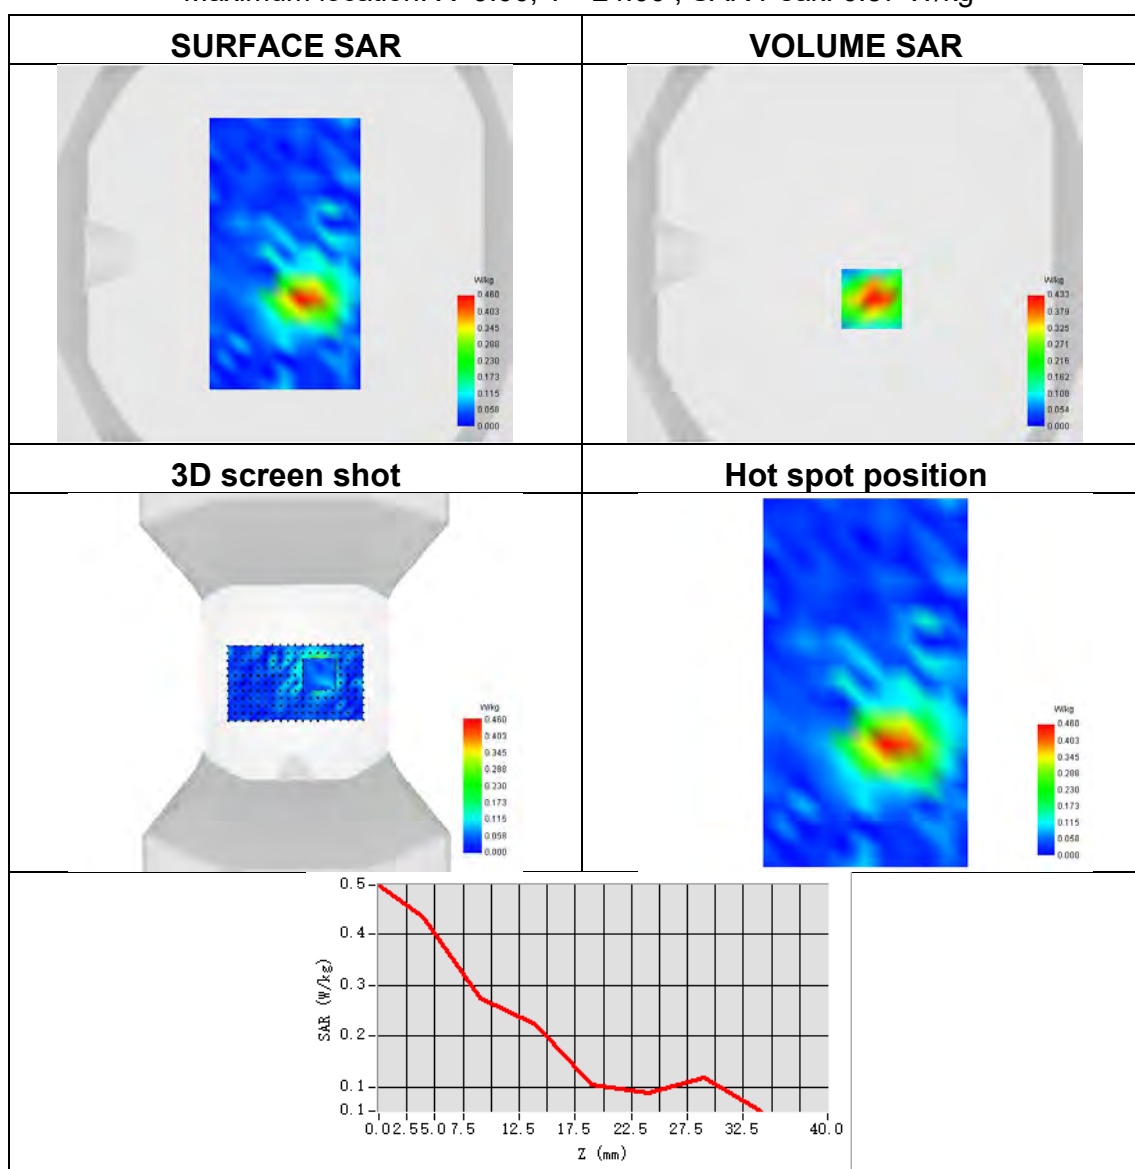




Plot 3:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.361
SAR 1g (W/Kg)	0.683
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=9.00, Y=-24.00 ; SAR Peak: 1.12 W/kg

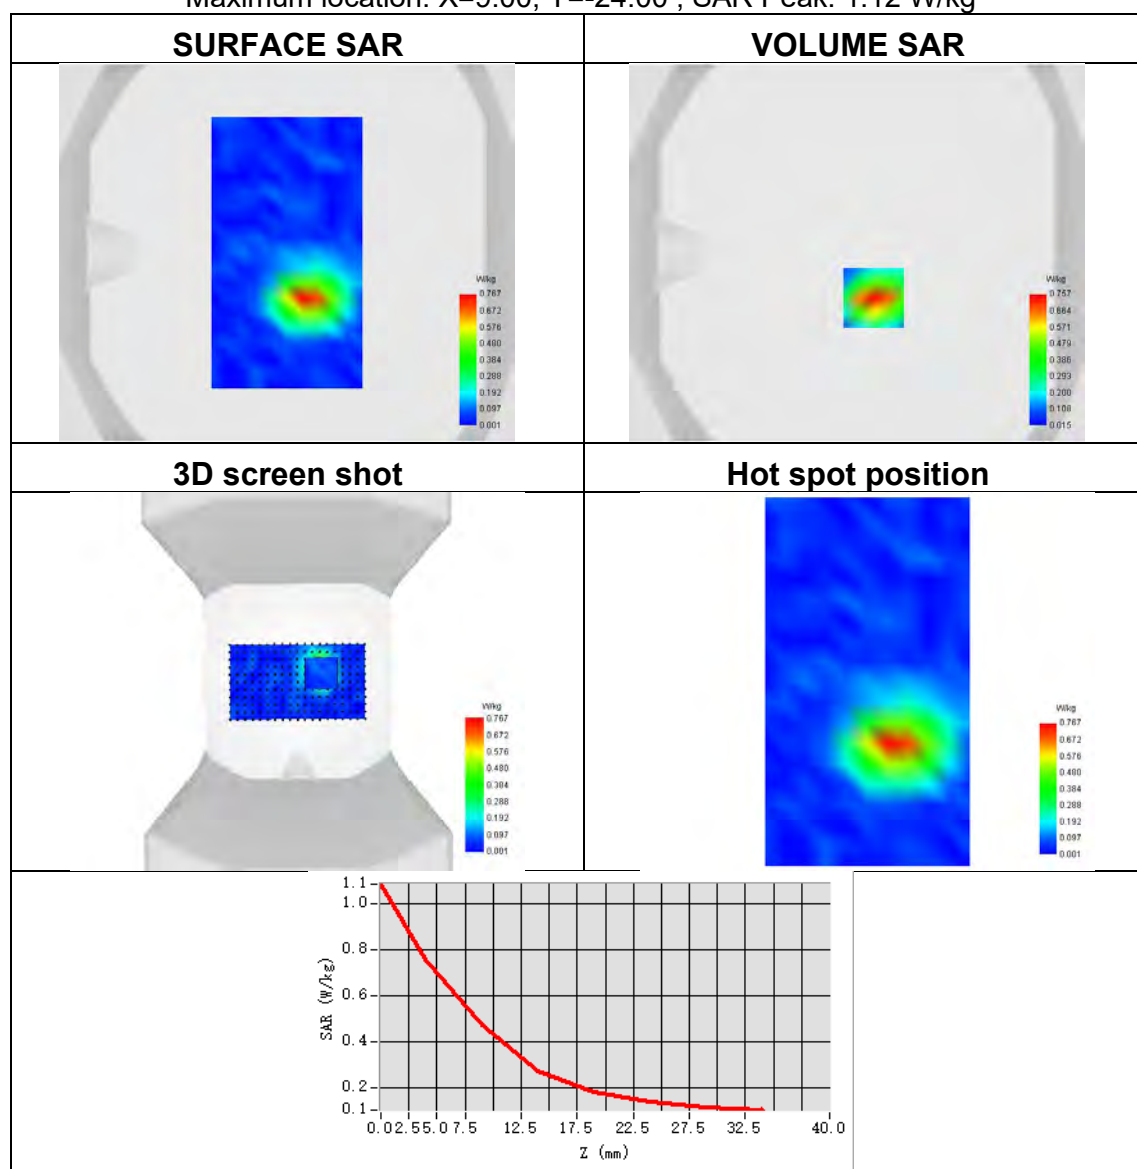




Plot 4:

Test Date	2024-12-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.347
SAR 1g (W/Kg)	0.650
ConvF	1.91
Relative permittivity	41.12
Conductivity (S/m)	1.38

Maximum location: X=16.00, Y=-24.00 ; SAR Peak: 1.08 W/kg

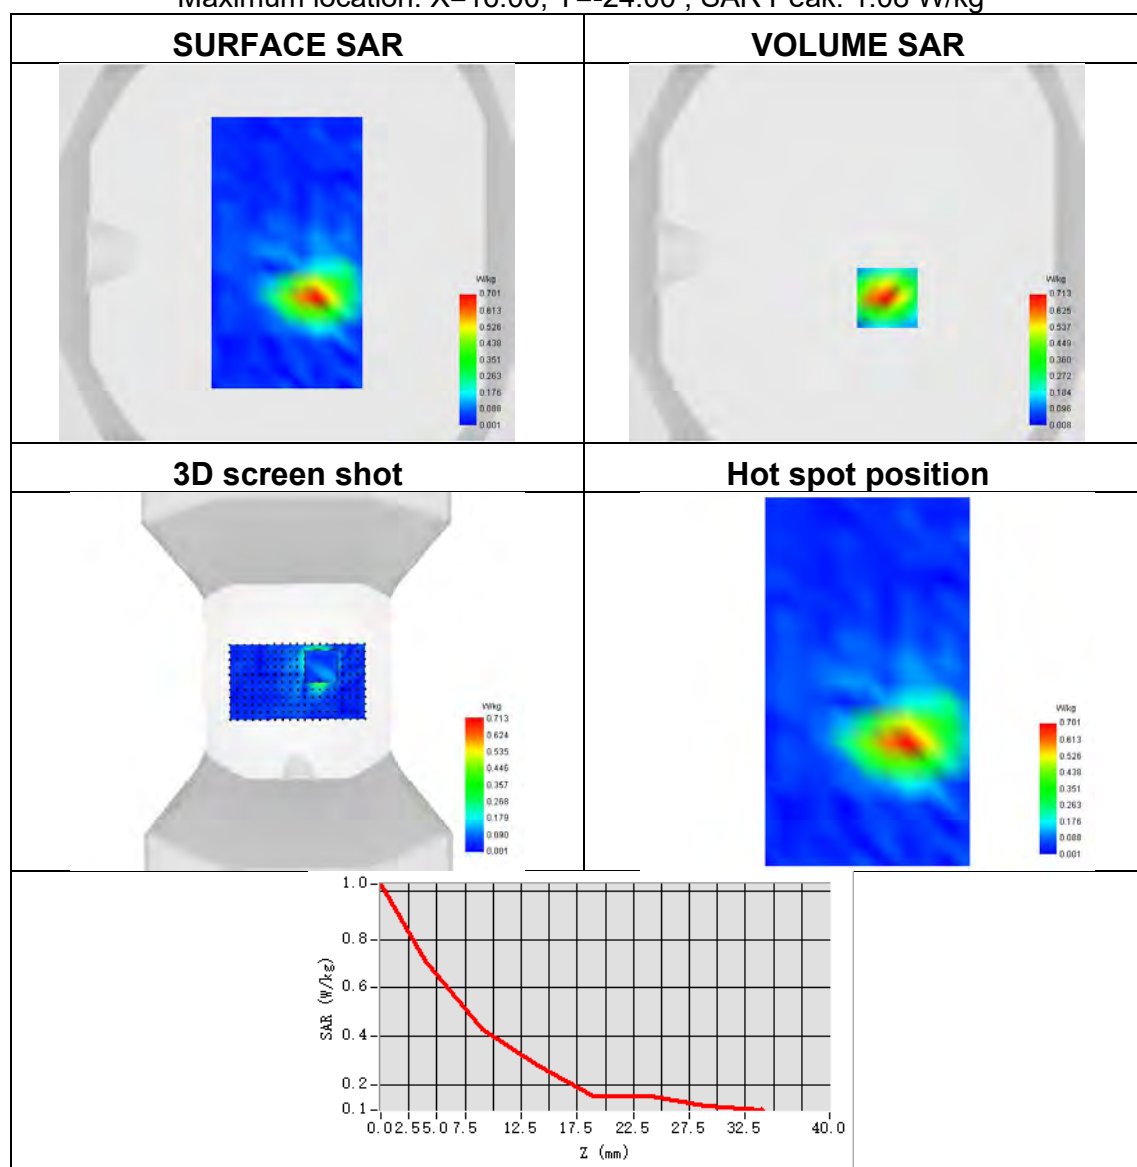




Plot 5:

Test Date	2024-12-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.602
SAR 1g (W/Kg)	0.957
ConvF	1.70
Relative permittivity	41.14
Conductivity (S/m)	0.92

Maximum location: X=3.00, Y=1.00 ; SAR Peak: 1.42 W/kg

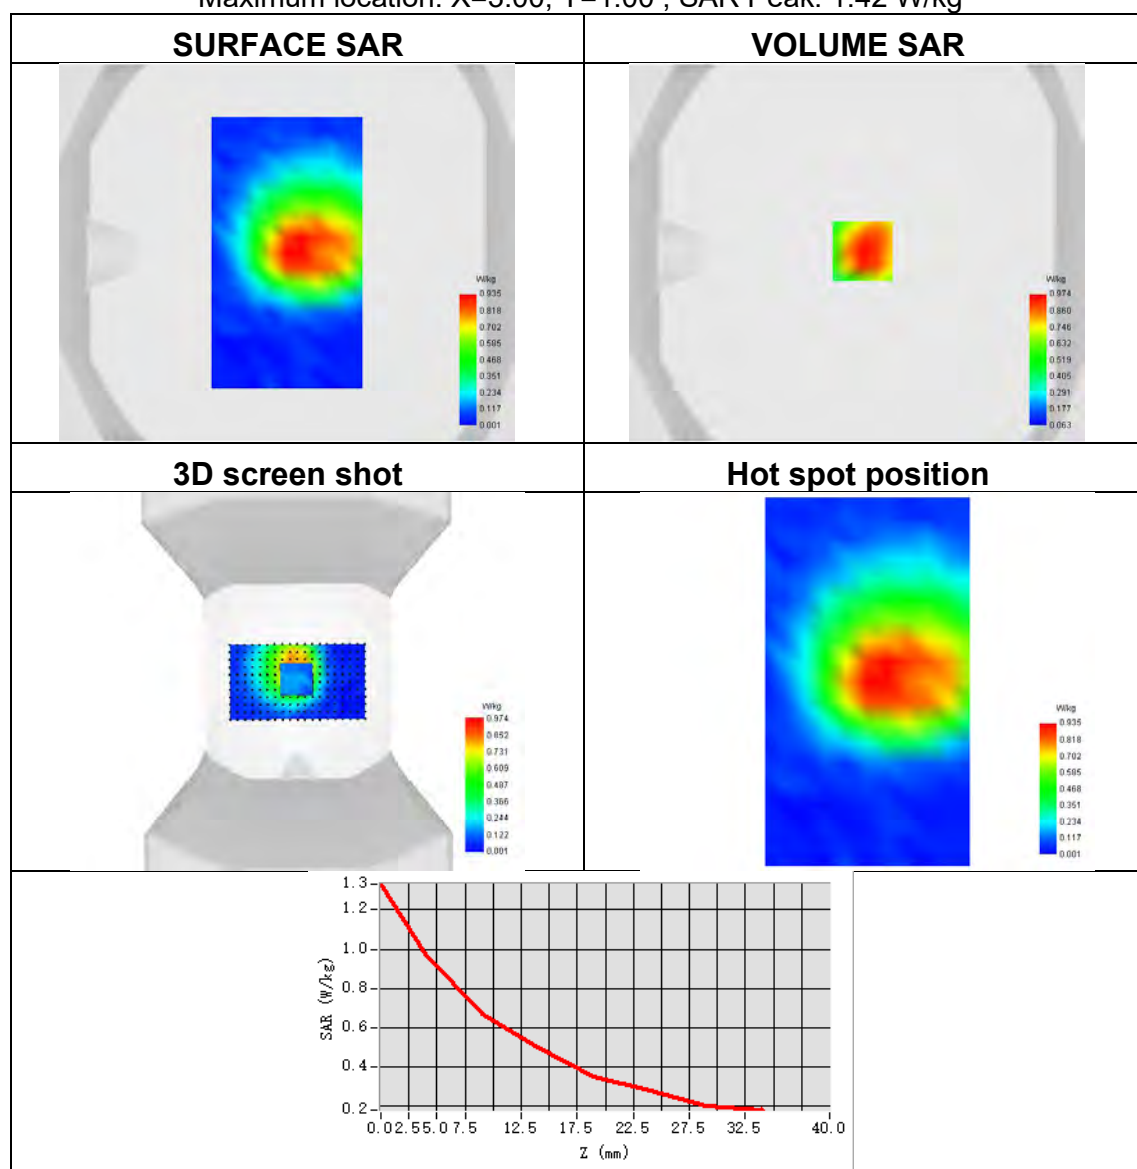




Plot 6:

Test Date	2024-12-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.279
ConvF	2.30
Relative permittivity	39.17
Conductivity (S/m)	1.76

Maximum location: X=11.00, Y=-3.00 ; SAR Peak: 0.54 W/kg

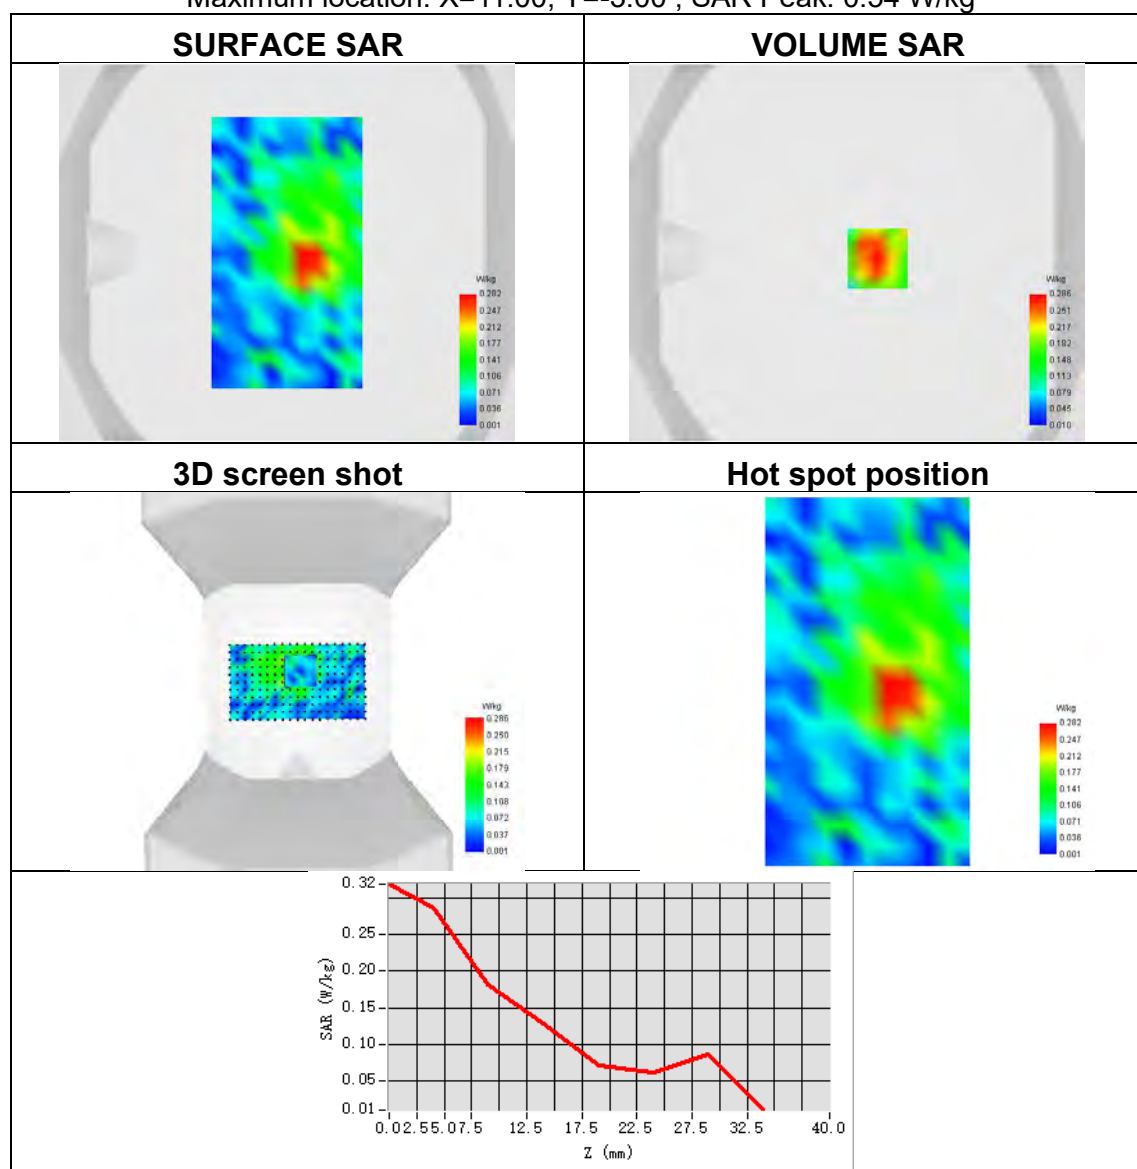




Plot 7:

Test Date	2024-12-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.165
SAR 1g (W/Kg)	0.397
ConvF	1.98
Relative permittivity	36.25
Conductivity (S/m)	4.68

Maximum location: X=2.00, Y=-6.00 ; SAR Peak: 1.77 W/kg

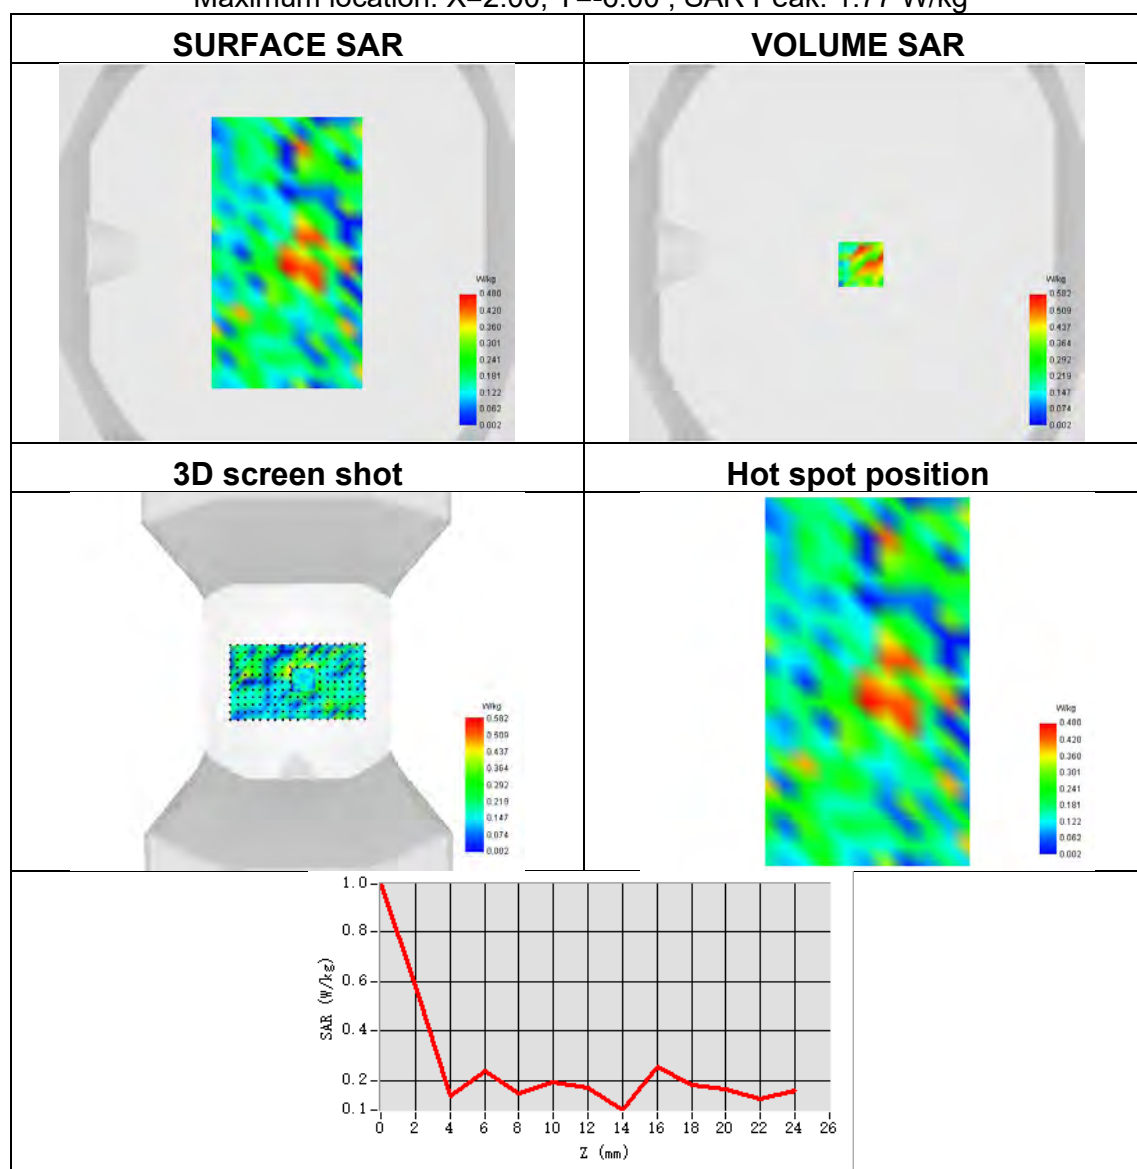




Plot 8:

Test Date	2024-12-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.310
ConvF	1.83
Relative permittivity	36.62
Conductivity (S/m)	4.74

Maximum location: X=8.00, Y=-12.00 ; SAR Peak: 1.57 W/kg

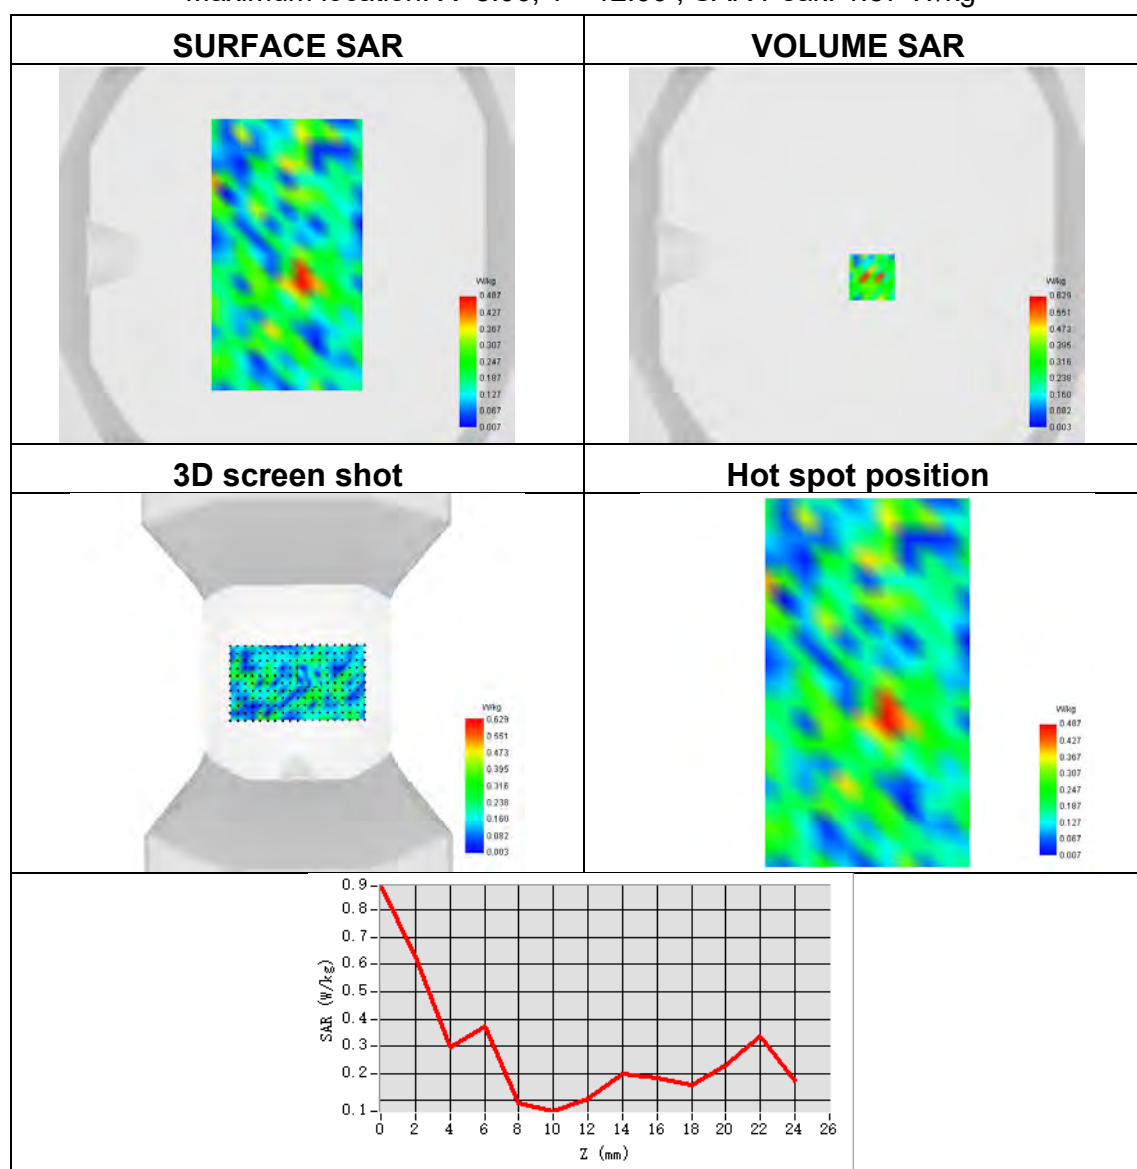




Plot 9:

Test Date	2024-12-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.259
ConvF	1.86
Relative permittivity	36.53
Conductivity (S/m)	5.13

Maximum location: X=16.00, Y=8.00 ; SAR Peak: 1.56 W/kg

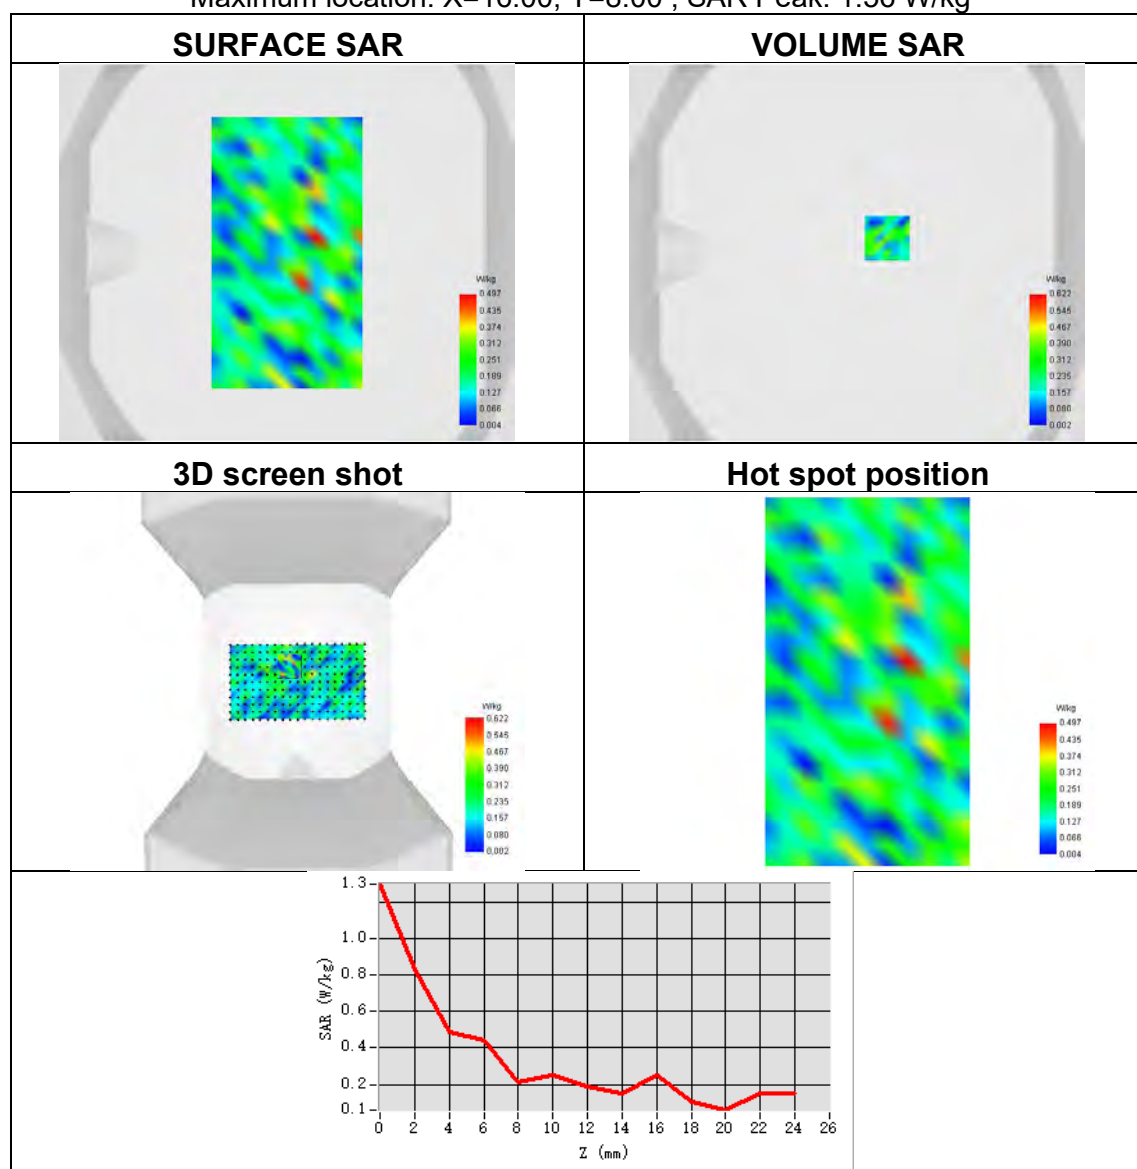




Plot 10:

Test Date	2024-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.183
SAR 1g (W/Kg)	0.341
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.16

Maximum location: X=-16.00, Y=-48.00 ; SAR Peak: 2.00 W/kg

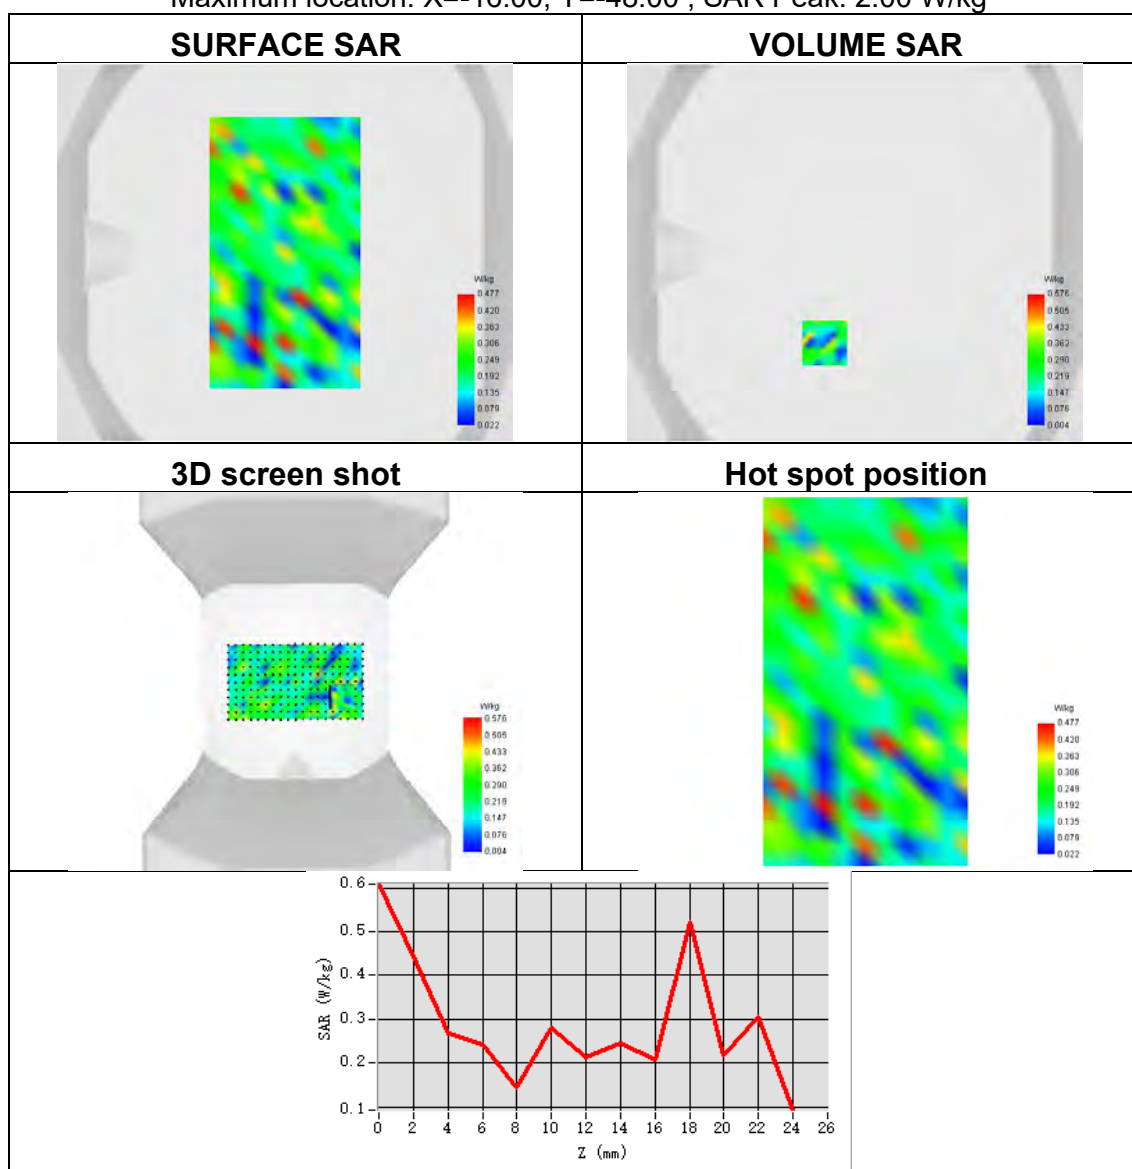




Plot 11:

Test Date	2024-12-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.435
SAR 1g (W/Kg)	0.863
ConvF	2.24
Relative permittivity	40.79
Conductivity (S/m)	1.45

Maximum location: X=16.00, Y=-32.00 ; SAR Peak: 1.45 W/kg

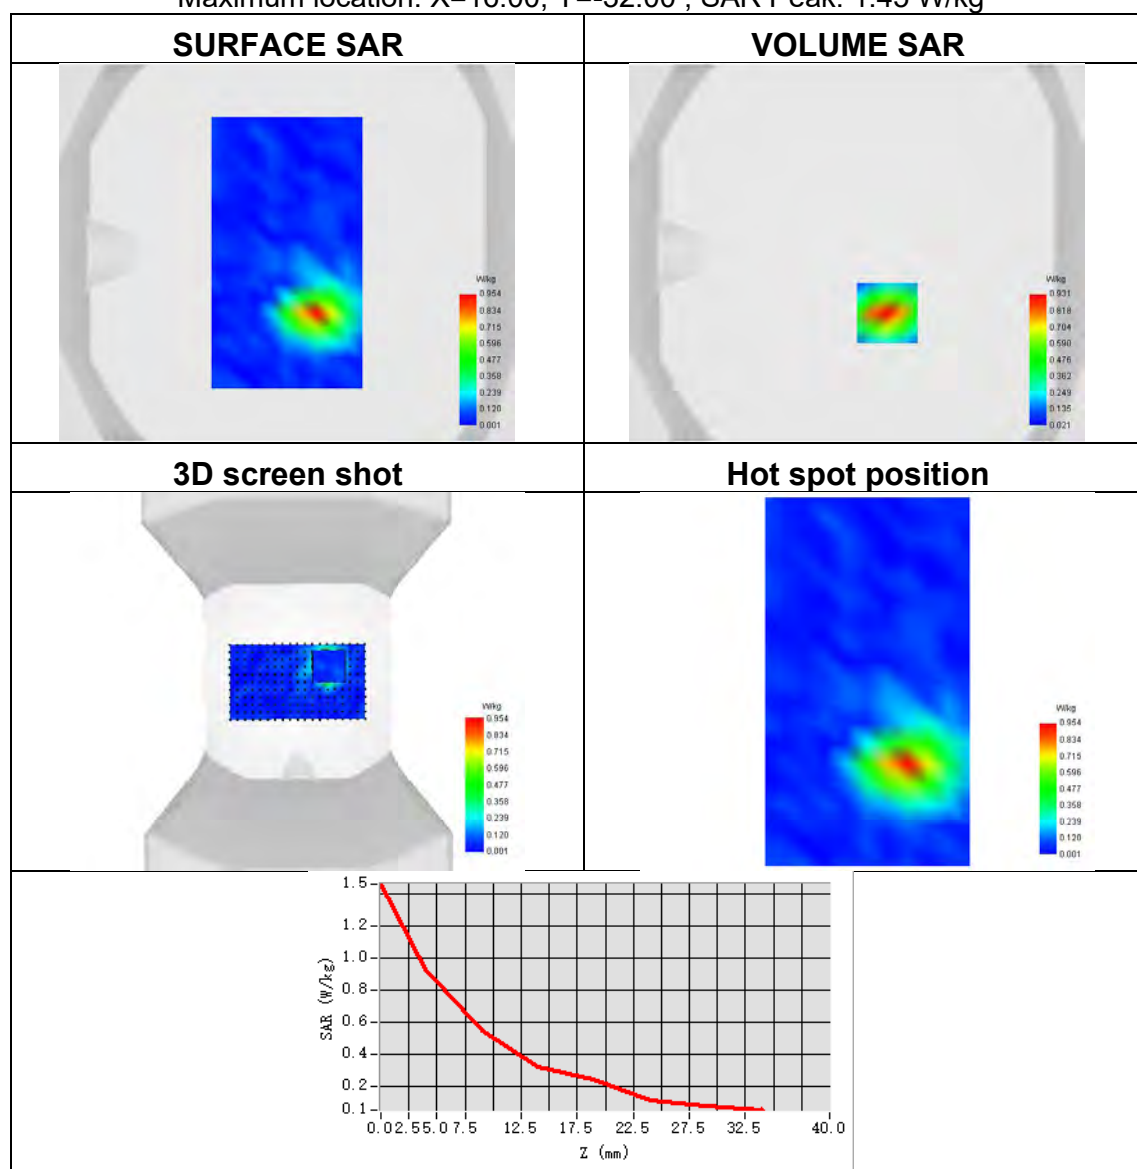




Plot 12:

Test Date	2024-12-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.368
SAR 1g (W/Kg)	0.708
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.42


Maximum location: X=16.00, Y=-33.00 ; SAR Peak: 1.20 W/kg

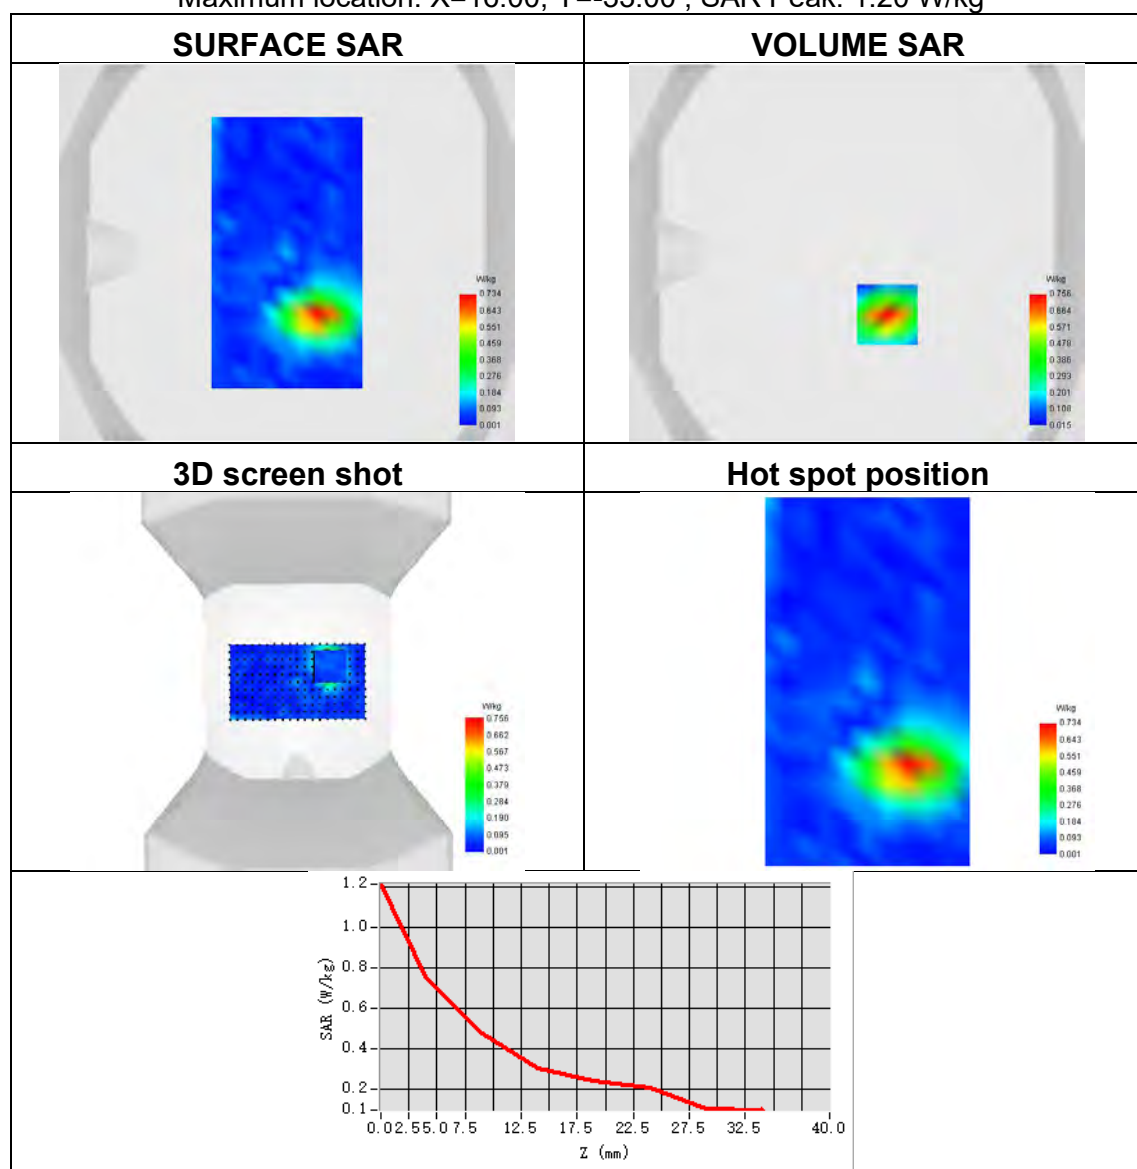

Plot 13:

Test Date	2024-12-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	836.5
SAR 10g (W/Kg)	0.460
SAR 1g (W/Kg)	0.717
ConvF	1.70
Relative permittivity	41.34
Conductivity (S/m)	0.88


Maximum location: X=-1.00, Y=-23.00 ; SAR Peak: 1.11 W/kg

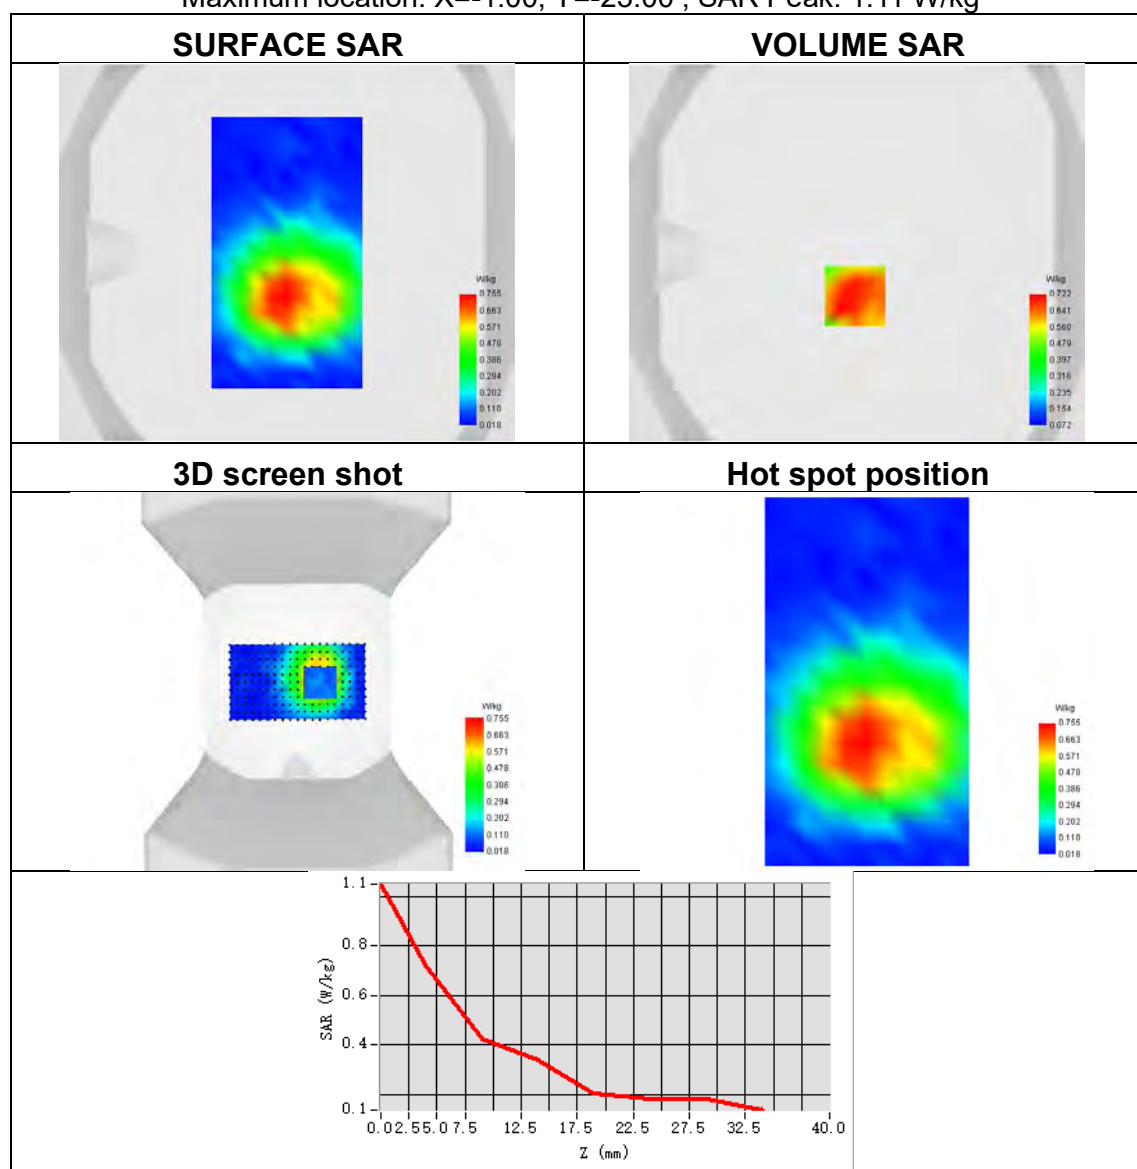

Plot 14:

Test Date	2024-12-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.319
SAR 1g (W/Kg)	0.660
ConvF	2.35
Relative permittivity	39.60
Conductivity (S/m)	1.91

Maximum location: X=7.00, Y=-32.00 ; SAR Peak: 1.15 W/kg

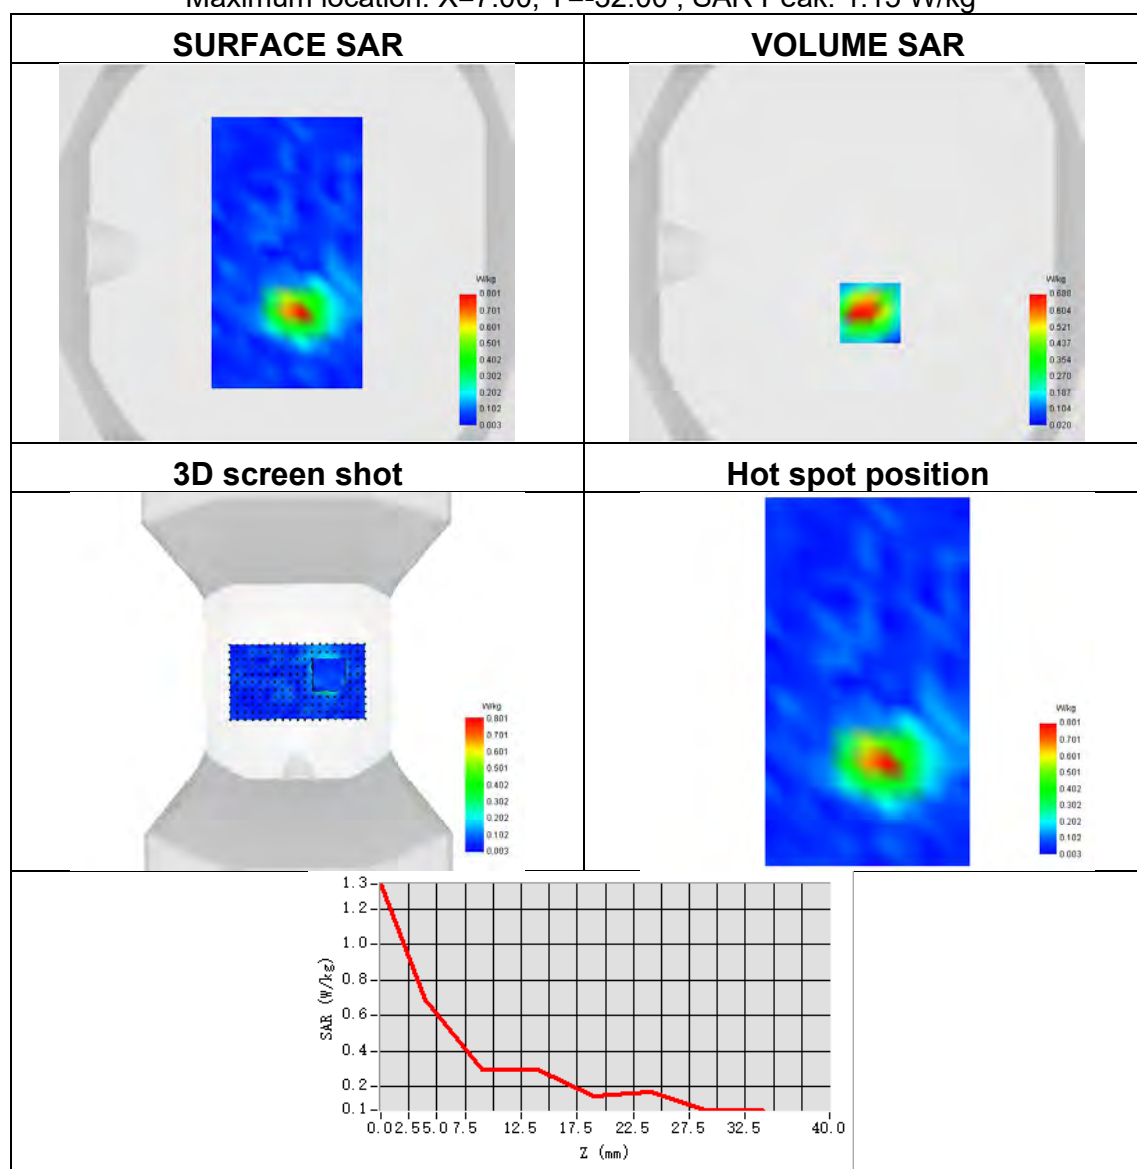




Plot 15:

Test Date	2024-12-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.575
SAR 1g (W/Kg)	1.012
ConvF	1.68
Relative permittivity	42.52
Conductivity (S/m)	0.90

Maximum location: X=15.00, Y=-30.00 ; SAR Peak: 1.55 W/kg

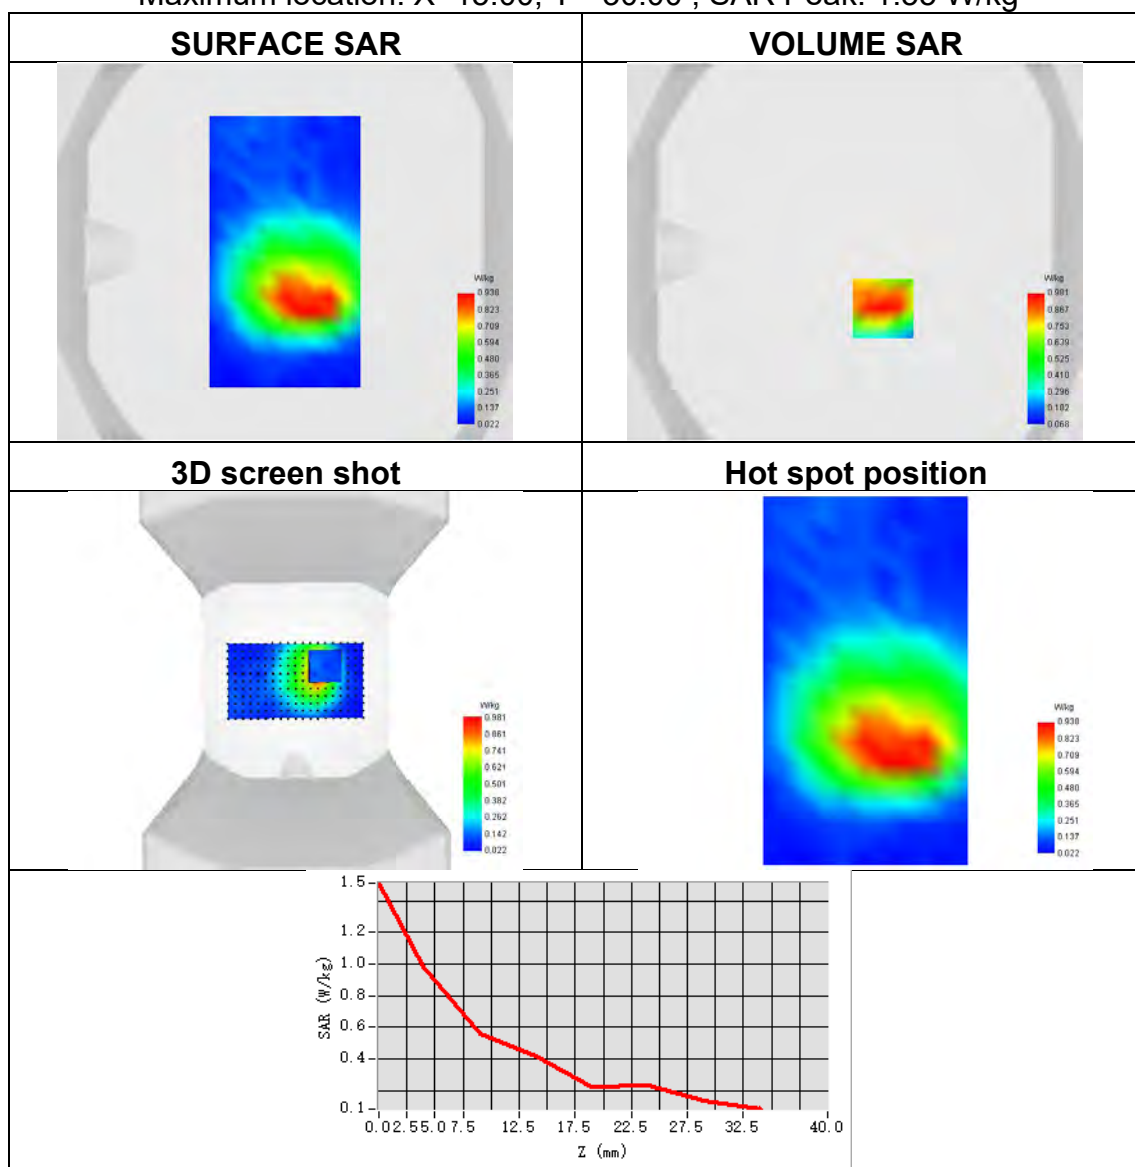




Plot 16:

Test Date	2024-12-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.283
SAR 1g (W/Kg)	0.511
ConvF	1.68
Relative permittivity	42.55
Conductivity (S/m)	0.92

Maximum location: X=6.00, Y=-49.00 ; SAR Peak: 0.81 W/kg

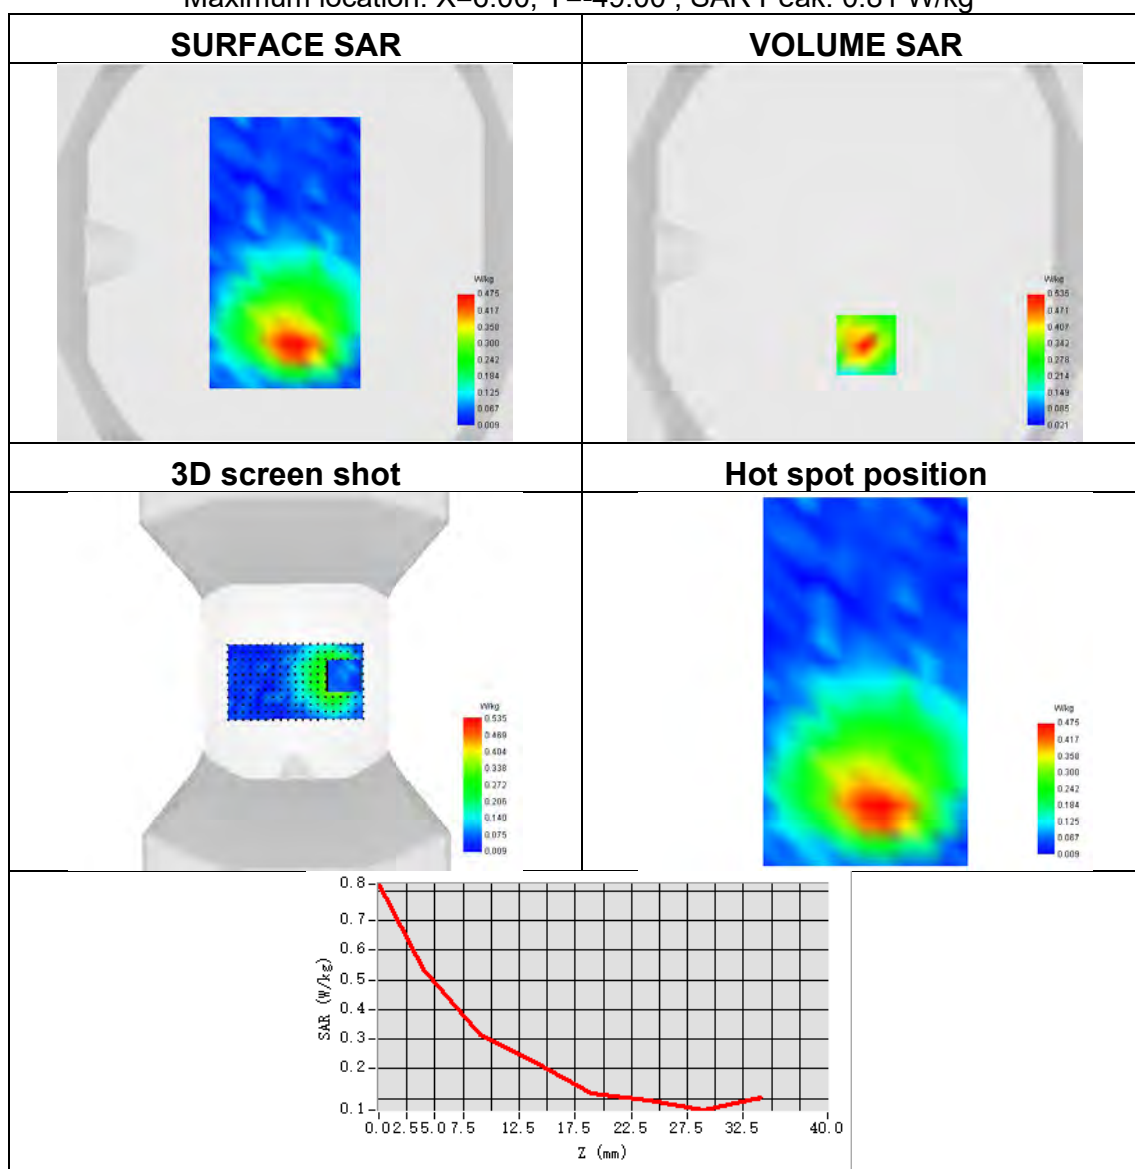




Plot 17:

Test Date	2024-12-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.402
SAR 1g (W/Kg)	0.770
ConvF	2.24
Relative permittivity	40.83
Conductivity (S/m)	1.37


Maximum location: X=16.00, Y=-33.00 ; SAR Peak: 1.25 W/kg

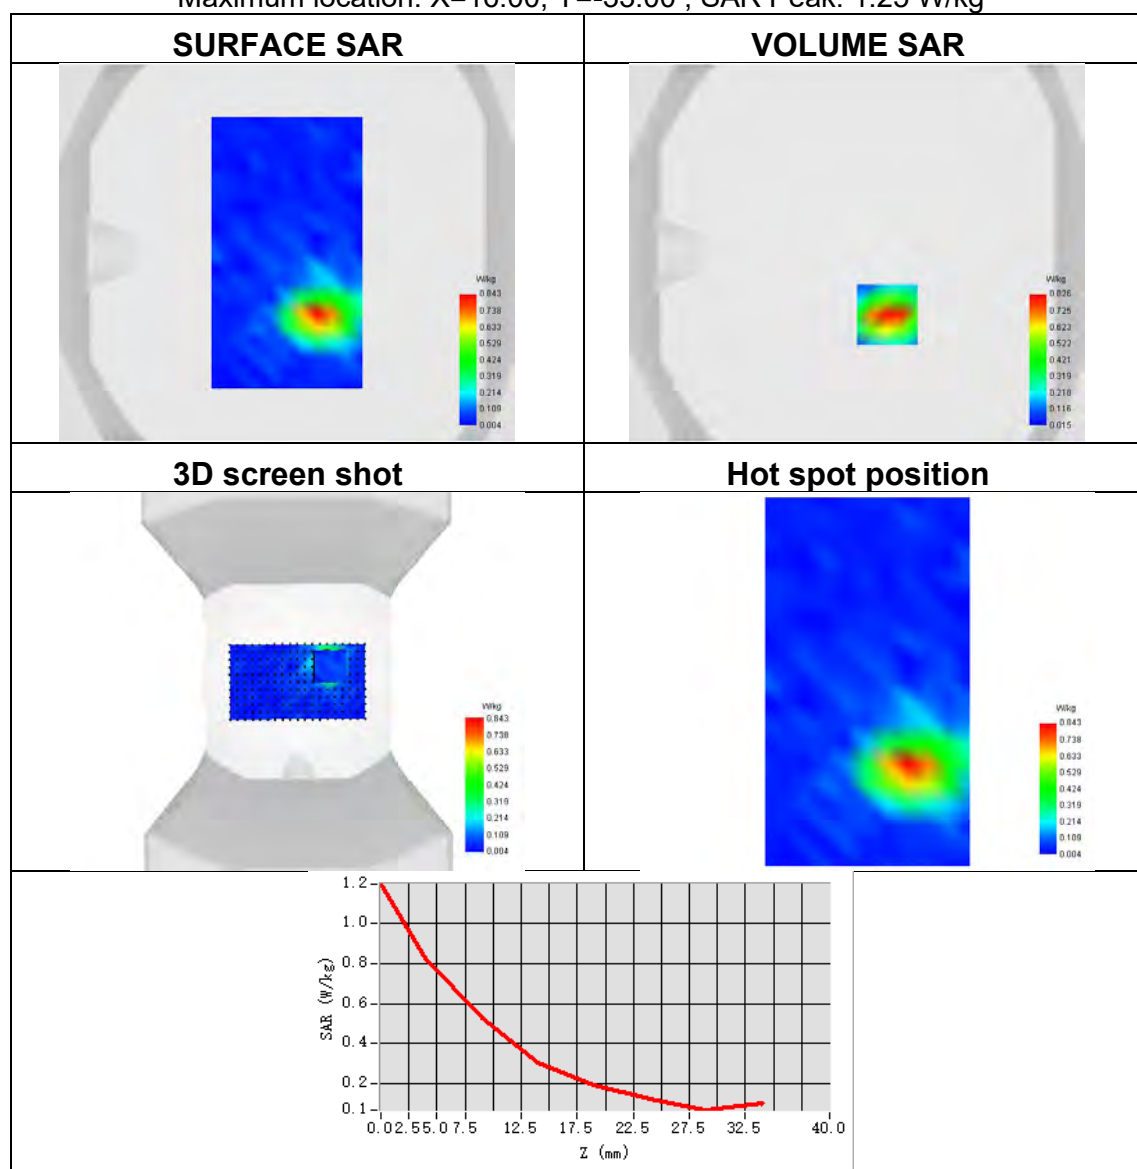

Plot 18:

Test Date	2024-12-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	0.464
SAR 1g (W/Kg)	0.749
ConvF	1.70
Relative permittivity	41.27
Conductivity (S/m)	0.93

Maximum location: X=0.00, Y=-24.00 ; SAR Peak: 1.21 W/kg

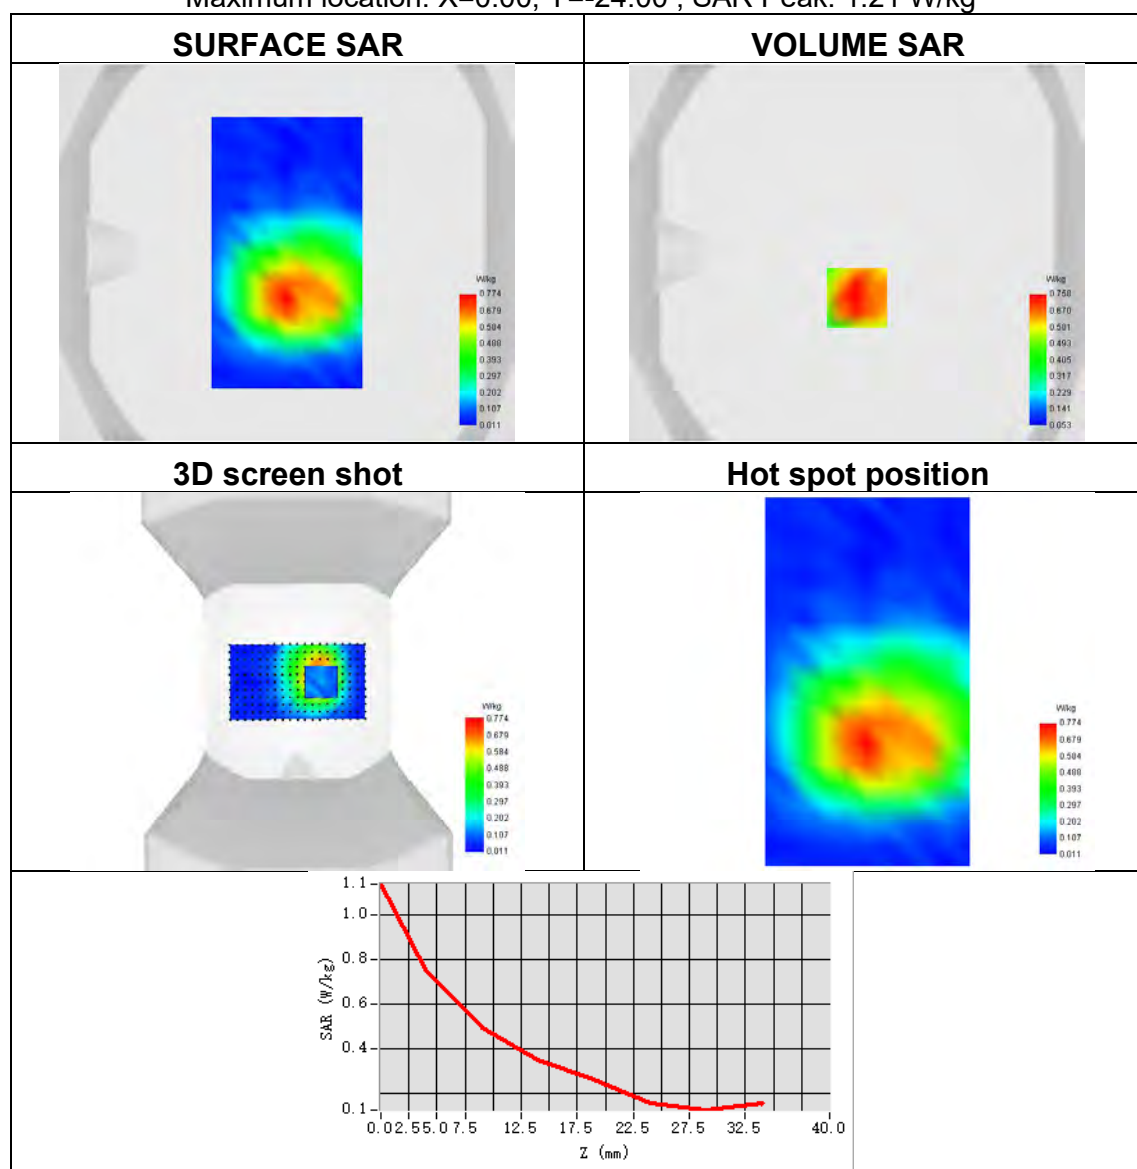




Plot 19:

Test Date	2024-12-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2580
SAR 10g (W/Kg)	0.397
SAR 1g (W/Kg)	0.871
ConvF	2.35
Relative permittivity	39.41
Conductivity (S/m)	1.98

Maximum location: X=7.00, Y=-27.00 ; SAR Peak: 1.64 W/kg

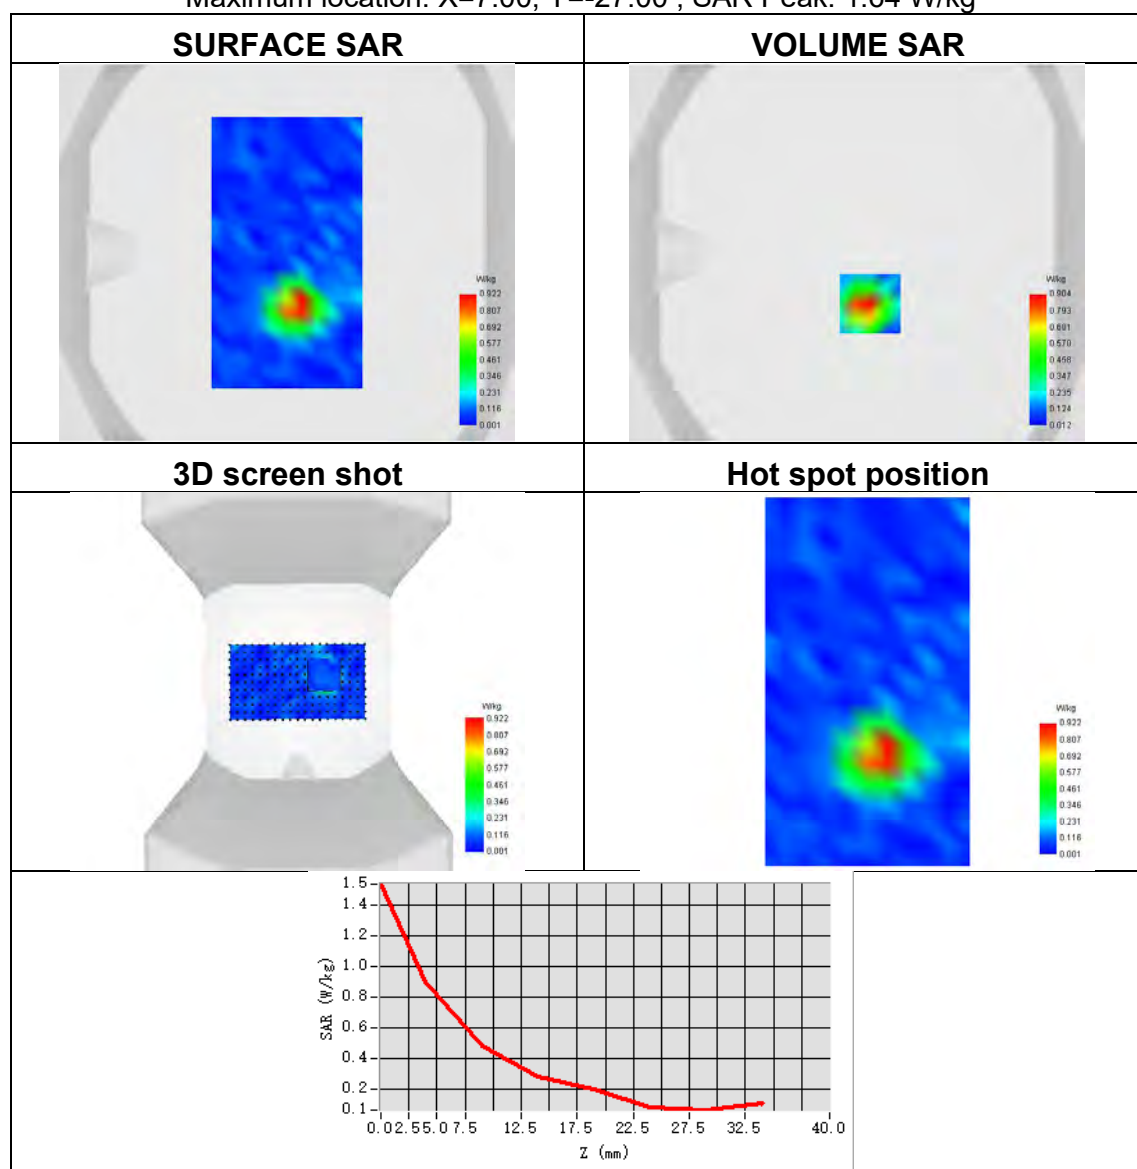




Plot 20:

Test Date	2025-01-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2680
SAR 10g (W/Kg)	0.323
SAR 1g (W/Kg)	0.675
ConvF	2.35
Relative permittivity	39.69
Conductivity (S/m)	2.07

Maximum location: X=7.00, Y=-26.00 ; SAR Peak: 1.24 W/kg

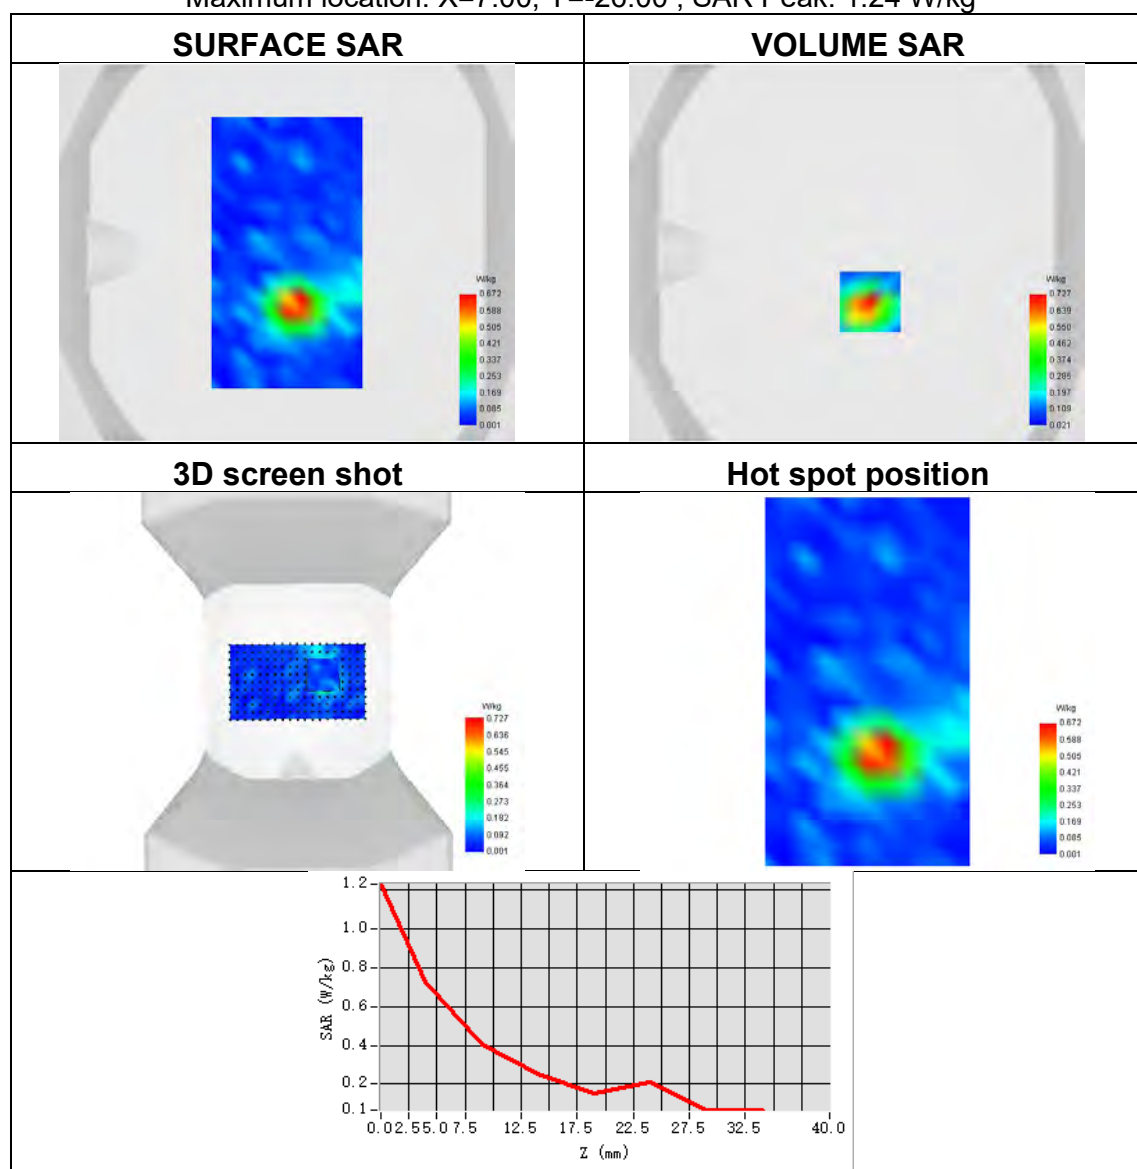




Plot 21:

Test Date	2024-12-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.381
SAR 1g (W/Kg)	0.746
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.42

Maximum location: X=11.00, Y=-18.00 ; SAR Peak: 1.28 W/kg

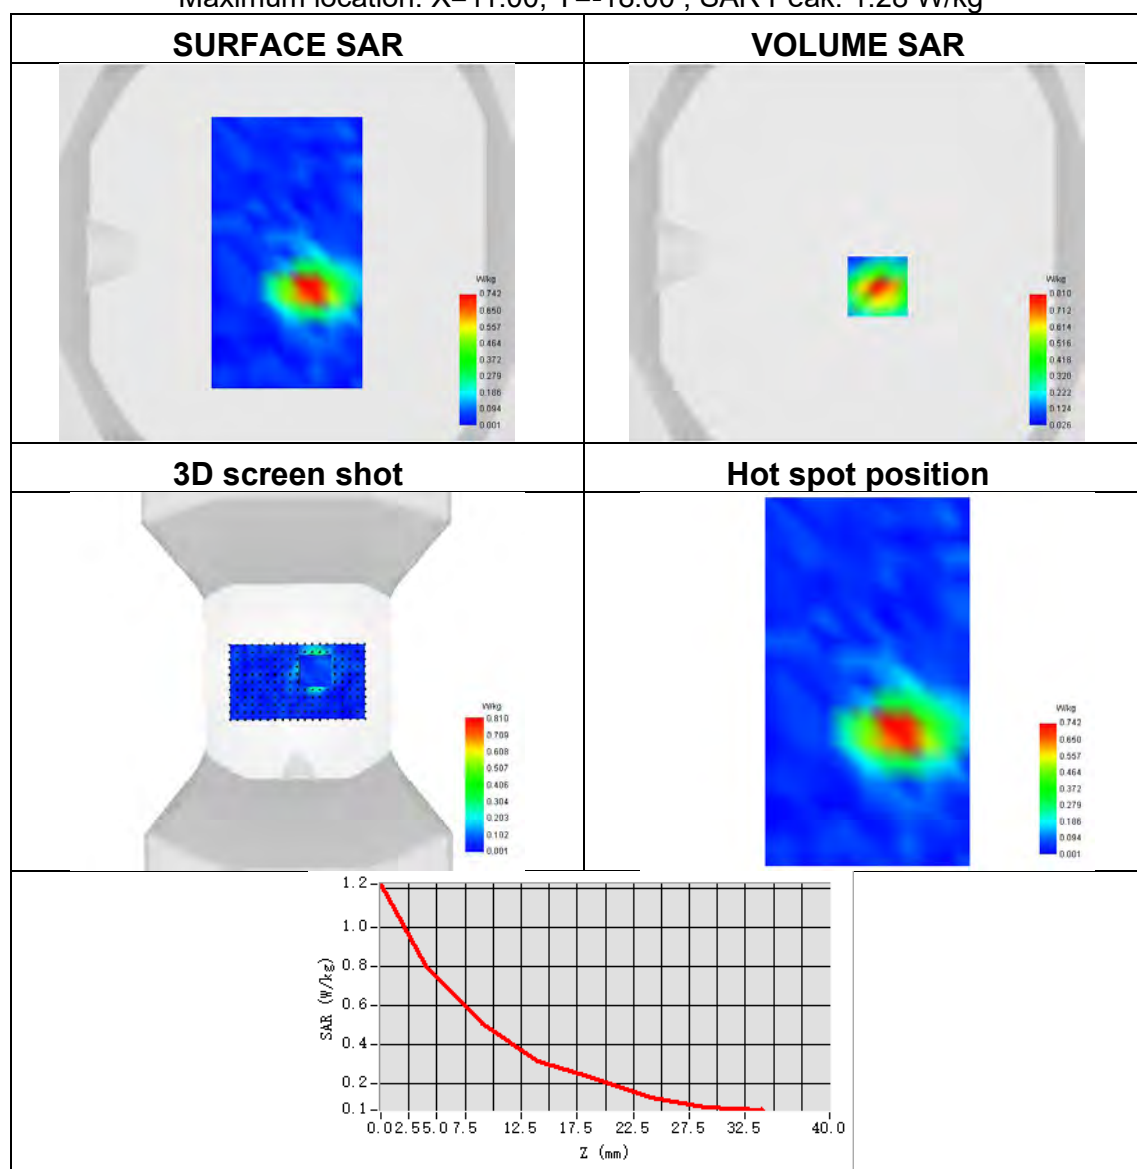




Plot 22:

Test Date	2025-01-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GSM850
Signal	TDMA (GSM)
Frequency	848.8
SAR 10g (W/Kg)	0.300
SAR 1g (W/Kg)	0.451
ConvF	1.70
Relative permittivity	41.37
Conductivity (S/m)	0.93

Maximum location: X=-8.00, Y=0.00 ; SAR Peak: 0.66 W/kg

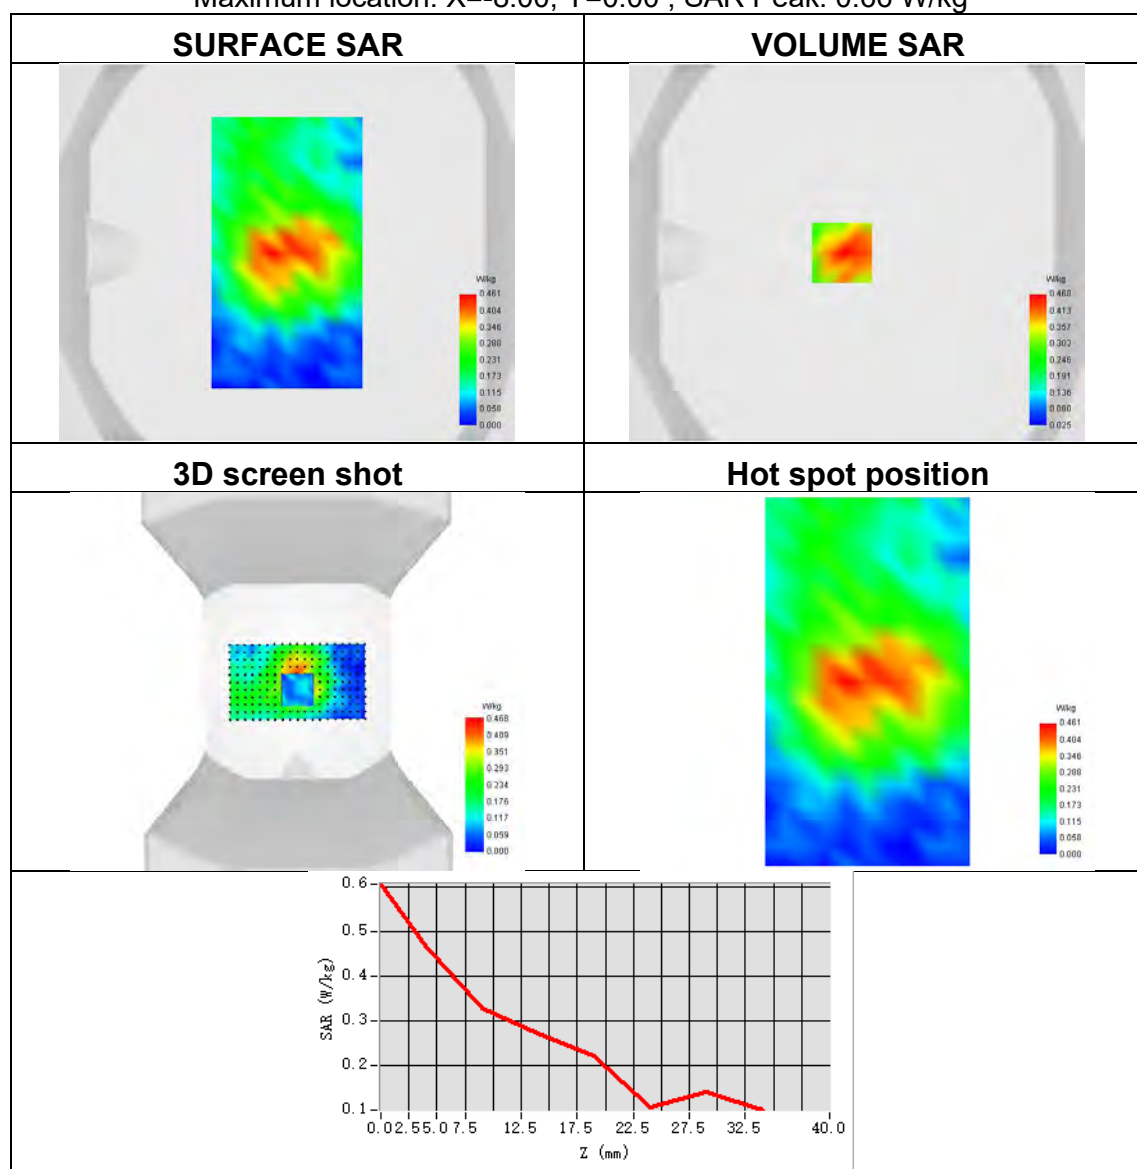




Plot 23:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1880
SAR 10g (W/Kg)	0.517
SAR 1g (W/Kg)	0.943
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=-7.00, Y=23.00 ; SAR Peak: 1.58 W/kg

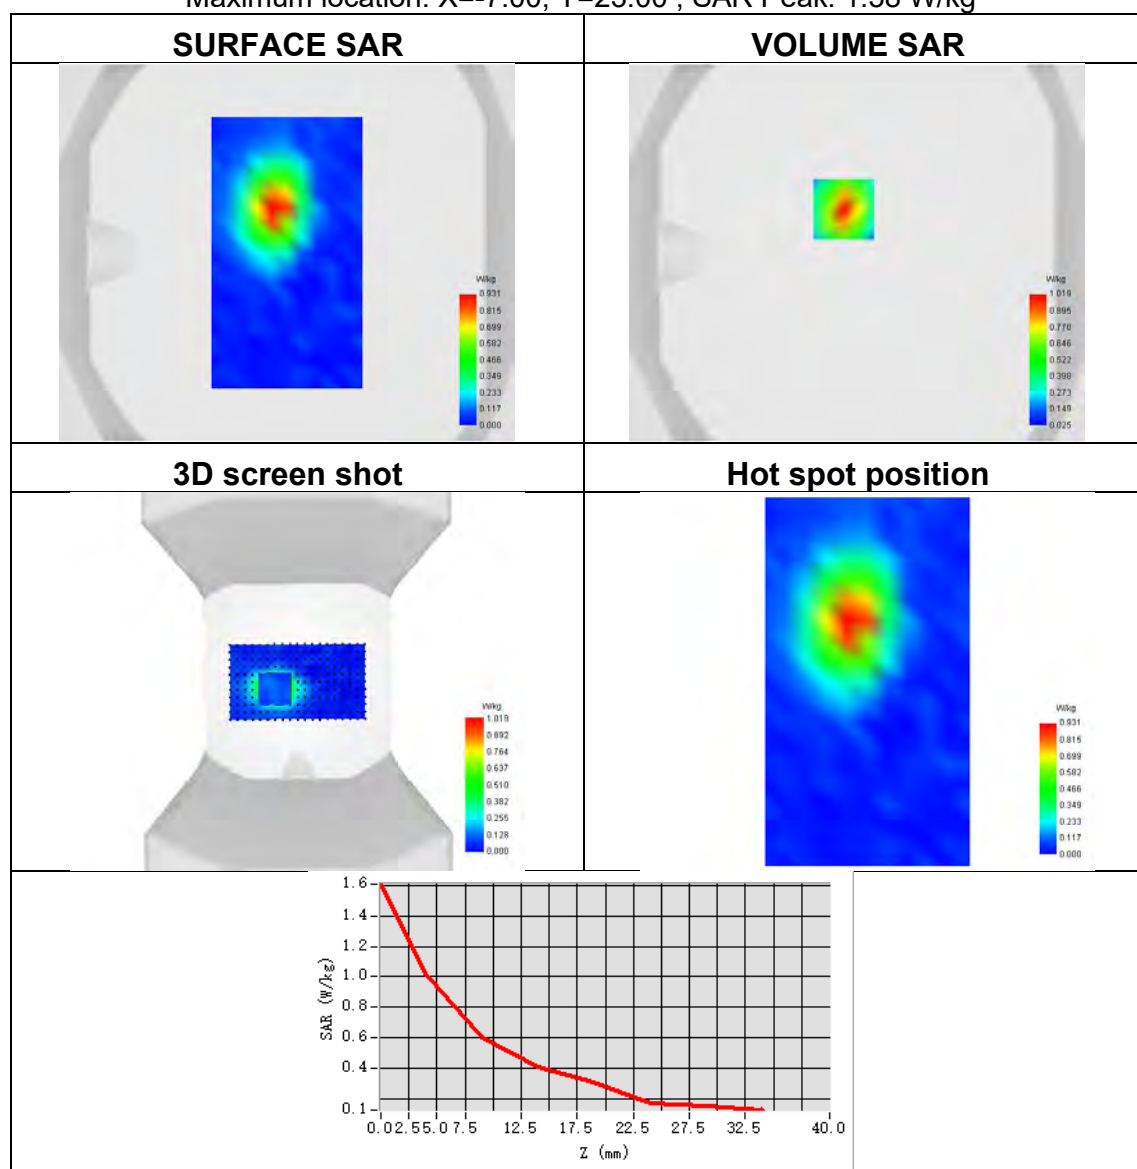




Plot 24:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	0.337
SAR 1g (W/Kg)	0.578
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=1.00, Y=-16.00 ; SAR Peak: 0.93 W/kg

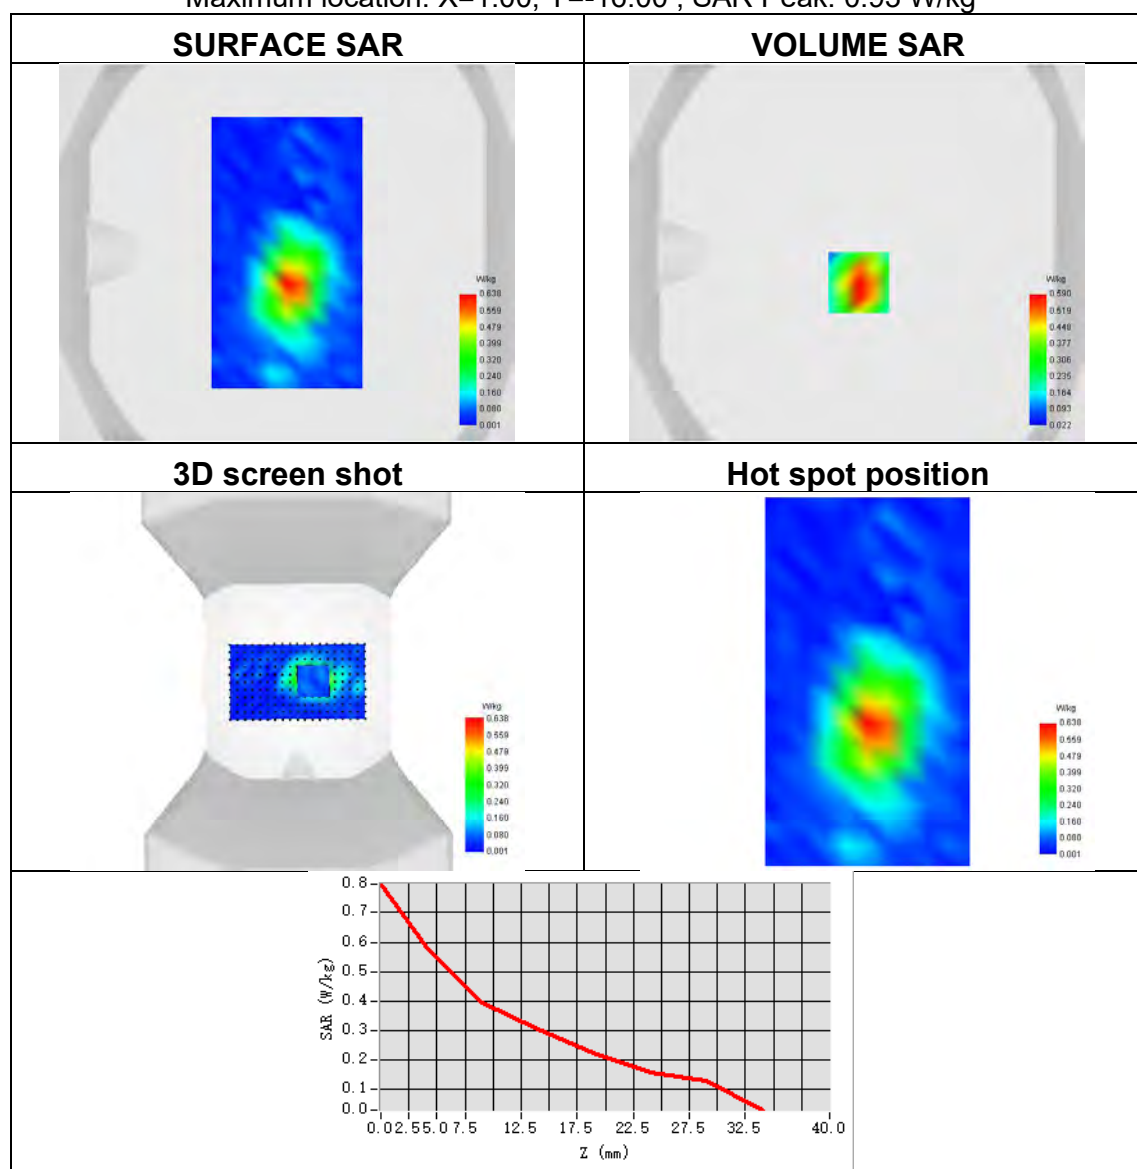




Plot 25:

Test Date	2024-12-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	Band 4 (1900)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.560
ConvF	1.91
Relative permittivity	41.12
Conductivity (S/m)	1.38

Maximum location: X=14.00, Y=-23.00 ; SAR Peak: 0.85 W/kg

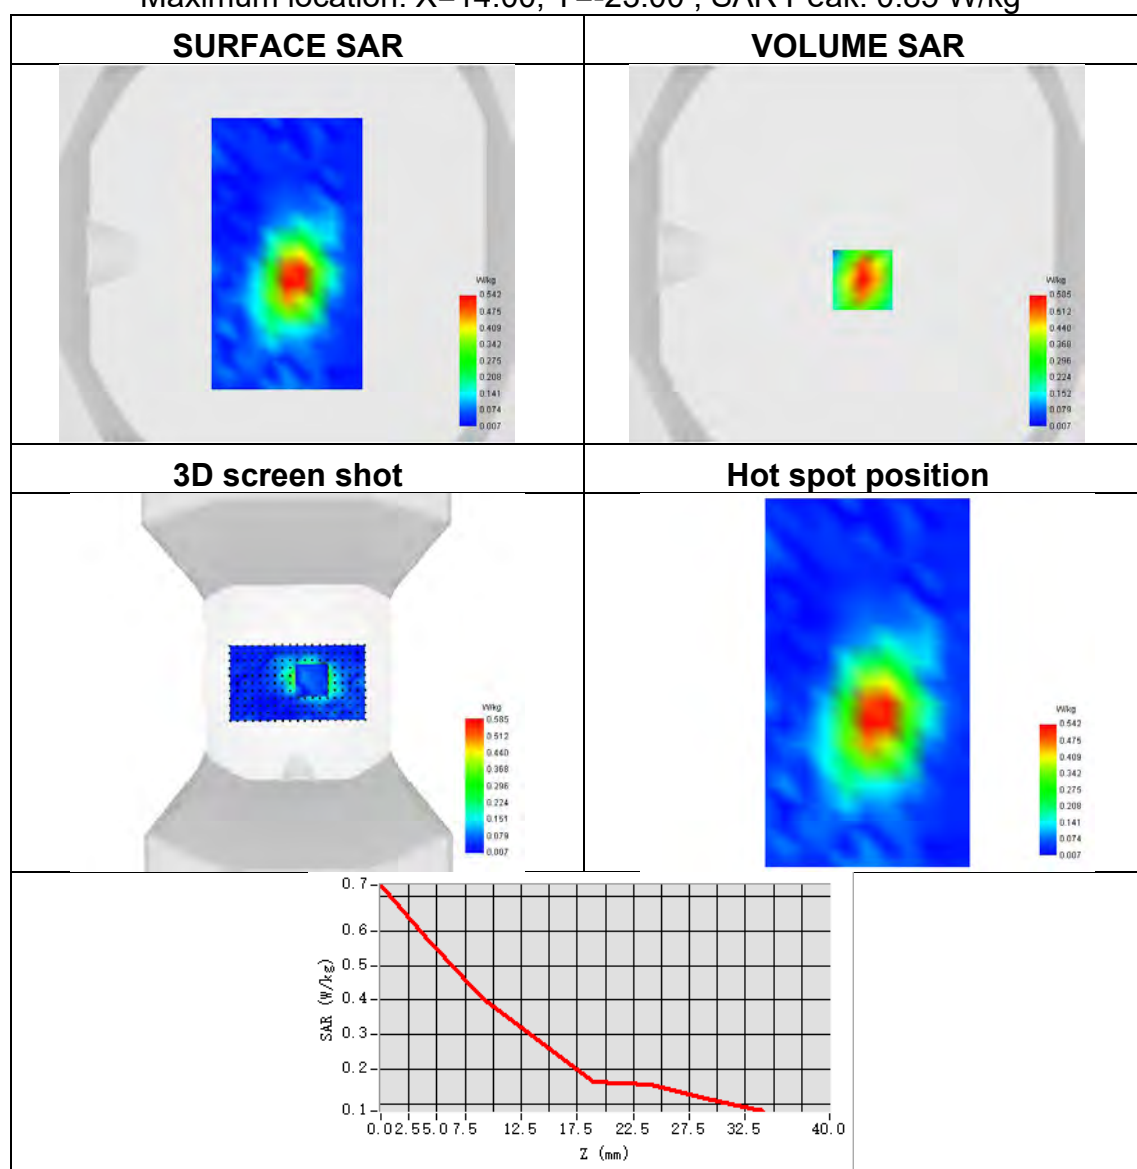




Plot 26:

Test Date	2024-12-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.221
SAR 1g (W/Kg)	0.387
ConvF	1.70
Relative permittivity	41.14
Conductivity (S/m)	0.92

Maximum location: X=-7.00, Y=0.00 ; SAR Peak: 0.60 W/kg

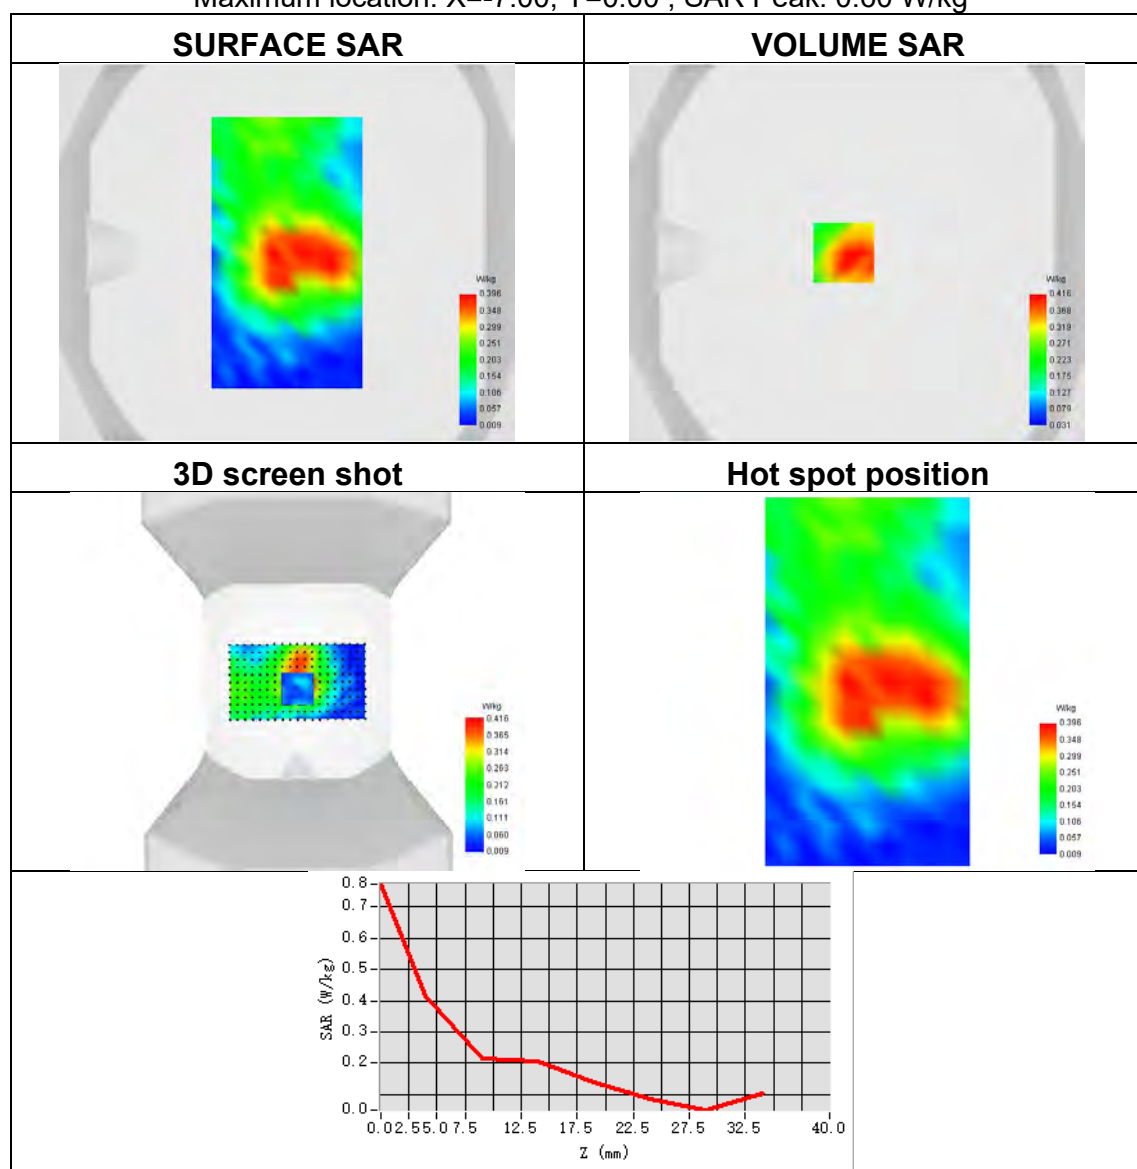




Plot 27:

Test Date	2024-12-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.138
SAR 1g (W/Kg)	0.286
ConvF	2.30
Relative permittivity	39.17
Conductivity (S/m)	1.76

Maximum location: X=2.00, Y=23.00 ; SAR Peak: 0.53 W/kg

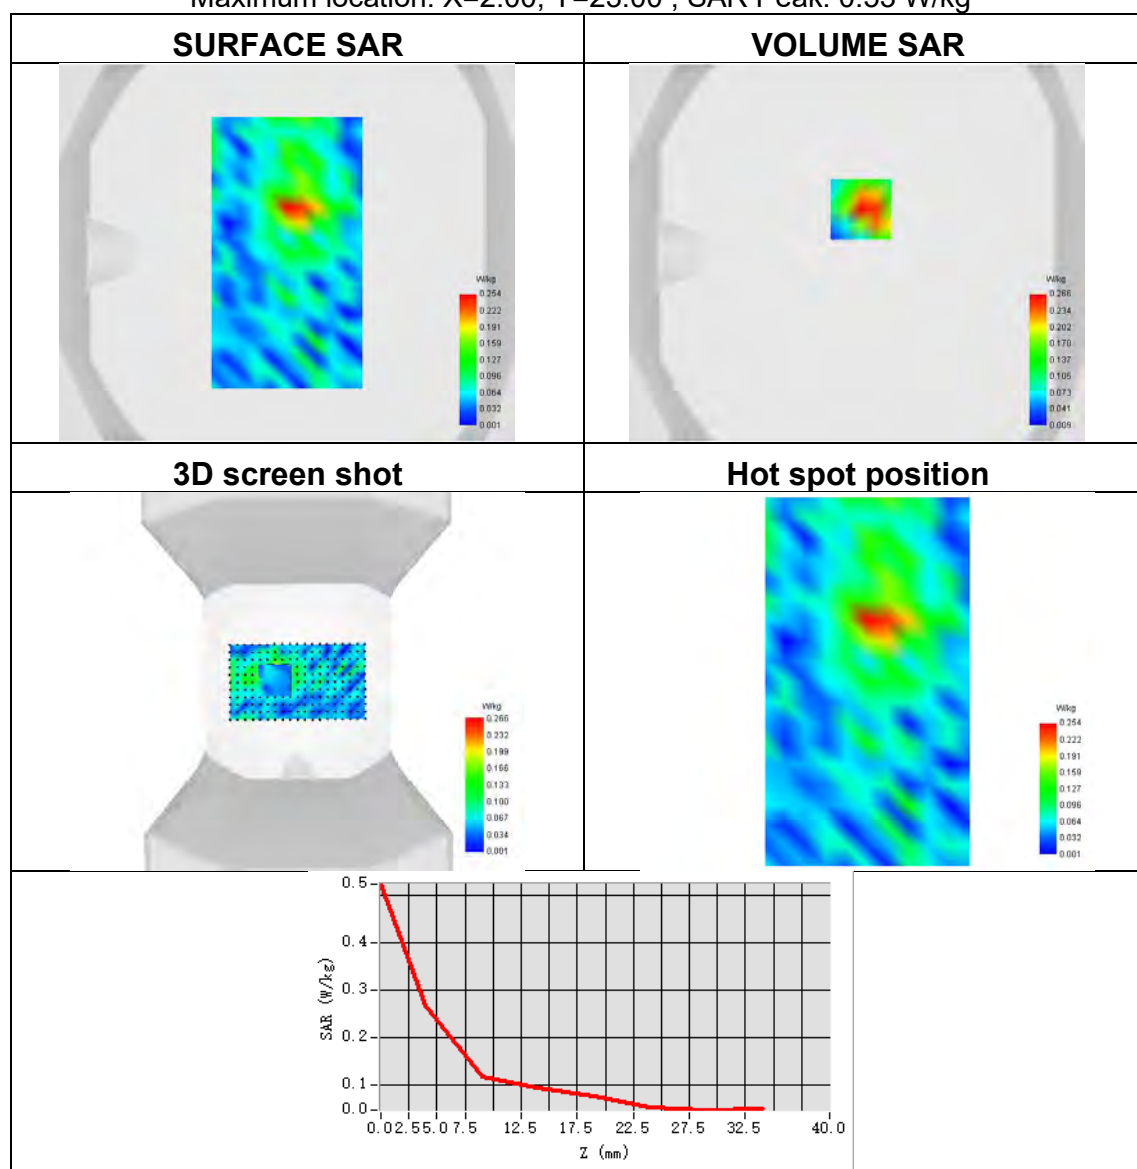




Plot 28:

Test Date	2024-12-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.172
SAR 1g (W/Kg)	0.397
ConvF	1.98
Relative permittivity	36.25
Conductivity (S/m)	4.68

Maximum location: X=16.00, Y=22.00 ; SAR Peak: 1.61 W/kg

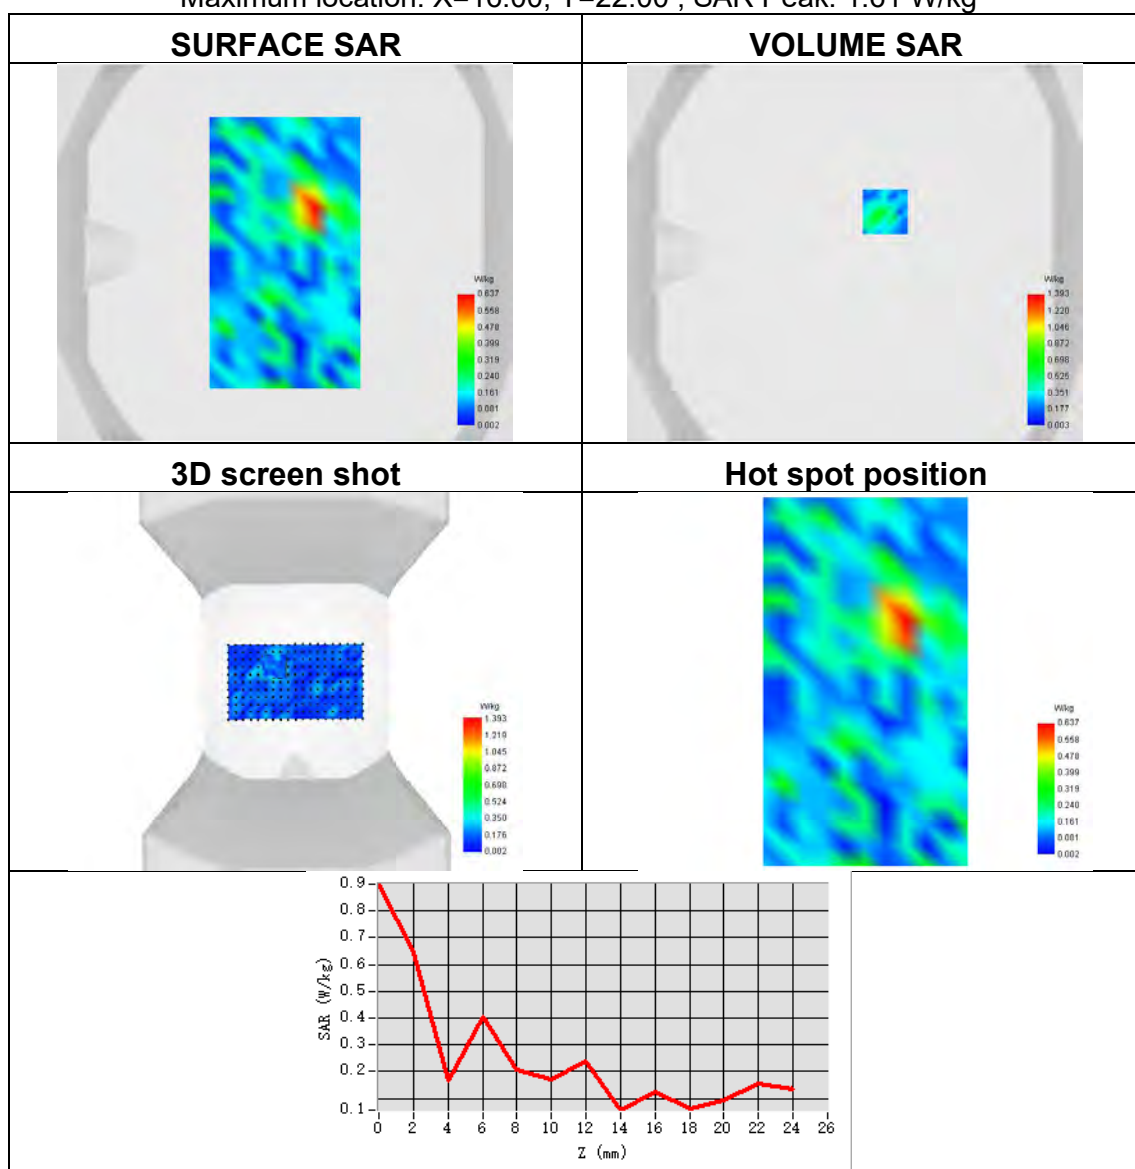




Plot 29:

Test Date	2024-12-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	IEEE 802.11a
Signal	LTE FDD
Frequency	5260
SAR 10g (W/Kg)	0.136
SAR 1g (W/Kg)	0.372
ConvF	1.83
Relative permittivity	36.62
Conductivity (S/m)	4.74

Maximum location: X=0.00, Y=24.00 ; SAR Peak: 2.15 W/kg

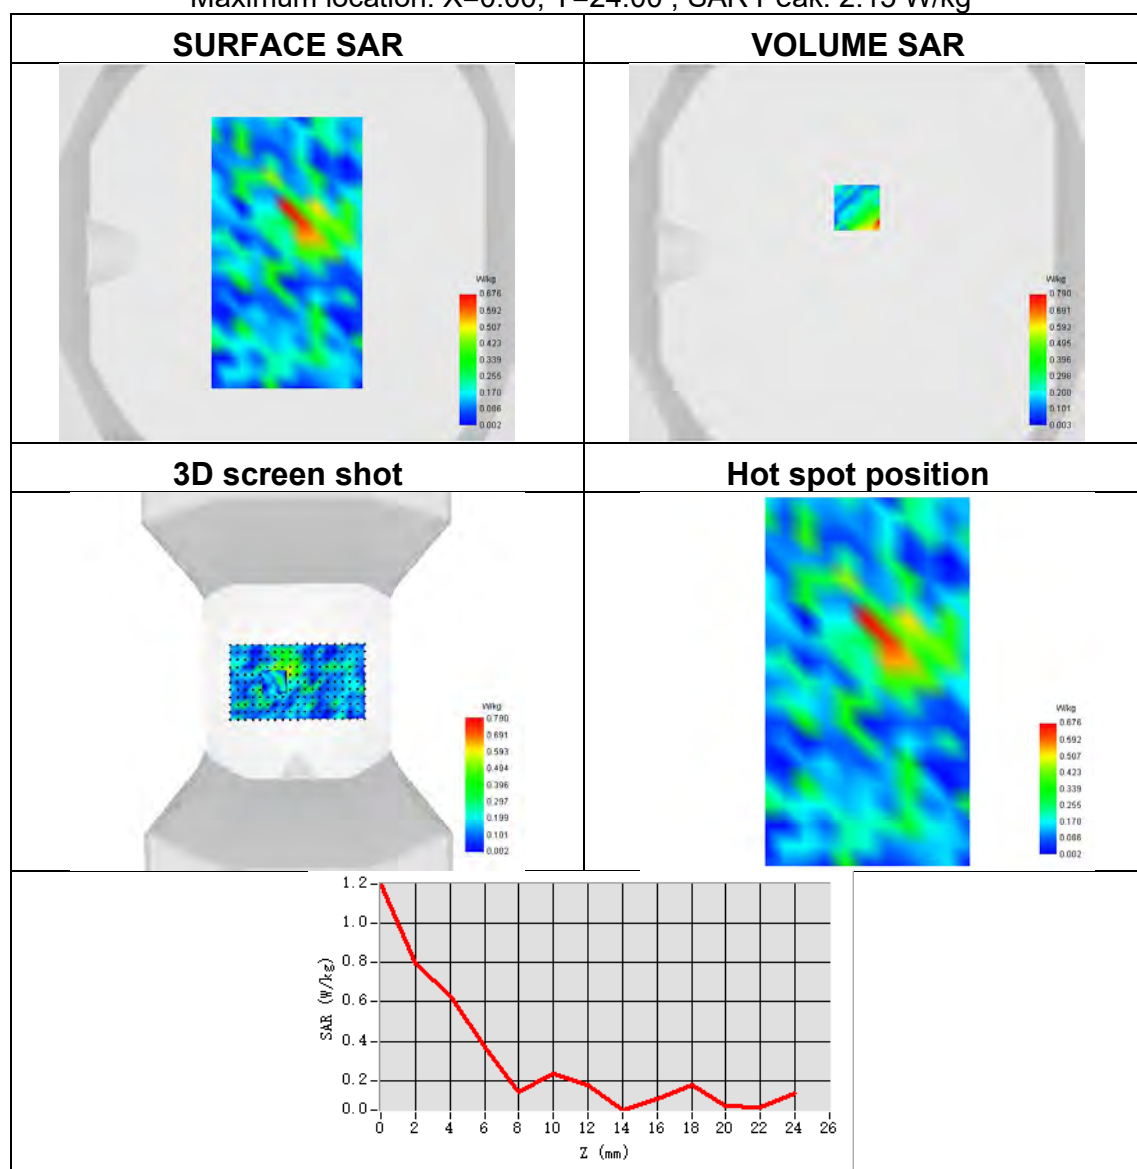




Plot 30:

Test Date	2024-12-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.169
SAR 1g (W/Kg)	0.348
ConvF	1.86
Relative permittivity	36.53
Conductivity (S/m)	5.13

Maximum location: X=16.00, Y=0.00 ; SAR Peak: 1.67 W/kg

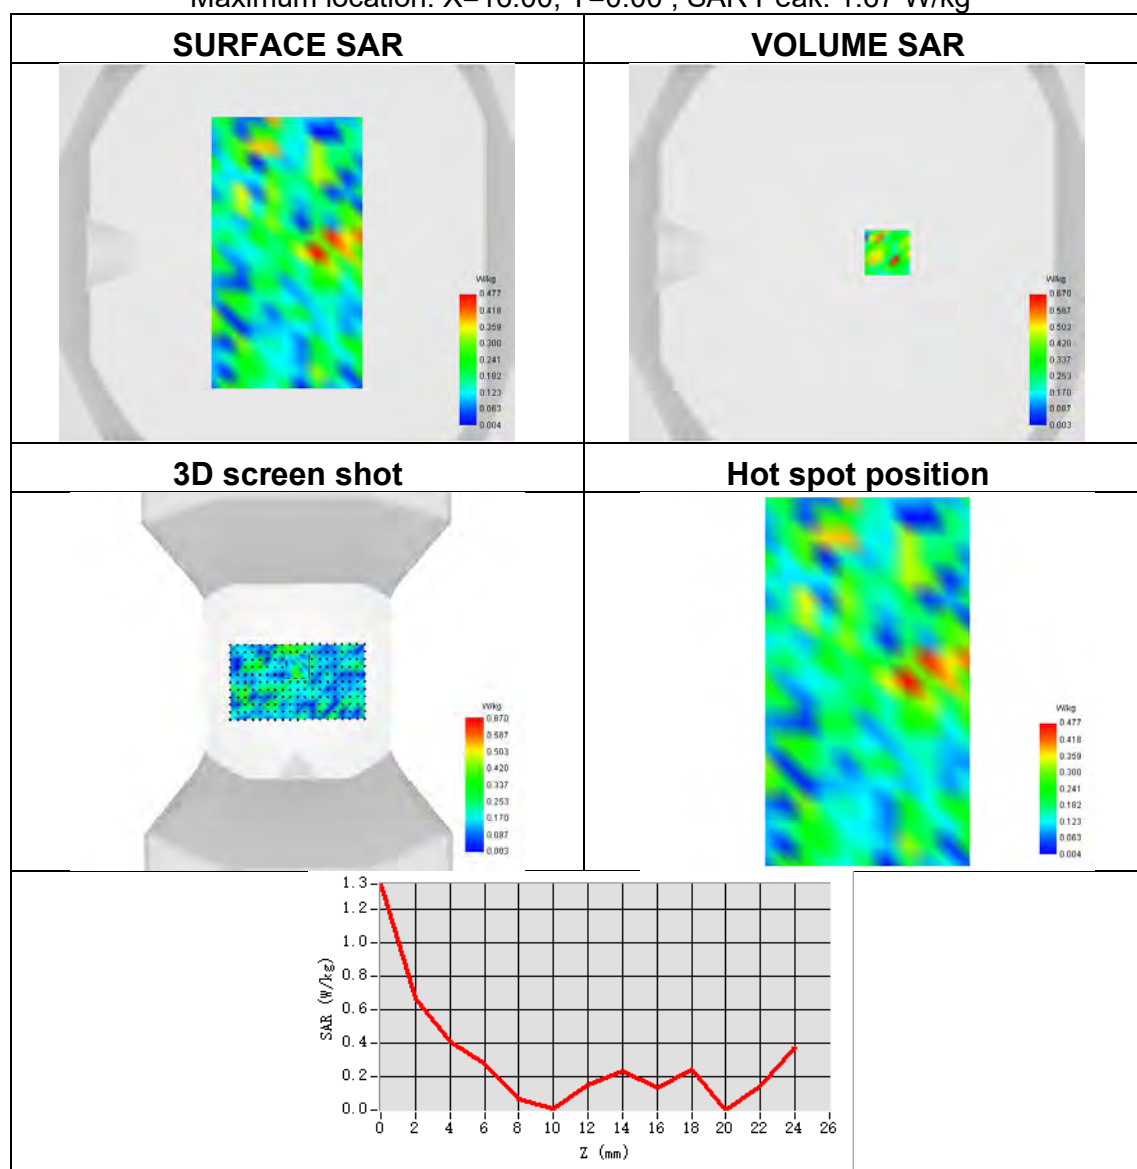




Plot 31:

Test Date	2024-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.216
SAR 1g (W/Kg)	0.453
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.16

Maximum location: X=16.00, Y=8.00 ; SAR Peak: 2.65 W/kg

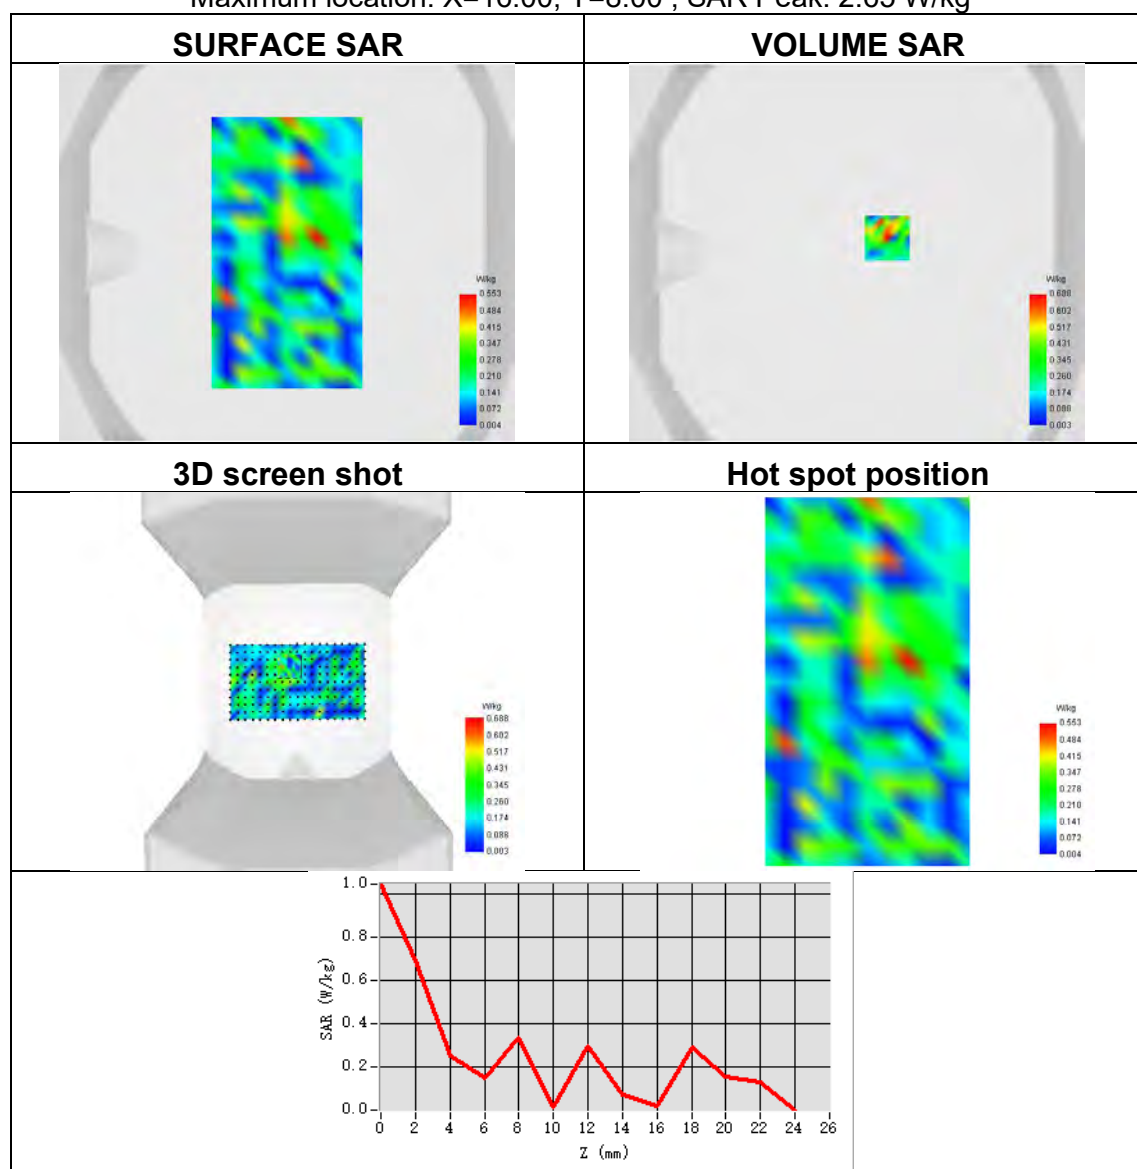




Plot 32:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	0.372
SAR 1g (W/Kg)	0.667
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=6.00, Y=-16.00 ; SAR Peak: 1.05 W/kg

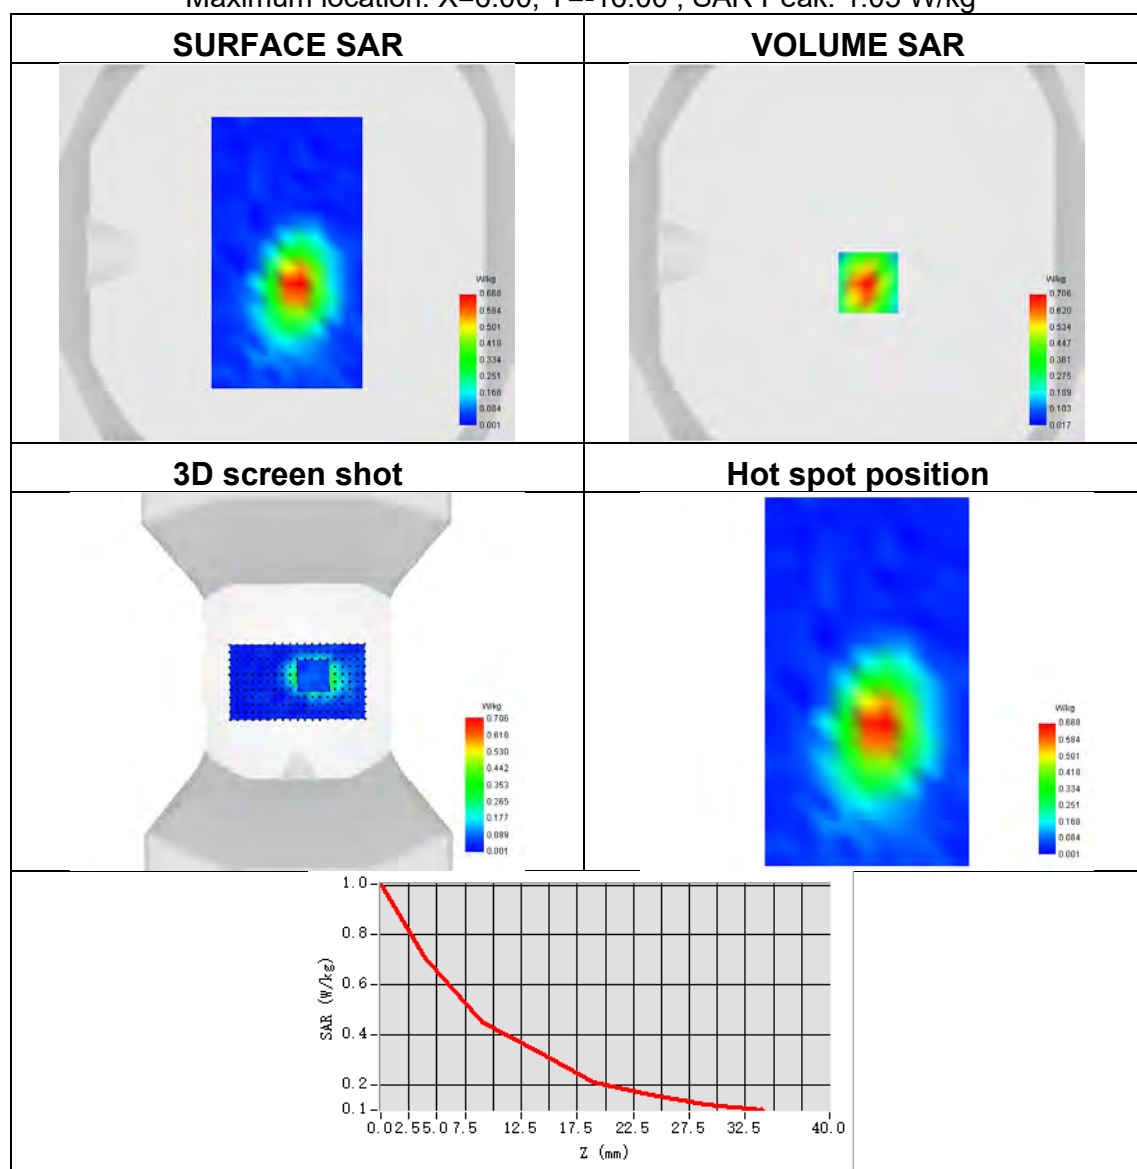




Plot 33:

Test Date	2024-12-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.324
SAR 1g (W/Kg)	0.553
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.42

Maximum location: X=1.00, Y=-16.00 ; SAR Peak: 0.83 W/kg

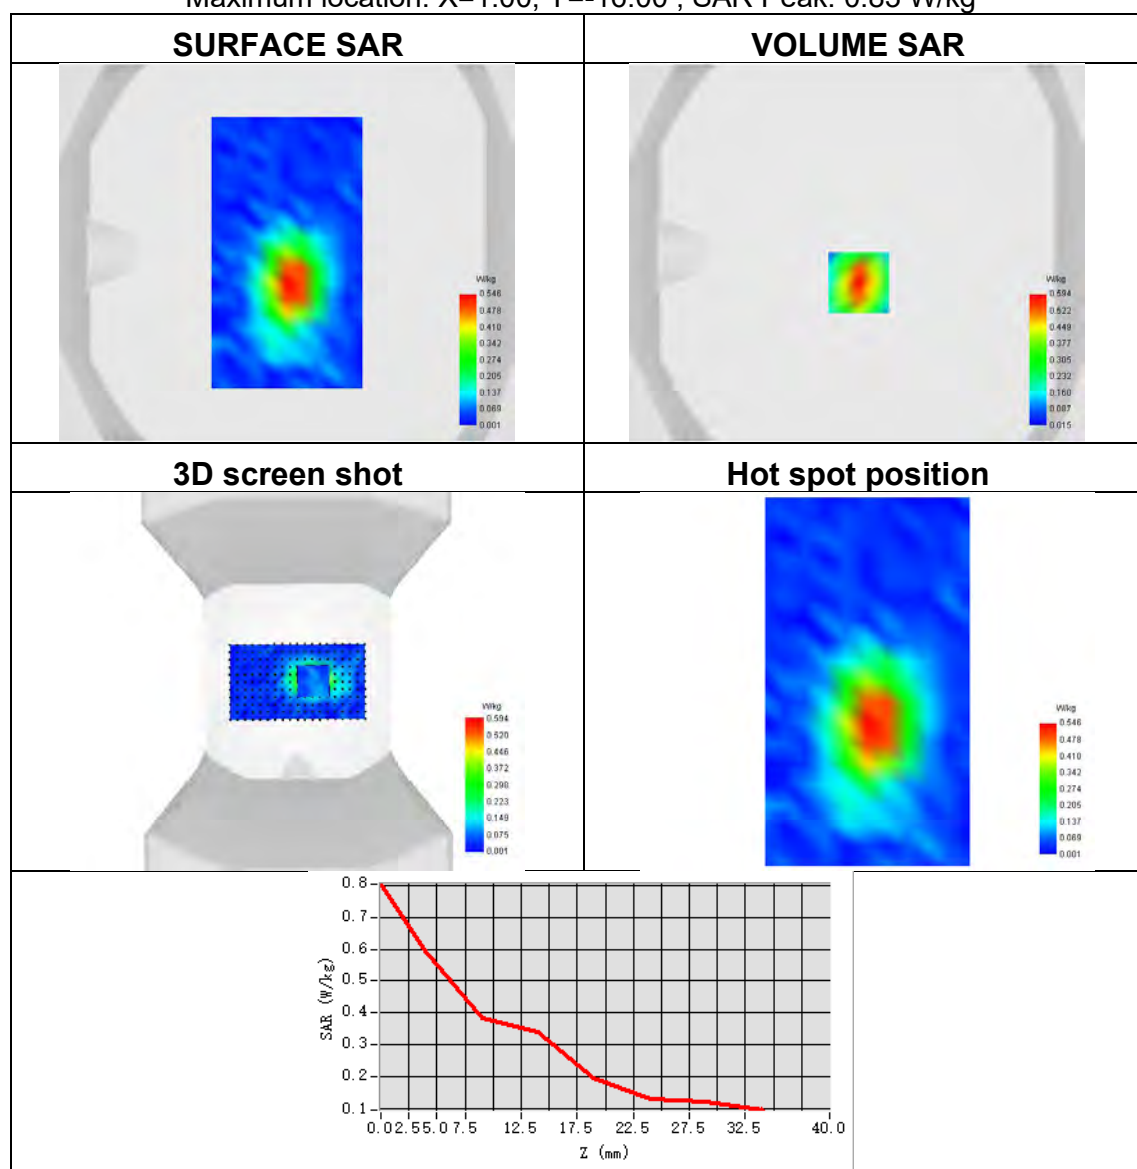




Plot 34:

Test Date	2024-12-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.197
SAR 1g (W/Kg)	0.419
ConvF	1.70
Relative permittivity	41.54
Conductivity (S/m)	0.92

Maximum location: X=8.00, Y=-16.00 ; SAR Peak: 0.67 W/kg

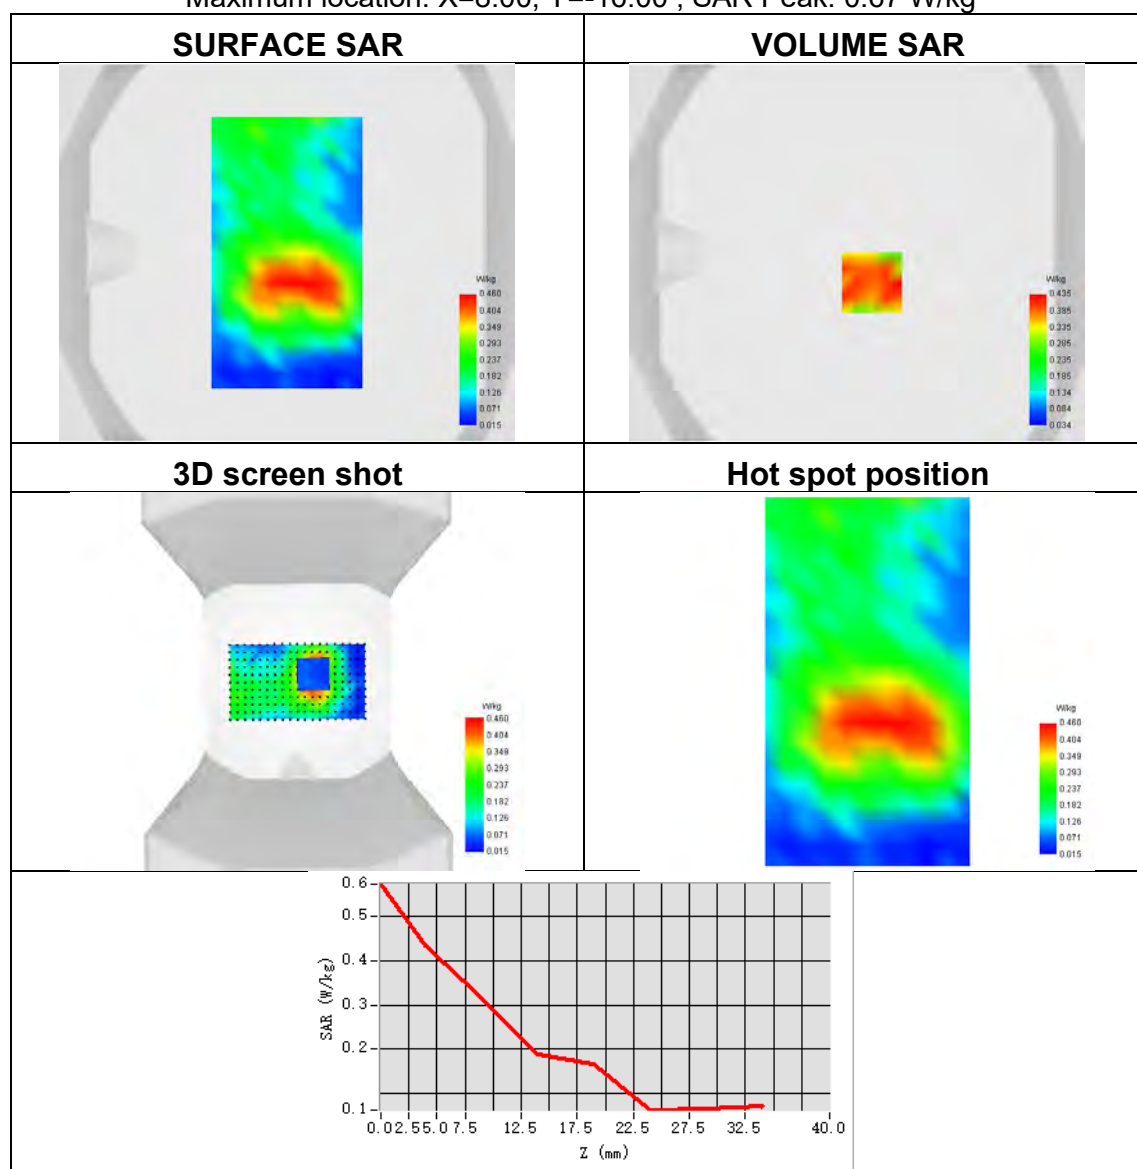




Plot 35:

Test Date	2024-12-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	0.298
SAR 1g (W/Kg)	0.540
ConvF	2.35
Relative permittivity	39.60
Conductivity (S/m)	1.91

Maximum location: X=3.00, Y=-5.00 ; SAR Peak: 0.84 W/kg

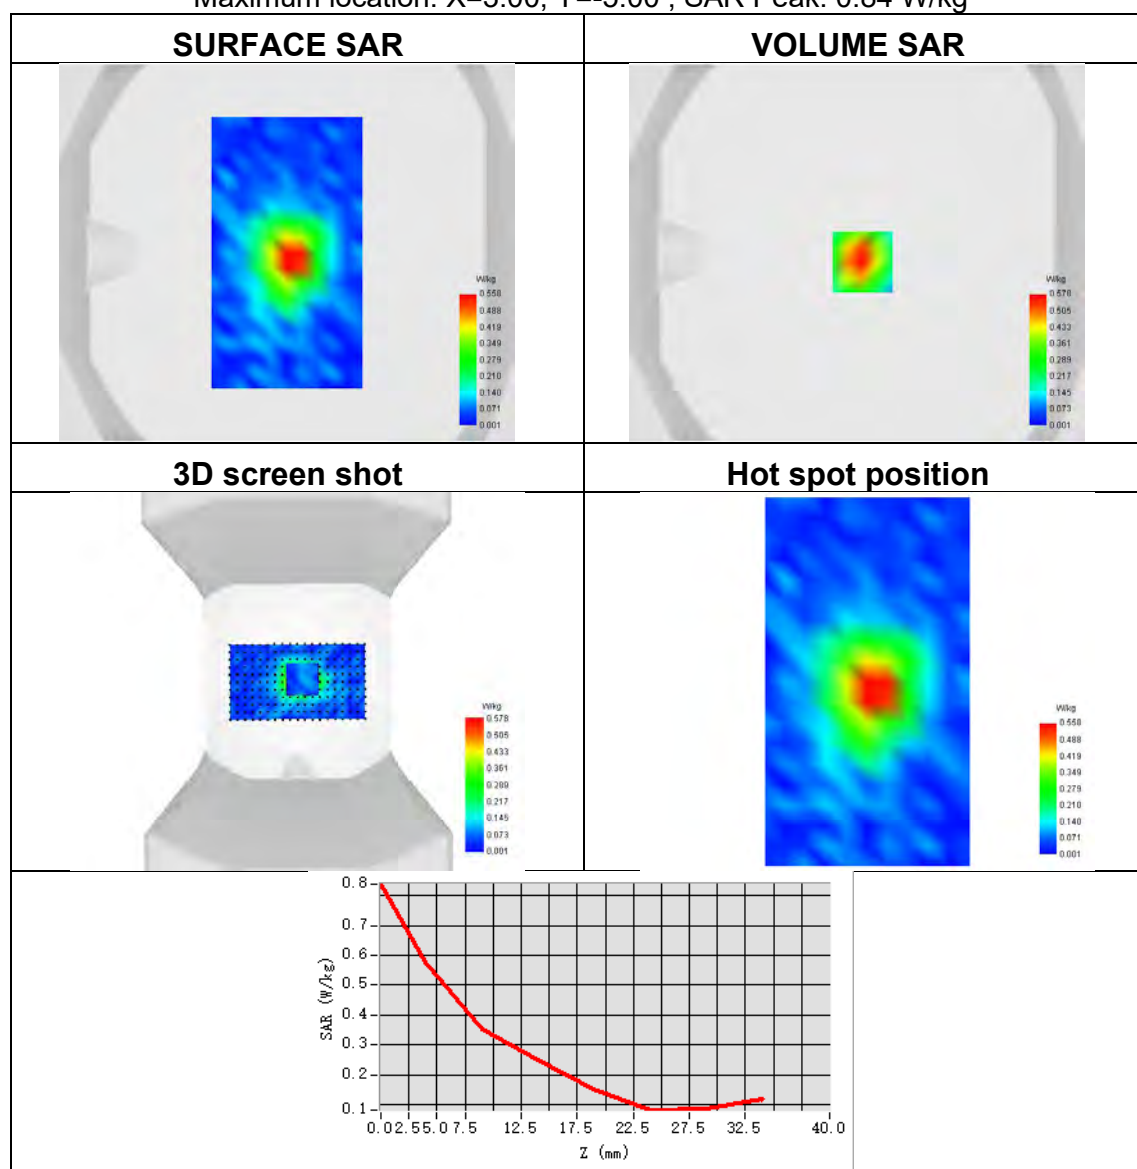




Plot 36:

Test Date	2024-12-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	0.222
SAR 1g (W/Kg)	0.384
ConvF	1.68
Relative permittivity	42.52
Conductivity (S/m)	0.90

Maximum location: X=-8.00, Y=25.00 ; SAR Peak: 0.55 W/kg

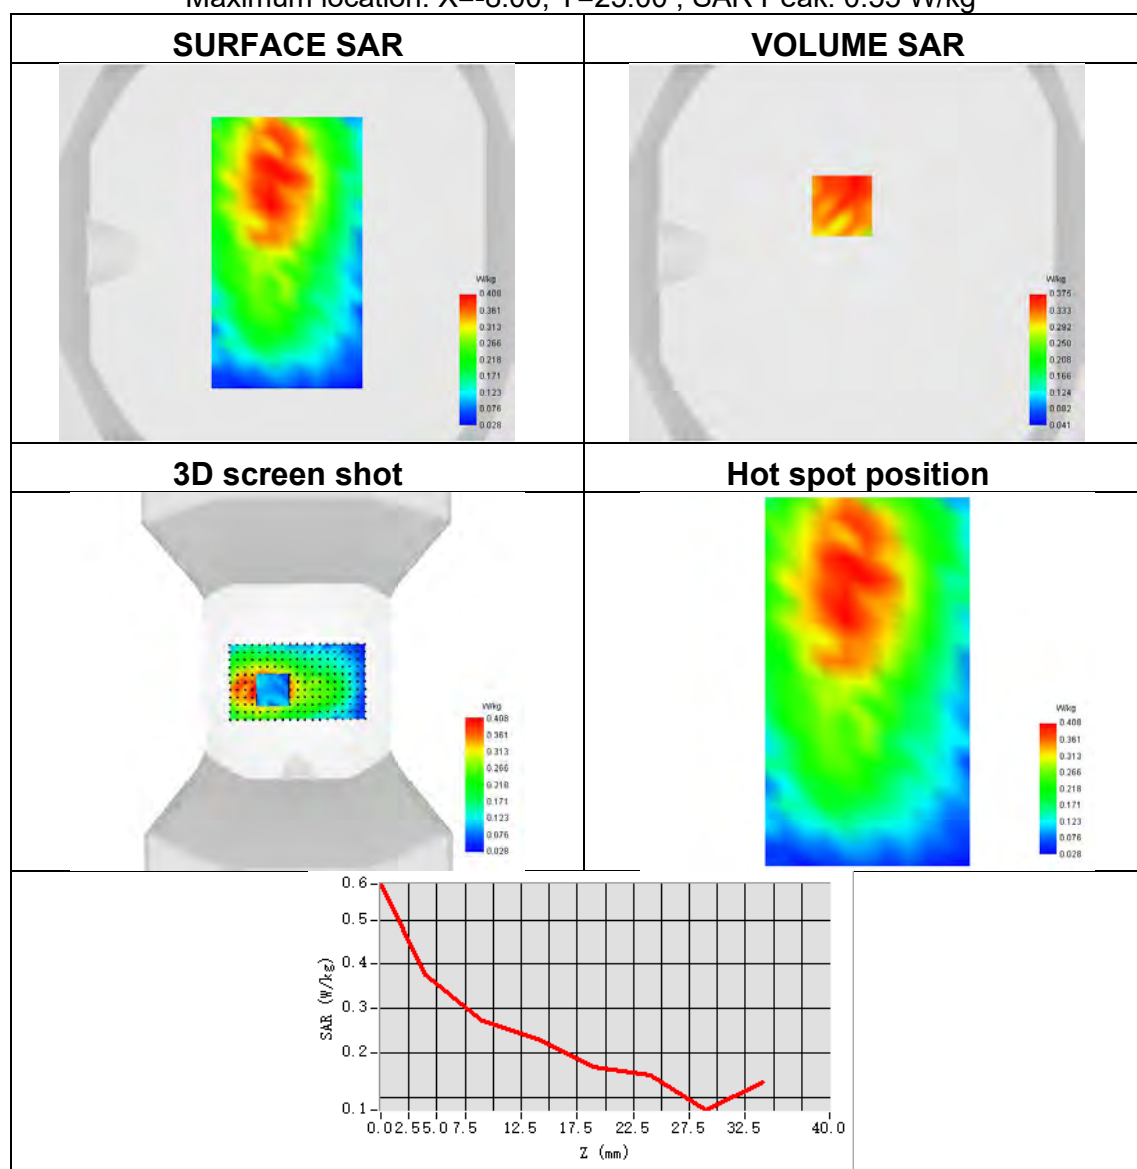




Plot 37:

Test Date	2024-12-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.086
SAR 1g (W/Kg)	0.166
ConvF	1.68
Relative permittivity	42.55
Conductivity (S/m)	0.92

Maximum location: X=5.00, Y=24.00 ; SAR Peak: 0.31 W/kg

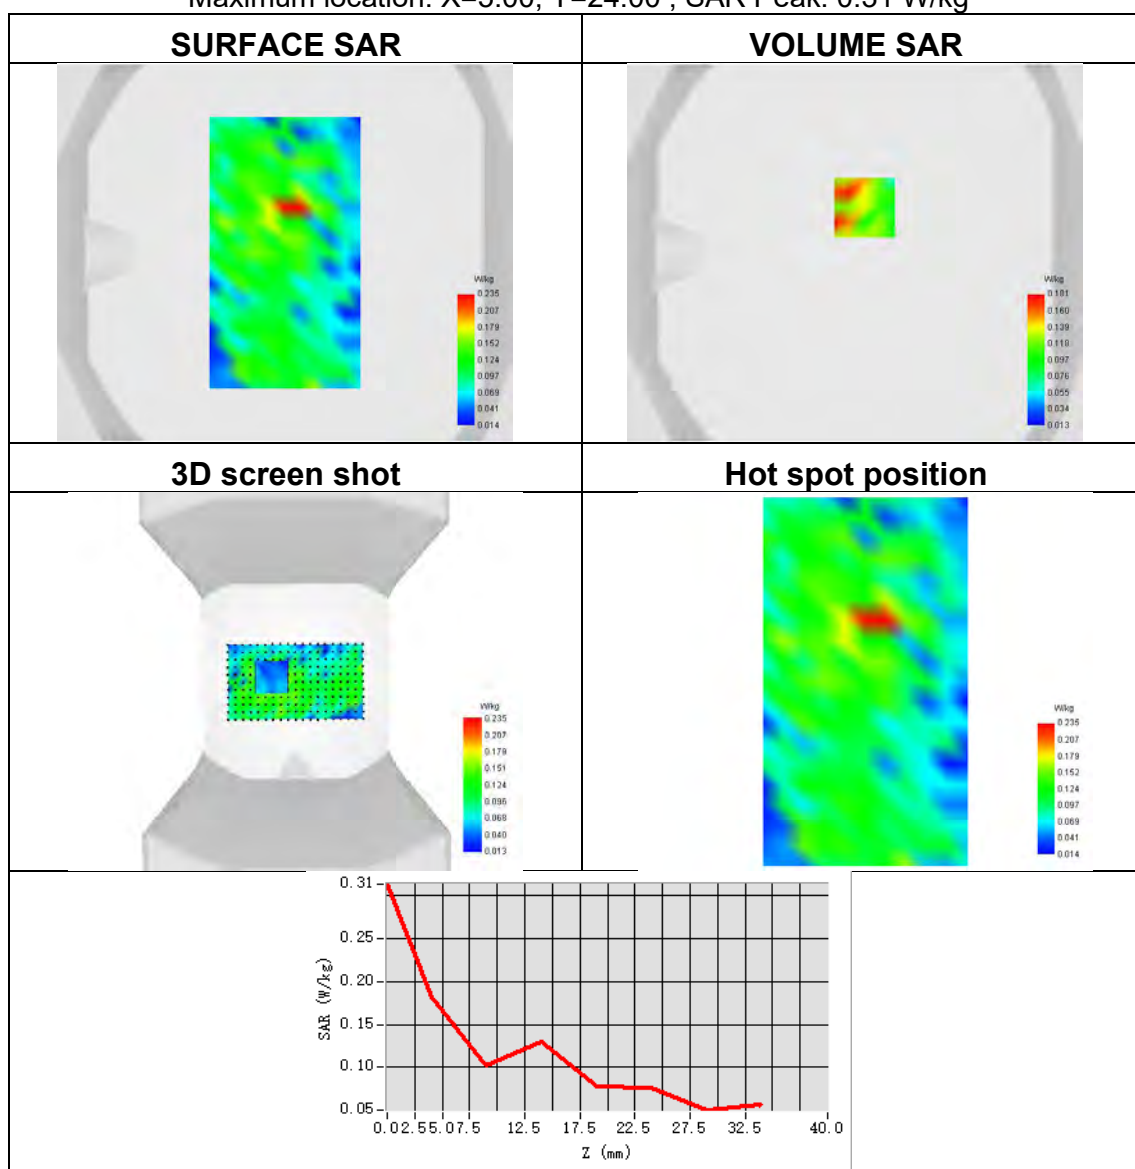




Plot 38:

Test Date	2024-12-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	0.353
SAR 1g (W/Kg)	0.630
ConvF	2.24
Relative permittivity	40.83
Conductivity (S/m)	1.37

Maximum location: X=2.00, Y=-17.00 ; SAR Peak: 1.02 W/kg

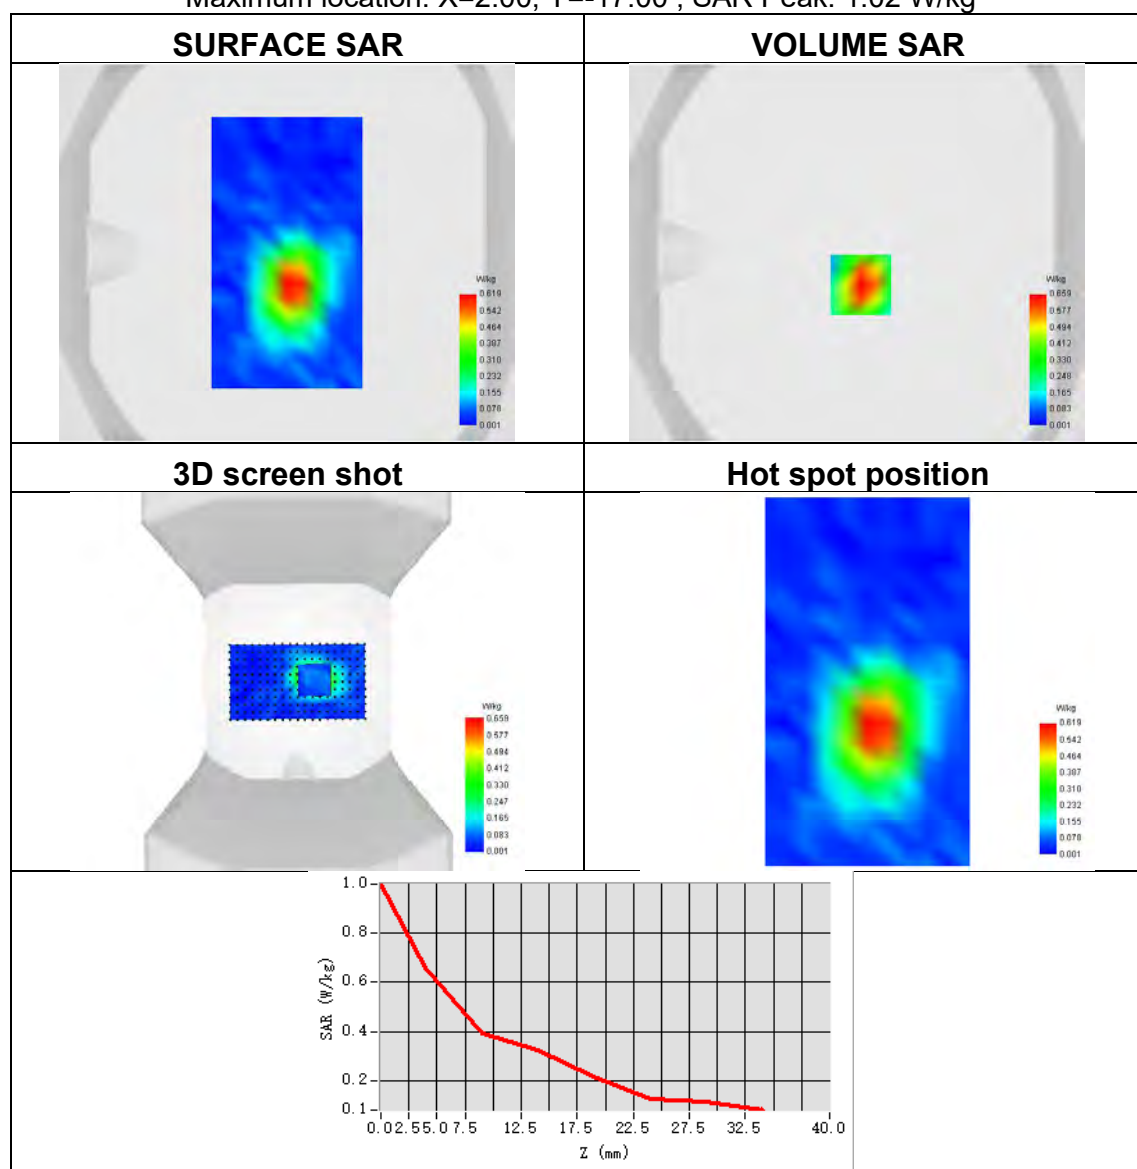




Plot 39:

Test Date	2024-12-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	0.309
SAR 1g (W/Kg)	0.499
ConvF	1.70
Relative permittivity	41.27
Conductivity (S/m)	0.93

Maximum location: X=-7.00, Y=-49.00 ; SAR Peak: 0.80 W/kg

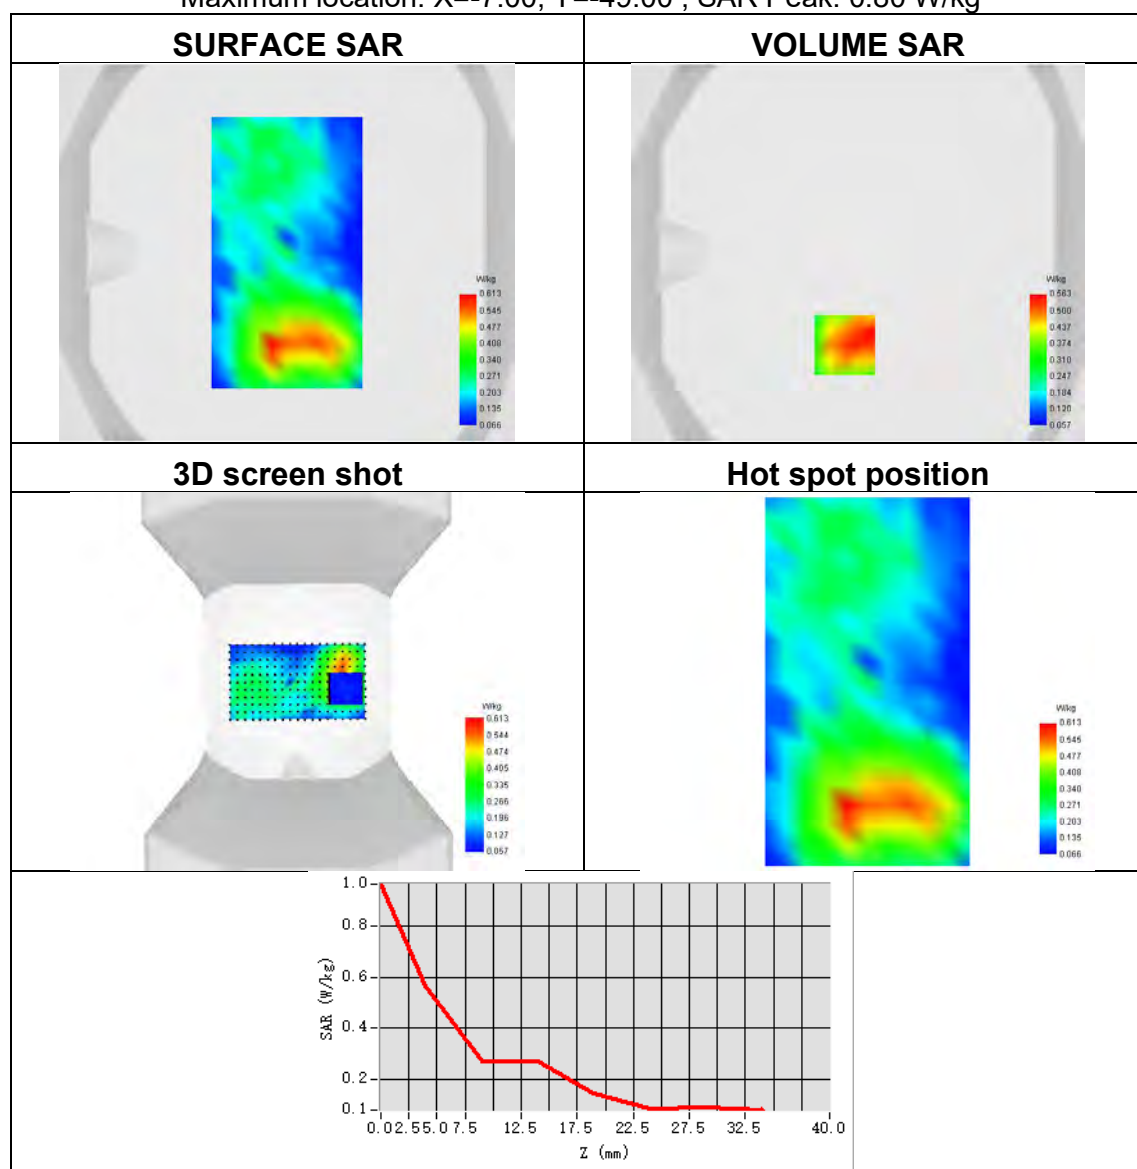




Plot 40:

Test Date	2024-12-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	0.360
SAR 1g (W/Kg)	0.645
ConvF	2.35
Relative permittivity	40.08
Conductivity (S/m)	2.03

Maximum location: X=6.00, Y=2.00 ; SAR Peak: 1.14 W/kg

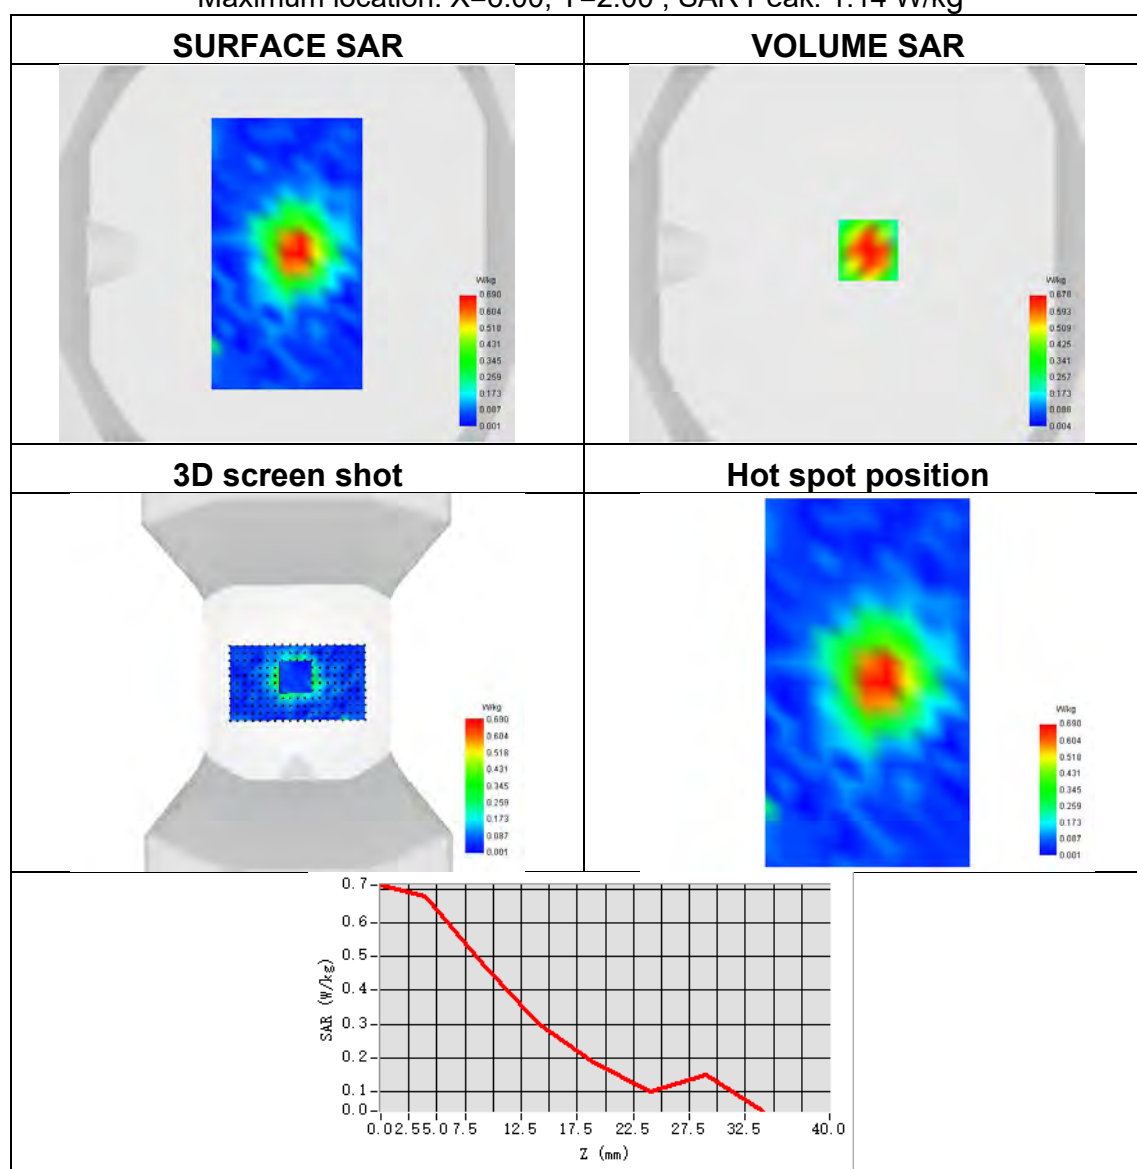




Plot 41:

Test Date	2024-12-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2593
SAR 10g (W/Kg)	0.443
SAR 1g (W/Kg)	0.871
ConvF	2.35
Relative permittivity	39.27
Conductivity (S/m)	1.98

Maximum location: X=7.00, Y=0.00 ; SAR Peak: 1.53 W/kg

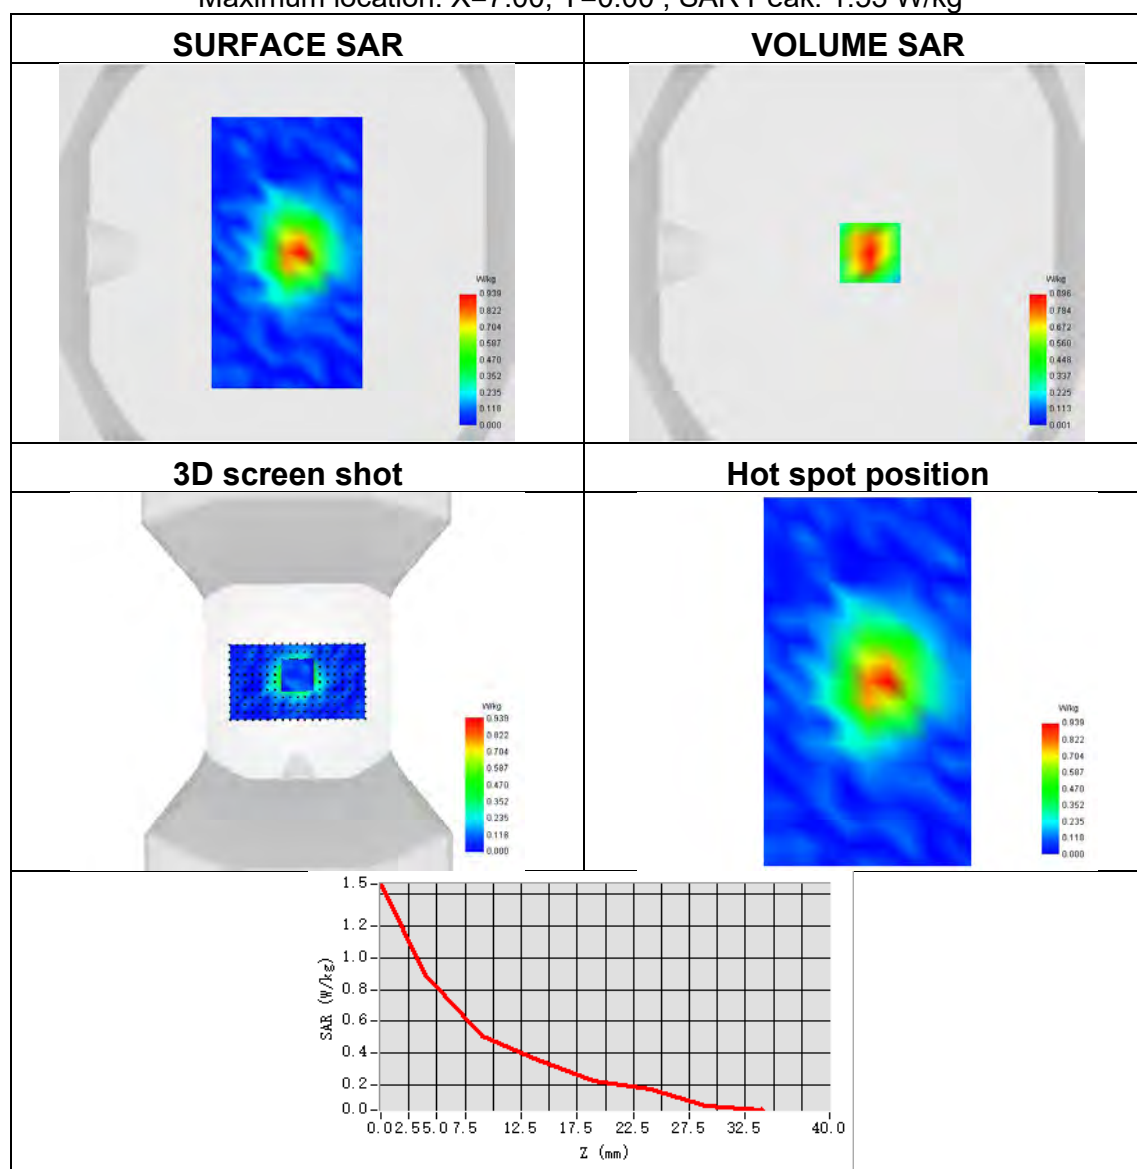




Plot 42:

Test Date	2024-12-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Bottom Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
SAR 10g (W/Kg)	0.347
SAR 1g (W/Kg)	0.604
ConvF	1.91
Relative permittivity	40.48
Conductivity (S/m)	1.40

Maximum location: X=3.00, Y=-15.00 ; SAR Peak: 1.02 W/kg

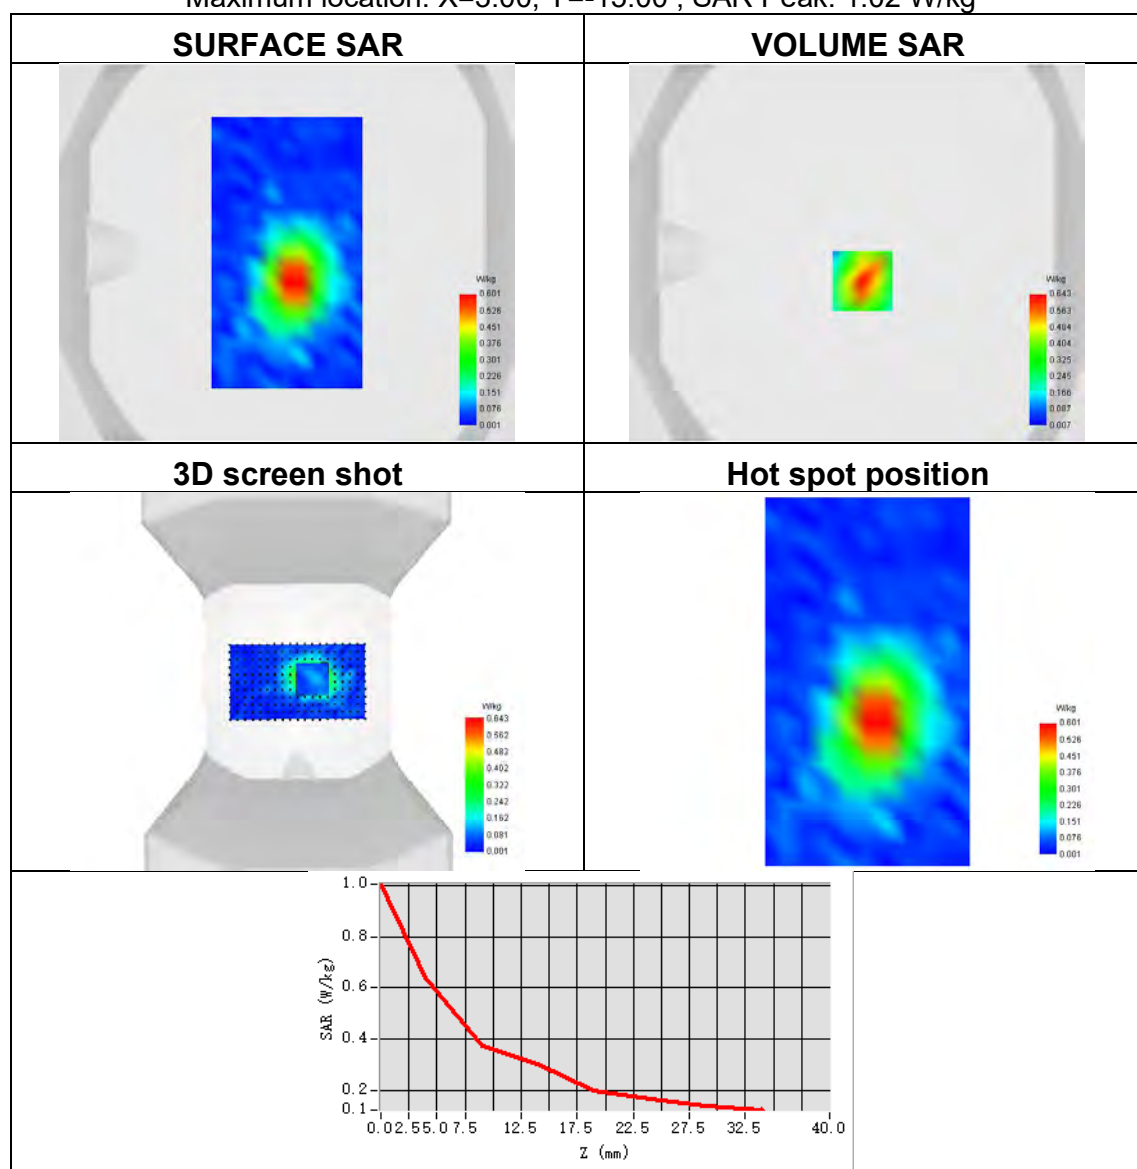




Plot 43:

Test Date	2024-12-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.499
SAR 1g (W/Kg)	1.156
ConvF	2.30
Relative permittivity	39.17
Conductivity (S/m)	1.76

Maximum location: X=0.00, Y=-23.00 ; SAR Peak: 2.20 W/kg

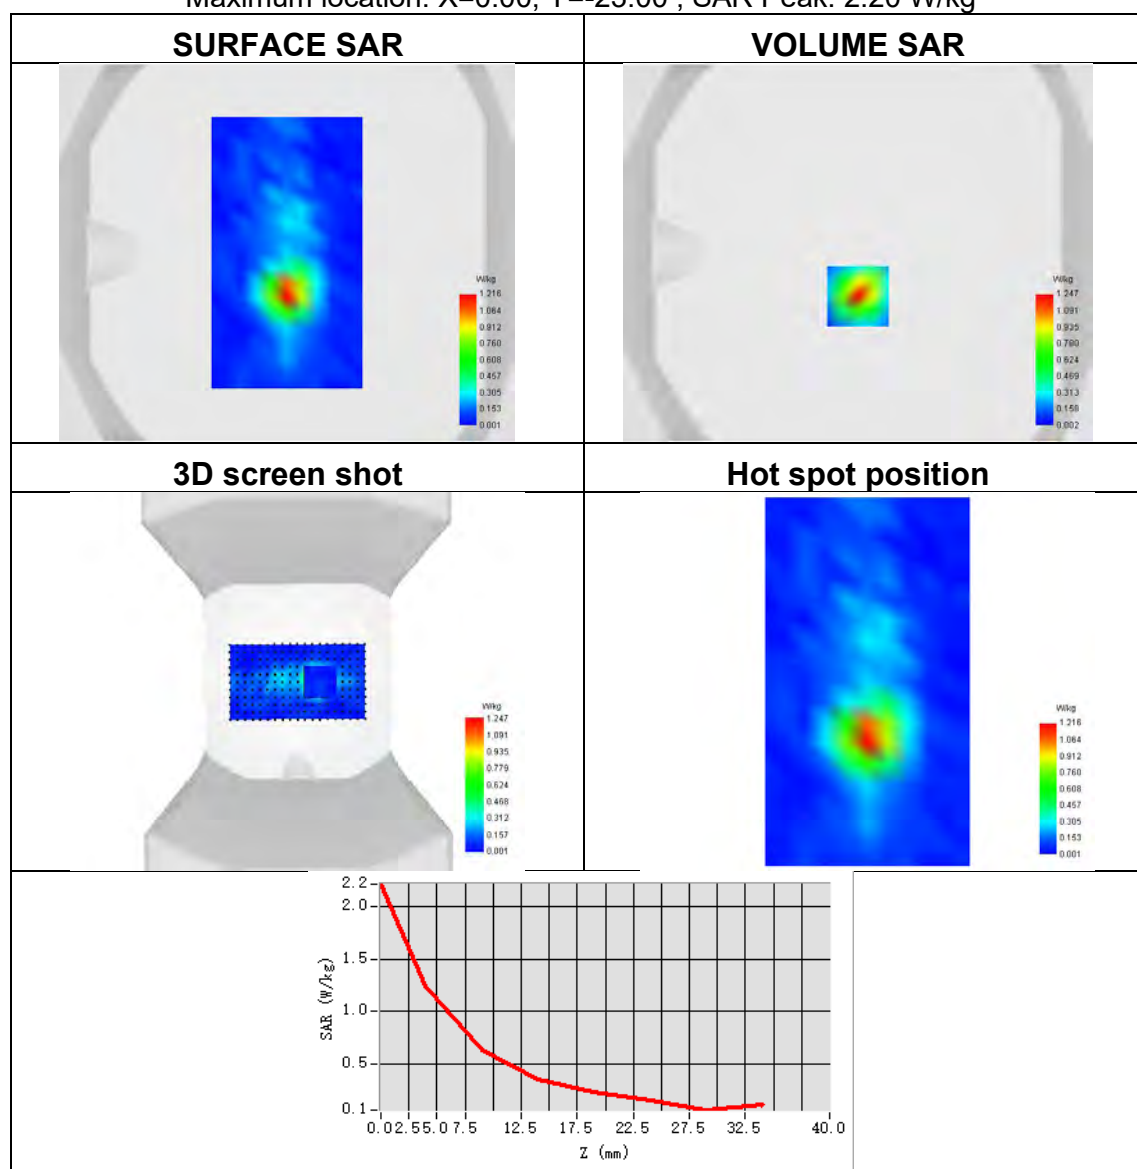




Plot 44:

Test Date	2024-12-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.443
SAR 1g (W/Kg)	1.418
ConvF	1.98
Relative permittivity	36.25
Conductivity (S/m)	4.68

Maximum location: X=-8.00, Y=-22.00 ; SAR Peak: 4.46 W/kg

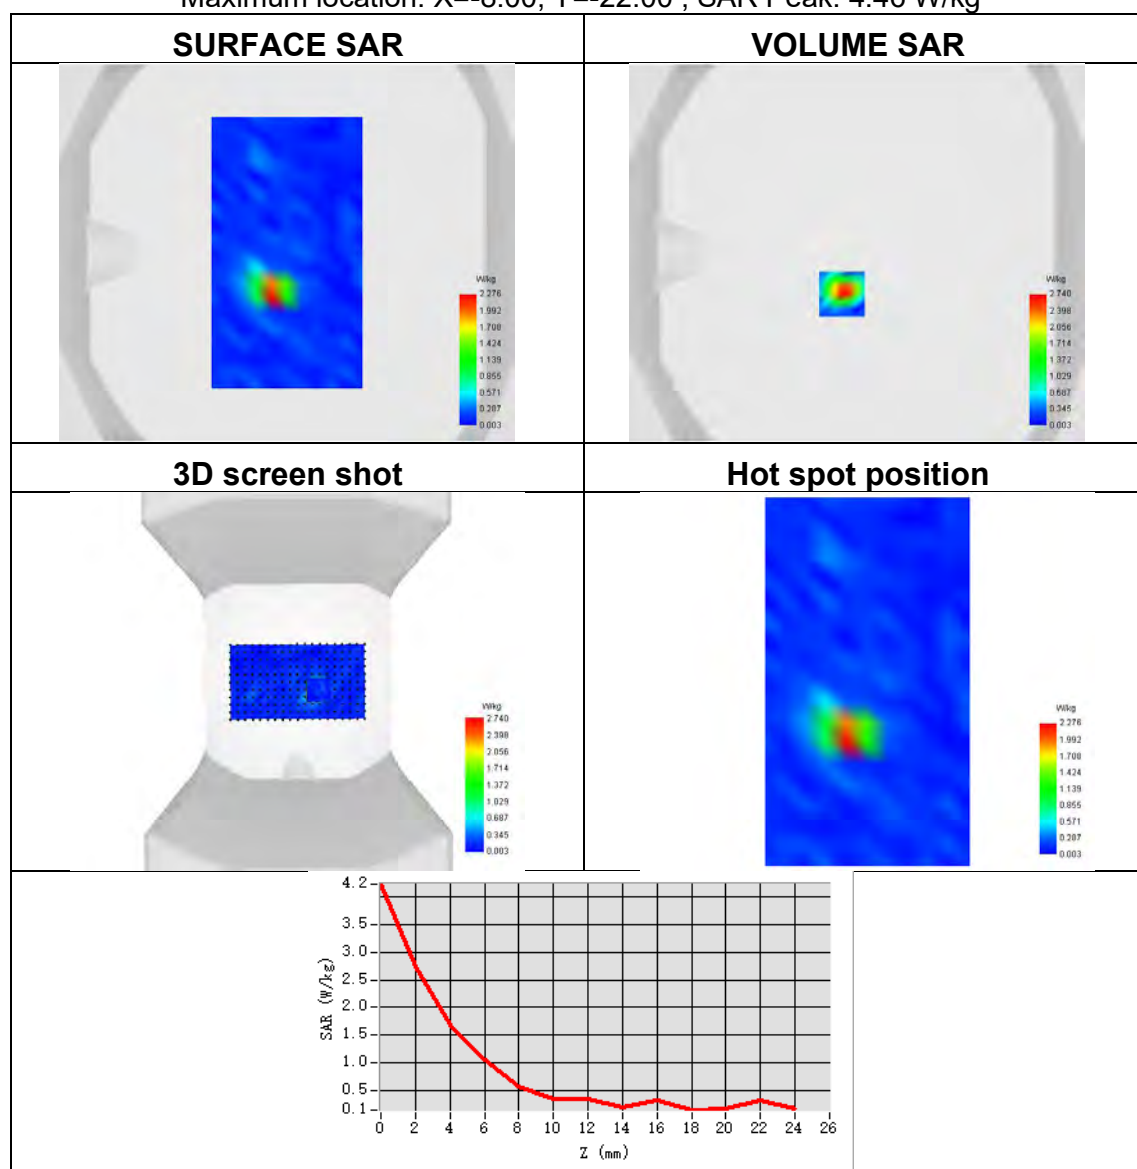




Plot 45:

Test Date	2024-12-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.297
SAR 1g (W/Kg)	0.958
ConvF	1.83
Relative permittivity	36.62
Conductivity (S/m)	4.74

Maximum location: X=6.00, Y=30.00 ; SAR Peak: 2.87 W/kg

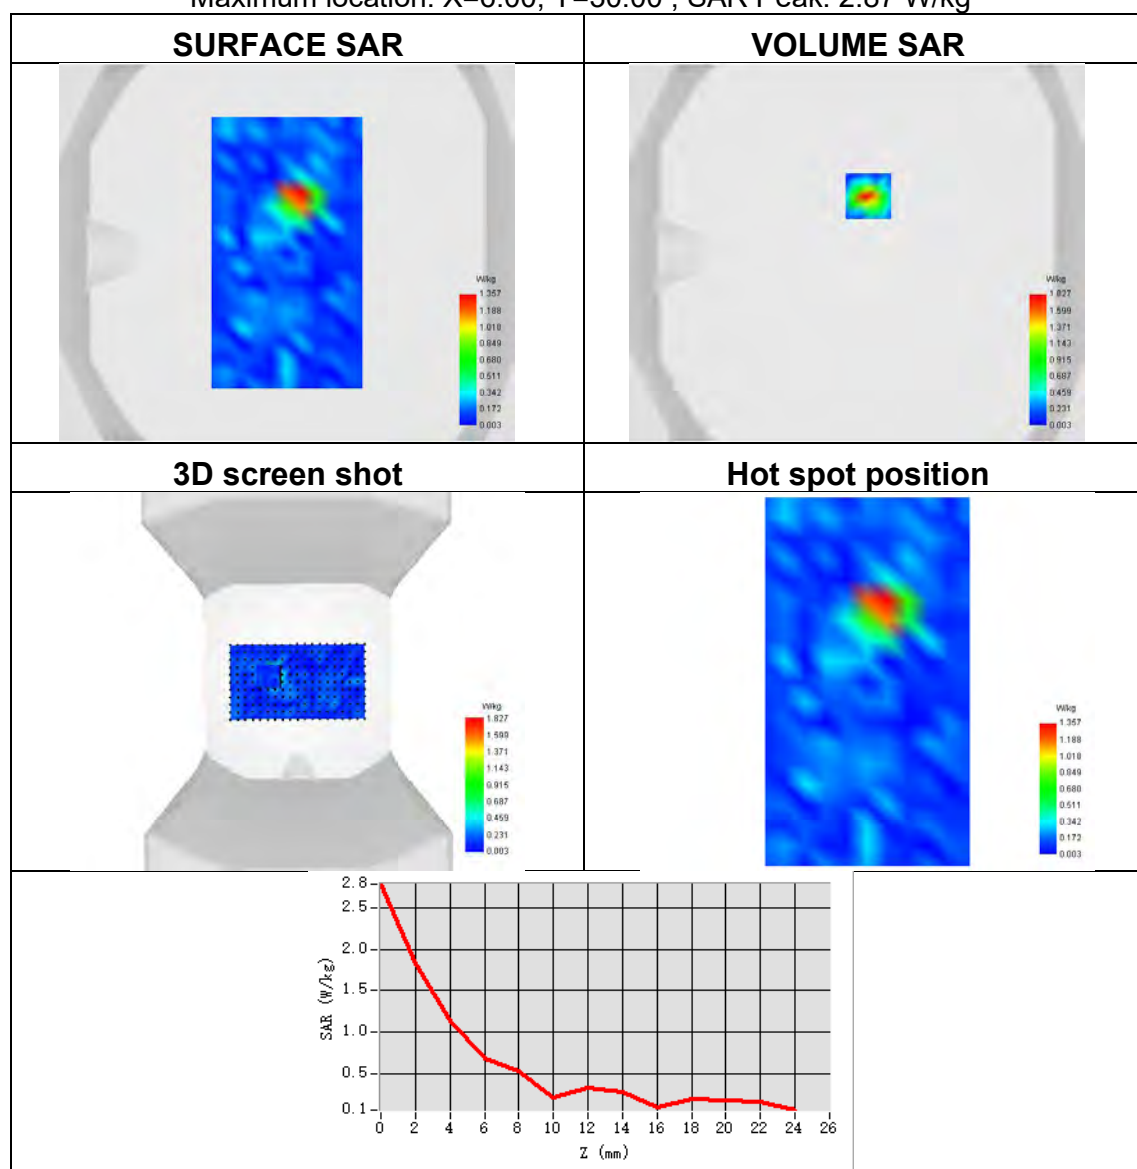




Plot 46:

Test Date	2024-12-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.236
SAR 1g (W/Kg)	0.539
ConvF	1.86
Relative permittivity	36.53
Conductivity (S/m)	5.13

Maximum location: X=15.00, Y=6.00 ; SAR Peak: 2.15 W/kg

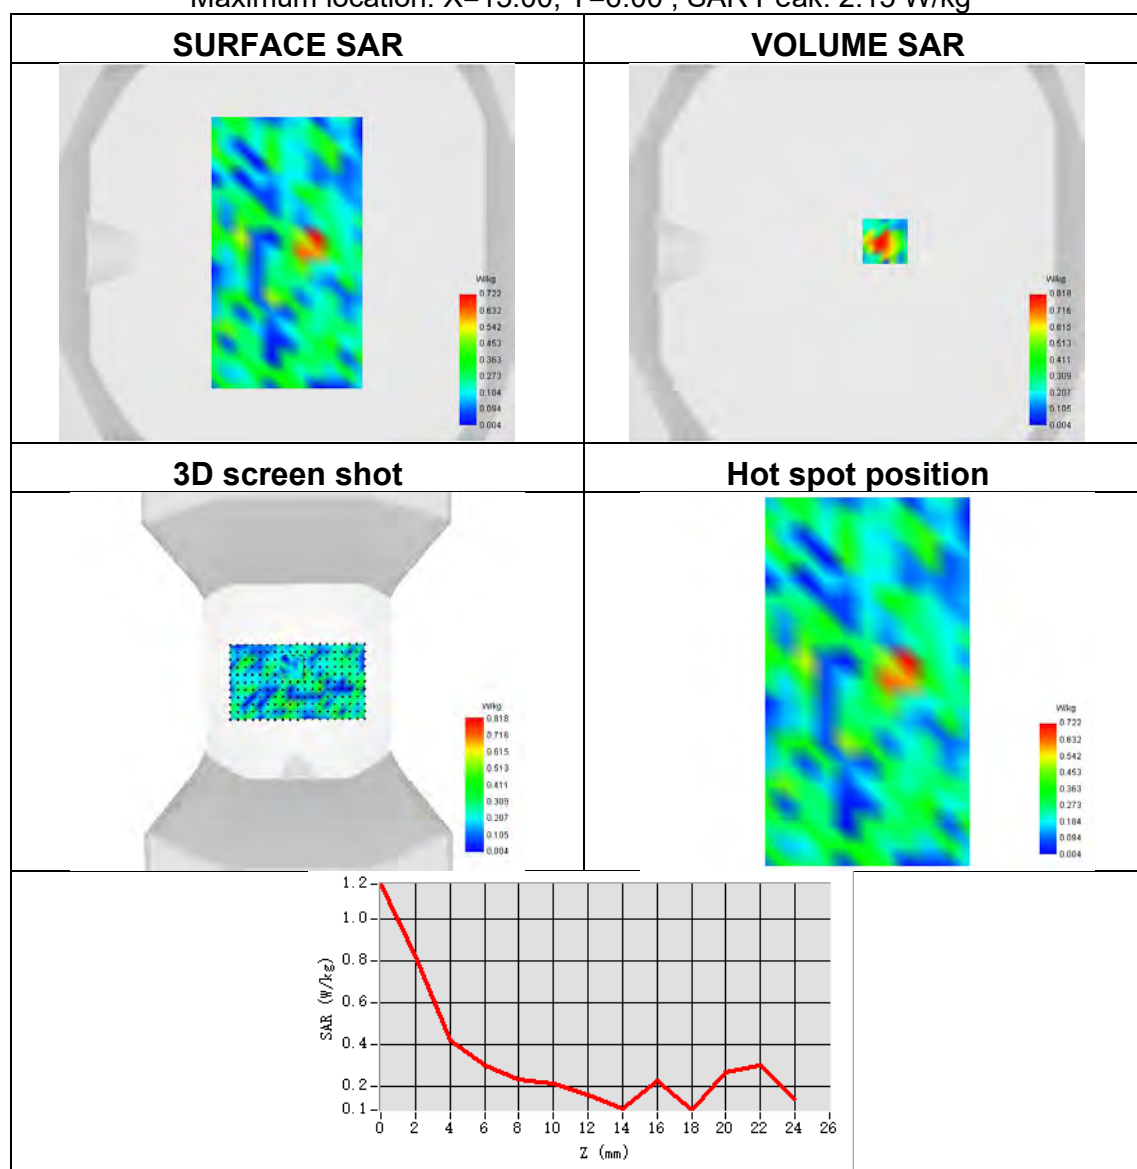




Plot 47:

Test Date	2024-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.246
SAR 1g (W/Kg)	0.515
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.16

Maximum location: X=14.00, Y=8.00 ; SAR Peak: 2.20 W/kg

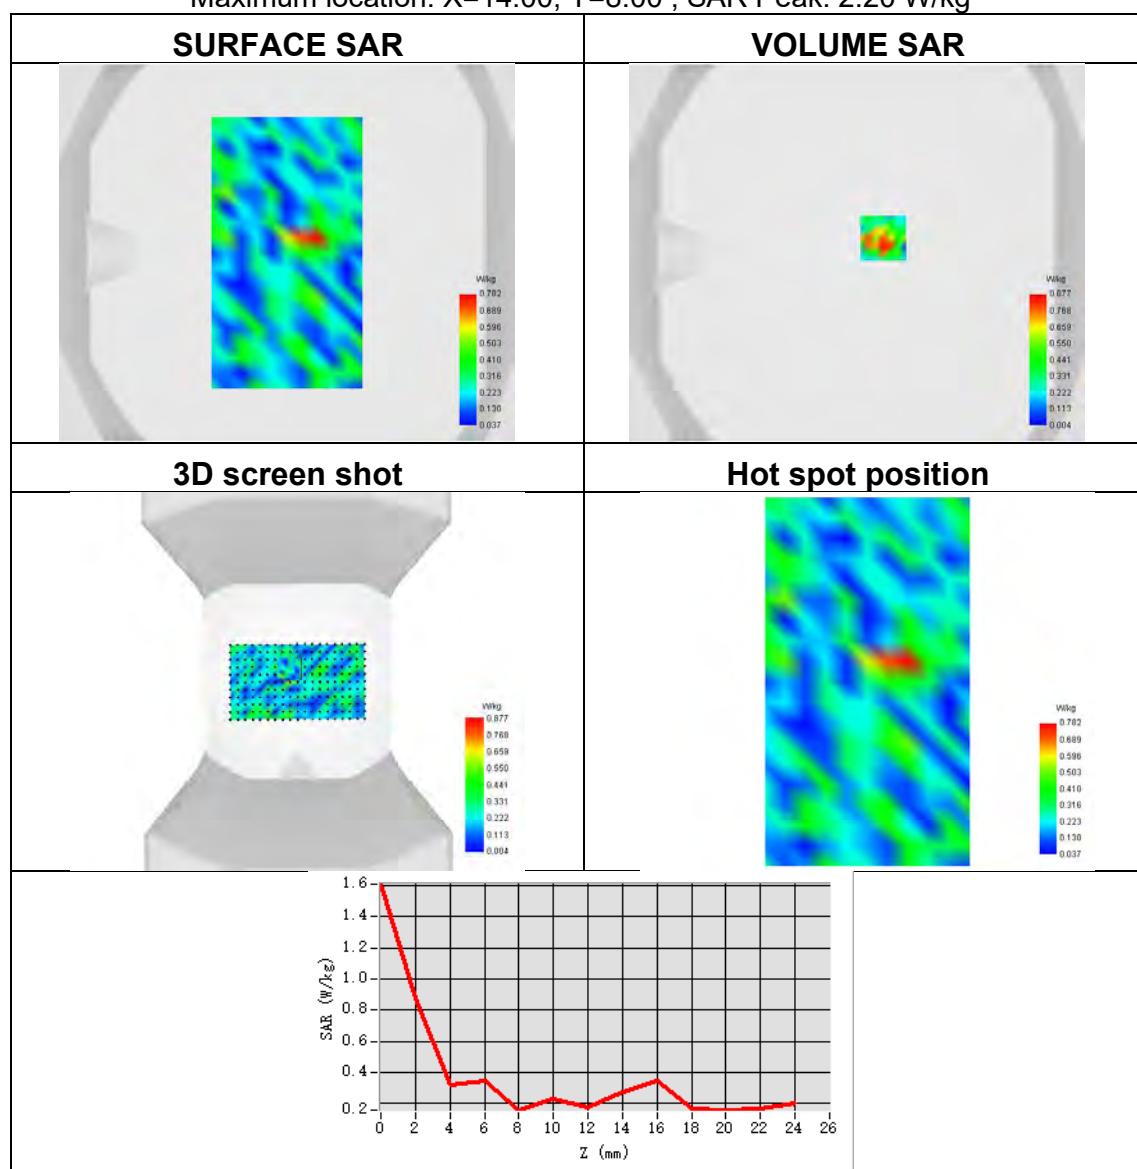




Plot 48:

Test Date	2025-01-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GSM850
Signal	TDMA (GSM)
Frequency	848.8
SAR 10g (W/Kg)	0.875
SAR 1g (W/Kg)	1.420
ConvF	1.70
Relative permittivity	41.37
Conductivity (S/m)	0.93

Maximum location: X=0.00, Y=-18.00 ; SAR Peak: 2.19 W/kg

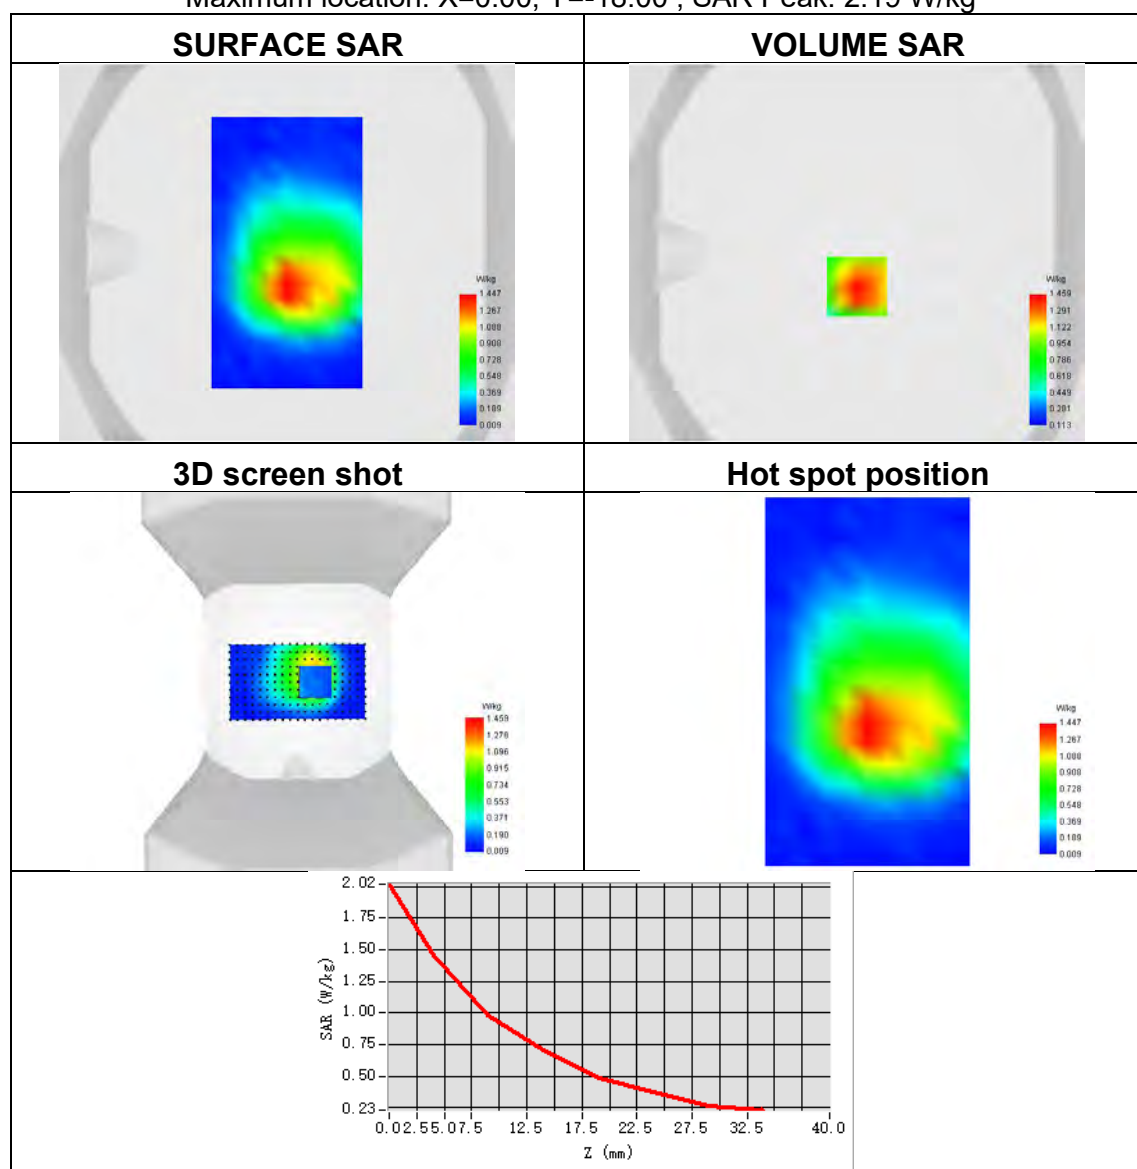




Plot 49:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GSM1900
Signal	TDMA (GSM)
Frequency	1880
SAR 10g (W/Kg)	1.180
SAR 1g (W/Kg)	2.293
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=10.00, Y=-23.00 ; SAR Peak: 3.83 W/kg

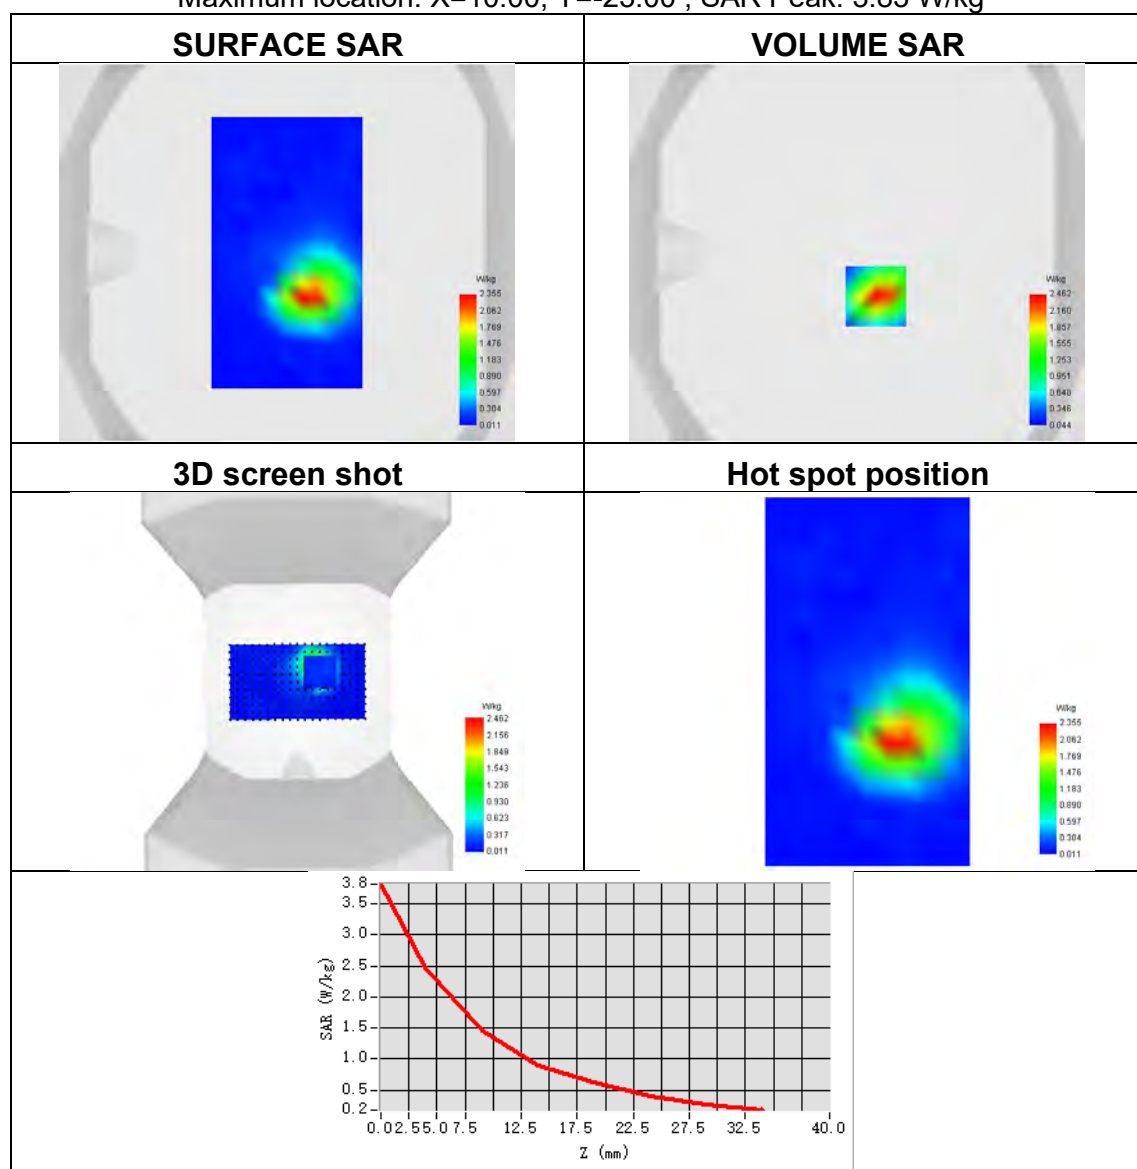




Plot 50:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1880
SAR 10g (W/Kg)	1.508
SAR 1g (W/Kg)	2.962
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36

Maximum location: X=8.00, Y=-26.00 ; SAR Peak: 4.86 W/kg

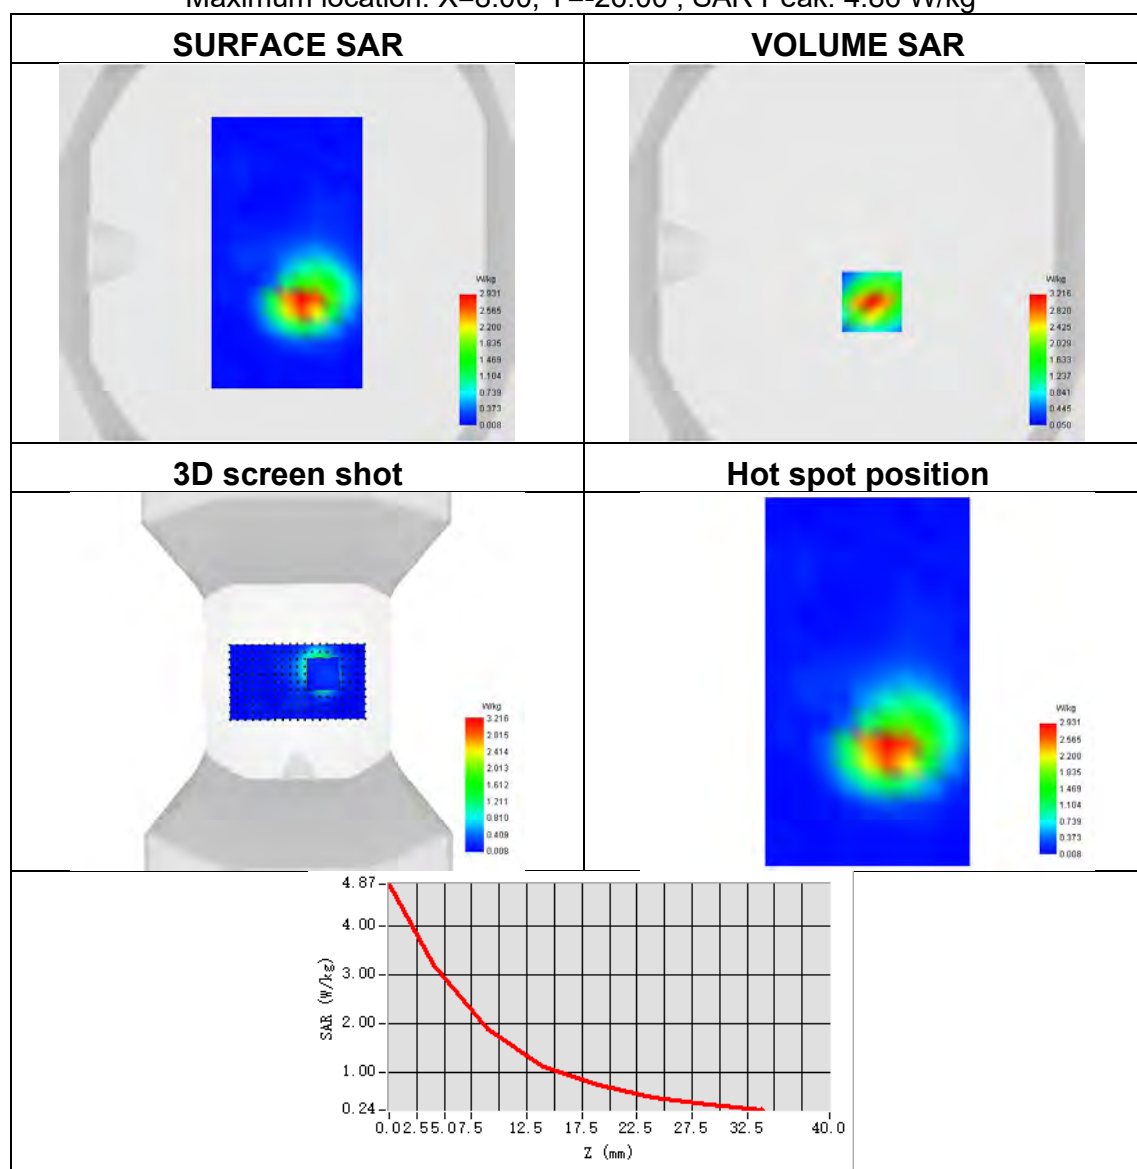




Plot 51:

Test Date	2024-12-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	2.046
SAR 1g (W/Kg)	3.971
ConvF	1.91
Relative permittivity	41.12
Conductivity (S/m)	1.38

Maximum location: X=9.00, Y=-33.00 ; SAR Peak: 6.55 W/kg

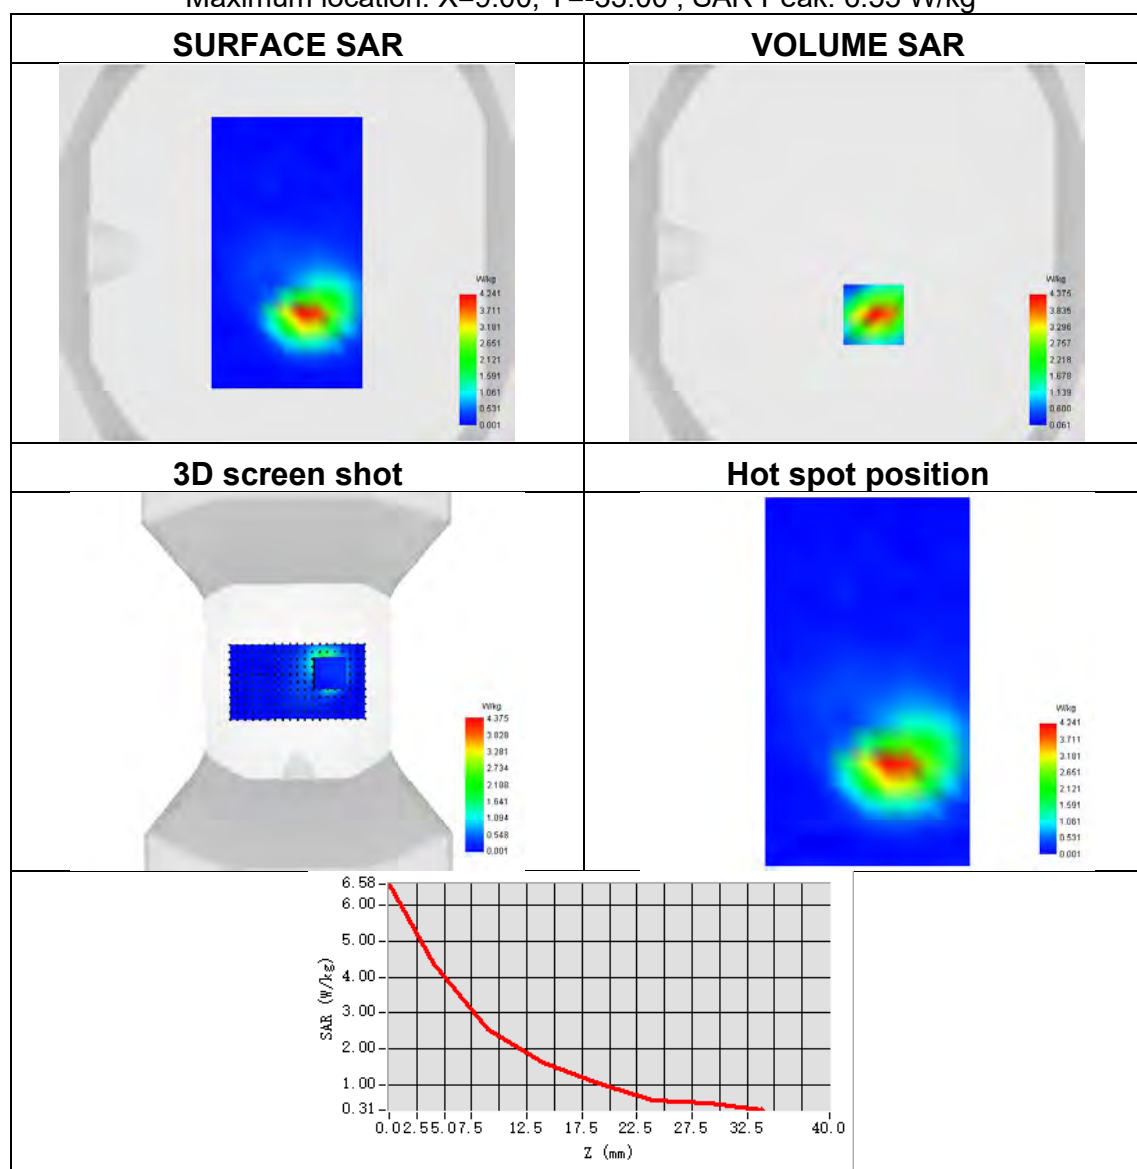




Plot 52:

Test Date	2024-12-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	1.033
SAR 1g (W/Kg)	1.742
ConvF	1.70
Relative permittivity	41.14
Conductivity (S/m)	0.92

Maximum location: X=-8.00, Y=-14.00 ; SAR Peak: 2.83 W/kg

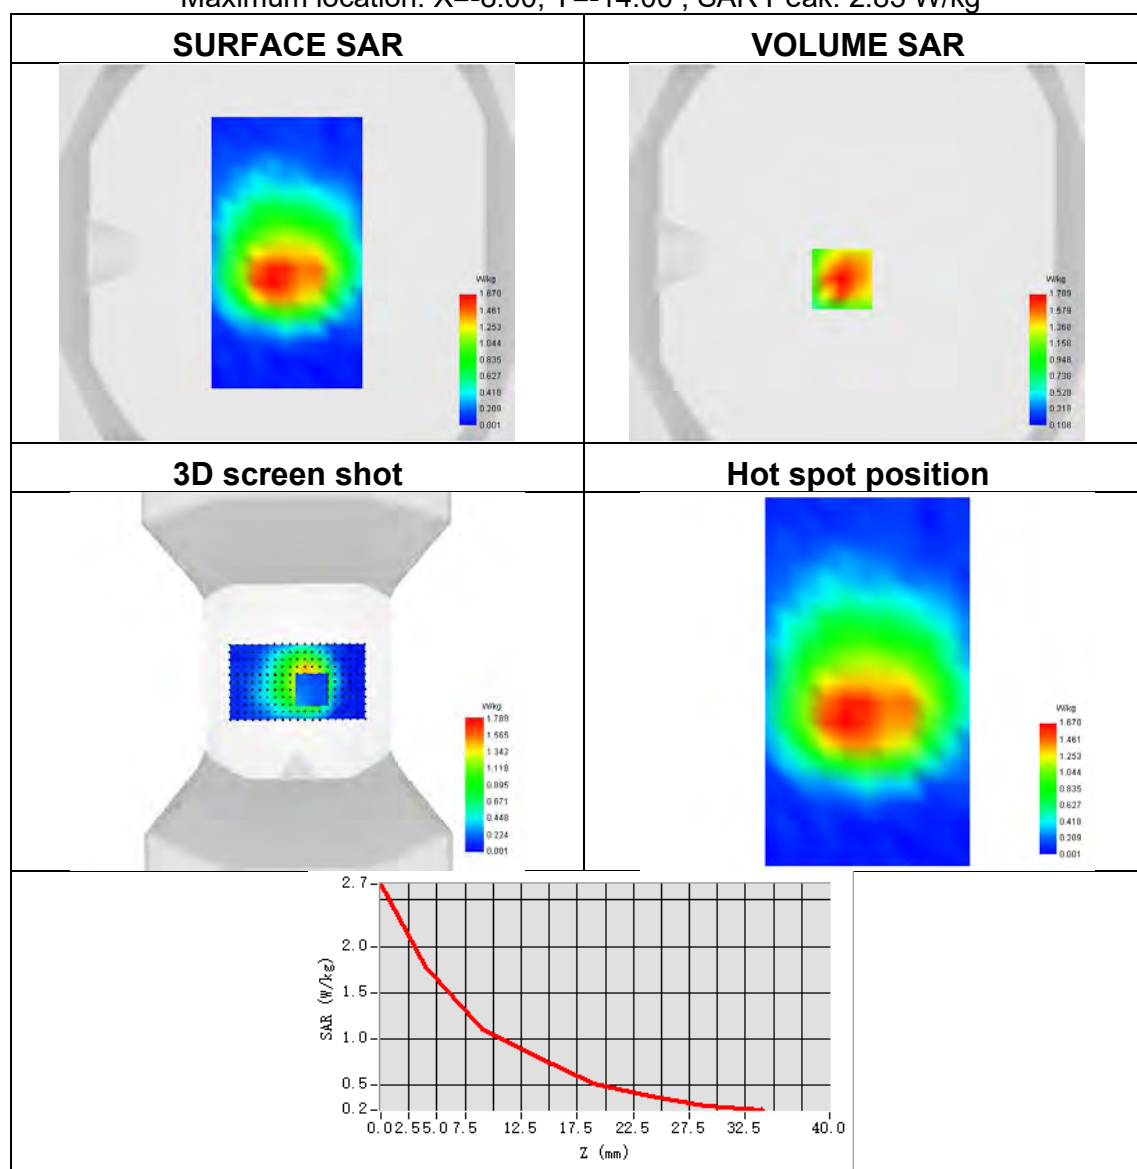




Plot 53:

Test Date	2024-12-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Right Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2462
SAR 10g (W/Kg)	0.558
SAR 1g (W/Kg)	1.242
ConvF	2.30
Relative permittivity	39.17
Conductivity (S/m)	1.76

Maximum location: X=-2.00, Y=-2.00 ; SAR Peak: 2.47 W/kg

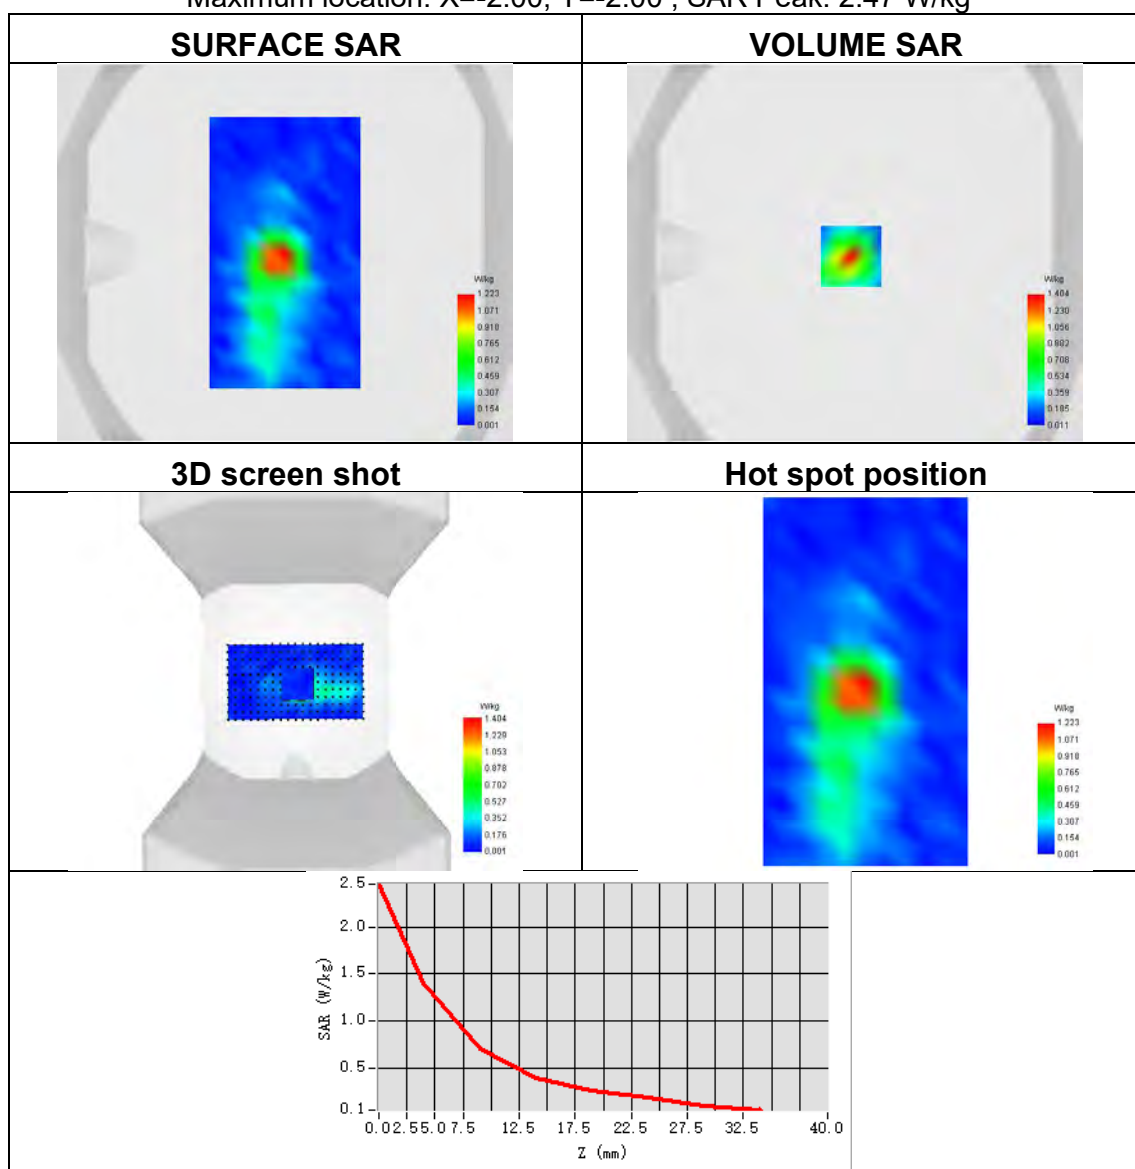




Plot 54:

Test Date	2024-12-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.538
SAR 1g (W/Kg)	1.734
ConvF	1.98
Relative permittivity	36.25
Conductivity (S/m)	4.68

Maximum location: X=1.00, Y=40.00 ; SAR Peak: 5.42 W/kg

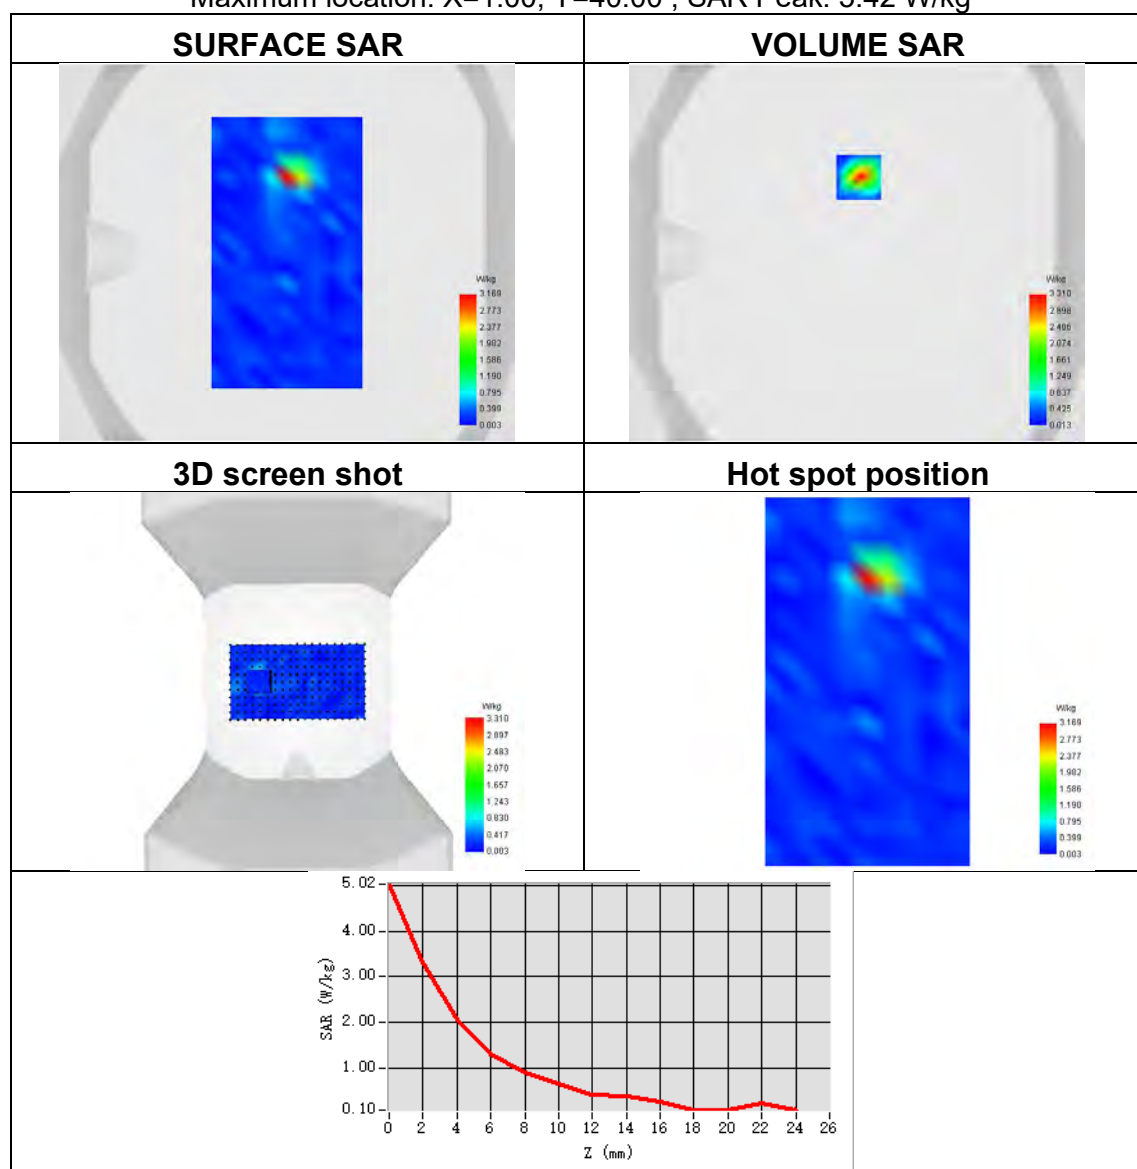




Plot 55:

Test Date	2024-12-10
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2a
Signal	IEEE 802.11a
Frequency	5260
SAR 10g (W/Kg)	0.482
SAR 1g (W/Kg)	1.555
ConvF	1.83
Relative permittivity	36.62
Conductivity (S/m)	4.74

Maximum location: X=7.00, Y=0.00 ; SAR Peak: 4.95 W/kg

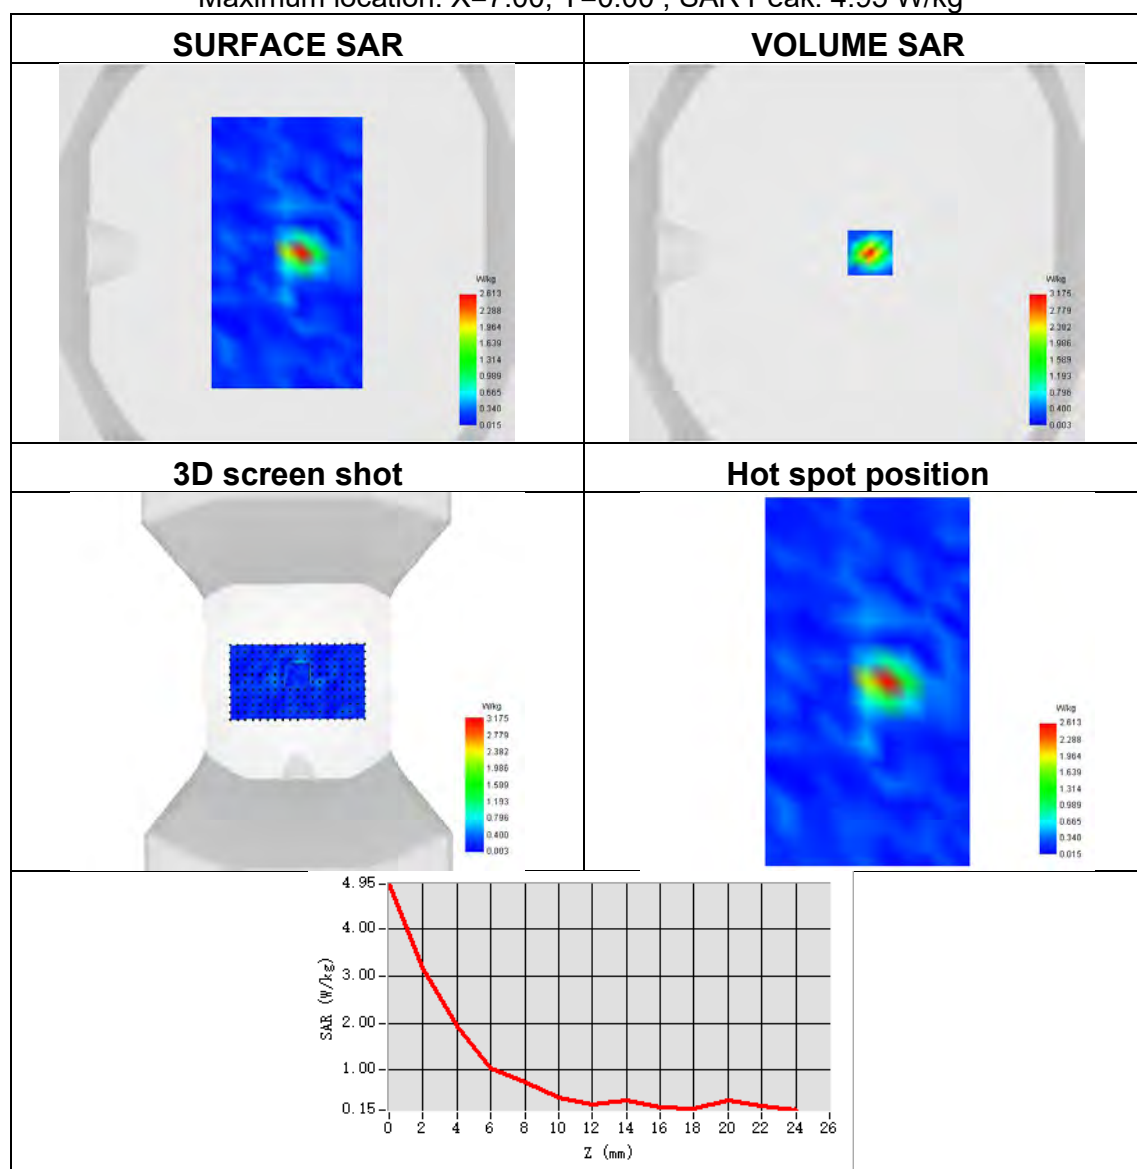




Plot 56:

Test Date	2024-12-08
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.343
SAR 1g (W/Kg)	0.839
ConvF	1.86
Relative permittivity	36.53
Conductivity (S/m)	5.13

Maximum location: X=8.00, Y=8.00 ; SAR Peak: 3.00 W/kg

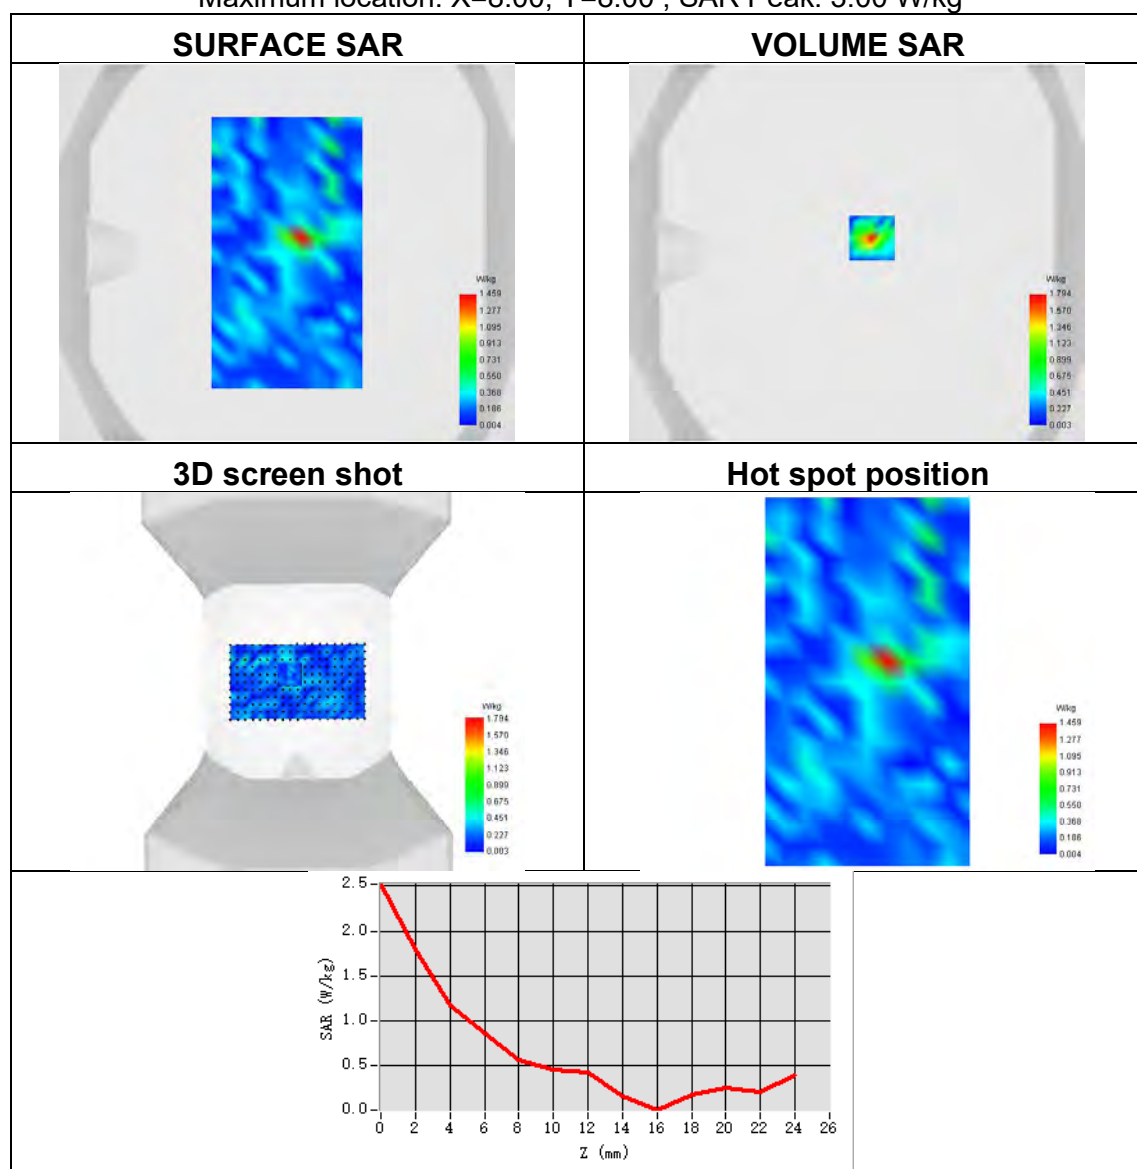




Plot 57:

Test Date	2024-12-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Right Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.341
SAR 1g (W/Kg)	0.884
ConvF	1.71
Relative permittivity	36.08
Conductivity (S/m)	5.16

Maximum location: X=7.00, Y=7.00 ; SAR Peak: 3.56 W/kg

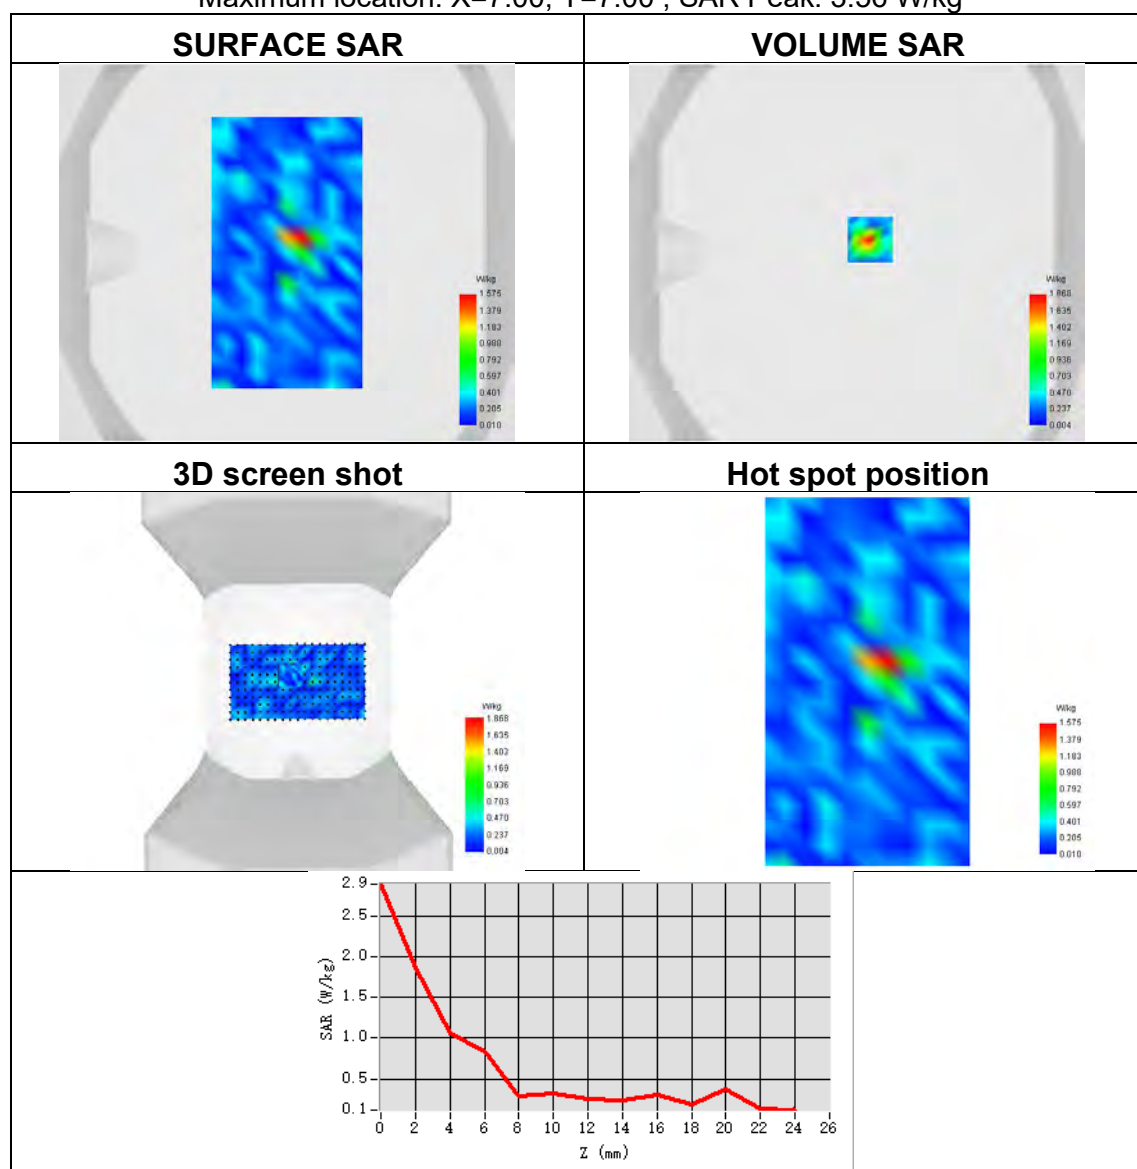




Plot 58:

Test Date	2024-12-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1880
SAR 10g (W/Kg)	1.658
SAR 1g (W/Kg)	3.208
ConvF	2.24
Relative permittivity	40.85
Conductivity (S/m)	1.36


Maximum location: X=18.00, Y=-24.00 ; SAR Peak: 5.18 W/kg

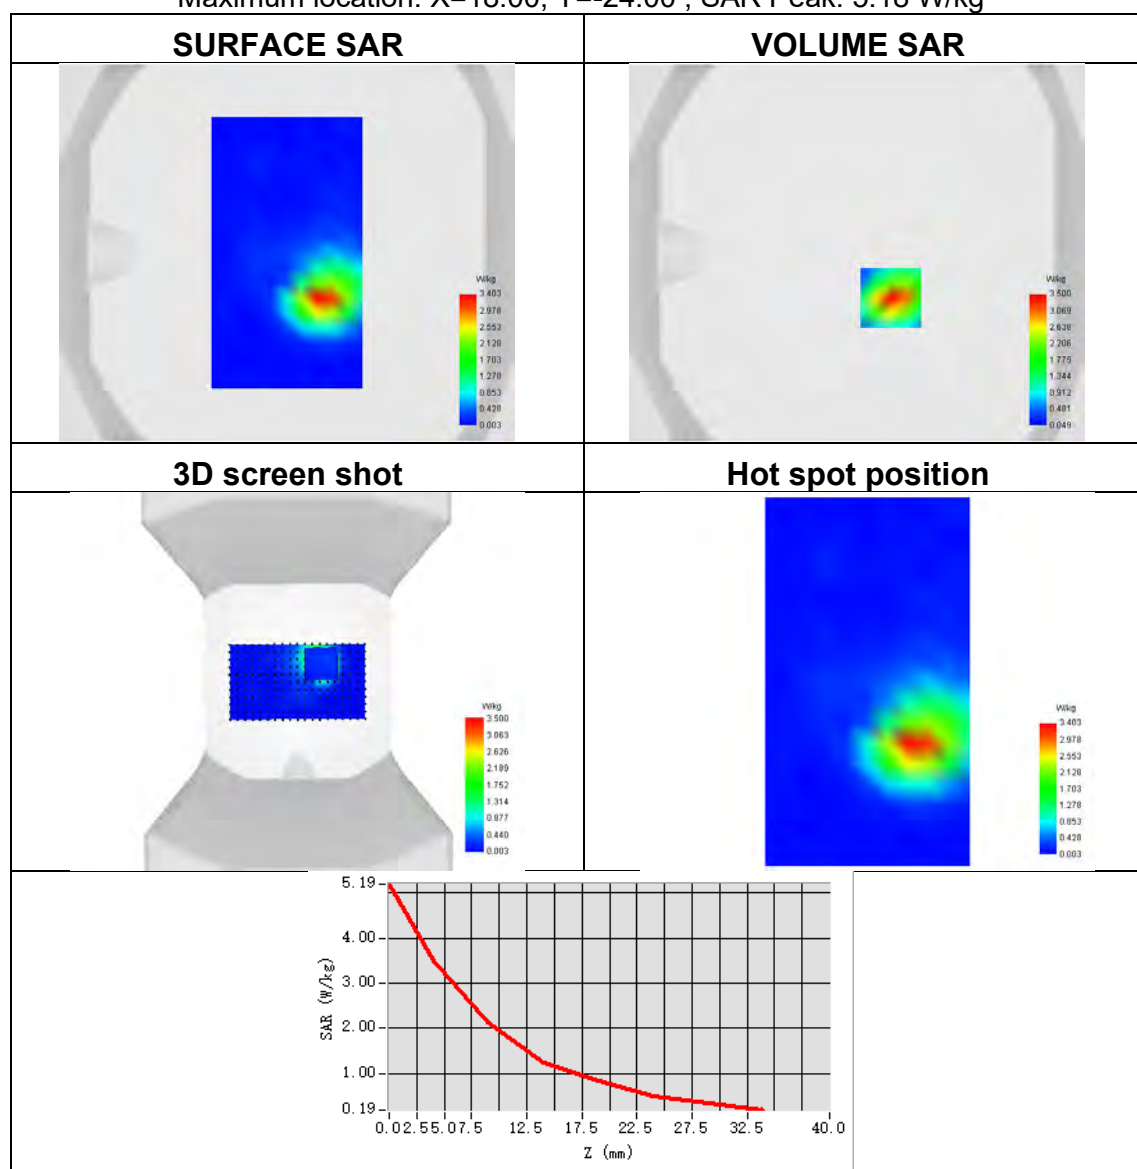

Plot 59:

Test Date	2024-12-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	1.624
SAR 1g (W/Kg)	3.135
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	1.42

Maximum location: X=0.00, Y=-34.00 ; SAR Peak: 5.16 W/kg

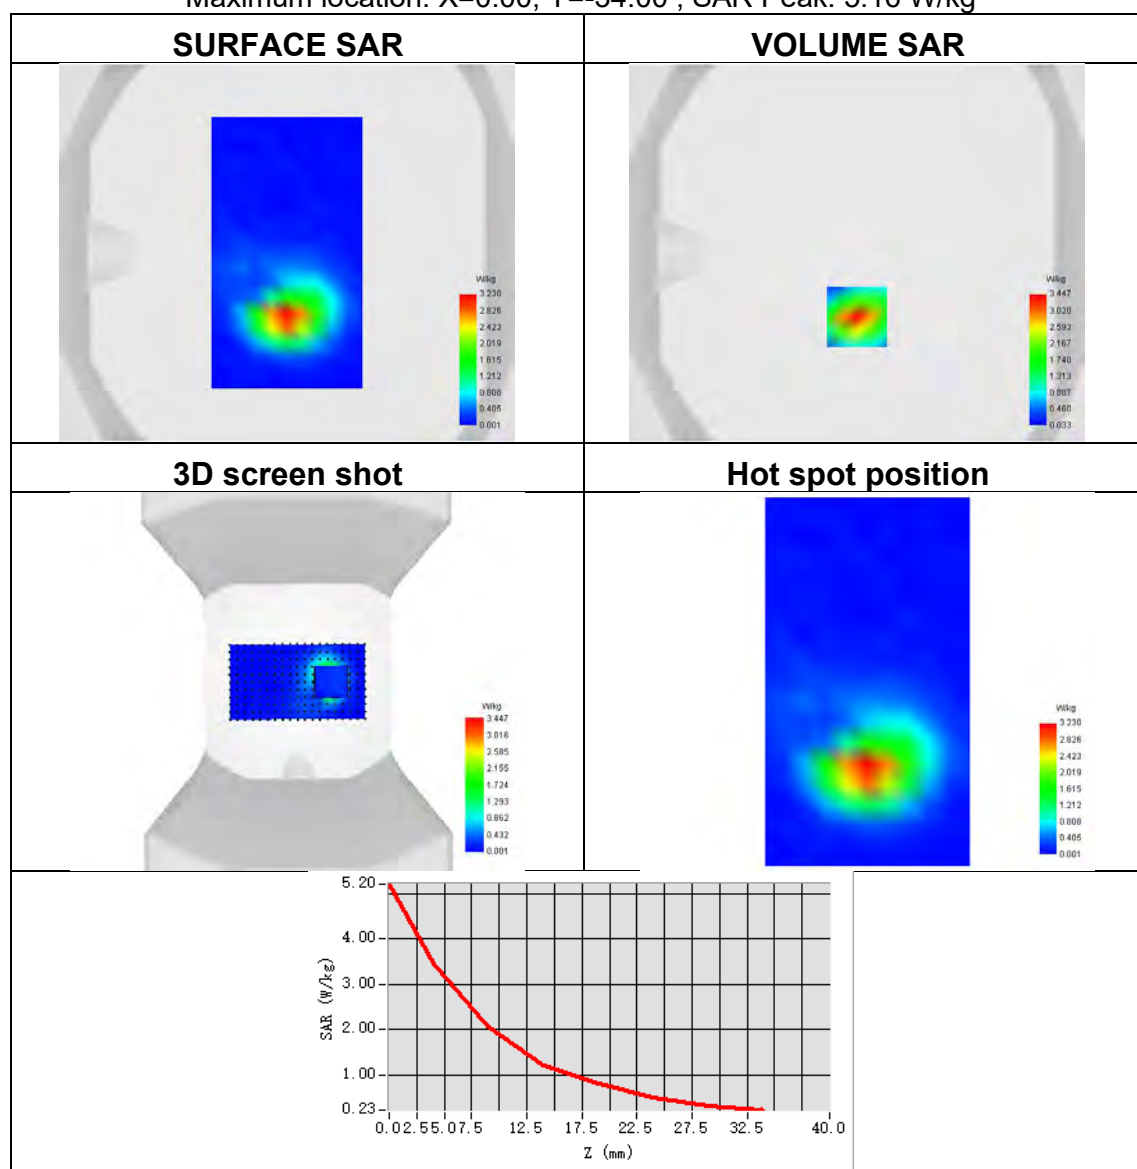




Plot 60:

Test Date	2024-12-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	1.292
SAR 1g (W/Kg)	2.135
ConvF	1.70
Relative permittivity	41.54
Conductivity (S/m)	0.92

Maximum location: X=-9.00, Y=-17.00 ; SAR Peak: 3.32 W/kg

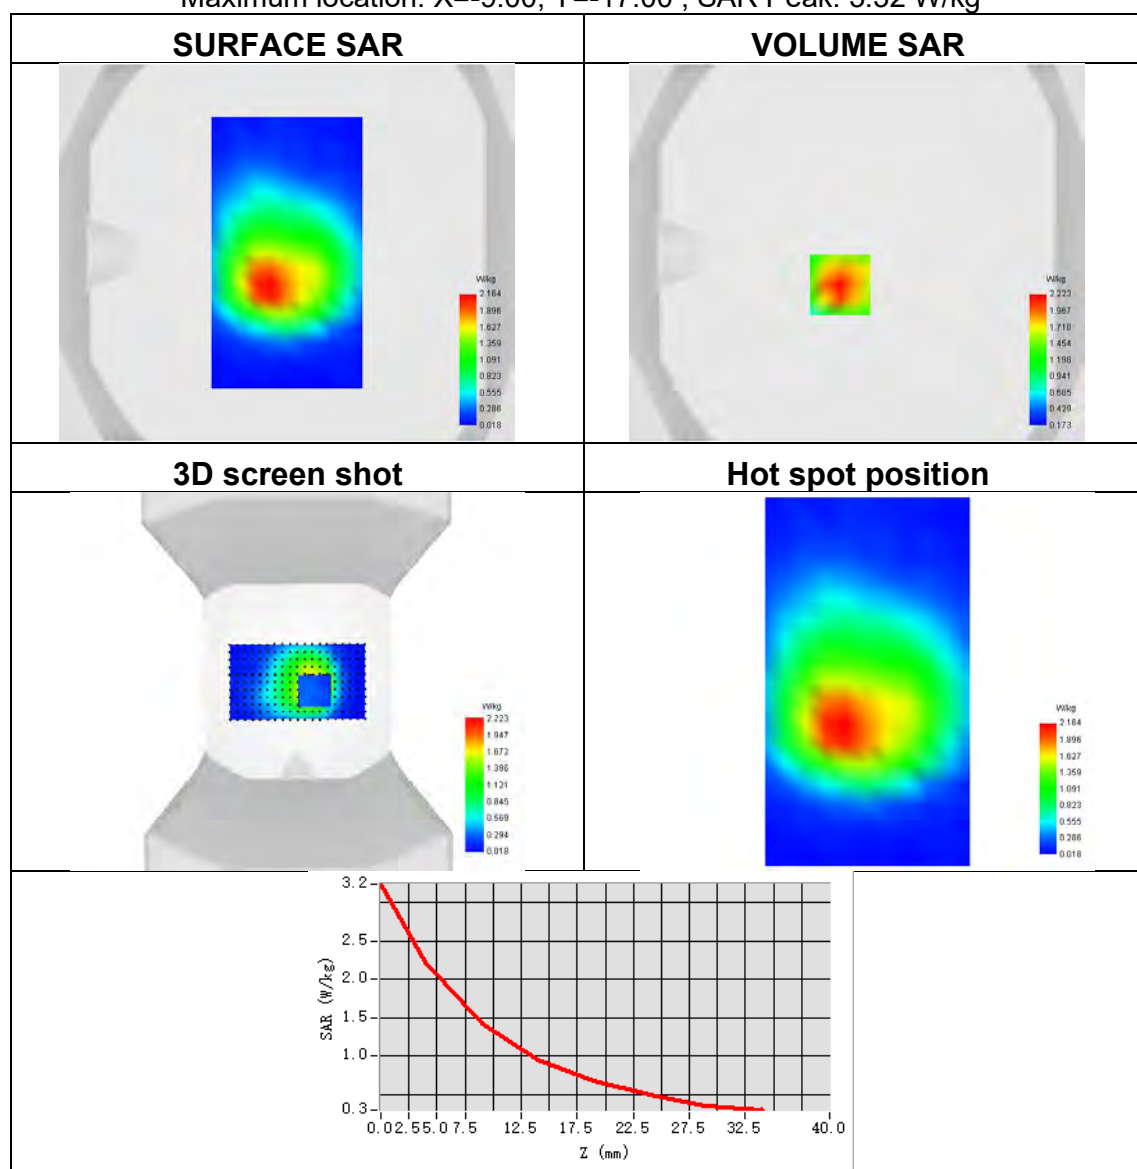




Plot 61:

Test Date	2024-12-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2560
SAR 10g (W/Kg)	2.320
SAR 1g (W/Kg)	5.331
ConvF	2.35
Relative permittivity	39.60
Conductivity (S/m)	1.91

Maximum location: X=-15.00, Y=-47.00 ; SAR Peak: 9.48 W/kg

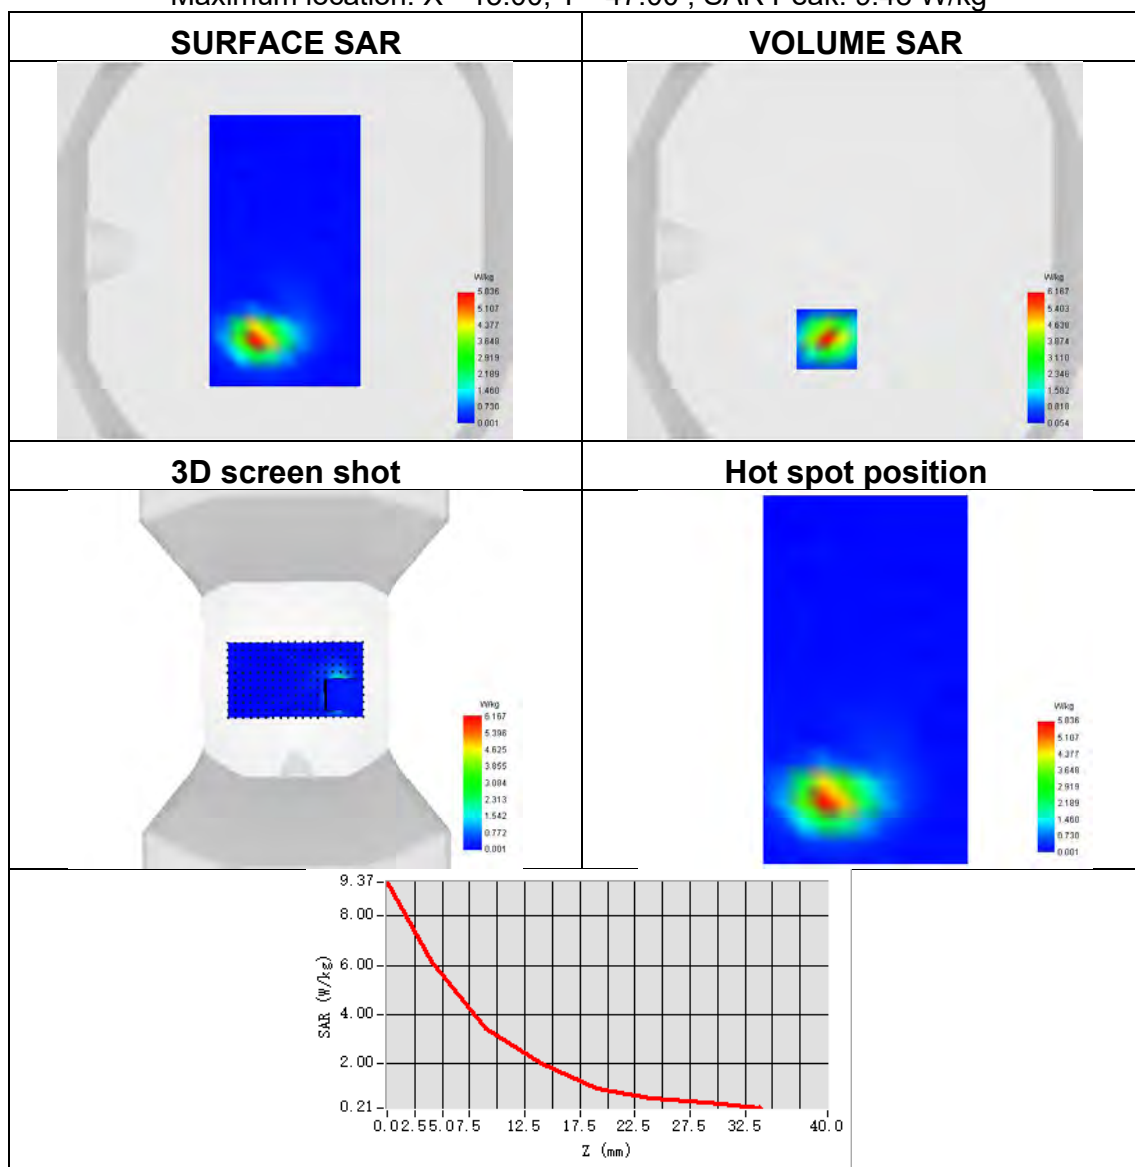




Plot 62:

Test Date	2024-12-11
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	711
SAR 10g (W/Kg)	1.091
SAR 1g (W/Kg)	1.917
ConvF	1.68
Relative permittivity	42.52
Conductivity (S/m)	0.90

Maximum location: X=1.00, Y=-9.00 ; SAR Peak: 2.95 W/kg

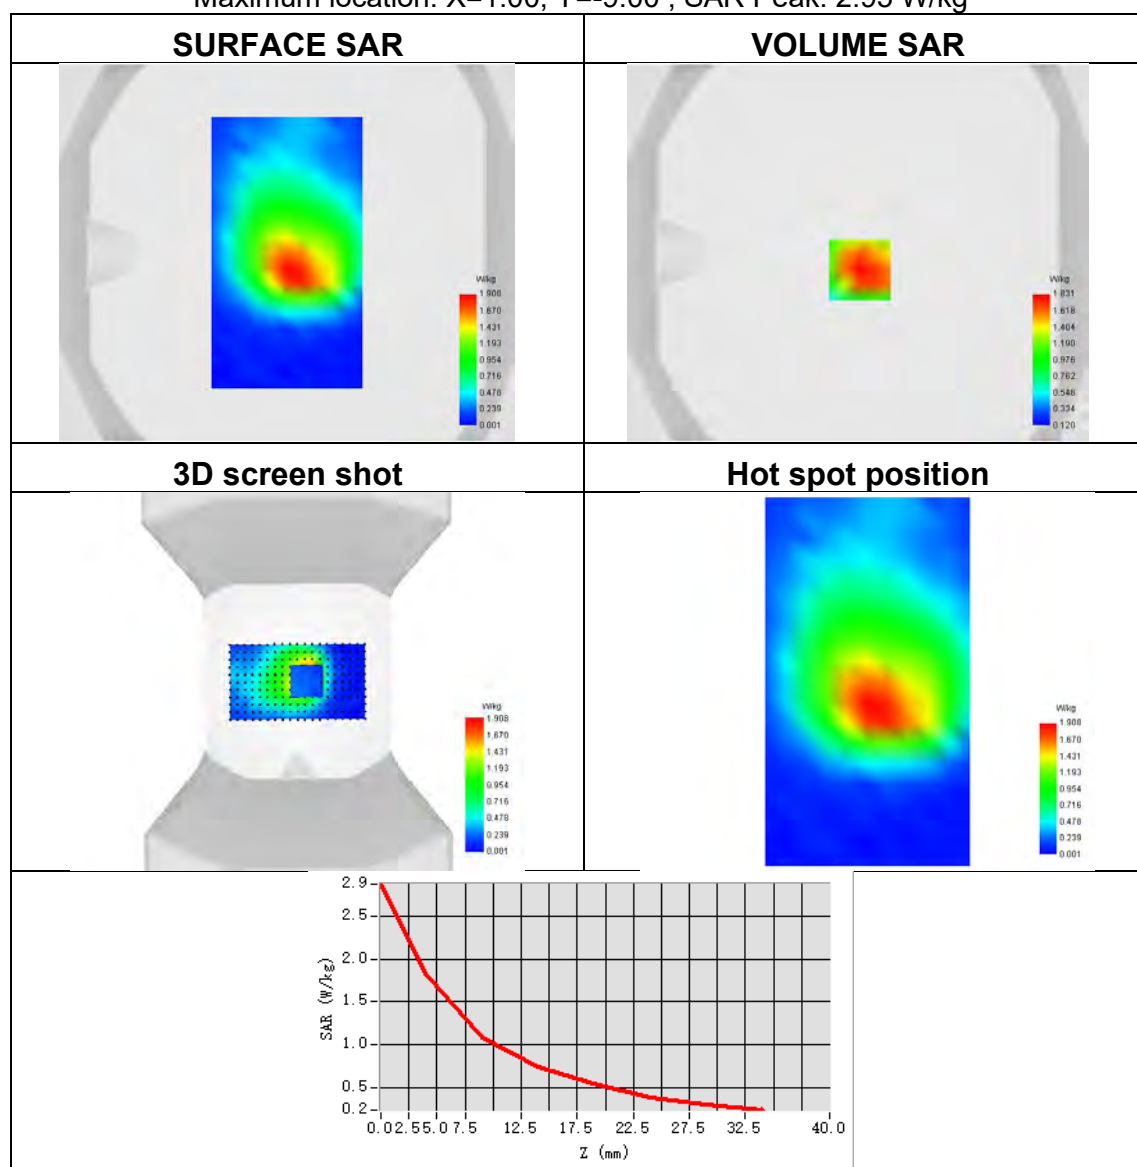




Plot 63:

Test Date	2024-12-25
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.542
SAR 1g (W/Kg)	1.051
ConvF	1.68
Relative permittivity	42.55
Conductivity (S/m)	0.92

Maximum location: X=2.00, Y=-13.00 ; SAR Peak: 1.82 W/kg

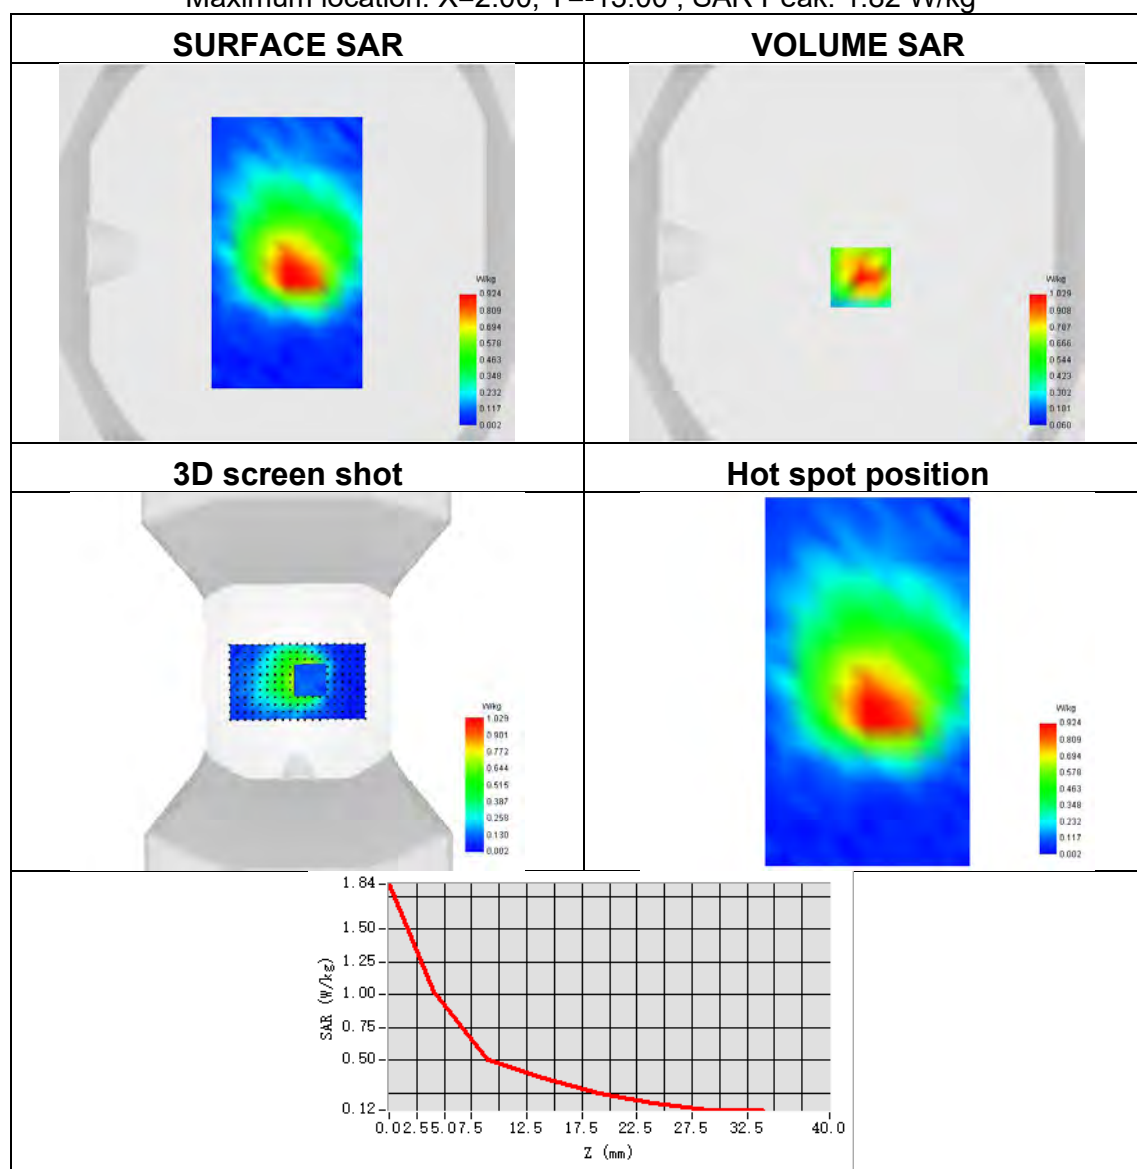




Plot 64:

Test Date	2024-12-16
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 25
Signal	LTE FDD
Frequency	1882.5
SAR 10g (W/Kg)	1.642
SAR 1g (W/Kg)	3.191
ConvF	2.24
Relative permittivity	40.83
Conductivity (S/m)	1.37

Maximum location: X=-5.00, Y=-47.00 ; SAR Peak: 5.24 W/kg

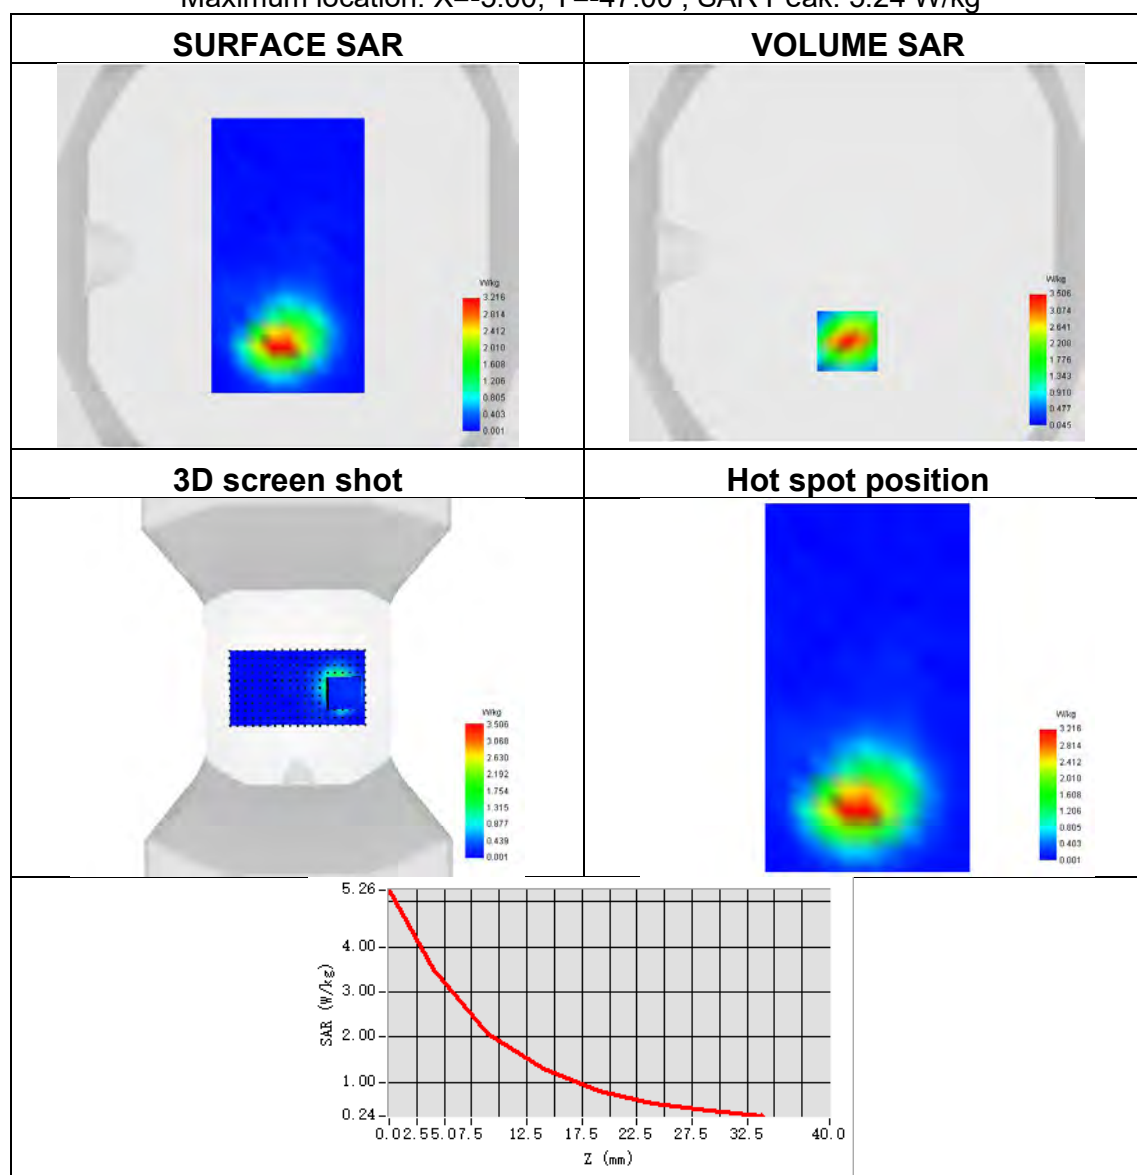




Plot 65:

Test Date	2024-12-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 26
Signal	LTE FDD
Frequency	831.5
SAR 10g (W/Kg)	1.340
SAR 1g (W/Kg)	2.228
ConvF	1.70
Relative permittivity	41.27
Conductivity (S/m)	0.93

Maximum location: X=-8.00, Y=-40.00 ; SAR Peak: 3.43 W/kg

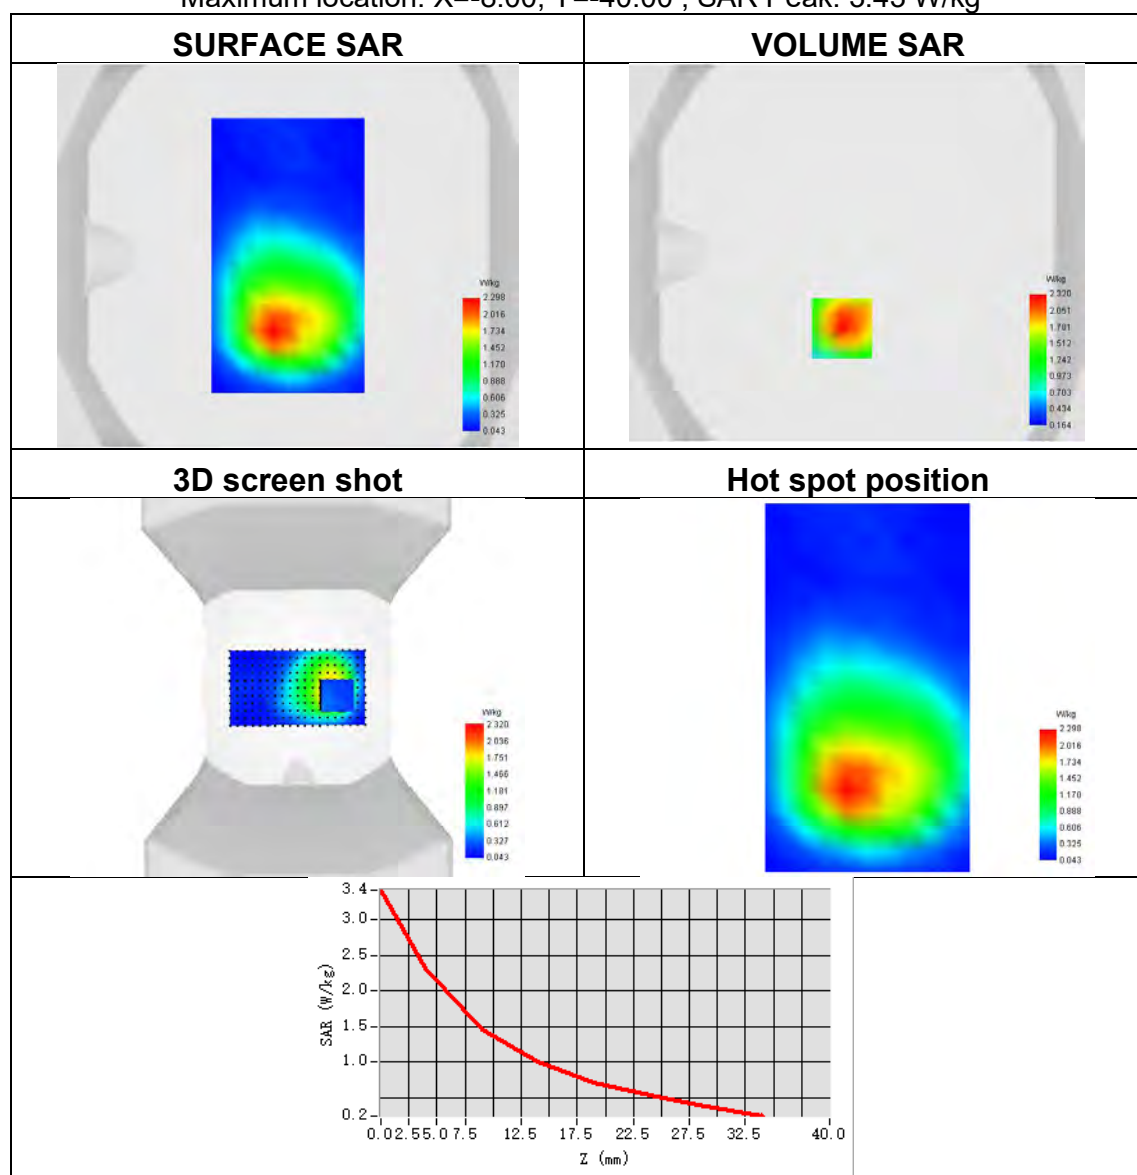




Plot 66:

Test Date	2024-12-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE TDD
Frequency	2610
SAR 10g (W/Kg)	2.447
SAR 1g (W/Kg)	5.722
ConvF	2.35
Relative permittivity	40.08
Conductivity (S/m)	2.03

Maximum location: X=-15.00, Y=-47.00 ; SAR Peak: 10.37 W/kg

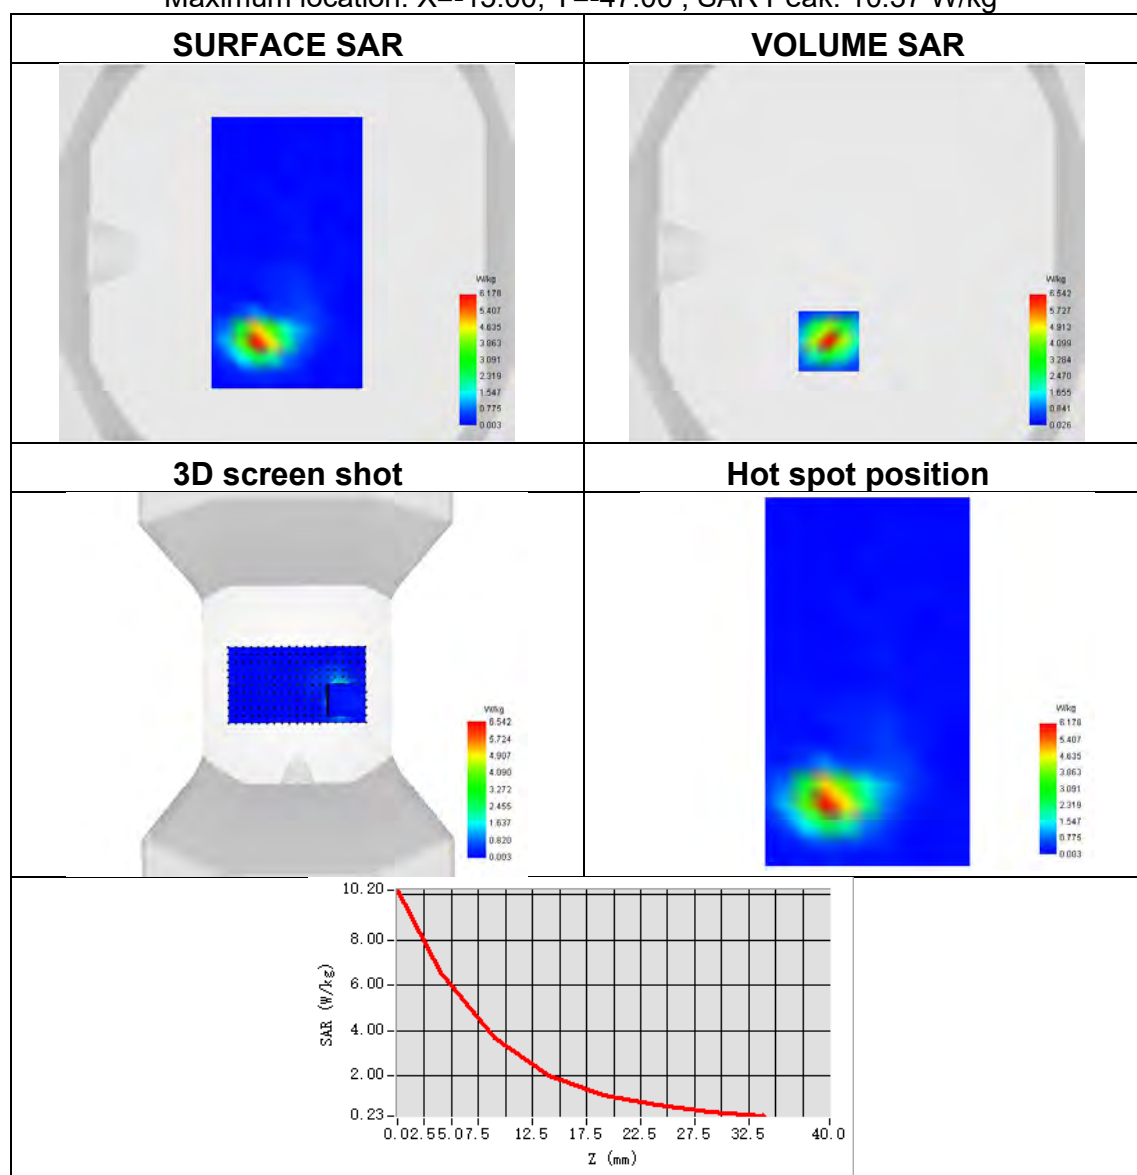




Plot 67:

Test Date	2024-12-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 41
Signal	LTE TDD
Frequency	2593
SAR 10g (W/Kg)	3.039
SAR 1g (W/Kg)	7.059
ConvF	2.35
Relative permittivity	39.27
Conductivity (S/m)	1.98

Maximum location: X=-15.00, Y=-47.00 ; SAR Peak: 12.66 W/kg

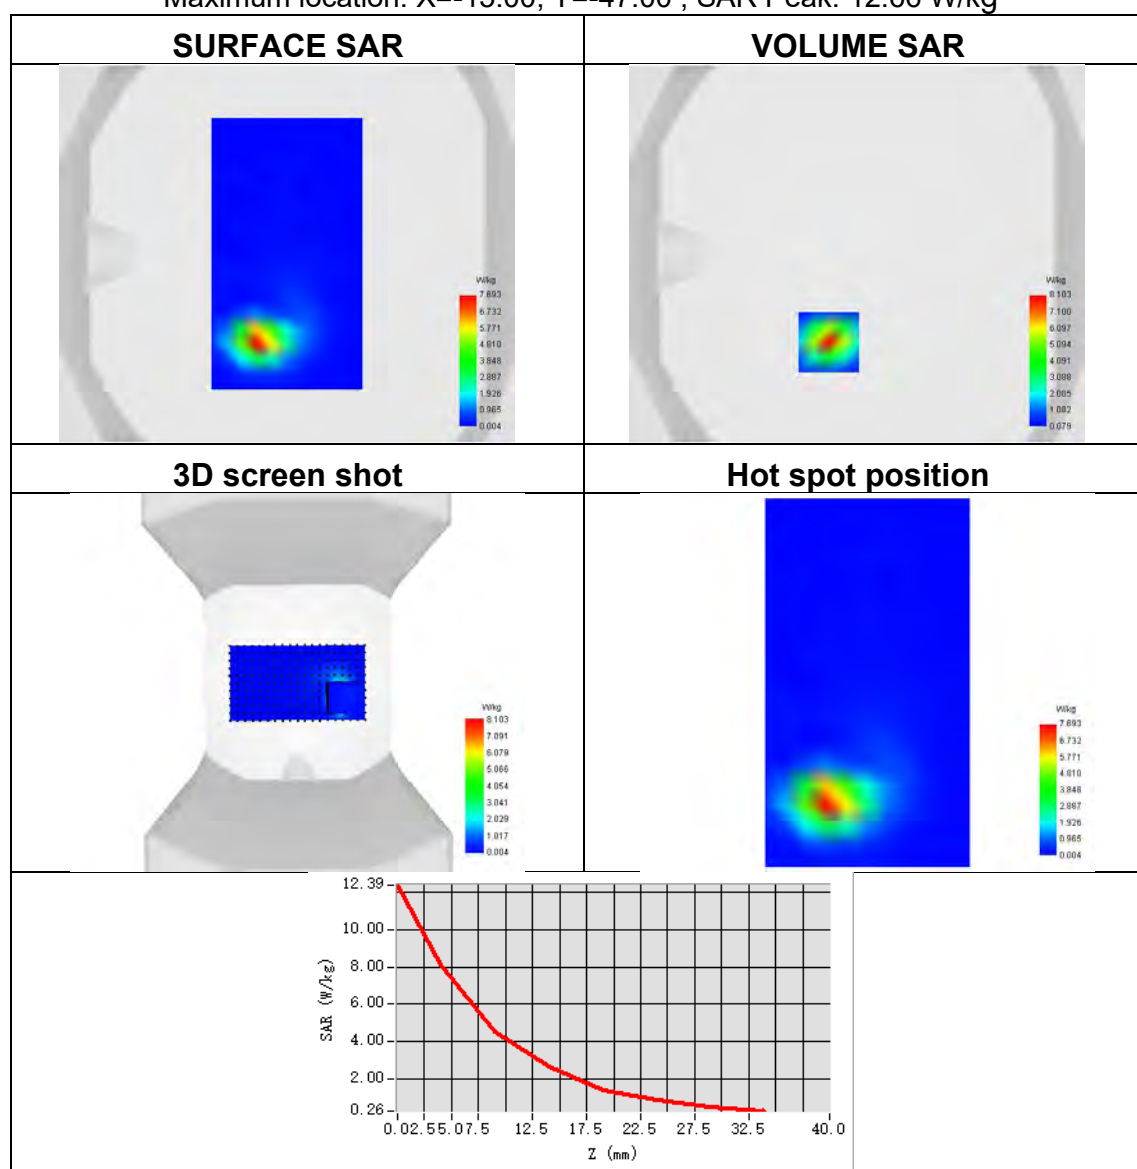




Plot 68:

Test Date	2024-12-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
SAR 10g (W/Kg)	1.833
SAR 1g (W/Kg)	3.549
ConvF	1.91
Relative permittivity	40.48
Conductivity (S/m)	1.40


Maximum location: X=-6.00, Y=-48.00 ; SAR Peak: 5.83 W/kg

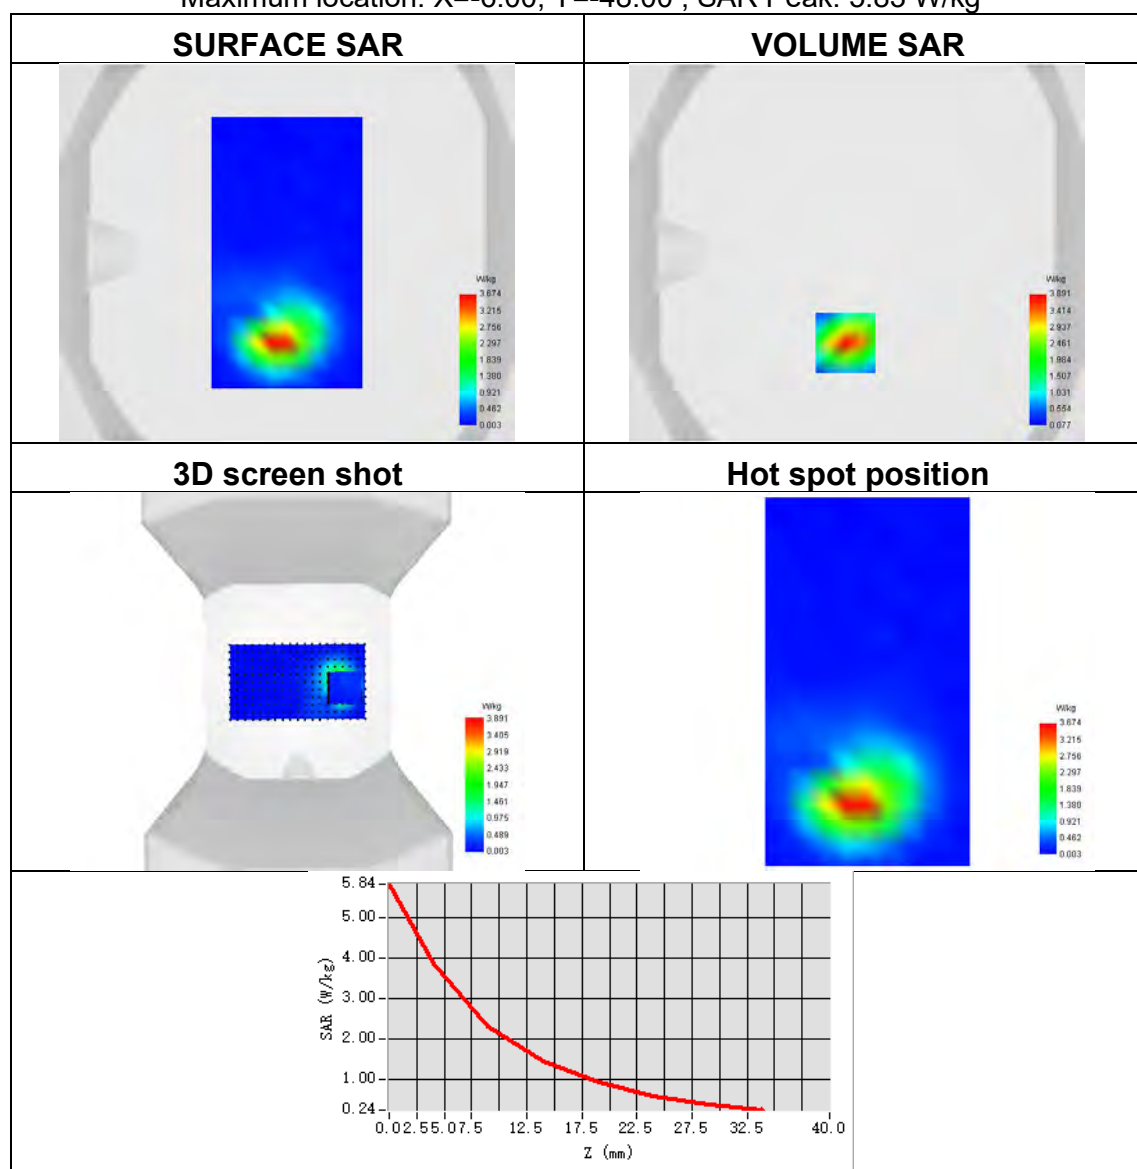

Plot 69:

Test Date	2025-01-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 14
Signal	LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.321
SAR 1g (W/Kg)	0.551
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	0.92


Maximum location: X=1.00, Y=-21.00 ; SAR Peak: 0.86 W/kg

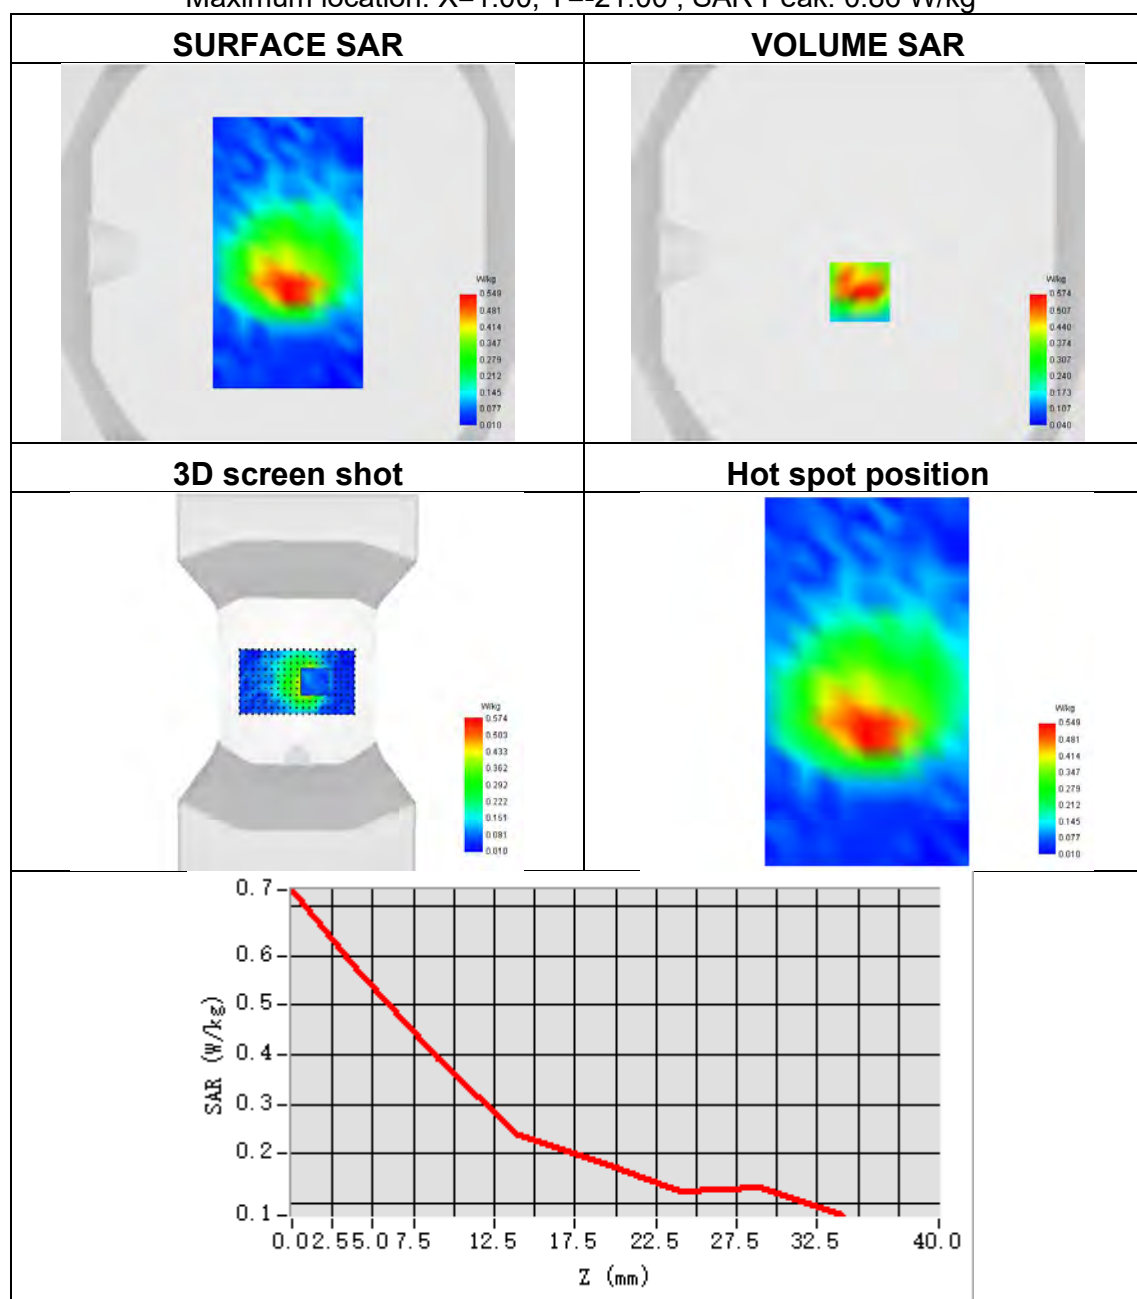

Plot 70:

Test Date	2025-01-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 14
Signal	LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.278
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	0.92


Maximum location: X=-7.00, Y=-24.00 ; SAR Peak: 0.45 W/kg

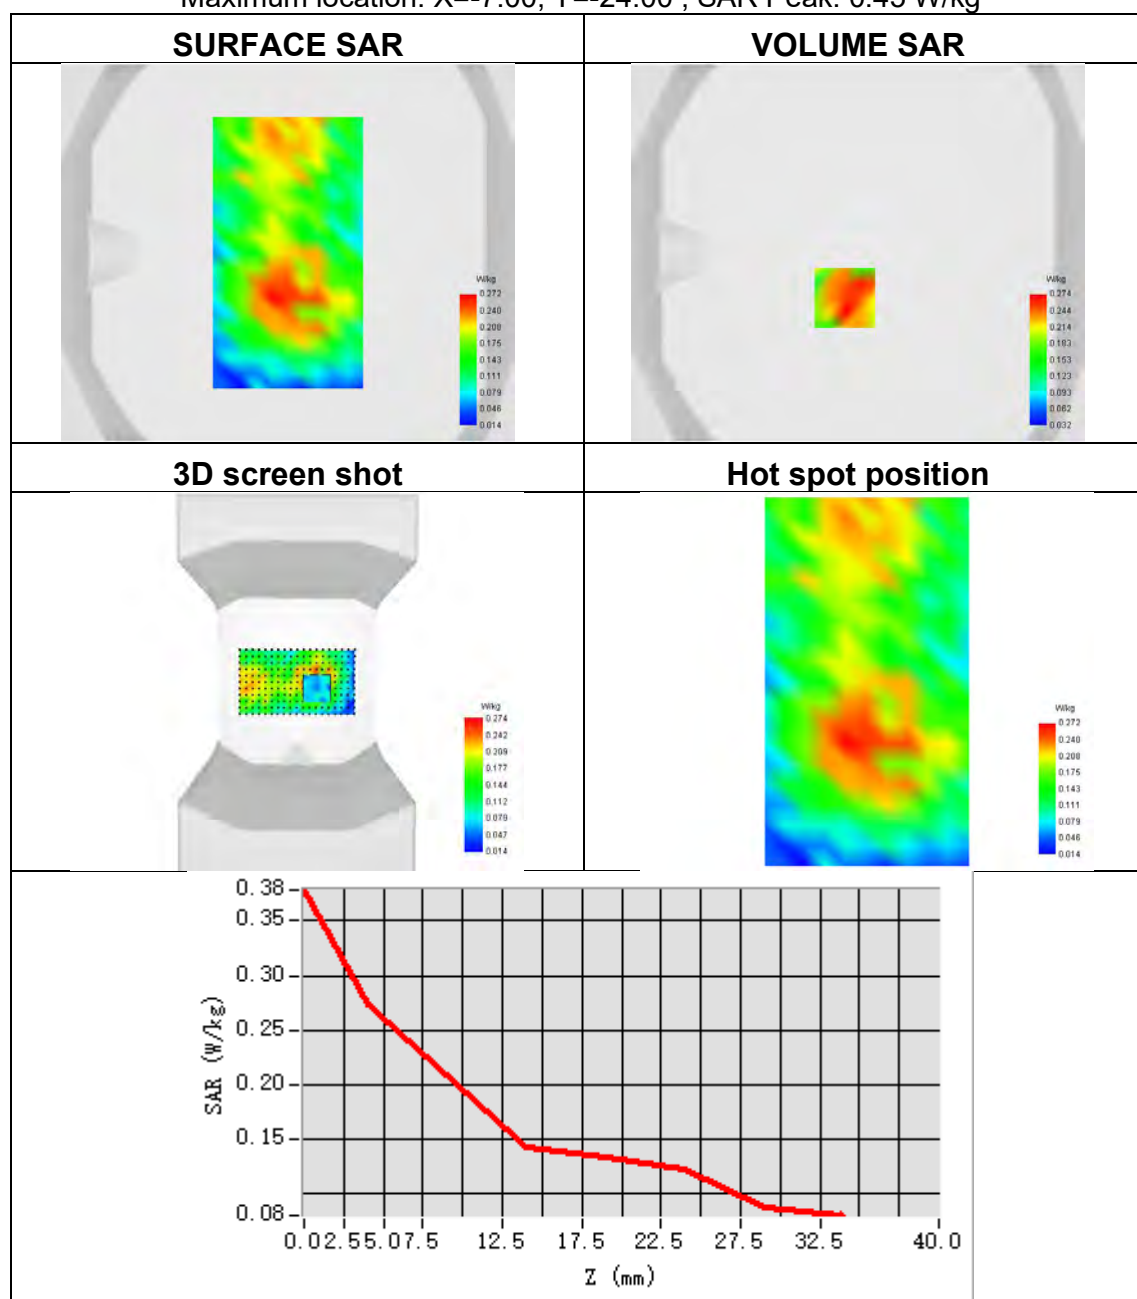

Plot 71:

Test Date	2025-01-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 14
Signal	LTE FDD
Frequency	793
SAR 10g (W/Kg)	0.396
SAR 1g (W/Kg)	0.729
ConvF	1.91
Relative permittivity	40.98
Conductivity (S/m)	0.92

Maximum location: X=2.00, Y=-23.00 ; SAR Peak: 1.25 W/kg

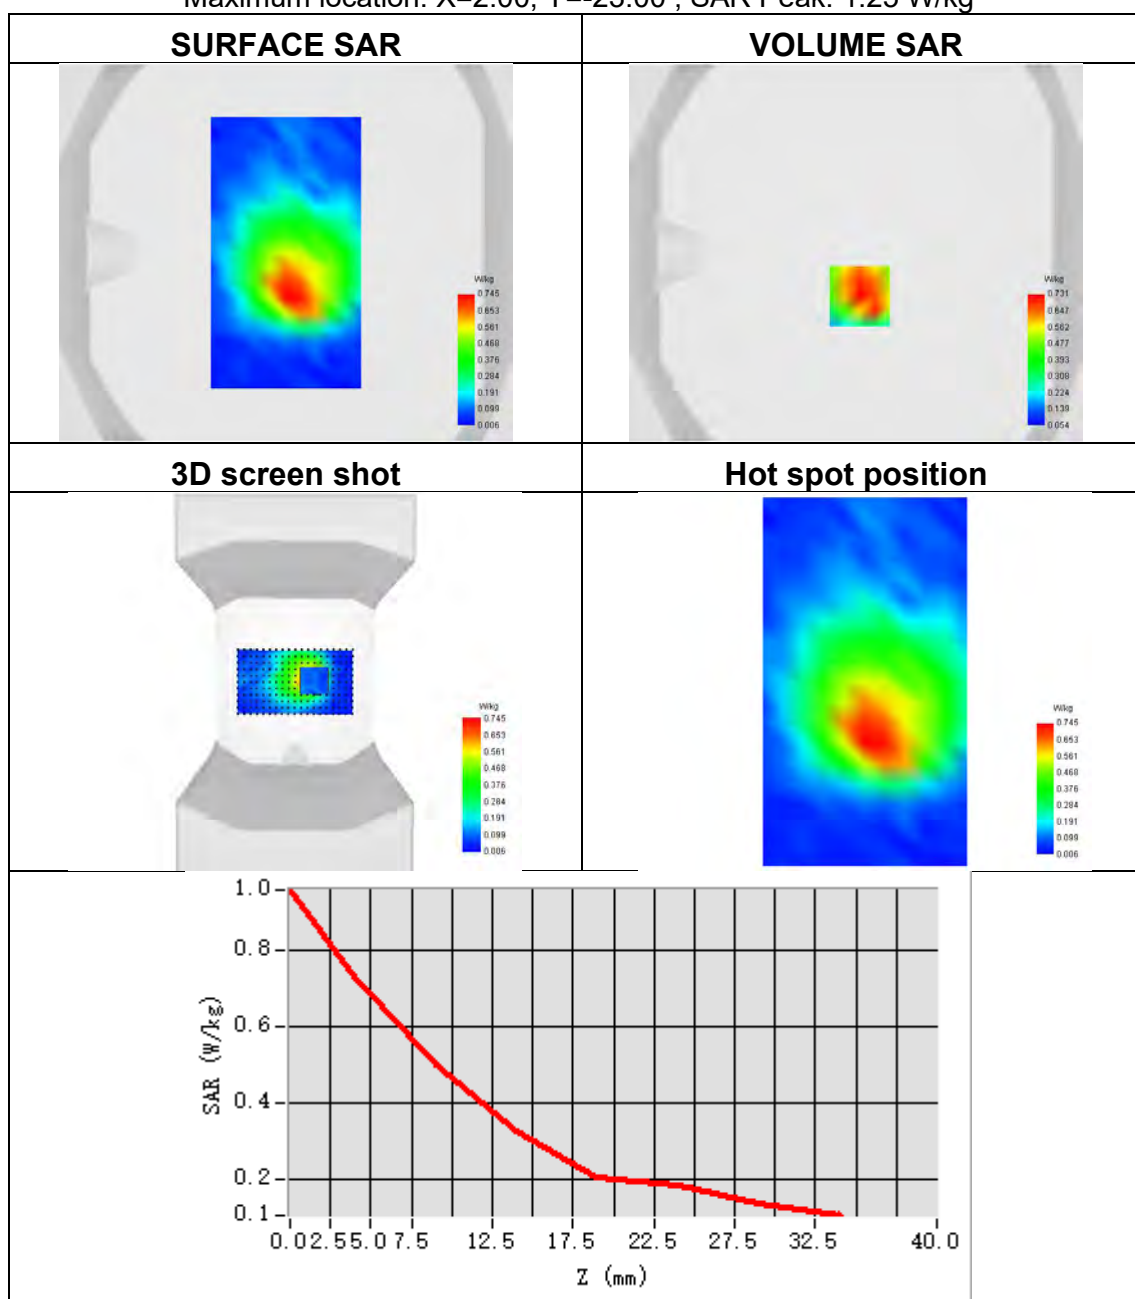



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※