

FCC TEST REPORT

Product Name: Smart Tablet Computer

Trade Mark:



Model No.: T10

Report Number: 24122015364EMC-1

Test Standards: FCC 47 CFR Part 15 Subpart B

FCC ID: SS4T10F1

Test Result: PASS

Date of Issue: January 23, 2025

Prepared for:

Bluebird Inc.

3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date:

January 23, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Version

Version No.	Date	Description
V1.0	January 23, 2025	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 DESCRIPTION OF SUPPORT UNITS	6
1.4 TEST LOCATION	6
1.5 TEST FACILITY	6
1.6 DEVIATION FROM STANDARDS	7
1.7 ABNORMALITIES FROM STANDARD CONDITIONS	7
1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
1.9 MEASUREMENT UNCERTAINTY	7
2. TEST SUMMARY	8
3. EQUIPMENT LIST	9
4. TEST CONFIGURATION	10
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	10
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	10
4.1.2 RECORD OF NORMAL ENVIRONMENT AND TEST SAMPLE	10
4.2 TEST MODES	10
4.3 TEST SETUP	11
4.3.1 FOR RADIATED EMISSIONS TEST SETUP	11
4.3.2 FOR CONDUCTED EMISSIONS TEST SETUP	12
4.4 SYSTEM TEST CONFIGURATION	12
5. REFERENCE DOCUMENTS FOR TESTING	13
6. EMC REQUIREMENTS SPECIFICATION	13
6.1 RADIATED EMISSION	13
6.2 CONDUCTED EMISSION	18
APPENDIX 1 PHOTOS OF TEST SETUP	21
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	21

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	Bluebird Inc.
Address of Applicant:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea
Manufacturer:	Bluebird Inc.
Address of Manufacturer:	3F, 115, Irwon-ro, Gangnam-gu, Seoul, Republic of Korea

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Tablet Computer
Model No.:	T10
Trade Mark:	 BLUEBIRD A TSC Company
DUT Stage:	Identical Prototype
Rated Voltage:	☒ Powered by Battery: 3.8VDC
	☒ Powered by USB port
	☒ Powered by Adapter: Input: 100-240V~50/60Hz, 0.6 A Output: 5.0 V $\Rightarrow$ 3.0A
Classification of digital devices:	Class B
Highest Internal Frequency:	5825 MHz
Software Version:	R1.00 (Provided by the customer)
Hardware Version:	REV_C (Provided by the customer)
Sample Received Date:	November 29, 2024
Sample Tested Date:	December 31, 2024 to January 2, 2025
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.

1.2.2 Description of Accessories

Adapter	
Model No.:	ICP20-050-3000B
Input:	100-240V~50/60Hz 0.6A
Output:	5.0V==3.0A

Battery	
Model No.:	BAT-800001
Battery Type:	Lithium-ion Polymer Battery
Rated Voltage:	3.8Vdc
Limited Charge Voltage:	4.35Vdc
Rated Capacity:	8000mAh

Cable	
Description:	USB Type-C to USB 3.0 Type A Cable
Connector:	USB Type-C / USB 3.0 Type A
Cable Type:	Shielded without ferrite
Length:	1 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

1.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Serial Number	Supplied by
Keyboard	Bluebird	T10-KB	Sample No.: S202411294756-PJA10	Bluebird
Notebook	Lenovo	E450	SL10G10780	UnionTrust
Mouse	DELL	MS116t1	CN-0RWN6P-LO300-18N -0GVP	UnionTrust
TF Card	SanDisk	32GB	N/A	UnionTrust
Earphone	HUAWEI	N/A	N/A	UnionTrust
Wireless router	TP-Link	TL-WR886N	1169119003757	UnionTrust

1.4 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.5 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

1.6 DEVIATION FROM STANDARDS

None.

1.7 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.9 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	± 3.2 dB
2	Conducted emission 150kHz-30MHz	± 2.7 dB
3	Radiated emission 9kHz-30MHz	± 4.7 dB
4	Radiated emission 30MHz-1GHz	± 4.6 dB
5	Radiated emission 1GHz-18GHz	± 4.4 dB
6	Radiated emission 18GHz-40GHz	± 4.6 dB

2. TEST SUMMARY

FCC 47 CFR Part 15 Subpart B Test Cases			
Test Item	Test Requirement	Test Method	Result
Conducted Emission	FCC 47 CFR Part 15.107	ANSI C63.4-2014	PASS
Radiated Emission	FCC 47 CFR Part 15.109	ANSI C63.4-2014	PASS



3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Receiver	R&S	ESIB26	100114	25-Oct-2024	24-Oct-2025
☐	Loop Antenna	ETS-LINDGREN	6502	00202525	28-Oct-2024	27-Oct-2025
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	29-Oct-2024	28-Oct-2025
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	29-Oct-2024	28-Oct-2025
☒	Preamplifier	HP	8447F	2805A02960	25-Oct-2024	24-Oct-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	01-Apr-2024	31-Mar-2025
☒	Pre-amplifier	ETS-LINDGREN	00118385	00201874	01-Apr-2024	31-Mar-2025
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	28-Oct-2024	27-Oct-2025
☒	Pre-amplifier	ETS-LINDGREN	00118384	00202652	28-Oct-2024	27-Oct-2025
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Conducted Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	Receiver	R&S	ESC13	1166.5950.03	25-Oct-2024	24-Oct-2025
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	25-Oct-2024	24-Oct-2025
☒	LISN	R&S	EVN216	3560.6550.12	26-Sep-2024	25-Sep-2025
☐	LISN	ETS-Lindgren	3816/2SH	00201088	25-Oct-2024	24-Oct-2025
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Environment Parameter	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
NT/NV	+15 to +35	1. 120~60Hz and/or 3.8V battery 2. 240~50Hz and/or 3.8V battery	20 to 75
Remark: 1) NV: Normal Voltage; NT: Normal Temperature			

4.1.2 Record of Normal Environment and Test Sample

Test Item	Temp. (°C)	Relative Humidity (%)	Pressure (kPa)	Sample No.	Tested by
Radiated Emission	23.3	43.5	100.7	S202411294756-ZJA01/9	Fire Huo
Conducted Emission	21.3	52.8	100.4		Linson Xie

4.2 TEST MODES

Test Item	EMI Test Modes
Radiated Emission	Test Mode 1: Charging from Adapter (with 120 Vac) + USB Cable + MP4 playing + GSM 850 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 2: Charging from Adapter (with 120 Vac) + USB Cable + Camera (Front) + WCDMA Band V idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 3: Charging from Adapter (with 120 Vac) + USB Cable + Camera (Back) + LTE Band 26 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 4: Charging from Adapter (with 240 Vac) + Worse from test mode 1~3 + LTE Band 12 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 5: Data transfer with notebook + USB Cable + LTE Band 14 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 6: Airplane mode + Worse from test mode 1~4 + Earphone (Type-C) + LTE Band 13 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
Conducted Emission	Test Mode 1: Charging from Adapter (with 120 Vac) + USB Cable + MP4 playing + GSM 850 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 2: Charging from Adapter (with 120 Vac) + USB Cable + Camera (Front) + WCDMA Band V idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 3: Charging from Adapter (with 120 Vac) + USB Cable + Camera (Back) + LTE Band 26 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 4: Charging from Adapter (with 240 Vac) + Worse from test mode 1~3 + LTE Band 12 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
	Test Mode 5: Data transfer with notebook + USB Cable + LTE Band 14 idle + Wi-Fi idle + BT idle + GNSS + NFC + keyboard
Remark: The above test modes in boldface were the worst cases, only the test data of these modes were reported.	

4.3 TEST SETUP

4.3.1 For Radiated Emissions test setup

Figure 1. 30MHz to 1GHz



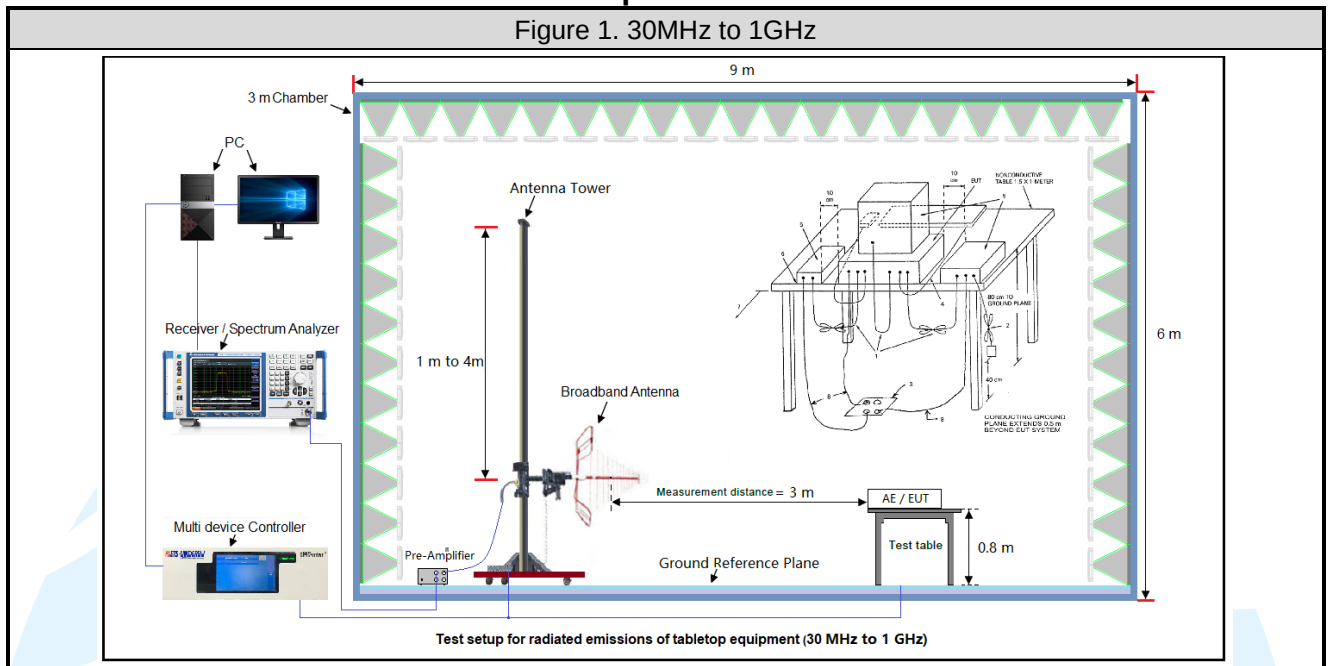


Figure 2. Above 1GHz

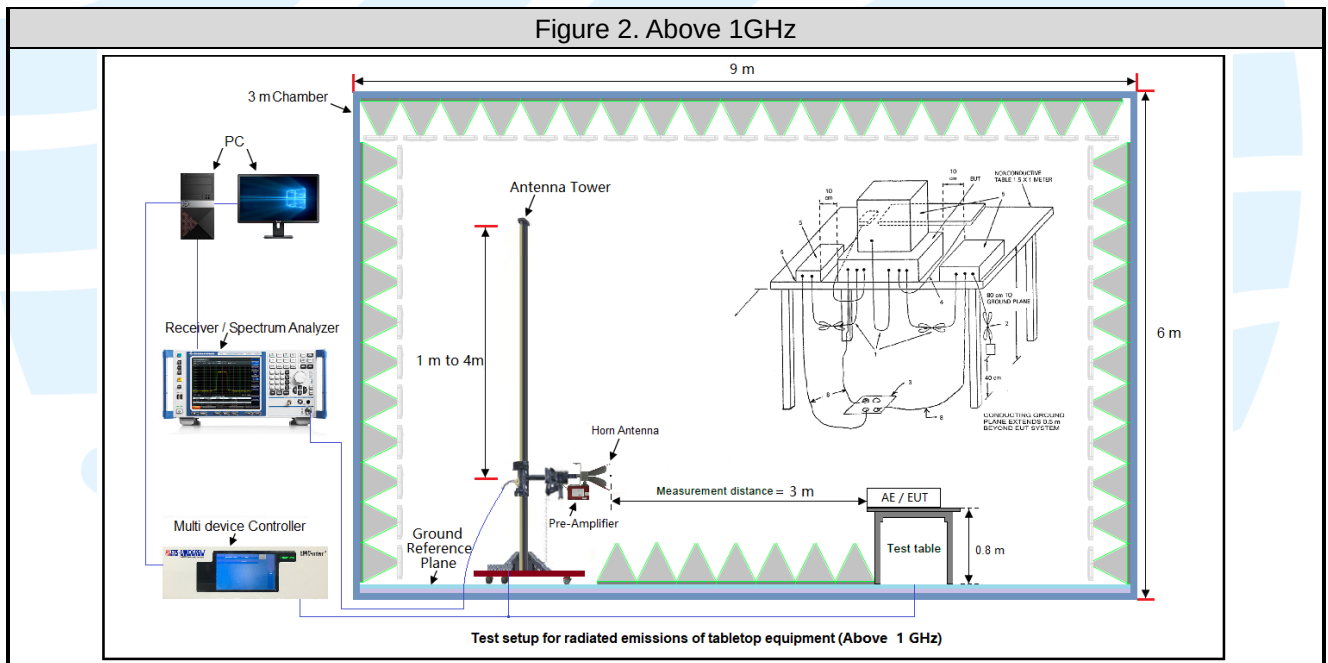

4.3.2 For Conducted Emissions test setup

Figure 3. Conducted Emissions setup

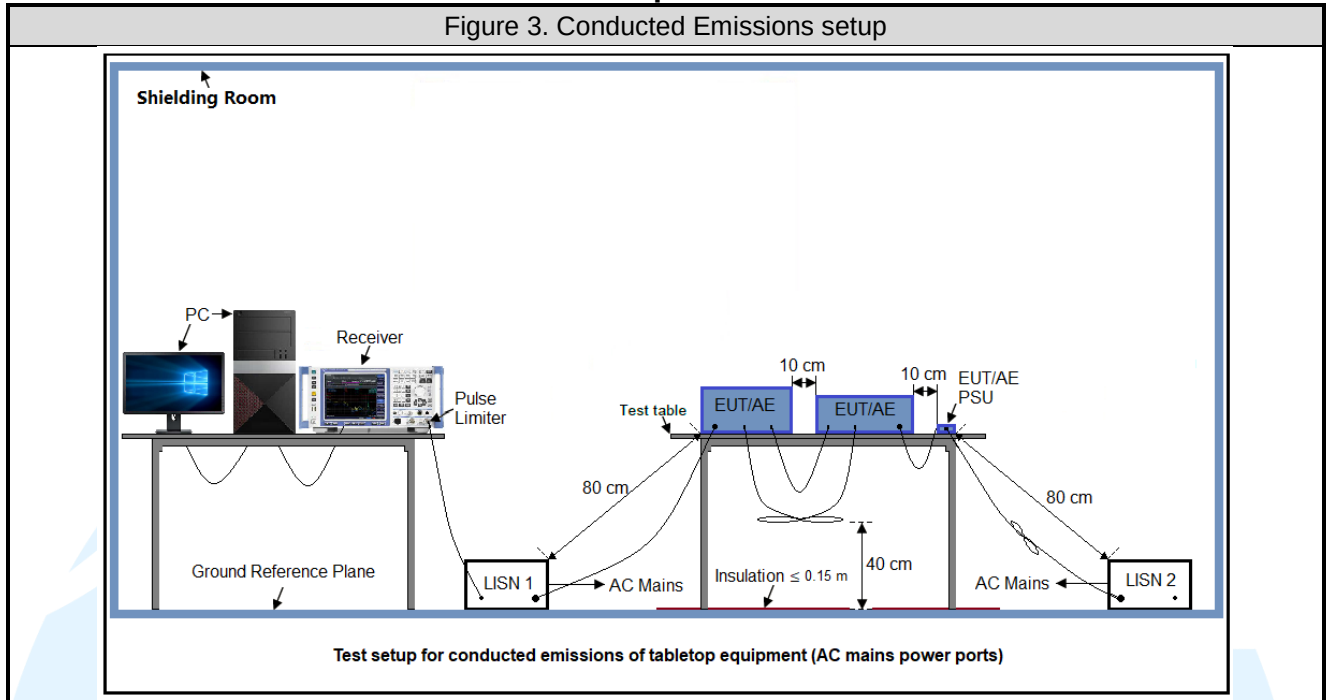

4.4 SYSTEM TEST CONFIGURATION

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic (according to KDB 896810 D02 SDoC FAQ v01r01) of the highest fundamental frequency or to 40 GHz, whichever is lower.

5. REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part15 Subpart B	Unintentional Radiators
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
3	KDB 174176 D01 Line Conducted FAQ v01r01	AC power-line conducted emission frequency asked questions
4	KDB 896810 D02 SDoC FAQ v01r02	Supplier's Declaration of Conformity frequency asked questions

6. EMC REQUIREMENTS SPECIFICATION

6.1 RADIATED EMISSION

Test Requirement: FCC 47 CFR Part 15.109

Test Method: ANSI C63.4-2014

Receiver Setup:

Frequency: (f) (MHz)	Detector type	Measurement receiver bandwidth	
		RBW	VBW
$30 \leq f \leq 1\,000$	Quasi Peak	120 kHz	300 kHz
$f \geq 1000$	Peak	1 MHz	3 MHz
	Average	1 MHz	3 MHz

Measured frequency range

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper frequency of measurement range (MHz)
Below 1.705	30.
1.705-108	1000.
108-500	2000.
500-1000	5000.
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower.

Limits:

Limits for Class B devices

Frequency (MHz)	limits at 3m (dB μ V/m)		
	QP Detector	PK Detector	AV Detector
30-88	40.0	--	--
88-216	43.5	--	--
216-960	46.0	--	--
960 to 1000	54.0	--	--
Above 1000	--	74.0	54.0

Remark:

- The lower limit shall apply at the transition frequencies.
- Emission level (dB μ V/m) = 20 log Emission level (μ V/m).
- For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Test Setup: Refer to section 4.3.1 for details.

Test Procedures:

- From 30 MHz to 1GHz test procedure as below:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 120 kHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied between 1~4 m in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP value: vary the antenna's height and rotate the turntable from 0 to 360 degrees to find the height and degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to QP Detector and specified bandwidth with Maximum Hold Mode, and record the maximum value.

2. Above 1GHz test procedure as below:

- 1) The Product was placed on the non-conductive turntable 0.8 m above the ground at a chamber.
- 2) Set the spectrum analyzer/receiver in Peak detector, Max Hold mode, and 1MHz RBW. Record the maximum field strength of all the pre-scan process in the full band when the antenna is varied in both horizontal and vertical, and the turntable is rotated from 0 to 360 degrees.
- 3) For each frequency whose maximum record was higher or close to limit, measure its AV value: rotate the turntable from 0 to 360 degrees to find the degree where Product radiated the maximum emission, then set the test frequency analyzer/receiver to AV value and specified bandwidth with Maximum Hold Mode, and record the maximum value.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:

Below 1GHz (Quasi Peak):

Test Mode 1

Horizontal

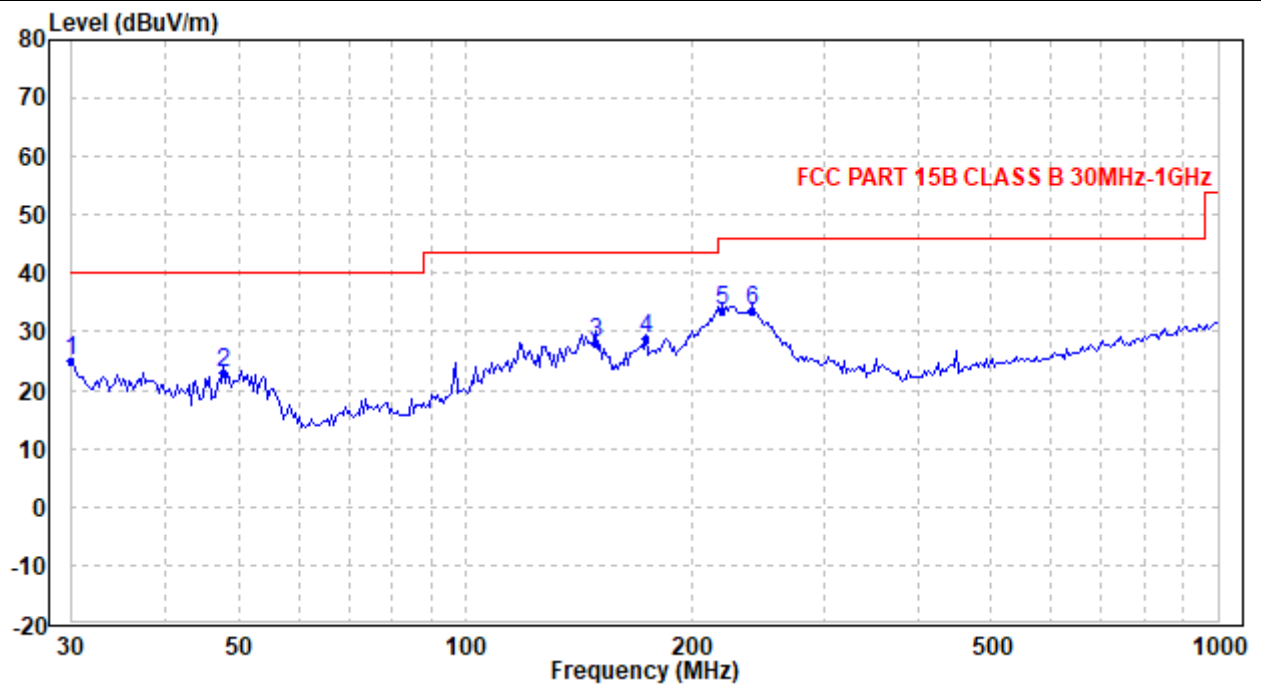

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.000	29.50	-4.53	24.97	40.00	-15.03	QP
2	47.703	36.66	-13.58	23.08	40.00	-16.92	QP
3	148.917	42.79	-14.76	28.03	43.50	-15.47	QP
4	173.815	40.24	-11.59	28.65	43.50	-14.85	QP
5	219.179	44.51	-10.97	33.54	46.00	-12.46	QP
6	240.144	44.24	-10.66	33.58	46.00	-12.42	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Vertical

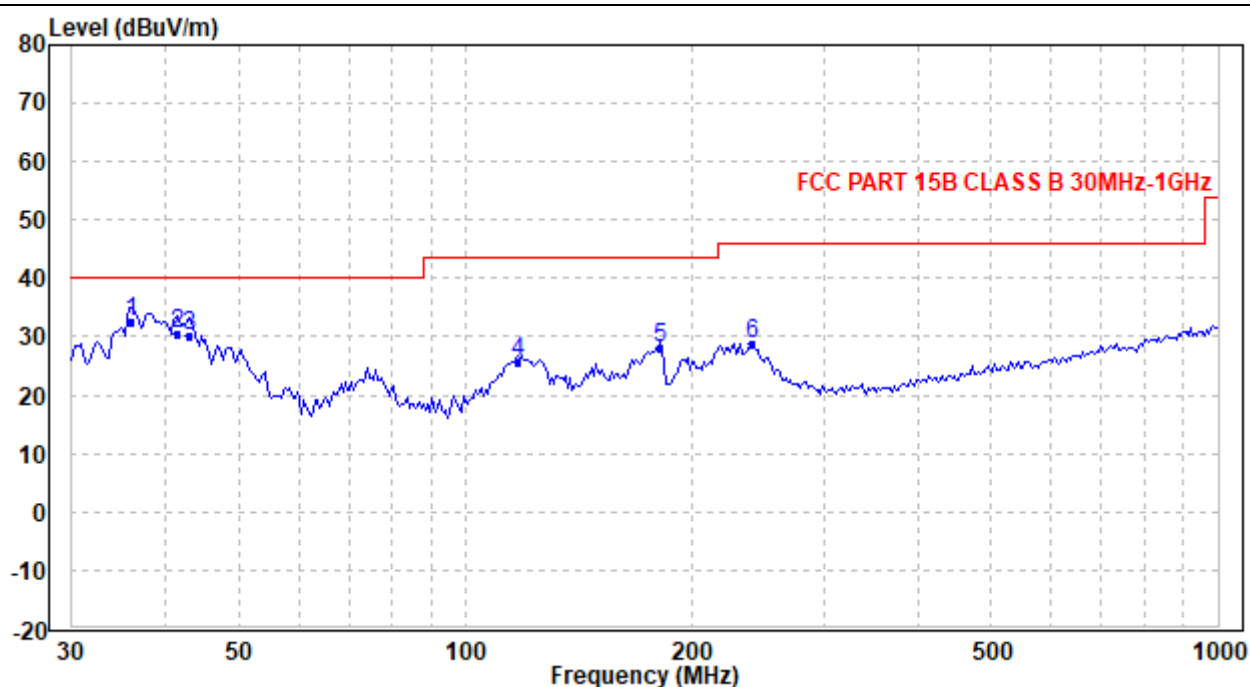

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.014	39.86	-7.15	32.71	40.00	-7.29	QP
2	41.448	40.32	-9.79	30.53	40.00	-9.47	QP
3	42.931	40.97	-10.71	30.26	40.00	-9.74	QP
4	117.269	41.41	-15.75	25.66	43.50	-17.84	QP
5	181.300	40.14	-12.07	28.07	43.50	-15.43	QP
6	240.144	39.41	-10.66	28.75	46.00	-17.25	QP

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Above 1GHz (Peak & Average)
Test Mode 1
Horizontal

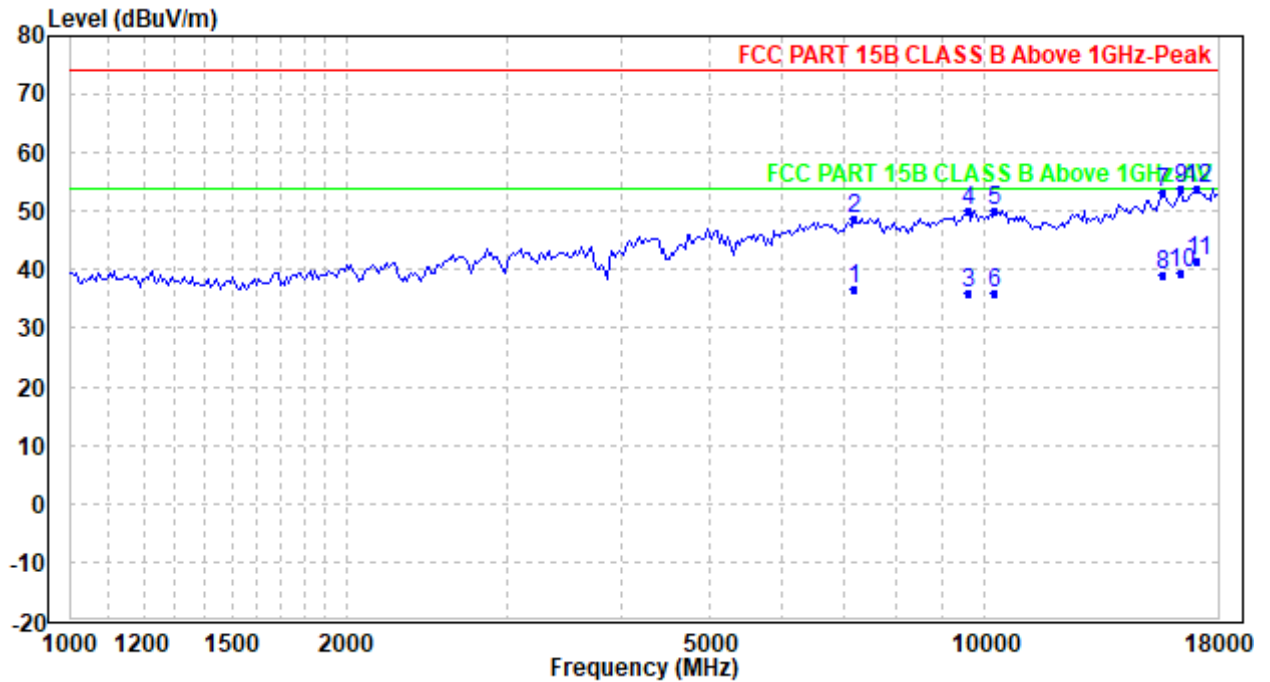

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	7207.945	35.44	1.30	36.74	54.00	-17.26	Average
2	7207.945	47.52	1.30	48.82	74.00	-25.18	Peak
3	9573.587	32.81	3.09	35.90	54.00	-18.10	Average
4	9573.587	46.96	3.09	50.05	74.00	-23.95	Peak
5	10262.700	46.70	3.36	50.06	74.00	-23.94	Peak
6	10262.700	32.56	3.36	35.92	54.00	-18.08	Average
7	15663.860	45.72	7.44	53.16	74.00	-20.84	Peak
8	15663.860	31.57	7.44	39.01	54.00	-14.99	Average
9	16406.780	45.93	7.84	53.77	74.00	-20.23	Peak
10	16406.780	31.78	7.84	39.62	54.00	-14.38	Average
11	17085.680	32.85	8.78	41.63	54.00	-12.37	Average
12	17085.680	44.98	8.78	53.76	74.00	-20.24	Peak

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

Vertical

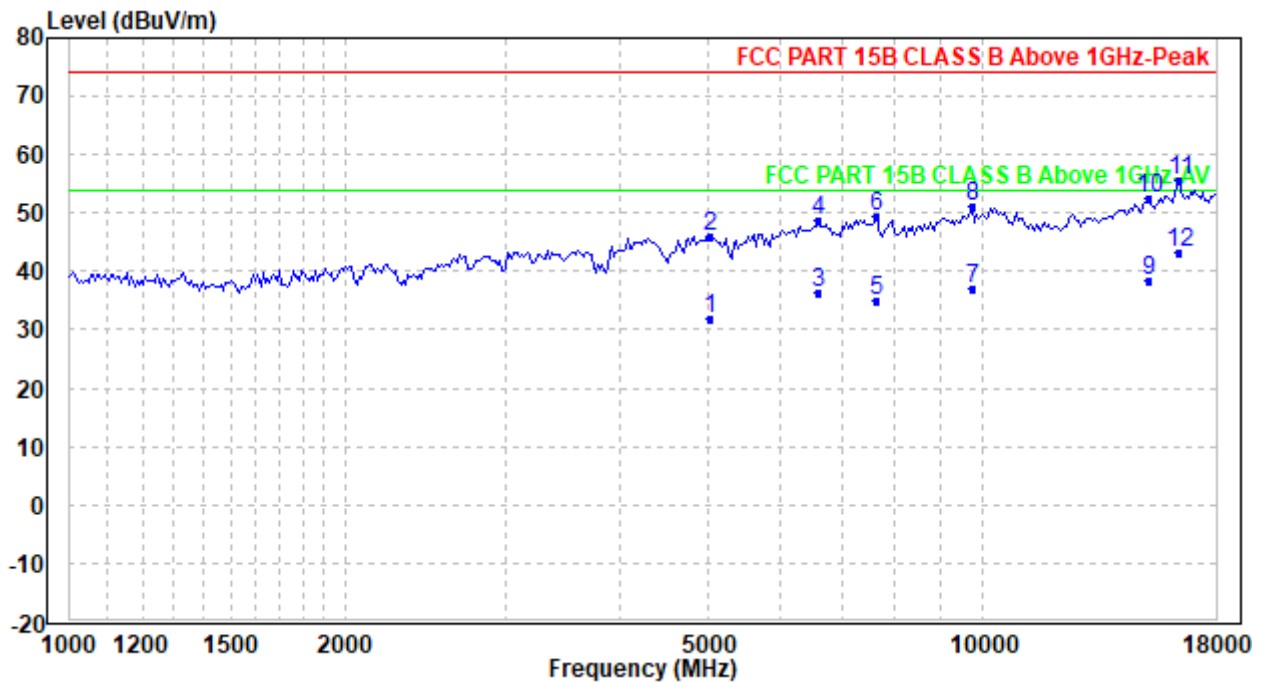

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	5033.218	33.86	-1.93	31.93	54.00	-22.07	Average
2	5033.218	48.01	-1.93	46.08	74.00	-27.92	Peak
3	6608.119	35.23	1.25	36.48	54.00	-17.52	Average
4	6608.119	47.35	1.25	48.60	74.00	-25.40	Peak
5	7637.782	33.84	1.28	35.12	54.00	-18.88	Average
6	7637.782	47.99	1.28	49.27	74.00	-24.73	Peak
7	9741.401	33.90	3.18	37.08	54.00	-16.92	Average
8	9741.401	48.04	3.18	51.22	74.00	-22.78	Peak
9	15216.710	30.58	7.79	38.37	54.00	-15.63	Average
10	15216.710	44.72	7.79	52.51	74.00	-21.49	Peak
11	16406.780	47.67	7.84	55.51	74.00	-18.49	Peak
12	16406.780	35.55	7.84	43.39	54.00	-10.61	Average

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit
4. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.
5. For Radiated Emission above 18GHz, there was not any unwanted emission detected.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

6.2 CONDUCTED EMISSION

Test Requirement: FCC 47 CFR Part 15.107

Test Method: ANSI C63.4-2014

Limits:

Limits for Class B devices

Frequency range (MHz)	Limits (dB(μV))	
	Quasi-peak	Average
0,15 to 0,50	66 to 56	56 to 46
0,50 to 5	56	46
5 to 30	60	50

Remark:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz.

Test Setup: Refer to section 4.3.2 for details.

Test Procedures:

- 1) The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- 2) The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- 3) For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

Equipment Used: Refer to section 3 for details.


Test Result: Pass

The worst measurement data as follows:


Quasi Peak and Average:

Test Mode 1

Live Line

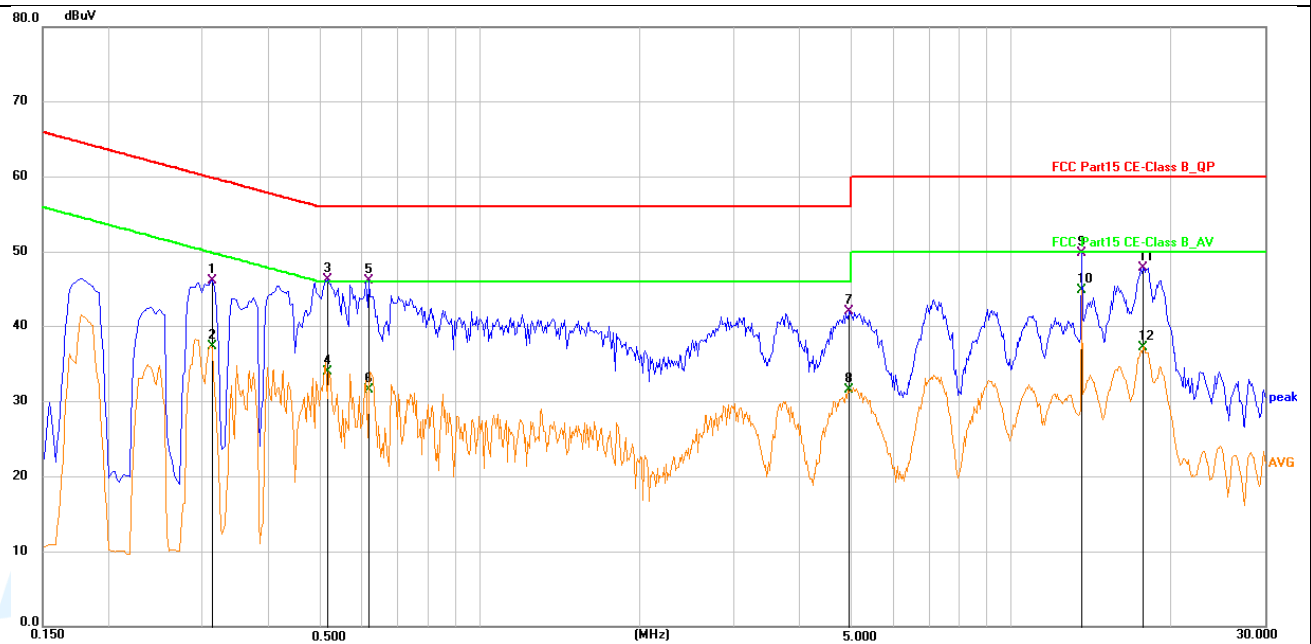

No.	Frequency (MHz)	Reading (dBuV)	Correction factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3120	36.46	9.74	46.20	59.92	-13.72	QP
2	0.3120	27.68	9.74	37.42	49.92	-12.50	AVG
3	0.5144	36.45	9.79	46.24	56.00	-9.76	QP
4	0.5144	24.27	9.79	34.06	46.00	-11.94	AVG
5	0.6180	36.36	9.79	46.15	56.00	-9.85	QP
6	0.6180	21.84	9.79	31.63	46.00	-14.37	AVG
7	4.9740	32.37	9.75	42.12	56.00	-13.88	QP
8	4.9740	21.91	9.75	31.66	46.00	-14.34	AVG
9	13.5600	40.07	9.77	49.84	60.00	-10.16	QP
10	13.5600	35.04	9.77	44.81	50.00	-5.19	AVG
11	17.7495	38.04	9.87	47.91	60.00	-12.09	QP
12	17.7495	27.44	9.87	37.31	50.00	-12.69	AVG

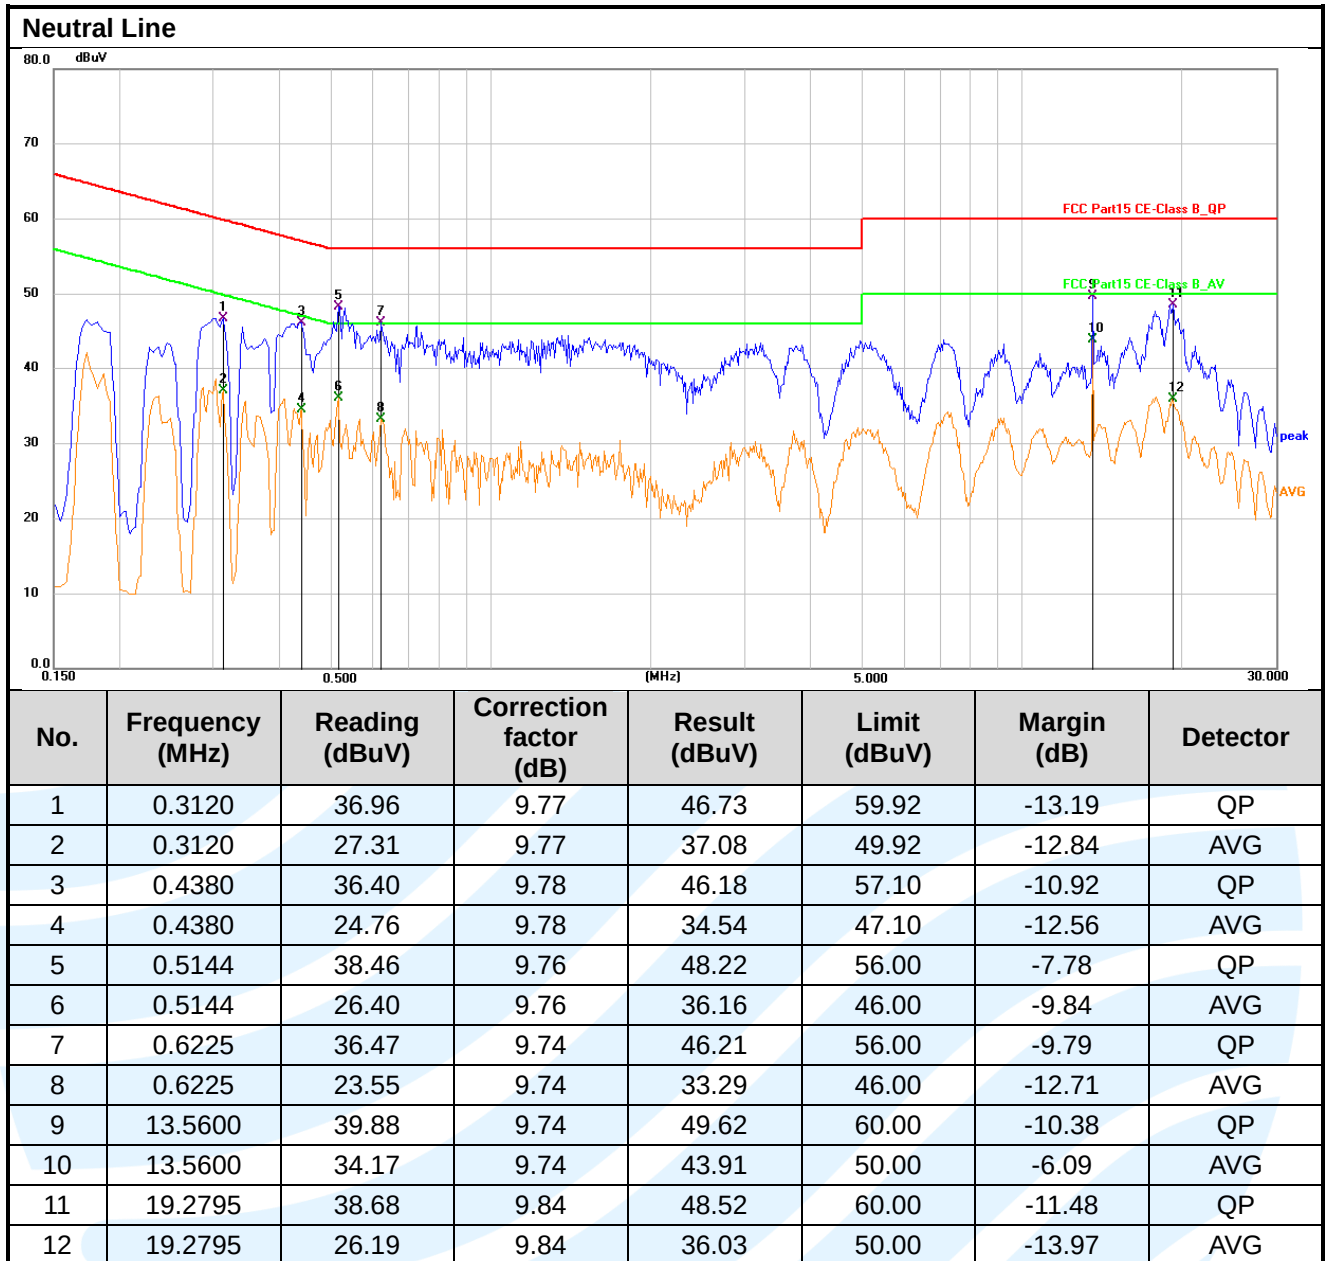

Remark:

1. Correct Factor = LISN Factor + Cable Loss + Pulse Limiter Factor, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result - Limit
4. An initial pre-scan was performed on the Phase and neutral lines with peak detector. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.
5. All possible modes of operation were investigated, and testing at two nominal voltages of 240V~50Hz and 120V~60Hz, only the worst case emissions reported.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-EMC-FCCPART15B-V1.1

APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

***** End of Report *****

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.
