



TEST REPORT NO: RU1142/6218  
COPY NO: 2  
ISSUE NO: 1  
FCC ID: SSULD20D200

**REPORT ON THE CERTIFICATION TESTING OF A  
SOLUTIONS MADE EASY Ltd  
LEAK TRACKER LD20-D REMOTE CONTROLLER  
WITH RESPECT TO  
THE FCC RULES CFR 47, PART 15.249 January 2005  
INTENTIONAL RADIATOR SPECIFICATION**

TEST DATE: 14<sup>th</sup> January 2005 – 3<sup>rd</sup> February 2005

TESTED BY: \_\_\_\_\_ D WINSTANLEY

APPROVED BY: \_\_\_\_\_ P GREEN  
EMC PRODUCT  
MANAGER

DATE: 5<sup>th</sup> December 2005

Distribution:

Copy Nos: 1. SOLUTIONS MADE EASY Ltd  
2. FCC EVALUATION LABORATORIES  
3. TRL EMC

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

**TRL COMPLIANCE SERVICES LTD EMC DIVISION**

MOSS VIEW NIPE LANE UP HOLLAND WEST LANCASHIRE WN8 9PY UNITED KINGDOM

TELEPHONE +44 (0)1695 556666 FAX +44 (0)1695 557077

E-MAIL [test@trl-emc.co.uk](mailto:test@trl-emc.co.uk) [www.trlcompliance.com](http://www.trlcompliance.com)



FS 21805



0728

## CONTENTS

	<b>PAGE</b>
CERTIFICATE OF CONFORMITY & COMPLIANCE	3
APPLICANT'S SUMMARY	4
EQUIPMENT TEST CONDITIONS	5
TESTS REQUIRED	5
TEST RESULTS	6-11

## ANNEX

PHOTOGRAPHS	A
PHOTOGRAPH No. 1: Radiated Test setup	
PHOTOGRAPH No. 2: Powerline Test setup	
PHOTOGRAPH No. 6: Transmitter front view	
PHOTOGRAPH No. 4: Transmitter rear view	
PHOTOGRAPH No. 5: Transmitter PCB track side	
PHOTOGRAPH No. 6: Transmitter PCB component side	
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST	B
BAND OCCUPANCY PLOT	C
SCAN PLOT(s)	D
DUTY CYCLE PLOT(s)	E

**Notes:**

1. Component failure during test	YES <input type="checkbox"/> [ ]
NO <input checked="" type="checkbox"/> [X]	
2. If Yes, details of failure:	
3. The facilities used for the testing of the product contain in this report are FCC Listed.	
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.	



## CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: SSULD20D200

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15.249 January 2005

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: LEAK TRACKER LD20-D REMOTE CONTROLLER

EQUIPMENT SERIAL No: Engineering Sample

EQUIPMENT TYPE: Interactive remote control & system status indicator

PRODUCT USE: Leak detection system controller

CARRIER EMISSION: 37.58 mV/m @ 3m

ANTENNA TYPE: Integral

ALTERNATIVE ANTENNA: Not applicable

FREQUENCY OF OPERATION: 910.0MHz

CHANNEL SPACING: Not applicable, Wideband

NUMBER OF CHANNELS: Not Applicable

FREQUENCY GENERATION: SAW Resonator  Crystal  Synthesiser

MODULATION METHOD: Amplitude  Digital  Angle

POWER SOURCE(s): +110Vac

TEST DATE(s): 14<sup>th</sup> January 2005 – 3<sup>rd</sup> February 2005

ORDER No(s): 800015

APPLICANT: Solutions Made Easy Ltd

ADDRESS: 261 Bath Road  
Bawdrip  
Somerset  
TA7 8PW

TESTED BY: \_\_\_\_\_ D WINSTANLEY

APPROVED BY: \_\_\_\_\_ P GREEN  
EMC PRODUCT  
MANAGER

## APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): LEAK TRACKER LD20-D REMOTE CONTROLLER

EQUIPMENT TYPE: Interactive remote control & system status indicator

SERIAL NUMBER OF EUT: Engineering Sample

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15.249 January 2005

TEST RESULT: COMPLIANT Yes  [X]  
No  [ ]

APPLICANT'S CATEGORY: MANUFACTURER  [X]  
IMPORTER  [ ]  
DISTRIBUTOR  [ ]  
TEST HOUSE  [ ]  
AGENT  [ ]

APPLICANT'S ORDER No(s): 800015

APPLICANT'S CONTACT PERSON(s): Mr M Lee

E-mail address: mike@soleeasy.co.uk

APPLICANT: Solutions Made Easy Ltd

ADDRESS: 261 Bath Road  
Bawdrip  
Somerset  
TA7 8PW

TEL: +44 (0) 1278 686160

FAX: +44 (0) 1278 684077

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRL EMC

UKAS ACCREDITATION No: 0728

TEST DATE(s): 14<sup>th</sup> January 2005 – 3<sup>rd</sup> February 2005

TEST REPORT No: RU1142/6218

## EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.249(a)	Quasi Peak	YES
	Intentional Emission Field Strength:	15.249(a)	Quasi Peak	YES
	Intentional Emission Band Occupancy:	15.215	Peak	YES
	Intentional Emission ERP (mW):	N/A	-	NO
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	YES
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak	YES
	Spurious Emissions – Radiated >1000MHz:	15.209 15.249(a)	Average	YES
	Maximum Frequency of Search:	15.33	-	YES
	Antenna Arrangements Integral:	15.203	-	YES
	Antenna Arrangements External Connector:	15.204	-	YES
	Restricted Bands	15.205	-	YES
	Extrapolation Factor	15.31(f)	-	YES

2. Product Use: Leak detection system controller

3. Emission Designator:

4. Duty Cycle: <100%

5. Transmitter bit or pulse rate and level: bps

6. Temperatures: Ambient (T<sub>nom</sub>) 9°C

7. Supply Voltages: V<sub>nom</sub> +110Vac

Note: V<sub>nom</sub> voltages are as stated above unless otherwise shown on the test report page

8. Equipment Category: Single channel   
Two channel   
Multi-channel

9. Channel spacing: Narrowband   
Wideband

## TRANSMITTER TESTS

### TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature	=	8°C(<1GHz)	3m measurements <1GHz	[X]
Relative humidity	=	41% (<1GHz),	0.3m measurements >1GHz	[X]
Conditions	=	Open Area Test Site (OATS)	3m extrapolated from 0.3m	[X]
Supply voltage	=	+110Vac		
Channel number	=	1		

		Freq (MHz)	Meas Rx. (dB $\mu$ V)	Cable loss (dB)	Ant Factor	Field Strength (dB $\mu$ V/m)	Extrap Fact	Field Strength ( $\mu$ V/m)	Limit ( $\mu$ V/m)
30MHz - 88MHz	40.00	19.30	0.70	12.40	32.4	-	41.68	100	
	64.00	27.11	0.89	4.80	32.8			43.65	100
	80.00	25.53	0.97	6.50	33.0			44.66	100
88MHz - 216MHz	160.00	25.09	1.41	9.30	35.8	-	61.66	150	
	168.00	24.11	1.44	8.95	34.5			53.08	150
	176.00	23.45	1.46	8.60	33.6			47.86	150
216MHz - 960MHz	455.00	21.70	2.50	16.60	40.8	-	109.65	200	
	682.60	16.10	3.10	19.00	38.2			81.28	200
960MHz - 1GHz									
1GHz - 5GHz									
Limits	1.705MHz to 30MHz		30 $\mu$ V/m @ 30m						
	30MHz to 88MHz		100 $\mu$ V/m @ 3m						
	88MHz to 216MHz		150 $\mu$ V/m @ 3m						
	216MHz to 960MHz		200 $\mu$ V/m @ 3m						
	960MHz to 1GHz		500 $\mu$ V/m @ 3m						
	1GHz to 5GHz		500 $\mu$ V/m @ 3m						

#### Notes:

- 1 Results quoted are extrapolated as indicated
- 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
- 3 Extrapolation factor 20dB from 0.3m to 3m, as per Part 15.31f
- 4 Measurements >1GHz @ 0.3m as per Part 15.31f(1)
- 5 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
- 6 Receiver detector >1GHz = Average, 1MHz resolution bandwidth
- 7 Peak emissions are within 20 dB of the average limit
- 8 New batteries used for battery powered products.
- 9 (R) Indicates restricted bands, as per Part 15.205
- 10 Results not within 10 dB's of limit are not necessarily recorded
- 11 See annex D for scan data
- 12 Unit has modified software to enable transmitting permanently modulated carrier for pre scan.
- 13 Unit has modified software to enable transmitting a modulated carrier at a rate of once per 7.08 seconds, as per initial sequence, for measurement. See Annex E for duty cycle plots.

#### Test Method:

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances as Notes 1 to 4 above
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes.  
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 test:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	<b>X</b>
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	<b>X</b>
RANGE 1	TRL	3 METRE	N/A	UH06	<b>X</b>
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	<b>X</b>
SPECTRUM ANALYSER	ANRITSU	MS2665C	MT26089	479	<b>X</b>

## TRANSMITTER TESTS

### TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.249 January 2005

Ambient temperature	=	8°C(<1GHz),	3m measurements @ fc	[X]
Relative humidity	=	41%(<1GHz),	10m measurements @ fc	[ ]
Conditions	=	Open Area Test Site (OATS)	30m measurements @ fc	[ ]
Supply voltage	=	+110Vac	30m extrapolated from 3m	[ ]
Channel number	=	1	30m extrapolated from 10m	[ ]

FREQ. (MHz)	MEASUREMENT Rx. READING (dB $\mu$ V)	CABLE LOSS (dB)	ANT FACTOR	FIELD STRENGTH (dB $\mu$ V/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (mV/m)
910.0	66.7	3.9	20.9	91.5	-	37.58
Limit value @ fc			50 (mV/m)			
Band occupancy @ -20dBc			f lower		f higher	
			909.574		910.286	

See spectrum analyser plot – Annex C

**Notes:**

- 1 Results quoted are extrapolated as indicated
- 2 Receiver detector @ fc = Quasi Peak 120kHz bandwidth
- 3 When battery powered the EUT was powered with new batteries
- 4 Unit transmitting a modulated carrier at a rate of once per 7.08 seconds. Measurement times adjusted accordingly.
- 5 See Annex E for duty cycle plots.

**Test Method:**

- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
- 2 Measuring distances 3m
- 3 EUT 0.8 metre above ground plane
- 4 Emissions maximised by rotation of EUT, on an automatic turntable.  
Raising and lowering the receiver antenna between 1m & 4m.  
Horizontal and vertical polarisations, of the receive antenna.  
EUT orientation in three orthogonal planes.  
Maximum results recorded

The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.249 January 2005 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
HORN ANTENNA	EMCO	3115	9010-3580	138	
HORN ANTENNA	EMCO	3115	9010-3581	139	
SPECTRUM ANALYSER	TEKTRONIX	2756P	B010109	164	
BICONIC ANTENNA	CHASE	BBA9106	N/A	193	
ANTENNA, LOG PERIODIC 300MHz – 1GHz	CHASE	UPA6108	1061	203	
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
ANTENNA, BICONIC 20MHz - 300MHz	CHASE	VBA6106A	1193	251	
BILOG ANTENNA	CHASE	CBL6112	2098	274	
RECEIVER	ROHDE & SCHWARZ	ESVS10	837948/003	317	
RECEIVER	ROHDE & SCHWARZ	ESVS10	844594/003	352	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
V / UHF RECEIVER 20MHz - 1GHz	ROHDE & SCHWARZ	ESVS 20	838804 / 005	415	
BILOG ANTENNA	SCHAFFNER	CBL6112B	2761	431	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	
RECEIVER	ROHDE & SCHWARZ	ESVS 10	825892/003	UH04	X
RANGE 1	TRL	3 METRE	N/A	UH06	X
AE, LOOP, Z2, 9kHz - 30MHz	ROHDE & SCHWARZ	HFH2	881058 - 53	07	
BILOG ANTENNA	CHASE	CBL6112	2129	UH93	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

## TRANSMITTER TESTS

### TRANSMITTER CONDUCTED EMISSIONS – AC POWER LINE Part 15.207

Ambient temperature = 19°C(<1GHz),  
Relative humidity = 41%(<1GHz),  
Conditions = Power Line Laboratory  
Supply voltage = 110V AC  
Supply Frequency = 60Hz

#### SIGNIFICANT EMISSIONS

FREQUENCY (MHz)	DETECTOR	CONDUCTOR (L or N)	EMISSION (dB $\mu$ V)	LIMIT (dB $\mu$ V)
8.0	Quasi Peak	Live	39.43	60
8.0	Average	Neutral	39.58	50
16.0	Average	Neutral	38.51	50
24.0	Average	Neutral	33.70	50

**Notes:** 1 See attached plot


**Test Method:** 1 As per Radio – Noise Emissions, ANSI C63.4: 2003

The test equipment used for the Transmitter Conducted Emissions – AC Power Line Part 15.207 test was:

TYPE OF EQUIPMENT	MAKER/ SUPPLIER	MODEL No	SERIAL No	TRL No	ACTUAL EQUIPMENT USED
RECEIVER	ROHDE & SCHWARZ	ESHS20	837960/003	237	
LISN / AMN	ROHDE & SCHWARZ	ESH3-Z5	83746/010	289	
RECEIVER	ROHDE & SCHWARZ	ESHS10	844077/019	353	
RECEIVER	ROHDE & SCHWARZ	ESHS 10	830051/001	UH03	X
LISN/AMN	ROHDE & SCHWARZ	ESH3-Z5	840731/015	UH195	X
SPECTRUM ANALYSER	MARCONI	2386/2380	152076/004	UH120	

## POWER LINE CONDUCTION EMISSIONS

Quasi Peak and Average Limit Part 15.207  
(Levels below the limit are only displayed if  
within 20dB of the limit)

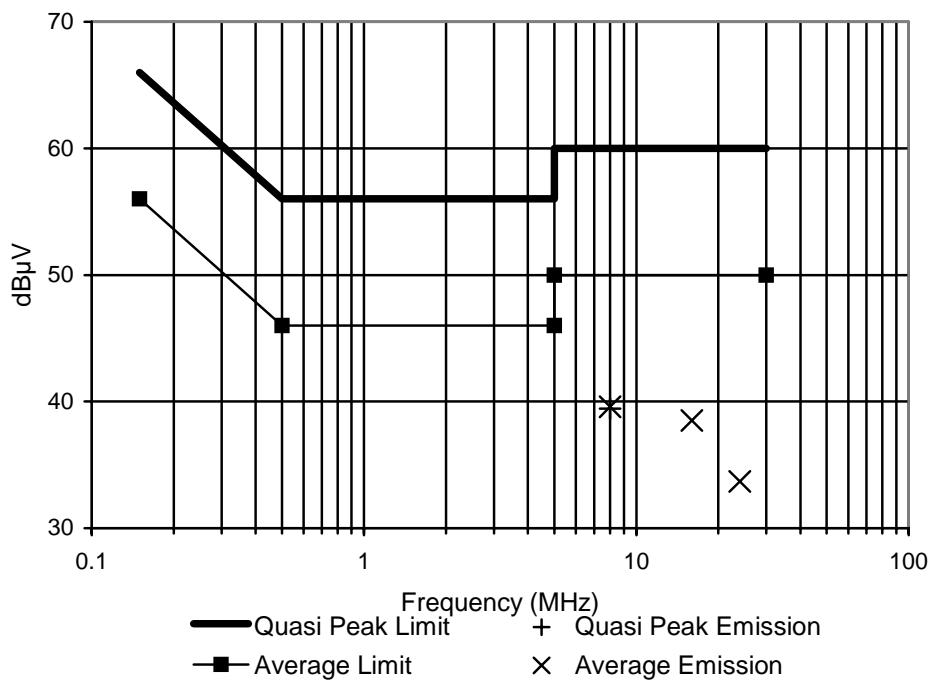

**ANNEX A**  
**PHOTOGRAPHS**

PHOTOGRAPH No. 1

**RADIATED TEST SETUP**



PHOTOGRAPH No. 2

**POWERLINE TEST SETUP**



PHOTOGRAPH No. 3

**TRANSMITTER FRONT VIEW**



PHOTOGRAPH No. 4

**TRANSMITTER REAR VIEW**




PHOTOGRAPH No. 5

**TRANSMITTER PCB TRACK SIDE**



PHOTOGRAPH No. 6

**TRANSMITTER PCB COMPONENT SIDE**

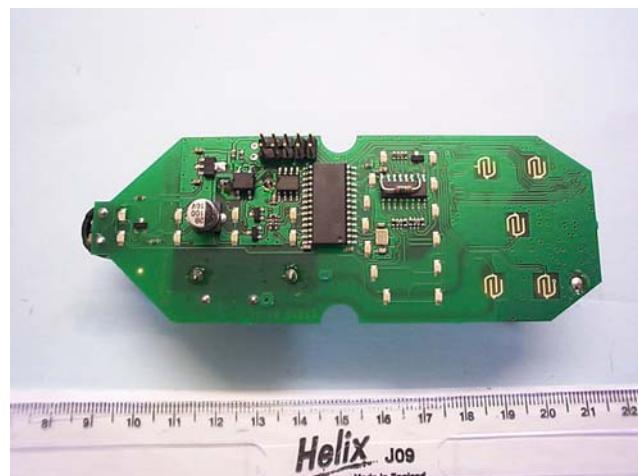


**ANNEX B**  
**APPLICANT'S SUBMISSION OF DOCUMENTATION LIST**

### APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[X]
d.	ALTERNATIVE TRADE P GREEN DECLARATION(s)	-		[ ]
e.	LABELLING	-	PHOTOGRAPHS	[X]
		-	DECLARATION	[X]
		-	DRAWINGS	[X]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[ ]
		-	PSU	[ ]
		-	AUX	[ ]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

**ANNEX C**  
**BANDWIDTH PLOT**

## BANDWIDTH PLOT

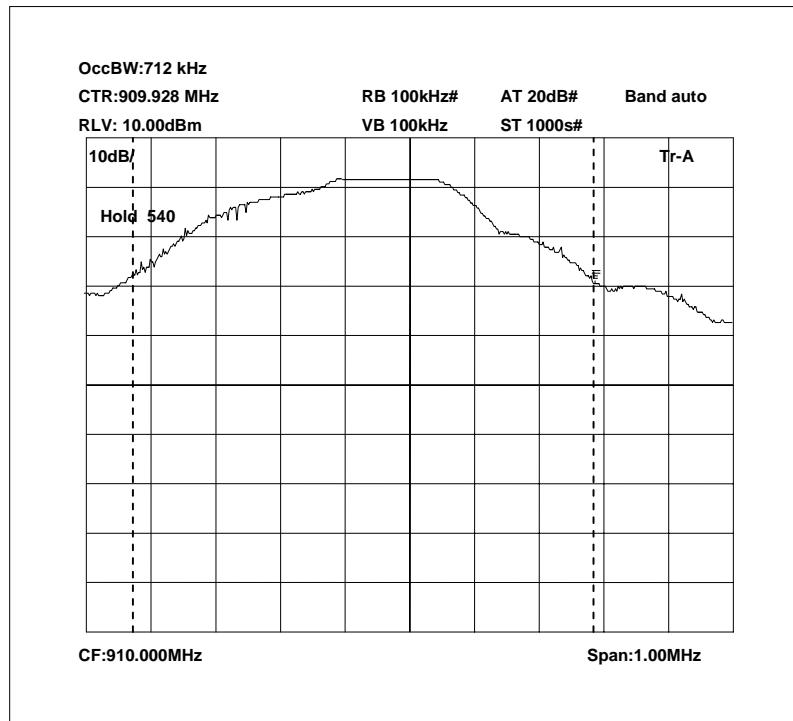

$f_l$  = 909.574 MHz  
 $f_h$  = 910.286 MHz  
Occupied bandwidth = 712 kHz

**ANNEX D**  
**SCAN PLOT(s)**



TRL Compliance Services Ltd


14 Jan 2005 15:41

## E-Field Radiation

EUT: Control Unit  
Manuf: SME  
Op Cond: 3m Indoor Prescan  
Operator: D Winstanley  
Test Spec: CFR47 FCC part 15.109 (Class B)  
Comment: Unit On Permanent Modulated Carrier.  
110 Vac RX Antenna Vertical

Scan Settings		(1 Range)			Receiver Settings				
Frequencies		Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
Start	Stop								
30MHz	1000MHz	50kHz	120kHz	PK	1msec	Auto	ON	60dB	
Transducer		No.	Start	Stop	Name				
1		15	30MHz	1000MHz	TRLUH72				
		22	30MHz	1000MHz	UH93				

Final Measurement:      Detector: X QP  
                                  Meas Time: 2sec  
                                  Subranges: 50  
                                  Acc Margin: 10 dB

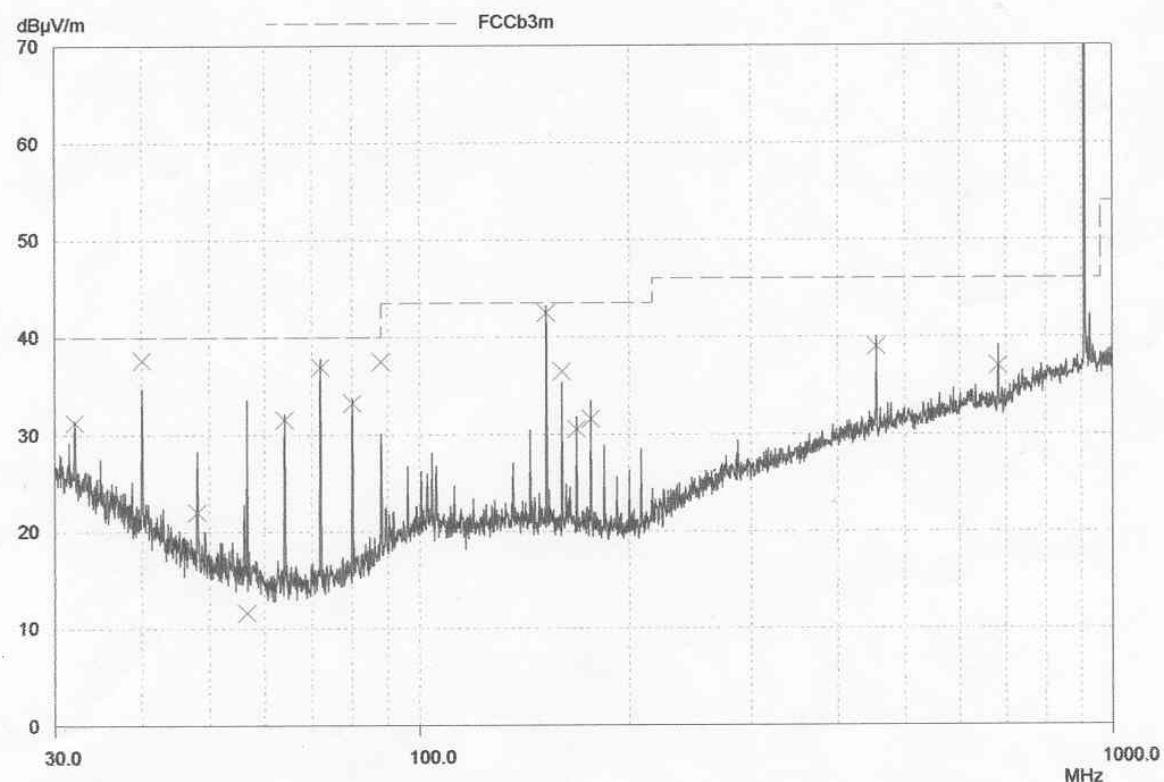


## Powerline Conduction

01 Feb 2005 13:55

### 150kHz - 30MHz

EUT: Control Unit  
 Manuf: Solutions Made Easy  
 Op Cond: LISN UH195, cable UH21 & Receiver UH03  
 Operator: D Winstanley  
 Test Spec: EN55022 Class B (or Variant)  
 Comment: Unit in Tx mode, 110Vac Live Line

Scan Settings		(1 Range)			Receiver Settings					
		Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
Start	150kHz	Stop	30MHz	Step	5kHz	IF BW	Detector	M-Time	Atten	Preamp
					10kHz	PK+AV	50msec	Auto	OFF	OpRge
Transducer	No.	Start	Stop	Name						
	1	150kHz	30MHz	UH21						
Final Measurement:		Detectors:	X QP / + AV			Meas Time:	2sec			
		Subranges:	25			Acc Margin:	20 dB			

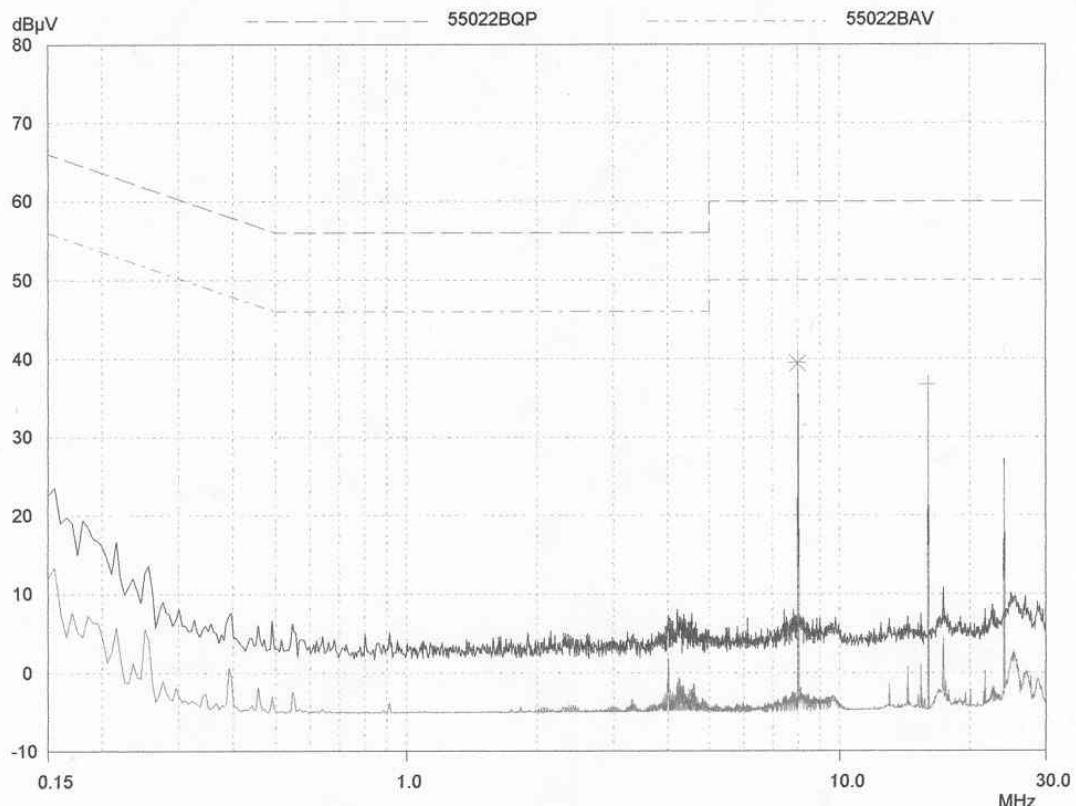


PAGE 1




**ANNEX E**  
**DUTY CYCLE PLOT(s)**

### DUTY CYCLE PLOT(s)

#### Ton During 100ms

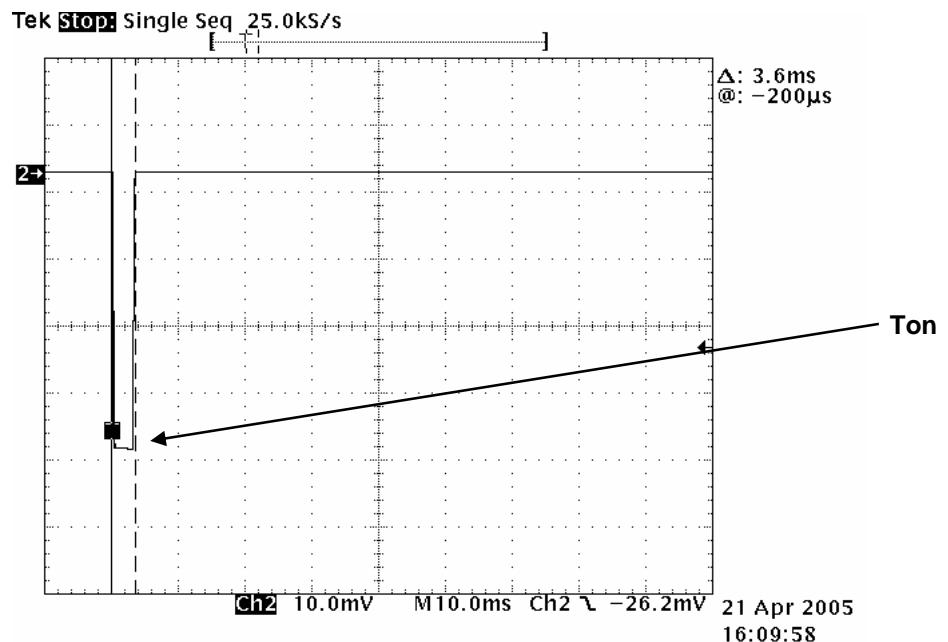


#### Close Up of Ton During 100ms

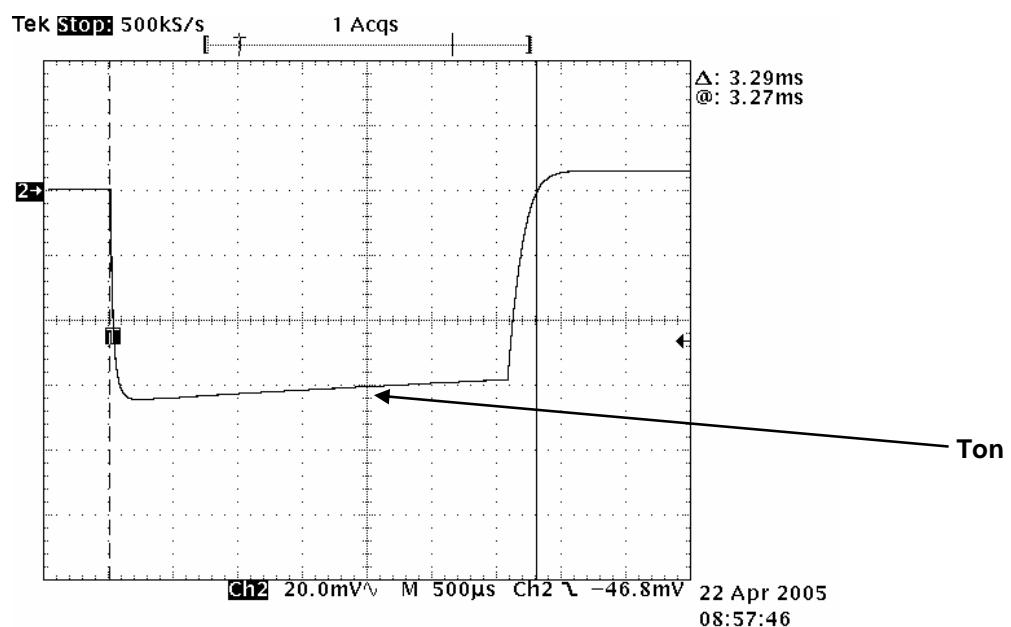

**Ton = 3.29 ms**

### Pulse Repetition Frequency

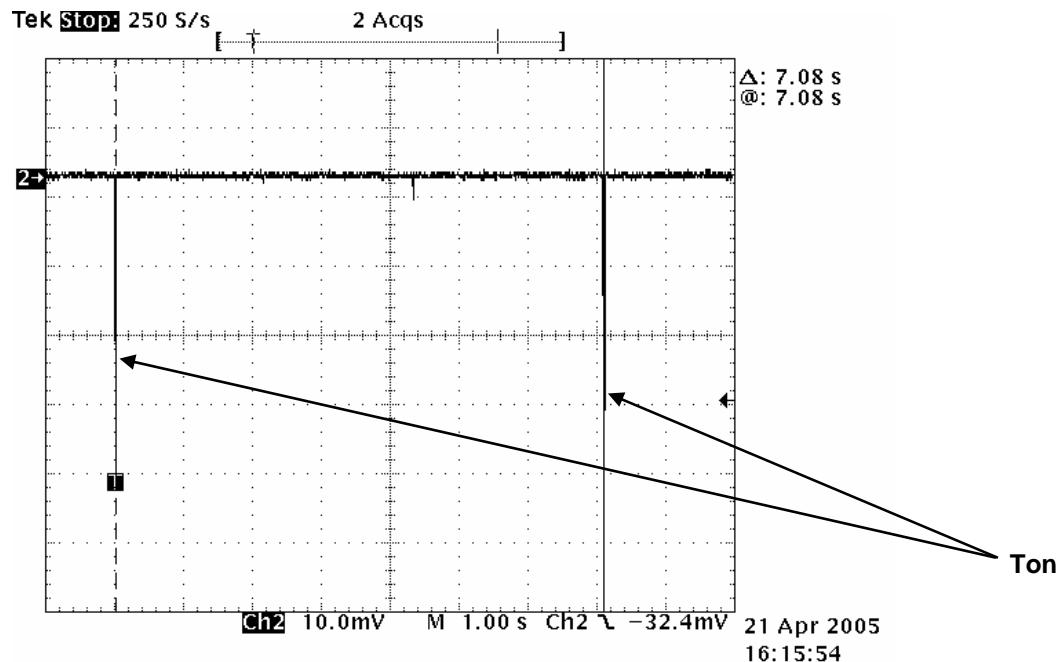

**PRF = 7.08 seconds**

**PRF = 1 / 7.08**

**PRF = 0.14Hz**