




SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Coverplay LLC
Applicant Address	3101 W. 2100 S. Salt Lake City, UT 84119 USA
FCC ID	ST5CPM0001
Manufacturer's company	Coverplay LLC
Manufacturer Address	3101 W. 2100 S. Salt Lake City, UT 84119 USA

Product Name	Mojo
Brand Name	COVERPLAY
Model Name	CPM0001
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz
Received Date	Mar. 08, 2013
Final Test Date	Apr. 26, 2013
Submission Type	Original Equipment

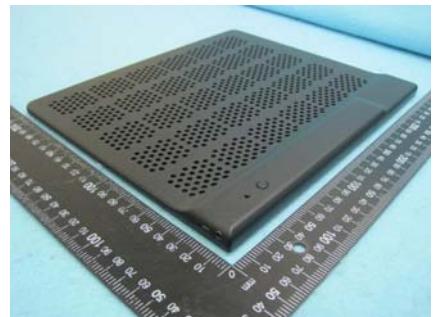

Statement

Test result included is only for the Bluetooth 1.0/2.0/2.1+EDR part of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details	3
3.2. Accessories	3
3.3. Table for Filed Antenna	4
3.4. Table for Carrier Frequencies	4
3.5. Table for Test Modes	5
3.6. Table for Testing Locations	6
3.7. Table for Supporting Units	6
3.8. Table for Parameters of Test Software Setting	7
3.9. EUT Operation during Test	7
3.10. Test Configurations	8
4. TEST RESULT	11
4.1. AC Power Line Conducted Emissions Measurement	11
4.2. Maximum Conducted Output Power Measurement	15
4.3. Hopping Channel Separation Measurement	17
4.4. Number of Hopping Frequency Measurement	28
4.5. Dwell Time Measurement	30
4.6. Radiated Emissions Measurement	37
4.7. Emissions Measurement	49
4.8. Antenna Requirements	63
5. LIST OF MEASURING EQUIPMENTS	64
6. TEST LOCATION	66
APPENDIX A. TEST PHOTOS	A1 ~ A5



History of This Test Report



Report No.: FR330878

Certificate No.: CB10205034

1. CERTIFICATE OF COMPLIANCE

Product Name : Mojo
Brand Name : COVERPLAY
Model No. : CPM0001
Applicant : Coverplay LLC
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Mar. 08, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink that reads 'Sam Chen'.

Sam Chen

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	13.44 dB
4.2	15.247(b)(1)	Maximum Conducted Output Power	Complies	24.93 dB
4.3	15.247(a)(1)	Hopping Channel Separation	Complies	-
4.4	15.247(b)(1)	Number of Hopping Frequency	Complies	-
4.5	15.247(a)(1)	Dwell Time	Complies	-
4.6	15.247(d)	Radiated Emissions	Complies	0.12 dB
4.7	15.247(d)	Band Edge Emissions	Complies	2.90 dB
4.8	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Hopping Channel Separation	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Items	Description
Power Type	From host sysytem and Battery
Modulation	FHSS (GFSK / $\pi/4$ -DQPSK / 8DPSK)
Data Rate (Mbps)	GFSK: 1 ; $\pi/4$ -DQPSK: 2 ; 8DPSK: 3
Frequency Range	2400 ~ 2483.5MHz
Channel Number	79
Channel Band Width (99%)	For Bluetooth 1.0 : 0.872 MHz For Bluetooth 2.0 : 1.204 MHz For Bluetooth 2.1 + EDR : 1.188 MHz
Maximum Conducted Output Power	For Bluetooth 1.0 : 5.07 dBm For Bluetooth 2.0 : 0.86 dBm For Bluetooth 2.1 + EDR : 0.73 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3


3.2. Accessories

Battery information:

Brand Name	Model Name	Power Rating
Aeenergy	AE652248P6H	3.7 Vdc, 630 mAh

3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	IN2UIT	ANT24G	Printed Antenna	N/A	1.26

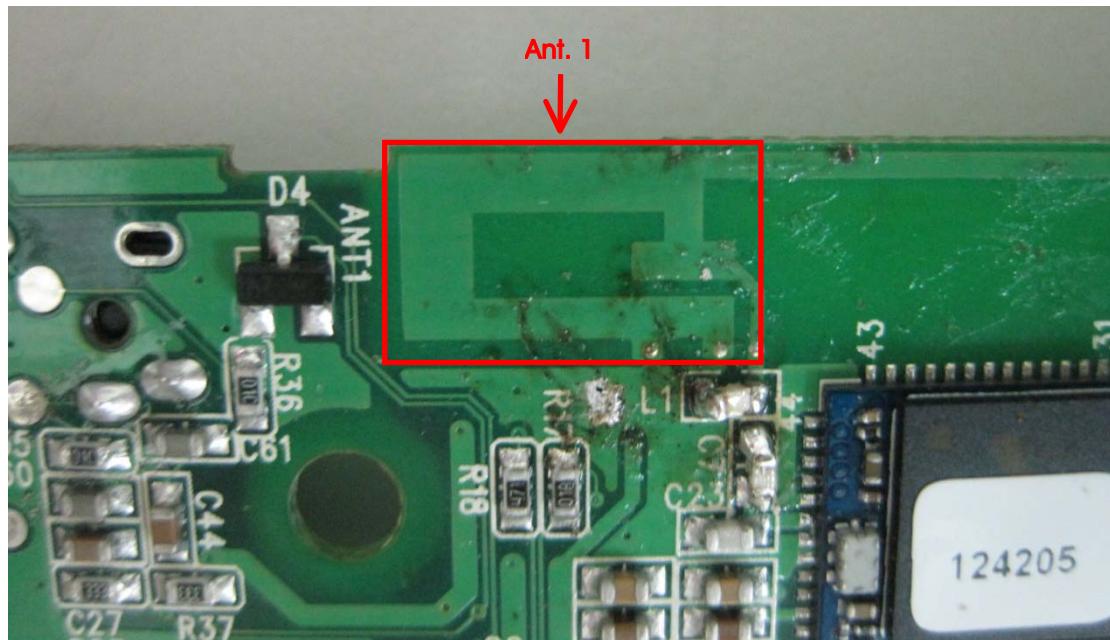

3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	40	2442 MHz
	1	2403 MHz	:	:
	:	:	77	2479 MHz
	38	2440 MHz	78	2480 MHz
	39	2441 MHz	-	-

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emissions	Normal Link		-	-	-
Maximum Conducted Output Power	BT1.0	GFSK	1 Mbps	0/39/78	1
	BT2.0	$\pi/4$ -DQPSK	2 Mbps	0/39/78	1
	BT2.1+EDR	8DPSK	3 Mbps	0/39/78	1
Hopping Channel Separation	BT1.0	GFSK	1 Mbps	0~1/39~40/ 77~78	1
	BT2.0	$\pi/4$ -DQPSK	2 Mbps	0~1/39~40/ 77~78	1
	BT2.1+EDR	8DPSK	3 Mbps	0~1/39~40/ 77~78	1
Number of Hopping Frequency	BT2.1+EDR	8DPSK	3 Mbps	0~78	1
Dwell Time	BT1.0	DH1/DH3/DH5	1 Mbps	0/39/78	1
Radiated Emissions Below 1GHz	Normal Link		-	-	-
Radiated Emissions Above 1GHz	BT1.0	GFSK	1 Mbps	0/39/78	1
	BT2.1+EDR	8DPSK	3 Mbps	0/39/78	1
Band Edge Emissions	BT1.0	GFSK	1 Mbps	0/39/78	1
	BT2.1+EDR	8DPSK	3 Mbps	0/39/78	1

The following test modes were performed for all tests:

<AC Power Port Conducted emission test>

Mode 1. Play music via Audio Link + Charge

Mode 2. Play music via Bluetooth Link + Charge

Due to Mode 2 generated the worst test result, it was recorded in this report.

<Radiated emission test> 30MHz~1GHz

Mode 1. Place EUT in X axis + Play music via Audio Link

Mode 2. Place EUT in Y axis + Play music via Audio Link

Mode 3. Place EUT in Z axis + Play music via Audio Link

Mode 1 has been evaluated to be the worst case among Mode 1~3, thus measurement for Mode 4 will follow this same test mode

Mode 4. Place EUT in X axis + Play music via Bluetooth Link

Mode 1 has been evaluated to be the worst case among Mode 1~4, thus measurement for Mode 5 will follow this same test mode

Mode 5. Place EUT in X axis + Play music via Audio Link + Charge

Due to Mode 5 generated the worst test result, it was recorded in this report.

<Radiated emission test> above 1GHz

Mode 1. Place EUT in X axis

Mode 2. Place EUT in Y axis

Mode 3. Place EUT in Z axis

Due to Mode 1 generated the worst test result, it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC), Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

<AC Power Port Conducted emission test>

Support Unit	Brand	Model	FCC ID
iPhone	Apple	CB-003	DoC
NB	DELL	E6430	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A

<Radiated emission test> 30MHz~1GHz

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	QDS-BRCM1049LE
Mouse	Logitech	M-U0026	DoC

<Radiated emission test> above 1GHz

Support Unit	Brand	Model	FCC ID
PC	hp compaq	GC758AV	DoC
LCD Monitor	DELL	1704FPT	DoC
Keyboard	iCooky	SK068	DoC
Mouse	Logitech	M-U0026	DoC

<Conducted test>

Support Unit	Brand	Model	FCC ID
PC	hp compaq	GC758AV	DoC

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Power Parameters of Bluetooth

For Bluetooth 1.0 / GFSK:

Test Software Version	BlueSuite 2.4.6		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	63	63	63

For Bluetooth 2.0 / $\pi/4$ -DQPSK:

Test Software Version	BlueSuite 2.4.6		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	120	120	120

For Bluetooth 2.1+EDR / 8DPSK:


Test Software Version	BlueSuite 2.4.6		
Frequency	2402 MHz	2441 MHz	2480 MHz
Power Parameters	120	120	120

3.9. EUT Operation during Test

During the test, "BlueSuite 2.4.6" under WIN XP was executed the test program to control the EUT continuously transmit RF signal.

3.10. Test Configurations


3.10.1. AC Power Line Conduction Emissions Test Configuration

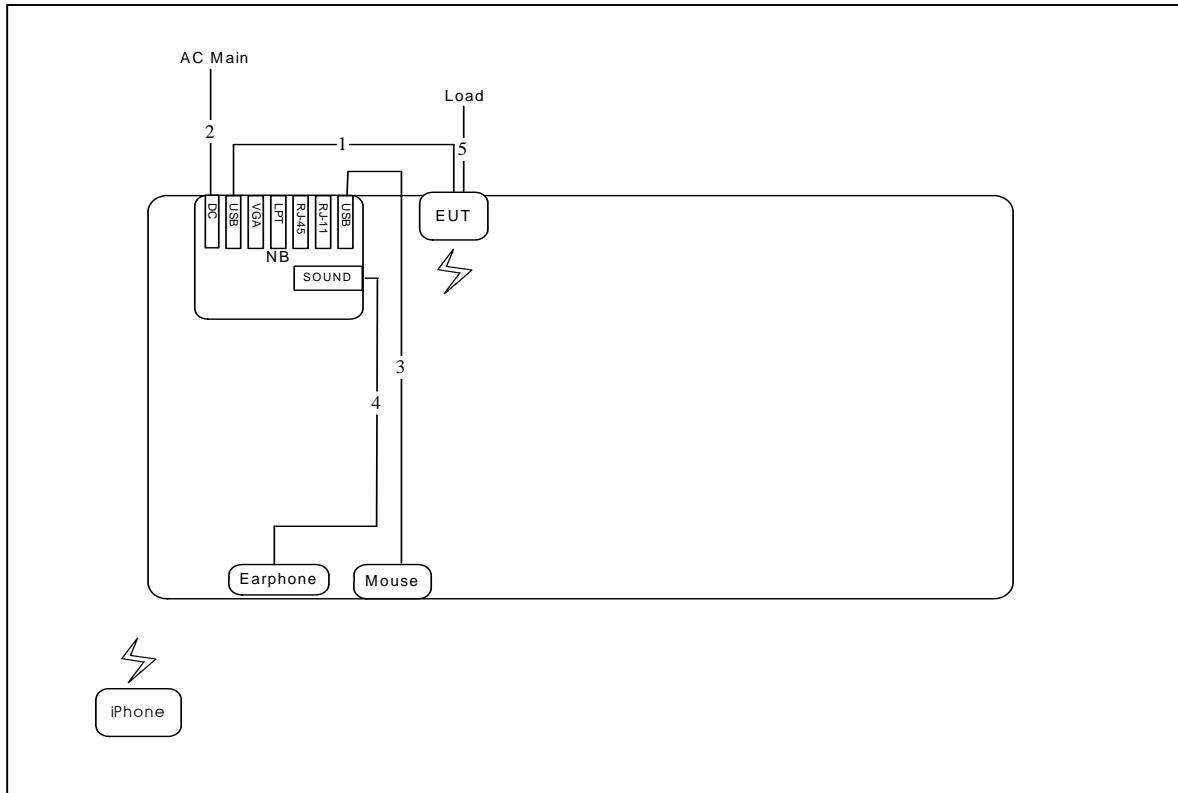

Item	Connection	Shield	Length
1	USB cable	No	0.95m
2	Power cable	No	2.6m
3	USB cable	No	1.8m
4	Audio cable	No	1.1m
5	Audio cable	No	1.8m


3.10.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

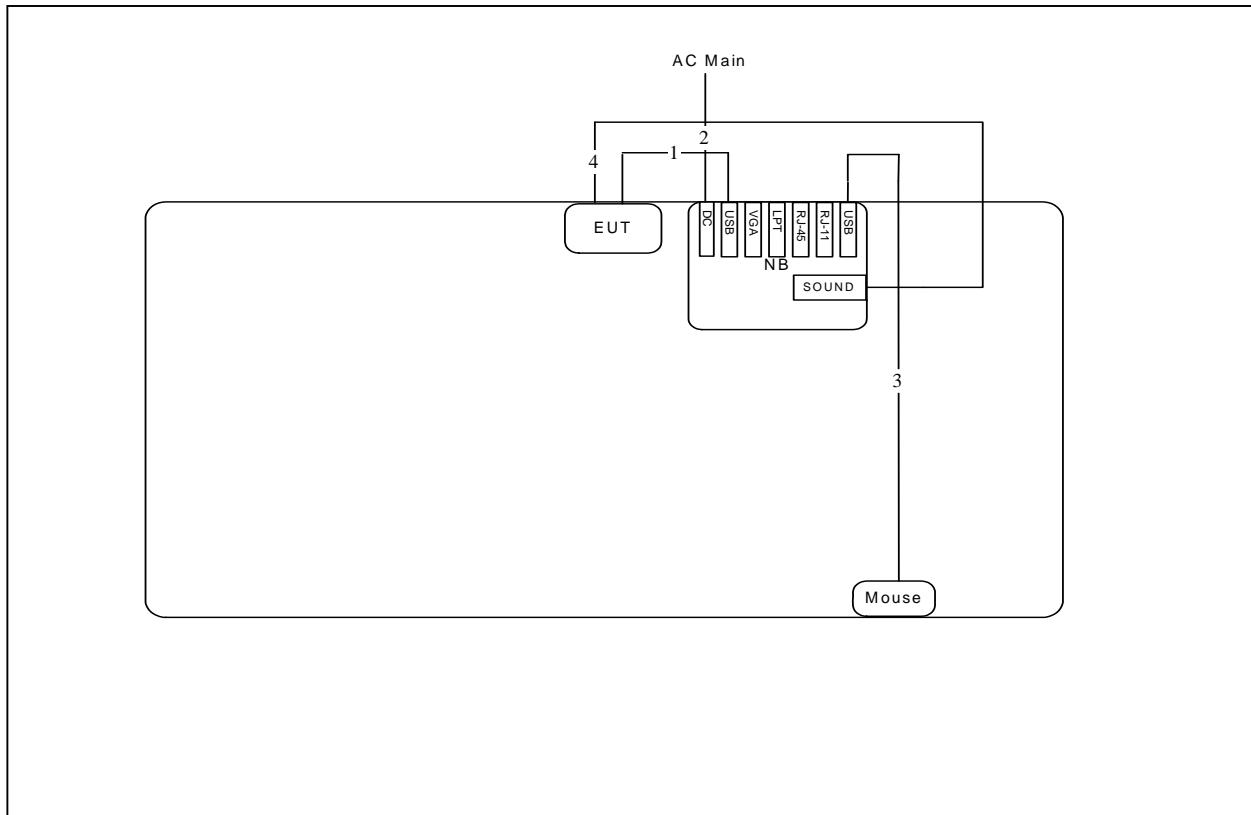

Item	Connection	Shield	Length
1	USB cable	No	0.95m
2	Power cable	No	2.6m
3	USB cable	No	1.8m
4	Audio cable	No	1.1m

Test Configuration: above 1GHz

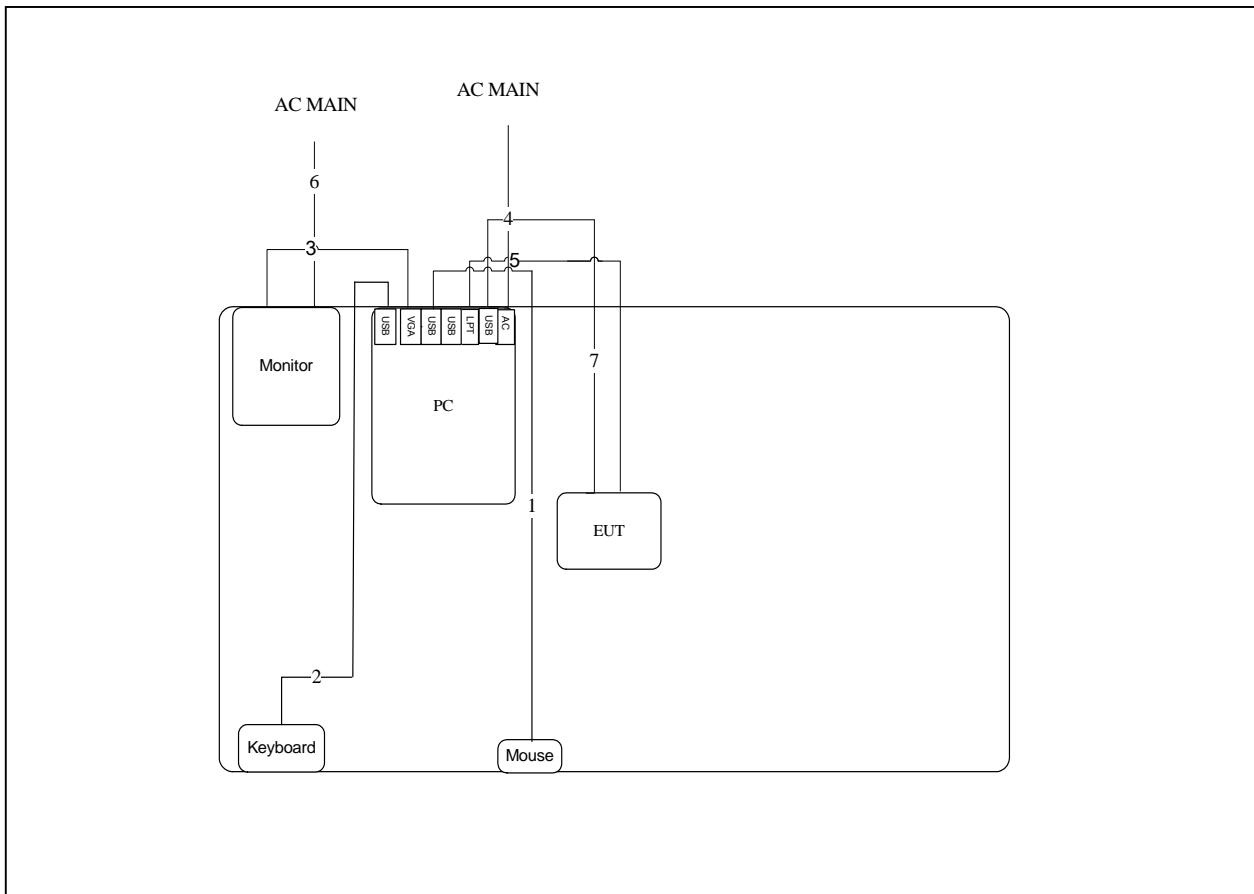

Item	Connection	Shield	Length
1	USB cable	No	1.8m
2	USB cable	No	1.8m
3	VGA cable	Yes	1.1m
4	Power cable	No	1.8m
5	LPT cable	Yes	1.8m
6	Power cable	No	1.8m
7	USB cable	No	0.95m

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For a Low-power Radio-frequency Device which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

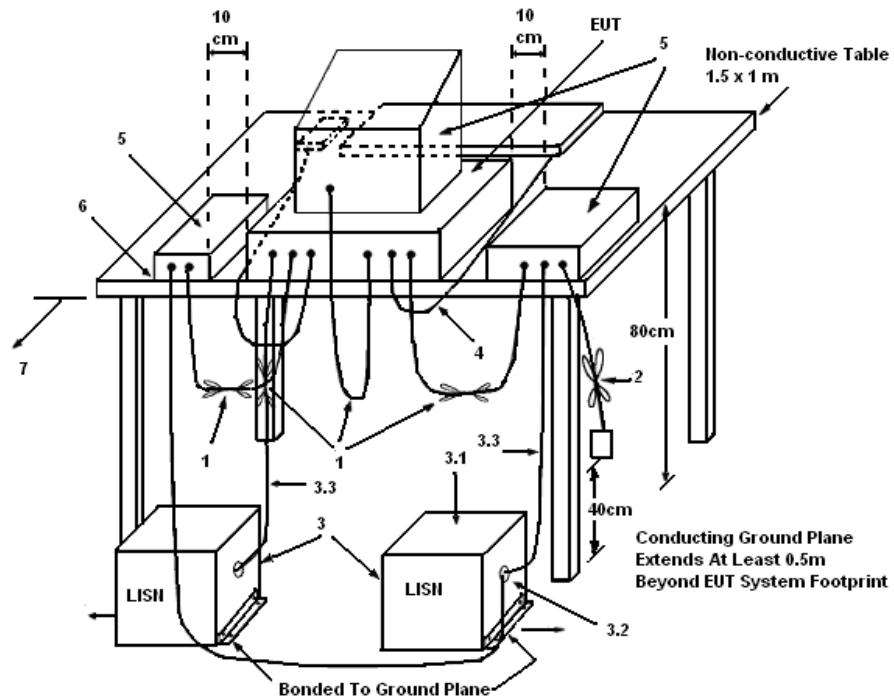

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50Ω . LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	52%
Test Engineer	Simon Yang	Phase	Line
Configuration	Mode 2		

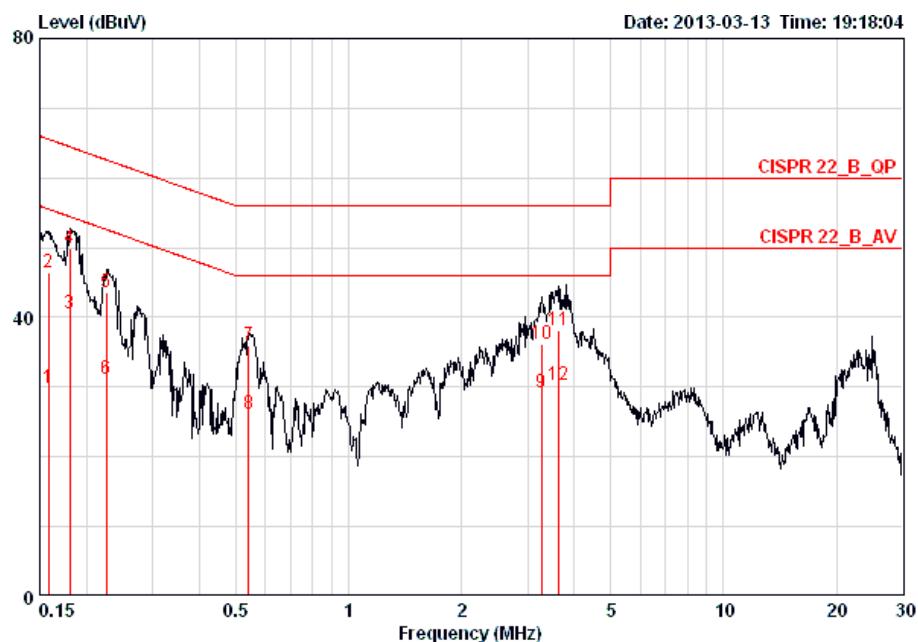

Freq	Level	Over	Limit	Read	LISN	Cable	
		Limit	Line	Level	Factor	Loss	
MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15816	29.94	-25.62	55.56	29.60	0.16	0.18 AVERAGE
2	0.15816	46.39	-19.17	65.56	46.05	0.16	0.18 QP
3 @	0.18056	40.48	-13.98	54.46	40.14	0.15	0.19 AVERAGE
4 @	0.18056	49.84	-14.62	64.46	49.50	0.15	0.19 QP
5	0.22556	43.58	-19.03	62.61	43.23	0.15	0.20 QP
6	0.22556	31.15	-21.46	52.61	30.80	0.15	0.20 AVERAGE
7	0.54068	35.95	-20.06	56.00	35.59	0.16	0.20 QP
8	0.54068	26.22	-19.79	46.00	25.86	0.16	0.20 AVERAGE
9	3.276	29.22	-16.78	46.00	28.75	0.21	0.27 AVERAGE
10	3.276	36.21	-19.79	56.00	35.74	0.21	0.27 QP
11	3.623	38.24	-17.76	56.00	37.74	0.21	0.28 QP
12 @	3.623	30.39	-15.61	46.00	29.89	0.21	0.28 AVERAGE

Temperature	25°C	Humidity	52%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Mode 2		

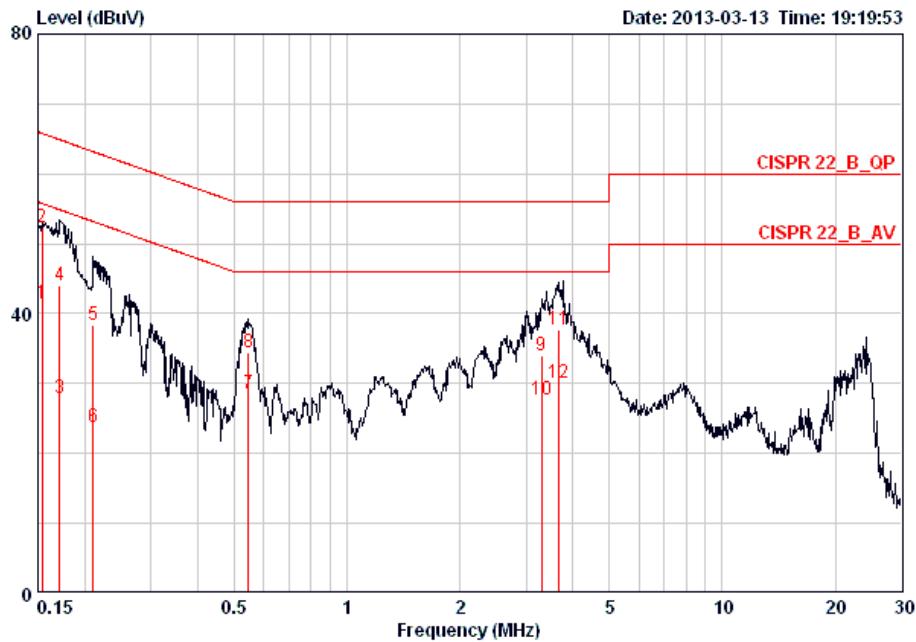

Freq	Level	Over Limit	Read Line	LISN Cable			
				MHz	dBuV	dB	dBuV
1 ②	0.15403	41.38	-14.40	55.78	41.12	0.08	0.18 AVERAGE
2 ②	0.15403	52.34	-13.44	65.78	52.08	0.08	0.18 QP
3	0.17125	27.87	-27.03	54.90	27.60	0.08	0.19 AVERAGE
4	0.17125	44.07	-20.83	64.90	43.80	0.08	0.19 QP
5	0.21055	38.31	-24.87	63.18	38.03	0.08	0.20 QP
6	0.21055	23.79	-29.39	53.18	23.51	0.08	0.20 AVERAGE
7	0.54644	28.50	-17.50	46.00	28.22	0.08	0.20 AVERAGE
8	0.54644	34.47	-21.53	56.00	34.19	0.08	0.20 QP
9	3.293	33.96	-22.04	56.00	33.57	0.12	0.27 QP
10	3.293	27.58	-18.42	46.00	27.19	0.12	0.27 AVERAGE
11	3.681	37.65	-18.35	56.00	37.24	0.13	0.29 QP
12 ②	3.681	30.01	-15.99	46.00	29.60	0.13	0.29 AVERAGE

Note: Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, the limit for peak output power is 1Watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts (21dBm). The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

4.2.3. Test Procedures

This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

4.2.4. Test Setup Layout

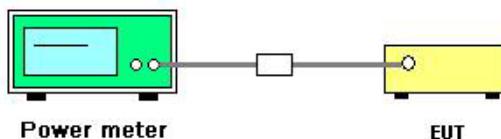

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	18°C	Humidity	65%
Test Engineer	Wen Chao	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK
Test Date	Apr. 24, 2013		

For Bluetooth 1.0 / GFSK :

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	3.99	30.00	Complies
39	2441 MHz	4.91	30.00	Complies
78	2480 MHz	5.07	30.00	Complies

For Bluetooth 2.0 / $\pi/4$ -DQPSK:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	0.31	30.00	Complies
39	2441 MHz	0.45	30.00	Complies
78	2480 MHz	0.86	30.00	Complies

For Bluetooth 2.1+EDR / 8DPSK:

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	0.01	30.00	Complies
39	2441 MHz	0.38	30.00	Complies
78	2480 MHz	0.73	30.00	Complies

4.3. Hopping Channel Separation Measurement

4.3.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilized for 20 dB bandwidth measurement.
3. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were utilized for channel separation measurement.

4.3.4. Test Setup Layout

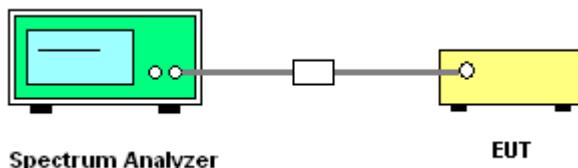

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Hopping Channel Separation

Temperature	18°C	Humidity	65%
Test Engineer	Wen Chao	Configurations	GFSK, $\pi/4$ -DQPSK, 8DPSK

For Bluetooth 1.0 / GFSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	0.9080	0.605	0.8640	Complies
2441 MHz	1.00	0.8640	0.576	0.8640	Complies
2480 MHz	1.00	0.9560	0.637	0.8720	Complies

Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For Bluetooth 2.0 / $\pi/4$ -DQPSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.3320	0.888	1.2040	Complies
2441 MHz	1.00	1.2320	0.821	1.1840	Complies
2480 MHz	1.00	1.3200	0.880	1.1800	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

For Bluetooth 2.1+EDR / 8DPSK:

Frequency	Ch. Separation (MHz)	20dB Bandwidth (MHz)	Two-Thirds of 20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Result
2402 MHz	1.00	1.2600	0.840	1.1840	Complies
2441 MHz	1.00	1.2720	0.848	1.1680	Complies
2480 MHz	1.00	1.2560	0.837	1.1880	Complies


Ch. Separation Limits: >20dB bandwidth or > Two-Thirds of 20dB bandwidth

20 dB Bandwidth Plot on Bluetooth 1.0 / GFSK / Channel 0 / 2402 MHz

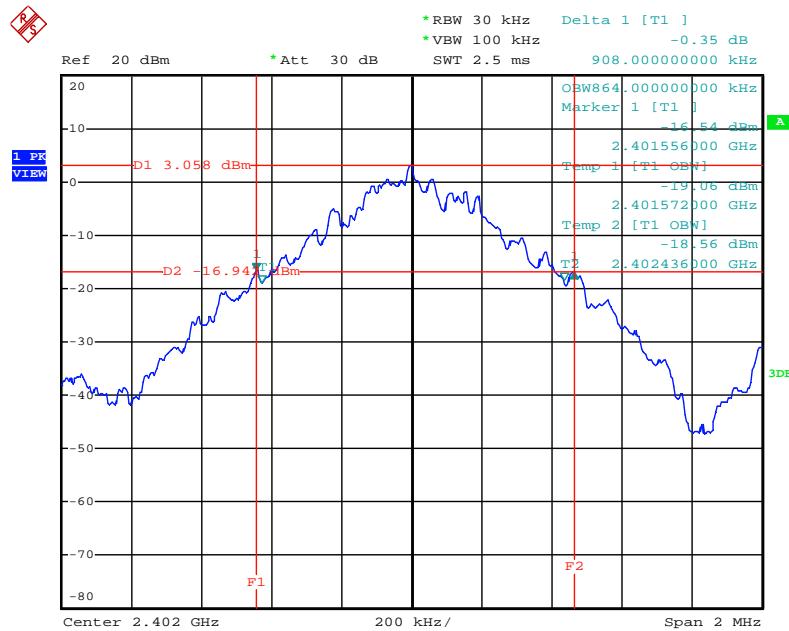


Date: 24.APR.2013 15:05:01

20 dB Bandwidth Plot on Bluetooth 1.0 / GFSK / Channel 39 / 2441 MHz

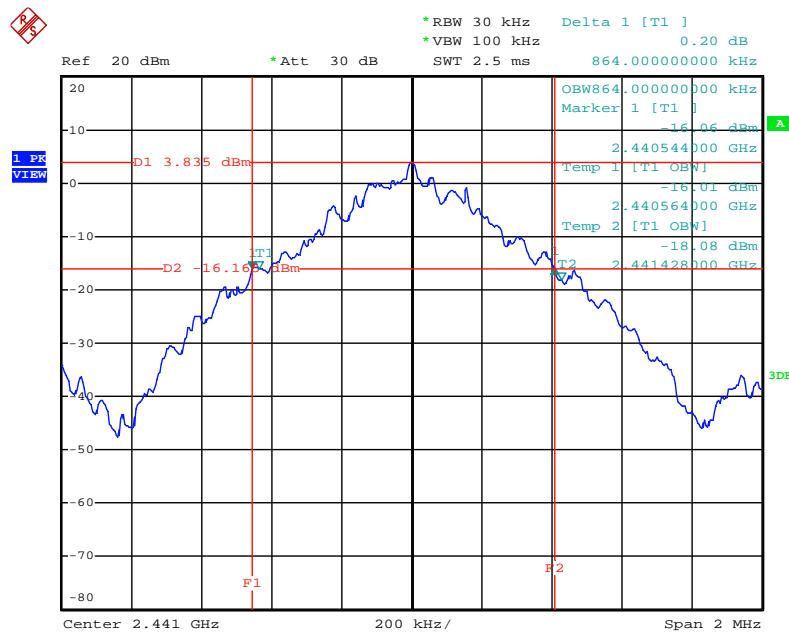


Date: 24.APR.2013 15:06:51

20 dB Bandwidth Plot on Bluetooth 1.0 / GFSK / Channel 78 / 2480 MHz

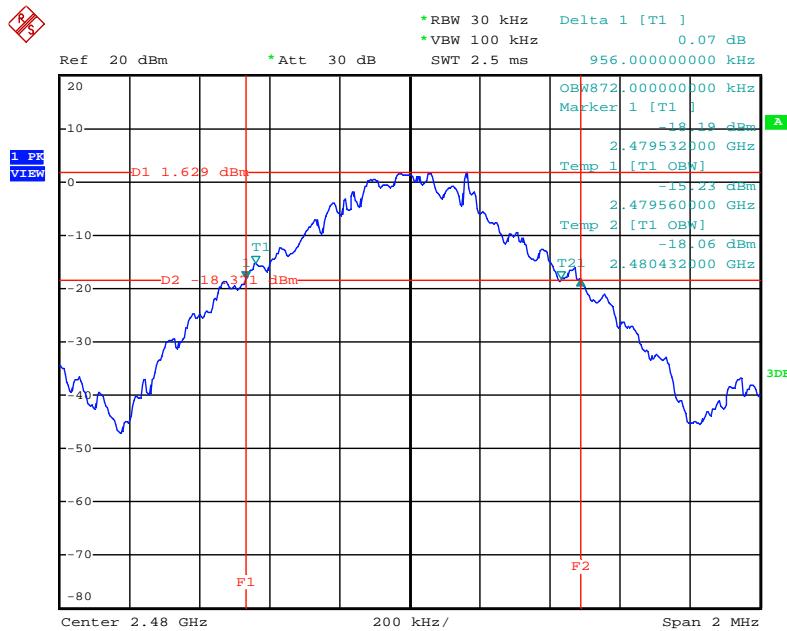


Date: 24.APR.2013 15:08:47

Channel Separation Plot on Bluetooth 1.0 / GFSK / Channel 0~1 / 2402 MHz ~ 2403 MHz

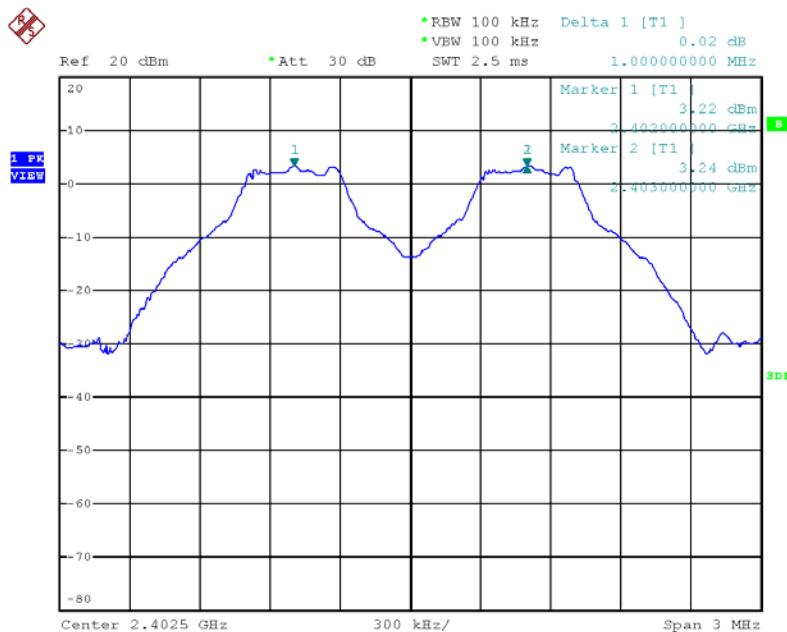


Date: 24.APR.2013 15:19:11

Channel Separation Plot on Bluetooth 1.0 / GFSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

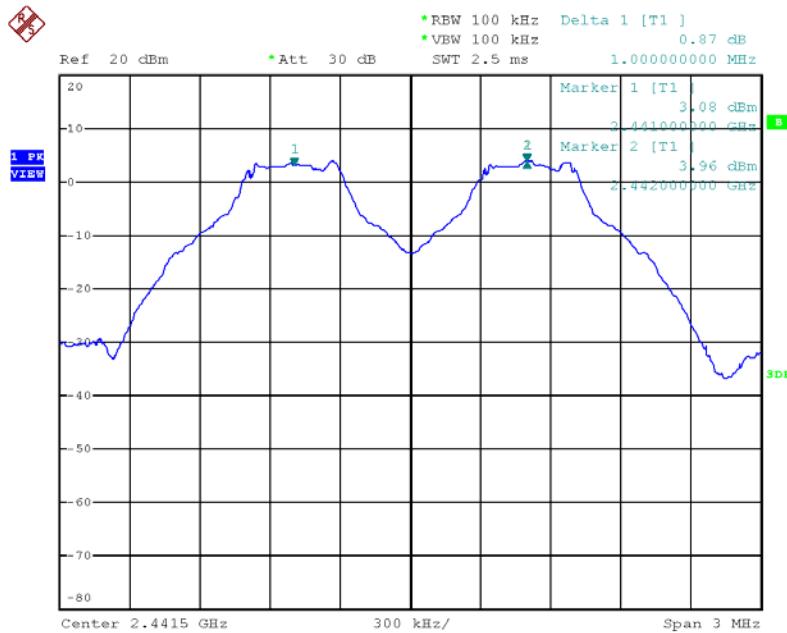


Date: 24.APR.2013 15:21:03

Channel Separation Plot on Bluetooth 1.0 / GFSK / Channel 77~78 / 2479 MHz ~ 2480 MHz

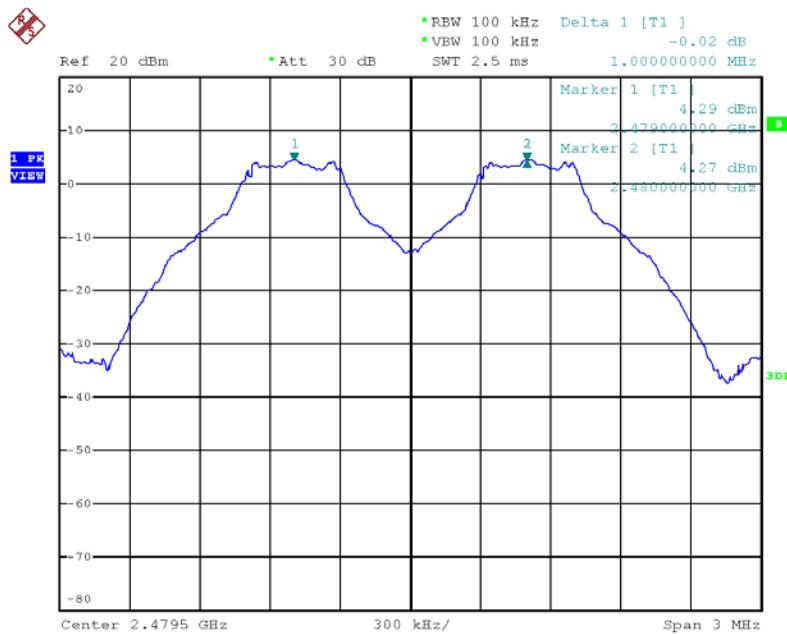


Date: 24.APR.2013 15:22:48

20 dB Bandwidth Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 0 / 2402 MHz

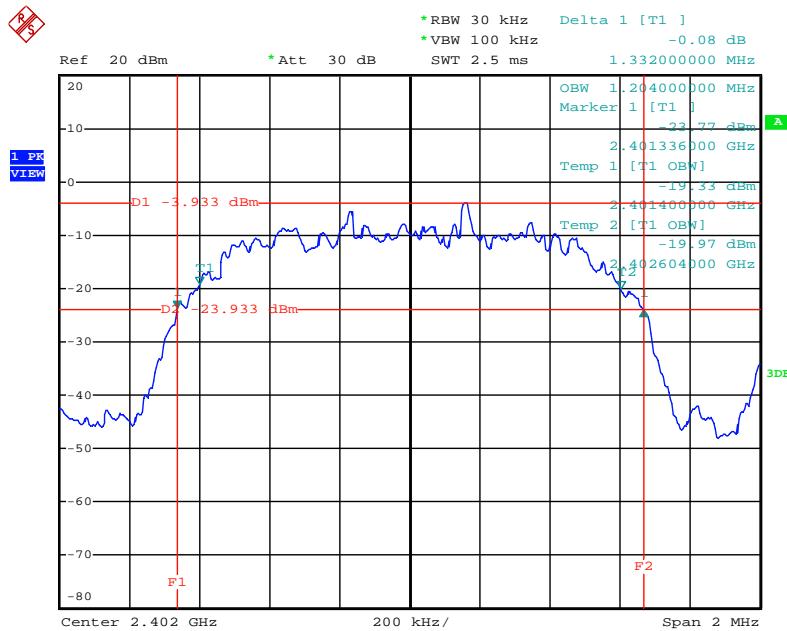


Date: 24.APR.2013 15:03:31

20 dB Bandwidth Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 39 / 2441 MHz

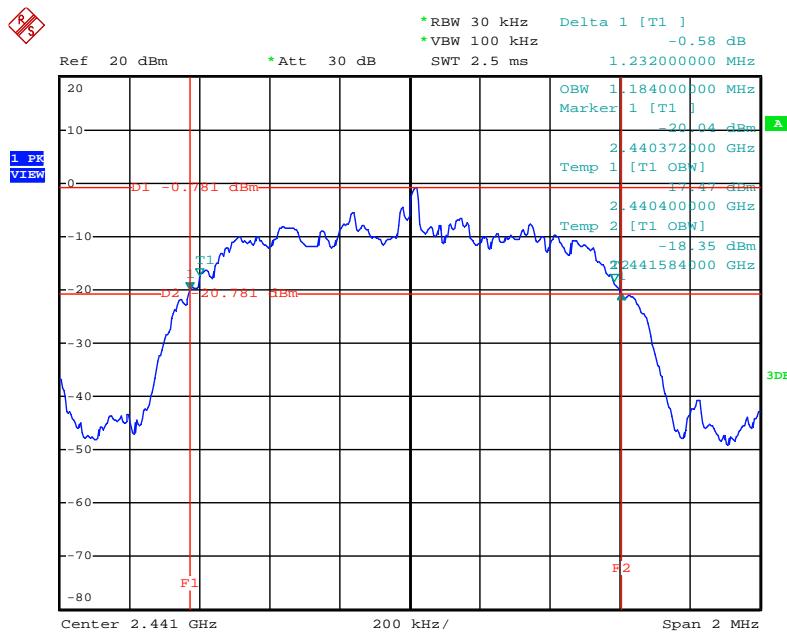


Date: 24.APR.2013 15:02:37

20 dB Bandwidth Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 78 / 2480 MHz

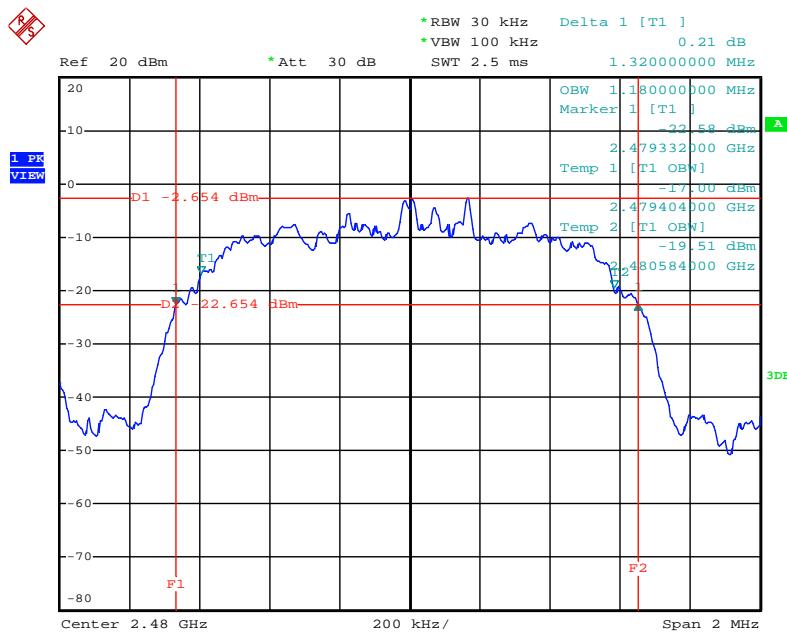


Date: 24.APR.2013 15:01:14

Channel Separation Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 0~1 / 2402 MHz ~ 2403 MHz

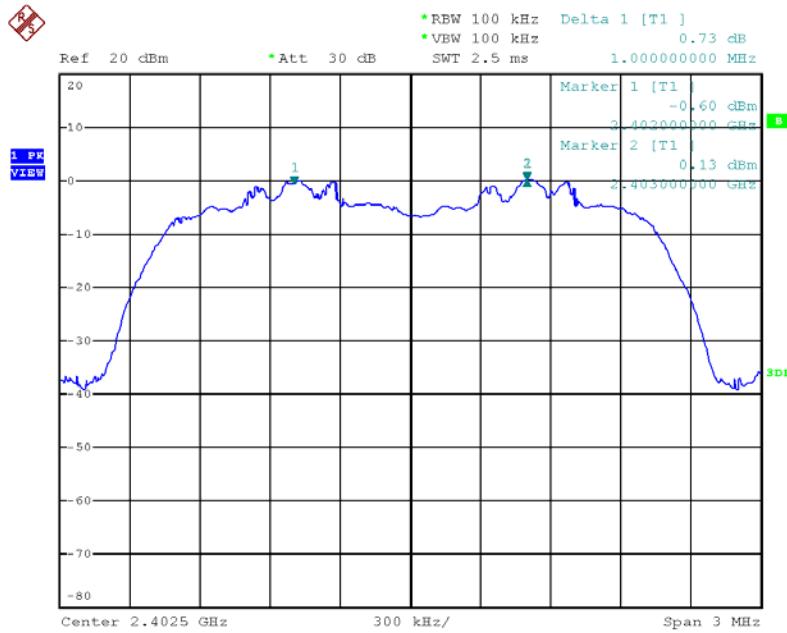


Date: 24.APR.2013 15:28:33

Channel Separation Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

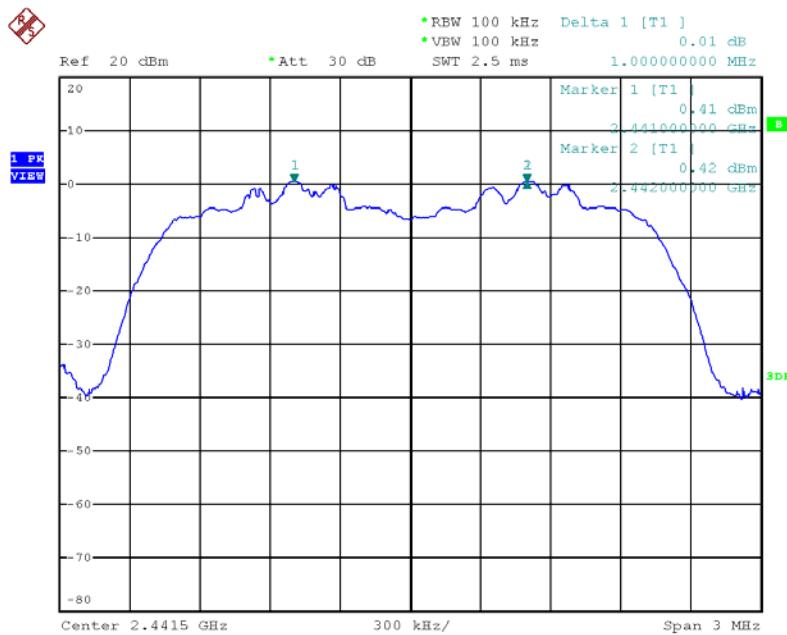


Date: 24.APR.2013 15:30:38

Channel Separation Plot on Bluetooth 2.0 / $\pi/4$ -DQPSK / Channel 77~78 / 2479 MHz ~ 2480 MHz

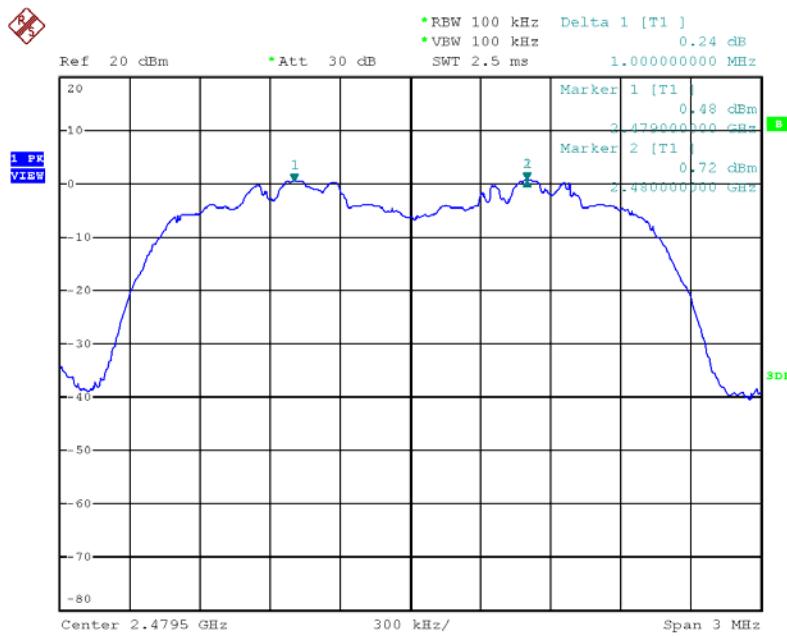


Date: 24.APR.2013 15:24:53

20 dB Bandwidth Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 0 / 2402 MHz

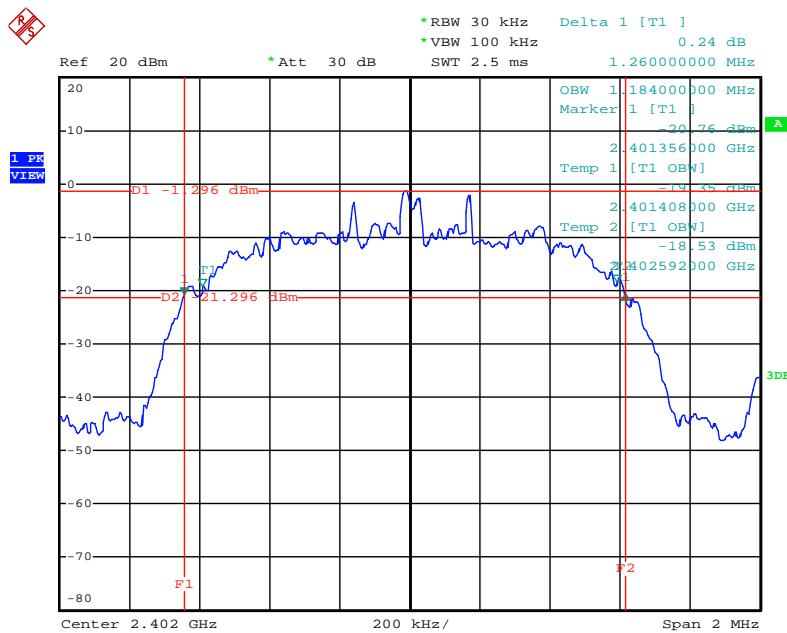


Date: 24.APR.2013 14:55:00


20 dB Bandwidth Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 39 / 2441 MHz

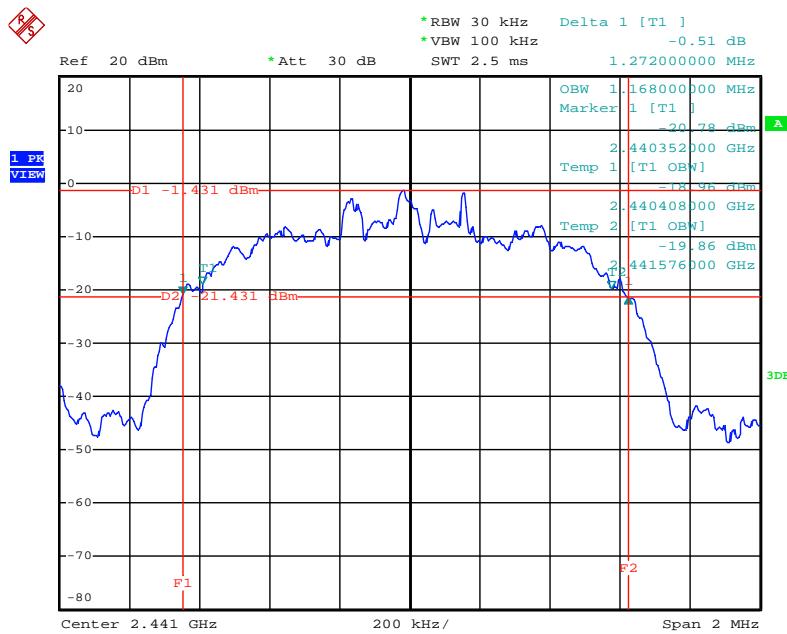

Date: 24.APR.2013 14:57:46

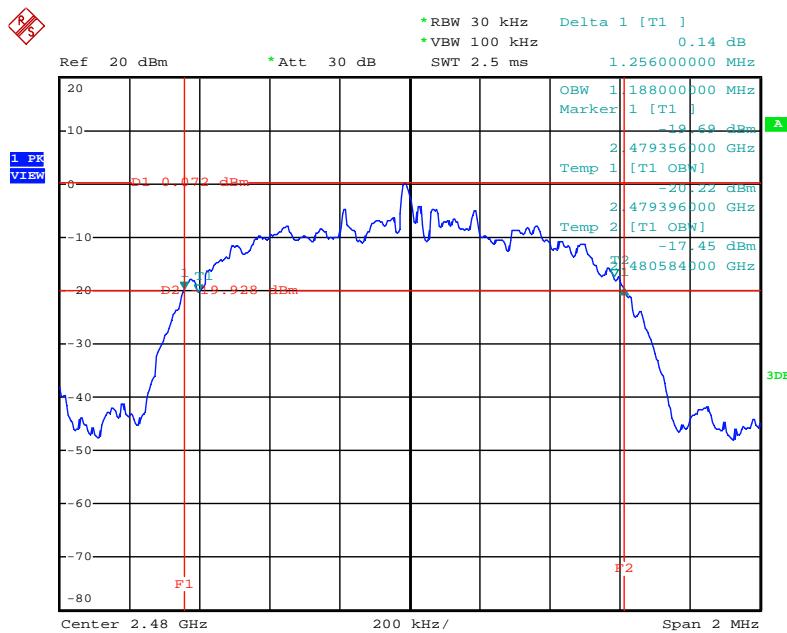
20 dB Bandwidth Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 78 / 2480 MHz


Date: 24.APR.2013 14:58:51

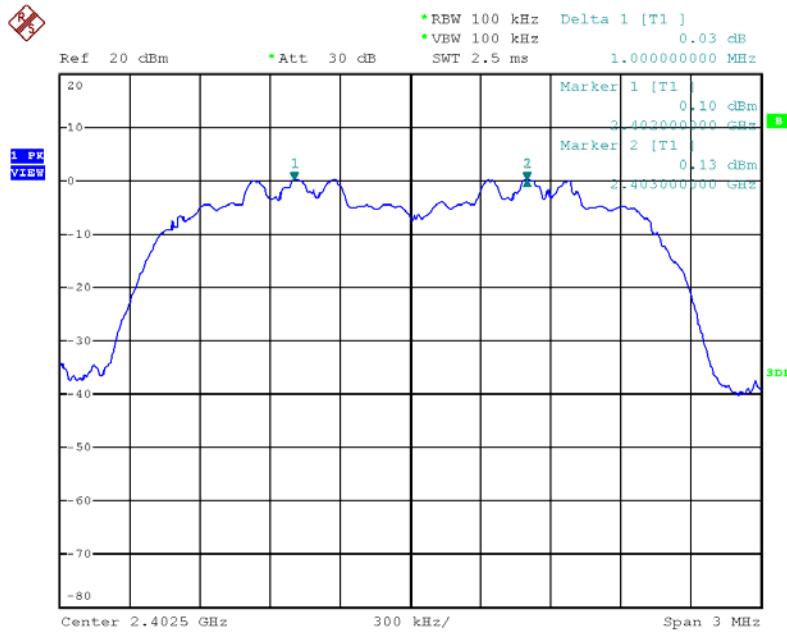Channel Separation Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 0~1 / 2402 MHz ~ 2403 MHz


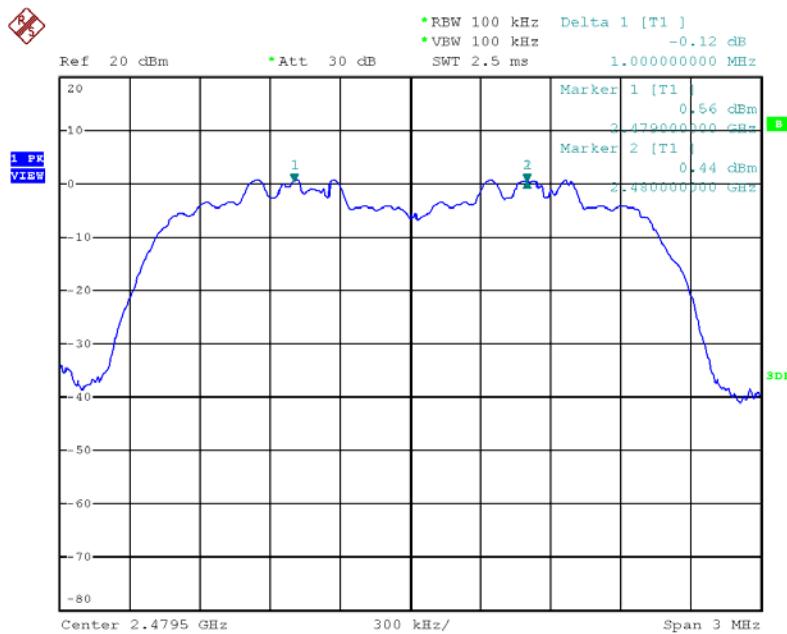
Date: 24.APR.2013 15:32:59

Channel Separation Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 39~40 / 2441 MHz ~ 2442 MHz

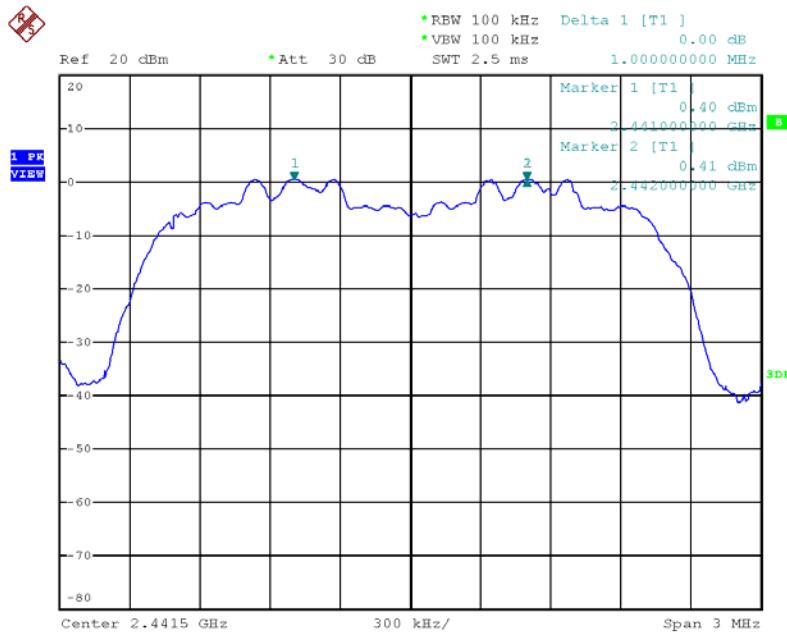

Date: 24.APR.2013 15:35:30

Channel Separation Plot on Bluetooth 2.1+EDR / 8DPSK / Channel 77~78 / 2479 MHz ~ 2480 MHz



Date: 24.APR.2013 15:37:11

4.4. Number of Hopping Frequency Measurement

4.4.1. Limit

At least 15 hopping frequencies, and should be equally spaced.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. The resolution bandwidth of 1000 kHz and the video bandwidth of 1000 kHz were utilized.
3. Observe frequency hopping in 2400MHz~2483.5MHz, there are at least 75 non-overlapping channels.

4.4.4. Test Setup Layout

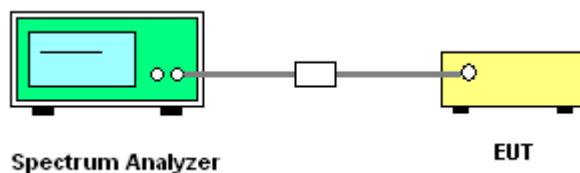

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of Number of Hopping Frequency

Temperature	18°C	Humidity	65%
Test Engineer	Wen Chao	Configurations	8DPSK

Modulation Type	Channel No.	Frequency (MHz)	Hopping Ch. (Channels)	Min. Limit (Channels)	Test Result
3DH5	0 ~ 78	2402 ~ 2480	79	15	Complies

Number of Hopping Channel Plot on Channel 0~78 / 2402 MHz ~ 2480 MHz

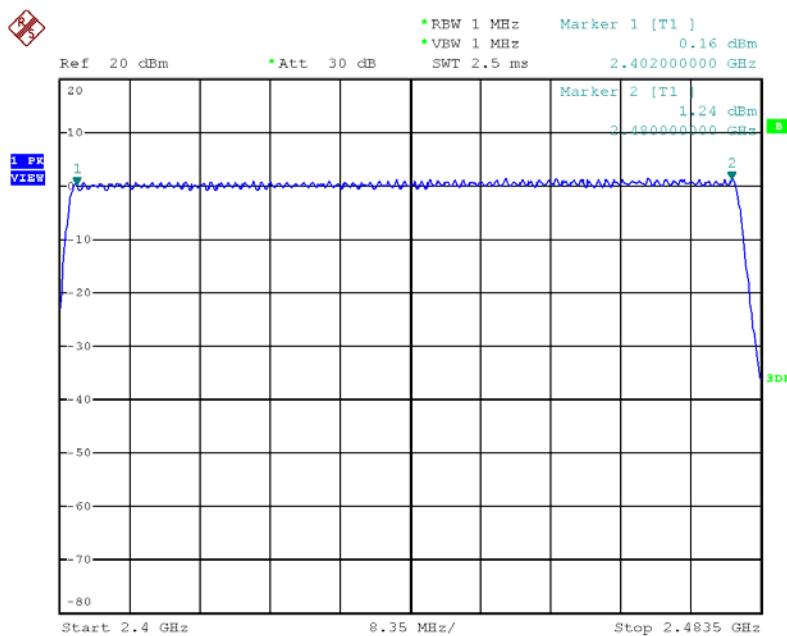

Date: 24.APR.2013 15:41:16

4.5. Dwell Time Measurement

4.5.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.5.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	0 MHz
RB	1000 kHz
VB	1000 kHz
Detector	Peak
Trace	Single Trigger

4.5.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer
2. Set RBW of spectrum analyzer to 1000kHz and VBW to 1000kHz.
3. Use a video trigger with the trigger level set to enable triggering only on full pulses.
4. Sweep Time is more than once pulse time.
5. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
6. Measure the maximum time duration of one single pulse.
7. Set the EUT for 3DH5, 3DH3 and 3DH1 packet transmitting.
8. Measure the maximum time duration of one single pulse.

4.5.4. Test Setup Layout

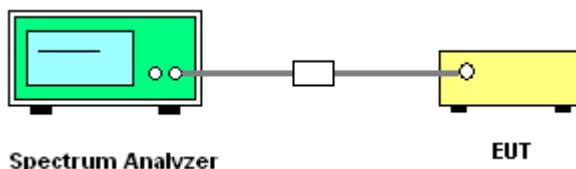

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Test Result of Dwell Time

Temperature	18°C	Humidity	65%
Test Engineer	Wen Chao	Configurations	GFSK / DH1, DH3, DH5

Data Packet	Frequency (MHz)	Pulse Duration (ms)	Dwell Time (s)	Limits (s)	Test Result
DH5	2402 MHz	2.9400	0.3136	0.4000	Complies
DH3	2402 MHz	1.6800	0.2688	0.4000	Complies
DH1	2402 MHz	0.4250	0.1360	0.4000	Complies
DH5	2441 MHz	2.9300	0.3125	0.4000	Complies
DH3	2441 MHz	1.6800	0.2688	0.4000	Complies
DH1	2441 MHz	0.4200	0.1344	0.4000	Complies
DH5	2480 MHz	2.9300	0.3125	0.4000	Complies
DH3	2480 MHz	1.6800	0.2688	0.4000	Complies
DH1	2480 MHz	0.4200	0.1344	0.4000	Complies


Note: Pulse Duration * Number of Pulses*(Dwell time / measure time)

Remark:


Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time (us)

79 channels come from the Hopping Channel number.


Average Hopping Channel = hops / sweep time

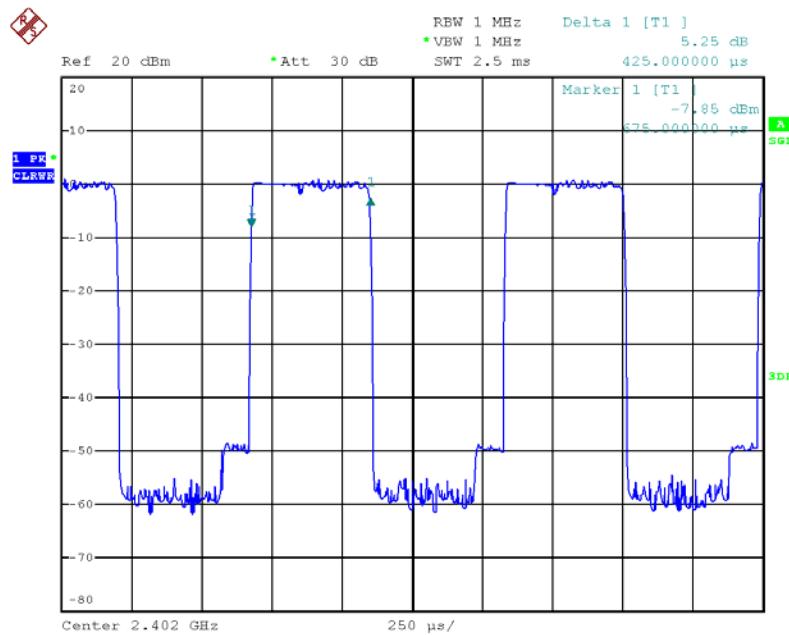Dwell Time Plot on GFSK / Channel 0 / DH1 / 2402 MHz


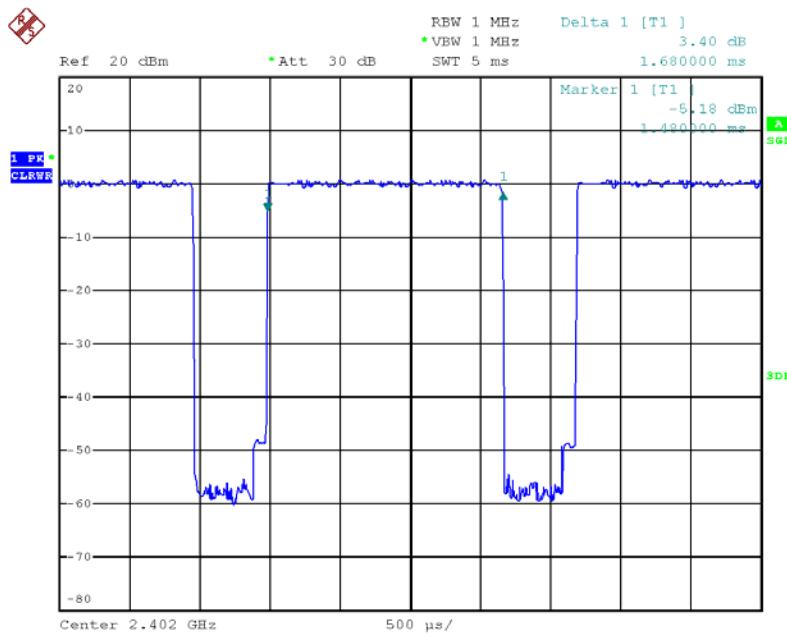
Date: 24.APR.2013 13:02:39

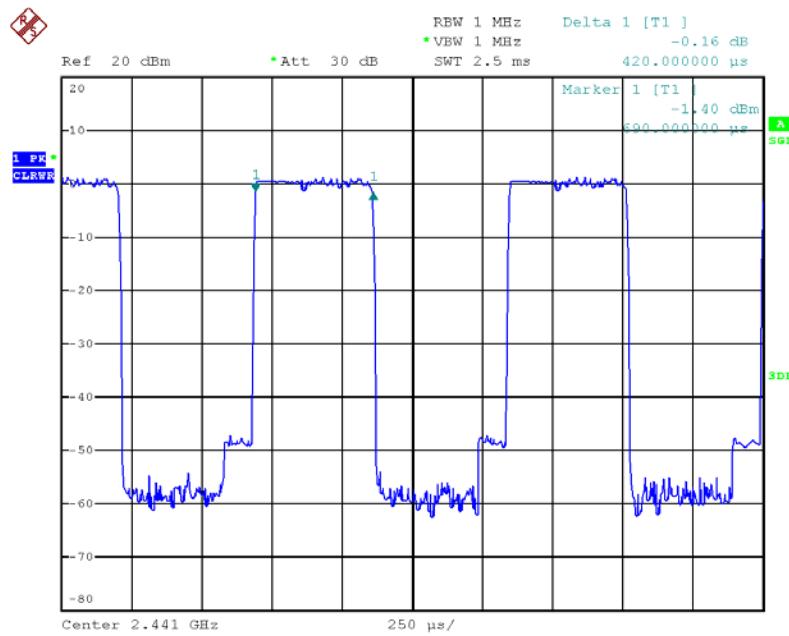Dwell Time Plot on GFSK / Channel 39 / DH1 / 2441 MHz


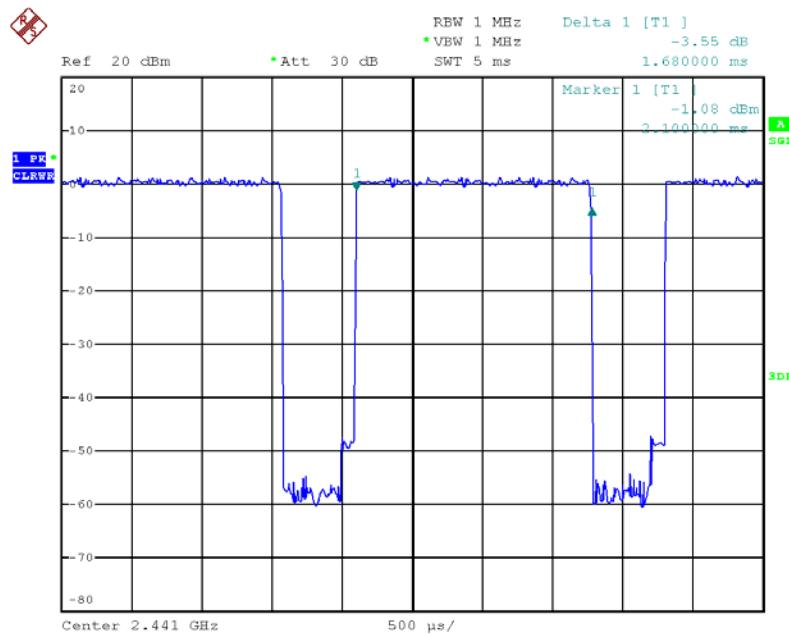
Date: 24.APR.2013 13:03:32

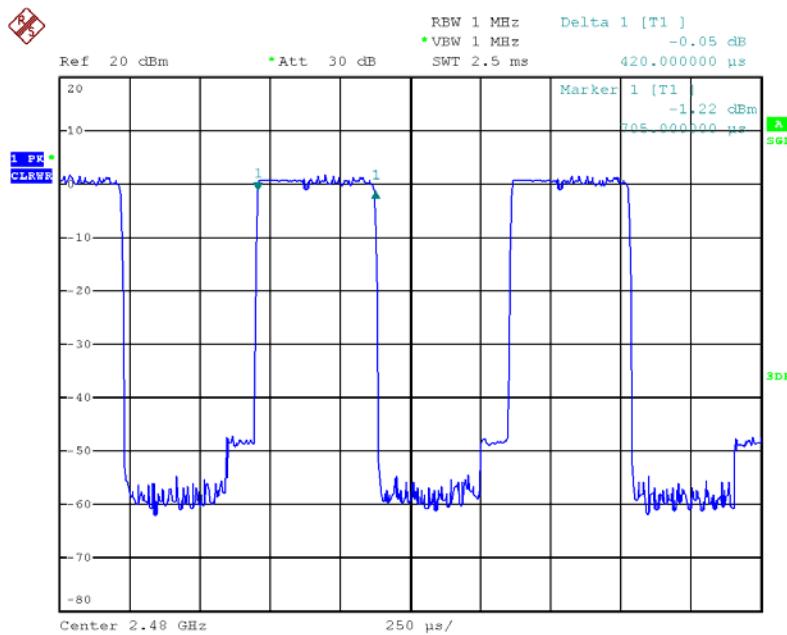Dwell Time Plot on GFSK / Channel 78 / DH1 / 2480 MHz


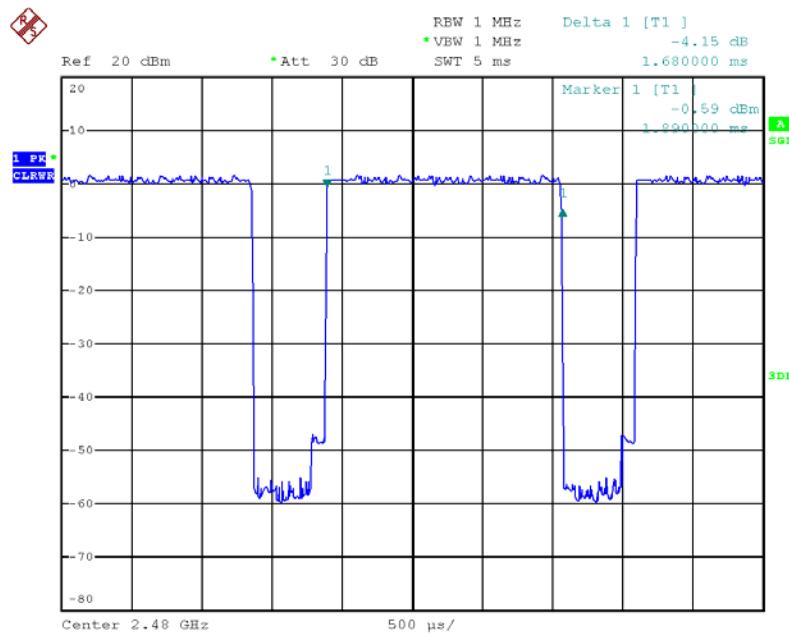
Date: 24.APR.2013 13:04:22

Dwell Time Plot on GFSK / Channel 0 / DH3 / 2402 MHz


Date: 24.APR.2013 13:01:24


Dwell Time Plot on GFSK / Channel 39 / DH3 / 2441 MHz


Date: 24.APR.2013 13:00:28

Dwell Time Plot on GFSK / Channel 78 / DH3 / 2480 MHz


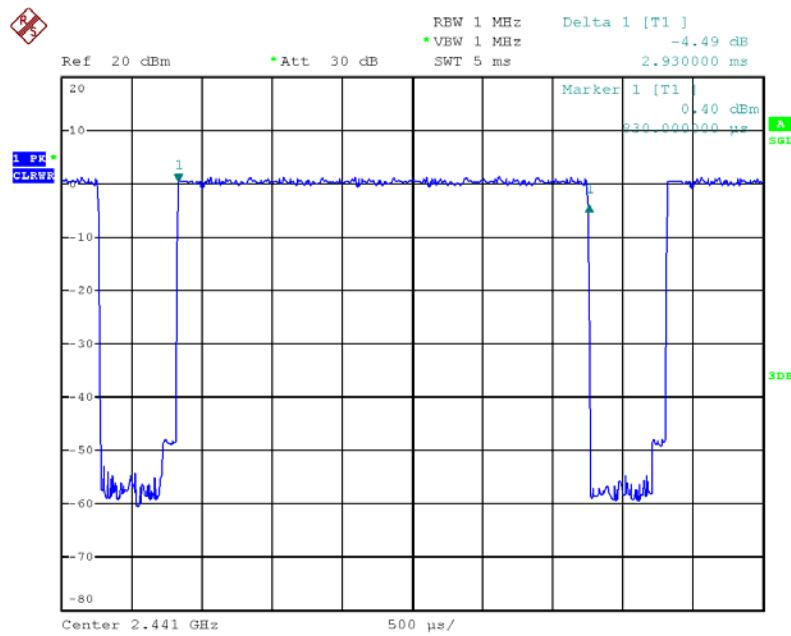
Date: 24.APR.2013 12:59:30

Dwell Time Plot on GFSK / Channel 0 / DH5 / 2402 MHz

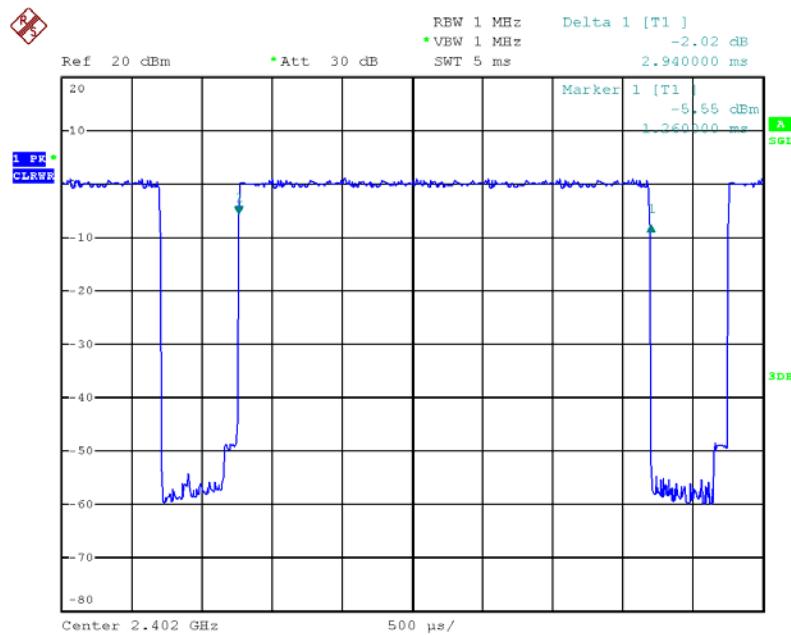


Date: 24.APR.2013 12:54:13

Dwell Time Plot on GFSK / Channel 39 / DH5 / 2441 MHz



Date: 24.APR.2013 12:57:19

Dwell Time Plot on GFSK / Channel 78 / DH5 / 2480 MHz

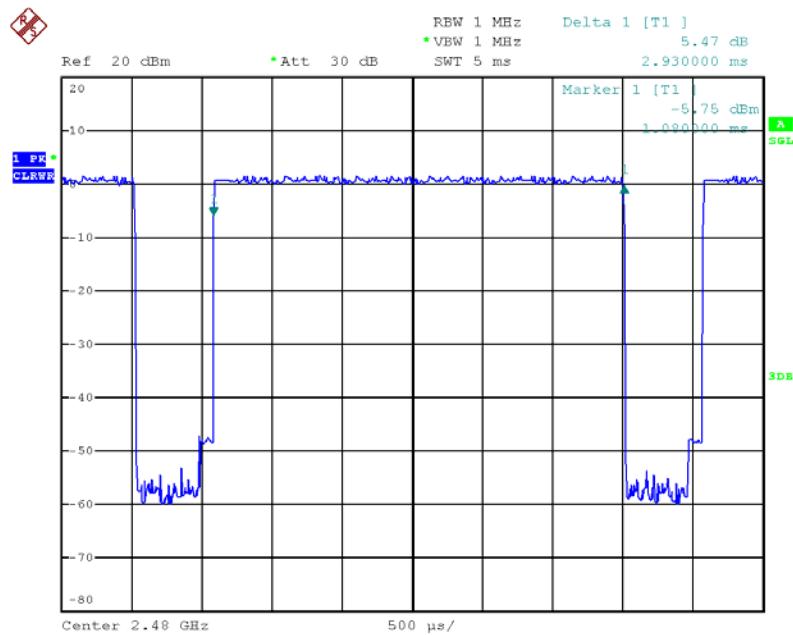

Date: 24.APR.2013 12:58:19

4.6. Radiated Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.6.4. Test Setup Layout

For radiated emissions below 1GHz

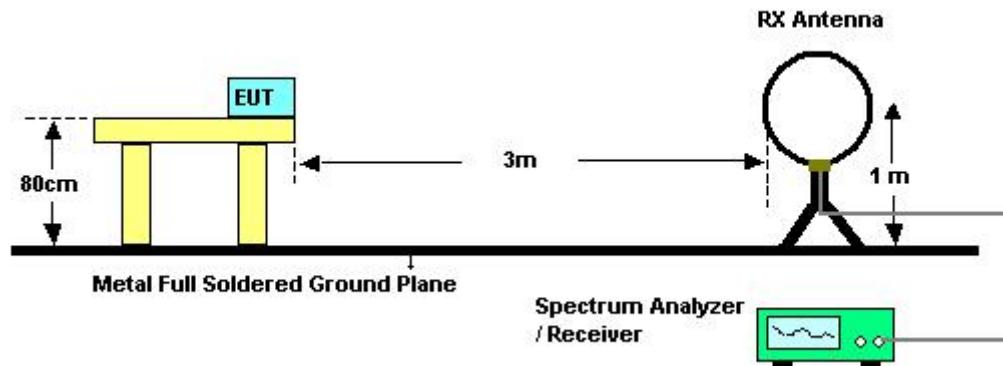

For radiated emissions above 1GHz

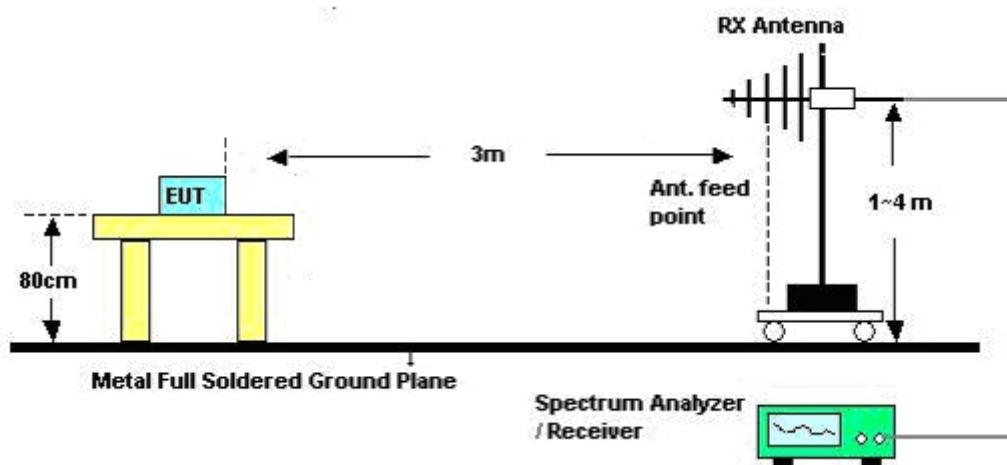

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	Satoshi Yang	Test Date	Apr. 26, 2013
Configurations	Normal Link		

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


4.6.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.5°C	Humidity	60%
Test Engineer	Satoshi Yang	Configurations	Mode 5

Horizontal

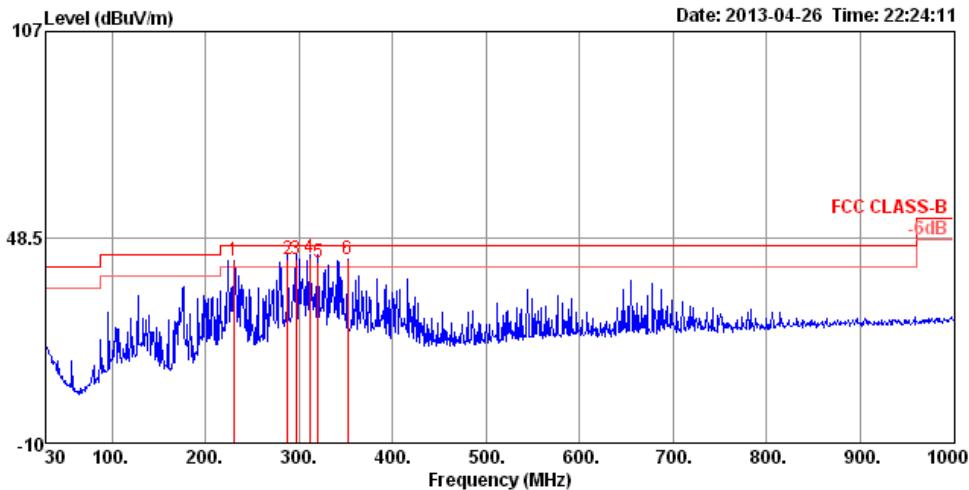

Freq	Level	Limit		Over Limit	Read Level	Cable Antenna			A/Pos	T/Pos	Pol/Phase	Remark
		Line	dBuV/m			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1 !	229.82	41.70	46.00	-4.30	61.59	1.83	9.73	31.45	100	24	HORIZONTAL	Peak
2 !	288.02	42.16	46.00	-3.84	58.97	2.07	12.65	31.53	100	5	HORIZONTAL	QP
3 !	296.75	42.35	46.00	-3.65	58.81	2.11	12.89	31.46	100	5	HORIZONTAL	QP
4 pp	311.30	42.70	46.00	-3.30	58.50	2.16	13.42	31.38	100	356	HORIZONTAL	QP
5 !	320.03	41.57	46.00	-4.43	57.21	2.19	13.58	31.41	125	290	HORIZONTAL	QP
6 pk	352.04	42.04	46.00	-3.96	56.66	2.32	14.40	31.34	100	3	HORIZONTAL	Peak

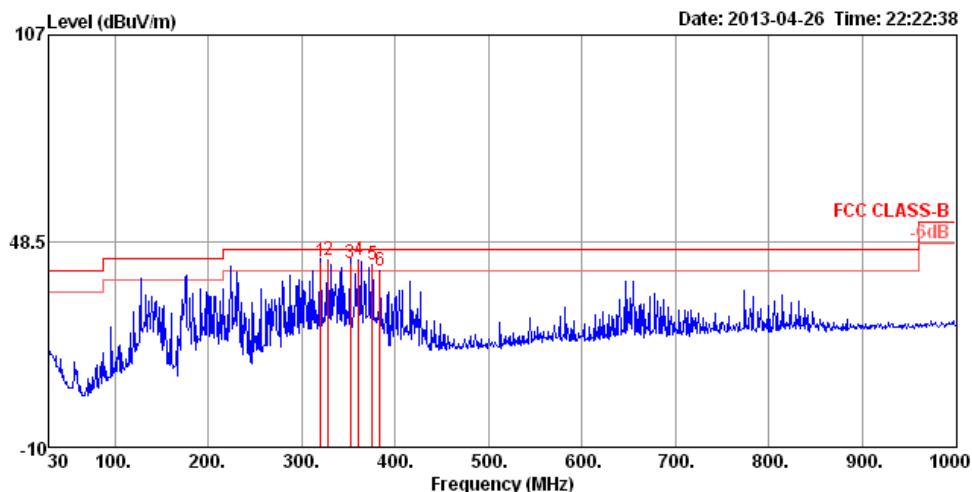Vertical


Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
					Line	Limit	dB						
MHz	dBuV/m	dBuV/m											
1 qp	320.03	42.47	46.00	-3.53	58.11	2.19	13.58	31.41	200	316	VERTICAL	QP	
2 !	328.76	42.89	46.00	-3.11	58.33	2.24	13.74	31.42	200	316	VERTICAL	Peak	
3 !	352.04	42.43	46.00	-3.57	57.05	2.32	14.40	31.34	150	330	VERTICAL	QP	
4 pp	360.77	42.93	46.00	-3.07	57.24	2.36	14.67	31.34	150	330	VERTICAL	Peak	
5 !	375.32	41.70	46.00	-4.30	55.76	2.44	14.93	31.43	150	15	VERTICAL	Peak	
6 !	384.05	40.10	46.00	-5.90	53.93	2.46	15.17	31.46	150	15	VERTICAL	Peak	

Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6.9. Results for Radiated Emissions (1GHz~10th Harmonic)

Temperature	24.5°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Bluetooth 1.0 / GFSK / Channel 0
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	1602.00	47.25	54.00	-6.75	53.03	3.21	25.91	34.90	Average		104	12	HORIZONTAL
2	1602.03	49.30	74.00	-24.70	55.08	3.21	25.91	34.90	Peak		104	12	HORIZONTAL
3	4803.93	57.58	74.00	-16.42	53.66	5.76	33.36	35.20	Peak		100	172	HORIZONTAL
4	4804.01	51.20	54.00	-2.80	47.28	5.76	33.36	35.20	Average		100	172	HORIZONTAL

Vertical

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dB			dBuV	dB	dB/m					
MHz	dBuV/m	dBuV/m	dB								cm	deg	
1	1601.99	46.92	54.00	-7.08	52.70	3.21	25.91	34.90	Average		108	305	VERTICAL
2	1602.03	50.12	74.00	-23.88	55.90	3.21	25.91	34.90	Peak		108	305	VERTICAL
3	4803.99	53.88	54.00	-0.12	49.96	5.76	33.36	35.20	Average		100	42	VERTICAL
4	4803.99	61.33	74.00	-12.67	57.41	5.76	33.36	35.20	Peak		100	42	VERTICAL

Temperature	24.5°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Bluetooth 1.0 / GFSK / Channel 39
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4882.00	48.85	54.00	-5.15	44.78	5.79	33.48	35.20	Average	103	149	HORIZONTAL
2	4882.07	59.41	74.00	-14.59	55.34	5.79	33.48	35.20	Peak	103	149	HORIZONTAL

Vertical

Freq	Level	Limit		Over	Read	Cable			Preamp	A/Pos	T/Pos	Pol/Phase
		Line	Limit			Loss	Factor	Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg			
1	4882.00	61.40	74.00	-12.60	57.33	5.79	33.48	35.20	Peak	100	266	VERTICAL
2	4882.03	50.57	54.00	-3.43	46.50	5.79	33.48	35.20	Average	100	266	VERTICAL

Temperature	24.5°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Bluetooth 1.0 / GFSK / Channel 78
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4960.00	59.02	74.00	-14.98	54.75	5.83	33.64	35.20	Peak	118	140 HORIZONTAL
2	4960.02	43.89	54.00	-10.11	39.62	5.83	33.64	35.20	Average	118	140 HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4959.96	47.71	54.00	-6.29	43.44	5.83	33.64	35.20	Average	103	87 VERTICAL
2	4960.08	62.42	74.00	-11.58	58.15	5.83	33.64	35.20	Peak	103	87 VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.5°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Bluetooth 2.1+EDR / 8DPSK / Channel 0
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		dB	dBuV/m			dB	dBuV	dB			
1	1601.98	50.08	74.00	-23.92	55.86	3.21	25.91	34.90	Peak	105	238 HORIZONTAL
2	1601.99	47.27	54.00	-6.73	53.05	3.21	25.91	34.90	Average	105	238 HORIZONTAL
3	4803.97	52.29	74.00	-21.71	48.37	5.76	33.36	35.20	Peak	100	173 HORIZONTAL
4	4804.07	38.85	54.00	-15.15	34.93	5.76	33.36	35.20	Average	100	173 HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		dB	dBuV/m			dB	dBuV	dB			
1	1601.99	47.70	54.00	-6.30	53.48	3.21	25.91	34.90	Average	106	13 VERTICAL
2	1602.01	49.86	74.00	-24.14	55.64	3.21	25.91	34.90	Peak	106	13 VERTICAL
3	4803.99	42.80	54.00	-11.20	38.88	5.76	33.36	35.20	Average	100	42 VERTICAL
4	4804.00	55.64	74.00	-18.36	51.72	5.76	33.36	35.20	Peak	100	42 VERTICAL

Temperature	24.5°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Bluetooth 2.1+EDR / 8DPSK / Channel 39
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4881.87	53.75	74.00	-20.25	49.68	5.79	33.48	35.20	Peak	102	148 HORIZONTAL
2	4881.94	36.50	54.00	-17.50	32.43	5.79	33.48	35.20	Average	102	148 HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4881.89	55.49	74.00	-18.51	51.42	5.79	33.48	35.20	Peak	100	266 VERTICAL
2	4882.12	37.44	54.00	-16.56	33.37	5.79	33.48	35.20	Average	100	266 VERTICAL

Temperature	24.5°C	Humidity	56%
Test Engineer	Robert Chang	Configurations	Bluetooth 2.1+EDR / 8DPSK / Channel 78
Test Date	Apr. 26, 2013		

Horizontal

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4960.02	51.95	74.00	-22.05	47.68	5.83	33.64	35.20	Peak	100	143 HORIZONTAL
2	4960.08	34.40	54.00	-19.60	30.13	5.83	33.64	35.20	Average	100	143 HORIZONTAL

Vertical

Freq	Level	Limit		Over Line	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		
1	4960.07	56.09	74.00	-17.91	51.82	5.83	33.64	35.20	Peak	116	88 VERTICAL
2	4960.18	36.27	54.00	-17.73	32.00	5.83	33.64	35.20	Average	116	88 VERTICAL

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.7. Emissions Measurement

4.7.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 kHz /100 kHz for Peak

4.7.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around band edges.

For Conducted Out of Band Emission Measurement:

1. The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.

4.7.4. Test Setup Layout

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.6.4.

For Conducted Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.5°C	Humidity	60%
Test Engineer	Robert Chang	Configurations	Bluetooth 1.0 / GFSK / Channel 0, 39, 78
Test Date	Apr. 26, 2013		

Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2390.00	44.27	54.00	-9.73	12.25	3.97	28.05	0.00	Average	100	344	HORIZONTAL	
2	2390.00	55.29	74.00	-18.71	23.27	3.97	28.05	0.00	Peak	100	344	HORIZONTAL	
3	2401.80	99.02	74.00			3.97	28.09	0.00	Peak	100	344	HORIZONTAL	
4	2402.00	98.19	54.00			3.97	28.09	0.00	Average	100	344	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2389.20	55.12	74.00	-18.88	23.10	3.97	28.05	0.00	Peak	100	343	HORIZONTAL	
2	2390.00	44.25	54.00	-9.75	12.23	3.97	28.05	0.00	Average	100	343	HORIZONTAL	
3	2441.00	100.19	54.00			4.02	28.18	0.00	Average	100	343	HORIZONTAL	
4	2441.00	101.10	74.00			4.02	28.18	0.00	Peak	100	343	HORIZONTAL	
5	2483.50	44.72	54.00	-9.28	12.41	4.05	28.26	0.00	Average	100	343	HORIZONTAL	
6	2483.50	54.51	74.00	-19.49	22.20	4.05	28.26	0.00	Peak	100	343	HORIZONTAL	

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

Freq	Level	Limit		Over Limit	Read Level	Cable			Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m				
1	2480.00	101.76	54.00			4.05	28.26	0.00	Average	100	340	HORIZONTAL	
2	2480.00	102.62	74.00			4.05	28.26	0.00	Peak	100	340	HORIZONTAL	
3	2483.50	51.10	54.00	-2.90	18.79	4.05	28.26	0.00	Average	100	340	HORIZONTAL	
4	2483.50	59.56	74.00	-14.44	27.25	4.05	28.26	0.00	Peak	100	340	HORIZONTAL	

Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	21°C	Humidity	61%
Test Engineer	Robert Chang	Configurations	Bluetooth 2.1+EDR / 8DPSK / Channel 0, 39, 78
Test Date	Apr. 26, 2013		

Channel 0

Freq	Level	Limit		Over Line	Read Limit	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2390.00	44.19	54.00	-9.81	12.17	3.97	28.05	0.00	Average	100	344	HORIZONTAL		
2	2390.00	53.93	74.00	-20.07	21.91	3.97	28.05	0.00	Peak	100	344	HORIZONTAL		
3	2402.00	91.45	54.00			3.97	28.09	0.00	Average	100	344	HORIZONTAL		
4	2402.20	95.79	74.00			3.97	28.09	0.00	Peak	100	344	HORIZONTAL		

Item 3, 4 are the fundamental frequency at 2402 MHz.

Channel 39

Freq	Level	Limit		Over Line	Read Limit	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2390.00	44.20	54.00	-9.80	12.18	3.97	28.05	0.00	Average	100	280	VERTICAL		
2	2390.00	56.98	74.00	-17.02	24.96	3.97	28.05	0.00	Peak	100	280	VERTICAL		
3	2441.00	88.97	54.00			4.02	28.18	0.00	Average	100	280	VERTICAL		
4	2441.00	93.31	74.00			4.02	28.18	0.00	Peak	100	280	VERTICAL		
5	2483.50	44.60	54.00	-9.40	12.29	4.05	28.26	0.00	Average	100	280	VERTICAL		
6	2483.90	54.78	74.00	-19.22	22.47	4.05	28.26	0.00	Peak	100	280	VERTICAL		

Item 3, 4 are the fundamental frequency at 2441 MHz.

Channel 78

Freq	Level	Limit		Over Line	Read Limit	Cable			Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m						
1	2480.00	94.67	54.00			4.05	28.26	0.00	Average	100	340	HORIZONTAL		
2	2480.20	98.71	74.00			4.05	28.26	0.00	Peak	100	340	HORIZONTAL		
3	2483.50	50.20	54.00	-3.80	17.89	4.05	28.26	0.00	Average	100	340	HORIZONTAL		
4	2483.50	59.90	74.00	-14.10	27.59	4.05	28.26	0.00	Peak	100	340	HORIZONTAL		


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 0 / Reference Level

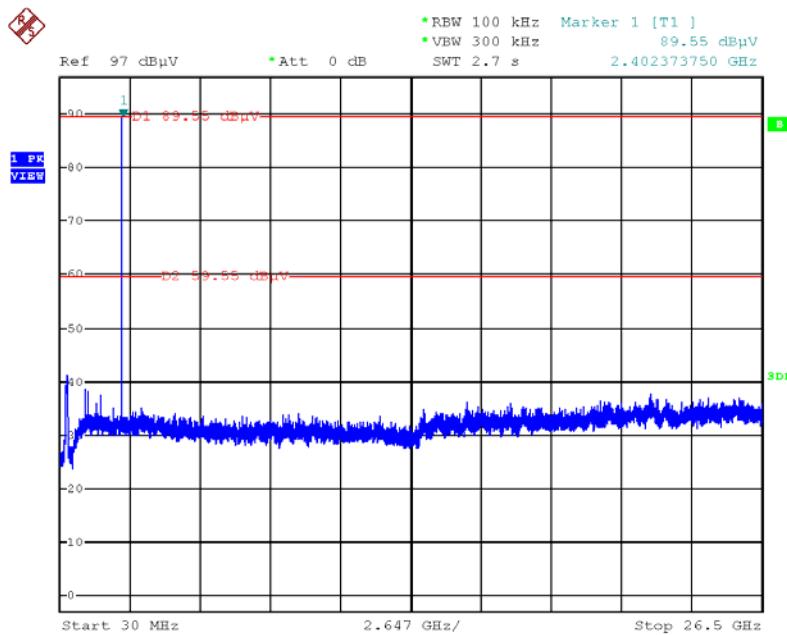


Date: 26.APR.2013 19:49:32

Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 0 / 30MHz~2400MHz (down 30dBc)

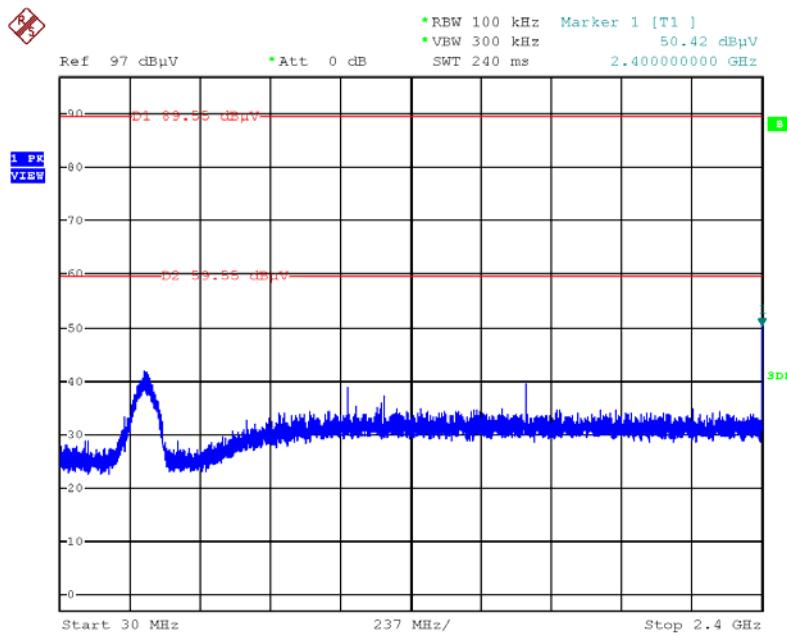


Date: 26.APR.2013 19:50:11

Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 0 / 2500MHz~26500MHz (down 30dBc)

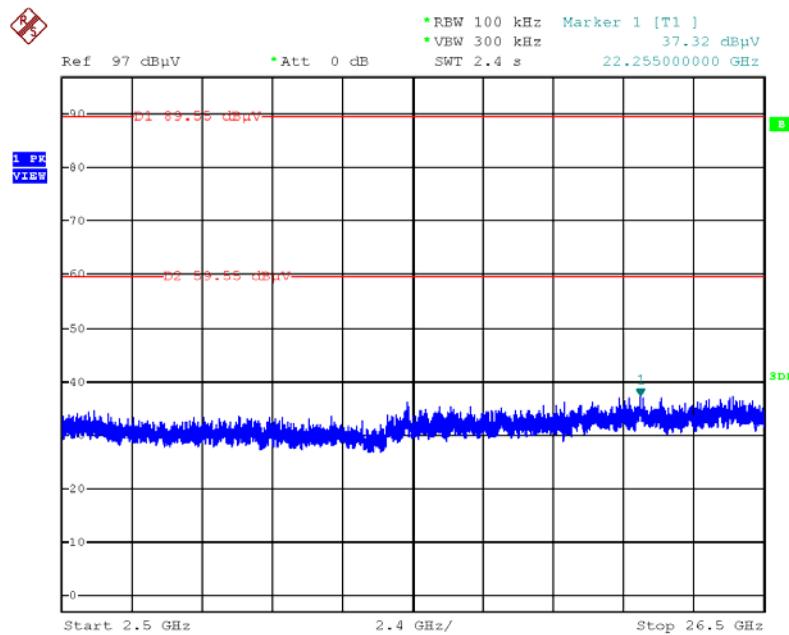


Date: 26.APR.2013 19:50:33


Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 78 / Reference Level

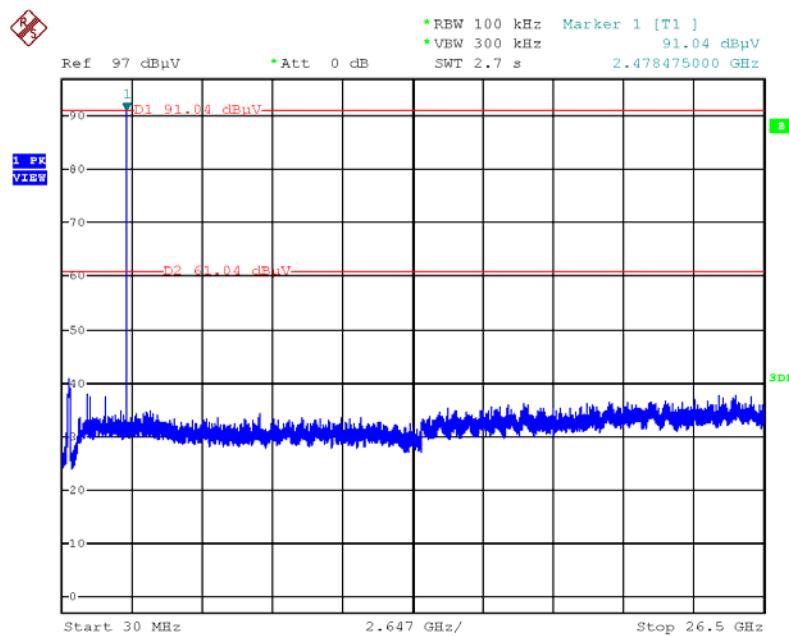

Date: 26.APR.2013 19:52:55

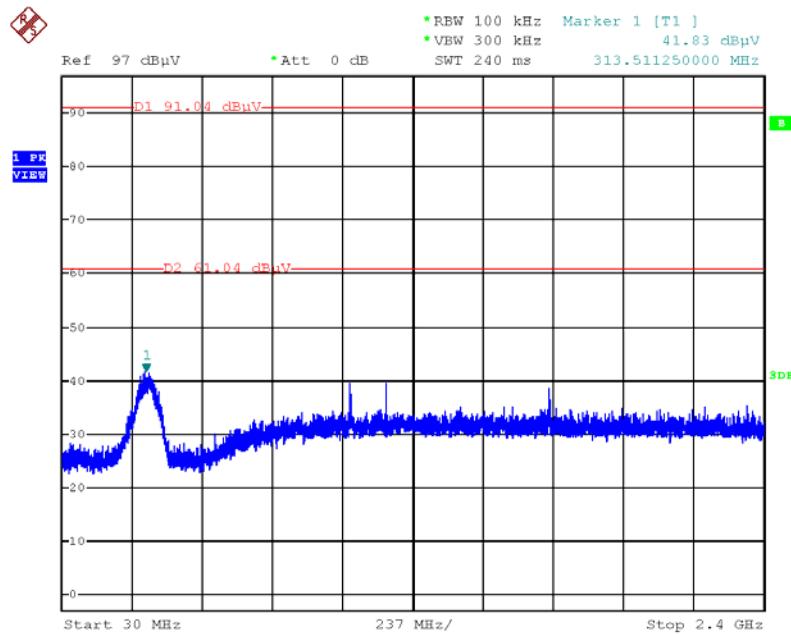
Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 78 / 30MHz~2400MHz (down 30dBc)


Date: 26.APR.2013 19:53:36

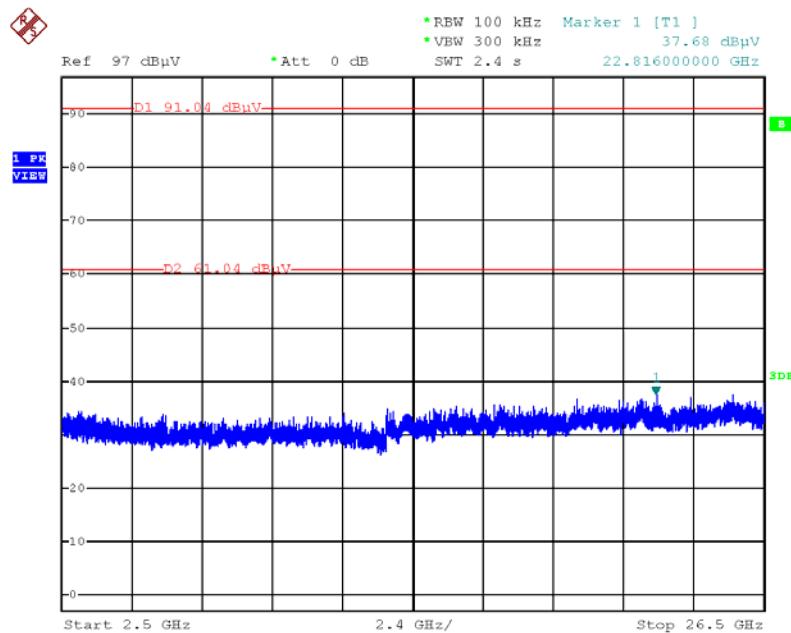Plot on Configuration For Bluetooth 1.0 / GFSK / Channel 78 / 2500MHz~26500MHz (down 30dBc)


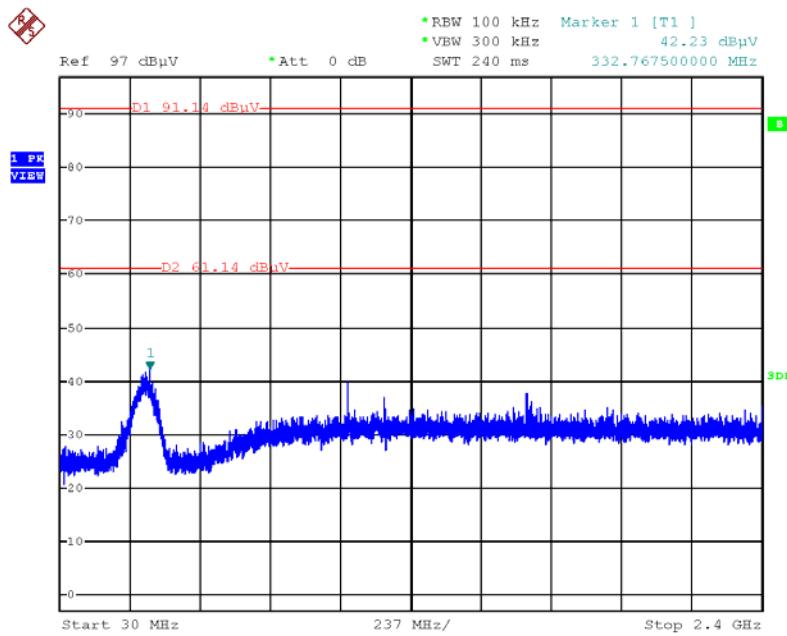
Date: 26.APR.2013 19:54:05

Plot on Configuration For Bluetooth 1.0 / GFSK / Hopping / Reference Level

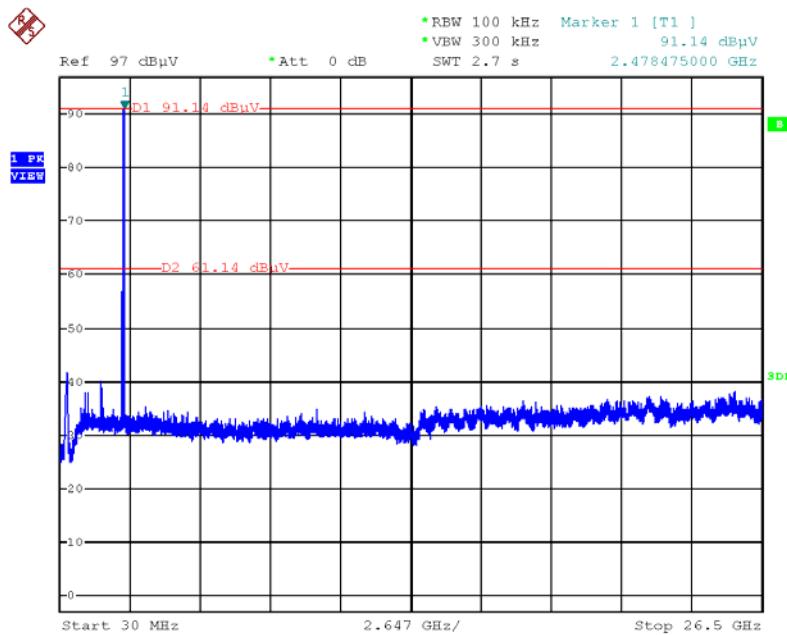


Date: 26.APR.2013 20:04:32

Plot on Configuration For Bluetooth 1.0 / GFSK / Hopping / 30MHz~2400MHz (down 30dBc)




Date: 26.APR.2013 20:05:42

Plot on Configuration For Bluetooth 1.0 / GFSK / Hopping / 2500MHz~26500MHz (down 30dBc)

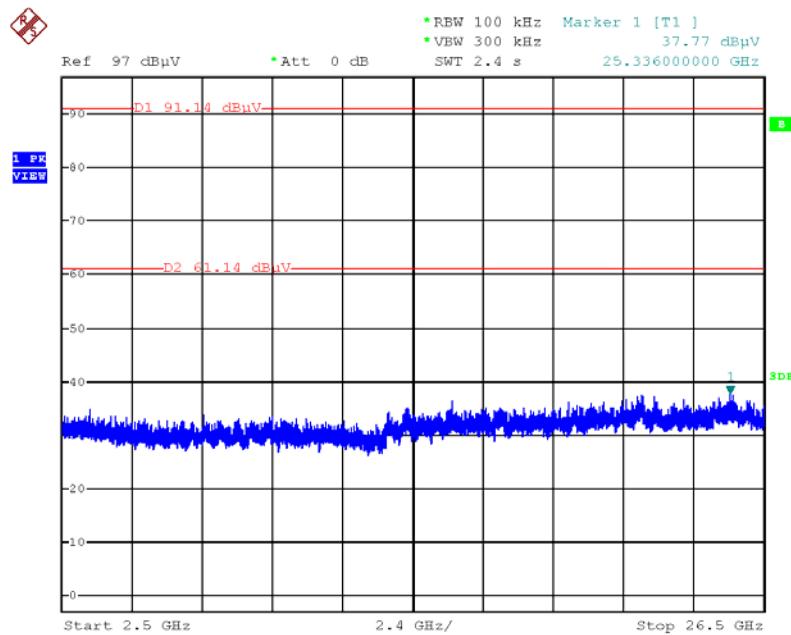


Date: 26.APR.2013 20:06:00

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 0 / Reference Level

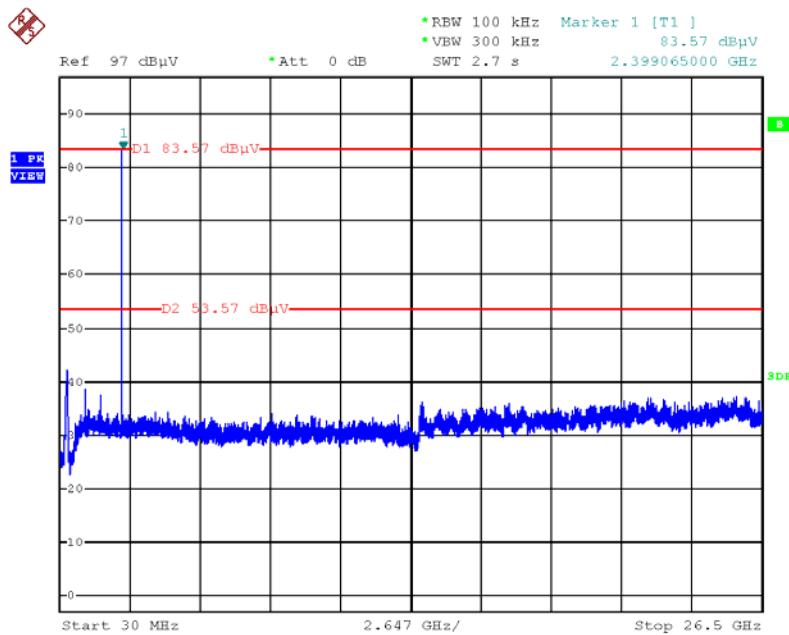


Date: 26.APR.2013 19:58:36

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 0 / 30MHz~2400MHz (down 30dBc)

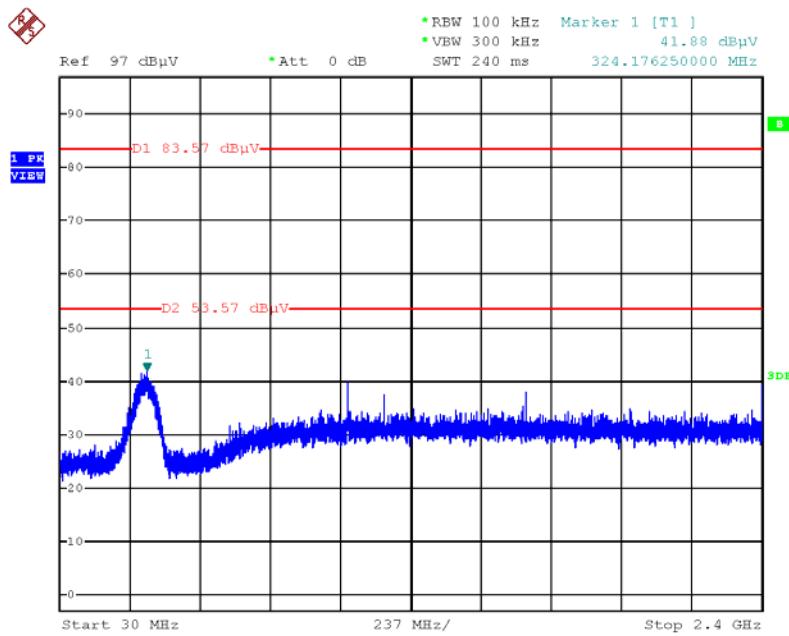


Date: 26.APR.2013 19:59:08

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 0 / 2500MHz~26500MHz (down 30dBc)

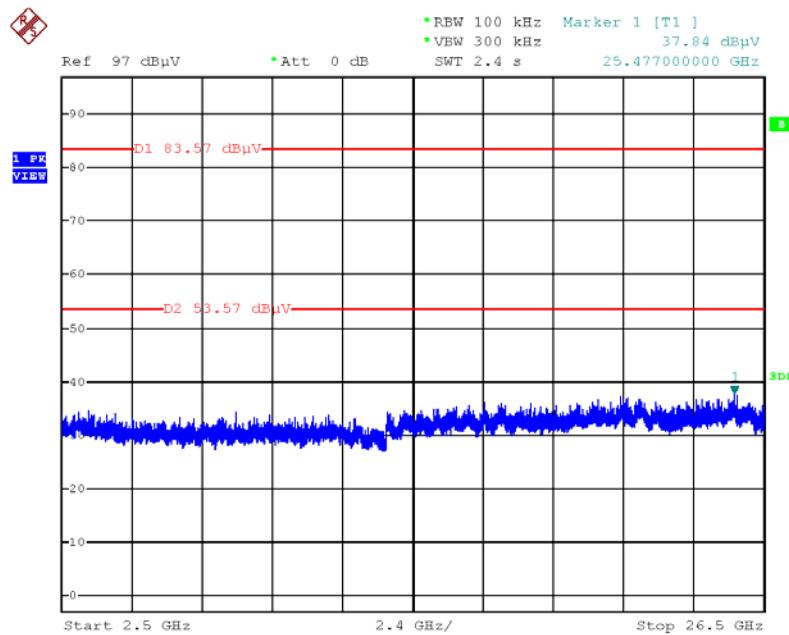


Date: 26.APR.2013 19:59:35


Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 78 / Reference Level

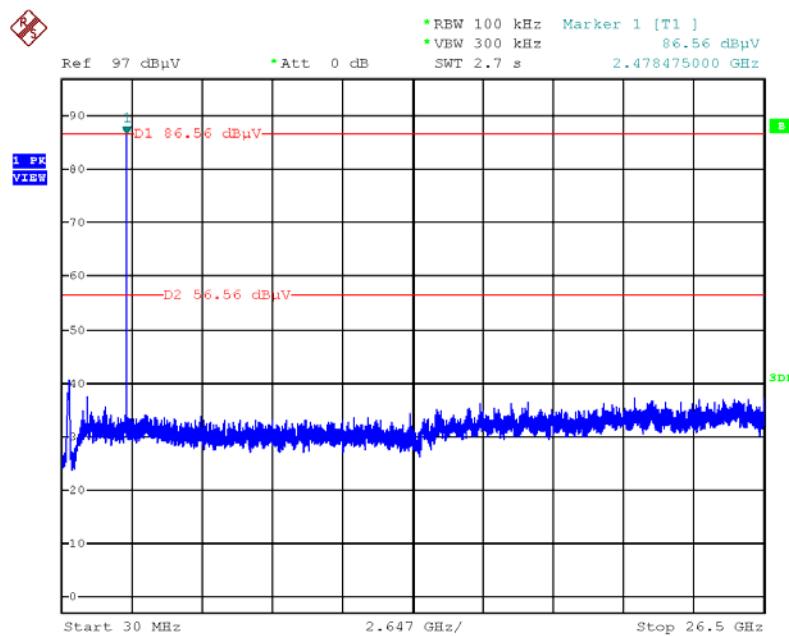

Date: 26.APR.2013 19:56:01

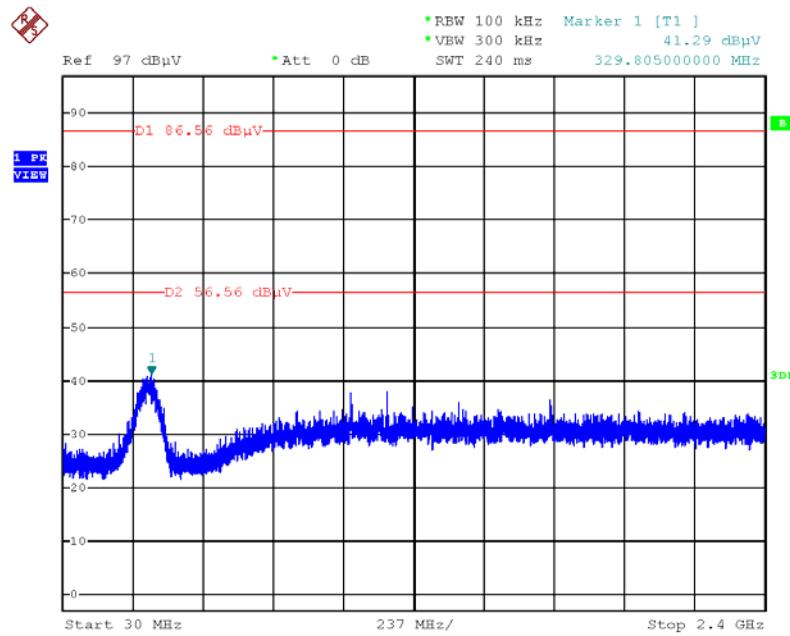
Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 78 / 30MHz~2400MHz (down 30dBc)


Date: 26.APR.2013 19:56:28

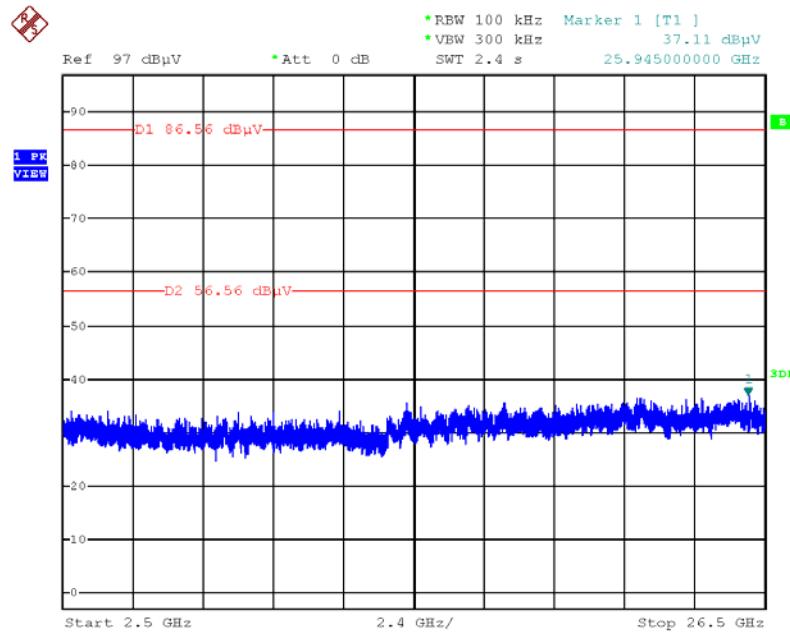Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Channel 78 / 2500MHz~26500MHz (down 30dBc)


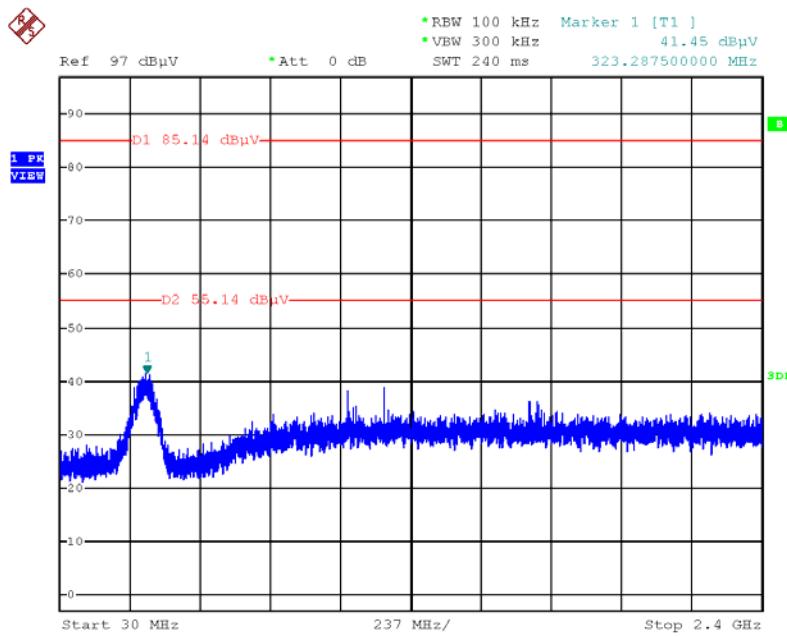
Date: 26.APR.2013 19:57:04

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Hopping / Reference Level

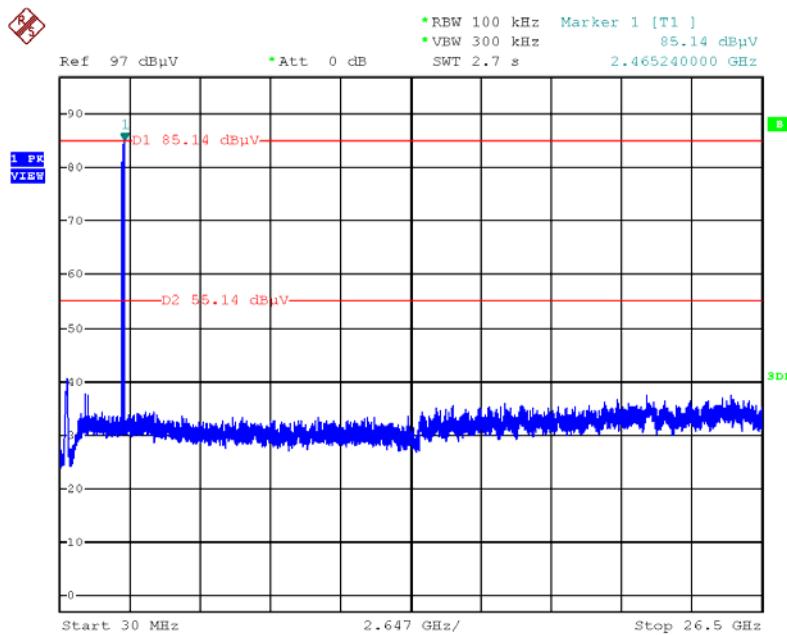


Date: 26.APR.2013 20:01:44

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Hopping / 30MHz~2400MHz (down 30dBc)



Date: 26.APR.2013 20:02:09

Plot on Configuration For Bluetooth 2.1+EDR / 8DPSK / Hopping / 2500MHz~26500MHz (down 30dBc)

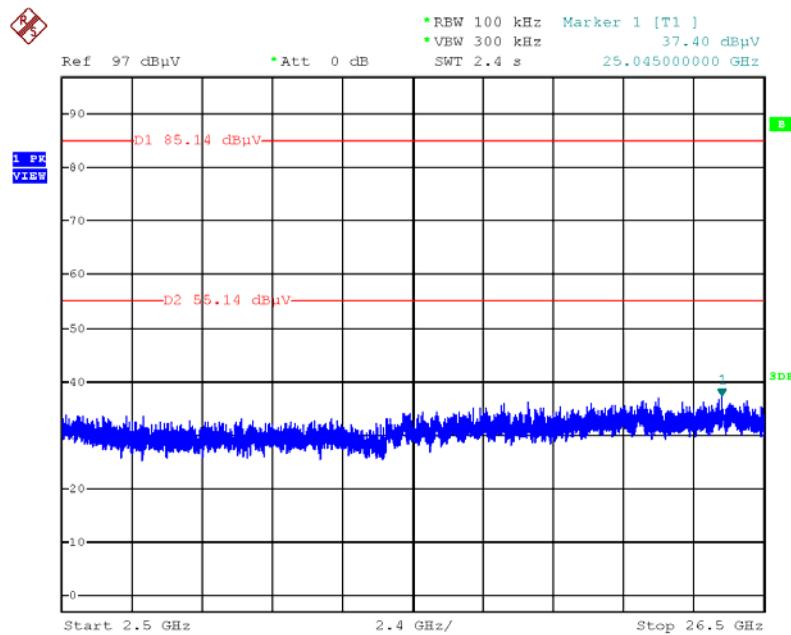

Date: 26.APR.2013 20:02:52

4.8. Antenna Requirements

4.8.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

4.8.2. Antenna Connector Construction

Please refer to section 3.3 in this test report, antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Oct. 23, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 26, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9kHz ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
Impulsbegrenzer Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz~30MHz	Feb. 21, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	-	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Apr. 16, 2013	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Apr. 15, 2013	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

" * " Calibration Interval of instruments listed above is two year.

N.C.R. means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085