

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM130400157901  
Page: 1 of 13

## FCC REPORT

<b>Application No. :</b>	SZEM1304001579RF
<b>Applicant:</b>	Artin International LTD
<b>Product Name:</b>	1:14 Dust Devil
<b>Model No.(EUT):</b>	744501
<b>FCC ID:</b>	ST6744501
<b>Standards:</b>	47 CFR Part 15, Subpart C (2012)
<b>Date of Receipt:</b>	2013-04-03
<b>Date of Test:</b>	2013-04-10 to 2013-04-15
<b>Date of Issue:</b>	2013-04-25
<b>Test Result:</b>	<b>PASS *</b>

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang  
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

**"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."**

## 2 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Radiated Emission</b>	47 CFR Part 15, Subpart C Section 15.227	ANSI C63.10 ( 2009 )	PASS
<b>Occupied Bandwidth</b>	47 CFR Part 15, Subpart C Section 15.215	ANSI C63.10 ( 2009 )	PASS

### **3 Contents**

	<b>Page</b>
<b>1 COVER PAGE.....</b>	<b>1</b>
<b>2 TEST SUMMARY .....</b>	<b>2</b>
<b>3 CONTENTS.....</b>	<b>3</b>
<b>4 GENERAL INFORMATION .....</b>	<b>4</b>
4.1 CLIENT INFORMATION .....	4
4.2 GENERAL DESCRIPTION OF EUT .....	4
4.3 TEST ENVIRONMENT AND MODE.....	4
4.4 DESCRIPTION OF SUPPORT UNITS .....	4
4.5 TEST LOCATION .....	4
4.6 TEST FACILITY.....	5
4.7 DEVIATION FROM STANDARDS .....	5
4.8 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
4.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....	5
4.10 EQUIPMENT LIST .....	6
<b>5 TEST RESULT &amp; MEASUREMENT DATA.....</b>	<b>7</b>
5.1 ANTENNA REQUIRMENT .....	7
5.2 RADIATED EMISSIONS.....	7
5.3 OCCUPIED BANDWIDTH .....	12-13

## 4 General Information

### 4.1 Client Information

Applicant:	Artin International LTD
Address of Applicant:	Room 803, 8/F., Peninsula Centre, No. 67 Mody Road, Tsim Sha Tsui East, Kln., H.K.

### 4.2 General Description of EUT

Product Name:	1:14 Dust Devil
Model No.:	744501
Sample Type:	Portable production
Operation Frequency:	27.145MHz
Modulation Type:	ASK
Antenna Type:	Integral
Antenna Gain:	0dBi
Power Supply:	9.0V DC (9.0V x 1 "6F22" Size Battery) for Tx
Test Voltage:	9.0V DC (9.0V x 1 "6F22" Size Battery) for Tx

### 4.3 Test Environment and Mode

Operating Environment:	
Temperature:	26.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1015 mbar
Test mode:	
Transmitting mode:	Keep the EUT in transmitting continuously mode.

### 4.4 Description of Support Units

The EUT has been tested independent unit.

### 4.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.

518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



## 4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **VCCI**

The 3m Semi-anechoic chamber, Full-anechoic Chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197, G-416, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.7 Deviation from Standards

None.

## 4.8 Abnormalities from Standard Conditions

None.

## 4.9 Other Information Requested by the Customer

None.

## 4.10 Equipment List

RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2013-06-10
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2013-05-17
3	EMI Test software	AUDIX	E3	SEL0050	N/A
4	Coaxial cable	SGS	N/A	SEL0027	2013-05-29
5	Coaxial cable	SGS	N/A	SEL0189	2013-05-29
6	Coaxial cable	SGS	N/A	SEL0121	2013-05-29
7	Coaxial cable	SGS	N/A	SEL0178	2013-05-29
8	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2013-10-24
9	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2013-10-24
10	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2013-05-17
11	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2013-10-24
12	Barometer	ChangChun	DYM3	SEL0088	2013-05-24
13	DC Power Supply	Zhao Xin	RXN-305D	SEL0117	2013-10-24
14	Humidity/ Temperature Indicator	Shanghai Qixiang	ZJ1-2B	SEL0103	2013-10-24
15	Signal Generator	Rohde & Schwarz	SMY01	SEL0155	2013-10-24
16	Signal Generator (10M-27GHz)	Rohde & Schwarz	SMR27	SEL0067	2013-05-17
17	Loop Antenna	Beijing Daze	ZN30401	SEL0203	2013-06-04

Note: The calibration interval is one year, all the instruments are valid.

## 5 Test Result & Measurement Data

### 5.1 Antenna Requirement

<b>Standard Requirement:</b>	47 CFR Part 15C Section 15.203
15.203 Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
<b>EUT Antenna:</b>	

### 5.2 Radiated Emissions

<b>Test Requirement:</b>	47 CFR Part 15C Section 15.227																																																
<b>Test Method:</b>	ANSI C63.10: 2009																																																
<b>Test Site:</b>	3m (Semi-Anechoic Chamber)																																																
<b>ERP Limit:</b>	Carrier Power will not exceed 80dBuV/m at 3m (Average).																																																
<b>Receiver Setup:</b>	<table border="1"><thead><tr><th>Frequency</th><th>Detector</th><th>RBW</th><th>VBW</th><th>Remark</th></tr></thead><tbody><tr><td>0.009MHz-0.090MHz</td><td>Peak</td><td>10kHz</td><td>30kHz</td><td>Peak</td></tr><tr><td>0.090MHz-0.110MHz</td><td>Average</td><td>10kHz</td><td>30kHz</td><td>Average</td></tr><tr><td>0.110MHz-0.490MHz</td><td>Quasi-peak</td><td>10kHz</td><td>30kHz</td><td>Quasi-peak</td></tr><tr><td>0.490MHz -30MHz</td><td>Peak</td><td>10kHz</td><td>30kHz</td><td>Peak</td></tr><tr><td>30MHz-1GHz</td><td>Average</td><td>10kHz</td><td>30kHz</td><td>Average</td></tr><tr><td>Above 1GHz</td><td>Quasi-peak</td><td>100 kHz</td><td>300kHz</td><td>Quasi-peak</td></tr><tr><td></td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak</td></tr><tr><td></td><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average</td></tr></tbody></table>				Frequency	Detector	RBW	VBW	Remark	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak	0.090MHz-0.110MHz	Average	10kHz	30kHz	Average	0.110MHz-0.490MHz	Quasi-peak	10kHz	30kHz	Quasi-peak	0.490MHz -30MHz	Peak	10kHz	30kHz	Peak	30MHz-1GHz	Average	10kHz	30kHz	Average	Above 1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak		Peak	1MHz	3MHz	Peak		Peak	1MHz	10Hz	Average
Frequency	Detector	RBW	VBW	Remark																																													
0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak																																													
0.090MHz-0.110MHz	Average	10kHz	30kHz	Average																																													
0.110MHz-0.490MHz	Quasi-peak	10kHz	30kHz	Quasi-peak																																													
0.490MHz -30MHz	Peak	10kHz	30kHz	Peak																																													
30MHz-1GHz	Average	10kHz	30kHz	Average																																													
Above 1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak																																													
	Peak	1MHz	3MHz	Peak																																													
	Peak	1MHz	10Hz	Average																																													

Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measureme distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	-	300
0.490MHz-.705MHz	24000/F(kHz)	-	-	-	30
1.705MHz-30MHz	30	-	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3	
88MHz-216MHz	150	43.5	Quasi-peak	3	
216MHz-960MHz	200	46.0	Quasi-peak	3	
960MHz-1GHz	500	54.0	Quasi-peak	3	
Above 1GHz	500	54.0	Average	3	
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					
<b>Test Procedure:</b>	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. g. The radiation measurements are performed in X, Y, Z axis positioning. And found the Z (straight vertical direction) axis positioning which it is worse case, only the test worst case mode is recorded in the report.				

Test Setup:	
Figure 1. Below 30MHz	Figure 2. 30MHz to 1GHz

### 27.145MHz Mode

**Test Procedure:** For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10: 2009. The center of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

#### Test Result:

##### Intentional emission


Test Frequency (MHz)	Peak (dB $\mu$ V/m)		Limits (dB $\mu$ V/m)	Margin (dB)	
	Vertical	Horizontal		Vertical	Horizontal
27.145	76.44	63.27	100.00	23.56	36.73

Remark:

As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.

**Out of Band Emissions****Vertical**

Data: 92

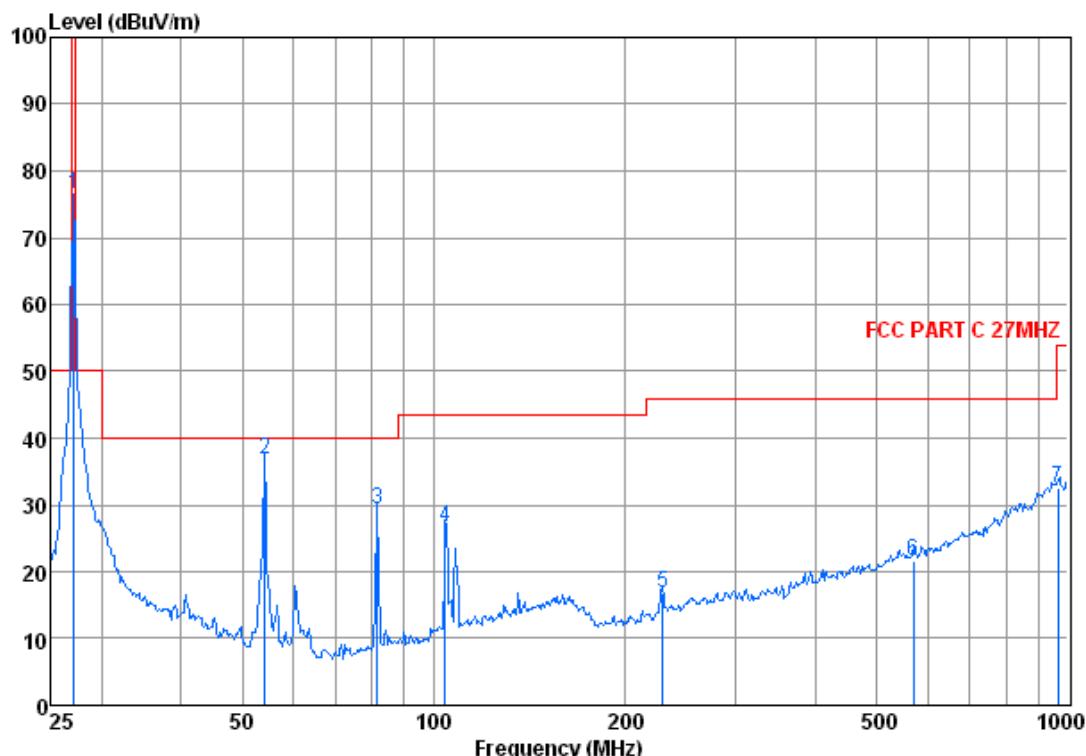

Condition: FCC PART C 27MHZ 3m 3142C NEW VERTICAL


Job No. : 1579RF

Test mode: Transmitting

Freq	Cable Loss	Antenna Factor	Preamp Factor	Read	Limit Line	Over Line	Remark			
				Level						
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	p	27.15	0.60	18.18	27.37	85.03	76.44	100.00	-23.56	Peak
2	q	54.25	0.80	6.68	27.28	56.57	36.77	40.00	-3.23	QP
3		81.70	1.10	5.45	27.23	49.96	29.28	40.00	-10.72	QP
4		104.22	1.21	6.88	27.17	45.87	26.79	43.50	-16.71	QP
5		229.50	1.57	8.02	26.60	33.89	16.88	46.00	-29.12	QP
6		570.80	2.67	14.80	27.59	31.79	21.67	46.00	-24.33	QP
7		963.78	3.67	21.13	26.47	34.27	32.60	54.00	-21.40	QP

## Horizontal

Data: 93

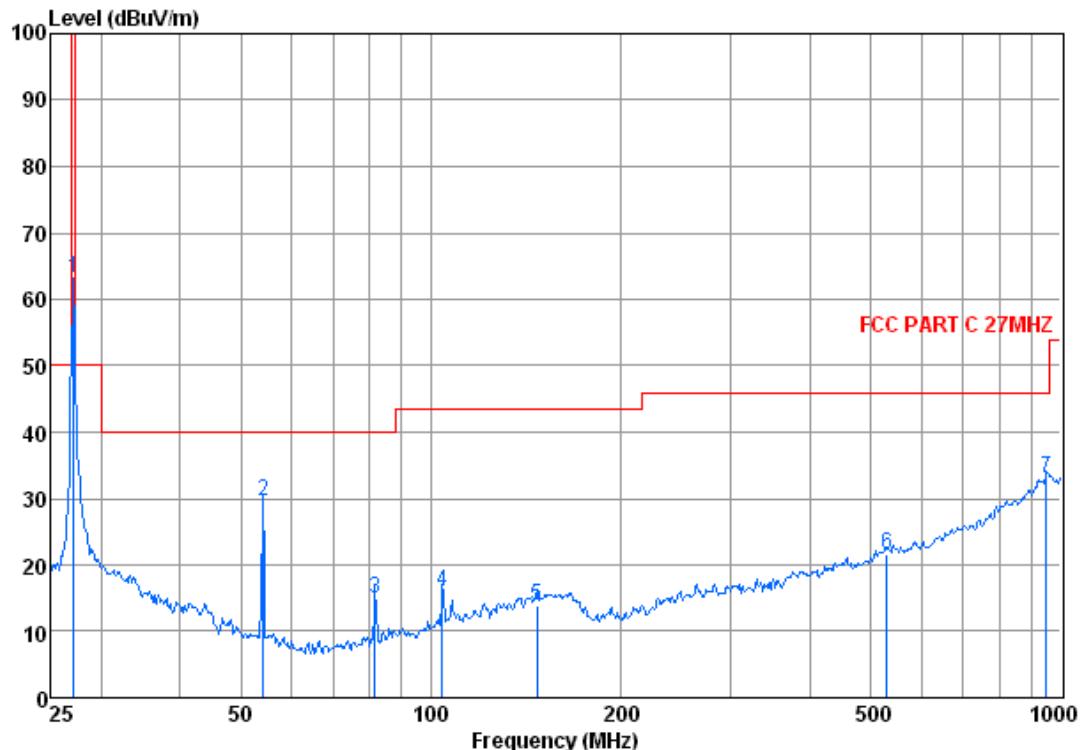

Condition: FCC PART C 27MHZ 3m 3142C NEW HORIZONTAL

Job No. : 1579RF


Test mode: Transmitting

Freq	Cable Loss	Antenna Factor	Preamp Factor	Read	Limit	Over	Remark
				Level			
MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 p	27.15	0.60	18.18	27.37	71.86	63.27	100.00 -36.73 Peak
2 q	54.25	0.80	6.68	27.28	49.36	29.56	40.00 -10.44 QP
3	81.70	1.10	5.45	27.23	35.59	14.91	40.00 -25.09 QP
4	104.22	1.21	6.88	27.17	35.21	16.13	43.50 -27.37 QP
5	147.41	1.31	9.13	26.92	30.35	13.87	43.50 -29.63 QP
6	530.21	2.63	14.20	27.65	32.38	21.56	46.00 -24.44 QP
7	949.67	3.65	21.40	26.54	34.65	33.16	46.00 -12.84 QP

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 2) The disturbance below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.

### 5.3 Occupied Bandwidth
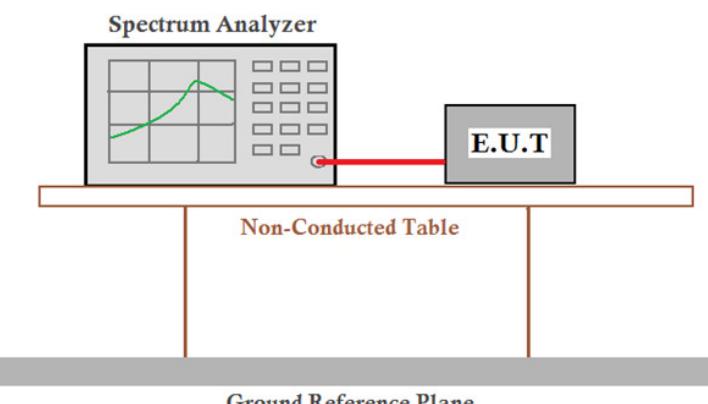
<b>Test Requirement:</b>	47 CFR Part 15C Section 15.215 (C)
<b>Test Method:</b>	ANSI C63.10: 2009
<b>Limit:</b>	Operation within the band 26.960 – 27.280 MHz
<b>Requirement :</b>	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that 20dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equip compliance with the 20dB attenuation specification may base on measurement at the intentional radiator's antenna output terminal unless the intentional radiator uses a permanently attached antenna, in which case compliance shall be demonstrated by measuring the radiated emissions.
<b>Test Setup:</b>	
<b>Test Mode:</b>	Transmitting mode
<b>Instruments Used:</b>	Refer to section 4.10 for details
<b>Test Result:</b>	Pass

**Test Result:**