

Electrical Specification


Frequency range	1850-1995MHz
Polarization	Vertical
Gain	8dBi
Horizontal beam width	70°
Vertical beam width	65°
VSWR	≤ 1.5 : 1
Impedance	50 Ohm
Max. Power rating	5 W




Mechanical Specifications

Dimension (L x W x H)	138 x 108 x 26 mm
Weight (excl. Brackets)	0.25 kg
Connector	1 x N- Female
Mounting	Wall
Tilt	Ver. 15° / Hor. 360°


Installation

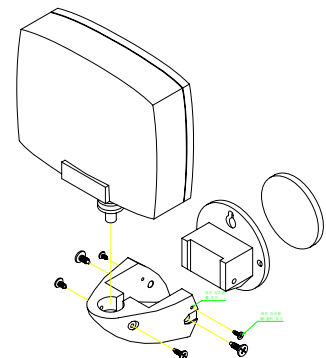

Radiation Pattern

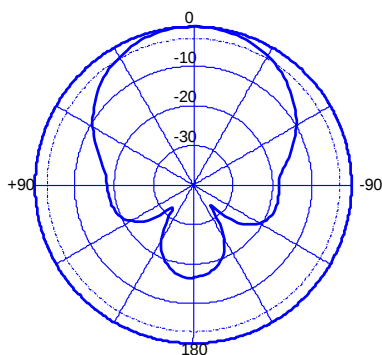

Horizontal Pattern

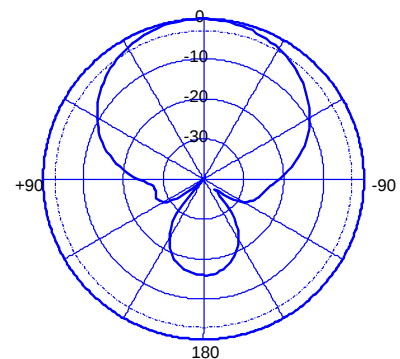

Vertical Pattern