

Date : 2011-12-07

Page 1 of 1

No. : MH186148

Applicant (WAS003):

Dream Link Limited
Room 1207, Peninsula Centre, 67 Mody Road, Tsim Sha Tsui, Kowloon, Hong Kong

Manufacturer:

Dream Link Limited
Room 1207, Peninsula Centre, 67 Mody Road, Tsim Sha Tsui, Kowloon, Hong Kong

Description of Sample(s):

Product: iLaunch Thunder
Brand Name: Dream Cheeky
Model Number: 358
FCC ID: STF358

Date Sample(s) Received: 2011-11-08

Date Tested: 2011-11-30

Investigation Requested:

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2010 and ANSI C63.4:2009 for FCC Certification.

Conclusion(s):

The submitted product COMPLIED with the requirements of Federal Communications Commission [FCC] Rules and Regulations Part 15. The tests were performed in accordance with the standards described above and on Section 2.2 in this Test Report.

Remark(s):



Dr. LEE Kam Chuen
Authorized Signatory
ElectroMagnetic Compatibility Department
For and on behalf of
The Hong Kong Standards and Testing Centre Ltd.

Date : 2011-12-07
No. : MH186148

Page 2 of 2

CONTENT:

Cover	Page 1 of 45
Content	Page 2 of 45
<u>1.0 General Details</u>	
1.1 Test Laboratory	Page 3 of 45
1.2 Equipment Under Test [EUT] Description of EUT operation	Page 3 of 45
1.3 Date of Order	Page 3 of 45
1.4 Submitted Sample	Page 3 of 45
1.5 Test Duration	Page 3 of 45
1.6 Country of Origin	Page 3 of 45
<u>2.0 Technical Details</u>	
2.1 Investigations Requested	Page 4 of 45
2.2 Test Standards and Results Summary	Page 4 of 45
<u>3.0 Test Results</u>	
3.1 Emission	Page 5 – 39 of 45
<u>Appendix A</u>	
List of Measurement Equipment	Page 40 of 45
<u>Appendix B</u>	
Ancillary Equipment	Page 41 of 45
<u>Appendix C</u>	
Photographs	Page 42- 45 of 45

Date : 2011-12-07

Page 3 of 3

No. : MH186148

1.0 General Details

1.1 Test Laboratory

The Hong Kong Standards and Testing Centre Ltd.
EMC Laboratory
10 Dai Wang Street, Taipo Industrial Estate
New Territories, Hong Kong

1.2 Equipment Under Test [EUT]

Description of Sample(s)

Product:	iLaunch Thunder
Manufacturer:	Dream Link Limited
	Room 1207, Peninsula Centre, 67 Mody Road, Tsim Sha Tsui, Kowloon, Hong Kong
Brand Name:	Dream Cheeky
Model Number:	358
Input Voltage:	Rechargeable Li-ion Battery BL-5C 3.7V 1000mAh; and USB charge port: 5Vd.c 500mA

1.2.1 Description of EUT Operation

The Equipment Under Test (EUT) is a Dream Link Limited, iLaunch Thunder, it is Audio System, modulation by IC; and type is frequency hopping speed spectrum Modulation.

1.3 Date of Order

2011-11-08

1.4 Submitted Sample(s):

1 Sample

1.5 Test Duration

2011-11-09 to 2011-11-30

1.6 Country of Origin

China

Date : 2011-12-07

Page 4 of 4

No. : MH186148

2.0 Technical Details

2.1 Investigations Requested

Perform Electromagnetic Interference measurements in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15: 2010 Regulations and ANSI C63.4:2009 for FCC Certification.

2.2 Test Standards and Results Summary Tables

EMISSION Results Summary						
Test Condition	Test Requirement	Test Method	Class / Severity	Test Result		
				Pass	Fail	N/A
Output Power of Fundamental Emissions	FCC 47CFR 15.247(b)(1)	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Conduct Spurious Emission	FCC 47CFR 15.247(c)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Radiated Spurious Emissions	FCC 47CFR 15.209	ANSI C63.4:2009	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
AC Mains Conducted Emissions	FCC 47CFR 15.207	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Number of Operating Channel	FCC 47CFR 15.247(a)(2)(b)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Band-edge compliance of Conducted Emission	FCC 47CFR 15.247©	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Channel Separation	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Pseudorandom Hopping Algorithm	FCC 47CFR 15.247(a)(1)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
RF Exposure compliance	FCC 47CFR 1.1307, 2.1091, 2.1093	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Time of Occupancy	FCC 47CFR 15.247(a)(1)(iii)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
20dB Bandwidth	FCC 47CFR 15.247(a)(2)	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Antenna requirement	FCC 47CFR 15.203	N/A	N/A	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: N/A - Not Applicable

3.0 Test Results

3.1 Emission

3.1.1 Maximum Peak Output Power

Test Requirement: FCC 47CFR 15.247(b)(1)
Test Method: N/A
Test Date: 2011-11-28
Ambient Temperature: 21 °C
Relative Humidity: 49 %
Mode of Operation: Tx mode


Test Method:

The RF output of the EUT was connected to the spectrum analyzer. All the attenuation or cable loss will be added to the measured maximum output power. The results are recorded in mW.

Spectrum Analyzer Setting:

RBW = 3 MHz, VBW= 3MHz, Sweep = Auto, Span = 10MHz
Detector = Peak, Trace = Max. hold

Test Setup:

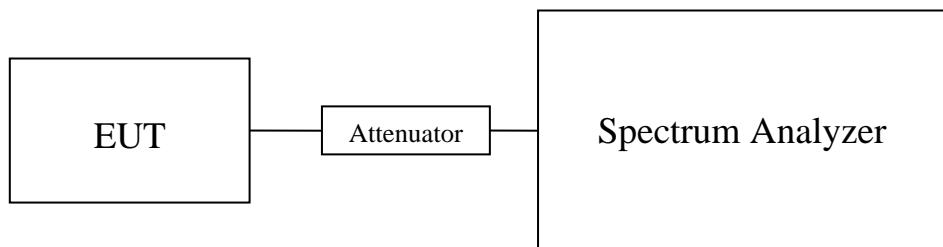

Limits for Peak Output Power of Fundamental & Harmonics Emissions [FCC 47CFR 15.247]:

The maximum peak output power shall not exceed the following limits:

For frequency hopping systems employing at least 75 hopping channels: 1 Watt

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 Watts

For Digital Transmission systems in 2400-2483.5 MHz Band: 1 Watt

Results of Tx Mode (2402.0 MHz to 2480.0MHz) : Pass (TX Unit)**Maximum conducted output power**

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2402	1.05

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2441	0.90

Transmitter Frequency (MHz)	Maximum conducted output power (mW)
2480	1.24

Limit: 0.125W (125.0mW)

Calculated measurement uncertainty : 30MHz to 1GHz 1.7dB
1GHz to 18GHz 1.7dB

3.1.2 Radiated Emissions

Test Requirement:	FCC 47CFR 15.209
Test Method:	ANSI C63.4:2003
Test Date:	2011-11-28
Ambient Temperature:	21 °C
Relative Humidity:	48 %
Mode of Operation:	Tx mode


Test Method:

The sample was placed 0.8m above the ground plane of semi-anechoic Chamber*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

* Semi-anechoic chamber located on the G/F of “The Hong Kong Standards and Testing Centre Ltd.” with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

Spectrum Analyzer Setting:

Above 1GHz – RBW = 3 MHz, VBW= 3MHz, Detector = Peak / Average,
Below 1GHz to 30MHz – RBW = 120kHz, VBW = 120kHz Detector = Quasi-Peak,
Below 30MHz to 9kHz – RBW = 10kHz, VBW = 30kHz Detector = Quasi-Peak,
Sweep = Auto, Span = Fully capture the emissions being measured,
Trace = Max. hold

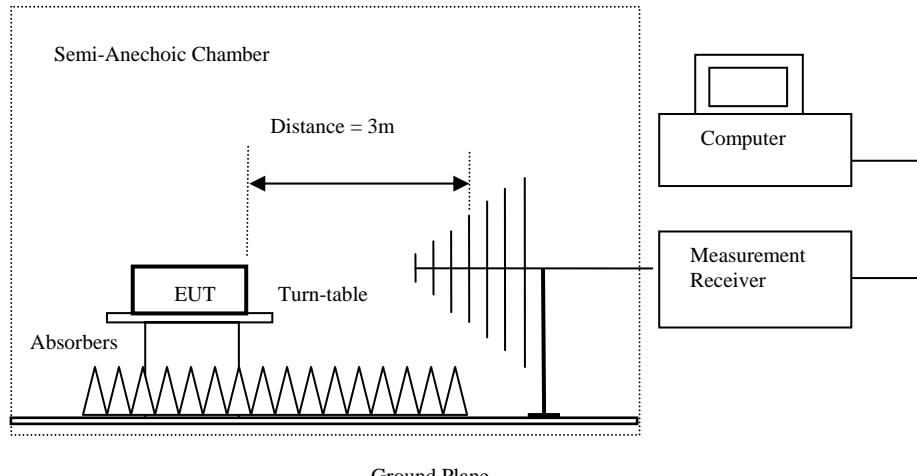Test Setup:

Absorbers placed on top of the ground plane are for measurements above 1000MHz only.

Date : 2011-12-07

Page 8 of 8

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx Mode (2402.0 MHz): Pass

Field Strength of Harmonic Emissions PeakValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4804.0	12.0	41.5	53.5	74.0	-20.5	Horizontal
7206.0	-1.2	48.8	47.6	74.0	-26.4	Horizontal

Field Strength of Harmonic Emissions AverageValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4804.0	-8.0	41.5	33.5	54.0	-20.5	Horizontal
7206.0	-21.2	48.8	27.6	54.0	-26.4	Horizontal

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB
1GHz to 18GHz 5.1dB

Date : 2011-12-07

Page 9 of 9

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx Mode (2441.0 MHz): Pass

Field Strength of Harmonic Emissions PeakValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4882.0	11.2	41.4	52.6	74.0	-21.4	Horizontal
7323.0	-3.6	48.7	45.1	74.0	-28.9	Horizontal

Field Strength of Harmonic Emissions AverageValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4882.0	-8.8	41.4	32.6	54.0	-21.4	Horizontal
7323.0	-23.6	48.7	25.1	54.0	-28.9	Horizontal

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB
1GHz to 18GHz 5.1dB

Date : 2011-12-07

Page 10 of 10

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Tx Mode (2480.0 MHz): Pass

Field Strength of Harmonic Emissions PeakValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4960.0	13.7	41.4	55.1	74.0	-18.9	Horizontal
7440.0	4.6	48.6	53.2	74.0	-20.8	Horizontal

Field Strength of Harmonic Emissions AverageValue						
Frequency MHz	Measured Level @3m dB μ V	Correction Factor dB/m	Field Strength dB μ V/m	Limit @3m dB μ V/m	Margin dB μ V/m	E-Field Polarity
4960.0	-6.3	41.4	35.1	54.0	-18.9	Horizontal
7440.0	-15.4	48.6	33.2	54.0	-20.8	Horizontal

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB
1GHz to 18GHz 5.1dB

Date : 2011-12-07

Page 11 of 11

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Charge Mode (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Result of Charge Mode (Above 30MHz): Pass

Horizontal

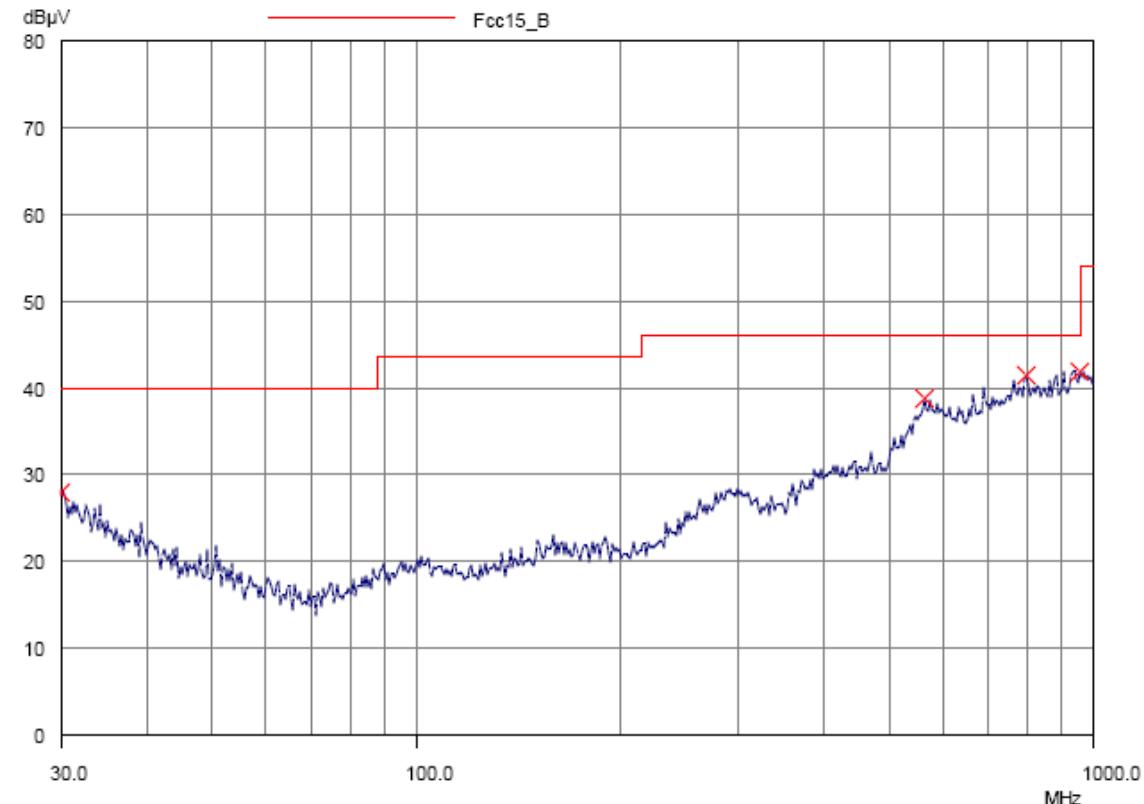

Date : 2011-12-07

Page 12 of 12

No. : MH186148

Result of Charge Mode (Above 30MHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
30.0	Horizontal	28.0	40.0	25.1	100
563.7	Horizontal	39.0	46.0	89.1	200
797.3	Horizontal	40.5	43.5	105.9	150
956.5	Horizontal	40.1	43.5	101.2	150

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty	:	30MHz to 1GHz	5.1dB
		1GHz to 18GHz	5.1dB

Date : 2011-12-07

Page 13 of 13

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Charge Mode (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Result of Charge Mode (Above 30MHz): Pass

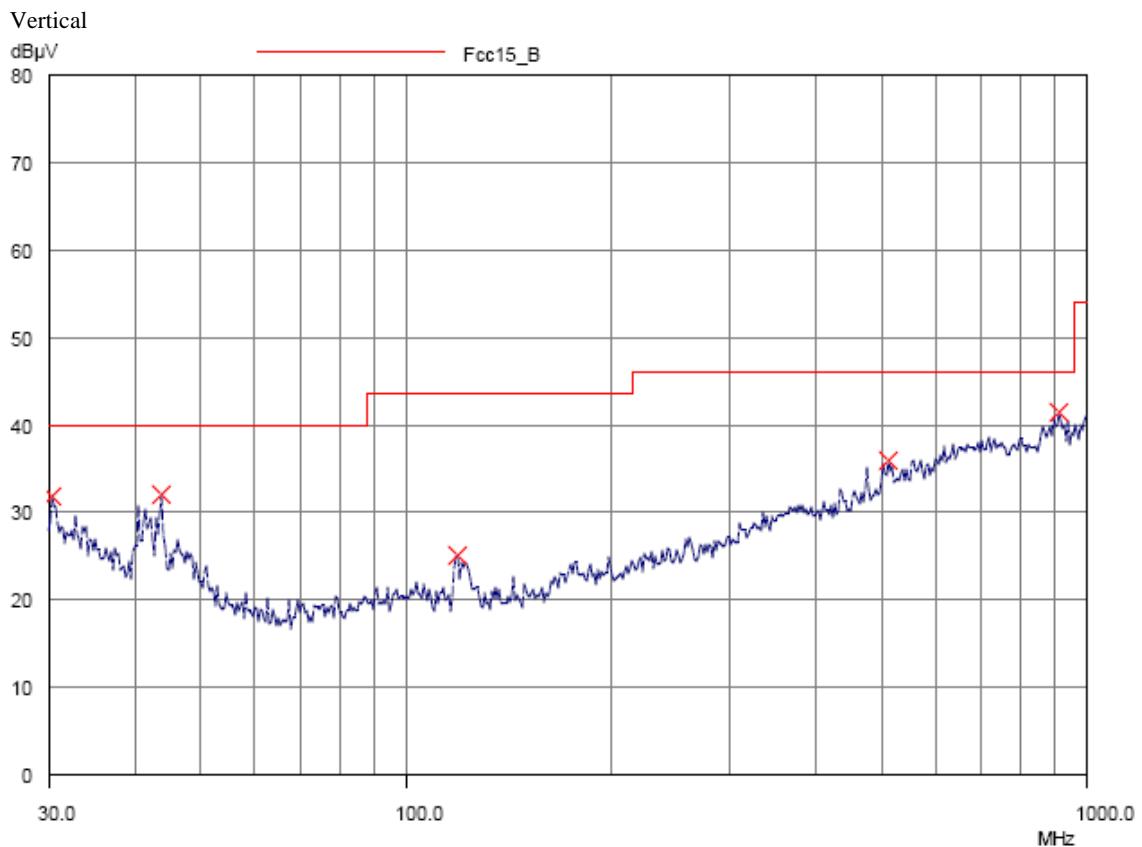

Date : 2011-12-07

Page 14 of 14

No. : MH186148

Result of Charge Mode (Above 30MHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
30.3	Vertical	32.0	40.0	39.8	100
43.8	Vertical	32.1	40.0	40.3	100
119.3	Vertical	25.1	43.5	18.0	150
510.2	Vertical	36.0	46.0	63.1	200
910.8	Vertical	40.5	46.0	105.9	200

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB
1GHz to 18GHz 5.1dB

Date : 2011-12-07

Page 15 of 15

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:


Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Wireless communication Mode with iPhone (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Result of Wireless communication Mode with iPhone (Above 30MHz): Pass

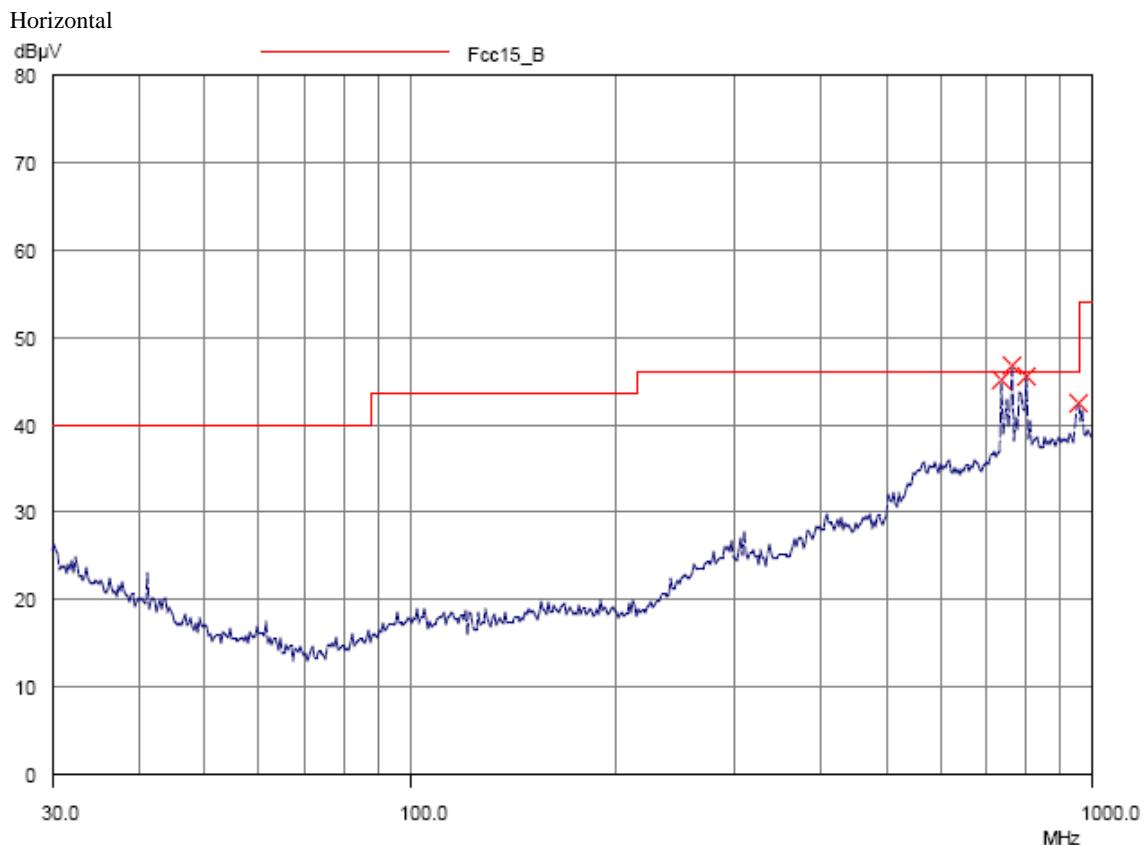

Date : 2011-12-07

Page 16 of 16

No. : MH186148

Result of Wireless communication Mode with iPhone (Above 30MHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dBμV/m	Limit @3m dBμV/m	Level @3m μV/m	Limit @3m μV/m
735.0	Horizontal	38.2	46.0	81.3	200
762.4	Horizontal	40.8	46.0	109.6	200
799.8	Horizontal	40.6	46.0	107.2	200
953.9	Horizontal	40.7	46.0	108.4	200

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB
1GHz to 18GHz 5.1dB

Date : 2011-12-07

Page 17 of 17

No. : MH186148

Limits for Radiated Emissions [FCC 47 CFR 15.209 Class B]:

Frequency Range [MHz]	Quasi-Peak Limits [μ V/m]
0.009-0.490	2400/F (kHz)
0.490-1.705	24000/F (kHz)
1.705-30	30
30-88	100
88-216	150
216-960	200
Above 960	500


The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

Result of Wireless communication Mode with iPhone (9kHz – 30MHz): Pass

Emissions detected are more than 20 dB below the limit line(s)

Result of Wireless communication Mode with iPhone (Above 30MHz): Pass

Vertical

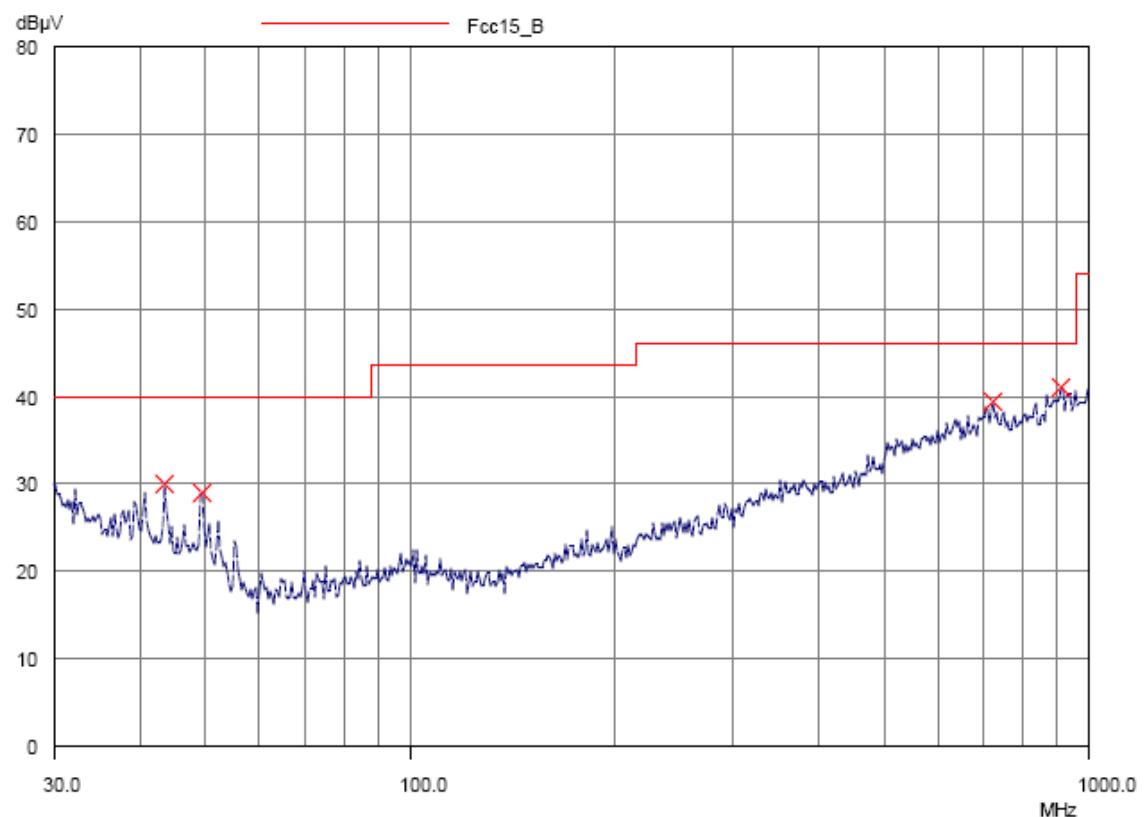

Date : 2011-12-07

Page 18 of 18

No. : MH186148

Result of Wireless communication Mode with iPhone (Above 30MHz): Pass

Radiated Emissions Quasi-Peak					
Emission Frequency MHz	E-Field Polarity	Level @3m dB μ V/m	Limit @3m dB μ V/m	Level @3m μ V/m	Limit @3m μ V/m
43.6	Vertical	30.1	40.0	32.0	100
49.5	Vertical	29.1	40.0	28.5	100
723.4	Vertical	39.6	46.0	95.5	200
910.0	Vertical	40.2	46.0	102.3	200

Remarks:

* Denotes restricted band of operation.

Measurements were made using a peak detector. Any emission less than 1000MHz and falling within the restricted bands of FCC Rules Part 15 Section 15.205 and the limits of FCC Rules Part 15 Section 15.209 were applied.

Correction Factor included Antenna Factor and Cable Attenuation.


Calculated measurement uncertainty	:	30MHz to 1GHz	5.1dB
		1GHz to 18GHz	5.1dB

3.1.3 Conducted Emissions (0.15MHz to 30MHz)

Test Requirement: FCC 47CFR 15.207
Test Method: ANSI C63.4:2003
Test Date: 2011-11-28
Ambient Temperature: 21 °C
Relative Humidity: 49 %
Mode of Operation: Charge mode (Connected PC)

Test Method:

The test was performed in accordance with ANSI C63.4: 2003, with the following: an initial measurement was performed in peak and average detection mode on the live line, any emissions recorded within 30dB of the relevant limit line were re-measured using quasi-peak and average detection on the live and neutral lines with the worst case recorded in the table of results.

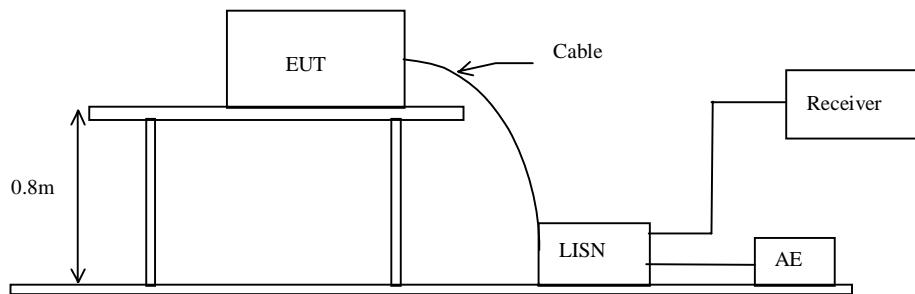Test Setup:

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Charge mode (L): Pass

Please refer to the following diagram for individual results.

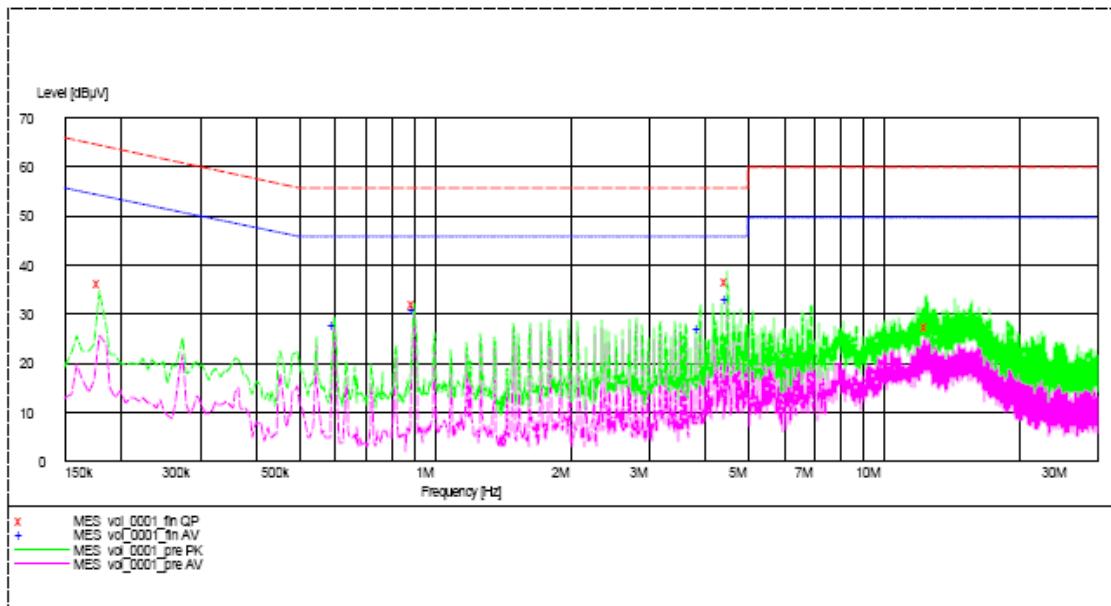

Date : 2011-12-07

Page 21 of 21

No. : MH186148

Results of Charge mode (L): Pass

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Live	0.180	36.3	65.0	-*-	-*-
Live	0.600	-*-	-*-	28.0	46.0
Live	0.900	32.2	56.0	31.1	46.0
Live	3.905	-*-	-*-	27.2	46.0
Live	4.505	36.9	56.0	33.1	46.0
Live	12.480	27.4	60.0	-*-	-*-

Remarks:

Calculated measurement uncertainty : 3.97dB

-*- Emission(s) that is far below the corresponding limit line.

Date : 2011-12-07

Page 22 of 22

No. : MH186148

Limit for Conducted Emissions (FCC 47 CFR 15.207):


Frequency Range [MHz]	Quasi-Peak Limits [dB μ V]	Average [dB μ V]
0.15-0.5	66 to 56*	56 to 46*
0.5-5.0	56	46
5.0-30.0	60	50

* Decreases with the logarithm of the frequency.

Limits for Conducted Emissions Test, please refer to limit lines (Quasi-Peak and Average) in the following diagram.

Results of Charge mode (N): Pass

Please refer to the following diagram for individual results.

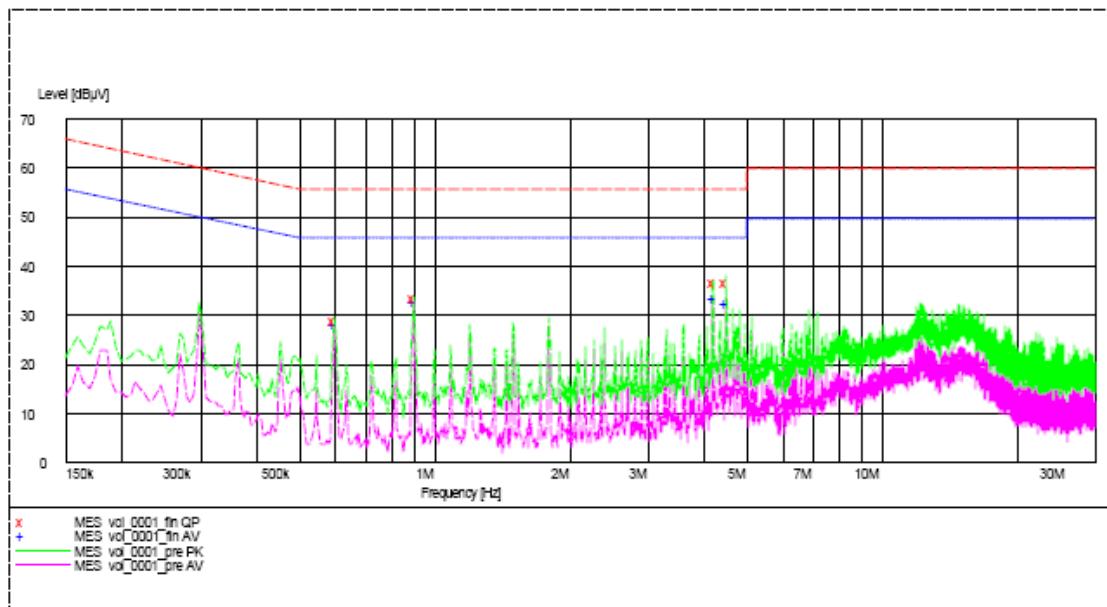

Date : 2011-12-07

Page 23 of 23

No. : MH186148

Results of Charge mode (N): Pass

Conductor Live or Neutral	Frequency MHz	Quasi-peak		Average	
		Level dB μ V	Limit dB μ V	Level dB μ V	Limit dB μ V
Neutral	0.600	28.8	56.0	28.1	46.0
Neutral	0.900	33.4	56.0	33.0	46.0
Neutral	4.205	36.7	56.0	33.7	46.0
Neutral	4.505	36.9	56.0	32.5	46.0

Remarks:

Calculated measurement uncertainty : 3.97dB

-*- Emission(s) that is far below the corresponding limit line.

3.1.4 20dB Bandwidth Measurement

Test Requirement:	FCC 47CFR 15.247(a)(1)
Test Method:	ANSI C63.4:2003
Test Date:	2011-11-29
Ambient Temperature:	22 °C
Relative Humidity:	50 %
Mode of Operation:	Tx Mode

Test Method:

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

Test Setup:

As Test Setup of clause 3.1.1 in this test report.


Date : 2011-12-07

Page 25 of 25

No. : MH186148

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2402.02	942.0	Within 2400-2483.5

(Lowest Operating Frequency)

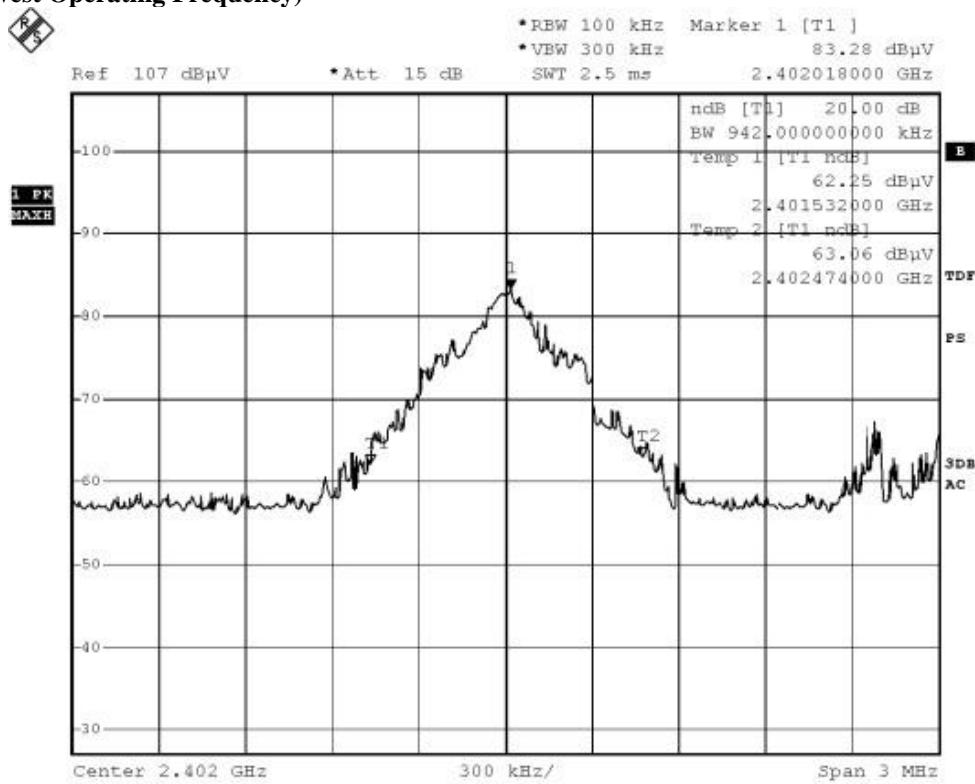


Date : 2011-12-07

Page 26 of 26

No. : MH186148

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2440.98	972.0	Within 2400-2483.5

(Mid. Operating Frequency)

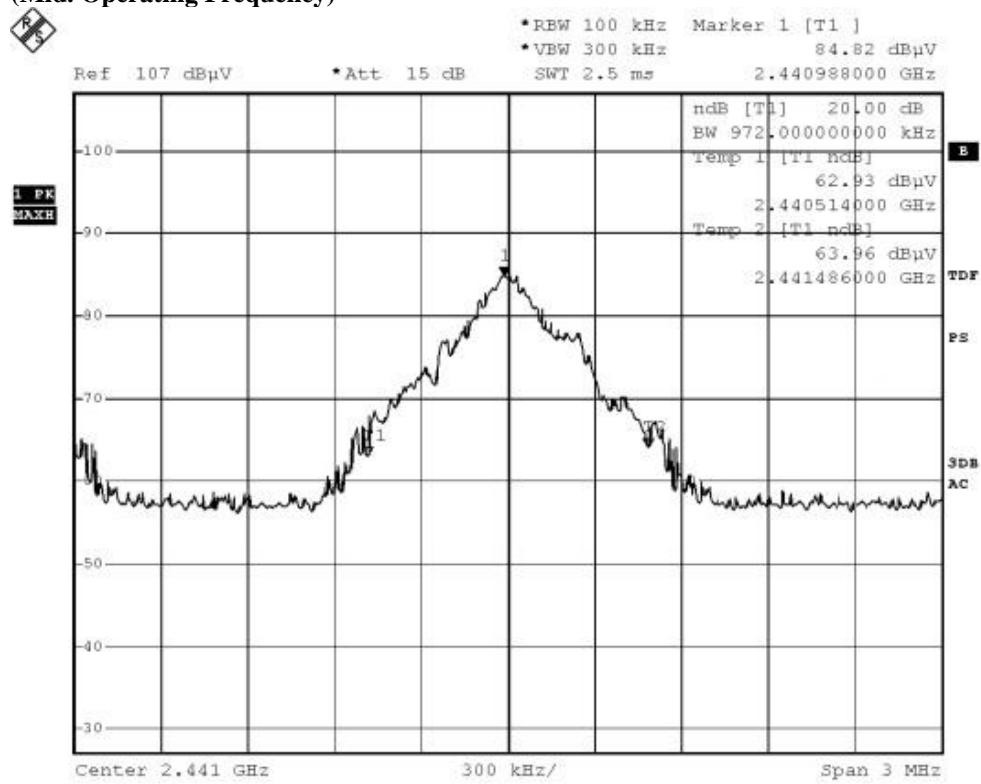


Date : 2011-12-07

Page 27 of 27

No. : MH186148

Fundamental Frequency [MHz]	20dB Bandwidth [kHz]	FCC Limits [MHz]
2479.99	954.0	Within 2400-2483.5

(Highest Operating Frequency)

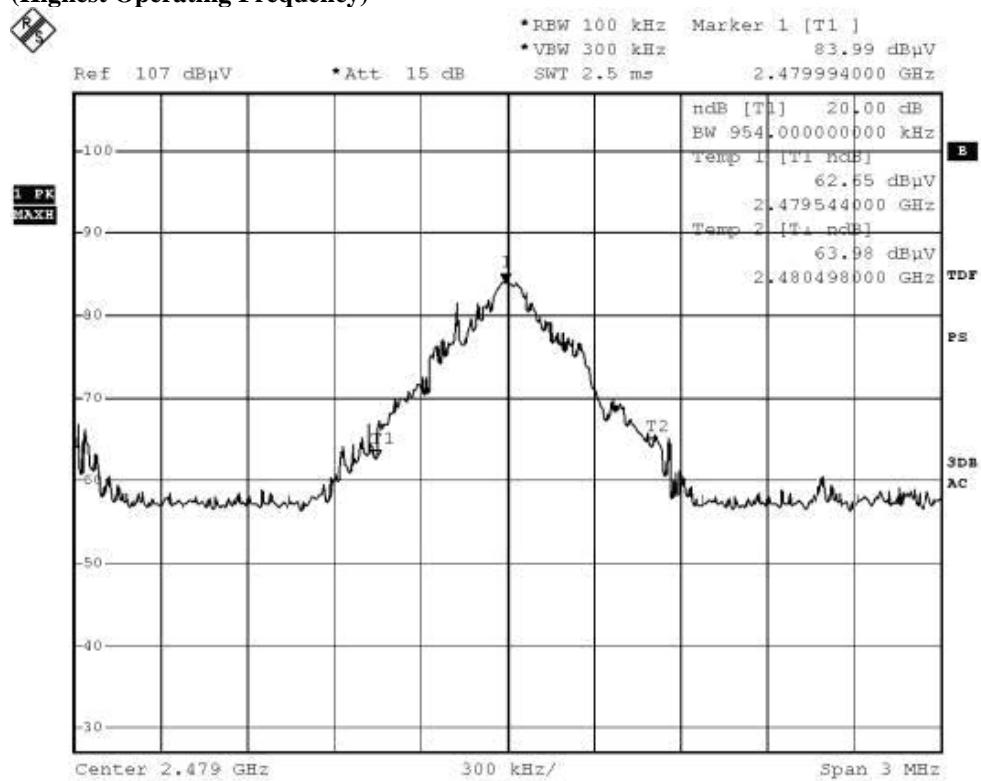

Number of Operating Channel**Requirements:**

Frequency hopping system in the 2400-2483.5MHz band shall use at least 15 non-overlapping channels.


Item	Frequency (MHz)	Item	Frequency (MHz)	Item	Frequency (MHz)
1	2402	31	2432	61	2462
2	2403	32	2433	62	2463
3	2404	33	2434	63	2464
4	2405	34	2435	64	2465
5	2406	35	2436	65	2466
6	2407	36	2437	66	2467
7	2408	37	2438	67	2468
8	2409	38	2439	68	2469
9	2410	39	2440	69	2470
10	2411	40	2441	70	2471
11	2412	41	2442	71	2472
12	2413	42	2443	72	2473
13	2414	43	2444	73	2474
14	2415	44	2445	74	2475
15	2416	45	2446	75	2476
16	2417	46	2447	76	2477
17	2418	47	2448	77	2478
18	2419	48	2449	78	2479
19	2420	49	2450	79	2480
20	2421	50	2451		
21	2422	51	2452		
22	2423	52	2453		
23	2424	53	2454		
24	2425	54	2455		
25	2426	55	2456		
26	2427	56	2457		
27	2428	57	2458		
28	2429	58	2459		
29	2430	59	2460		
30	2431	60	2461		

Date : 2011-12-07

Page 29 of 29

No. : MH186148

Number of Hopping frequencies = 79 Channels

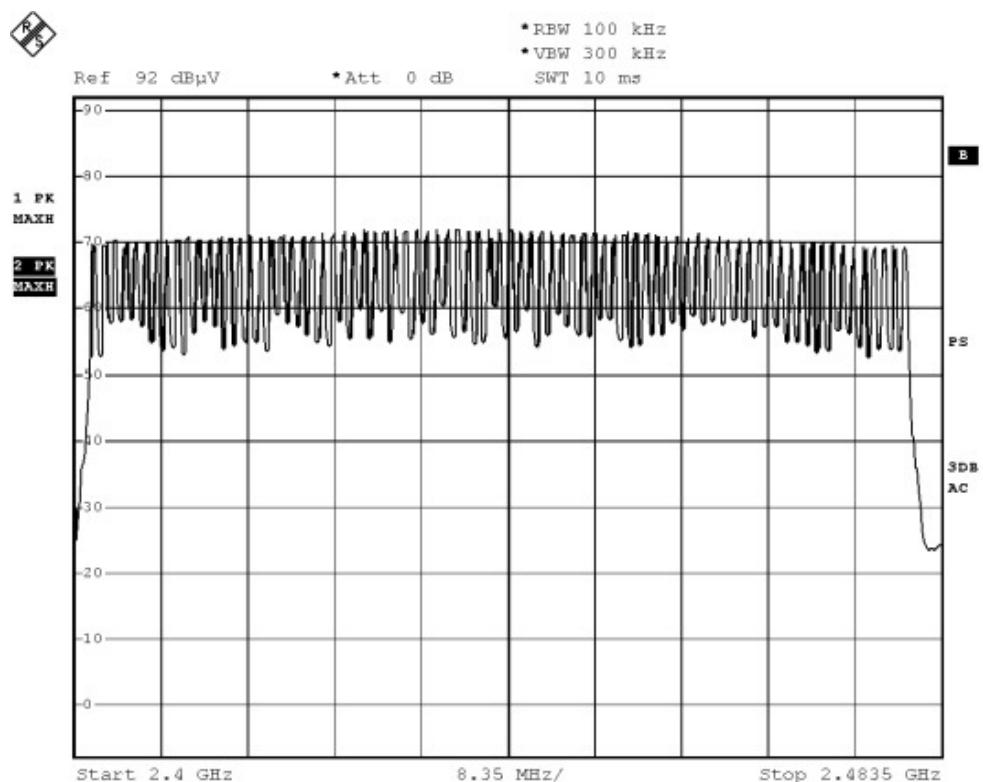


Date : 2011-12-07

Page 30 of 30

No. : MH186148

Channel Separation (Lowest)

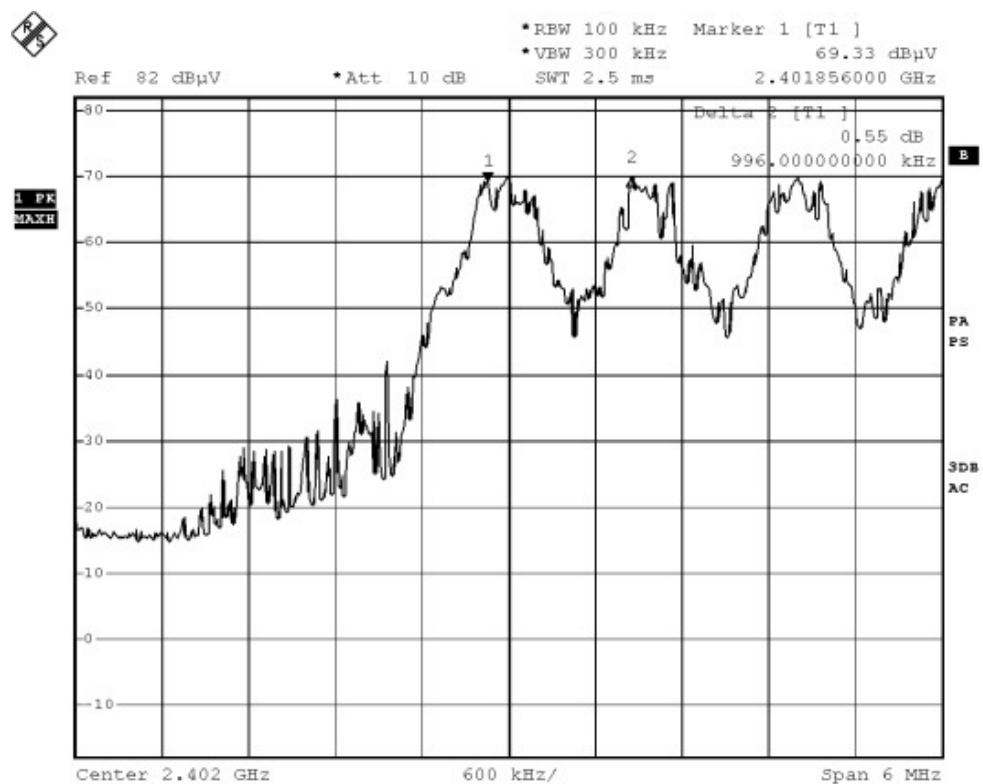


Date : 2011-12-07

Page 31 of 31

No. : MH186148

Channel Separation (Mid)

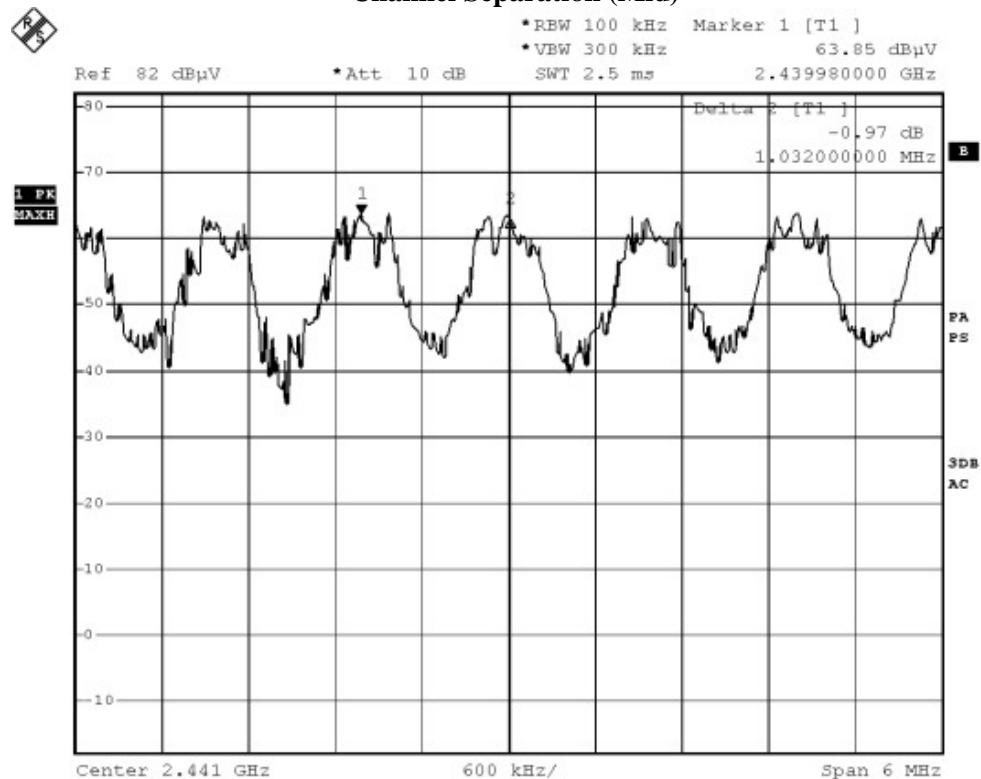


Date : 2011-12-07

Page 32 of 32

No. : MH186148


Channel Separation (High)

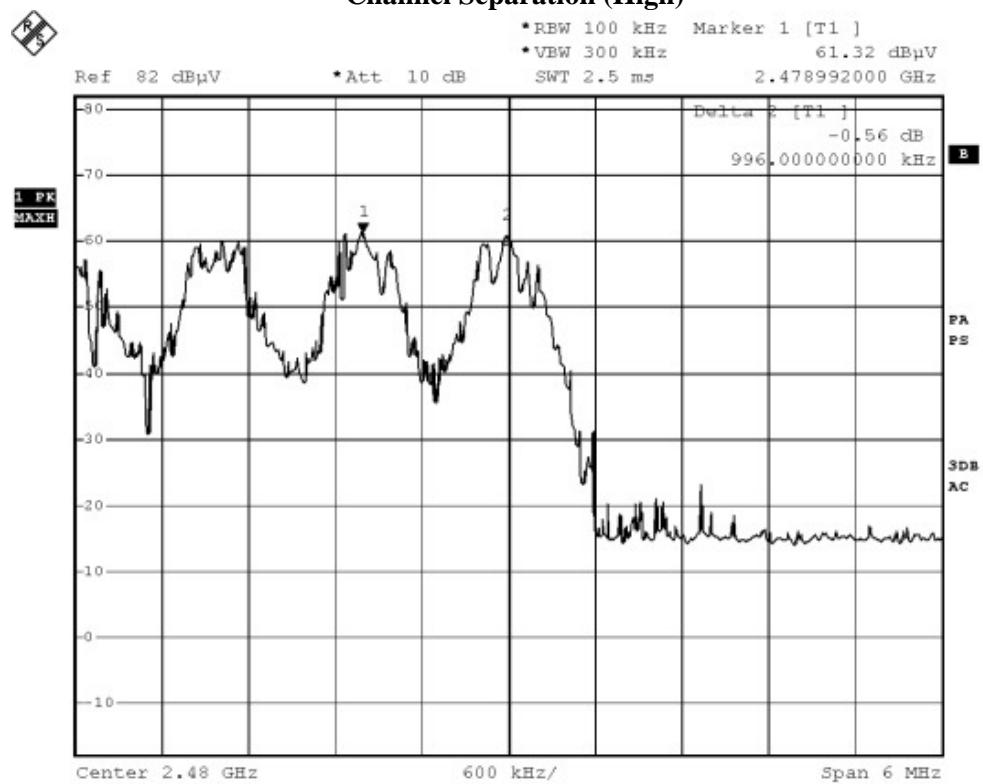

Date : 2011-12-07

Page 33 of 33

No. : MH186148

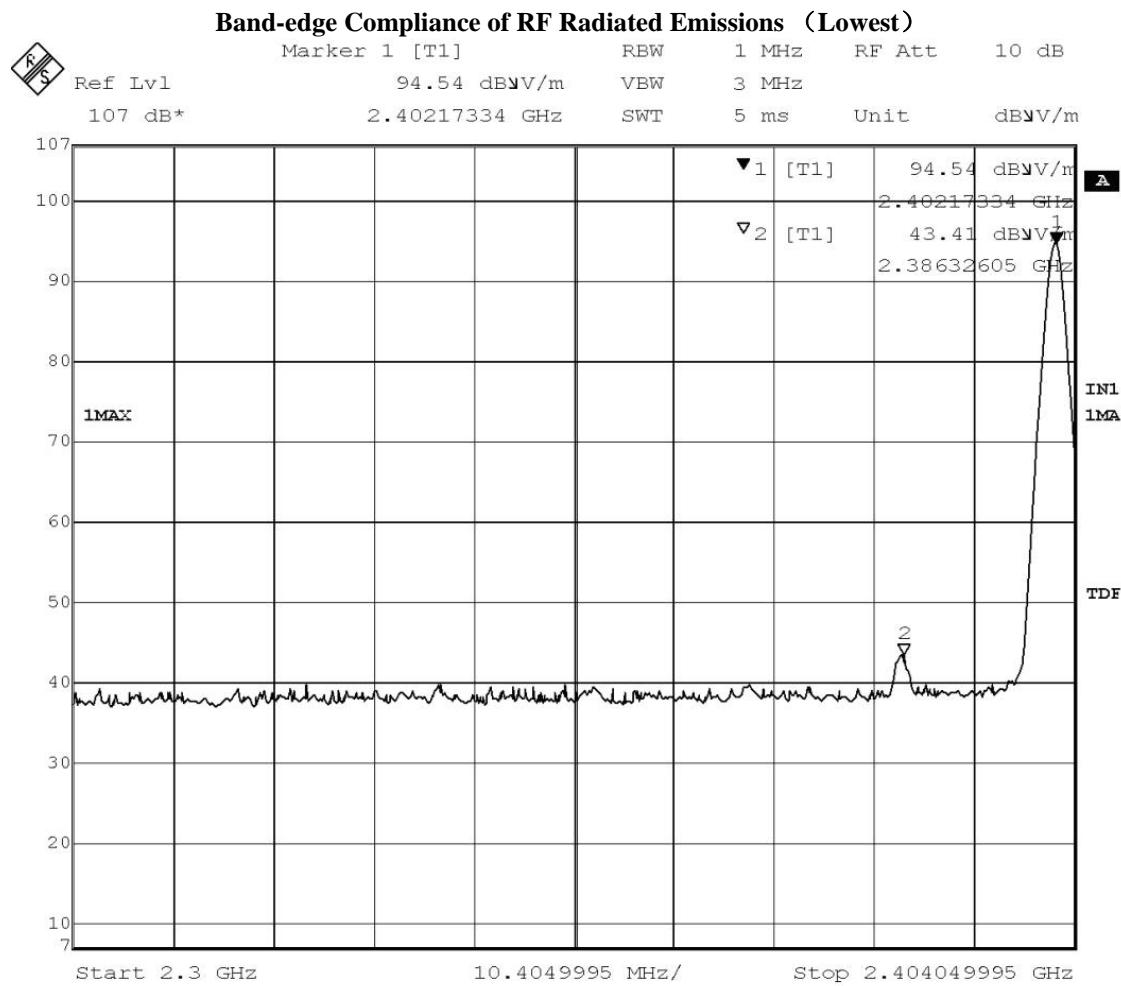


Date : 2011-12-07

Page 34 of 34

No. : MH186148

Band-edge Compliance of RF Radiated Emissions (Highest)

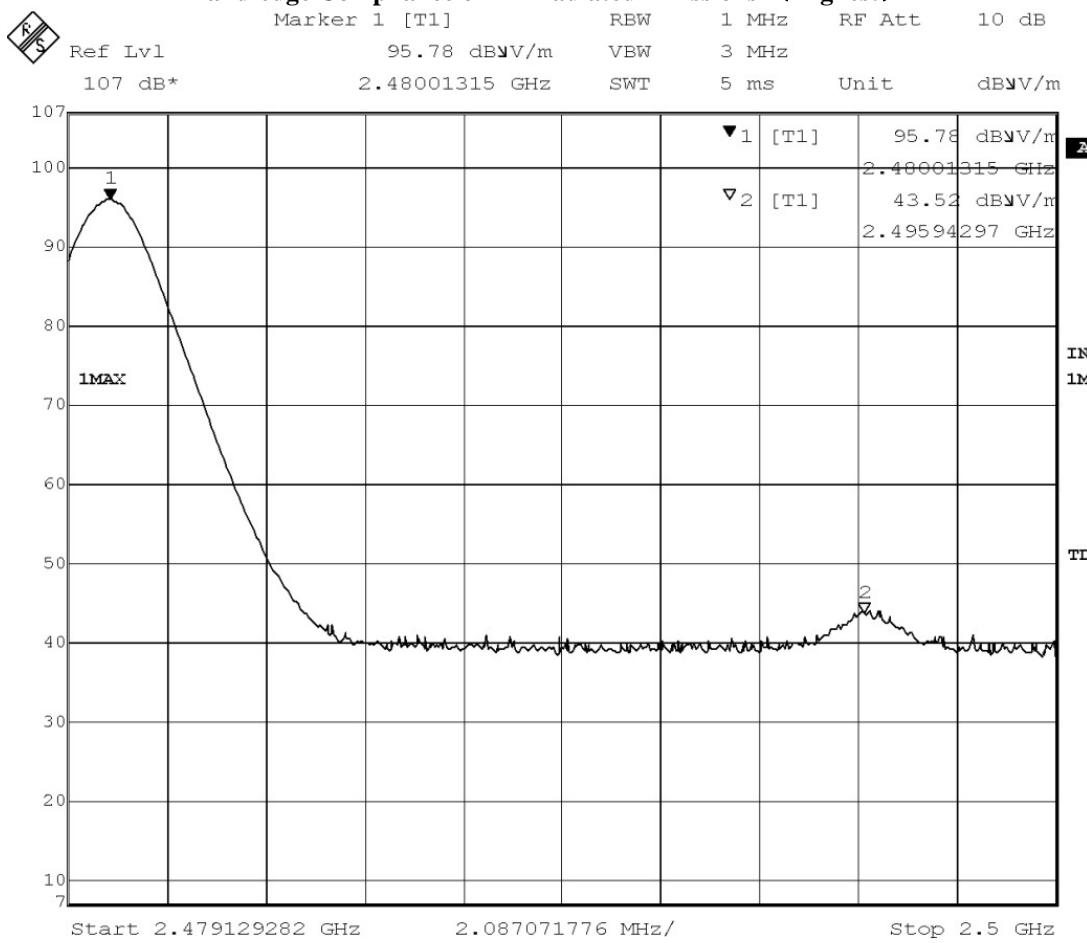

Antenna Requirement

Test Requirements: § 15.203

Test Specification:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Test Results:

The EUT has 1 Antenna which is permanently attached to the main unit and attached on PCB board, the antenna gain = 0dBi. All component install on inside of EUT. User unable to remove or changed the Antenna.

Pseudorandom Hopping Algorithm**Requirements:**

The channel frequencies shall be selected from a pseudorandom ordered list of hopping frequencies. Each frequency must be used equally by the transmitter.

Pseudorandom Frequency Hopping

The embedded FHSS engine uses 79 hopping frequencies. Each channel frequency is selected from a pseudorandom ordered list of hopping frequencies, from 2402.0MHz to 2480.0MHz with separating in 972.0 kHz apart from each of the channels. A single data frame is transmitted on each frequency location before skipping to the next hopping frequency in the list. Each channel is occupied 8 milliseconds.

Typically, the initiation of an FHSS communication is as follows

1. The initiating party sends a request via a predefined frequency or control channel.
2. The receiving party sends a number, known as a seed back to the initiating party.
3. The initiating party sends a synchronization signal acknowledging to the receiving party as it has successfully established a transmission link.
4. The communication begins, and both the receiving and the sending party change their frequencies along an unpredictable hopping sequence with pseudorandom properties.

System Receiver Input Bandwidth

The receiver bandwidth is equal to the receiver bandwidth in the 79 hopping channel mode, which is 1005.0 kHz. The receiver bandwidth was verified during RF hopping to the relative channel.

Receiver Hopping Capability

The associated receiver has the ability to shift frequencies in synchronization with the transmitted signals, with they start connect with a same channel and then hop to next channel with a same formula among each other.

Occupancy Time

Requirements:

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channel employed.
No requirements for Digital Transmission System.


Measurement Data: Number of RF channel: 79
Observed duration of occupancy: $0.4 \times 79 = 31.6$ s
Period observed: 2s
Duration of short burst: 168 μ s

Time of occupancy: $(10 \times 0.000168) / 2 \times 31.6 = 0.026544$

See fig. A and B.

Remark: The Occupancy Time of the Lowest, Middle and Highest operating frequency has been examined and the worst case test result is recorded in this test report.

Fig. A Pulse Train

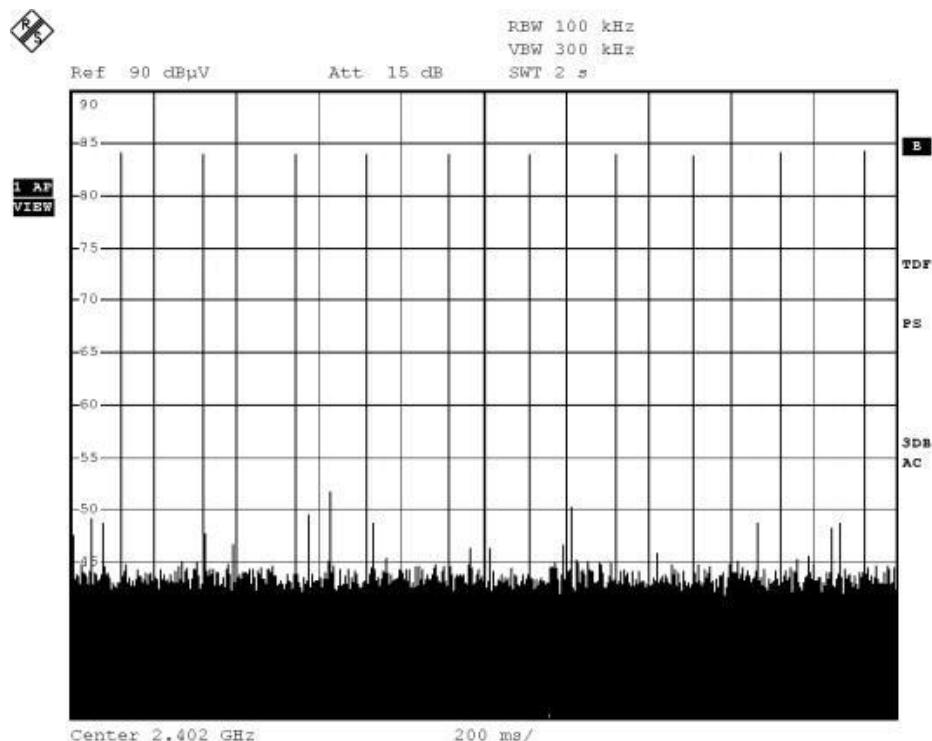


Date : 2011-12-07

Page 38 of 38

No. : MH186148

Fig B . Single Pulse

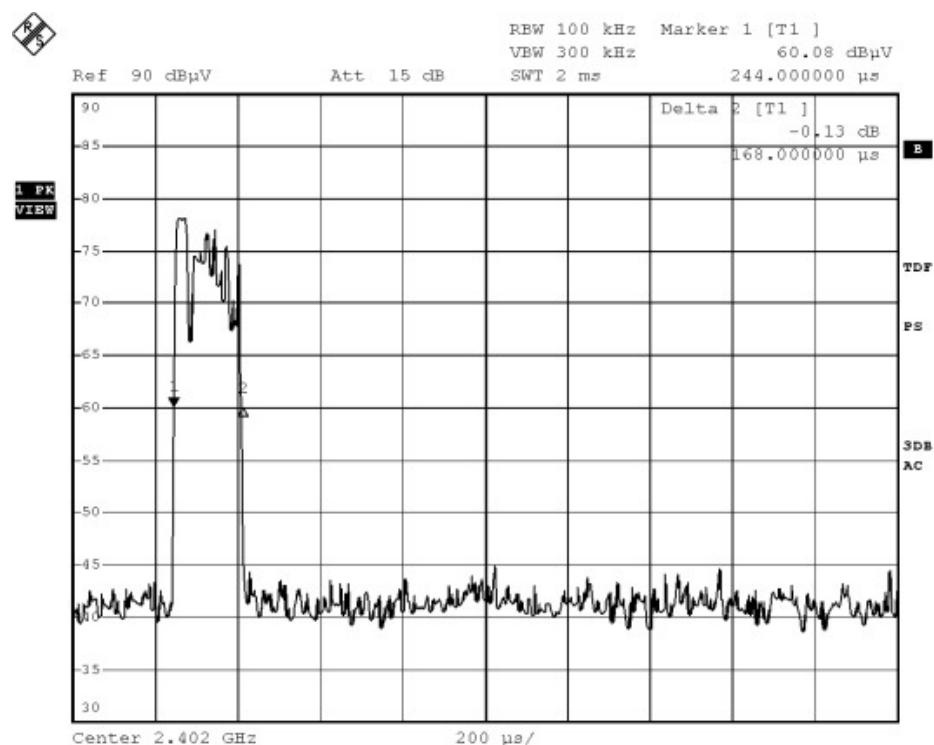

Date : 2011-12-07

Page 39 of 39

No. : MH186148

RF Exposure

Test Requirement:	FCC 47CFR 15.247(b)(5)
Test Date:	2011-12-03
Ambient Temperature:	21 °C
Relative Humidity:	49 %
Mode of Operation:	Tx mode

Test Method:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Test Results:

The EUT complied with the requirement(s) of this section.

EUT meets the requirements of these sections as proven through MPE calculation

The MPE calculation for EUT @ 20cm

Based on the highest P =1.24 mW

$$\begin{aligned} Pd &= PG / 4\pi * R^2 = (1.24 \times 1.0) / 12.566 * (20)^2 \\ &= (1.24) / 12.566 \times 400 = 1.24 / 5026.4 \\ &= 0.00025 \text{ mW/cm}^2 \end{aligned}$$

where:

*Pd = power density in mW/cm²

* G = Antenna numeric gain (1.0); Log G = g/10 (g = 0dBi).

* P = Conducted RF power to antenna (1.24 mW).

* R = Minimum allowable distance.(20 cm)

*The power density Pd = 0.00025 mW/cm² is less than 1 mW/cm² (listed MPE limit)

*The SAR evaluation is not needed (this is a desk top device, R > 20 cm)

* The EUT(antenna) must be 0.2 meters away from the General Population.

Date : 2011-12-07

Page 40 of 40

No. : MH186148

Appendix A

List of Measurement Equipment

Radiated Emission

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM276	Broadband Horn Antenna	A-INFOMW	JXTXLB-10180-SF	J203109090 3007	2010/08/21	2012/08/21
EM215	MULTIDEVICE CONTROLLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2011/10/25	2012/10/25
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2010/02/09	2012/02/09
EM229	EMI Test Receiver	R&S	ESIB40	100248	2011/04/26	2012/04/26

Line Conducted

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM119	LISN	R & S	ESH3-Z5	846695/030	2011/01/07	2012/01/07
EM181	EMI TEST RECEIVER	ROHDE & SCHWARZ	ESIB7	100072	2011/04/26	2012/04/26
EM154	SHIELDING ROOM	SIEMENS MATSUSHITA COMPONENTS	N/A	803-740-057-99A	2011/01/23	2012/01/23

Remarks:-

CM Corrective Maintenance

N/A Not Applicable or Not Available

TBD To Be Determined

Date : 2011-12-07

Page 41 of 41

No. : MH186148

Appendix B

Ancillary Equipment

ITEM NO.	DESCRIPTION	MODEL NO.	FCC ID	REMARK
1	Adapter	HNK075120U	N/A	Two pins (Live / Neutral) only adapter, Input: 100-240V a.c. 50/60Hz 0.5A, Output: 7.5V d.c. 1A.
2	iPhone	A1241	BCGA1241	8GB, S/N: 86003GGMY7H

Date : 2011-12-07
No. : MH186148

Page 42 of 42

Appendix C

Photographs of EUT


Front View of the product



Rear View of the product



Inner Circuit Top View

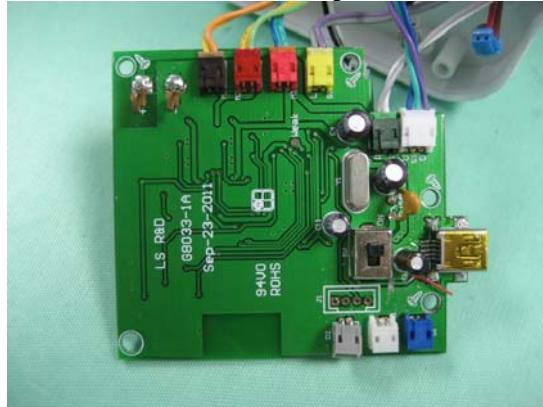

Inner Circuit Bottom View




Date : 2011-12-07

No. : MH186148

Page 43 of 43

Photographs of EUT

Measurement of Radiated Emission Test Set Up

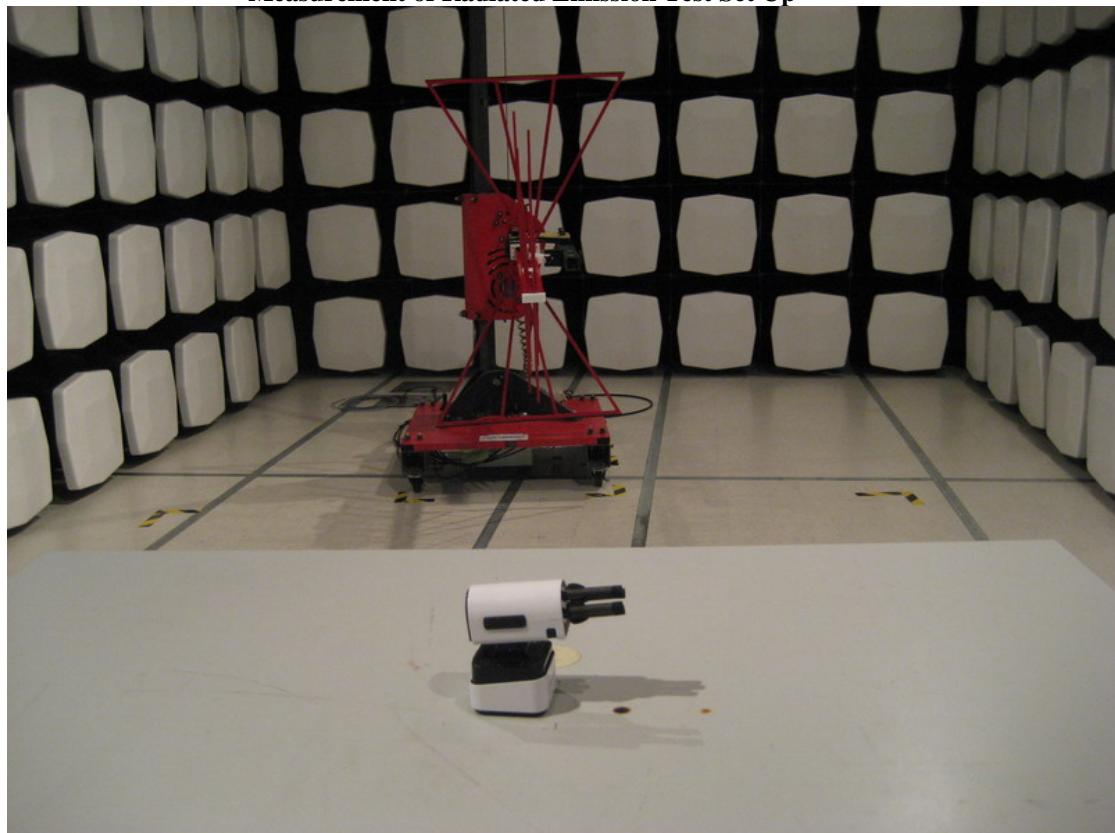


Date : 2011-12-07

No. : MH186148

Page 44 of 44

Photographs of EUT

Measurement of Radiated Emission Test Set Up

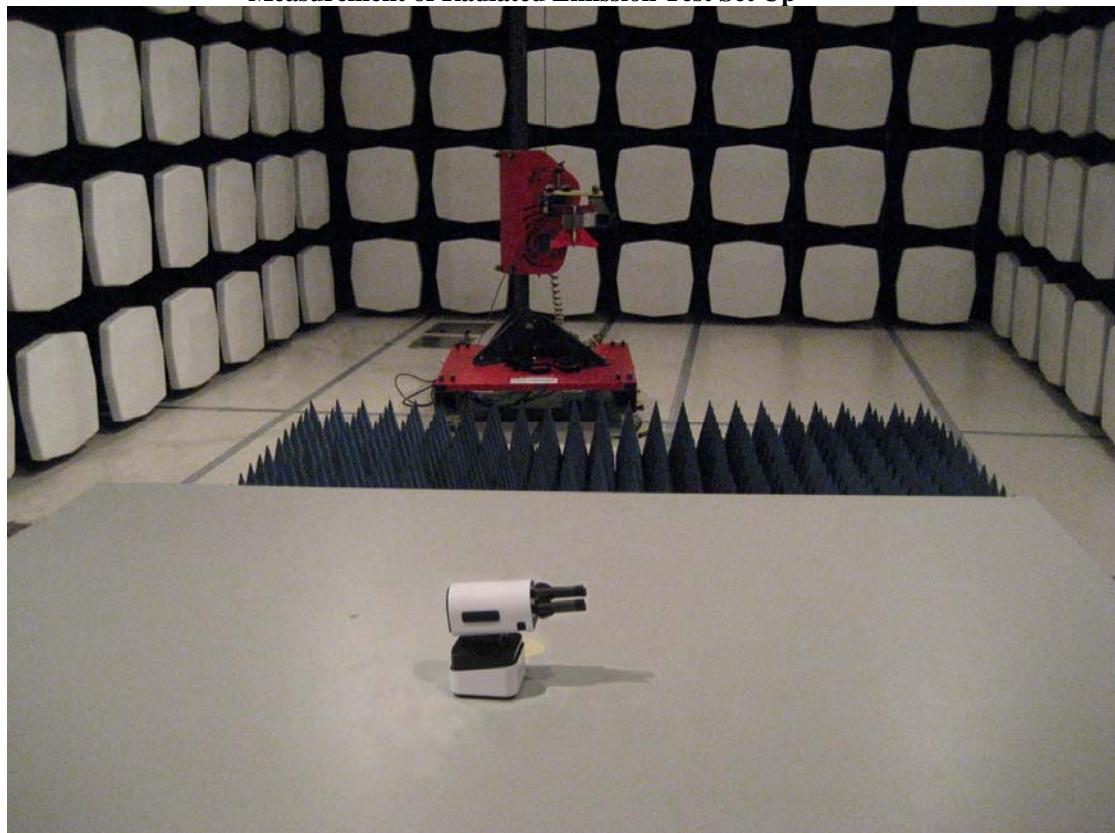

Date : 2011-12-07

No. : MH186148

Page 45 of 45

Photographs of EUT

Measurement of Conducted Emission Test Set Up



***** End of Test Report *****