

Snap-on Diagnostics

Tune up procedure

The output power setting of EUT is set in the factory and followed the max level in below. There is no tune up procedure except factory

default setting:

WLAN: (AV)

802.11b: 12.5 dBm $\pm$ 1dB

802.11g:

Channel 1: 8.5 dBm $\pm$ 1dB

Channel 6:12.5 dBm $\pm$ 1dB

Channel 11: 6.5 dBm $\pm$ 1dB

802.11n HT20:

Channel 1: 6 dBm $\pm$ 1dB

Channel 6:12.5 dBm $\pm$ 1dB

Channel 11: 6.dBm $\pm$ 1dB

802.11n HT40:

Channel 3: 5 dBm $\pm$ 1dB

Channel 6:10 dBm $\pm$ 1dB

Channel 9: 4 dBm $\pm$ 1dB

Bluetooth: (AV)

DH5: Channel 2402 MHz :10 dBm $\pm$ 2dB

Channel 2441 MHz: 11 dBm $\pm$ 2dB


Channel 2480 MHz: 8 dBm $\pm$ 2dB

3DH5: Channel 2402 MHz :11 dBm $\pm$ 2dB

Channel 2441 MHz: 11 dBm $\pm$ 2dB

Channel 2480 MHz: 4 dBm $\pm$ 2dB

Signature

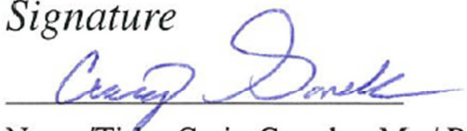

Name/Title: Craig Govekar Mr./ Product Safety Manager

Applicant: Snap-on Diagnostics

ADDRESS: 420 Barclay Blvd Lincolnshire ILUSA 60069

TEL: 847-478-7236

FAX: 847-478-7307

Email: craig.f.govekar@snapon.com