

WiFi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C
 Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.977$ S/m; $\epsilon_r = 50.835$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(7.11, 7.11, 7.11); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Rear Side/Touch/802.11b/CH11/Area Scan (8x26x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.0401 W/kg

Rear Side/Touch/802.11b/CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0690 W/kg

SAR(1 g) = 0.017 W/kg; SAR(10 g) = 0.00628 W/kg

Maximum value of SAR (measured) = 0.0369 W/kg


Rear Side/Touch/802.11b/CH11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.0420 W/kg

SAR(1 g) = 0.023 W/kg; SAR(10 g) = 0.013 W/kg

Maximum value of SAR (measured) = 0.0405 W/kg

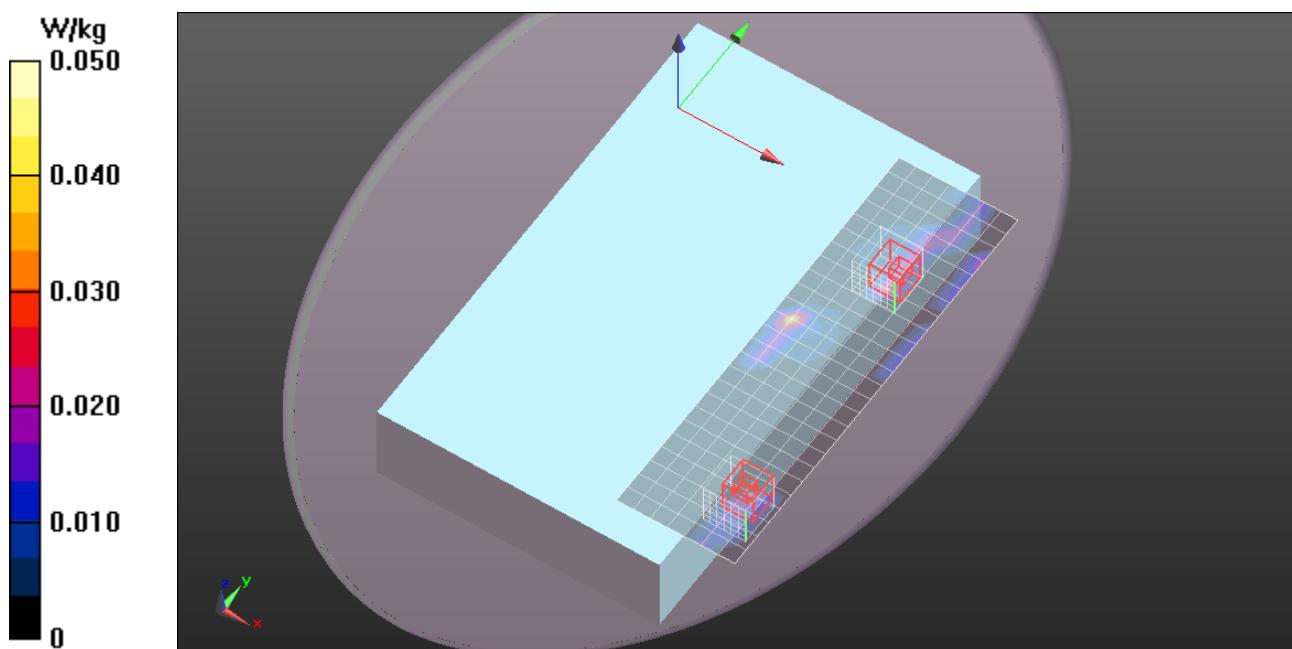

WiFi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1; Room Ambient Temperature: 24.0°C; Liquid Temperature: 23.5°C

Medium parameters used: $f = 2462.2$ MHz; $\sigma = 1.977$ S/m; $\epsilon_r = 50.835$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Area Scan Setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Electronics: DAE3 Sn360; Calibrated: 2013/01/30
- Probe: EX3DV4 - SN3665; ConvF(7.11, 7.11, 7.11); Calibrated: 2012/04/27;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Phantom: ELI 4.0; Type: QDOVA001BA; Serial: 1056

Edge/Edge1/802.11b/CH11/Area Scan (11x31x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.212 W/kg


Edge/Edge1/802.11b/CH11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.830 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.470 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.347 W/kg

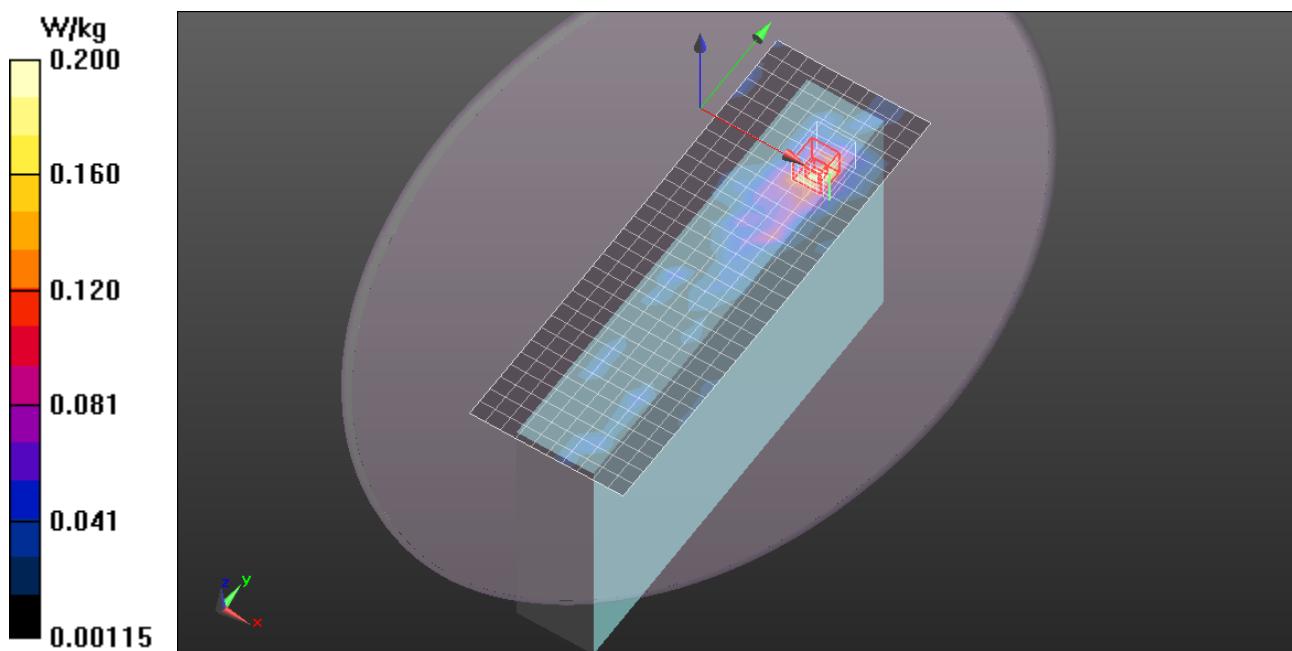

WiFi 2.4GHz Band

Frequency: 2462 MHz; Duty Cycle: 1:1

Edge/Edge1/802.11b/CH11/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm
Maximum value of SAR (measured) = 0.192 W/kg

