

6 Randolph Way Hillsborough, NJ 08844 Tel: (908) 927 9288 Fax: (908) 927 0728

# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

∩f

AIRPLAY FM TRANSMITTER MODEL: IA-AIR-00 FCC ID: STQAIR00

January 3, 2005

This report concerns (check one): Original grant <u>x</u> Class II change <u></u> Equipment type: <u>Low Power Intentional Radiator</u>						
Company agrees to notify the Commi	s, defer until:(date)					
Transition Rules Request per 15.37? yes nox If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR [10-1-90 Edition] provision.						
Report prepared for: Report prepared by: Report number:	XtremeMac Advanced Compliance Lab 0048-041220-01					



The test result in this report IS supported and covered by the NVLAP accreditation

# **Table of Contents**

Report Cover Page	.1
Table of Contents	2
Figures	3
1. GENERAL INFORMATION	
1.1 Verification of Compliance	
1.2 Equipment Modifications	
1.3 Product Information	
1.4 Test Methodology	
1.5 Test Facility	
1.6 Test Equipment	
1.7 Statement of the Document Use	7
2. PRODUCT LABELING	.8
3. SYSTEM TEST CONFIGURATION	9
3.1 Justification	.9
3.2 Special Accessories	.9
3.3 Configuration of Tested System	.9
4. SYSTEM SCHEMATICS	.12
5. RADIATED EMISSION DATA	.13
5.1 Field Strength Calculation	.13
5.2 Test Methods and Conditions	
5.3 Test Data	.14
5.4 Occupied Bandwidth	
6 PHOTOS OF TESTED FUT	17

# Figures

Figure 2.1 FCC ID Label	8
Figure 2.2 Location of Label on Back of the EUT	8
Figure 3.1 Radiated Test Setup, Position X	10
Figure 3.2 Radiated Test Setup, Position Y	10
Figure 3.3 Radiated Test Setup, Position Z	11
Figure 4.1 EUT Schematics	12
Figure 5.1 Bandwidth Plot	15
Figure 6.1 Front View	18
Figure 6.2 Rear View	19
Figure 6.3 Inside View, Cover Opened	20
Figure 6.4 Component Side	21
Figure 6.5 Foil Side	22

Date: January 3, 2005

#### 1. GENERAL INFORMATION

#### 1.1 Verification of Compliance

EUT: AIRPLAY FM TRANSMITTER

Model: IA-AIR-00

Applicant: XtremeMac

15751 SW 41 Street, #100 Fort Lauderdale

FL 33331

Test Type: FCC Part 15C CERTIFICATION

Result: PASS

Tested by: ADVANCED COMPLIANCE LABORATORY

Test Date: January 3, 2005

Report Number: 0048-041220-01

The above equipment was tested by Compliance Laboratory, Advanced Technologies, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15 subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

	Prob. Dist.	Uncertainty(dB)	Uncertainty(dB)	Uncertainty(dB)
		30-1000MHz	1-6.5GHz	Conducted
Combined Std. Uncertainty $u_c$	norm.	±2.36	±2.99	±1.83

Wei Li

Lab Manager

Advanced Compliance Lab

1.2 Equipment Modification	1.	.2]	Eau	ipm	ent i	Mod	dific	catio	n
----------------------------	----	-----	-----	-----	-------	-----	-------	-------	---

N/A

#### 1.3 Product Information

## **System Configuration**

ITEM	DESCRIPTION	FCC ID	CABLE
Product	AIRPLAY FM	STQAIR00	
	TRANSMITTER IA-AIR-00		
Housing	PLASTICS		
Power Supply	3.3V DC Battery		
Operation Freq.	88.1~107.9 MHz(200kHz step)		
Device Type	Low Power Intentional		
	Radiator		

(1) EUT submitted for grant.

## 1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-2001 at an antenna to EUT distance of 3 meters.

#### 1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at Hillsborough, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

#### 1.6 Test Equipment

Manufacture	Model	Serial No.	Description	Last Cal dd/mm/y	Cal Due dd/mm/y
				y	y
Hewlett-Packard	HP8546A	3625A00341	EMI Receiver	12/01/04	12/01/05
EMCO	3104C	9307-4396	20-300MHz Biconical Antenna	12/02/04	12/02/05
EMCO	3146	9008-2860	200-1000MHz Log-Periodic Antenna	09/02/04	09/02/05
Fischer Custom	LISN-2	900-4-0008	Line Impedance Stabilization Networks	03/07/04	03/07/05
Fischer Custom	LISN-2	900-4-0009	Line Impedance Stabilization Networks	03/07/04	03/07/05
EMCO	6502	2665	10KHz-30MHz Active Loop Antenna	27/02/04	27/02/05
EMCO	3115	4945	Double Ridge Guide Horn Antenna	15/09/04	15/09/05

All Test Equipment Used are Calibrated Traceable to NIST Standards.

## 1.7 Statement for the Document Use

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

#### 2. PRODUCT LABELING

# FCC ID: STQAIR00

This device complies with part 15 of the FCC Rules. Operating is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Figure 2.1 FCC ID Label



Figure 2.2 FCC ID Label Location

## 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was permanently attached to the EUT. Emissions at the lowest operation frequency (88.1MHz), middle frequency (98.1MHz) and highest frequency (107.9MHz) were investigated. The worst case at 107.9MHz operation was recorded for final data. The audio input was set to max. level during the test.

## 3.2 Special Accessories

N/A

## 3.3 Configuration of Tested System

Figure 3.1 to Figure 3.3 illustrate this system, which was tested standing along.



Figure 3.1 Radiated Test Setup-Position X



Figure 3.2 Radiated Test Setup-Position  $\mathbf{Y}$ 



Figure 3.3 Radiated Test Setup-Position Z

# 4. SYSTEM SCHEMATICS

See attachment.

**Figure 4.1 System Schematics** 

#### 5. RADIATED EMISSION DATA

## 5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA + AF + CF + AG$$

where FS: Corrected Field Strength in dBµV/m

RA: Amplitude of EMI Receiver before correction in dBµV

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

#### **5.2 Test Methods and Conditions**

The initial step in collecting radiated data is a EMI Receiver scan of the measurement range below 30MHz using peak detector and 9KHz IF bandwidth / 30KHz video bandwidth. For the range 30MHz - 1GHz, 120KHz IF bandwidth / 120KHz video bandwidth are used. Both bandwidths are 1MHz for above 1GHz measurement. Up to 10<sup>th</sup> harmonics were investigated.

#### 5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Emissions at the lowest operation frequency (88.1MHz), middle frequency (98.1MHz) and highest frequency (107.9MHz) were investigated. The worst case at 107.9MHz operation was recorded for final data.

Test Personnel: Lamburg

Typed/Printed Name: Edward Lee

Date:

January 3, 2005

Radiated Test Data @107.9MHz Operation

Radiated Test Data (2/10/13/11112 Operation							
Frequenc	Polarity	Height	Azimuth	Peak	FCC	Difference	
y	[H or V],			Reading	3m	from limit	
	Position	(m)	(Degree)	$(dB\mu V/m)$	Limit <sup>(1)</sup>	(dB)	
(MHz)	[X,Y,Z]				$(dB\mu V/m)$		
107.9	H-X <sup>(2)</sup>	1.3	10	40.4	48.0	-7.6	
215.8	H-X	1.3	10	37.0	46.0	-9	
323.7	H-X	1.3	10	34.2	46.0	-11.8	
107.9	H-Y	1.2	10	41.4	48.0	-6.6	
215.8	H-Y	1.2	20	40.0	46.0	-6	
323.7	H-Y	1.2	20	37.5	46.0	-8.5	
431.6	H-Y	1.2	20	36.0	46.0	-10	
107.9	H-Z	1.2	0	42.1	48.0	-5.9	
215.8	H-Z	1.2	0	38.7	46.0	-7.3	
323.7	H-Z	1.2	0	37.9	46.0	-8.1	
431.6	H-Z	1.2	0	35.8	46.0	-10.2	
107.9	V-X	1.1	10	41.5	48.0	-6.5	
215.8	V-X	1.1	10	38.8	46.0	-7.2	
323.7	V-X	1.1	10	37.0	46.0	-9	
431.6	V-X	1.1	10	34.9	46.0	-11.1	
107.9	V-Y	1.2	80	39.8	48.0	-8.2	
215.8	V-Y	1.2	80	37.5	46.0	-8.5	
323.7	V-Y	1.2	80	35.0	46.0	-11	
107.9	V-Z	1.2	350	40.9	48.0	-7.1	
215.8	V-Z	1.2	350	37.7	46.0	-8.3	
323.7	V-Z	1.2	350	34.4	46.0	-11.6	

<sup>(1)</sup> The average limit of emission strength within permitted 200kHz band is 250uV/m @3m (48dBuV/m) between 88-108MHz per Section 15.239 (b). In this case, maximum peak reading of the emissions is under the limit in Section 15.209.

<sup>(2)</sup> See Figure 3.1, 3.2 and 3.3 for definition of position X, Y, Z.

# 5.4 Occupied Bandwidth

Emissions from the EUT shall be confined within a band 200 kHz wide centered on the operating frequency. The 200kHz band shall lie wholly within the frequency range of 88-108MHz.

In this case, maximum peak reading of the emissions is under the limit in Section 15.209.

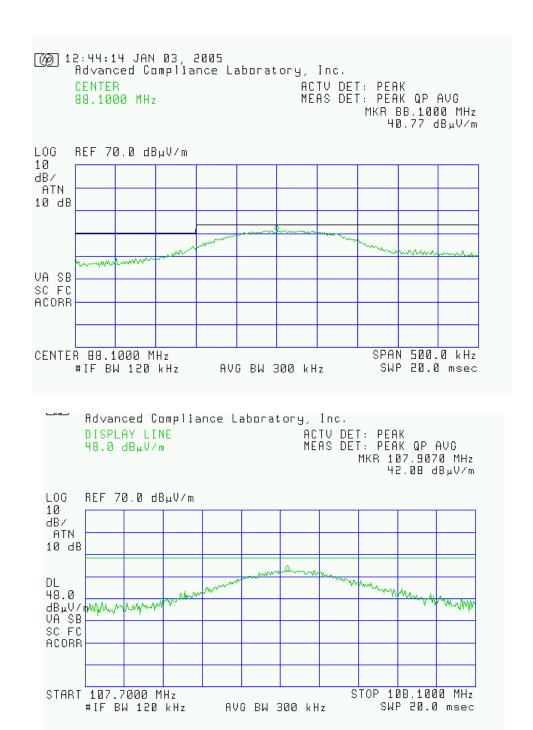


Figure 5.1 Occupied Bandwidth

# 6. PHOTOS OF TESTED EUT

The following photos show the inside details of the EUT.