

The Testcenter facility 'Dosimetric Test Lab' within IMST GmbH is accredited by the German National 'Deutsche Akkreditierungsstelle GmbH (DAkkS)' for testing according to the scope as listed in the accreditation certificate: D-PL-12139-01-01.

Appendix for the Report

Dosimetric Assessment of the SDP660TU FM Analogue PMR and Digital DMR (TDMA) Two-Way Radio from Simoco (FCC ID: STZSDP600TU) (IC: 7068A-SDP600TU)

According to the FCC Requirements SAR Distribution Plots

July 24, 2013

IMST GmbH

Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer

TRaC Global Ltd
Unit 1, Pendle Place, Skelmersdale,
West Lancs, WN8 9PN,
UK

The test results only relate to the items tested. This report shall not be reproduced except in full without the written approval of the testing laboratory. This version supersedes all previous versions of this report.

1 SAR Distribution Plots, Body Worn Measurement

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [SDP660_b4h_400Hi_1_clip_hs.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 400.125 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 400.125$ MHz; $\sigma = 0.91$ mho/m; $\epsilon_r = 56.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.62, 7.62, 7.62); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x22x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.93 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 78.8 V/m; Power Drift = -0.080 dB

Peak SAR (extrapolated) = 7.27 W/kg

SAR(1 g) = 5.32 mW/g; SAR(10 g) = 4.08 mW/g

Maximum value of SAR (measured) = 5.55 mW/g

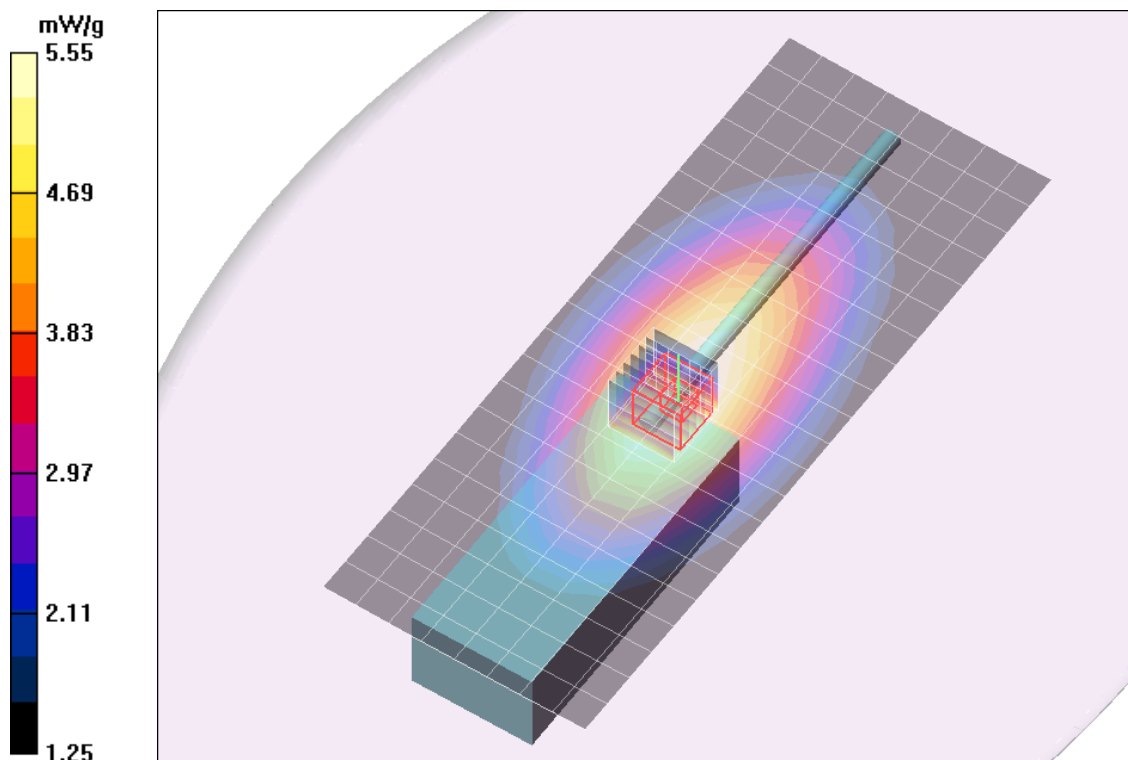


Fig. 1: SAR distribution for Simoco SDP660TU, low channel, 400.125 MHz, body worn configuration, belt clip and remote speaker attached (May 08, 2013; Ambient Temperature: 22.1°C; Liquid Temperature: 21.7°C).

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [SDP660 b4h 412Hi 1 clip hs.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 412.95 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 412.95$ MHz; $\sigma = 0.922$ mho/m; $\epsilon_r = 56$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.62, 7.62, 7.62); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x22x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.28 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 69.5 V/m; Power Drift = -0.158 dB

Peak SAR (extrapolated) = 6.72 W/kg

SAR(1 g) = 4.85 mW/g; SAR(10 g) = 3.69 mW/g

Maximum value of SAR (measured) = 5.07 mW/g

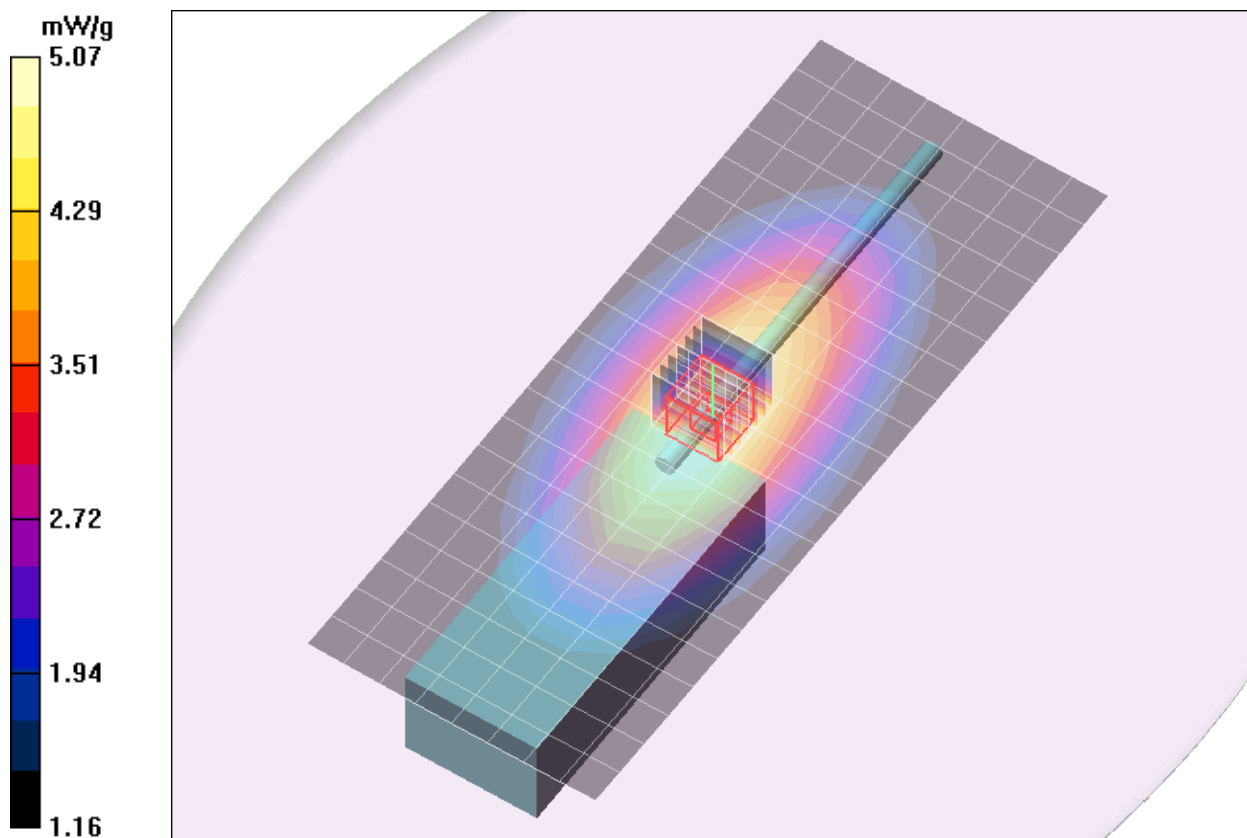


Fig. 2: SAR distribution for Simoco SDP660TU, mid channel, 412.950 MHz, body worn configuration, belt clip and remote speaker attached (May 08, 2013; Ambient Temperature: 22.1°C; Liquid Temperature: 21.7°C).

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [SDP660 b4h 459Hi 1 clip hs.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 459.075 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 460$ MHz; $\sigma = 0.95$ mho/m; $\epsilon_r = 55.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.62, 7.62, 7.62); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x22x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.02 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.6 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 5.44 W/kg

SAR(1 g) = 3.76 mW/g; SAR(10 g) = 2.76 mW/g

Maximum value of SAR (measured) = 3.93 mW/g

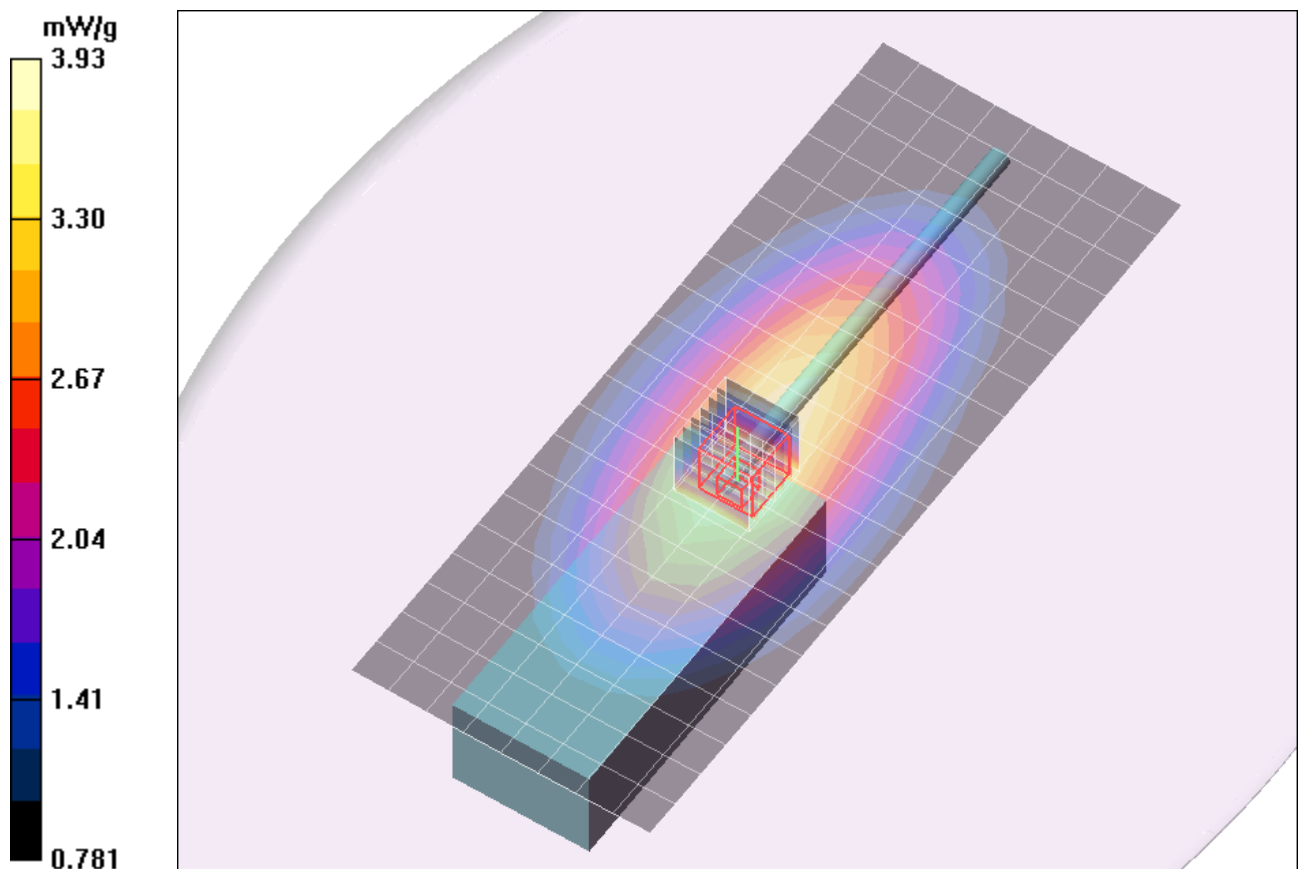


Fig. 3: SAR distribution for Simoco SDP660TU, mid channel, 459.075 MHz, body worn configuration, belt clip and remote speaker attached (May 08, 2013; Ambient Temperature: 22.1°C; Liquid Temperature: 21.7°C).

Test Laboratory: Imst GmbH, DASY Yellow (II); File Name: [SDP660 b4h 479Hi 1 clip hs.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 479.925 MHz; Duty Cycle: 1:1

Medium parameters used (extrapolated): $f = 479.925$ MHz; $\sigma = 0.98$ mho/m; $\epsilon_r = 55.5$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.62, 7.62, 7.62); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x22x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.89 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 59.0 V/m; Power Drift = -0.105 dB

Peak SAR (extrapolated) = 5.21 W/kg

SAR(1 g) = 3.56 mW/g; SAR(10 g) = 2.6 mW/g

Maximum value of SAR (measured) = 3.75 mW/g

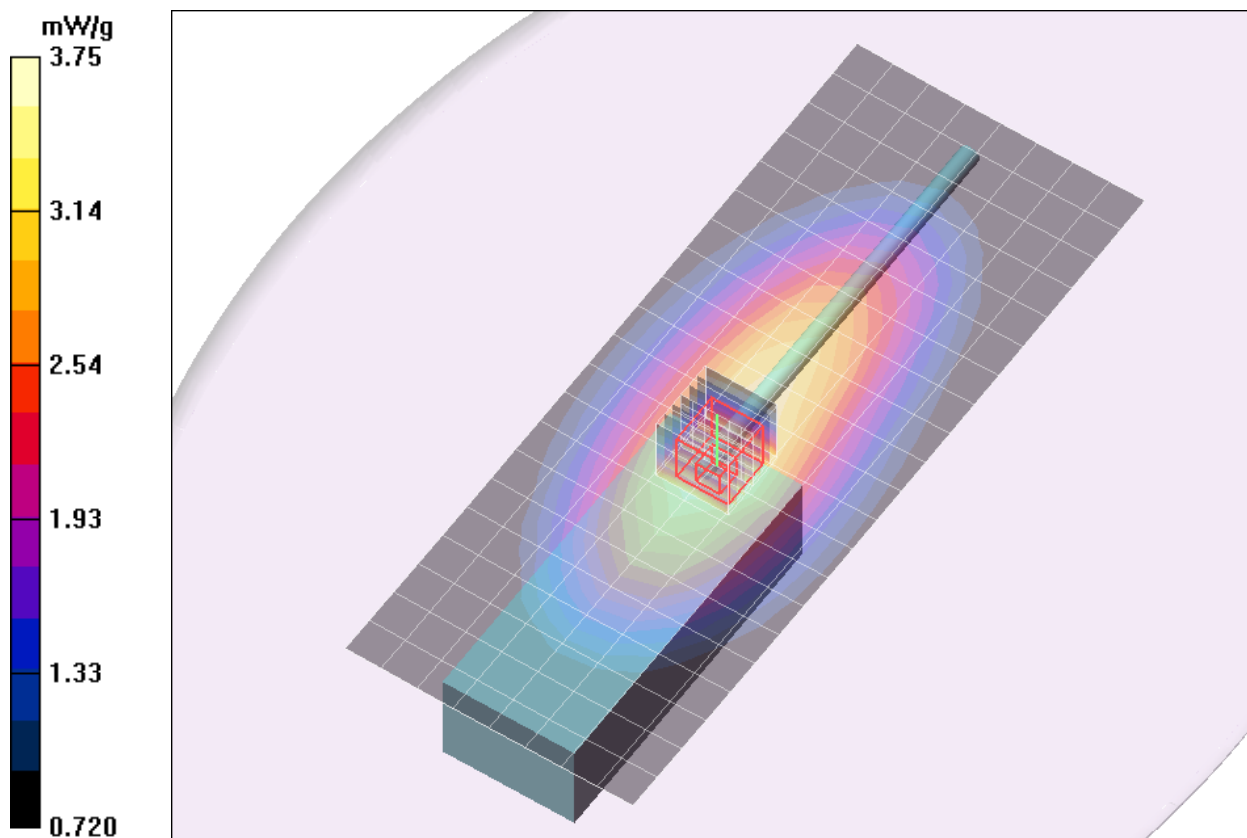


Fig. 4: SAR distribution for Simoco SDP660TU, high channel, 479.925 MHz, body worn configuration, belt clip and remote speaker attached (May 08, 2013; Ambient Temperature: 22.1°C; Liquid Temperature: 21.7°C).

2 SAR Distribution Plots, PTT Configuration Measurement

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [SDP660_b4hm_400Hi_PTT_25mm.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 400.125 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 400.125$ MHz; $\sigma = 0.83$ mho/m; $\epsilon_r = 43$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.35, 7.35, 7.35); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x23x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 4.90 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 86.6 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 6.83 W/kg

SAR(1 g) = 5.28 mW/g; SAR(10 g) = 4.13 mW/g

Maximum value of SAR (measured) = 5.49 mW/g

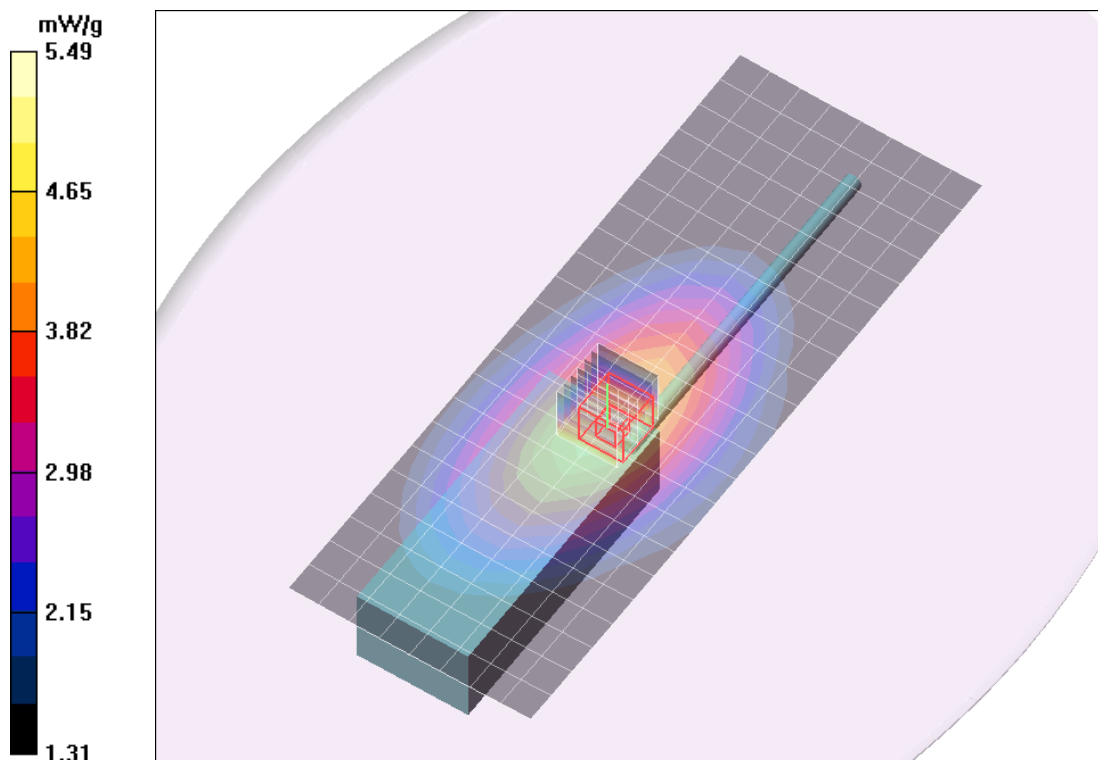


Fig. 5: SAR distribution for Simoco SDP660TU, low channel, 400.125 MHz, PTT configuration, 25 mm distance, belt clip attached (May 02, 2013; Ambient Temperature: 21.9°C; Liquid Temperature: 21.2°C).

Test Laboratory: IMST GmbH, DASY Blue (I); **File Name:** [SDP660 b4hm 412Hi PTT 25mm.da4](#)

DUT: Simoco; **Type:** SDP660TU; **Serial:** 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 412.95 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 412.95$ MHz; $\sigma = 0.83$ mho/m; $\epsilon_r = 42.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.35, 7.35, 7.35); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x23x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.65 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 77.0 V/m; Power Drift = 0.148 dB

Peak SAR (extrapolated) = 6.61 W/kg

SAR(1 g) = 5.08 mW/g; SAR(10 g) = 3.97 mW/g

Maximum value of SAR (measured) = 5.29 mW/g

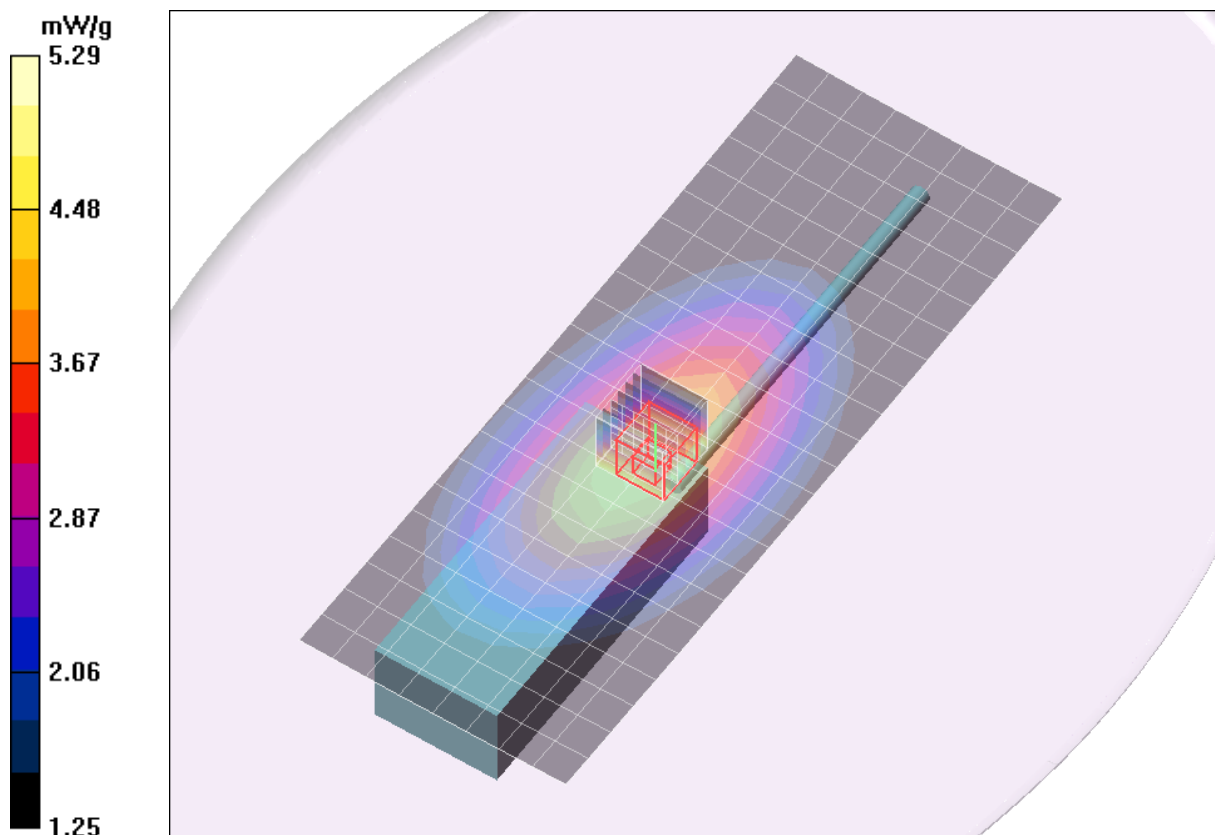


Fig. 6: SAR distribution for Simoco SDP660TU, mid channel, 412.950 MHz, PTT configuration, 25 mm distance, belt clip attached (May 02, 2013; Ambient Temperature: 21.9°C; Liquid Temperature: 21.2°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [SDP660 b4hm 459Hi PTT 25mm.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 459.075 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 459.075$ MHz; $\sigma = 0.87$ mho/m; $\epsilon_r = 41.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.35, 7.35, 7.35); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x23x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.30 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 61.2 V/m; Power Drift = 0.083 dB

Peak SAR (extrapolated) = 4.19 W/kg

SAR(1 g) = 3.18 mW/g; SAR(10 g) = 2.45 mW/g

Maximum value of SAR (measured) = 3.32 mW/g

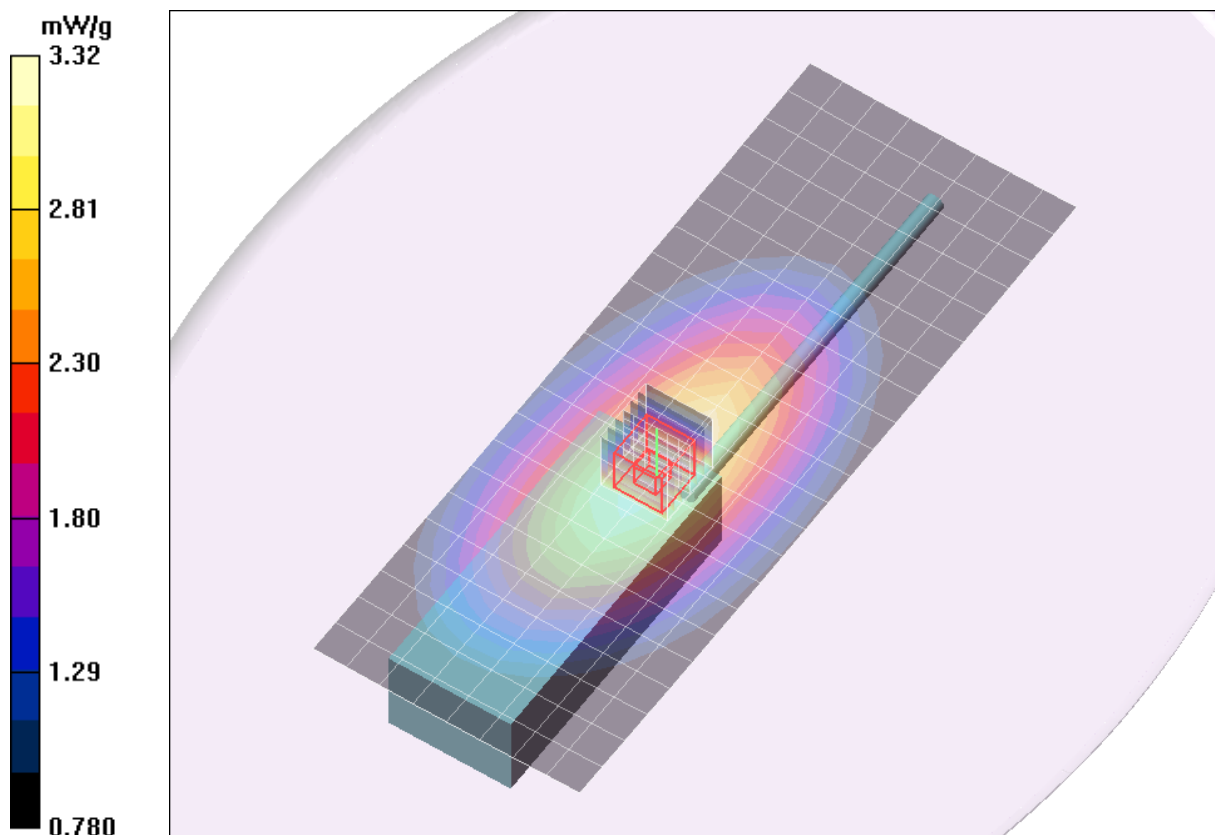


Fig. 7: SAR distribution for Simoco SDP660TU, mid channel, 459.075 MHz, PTT configuration, 25 mm distance, belt clip attached (May 02, 2013; Ambient Temperature: 21.9°C; Liquid Temperature: 21.2°C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [SDP660_b4hm_479Hi_PTT_25mm.da4](#)

DUT: Simoco; Type: SDP660TU; Serial: 56KTU123800FZ

Program Name: DMR

Communication System: CW; Frequency: 479.925 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 479.925$ MHz; $\sigma = 0.89$ mho/m; $\epsilon_r = 41.4$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(7.35, 7.35, 7.35); Calibrated: 19.02.2013
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 20.09.2012
- Phantom: ELI 4; Type: ELI 4;
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Body Worn/Area Scan (9x23x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 2.88 mW/g

Body Worn/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.5 V/m; Power Drift = -0.103 dB

Peak SAR (extrapolated) = 3.59 W/kg

SAR(1 g) = 2.72 mW/g; SAR(10 g) = 2.08 mW/g

Maximum value of SAR (measured) = 2.85 mW/g

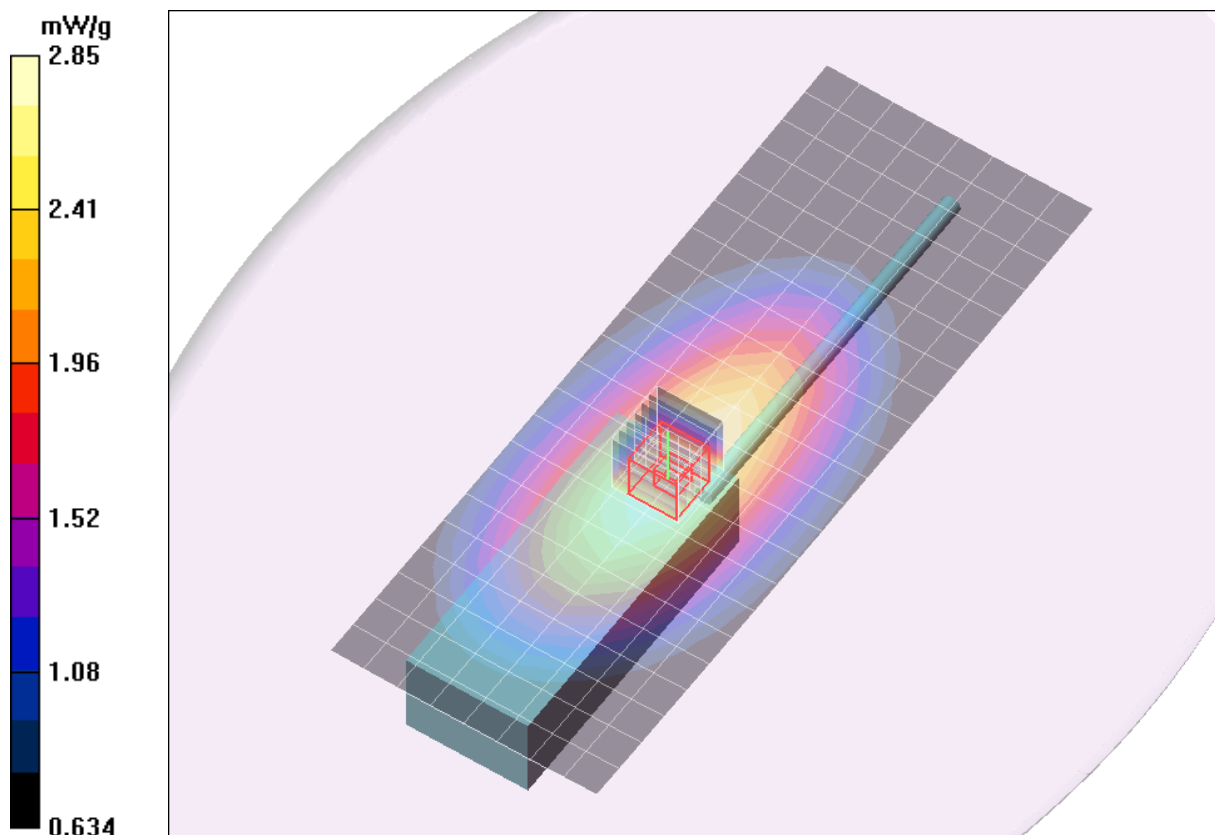


Fig. 8: SAR distribution for Simoco SDP660TU, high channel, 479.925 MHz, PTT configuration, 25 mm distance, belt clip attached (May 02, 2013; Ambient Temperature: 21.9°C; Liquid Temperature: 21.2°C).