

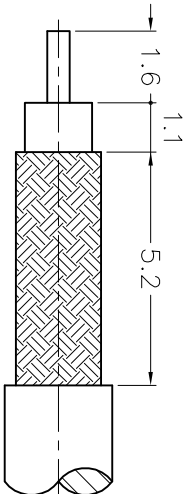



REVISIONS	
ISS	ZONE
DESCRIPTION\PER REQUEST\DATE	

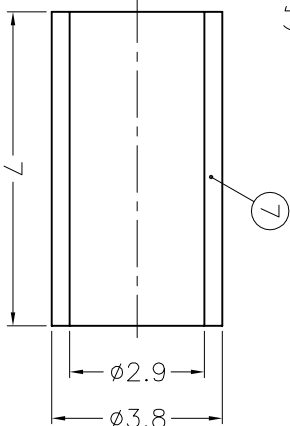

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

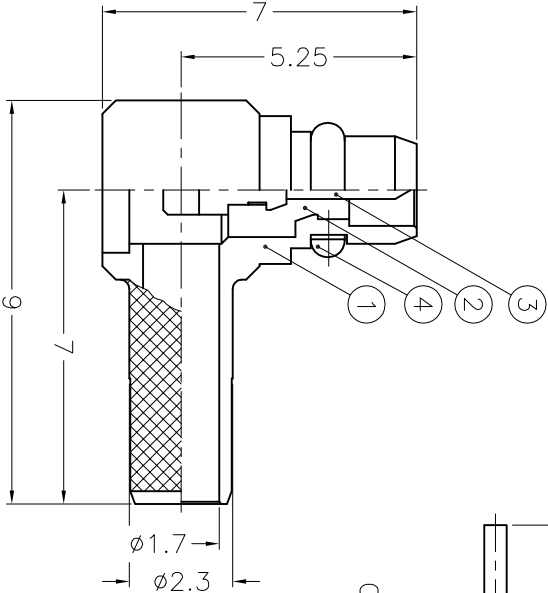

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- 1. BRASS PER 00-B-626
 - 2. BRASS PER 00-B-613
 - 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 4. BERYLLIUM COPPER PER 00-C-530
 - 5. GOLD PL. 30 MIN. THICK OVER NICKEL PL. 100 MIN. THICK OVER COPPER STRIKE
 - 6. TEFLON MIL-P-19468
 - 7. ZINC DIECAST
 - 8. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 300 MIN. THICK OVER COPPER STRIKE



- 1. CRIMPED FERRULE
- HEX. CRIMP SIZE .128"
- 2. CONTACT PIN TO SOLDER

DIMENSIONS ARE IN MILLIMETERS				PART NO.	
7	FERRULE	COPPER	NOTE 3	1	FR-38/29X7C
6	COVER	NOTE 2	NOTE 3	1	CV-29X05-T
5	INSULATOR	NOTE 6	NATURAL	1	MMCX112A1-004
UNLESS OTHERWISE SPECIFIED TOLERANCES				DATE	
0.5-6 = ±0.2				05-14-03'	
6-30 = ±0.4				DATE	
30-120 = ±0.6				05-14-03'	
120-315 = ±1				DATE	
315-1000 = ±1.6				05-14-03'	
1000-2000 = ±2.4				DATE	
4	RETAINER RING	NOTE 4	NOTE 3	1	MMCX1121A1-5-D
3	CONTACT PIN	NOTE 1	NOTE 5	1	CP09AAM01A
2	INSULATOR	NOTE 6	NATURAL	1	NS09AAL01A
1	BODY	NOTE 7	NOTE 8	1	BD09AAL01A
NO. DESCRIPTION				DRAWING NO.	
1				DRAWING NO.	

Amphenol

Danbury,CT,USA-Tainan,Taiwan-Shenzhen,China

MMCX R/A CRIMP PLUG
(FOR RG-174/U,188A/U,316/U)

MMCX112D1-3GT30G-316U-50