



FCC Test Report

Equipment : INFOTAG 2.7
Brand Name : DIGI
Model No. : IFT-2330
FCC ID : SUFIFT2330
Standard : 47 CFR FCC Part 15.249
Operating Band : 2400 MHz – 2483.5 MHz
FCC Classification : DXX
Applicant : Teraoka Weigh System Pte Ltd
Manufacturer : 4 Leng Kee Rd, #05-03/04/05&11, SIS Building,
Singapore 159088

The product sample received on Jun. 13, 2013 and completely tested on Jun. 13, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Wayne Hsu / Assistant Manager



Testing Laboratory
1190



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories and Support Equipment	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT.....	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	10
3.1	AC Power-line Conducted Emissions	10
3.2	Emission Bandwidth	12
3.3	Fundamental Emissions	14
3.4	Transmitter Radiated Unwanted Emissions	16
4	TEST EQUIPMENT AND CALIBRATION DATA.....	26
APPENDIX A. TEST PHOTOS		A1-A2



Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	See Note.	FCC 15.207	N/A
3.2	15.215(c)	Emission Bandwidth	0.53 MHz; fall in band	Information only	Complied
3.3	15.249(a)	Fundamental Emissions	[dBuV/m at 3m]: 50.91 (Margin 43.09dB) average	[dBuV/m at 3m]: average: 94	Complied
3.4	15.249(a)/(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 35.82MHz 32.37 (Margin 7.63dB) - PK	Harmonics: 40 dBuV/m@3m Other band: 50 dB or FCC 15.209, whichever is the lesser attenuation.	Complied

Note: The EUT consumes DC power, therefore, conducted emission test is not applicable.



Revision History



1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information					
Frequency Range (MHz)	Modulation	Ch. Frequency (MHz)	Channel Number	Fundamental Field Strength (dBuV/m)	Co-location
2400-2483.5	GFSK	2402-2480	0-78 [79]	50.91	N/A
Note 1: Field strength performed average level at 3m.					
Note 2: Co-location, Co-location is generally defined as simultaneously transmitting (co-transmitting) antennas within 20 cm of each other. (i.e., EUT has simultaneously co-transmitting that operating 2.4GHz and 5GHz.)					

1.1.2 Antenna Information

Antenna Category	
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas) ; Unique antenna connector

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input checked="" type="checkbox"/> Pre-Production ; <input type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
<input type="checkbox"/>	Other:

1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input type="checkbox"/>	Operated normally mode for worst duty cycle
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Duty Cycle Correction Factor [dB] – (20 log x)
<input checked="" type="checkbox"/> 0.6449%	43.81
If worst duty < 100%, average emission = peak emission + 20 log x	



1.1.5 EUT Operational Condition

Supply Voltage	<input type="checkbox"/> AC mains	<input checked="" type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input type="checkbox"/> Host	<input checked="" type="checkbox"/> Battery

1.2 Support Equipment

Support Equipment				
No.	Equipment	Brand Name	Model Name	Serial No.
1	NOTEBOOK	DELL	E5420	-
2	CONTROLLER	Teraoka	SMARTRF05	-
3	USB CABLE	Maxxtro	2725	-

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR FCC Part 15
- ANSI C63.10-2009

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD :	No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C	
		TEL :	886-3-327-3456	FAX : 886-3-327-0973
Test Condition		Test Site No.	Test Engineer	Test Environment
RF Conducted		TH01-HY	Ian Du	25°C / 65%
Radiated Emission		03CH08-HY	Daniel Hsu	24°C / 65%

Test site registered number [636805] with FCC.
Test site registered number [4086B-2] with IC.



1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty			
Test Item		Uncertainty	Limit
AC power-line conducted emissions		±2.26 dB	N/A
Emission bandwidth,		±1.42 %	N/A
Unwanted emissions, conducted	30 – 1000 MHz	±0.51 dB	N/A
	1 – 18 GHz	±0.67 dB	N/A
	18 – 40 GHz	±0.83 dB	N/A
	40 – 200 GHz	N/A	N/A
All emissions, radiated	30 – 1000 MHz	±2.56 dB	N/A
	1 – 18 GHz	±3.59 dB	N/A
	18 – 40 GHz	±3.82 dB	N/A
	40 – 200 GHz	N/A	N/A
Temperature		±0.8 °C	N/A
Humidity		±3 %	N/A
DC and low frequency voltages		±3 %	N/A
Time		±1.42 %	N/A
Duty Cycle		±1.42 %	N/A



2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Test Mode	Field Strength (dBuV/m at 3 m)
GFSK-Transmit	50.91

2.2 Test Channel Frequencies Configuration

Test Channel Frequencies Configuration	
Test Mode	Test Channel Frequencies (MHz)
GFSK-Transmit	2402-(F1), 2440-(F2), 2480-(F3)

2.3 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests							
Tests Item	Emission Bandwidth, Fundamental Emissions, Radiated Unwanted Emissions						
Test Condition	Radiated measurement						
User Position	<input type="checkbox"/> EUT will be placed in fixed position. <input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes. The worst planes is X. <input checked="" type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed three orthogonal planes. The worst plane is X.						
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. Transmit						
Test Mode	GFSK-Transmit						
Orthogonal Planes of EUT	<table><thead><tr><th>X Plane</th><th>Y Plane</th><th>Z Plane</th></tr></thead><tbody><tr><td></td><td></td><td></td></tr></tbody></table>	X Plane	Y Plane	Z Plane			
X Plane	Y Plane	Z Plane					

2.4 Test Setup Diagram

Test Setup Diagram - Radiated Below 1GHz Test



Remote workstation

Test Setup Diagram - Radiated Above 1GHz Test



Remote workstation

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

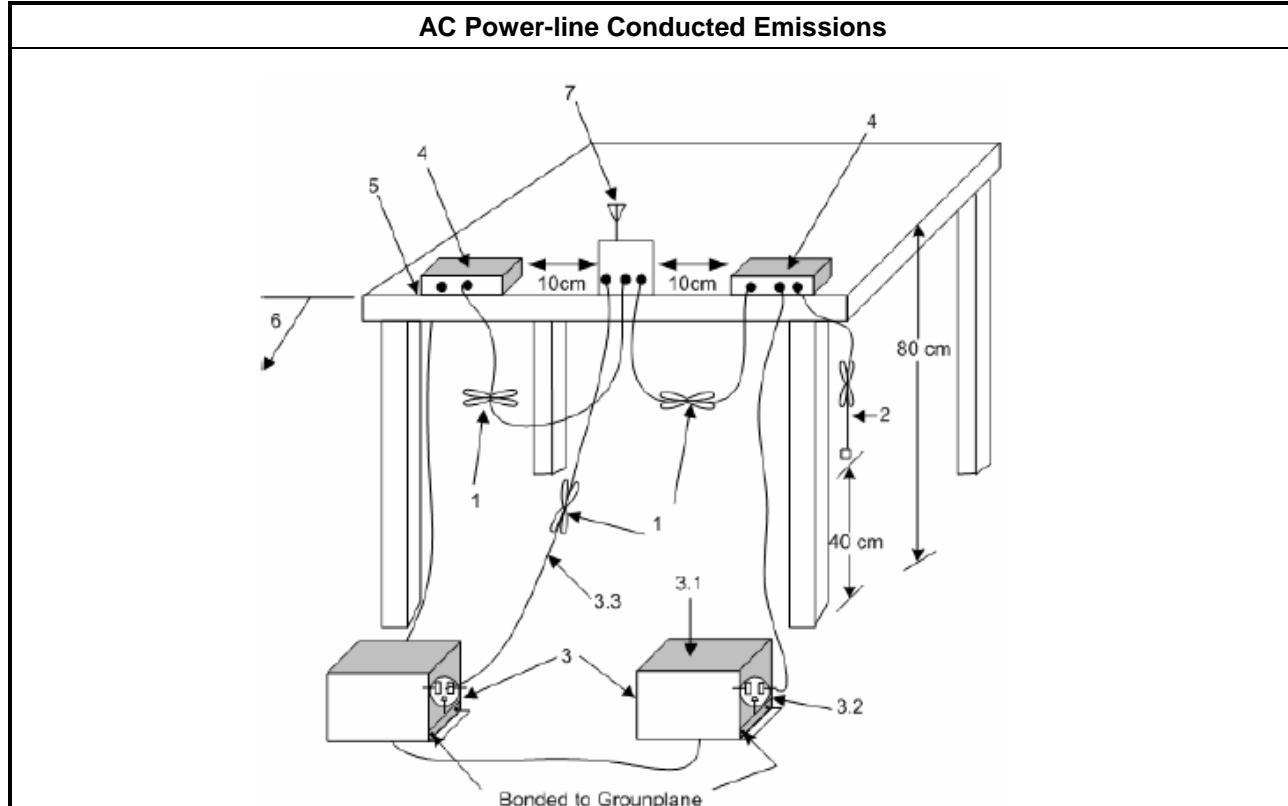



3.1.5 Test Result of AC Power-line Conducted Emissions

The EUT consumes DC power, therefore, conducted emission test is not applicable.

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit
<input checked="" type="checkbox"/> Emission bandwidth falls completely within authorized band.


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method
<input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 6.9.1 for 20 dB emission bandwidth and 99% occupied bandwidth measurement.


3.2.4 Test Setup

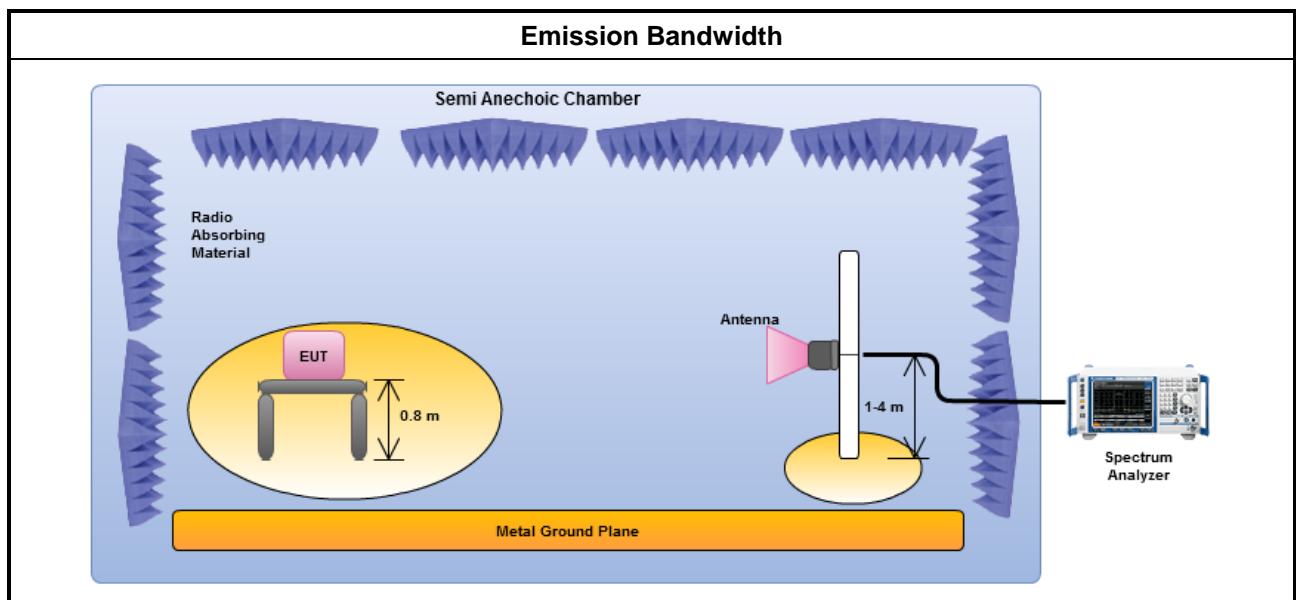

3.2.5 Test Result of Emission Bandwidth

Emission Bandwidth Result					
Modulation Mode	Frequency (MHz)	99% Bandwidth (MHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)	20dB BW (MHz)
GFSK-Transmit	2402	0.48	2401.7221	-	0.52
GFSK-Transmit	2440	0.47	-	-	0.53
GFSK-Transmit	2480	0.47	-	2480.2518	0.53
Limit		N/A	2400	2483.5	N/A
Result			Complied		

Worst Emission Bandwidth Plots

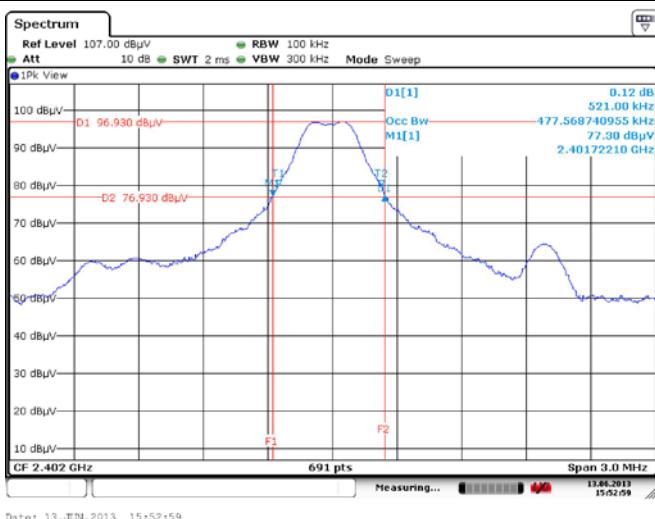

3.3 Fundamental Emissions

3.3.1 Fundamental Emissions Limit

Fundamental Emissions E-Field Strength Limit (3m)

- | |
|---|
| <input type="checkbox"/> 902-928 MHz Band: 94 dBuV/m (quasi peak) |
| <input checked="" type="checkbox"/> 2400-2483.5 MHz Band: 94 dBuV/m (average) |
| <input type="checkbox"/> 5725-5785 MHz Band: 94 dBuV/m (average) |

3.3.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

- | |
|---|
| <input checked="" type="checkbox"/> The average emission levels shall be measured in [duty cycle \geq 100 or by duty cycle correction factor]. |
| <input checked="" type="checkbox"/> For the transmitter emissions shall be measured using following options below: |
| <input type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%. |
| <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(dwell\ time/100\ ms)$. Average emission = peak emission + $20\log(duty\ cycle)$. |
| <input checked="" type="checkbox"/> Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit. |
| <input checked="" type="checkbox"/> For radiated measurement, refer as ANSI C63.10, clause 6.6 for radiated emissions |

3.3.4 Test Setup

Fundamental Emissions

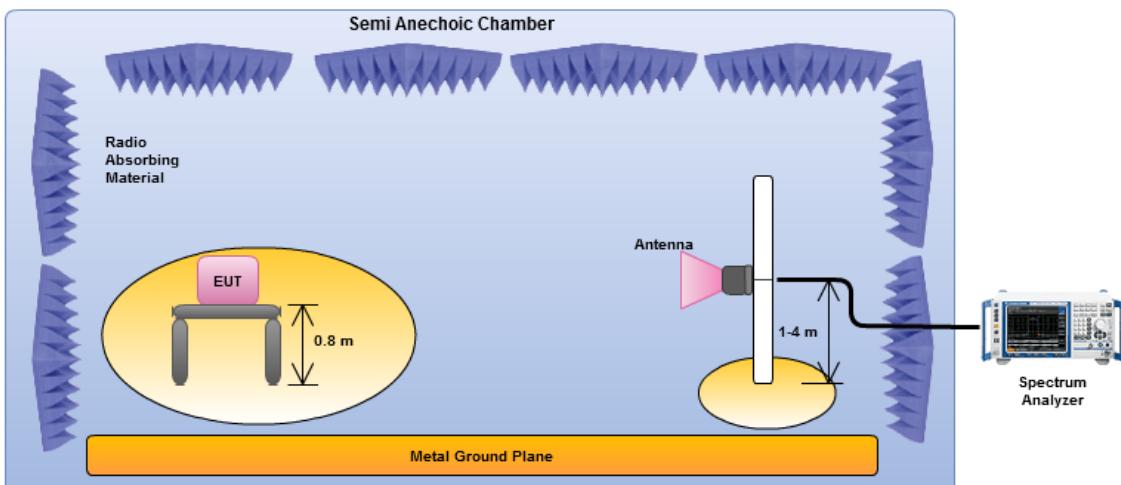



3.3.5 Test Result of Fundamental Emissions

Field Strength of Fundamental Emissions Result									
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Margin (dB)	Limit (dBuV/m)@3m	Type				
GFSK-Transmit	2402	94.20	19.80	114	peak				
GFSK-Transmit	2402	50.39	43.61	94	average				
GFSK-Transmit	2440	94.36	19.64	114	peak				
GFSK-Transmit	2440	50.55	43.45	94	average				
GFSK-Transmit	2480	94.72	19.28	114	peak				
GFSK-Transmit	2480	50.91	43.09	94	average				
Result		Complied							
Note 1: Measurement worst emissions of receive antenna polarization: Horizontal.									
Note 2: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).									



3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit	
Harmonics:	
<input checked="" type="checkbox"/> 54 dBuV/m (average)	
Other Unwanted Emissions:	
<input checked="" type="checkbox"/> 50 dB below the level of the fundamental or FCC 15.209, whichever is the lesser attenuation.	

3.4.2 Measuring Instruments


Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method – General Information	
<input checked="" type="checkbox"/>	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).
<input type="checkbox"/>	Measurements in the frequency range 5 GHz - 10GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range 10 GHz - 18GHz are typically made at a closer distance 1m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	Measurements in the frequency range above 18 GHz - 25GHz are typically made at a closer distance 0.5m, because the instrumentation noise floor is typically close to the radiated emission limit.
<input checked="" type="checkbox"/>	The average emission levels shall be measured in [duty cycle \geq 98 or duty factor].
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2.2 bandedge testing shall be performed at the lowest frequency channel and highest frequency channel within the allowed operating band.
<input checked="" type="checkbox"/>	For the transmitter unwanted emissions shall be measured using following options below:
<input type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.3 (Reduced VBW) – Duty cycle \geq 100%.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$. Average emission = peak emission + $20 \log(\text{duty cycle})$.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 4.2.3.2.2 measurement procedure peak limit.
<input checked="" type="checkbox"/>	For the transmitter bandedge emissions shall be measured using following options below:
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.2 for band-edge testing.
<input type="checkbox"/>	Refer as ANSI C63.10, clause 6.9.3 for marker-delta method for band-edge measurements.
<input checked="" type="checkbox"/>	For radiated measurement.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1000 MHz.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.6 for radiated emissions from above 1 GHz.

3.4.4 Test Setup

Transmitter Radiated Bandedge Emissions

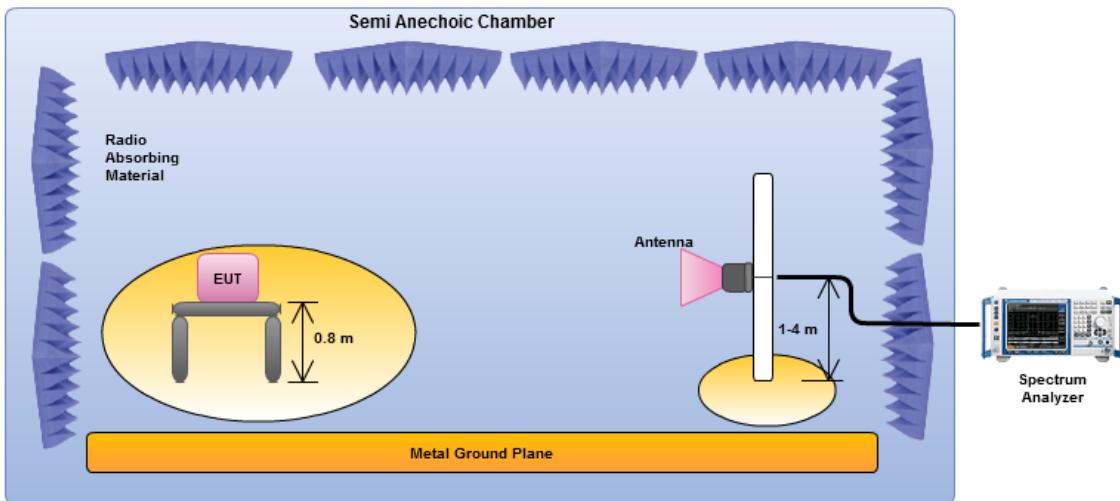

Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.


3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.



3.4.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)


Transmitter Radiated Unwanted Emissions (Below 1GHz)																																																																																									
Operating Mode	1	Polarization		V																																																																																					
Operating Function	Transmit																																																																																								
<table><thead><tr><th>Freq</th><th>Over Level</th><th>Limit</th><th>Read Line</th><th>Antenna Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>35.82</td><td>32.37</td><td>-7.63</td><td>40.00</td><td>49.06</td><td>13.87</td><td>1.25</td><td>31.81</td><td>Peak</td></tr><tr><td>2</td><td>143.49</td><td>23.93</td><td>-19.57</td><td>43.50</td><td>40.52</td><td>13.60</td><td>1.41</td><td>31.60</td><td>Peak</td></tr><tr><td>3</td><td>256.01</td><td>21.84</td><td>-24.16</td><td>46.00</td><td>38.99</td><td>12.58</td><td>1.68</td><td>31.41</td><td>Peak</td></tr><tr><td>4</td><td>426.73</td><td>21.84</td><td>-24.16</td><td>46.00</td><td>34.21</td><td>16.99</td><td>2.00</td><td>31.36</td><td>Peak</td></tr><tr><td>5</td><td>808.91</td><td>26.94</td><td>-19.06</td><td>46.00</td><td>32.90</td><td>22.69</td><td>2.56</td><td>31.21</td><td>Peak</td></tr><tr><td>6</td><td>958.29</td><td>28.38</td><td>-17.62</td><td>46.00</td><td>32.16</td><td>24.45</td><td>2.85</td><td>31.08</td><td>Peak</td></tr></tbody></table>										Freq	Over Level	Limit	Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	35.82	32.37	-7.63	40.00	49.06	13.87	1.25	31.81	Peak	2	143.49	23.93	-19.57	43.50	40.52	13.60	1.41	31.60	Peak	3	256.01	21.84	-24.16	46.00	38.99	12.58	1.68	31.41	Peak	4	426.73	21.84	-24.16	46.00	34.21	16.99	2.00	31.36	Peak	5	808.91	26.94	-19.06	46.00	32.90	22.69	2.56	31.21	Peak	6	958.29	28.38	-17.62	46.00	32.16	24.45	2.85	31.08	Peak
Freq	Over Level	Limit	Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	35.82	32.37	-7.63	40.00	49.06	13.87	1.25	31.81	Peak																																																																																
2	143.49	23.93	-19.57	43.50	40.52	13.60	1.41	31.60	Peak																																																																																
3	256.01	21.84	-24.16	46.00	38.99	12.58	1.68	31.41	Peak																																																																																
4	426.73	21.84	-24.16	46.00	34.21	16.99	2.00	31.36	Peak																																																																																
5	808.91	26.94	-19.06	46.00	32.90	22.69	2.56	31.21	Peak																																																																																
6	958.29	28.38	-17.62	46.00	32.16	24.45	2.85	31.08	Peak																																																																																
<p>Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)</p>																																																																																									

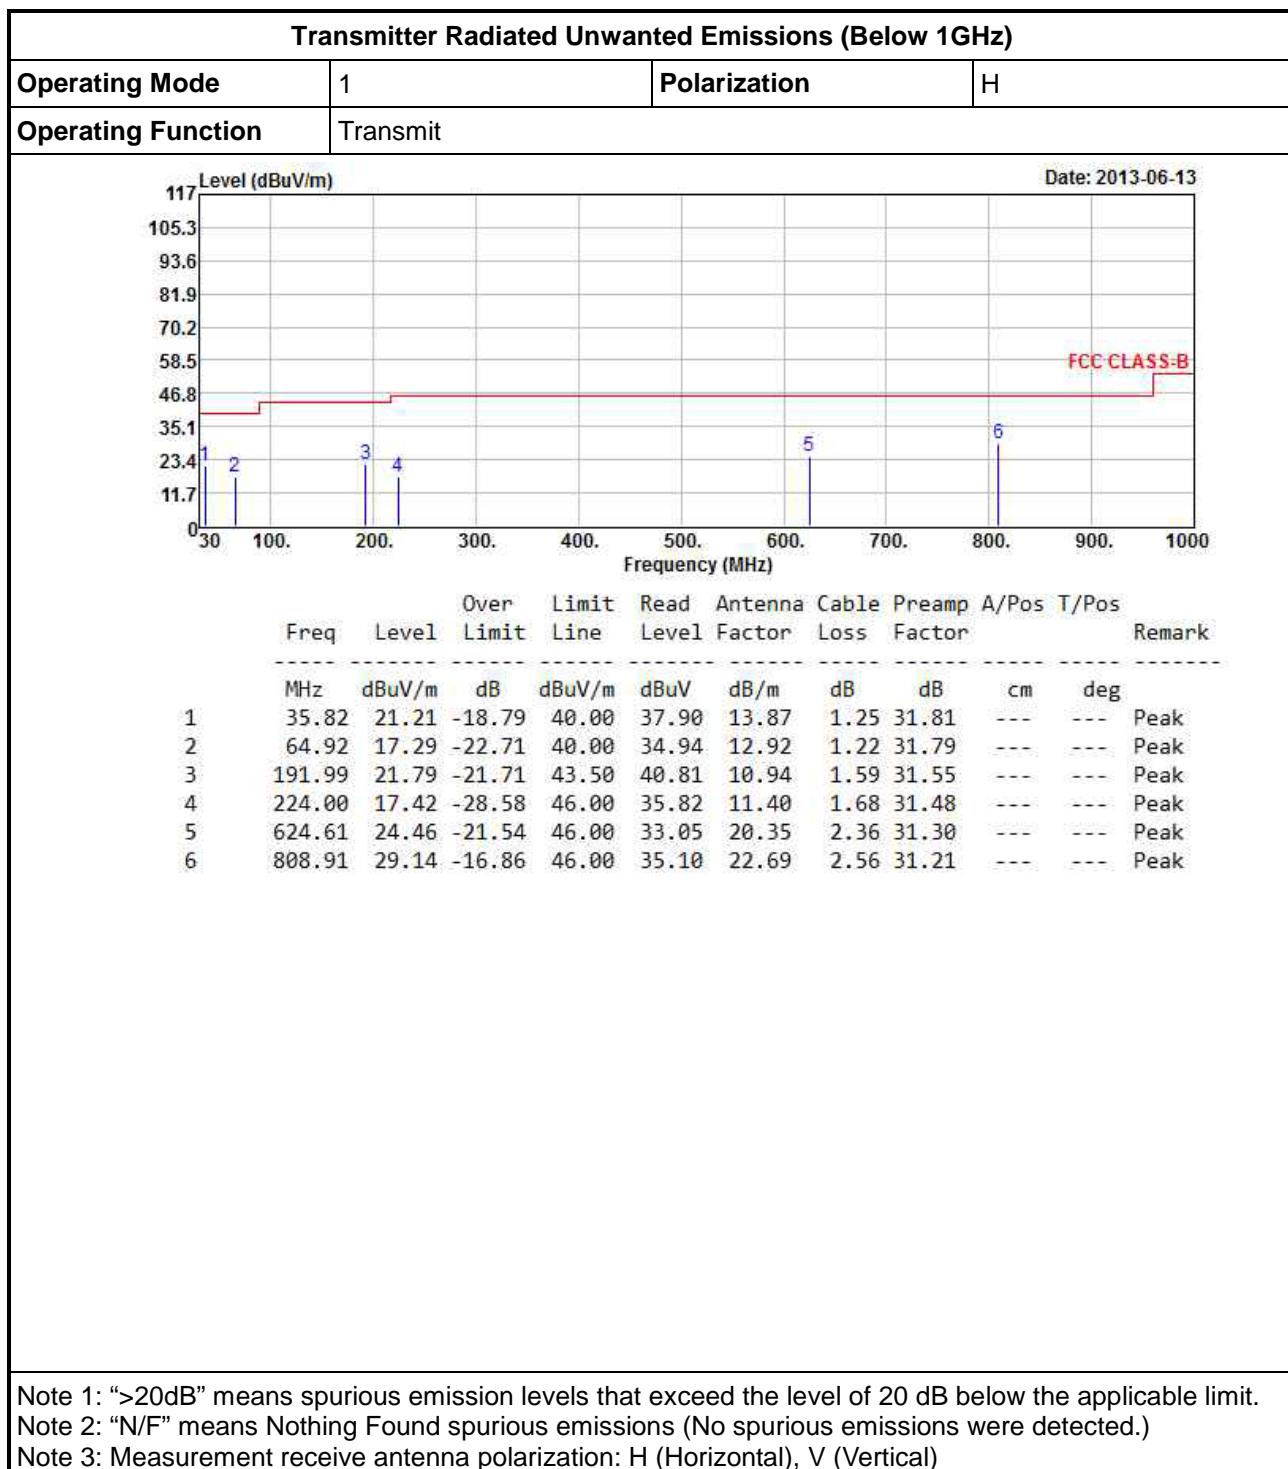




3.4.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)

Transmitter Radiated Unwanted Emissions (Above 1GHz)																																																																																																
Modulation Mode		GFSK-Transmit			Test Freq. (FX)		F1																																																																																									
Operating Function		Transmit			Polarization		V																																																																																									
Date: 2013-06-13																																																																																																
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: center;">Freq</th> <th style="text-align: center;">Over Limit</th> <th style="text-align: center;">Limit</th> <th style="text-align: center;">Read Line</th> <th style="text-align: center;">Antenna Factor</th> <th style="text-align: center;">Cable Loss</th> <th style="text-align: center;">Preamp Factor</th> <th style="text-align: center;">A/Pos</th> <th style="text-align: center;">T/Pos</th> <th style="text-align: center;">Remark</th> </tr> <tr> <th style="text-align: center;">MHz</th> <th style="text-align: center;">dBuV/m</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">dBuV/m</th> <th style="text-align: center;">dBuV</th> <th style="text-align: center;">dB/m</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">dB</th> <th style="text-align: center;">cm</th> <th style="text-align: center;">deg</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">1</td> <td style="text-align: center;">1500.00</td> <td style="text-align: center;">30.10</td> <td style="text-align: center;">-23.90</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">36.44</td> <td style="text-align: center;">25.80</td> <td style="text-align: center;">3.51</td> <td style="text-align: center;">35.65</td> <td style="text-align: center;">---</td> <td style="text-align: center;">---</td> </tr> <tr> <td style="text-align: center;">2</td> <td style="text-align: center;">1500.00</td> <td style="text-align: center;">43.02</td> <td style="text-align: center;">-30.98</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">49.36</td> <td style="text-align: center;">25.80</td> <td style="text-align: center;">3.51</td> <td style="text-align: center;">35.65</td> <td style="text-align: center;">---</td> <td style="text-align: center;">Peak</td> </tr> <tr> <td style="text-align: center;">3</td> <td style="text-align: center;">4804.00</td> <td style="text-align: center;">14.31</td> <td style="text-align: center;">-39.69</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">9.66</td> <td style="text-align: center;">31.06</td> <td style="text-align: center;">6.64</td> <td style="text-align: center;">33.05</td> <td style="text-align: center;">---</td> <td style="text-align: center;">Average</td> </tr> <tr> <td style="text-align: center;">4</td> <td style="text-align: center;">4804.00</td> <td style="text-align: center;">58.12</td> <td style="text-align: center;">-15.88</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">53.47</td> <td style="text-align: center;">31.06</td> <td style="text-align: center;">6.64</td> <td style="text-align: center;">33.05</td> <td style="text-align: center;">---</td> <td style="text-align: center;">Peak</td> </tr> <tr> <td style="text-align: center;">5</td> <td style="text-align: center;">7206.00</td> <td style="text-align: center;">9.22</td> <td style="text-align: center;">-44.78</td> <td style="text-align: center;">54.00</td> <td style="text-align: center;">-0.18</td> <td style="text-align: center;">35.39</td> <td style="text-align: center;">8.17</td> <td style="text-align: center;">34.16</td> <td style="text-align: center;">---</td> <td style="text-align: center;">Average</td> </tr> <tr> <td style="text-align: center;">6</td> <td style="text-align: center;">7206.00</td> <td style="text-align: center;">53.03</td> <td style="text-align: center;">-20.97</td> <td style="text-align: center;">74.00</td> <td style="text-align: center;">43.63</td> <td style="text-align: center;">35.39</td> <td style="text-align: center;">8.17</td> <td style="text-align: center;">34.16</td> <td style="text-align: center;">---</td> <td style="text-align: center;">Peak</td> </tr> </tbody> </table>											Freq	Over Limit	Limit	Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	1500.00	30.10	-23.90	54.00	36.44	25.80	3.51	35.65	---	---	2	1500.00	43.02	-30.98	74.00	49.36	25.80	3.51	35.65	---	Peak	3	4804.00	14.31	-39.69	54.00	9.66	31.06	6.64	33.05	---	Average	4	4804.00	58.12	-15.88	74.00	53.47	31.06	6.64	33.05	---	Peak	5	7206.00	9.22	-44.78	54.00	-0.18	35.39	8.17	34.16	---	Average	6	7206.00	53.03	-20.97	74.00	43.63	35.39	8.17	34.16	---	Peak
Freq	Over Limit	Limit	Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark																																																																																							
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	1500.00	30.10	-23.90	54.00	36.44	25.80	3.51	35.65	---	---																																																																																						
2	1500.00	43.02	-30.98	74.00	49.36	25.80	3.51	35.65	---	Peak																																																																																						
3	4804.00	14.31	-39.69	54.00	9.66	31.06	6.64	33.05	---	Average																																																																																						
4	4804.00	58.12	-15.88	74.00	53.47	31.06	6.64	33.05	---	Peak																																																																																						
5	7206.00	9.22	-44.78	54.00	-0.18	35.39	8.17	34.16	---	Average																																																																																						
6	7206.00	53.03	-20.97	74.00	43.63	35.39	8.17	34.16	---	Peak																																																																																						
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition. Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).																																																																																																

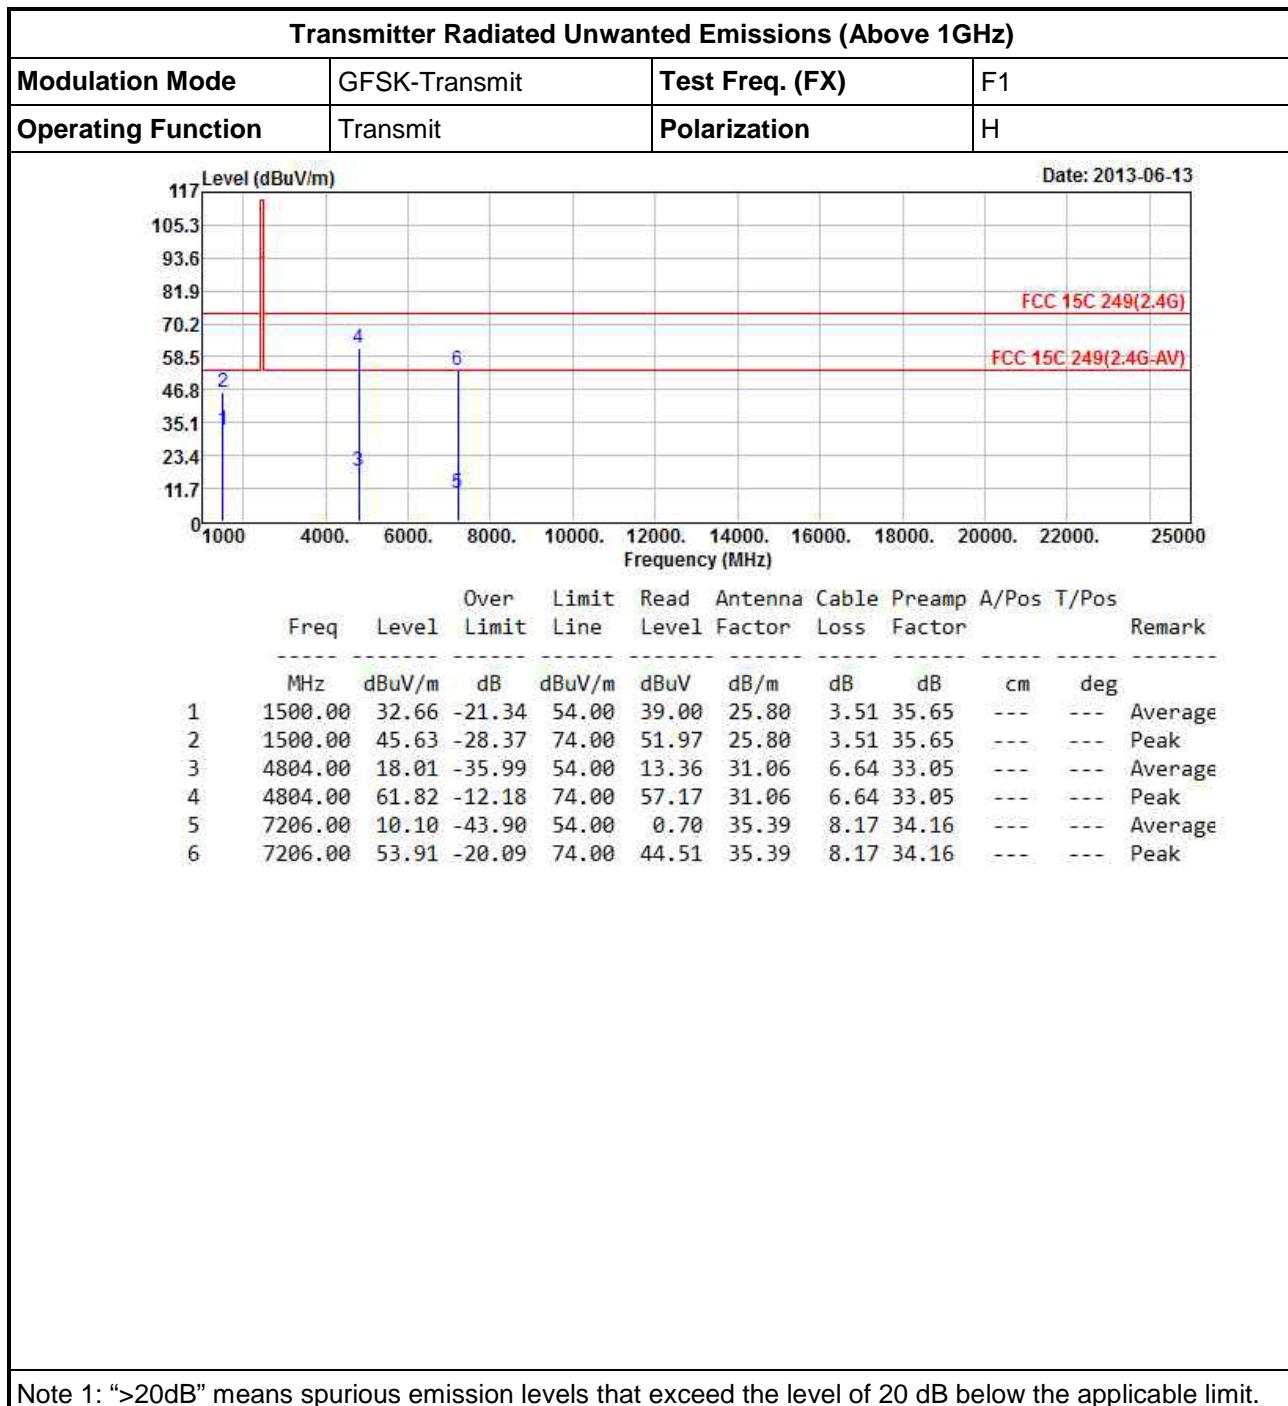

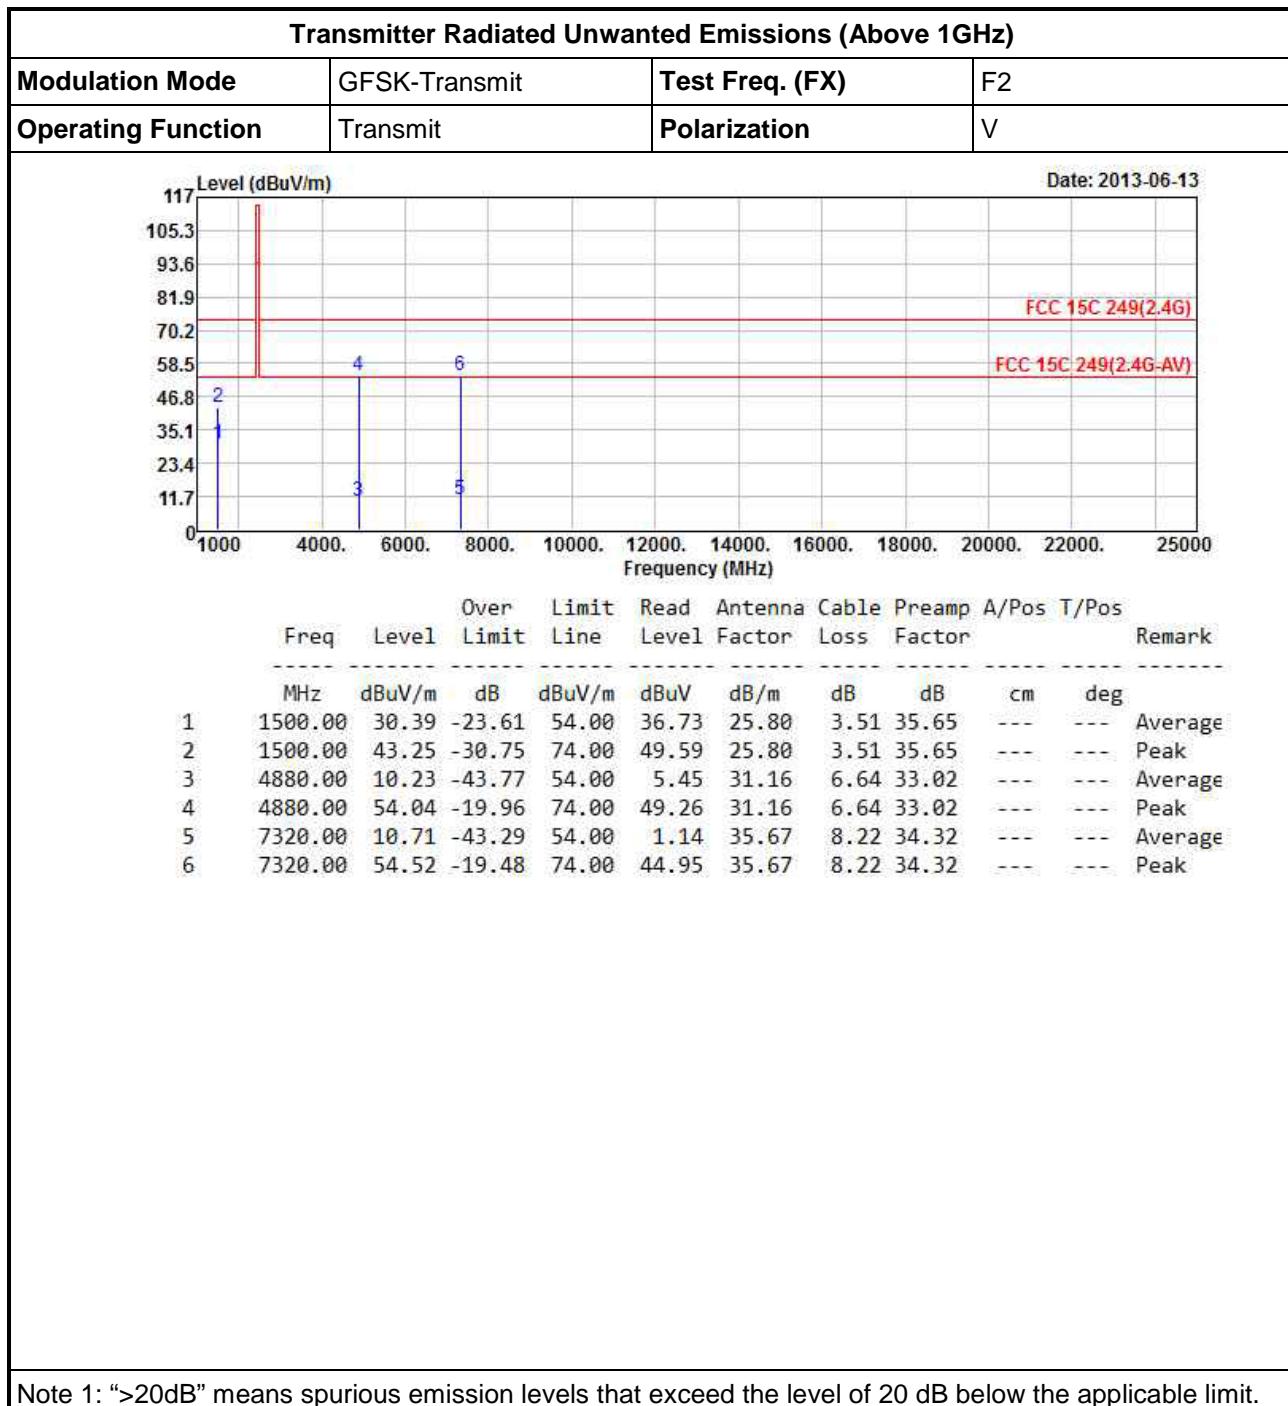


Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

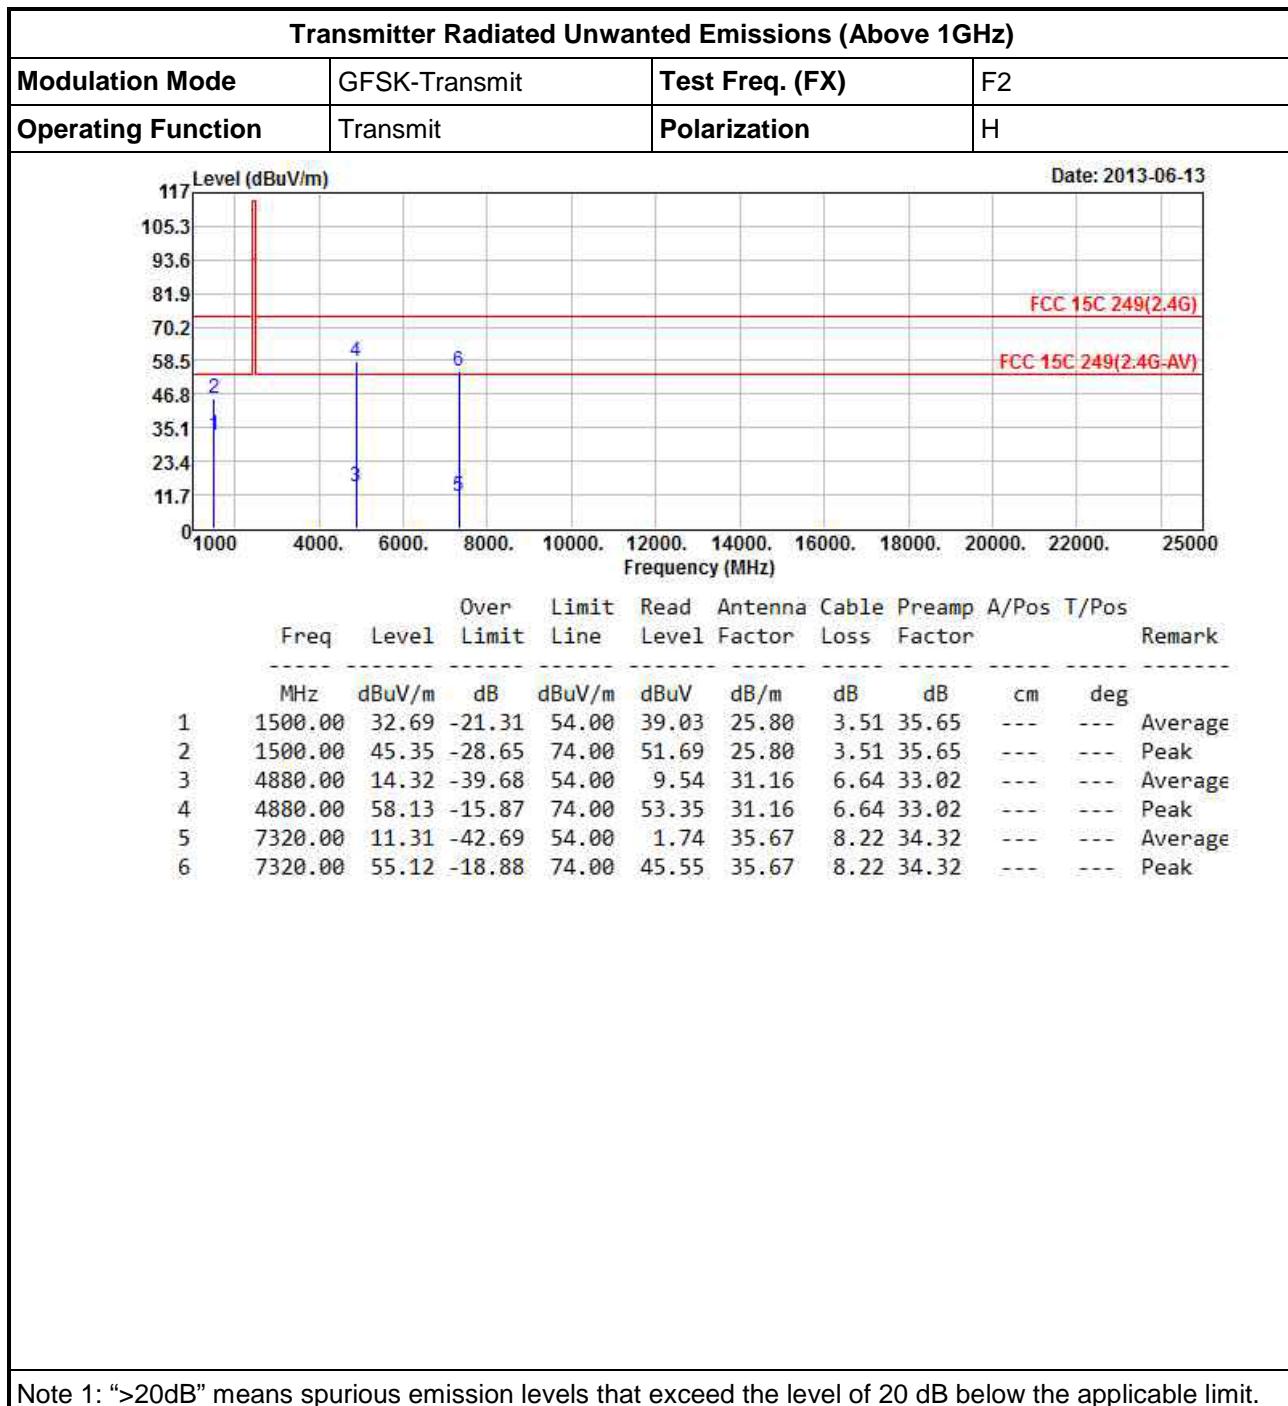

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).



Transmitter Radiated Unwanted Emissions (Above 1GHz)

Modulation Mode	GFSK-Transmit	Test Freq. (FX)	F3
Operating Function	Transmit	Polarization	V

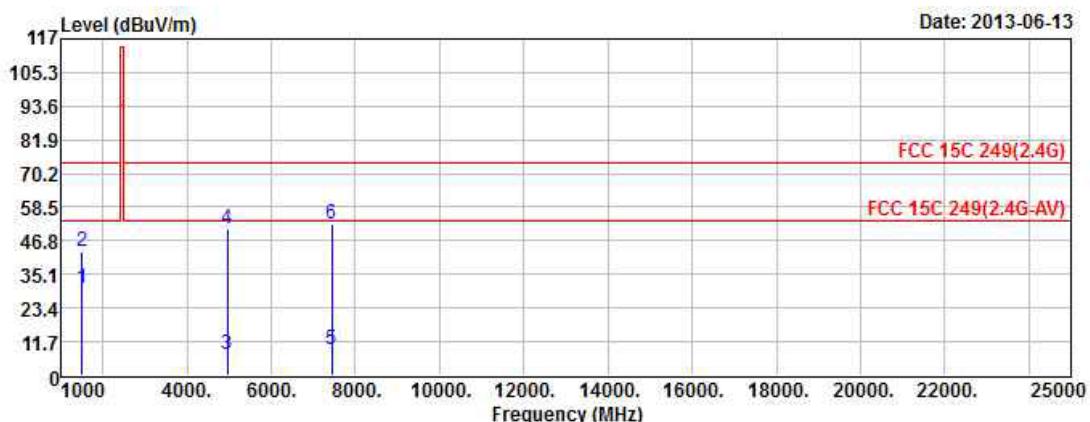


Freq	Over Limit	Read Line	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark			
								MHz	dBuV/m	dB	dBuV/m
1	1500.00	30.15	-23.85	54.00	36.49	25.80	3.51	35.65	---	---	Average
2	1500.00	43.01	-30.99	74.00	49.35	25.80	3.51	35.65	---	---	Peak
3	4960.00	7.31	-46.69	54.00	2.40	31.25	6.65	32.99	---	---	Average
4	4960.00	51.12	-22.88	74.00	46.21	31.25	6.65	32.99	---	---	Peak
5	7440.00	9.00	-45.00	54.00	-0.76	35.96	8.28	34.48	---	---	Average
6	7440.00	52.81	-21.19	74.00	43.05	35.96	8.28	34.48	---	---	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).

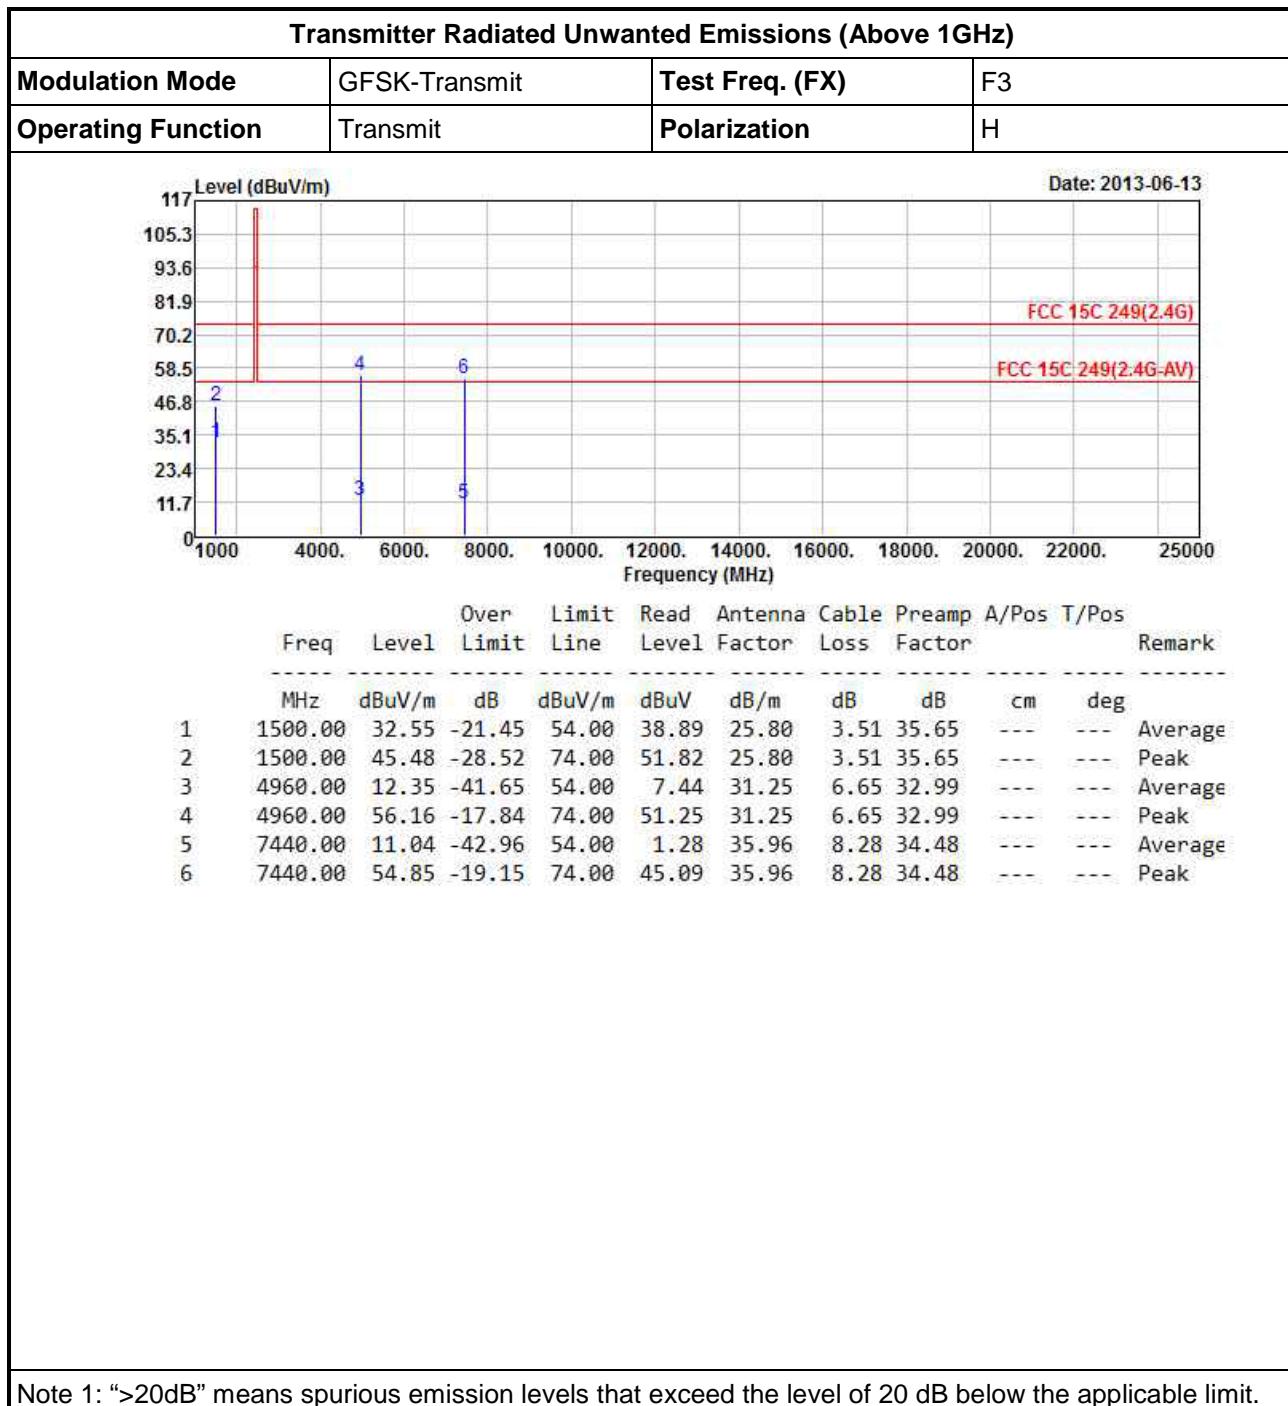

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 3: For the peak measurement is fully sufficient, as the max field strength as measured with the Peak-Detector meets the AV-Limit so that the AV level does not need to be reported in addition.

Note 4: If duty cycle < 100%, average emission = peak emission + 20 log (duty cycle).



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101063	9KHz~40GHz	Feb. 18, 2013	Conducted (TH01-HY)
Spectrum Analyzer	R&S	FSP 40	100305	9KHz~40GHz	Mar. 20, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 02, 2012	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-SP-SD	MAA1112-007	-20 ~ 100°C	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 26, 2012	Conducted (TH01-HY)
Power Sensor	Anritsu	MA2411B	0917017	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)
Power Meter	Anritsu	ML2495A	0949003	300MHz ~ 40GHz	Feb. 02, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV40	101499	9Kz – 40GHz	Jan. 28, 2013	Radiation (03CH08-HY)
Receiver	R&S	ESR3	101657	9KHz – 3GHz	Jan. 30, 2013	Radiation (03CH08-HY)
Amplifier	COM-POWER	PA-103	161241	10MHz ~ 1000MHz	Feb. 26, 2013	Radiation (03CH08-HY)
Amplifier	Agilent	8449B	3008A02665	1GHz – 26.5 GHz	Aug. 28, 2012	Radiation (03CH08-HY)
Horn Antenna	ETS-LINDGREN	3117	66584	1GHz~18GHz	Aug. 09, 2012	Radiation (03CH08-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA 9170517	15GHz~40GHz	Sep. 28, 2012	Radiation (03CH08-HY)
Bilog Antenna	SCHAFFNER	CBL6111C	2725	30 MHz - 1 GHz	Oct. 06, 2012	Radiation (03CH08-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Amplifier	MITEQ	AMF-7D-00101800-30-10P	9121372	26.5GHz ~ 40GHz	Feb. 27, 2013	Radiation (03CH08-HY)
Loop Antenna *(note 1)	R&S	HFH2-Z2	860004/0001	9 kHz - 30 MHz	Jul. 03, 2012	Radiation (03CH08-HY)

Note: Calibration Interval of instruments listed above is two year.