

APPLICATION FOR CERTIFICATION

On Behalf of
Zhuhai Roule Electric Co., Ltd.

Monitor

Model Number: RL-01CRT

Prepared for : Zhuhai Roule Electric Co., Ltd.
No.12, Pingdong RD.3 Nanping Industry Community,
Zhuhai, China.

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F04372
Date of Test : Nov.28~30, 2004
Date of Report : Dec.28, 2004

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Tested Supporting System Details	1-1
1.3. Test Facility	1-2
1.4. Measurement Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST	2-1
2.1. Test Equipment.....	2-1
2.2. Block Diagram of Test Setup	2-1
2.3. Power Line Conducted Emission Limit	2-1
2.4. EUT Configuration on Test.....	2-2
2.5. Operating Condition of EUT	2-2
2.6. Test Procedure	2-2
2.7. Power Line Conducted Emission Test Results	2-3
3. RADIATED EMISSION TEST.....	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit	3-2
3.4. EUT Configuration on Test.....	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. BANDWIDTH TEST.....	4-1
4.1. Test Equipment.....	4-1
4.2. Test Standard.....	4-1
4.3. Bandwidth Limit.....	4-1
4.4. Test Procedure	4-1
5. PHOTOGRAPH.....	5-1
5.1. Photos of Power Line Conducted Emission Test	5-1
5.2. Photos of Radiated Emission Test (In Anechoic Chamber).....	5-2

APPENDIX I
APPENDIX II

(9 pages)
(25 pages)

TEST REPORT DECLARATION

Applicant : Zhuhai Roule Electric Co., Ltd.
 Manufacturer : Zhuhai Roule Electric Co., Ltd.
 EUT Description : Monitor
 (A) MODEL NO. : RL-01CRT
 (B) SERIAL NO. : F2004122801
 (C) POWER SUPPLY : DC 9V Adaptor AC Input 120V/60Hz

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart B Apr. 2004.

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.
 This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Nov.28~30, 2004

Prepared by : Elsa Wu
 Elsa Wu / Assistant
Lake Wang
 Lake Wang / Supervisor

Reviewer :



Approved & Authorized Signer :

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description	:	Monitor This report is about transmitter FCC ID and the Receiver FCC DOC report please refer to AUDIX Number ACS-F04374
Model Number	:	RL-01CRT
Applicant	:	Zhuhai Roule Electric Co., Ltd. No.12, Pingdong RD.3 Nanping Industry Community, Zhuhai, China..
Manufacturer	:	Zhuhai Roule Electric Co., Ltd. No.12, Pingdong RD.3 Nanping Industry Community, Zhuhai, China.
Date of Test	:	Nov.28~30, 2004

1.2. Tested Supporting System Details

1.2.1. Power Adaptor

Model Number	:	B152DM090030
Cable	:	Unshielded, Undetachable, 1.8m

1.3. Test Facility

Site Description

- 3m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 90454
Aug. 15, 2003
- 3m & 10m Anechoic Chamber : Certificated by FCC, USA
Registration Number: 794232
Mar. 15, 2004
- EMC Lab. : Certificated by DATech, German
Registration Number: DAT-P-091/99-01
Feb. 02, 2004
- Certificated by NVLAP, USA
NVLAP Code: 200372-0
Mar. 31, 2004
- Certificated by Nemko, Norway
Aut. No.: ELA135
April. 22, 2004
- Certificated by Industry Canada
Registration Number: IC 5183
Jul. 28, 2004
- Name of Firm : Audix Technology (Shenzhen) Co., Ltd.
- Site Location : No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

1.4. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	


2. POWER LINE CONDUCTED EMISSION TEST

2.1. Test Equipment

The following test equipments are used during the power line conducted emission test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	May 24, 04	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	May 24, 04	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-407	8-541-4	May 24, 04	1 Year
4.	L.I.S.N.#3	EMCO	3825/2	9006-1660	May 24, 04	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 1	May 24, 04	1 Year
6.	Terminator	Hubersuhner	50Ω	No. 2	May 24, 04	1 Year
7.	RF Cable	MIYAZAKI	5D-2W	LISN Cable 1#	Aug. 19, 04	1/2 Year
8.	Passive Probe	Rohde & Schwarz	ESH2-Z3	299.7810.52	May 24, 04	1 Year
9.	Coaxial Switch	Anritsu	MP59B	M55367	Nov. 28, 04	1/2 Year
10.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100340	Aug. 19, 04	1/2 Year
11.	PC	N/A	586ATXS	N/A	N/A	N/A
12.	Printer	HP	Laserjet2100	SGGJ092351	N/A	N/A

2.2. Block Diagram of Test Setup

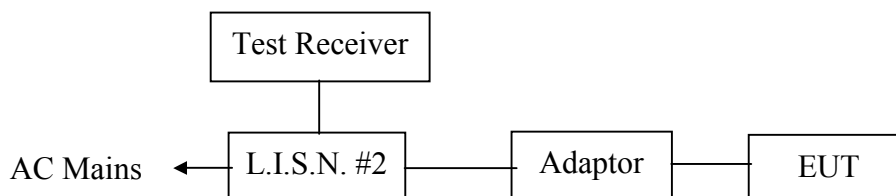

(EUT: Monitor)

2.3. Power Line Conducted Emission Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150KHz ~ 500KHz	66 ~ 56*	56 ~ 46*
500KHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

2.4. EUT Configuration on Test

The following equipments are installed on RF LINE VOLTAGE Test to meet the Commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

2.4.1. Monitor (EUT)

Model Number	:	RL-01CRT
Serial Number	:	F2004122801
Manufacturer	:	Zhuhai Roule Electric Co., Ltd.

2.5. Operating Condition of EUT

2.5.1. Setup the EUT and simulator as shown on Section 2.2.

2.5.2. Turn on the power of all equipment.

2.5.3. Let the EUT work in test mode (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) and measure it.

2.6. Test Procedure

The EUT is put on the table which is 0.8m above the ground and away from other metallic surface at least 0.4m. The EUT is connected to the AC/DC Adapter. The AC/DC Adapter power mains through a line impedance stabilization network (L.I.S.N.#2). This provides a 50 ohm coupling impedance for the testing equipment; and the peripheral equipment powers form other L.I.S.N.. Please refer to the block diagram of the test setup and photographs. Both sides of AC line(Line & Neutral) are checked for maximum conducted interference. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables must be changed according to ANSI / IEEE Standard 213-2001 on Conducted Emission Test.

The bandwidth of the field strength meter (R & S Test Receiver ESHS20) is set at 10KHz.

The frequency range from 150KHz to 30MHz is checked.

The details of test modes are as the followings, and the test data please see APPENDIX I.

2.7. Power Line Conducted Emission Test Results

PASS.

The frequency range from 150KHz to 30 MHz is investigated.

All emissions not reported below are too low against the prescribed limits.

Date of Test	: Nov.30, 2004	Temperature	: 23°C
EUT	: Monitor	Humidity	: 54%
Model No.	: RL-01CRT	Test Mode	: TX Channel 4
Test Engineer	: Seco		

Frequency (MHz)	Reading (dBμV)				Limit (dBμV)	
	VA		VB		Quasi-Peak	Average
	Quasi-Peak	Average	Quasi-Peak	Average		
0.167	40.10	37.10	38.92	34.92	65.11	55.11
0.206	39.93	36.93	39.35	35.35	63.37	53.37
0.255	37.83	34.83	N/A	N/A	61.59	51.59
0.283	N/A	N/A	37.27	34.27	60.73	50.73
0.350	39.21	36.21	36.95	32.95	58.96	48.96
0.433	32.27	29.27	28.62	25.62	57.19	47.19
0.535	N/A	N/A	18.04	16.04	56.00	46.00
0.595	29.01	27.01	N/A	N/A	56.00	46.00

Remark: 1) If the data table appeared symbol of “N/A” means the value was too low to be measured.

2) If the data table appeared symbol of “*” means the Q.P. value is under the limit for average, so, the average value had been omitted.

Reviewer: Cake Wang

3. RADIATED EMISSION TEST

3.1. Test Equipment


The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 24, 04	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS10	834468/011	May 24, 04	1 Year
3.	Amplifier	HP	8447D	2944A07794	Sep.16, 04	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 13, 04	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	July 31, 04	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	July 31, 04	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	July 31, 04	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	July 31, 04	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Nov.26, 04	1/2 Year
12.	Spectrum	Agilent	E4407B	MY41440292	May 24, 04	1 Year
13.	Amp	HP	8449B	3008A00863	May 24, 04	1 Year
14.	Antenna	EMCO	3115	9607-4877	Jun. 15, 04	1.5 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: Monitor)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

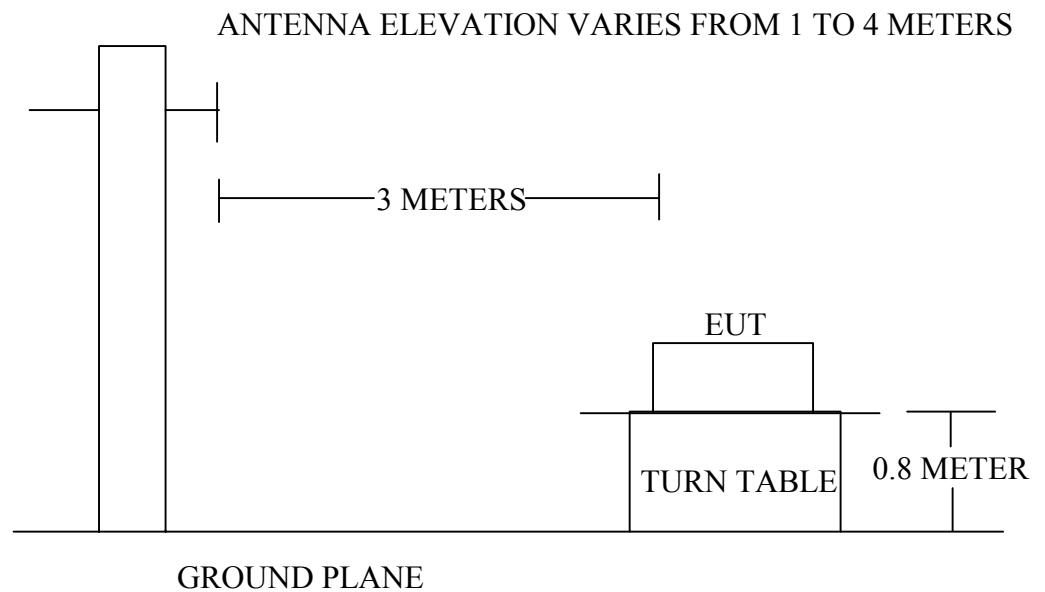

3.3. Radiated Emission Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Local Oscillator: 114.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 94.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average) Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log$ Emission level $\mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. Monitor (EUT)

Model Number	:	RL-01CRT
Serial Number	:	F2004122801
Manufacturer	:	Zhuhai Roule Electric Co., Ltd.

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz.

The frequency range from 30MHz to 24.44GHz are checked.

The test modes (TX Channel 1/TX Channel 2/TX Channel 3/TX Channel 4) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Nov.28, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 4
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Horizontal dBμV	Emission Level Horizontal dBμV/m	Over Limits dB	Limits dBμV/m
33.880	19.18	1.14	6.20	26.52	-13.48	40.00
41.640	15.05	1.21	9.92	26.19	-13.81	40.00
58.130	5.44	1.48	11.45	18.37	-21.63	40.00
135.730	12.21	2.35	4.57	19.13	-24.37	43.50
262.800	13.51	3.52	5.65	22.68	-23.32	46.00
368.530	15.56	4.36	4.79	24.71	-21.29	46.00

- Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The worst emission was detected at 33.880MHz with corrected signal level of 26.52dBμV/m (Limit is 40.00dBμV/m) when the antenna was at horizontal polarization and at 1.1m high and the turn table was at 360 ° .
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:


Cahe Wang

Date of Test :	Nov.28, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 4
Test Engineer:	Seco		

Frequency MHz	Antenna Factor dB/m	Cable Loss dB	Meter Reading Vertical dBμV	Emission Level Vertical dBμV/m	Over Limits dB	Limits dBμV/m
33.880	12.90	1.14	7.18	21.22	-18.78	40.00
42.610	9.37	1.23	11.61	22.21	-17.79	40.00
59.100	6.93	1.49	10.55	18.97	-21.03	40.00
136.700	11.30	2.37	3.51	17.18	-26.32	43.50
272.500	12.47	3.57	4.34	20.37	-25.63	46.00
408.300	15.94	4.67	4.01	24.62	-21.38	46.00

- Remark: 1. All readings are Quasi-Peak values.
 2. Emission Level = Antenna Factor + Cable Loss + Meter Reading
 3. The worst emission was detected at 42.610MHz with corrected signal level of 22.21dBμV/m (Limit is 40.00dBμV/m) when the antenna was at vertical polarization and at 1.1m high and the turn table was at 312 ° .
 4. 0 ° was the table front facing the antenna. Degree is calculated from 0 ° clockwise facing the antenna.

Reviewer:



Date of Test :	Nov.29, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 1
Test Engineer:	Seco		


Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Horizontal	Horizontal	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2414.000	29.03	3.45	43.92	76.40	-17.60	94.00	Average
2414.000	29.03	3.45	54.92	87.40	-26.60	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Vertical	Vertical	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2414.000	29.03	3.45	47.85	80.33	-13.67	94.00	Average
7242.000	37.39	7.14	2.21	46.74	-7.26	54.00	Average
2414.000	29.03	3.45	67.45	99.93	-14.07	114.00	Peak
7242.000	37.39	7.14	10.21	54.74	-19.26	74.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer:



Date of Test :	Nov.29, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 2
Test Engineer:	Seco		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Horizontal	Horizontal	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2432.000	29.07	3.57	44.57	77.21	-16.79	94.00	Average
2432.000	29.07	3.57	55.57	88.21	-25.79	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	Remark
MHz	Factor	Loss	Vertical	Vertical	Limits		
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2432.000	29.07	3.57	47.25	79.89	-14.11	94.00	Average
2432.000	29.07	3.57	60.25	92.89	-21.11	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer: Cake Wang

Date of Test :	Nov.29, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 3
Test Engineer:	Seco		

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Horizontal	Horizontal	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2450.000	29.11	3.68	44.99	77.78	-16.22	94.00	Average
2450.000	29.11	3.68	52.99	85.78	-28.22	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Vertical	Vertical	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2450.000	29.11	3.68	43.73	76.52	-17.48	94.00	Average
2450.000	29.11	3.68	55.73	88.52	-25.48	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer: Cake Wang

Date of Test :	Nov.29, 2004	Temperature :	24°C
EUT :	Monitor	Humidity :	54%
Model No. :	RL-01CRT	Test Mode :	TX Channel 4
Test Engineer:	Seco		


Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Horizontal	Horizontal	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2468.000	29.15	3.80	44.47	77.42	-16.58	94.00	Average
2468.000	29.15	3.80	59.47	92.42	-21.58	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Frequency	Antenna	Cable	Meter Reading	Emission Level	Over	Limits	
MHz	Factor	Loss	Vertical	Vertical	Limits		Remark
	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
2468.000	29.15	3.80	46.78	79.73	-14.27	94.00	Average
2468.000	29.15	3.80	61.76	94.71	-19.29	114.00	Peak

Remark: 1. Emission Level = Antenna Factor + Meter Reading+Cable Loss
 2.The bandwidth of the RBW is set at 120KHz and VBW is set at 300KHz.

Reviewer:





AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 28 File#: Roule.EMI

Date: 2004-11-28 Time: 12:04:40

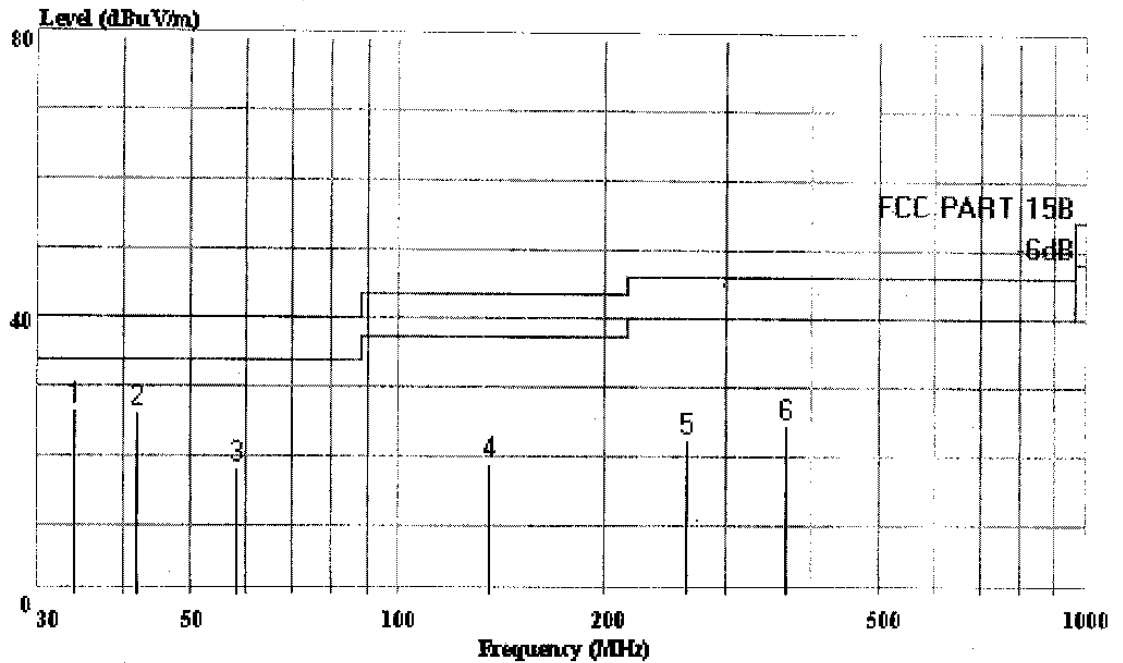

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4

: Antpos:1.1m Tablepos:360'

Page: 1

			Over	Limit	Read	Probe	Cable
	Freq	Level	Limit	Line	Level	Factor	Loss
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1	33.880	26.52	-13.48	40.00	6.20	19.18	1.14
2	41.640	26.19	-13.81	40.00	9.92	15.05	1.21
3	58.130	18.37	-21.63	40.00	11.45	5.44	1.48
4	135.730	19.13	-24.37	43.50	4.57	12.21	2.35
5	262.800	22.68	-23.32	46.00	5.65	13.51	3.52
6	368.530	24.71	-21.29	46.00	4.79	15.56	4.36



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 30 File#: Roule.EMI

Date: 2004-11-28 Time: 12:06:46

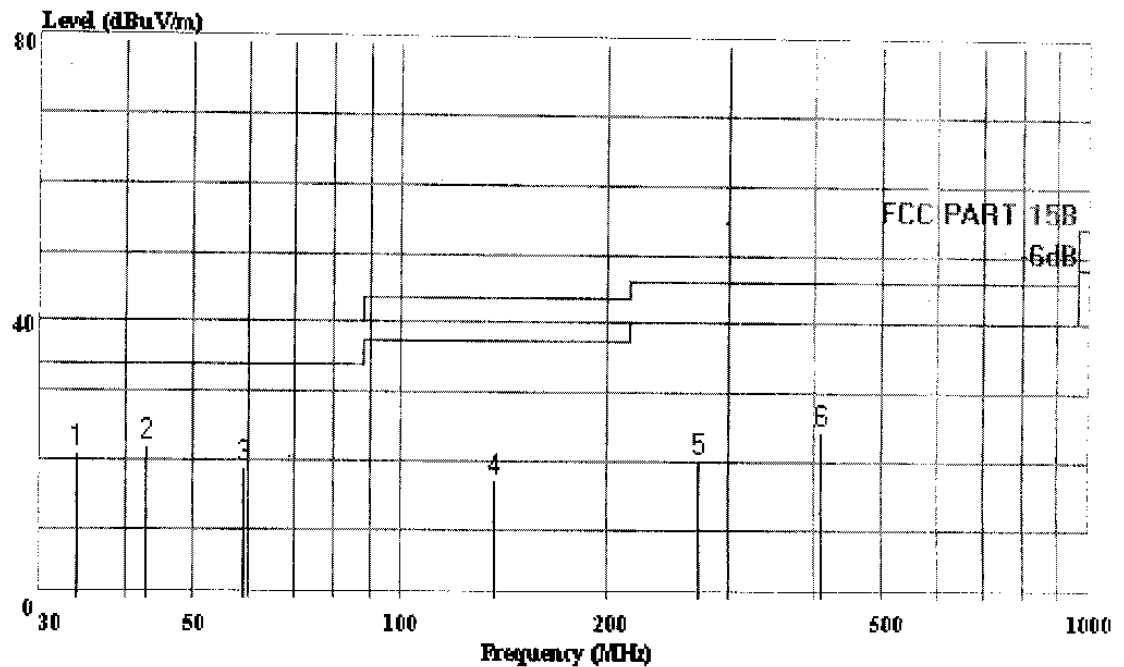

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4

: Antpos:1.1m Tablepos:312'

Page: 1

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1	33.880	21.22	-18.78	40.00	7.18	12.90	1.14
2	42.610	22.21	-17.79	40.00	11.61	9.37	1.23
3	59.100	18.97	-21.03	40.00	10.55	6.93	1.49
4	136.700	17.18	-26.32	43.50	3.51	11.30	2.37
5	272.500	20.37	-25.63	46.00	4.34	12.47	3.57
6	408.300	24.62	-21.38	46.00	4.01	15.94	4.67




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 64 File#: C:\EMI TEST DATA\O\Boule.EMI

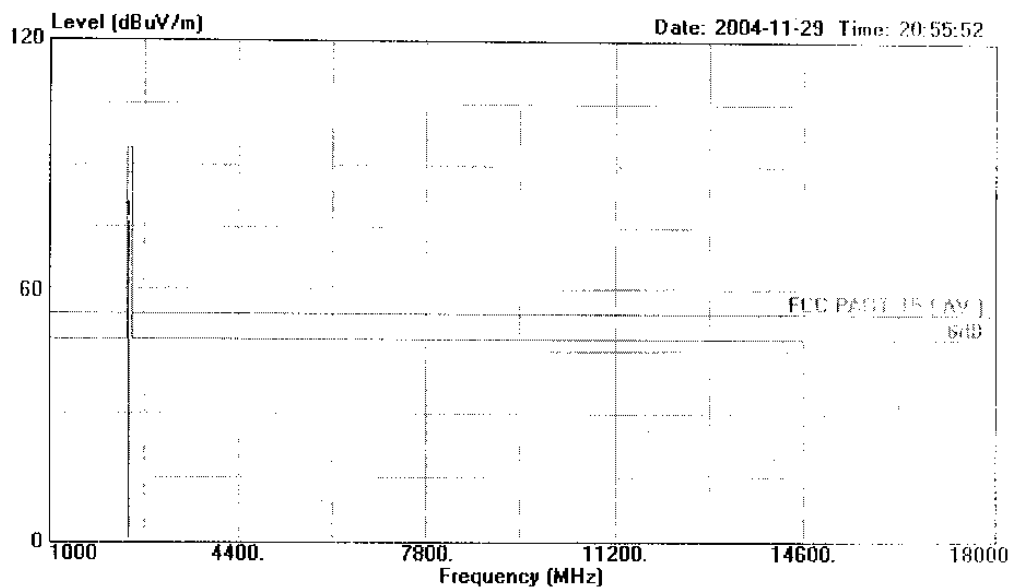

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 1

	Freq	Level	Over Limit	Limit	Read	Probe	Cable	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2414.000	76.40	-17.60	94.00	43.92	29.03	3.45	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 63 File#: C:\EMI-TEST DATA\O\Roule.EMI

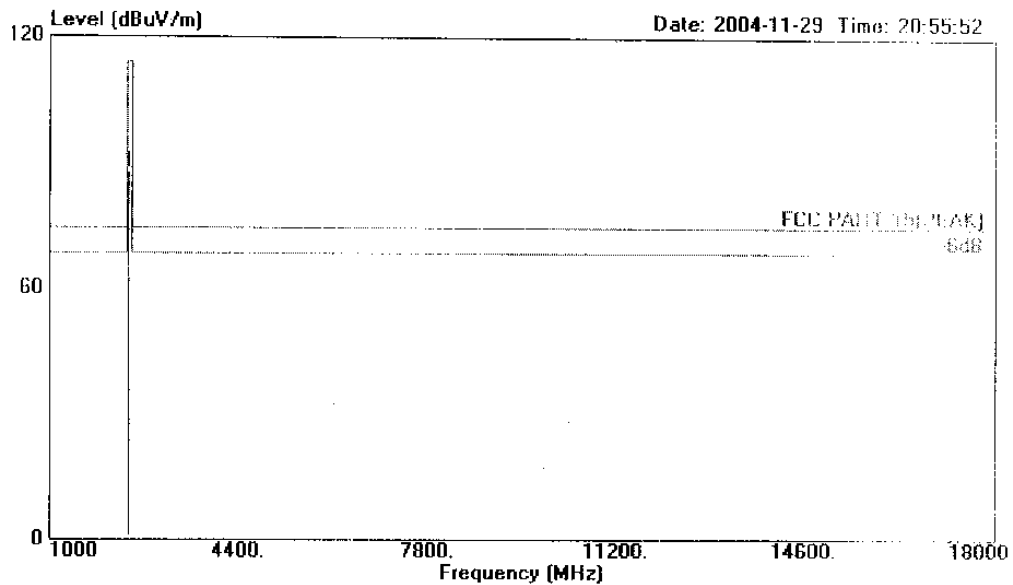

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120W/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 1

	Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 2414.000	87.40	-26.60	114.00	54.92	29.03	3.45 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 61 File#: C:\EMI TEST DATA\O\Route.EMI

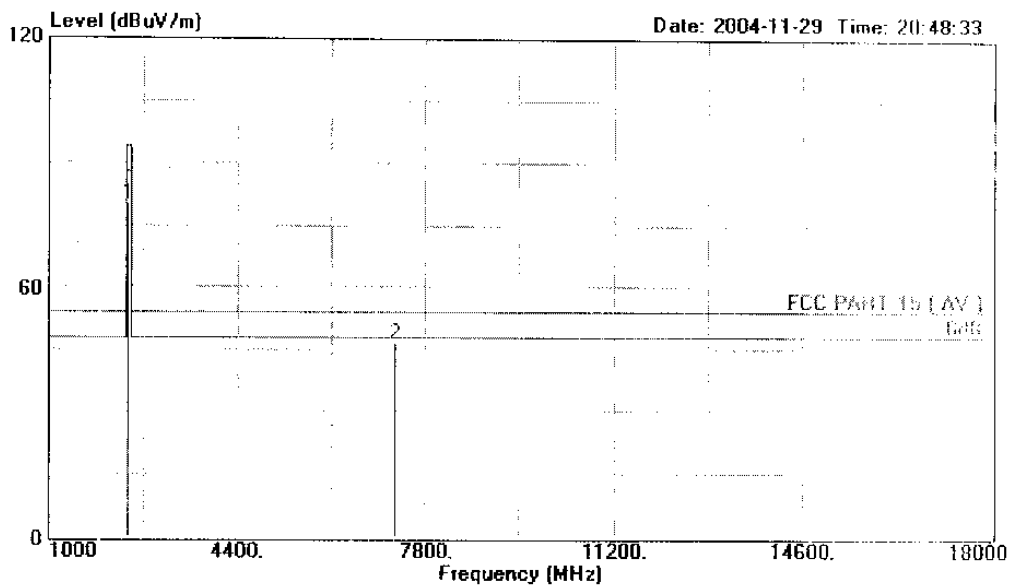

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 1

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2414.000	80.33	-13.67	94.00	47.85	29.03	3.45	Average
2	7242.000	46.74	-7.26	54.00	2.21	37.39	7.14	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 60 File#: C:\EMI TEST DATA\O\Roule.EMI

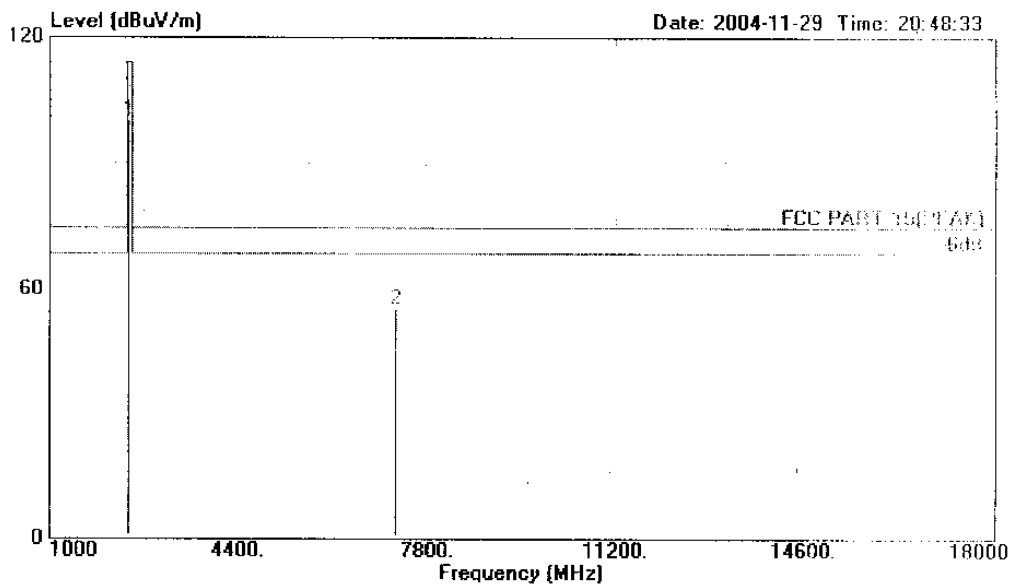

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
TX Channel 1

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2414.000	99.93	-14.07	114.00	67.45	29.03	3.45	Peak
2	7242.000	54.74	-19.26	74.00	10.21	37.39	7.14	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Mantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 67 File#: C:\EMI TEST DATA\O\Role.EMI

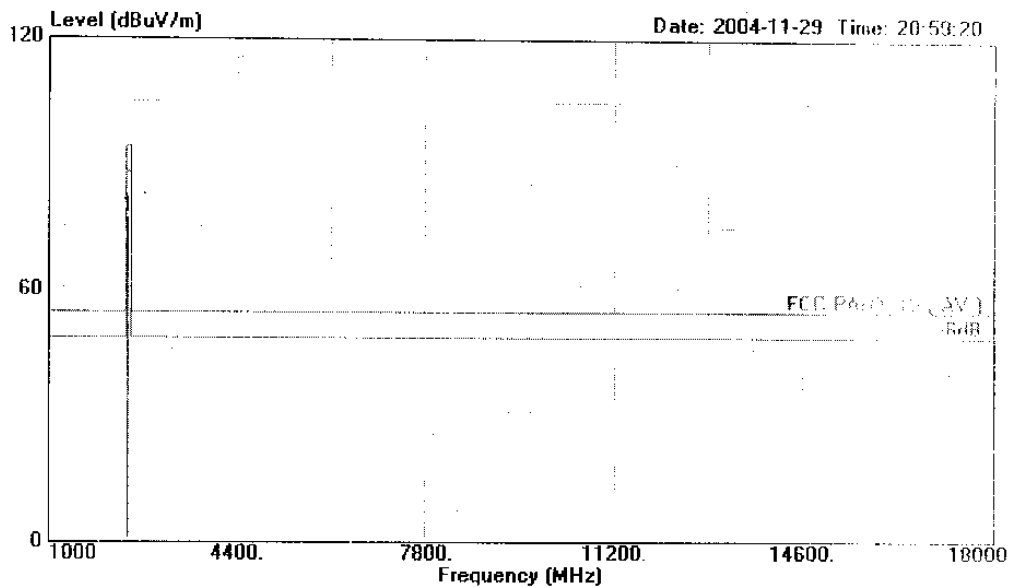

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2

	Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 2432.000	77.21	-16.79	94.00	44.57	29.07	3.57

Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 66 File#: C:\EMI TEST DATA\O\Roule.EMI

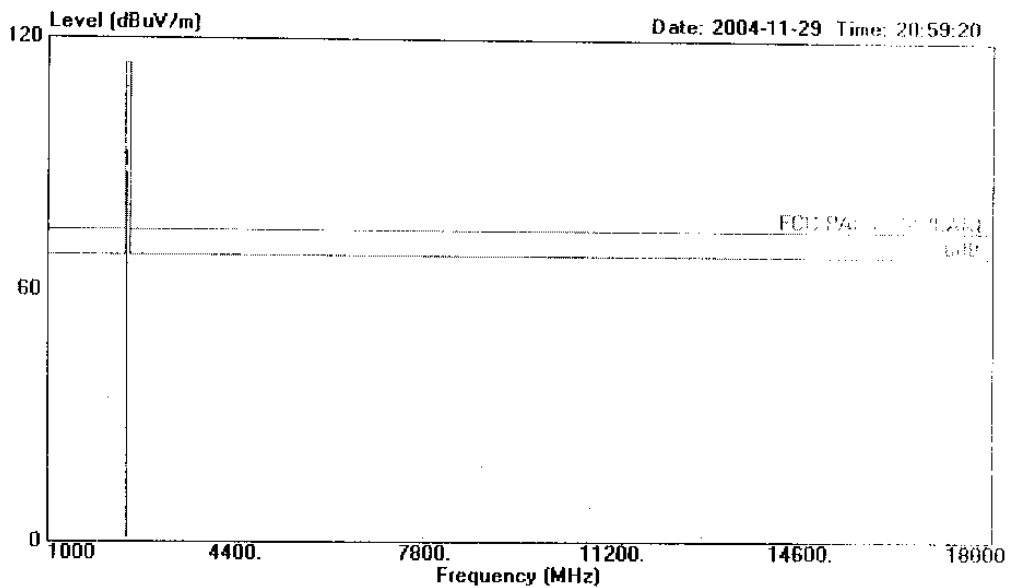

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2

			Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1 2432.000	88.21	-25.79	114.00	55.57	29.07	3.57	Peak	




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 70 File#: C:\EMI TEST DATA\O\Roule.EMI

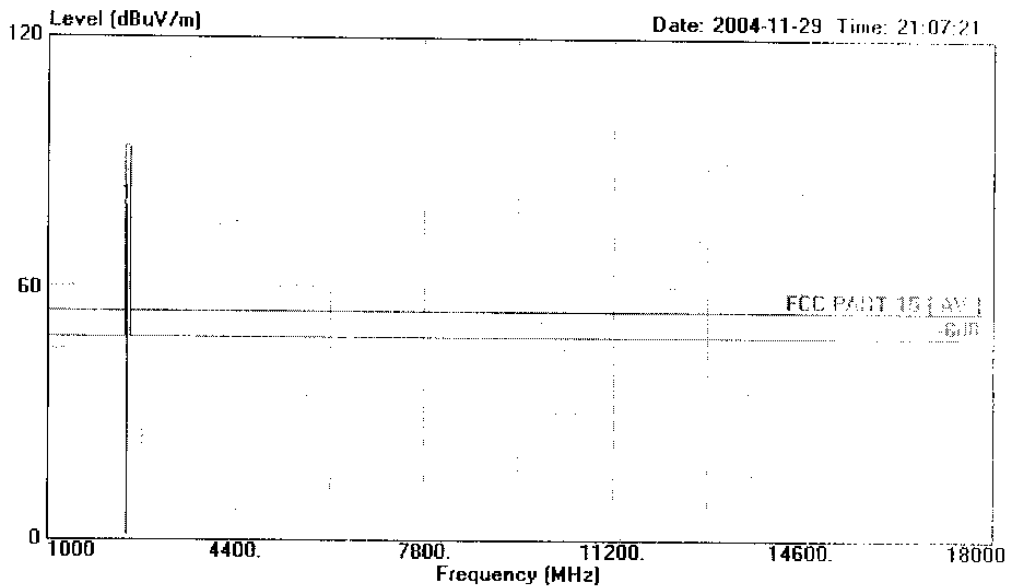

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
TX Channel 2

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2432.000	79.89	-14.11	94.00	47.25	29.07	3.57	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 69 File#: C:\EMI TEST DATA\O\Role.EMI

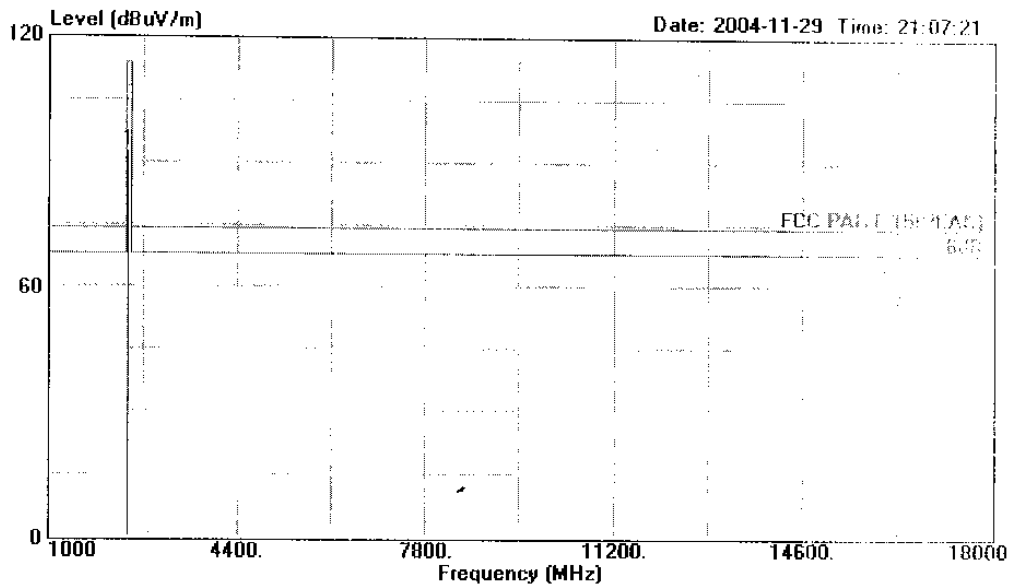

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
 : TX Channel 2

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2432.000	92.89	-21.11	114.00	60.25	29.07	3.57	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Mantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 76 File#: C:\EMI TEST DATA\O\Roule.EMI

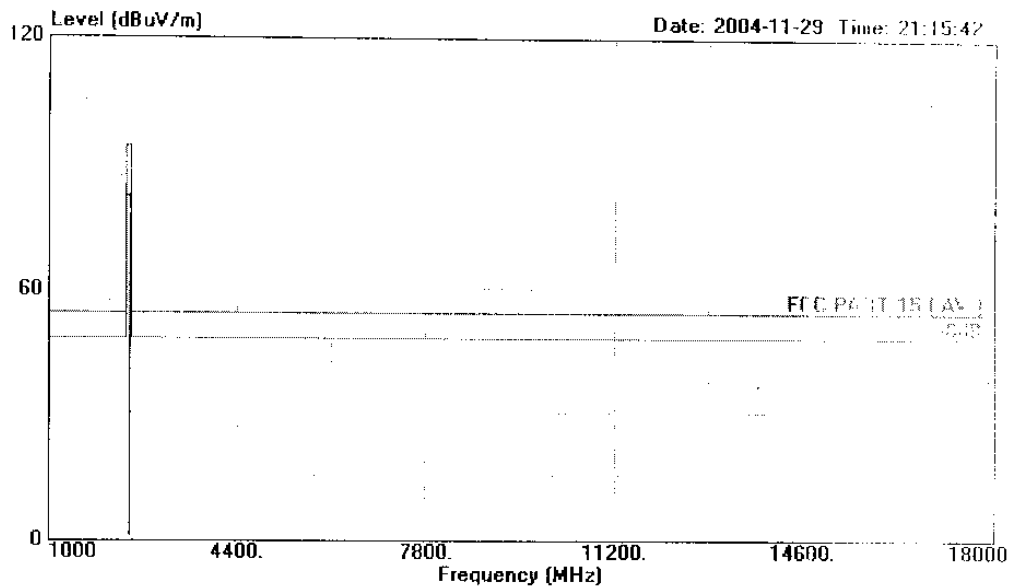

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 3

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2450.000	77.78	-16.22	94.00	44.99	29.11	3.68	Average




信维科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S3,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 75 File#: C:\EMI TEST DATA\O\Route.EMI

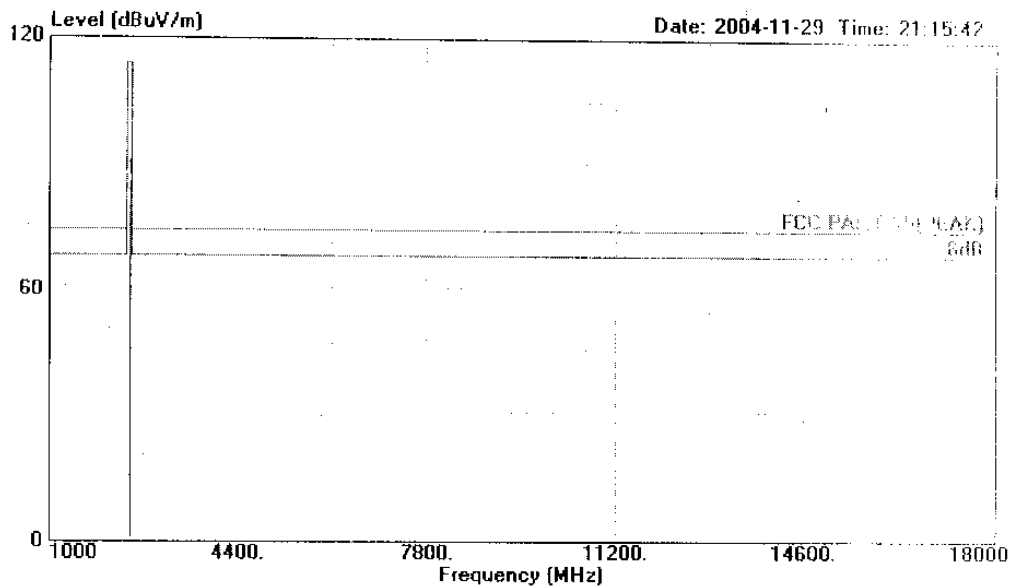

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 3

	Freq	Level	Over Limit	Limit	Read	Probe	Cable	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2450.000	85.78	-28.22	114.00	52.99	29.11	3.66	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Fang Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 73 File#: C:\EMI TEST DATA\O\Roule.EMI

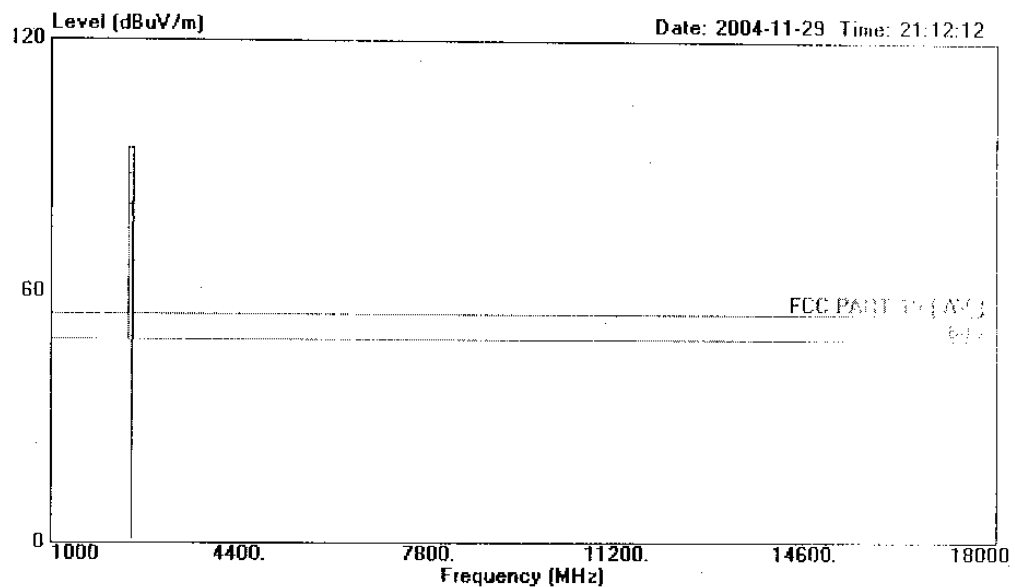

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 3

	Freq	Level	Over Limit	Limit	Read	Probe	Cable	
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	Remark
1	2450.000	76.52	-17.48	94.00	43.73	29.11	3.68	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 72 File#: C:\EMI TEST DATA\O\Roule.EMI

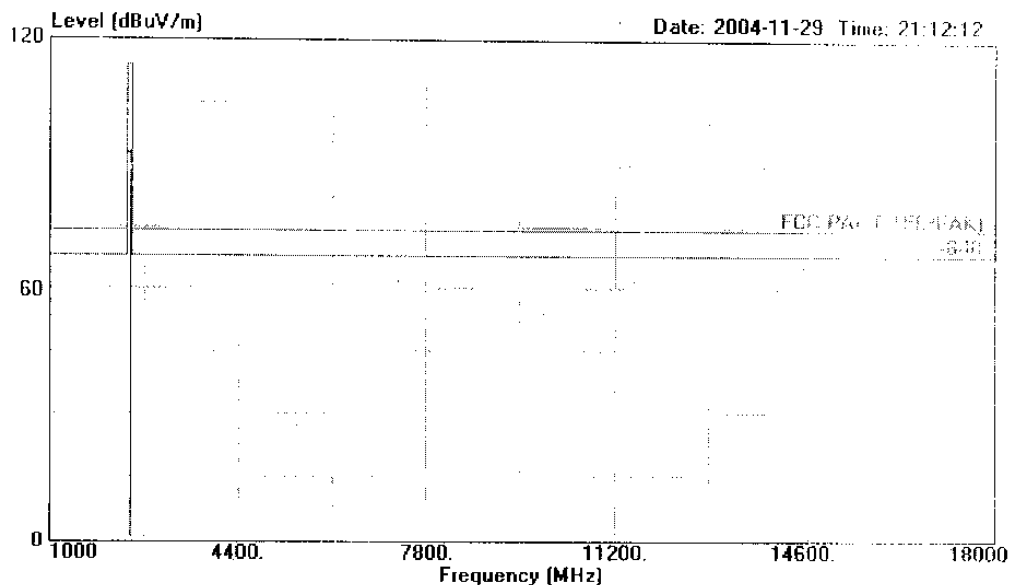

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 3

		Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2450.000	88.52	-25.48	114.00	55.73	29.11	3.68	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 79 File#: C:\EMI TEST DATA\O\Roule.EMI

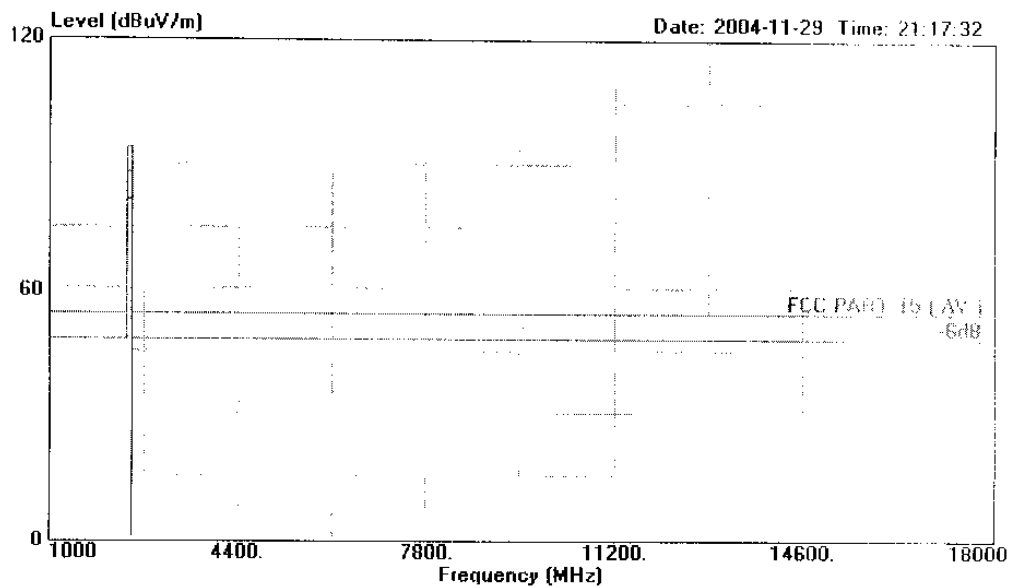

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 4

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2468.000	77.42	-16.58	94.00	44.47	29.15	3.60	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 78 File#: C:\EMI TEST DATA\O\Route.EMI

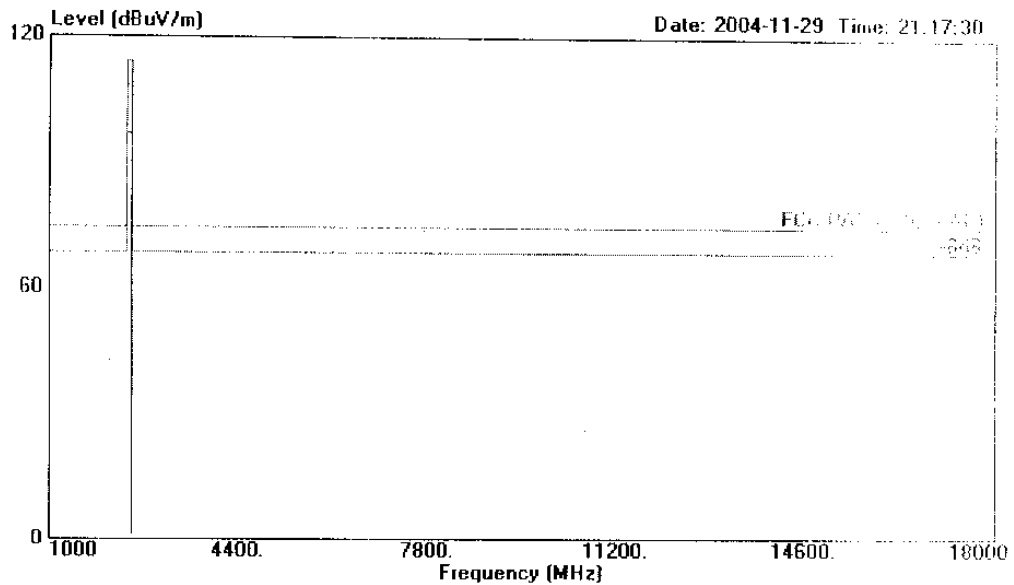

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120W/60Hz
Test Engineer : Seco
Memo : Temp: 24° Humi: 54%
: TX Channel 4

		Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 2468.000	92.42	-21.58	114.00	59.47	29.15	3.80	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 82 File#: C:\EMI TEST DATA\O\Route.EMI

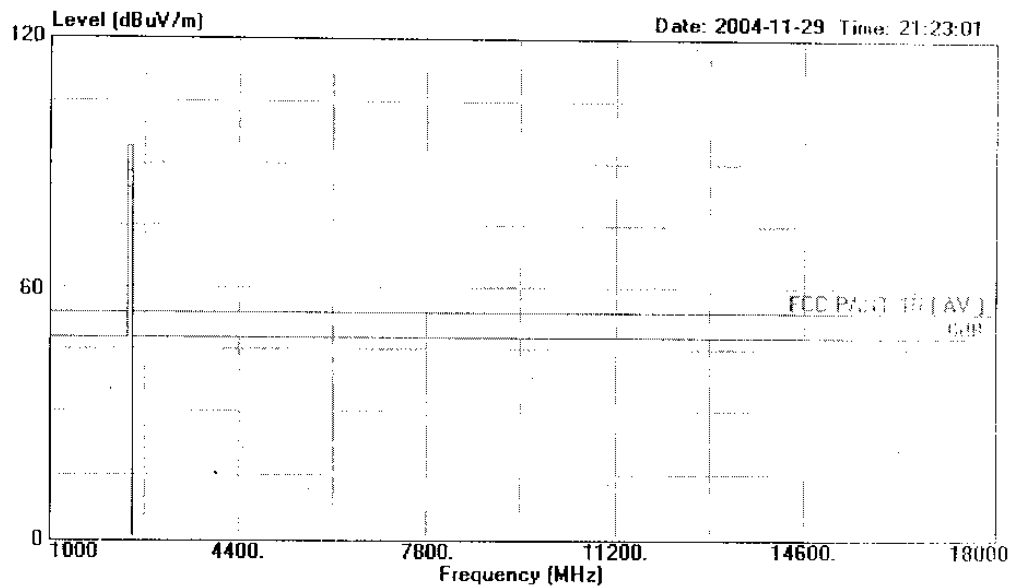

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 4

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2468.000	79.73	-14.27	94.00	46.78	29.15	3.80	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 81 File#: C:\EMI TEST DATA\O\Route.EMI

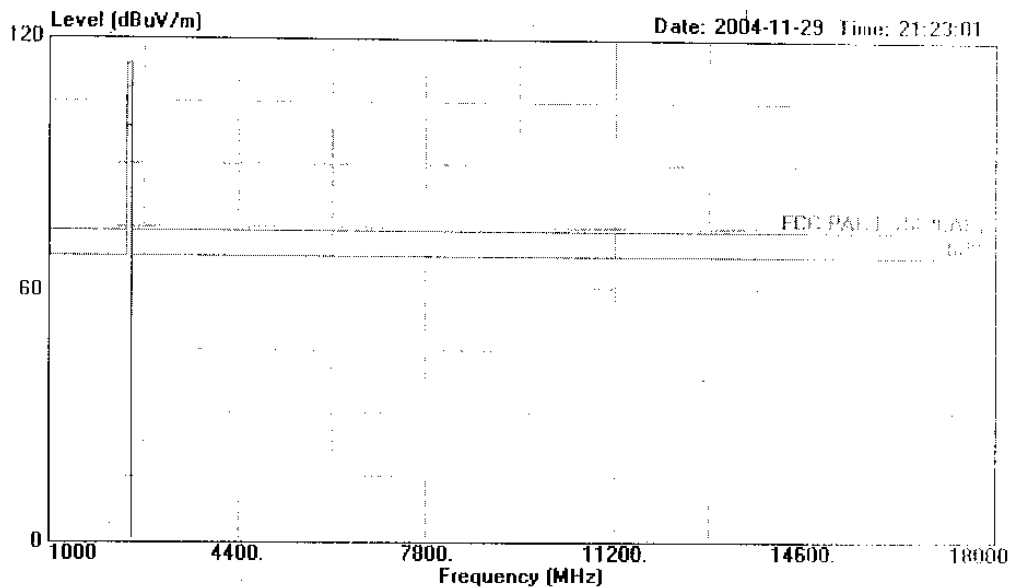

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 4

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2468.000	94.71	-19.29	114.00	61.76	29.15	3.80	Peak

4. BANDWIDTH TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 24,04	1 Y
2.	Antenna	EMCO	3115	9607-4877	Jun 15, 04	1.5 Y

4.2. Test Standard

The test completeness FCC 15C (249).

4.3. Bandwidth Limit

200KHz wide centered on the operation frequency.

4.4. Test Procedure

PASS.




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 91 File#: C:\EMI TEST DATA\O\Roule.EMI

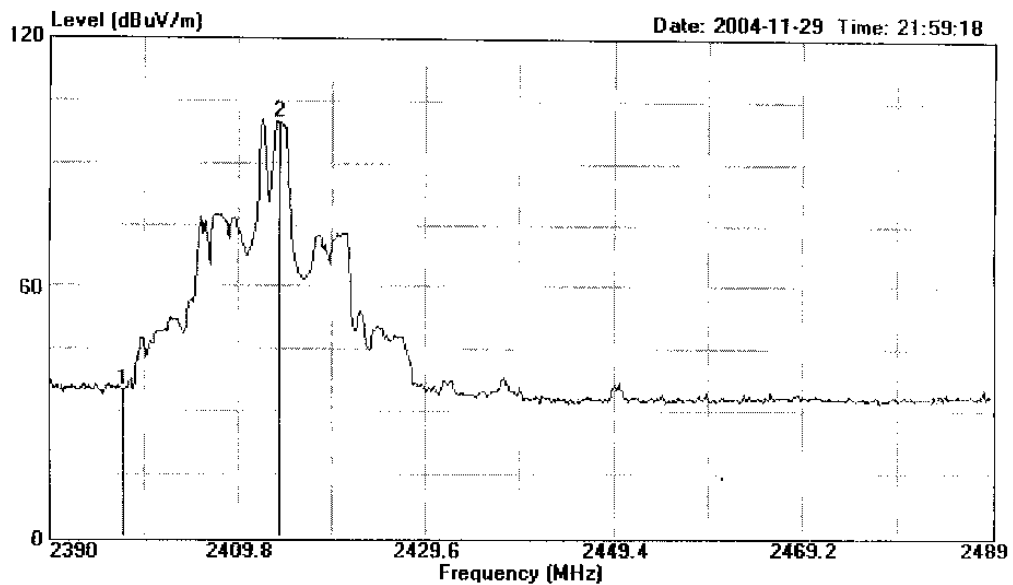

Site : 1# Chamber
Condition : 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: Band Edge Plots:TX Channel 1

			Over	Limit	Read	Probe	Cable	
	Freq	Level	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2397.720	35.39	-----	-----	2.97	29.01	3.41	Peak
2	2414.000	99.93	-----	-----	67.34	29.06	3.53	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 92 File#: C:\EMI TEST DATA\O\Roule.EMI

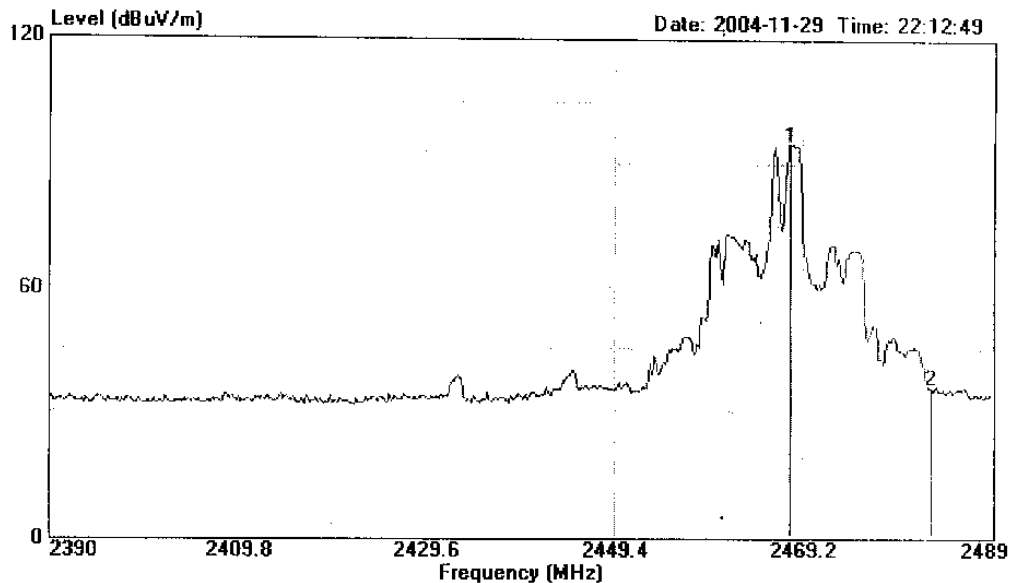

Site : 1# Chamber
Condition : 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
.: Band Edge Plots:TX Channel 4

			Over	Limit	Read	Probe	Cable	
Freq	Level	Limit	Line	Level	Factor	Loss	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2468.000	94.71	-----	-----	61.63	29.18	3.90	Peak
2	2482.660	35.83	-----	-----	2.61	29.22	4.00	Peak


APPENDIX I



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 11 File#: Roule.EMI Date: 2004-11-30 Time: 00:49:23

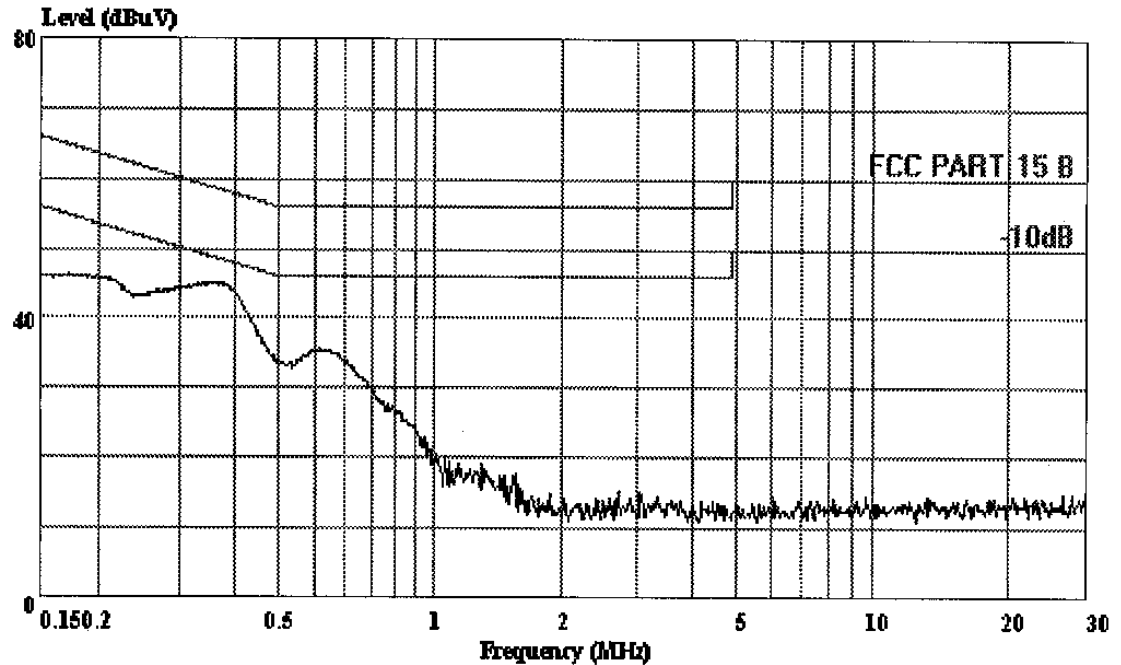

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407
EUT : monitor
M/N : RL-01CRT
OP Condition : TX Channel 1
Test Spec : DC 9V Adaptor AC Input 120V/60Hz
Test Engineer: Seco
Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 12 File#: Roule.EMI

Date: 2004-11-30 Time: 00:49:54

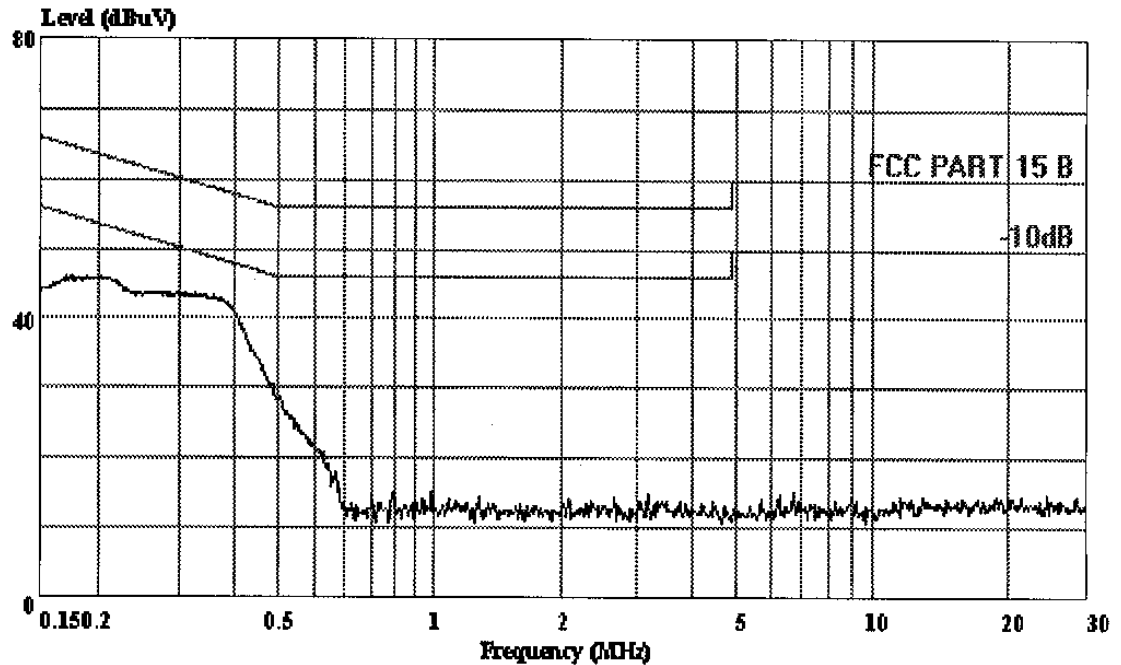

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 1

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco


Comment : Temp:23' Humi:54%



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 14 File#: Roule.EMI Date: 2004-11-30 Time: 00:50:55

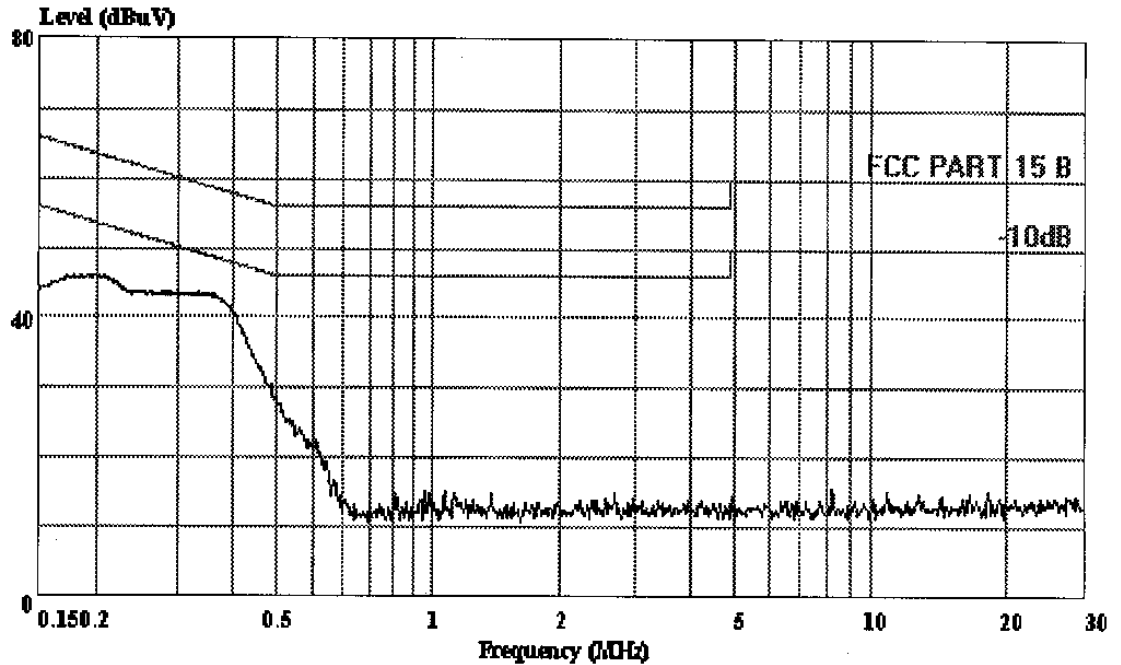

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407
EUT : monitor
M/N : RL-01CRT
OP Condition : TX Channel 2
Test Spec : DC 9V Adaptor AC Input 120V/60Hz
Test Engineer: Seco
Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 13 File#: Roule.EMI

Date: 2004-11-30 Time: 00:50:24

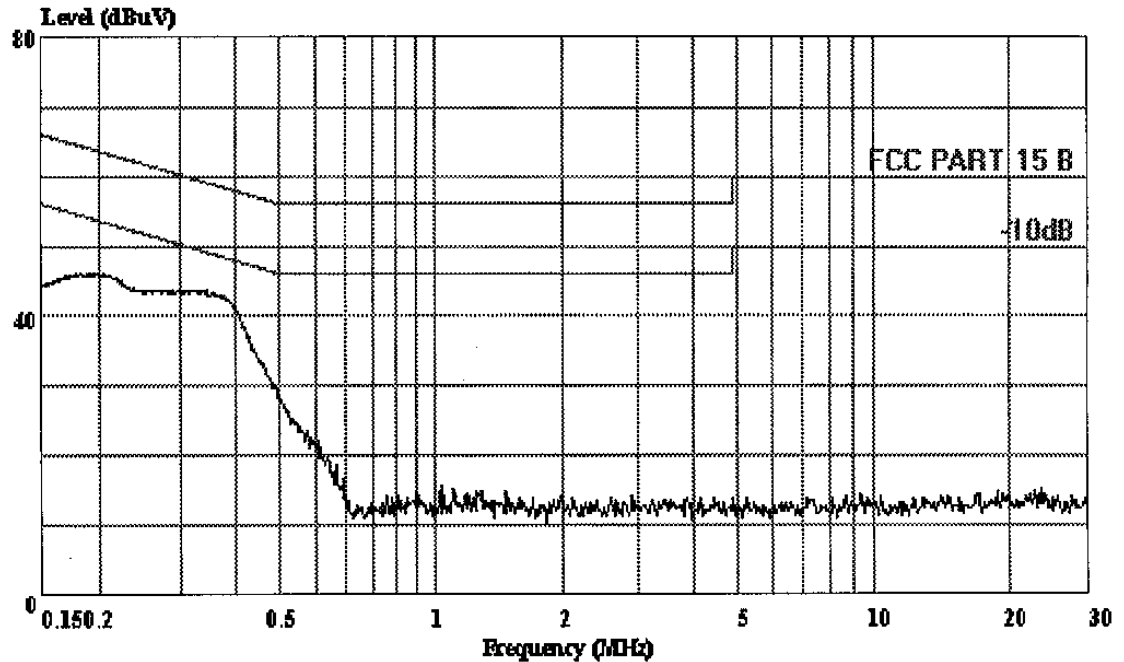

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 2

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 15 File#: Roule.EMI

Date: 2004-11-30 Time: 00:51:25

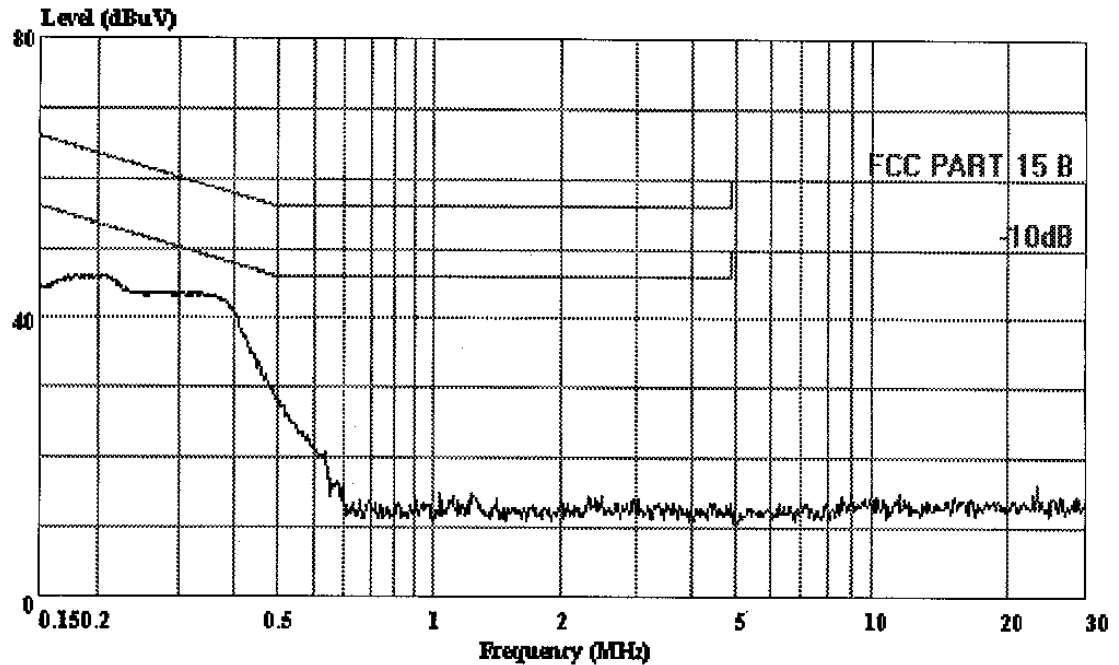

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 3

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 16 File#: Roule.EMI

Date: 2004-11-30 Time: 00:51:55

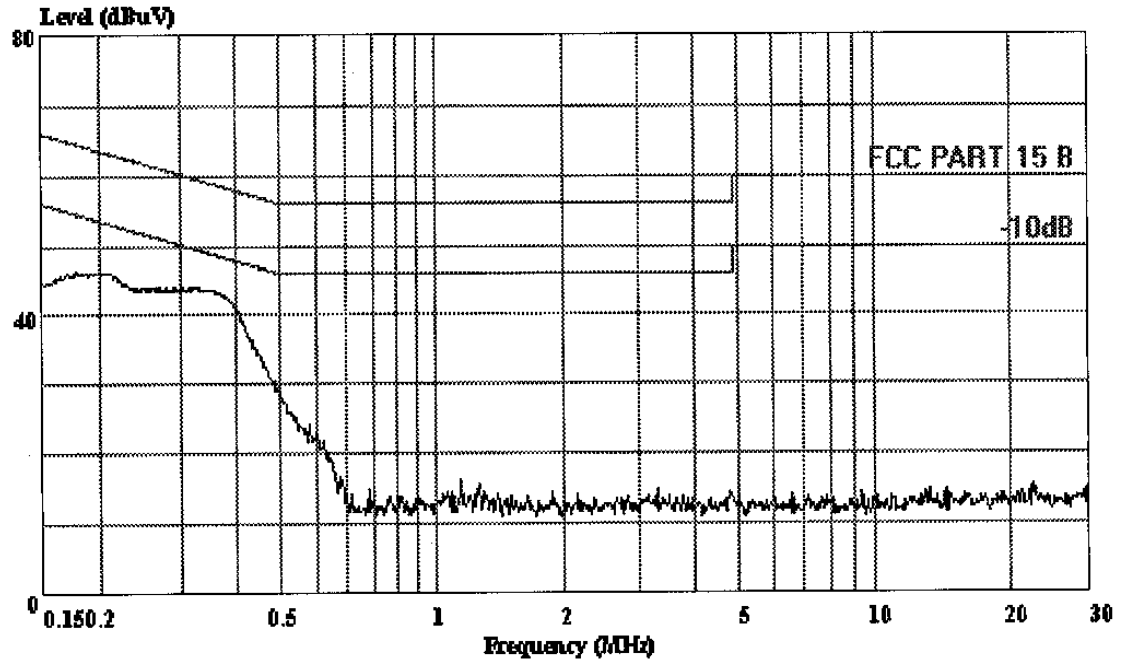

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 3

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 19 File#: Roule.EMI

Date: 2004-11-30 Time: 00:56:01

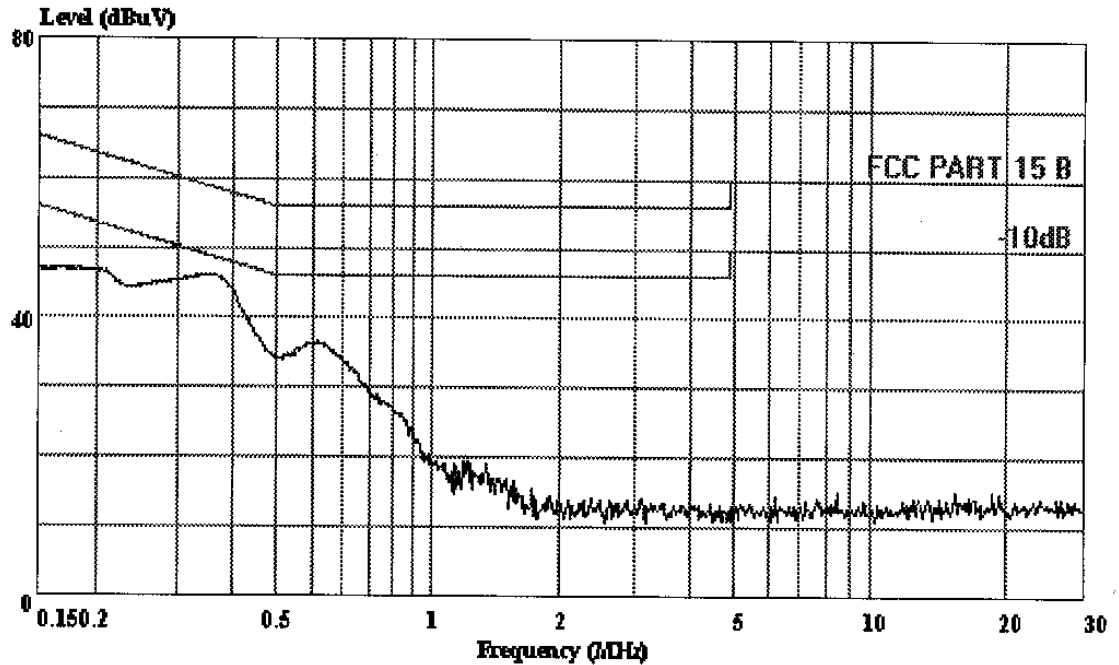

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VA KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 4

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind Park
Tel:0755-26639496
Fax:26632877

Data#: 17 File#: Roule.EMI

Date: 2004-11-30 Time: 00:52:44

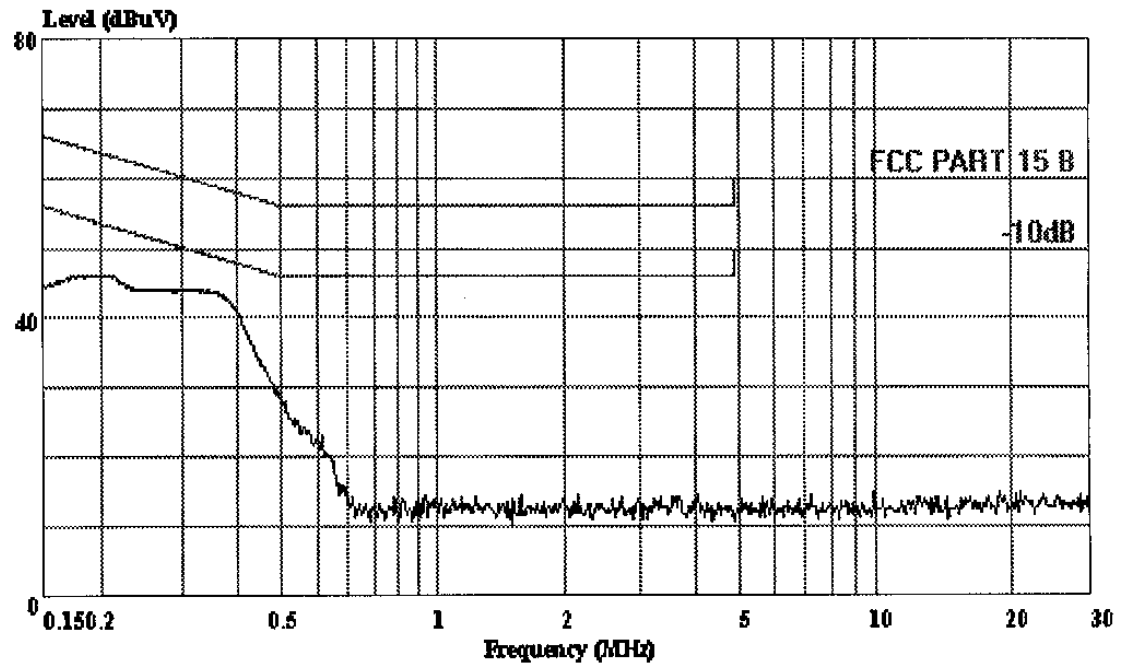

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (Audix ATC)

Trace:

Ref Trace:

Condition: FCC PART 15 B VB KNW-407

EUT : monitor

M/N : RL-01CRT

OP Condition : TX Channel 4

Test Spec : DC 9V Adaptor AC Input 120V/60Hz

Test Engineer: Seco

Comment : Temp:23' Humi:54%

APPENDIX II



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 22 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:11

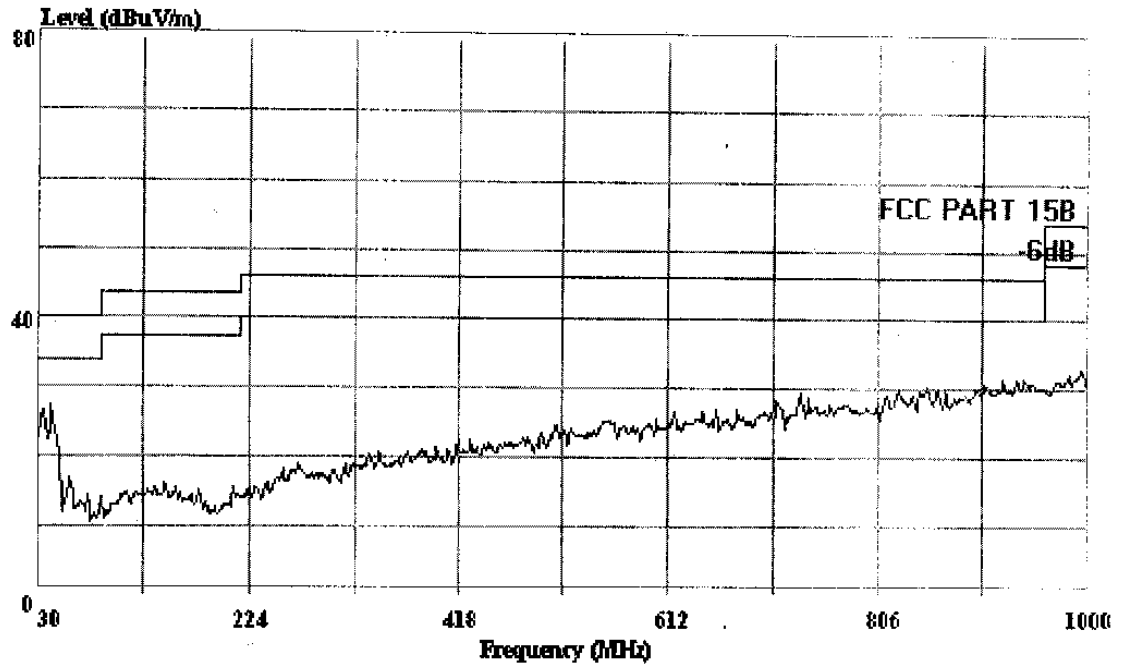

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 21 File#: Roule.EMI

Date: 2004-11-28 Time: 12:01:53

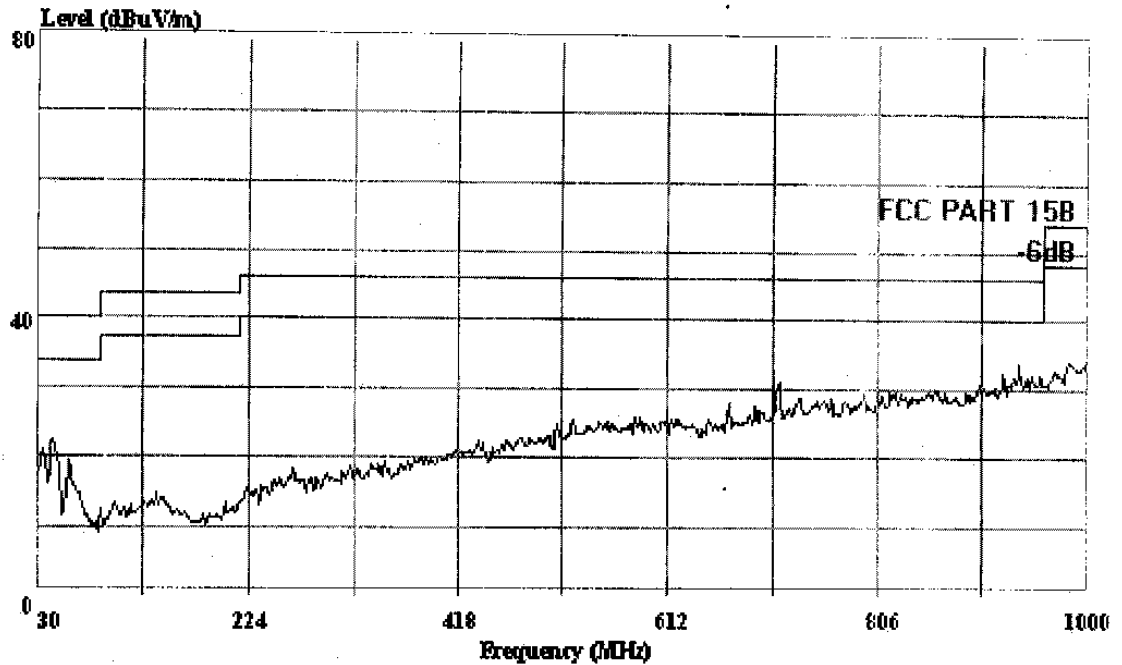

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 1



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 23 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:27

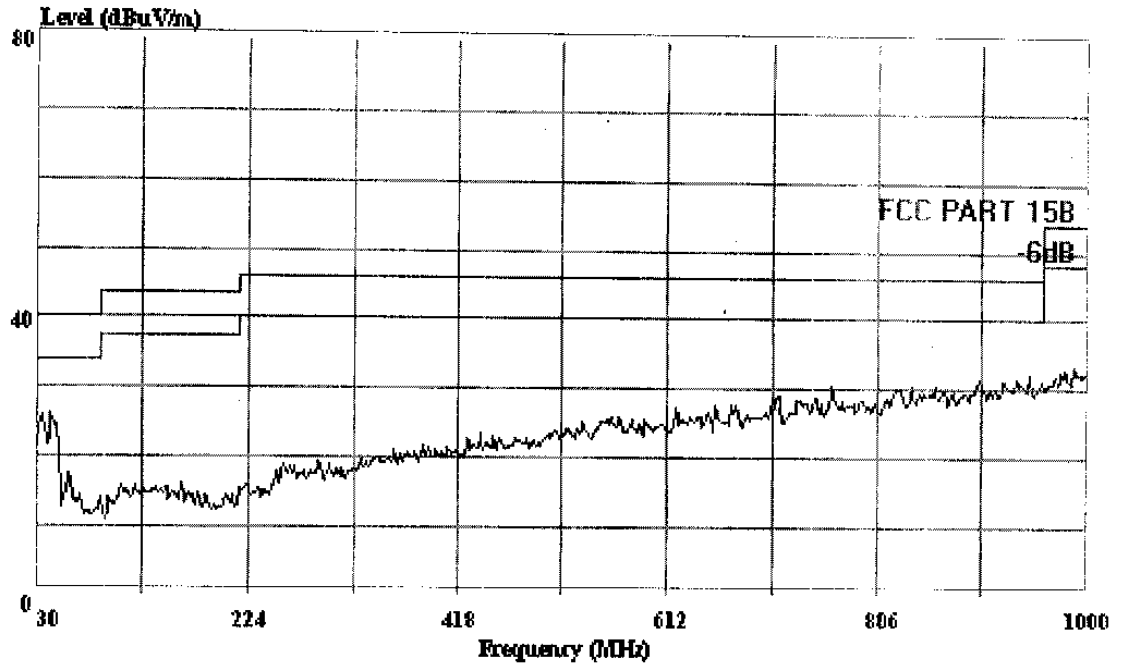

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RI-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 2



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 24 File#: Roule.EMI

Date: 2004-11-28 Time: 12:02:43

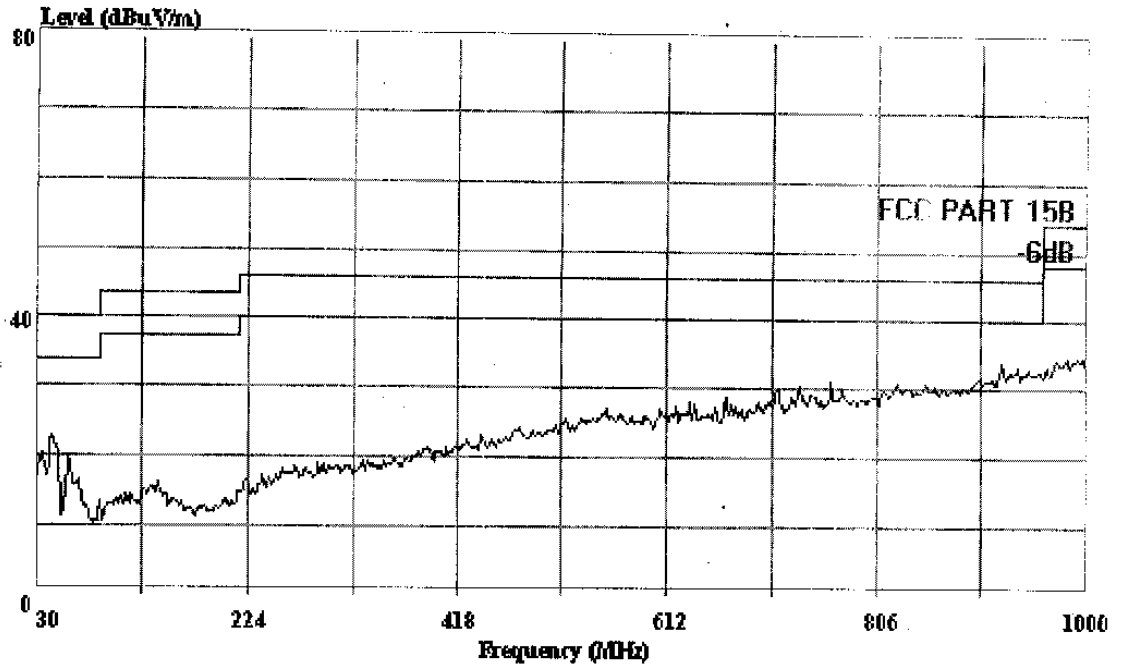

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 2



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 26 File#: Roule.EMI

Date: 2004-11-28 Time: 12:03:24

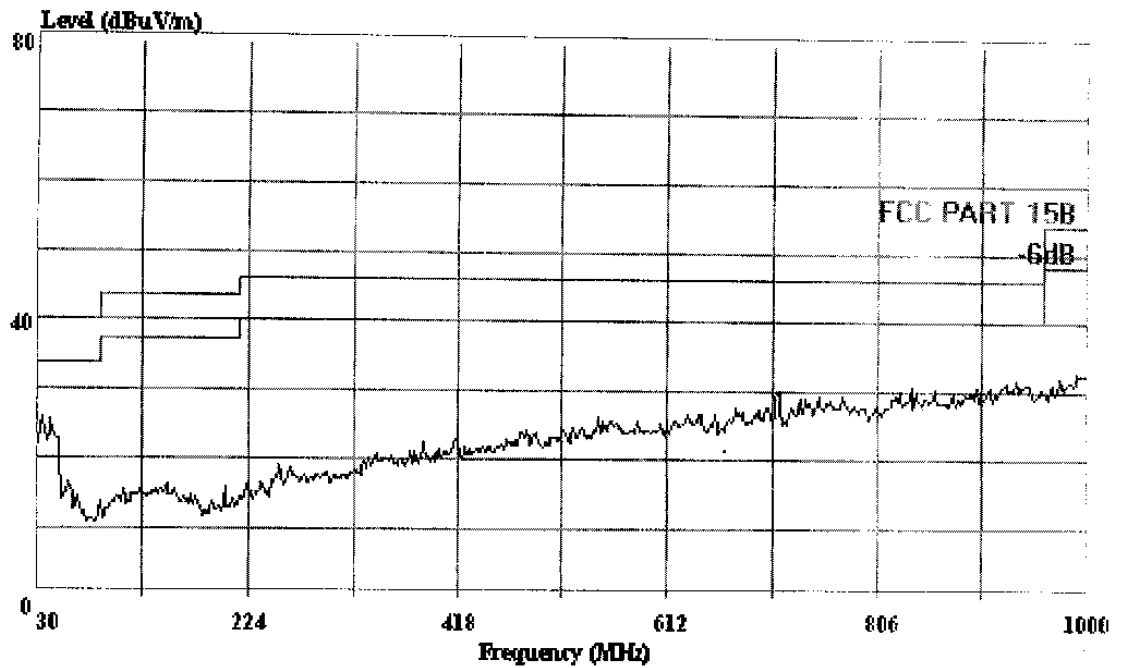

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 3



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 25 File#: Roule.EMI

Date: 2004-11-28 Time: 12:03:01

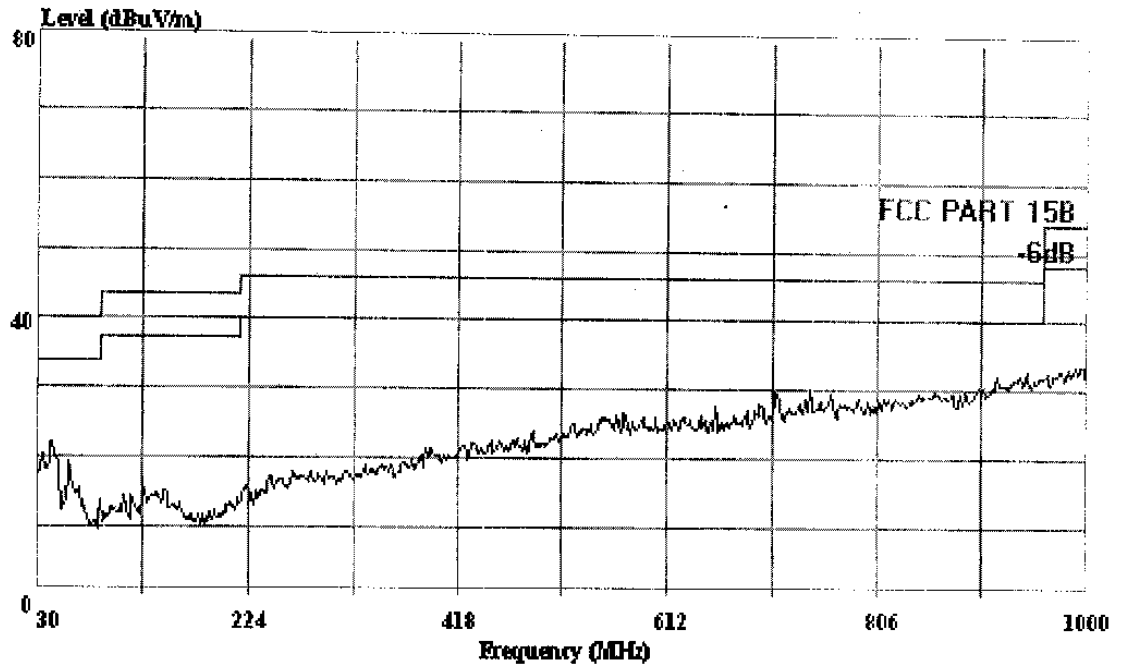

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 3



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 27 File#: Roule.EMI

Date: 2004-11-28 Time: 12:04:05

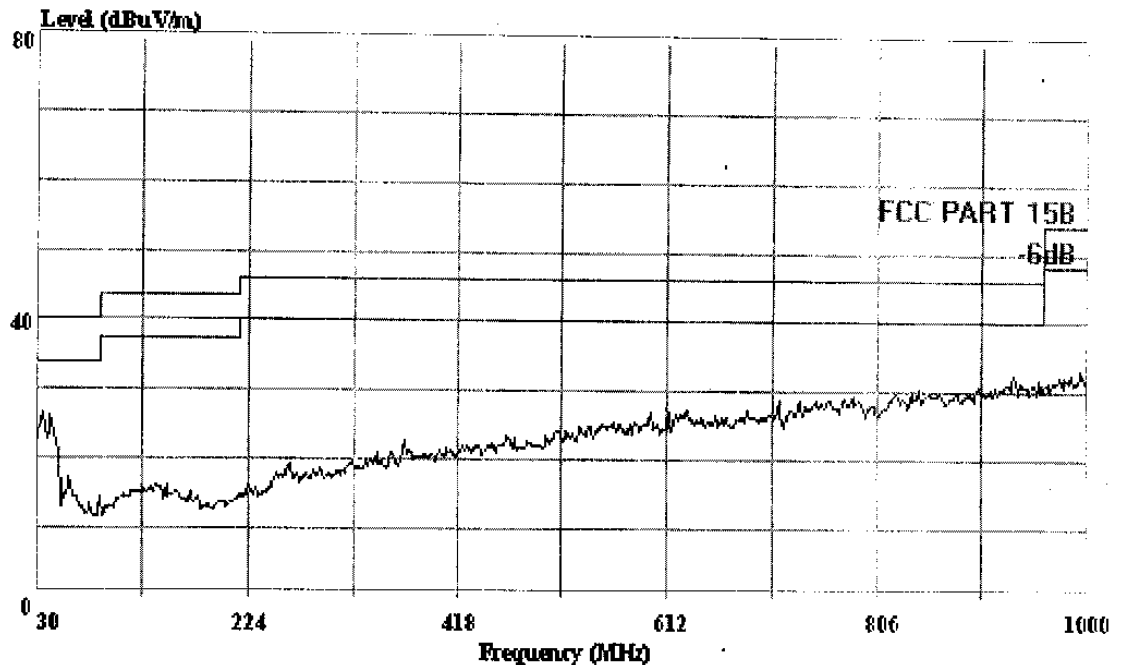

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 29 File#: Roule.EMI

Date: 2004-11-28 Time: 12:06:07

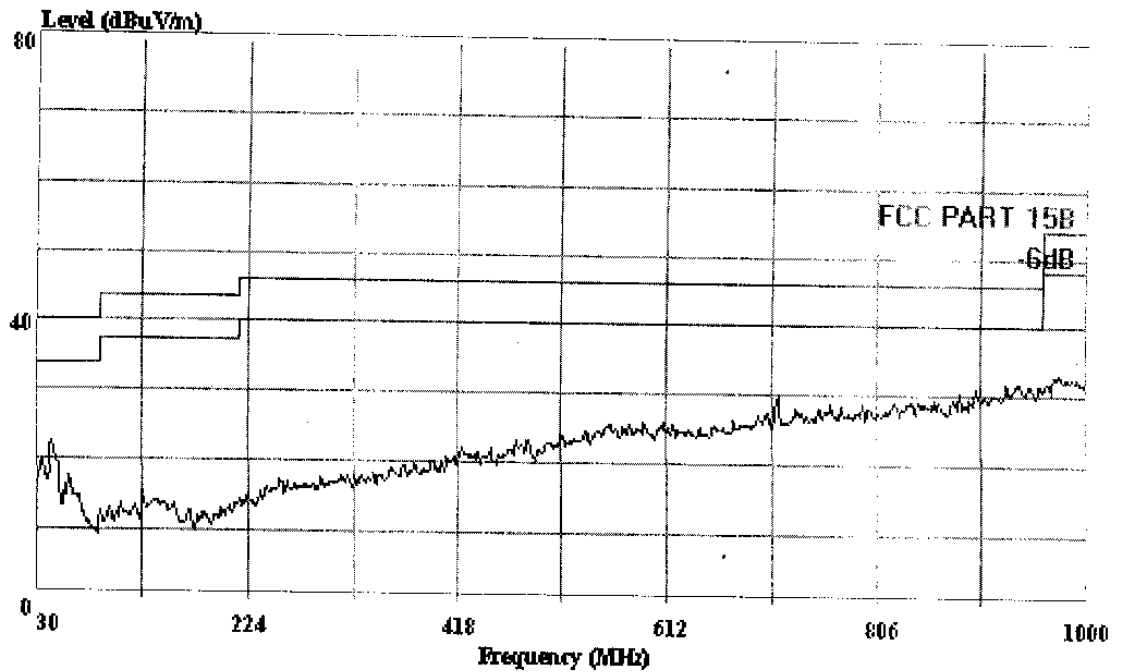

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL

EUT : monitor

M/N : RL-01CRT

Power : DC 9V With Adaptor AC Input 120V/60Hz

Engineer: Seco

Memo : Temp:24' Humi:54%

: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 62 File#: C:\EMI TEST DATA\O\Route.EMI

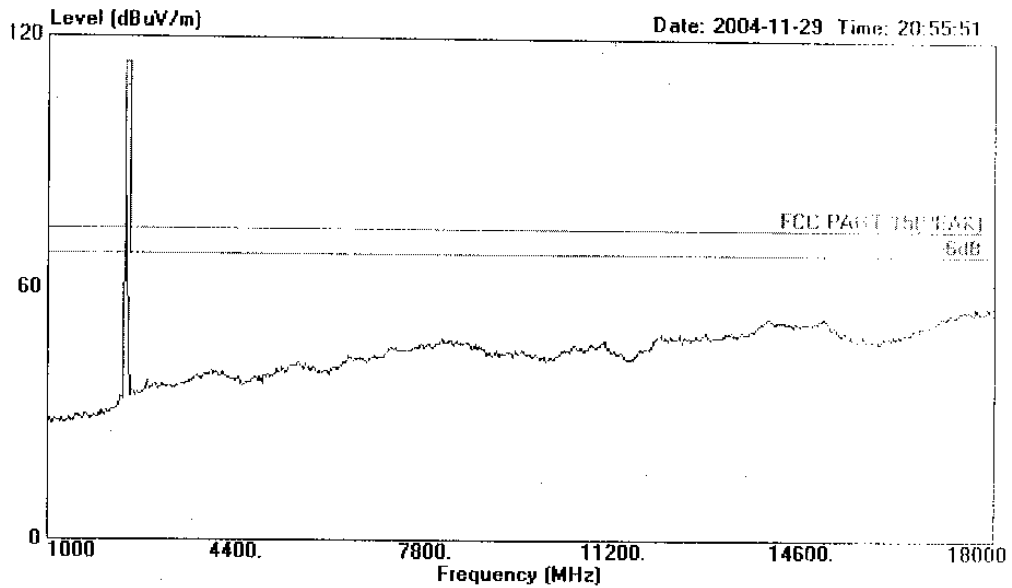

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 59 File#: C:\EMI TEST DATA\O\Roule.EMI

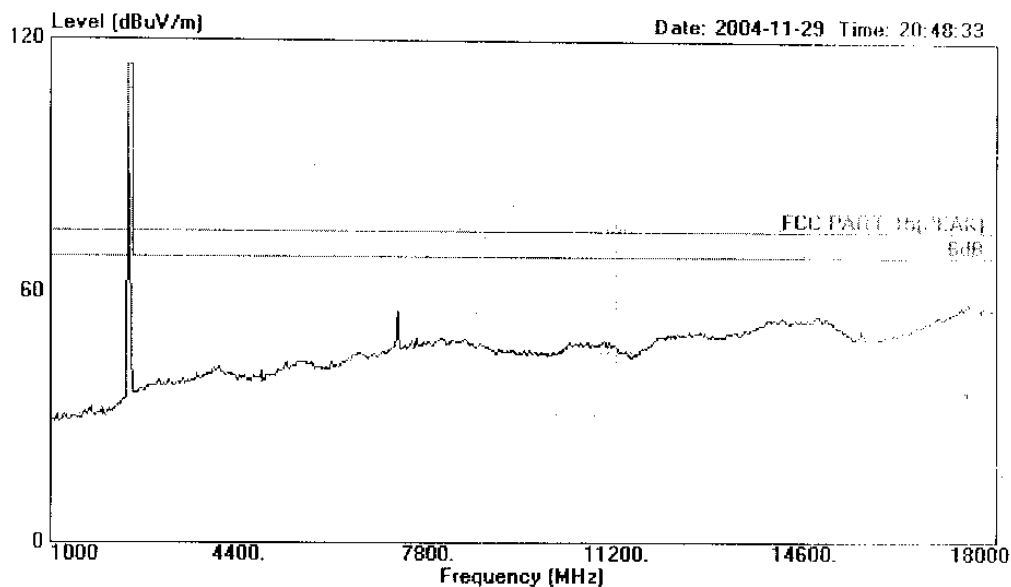

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 65 File#: C:\EMI TEST DATA\O\Roule.EMI

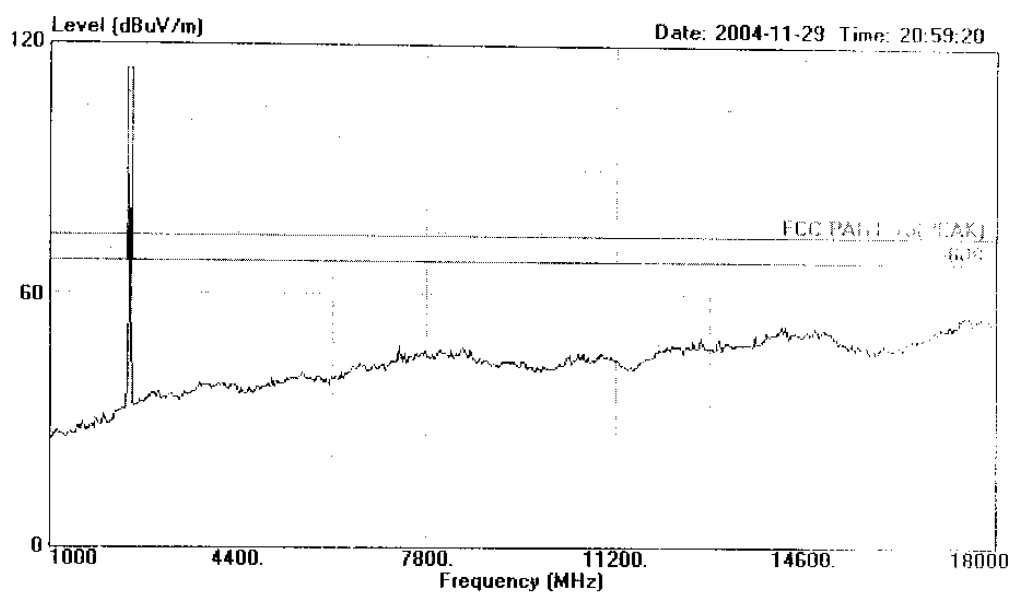

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632377

Data#: 68 File#: C:\EMI TEST DATA\O\Roule.EMI

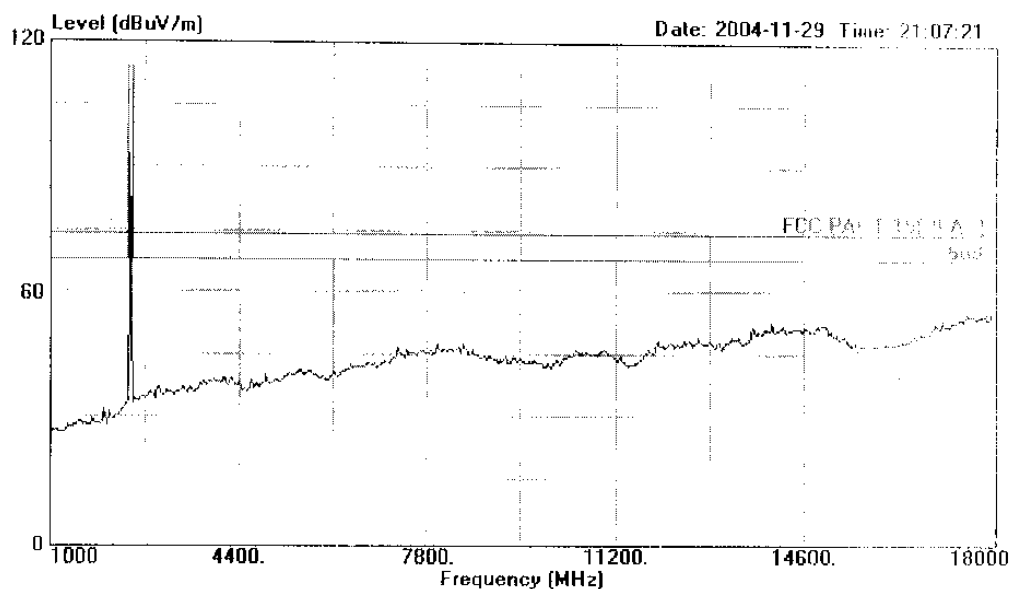

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ka Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 74 File#: C:\EMI TEST DATA\O\Roule.EMI

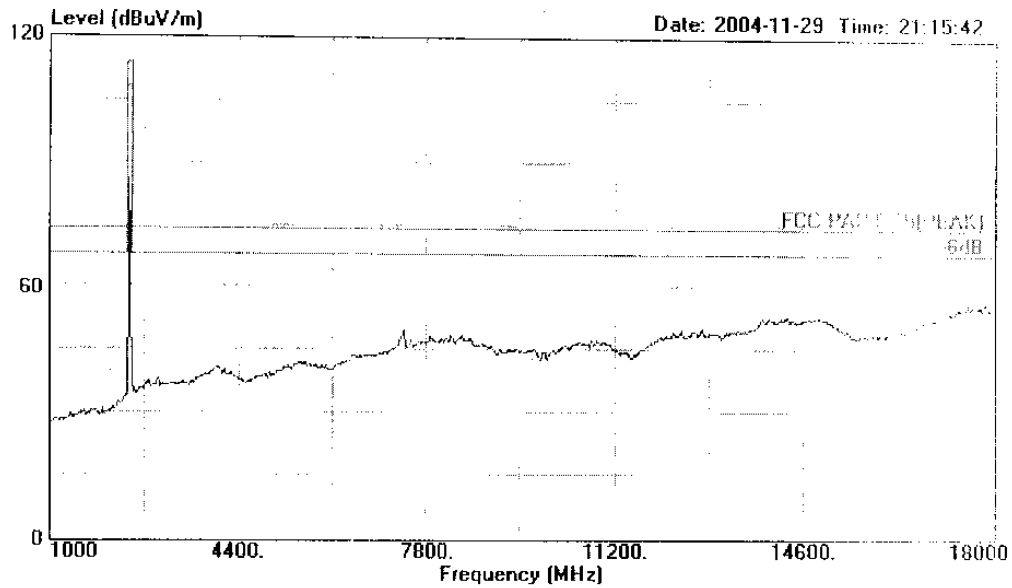

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120W/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 71 File#: C:\EMI TEST DATA\O\Roule.EMI

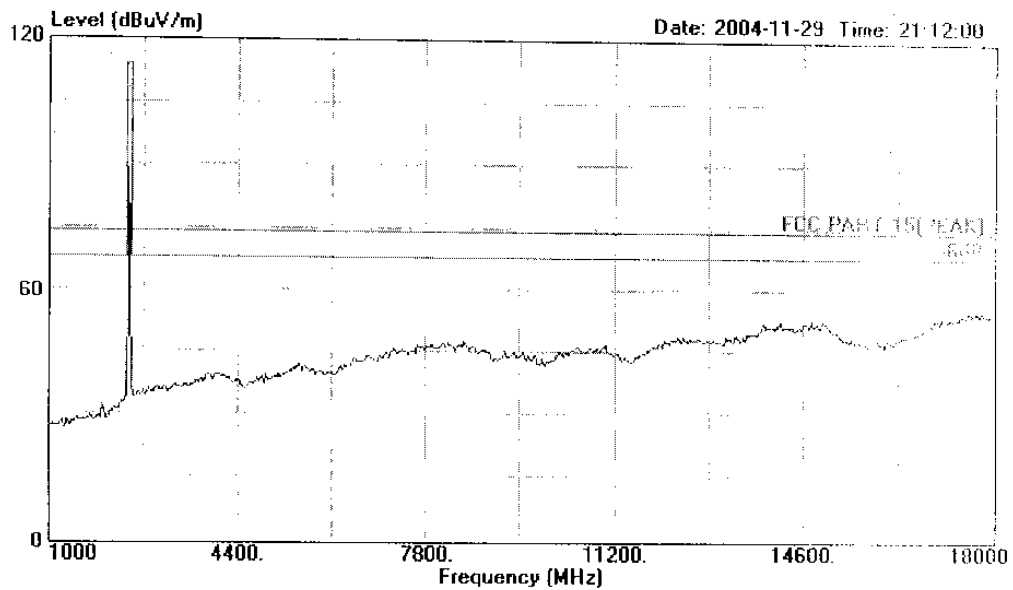

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 77 File#: C:\EMI TEST DATA\O\Boule.EMI

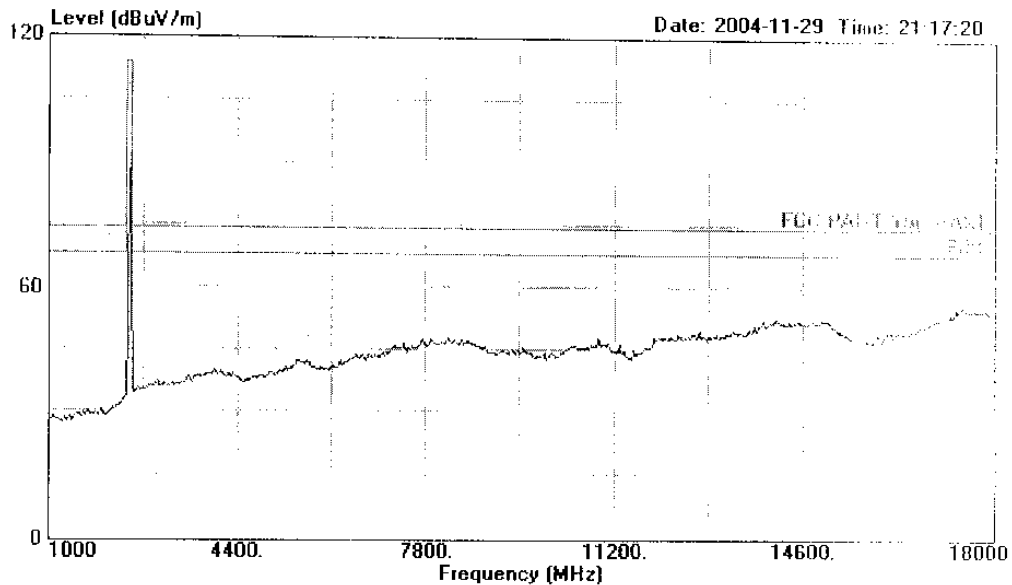

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115 FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Fang Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 80 File#: C:\EMI TEST DATA\O\Roule.EMI

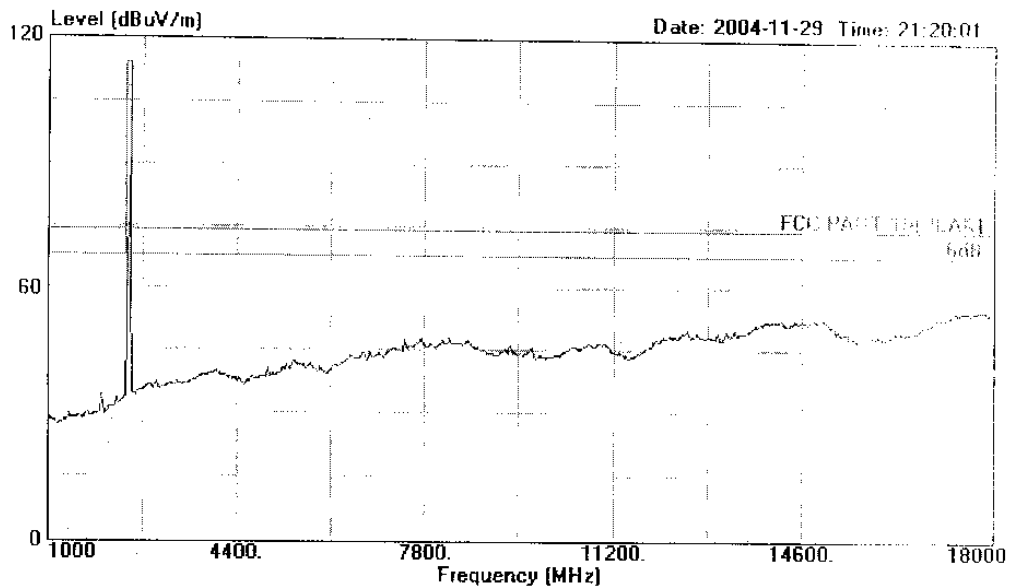

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115 FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp: 24° Humi: 54%
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 84 File#: C:\EMI TEST DATA\O\Roule.EMI

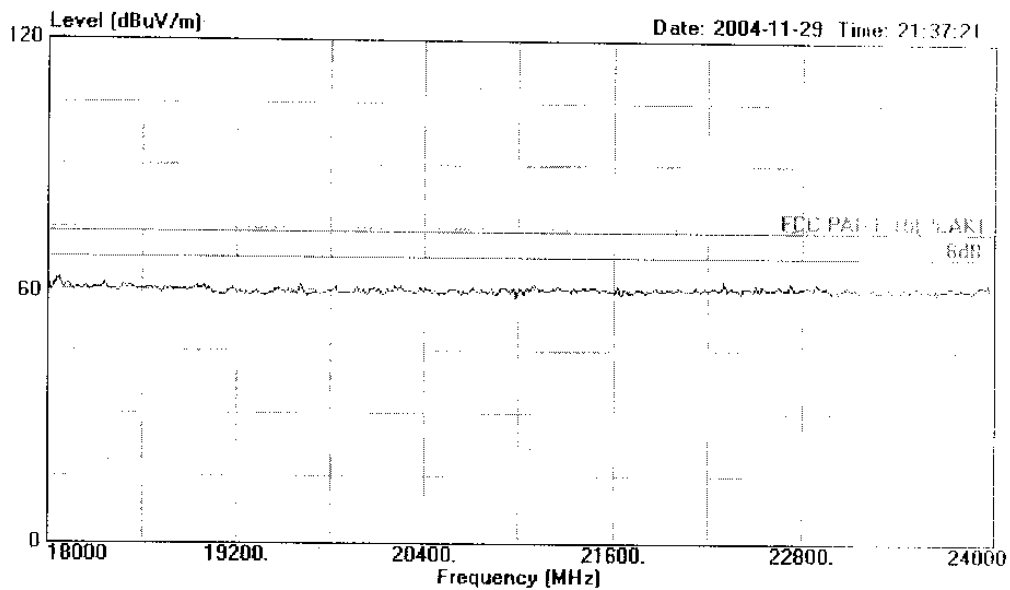

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp: 24° Humi: 54%
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 83 File#: C:\EMI TEST DATA\04Roule.EMI

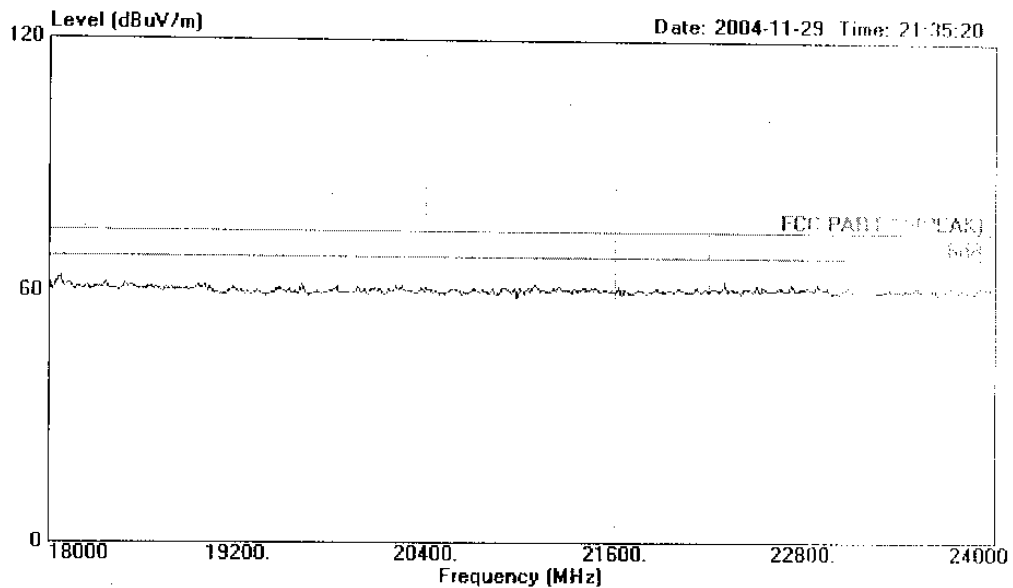

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 1




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 85 File#: C:\EMI TEST DATA\O\Roule.EMI

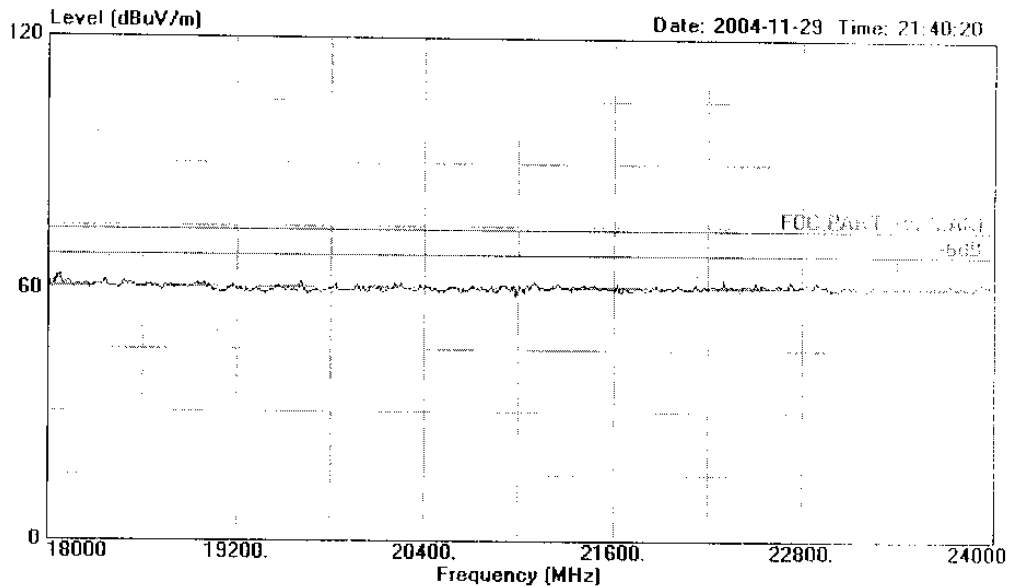

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Mantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 86 File#: C:\EMI TEST DATA\O\Roule.EMI

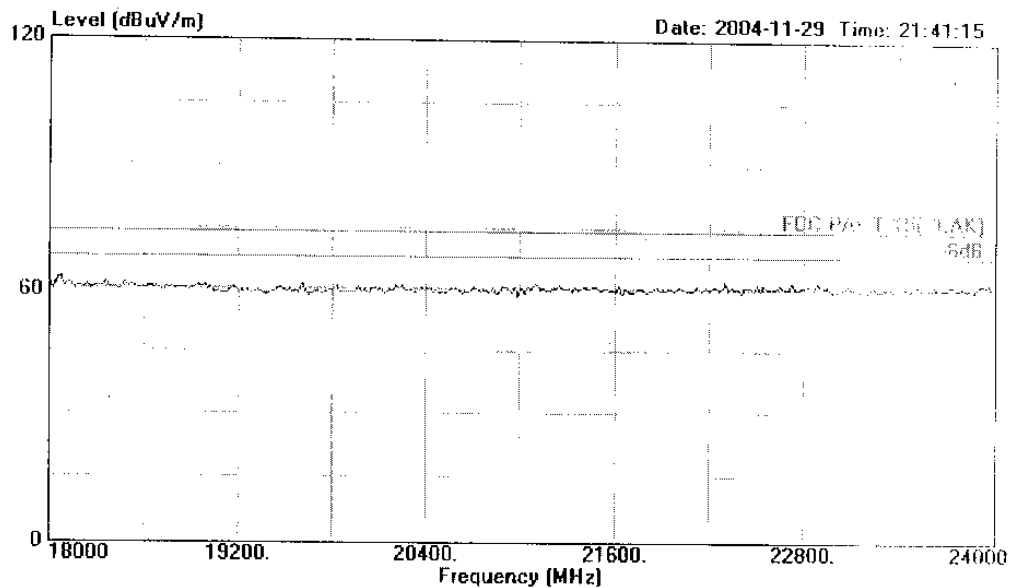

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 2




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Mantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 88 File#: C:\EMI TEST DATA\O\Roule.EMI

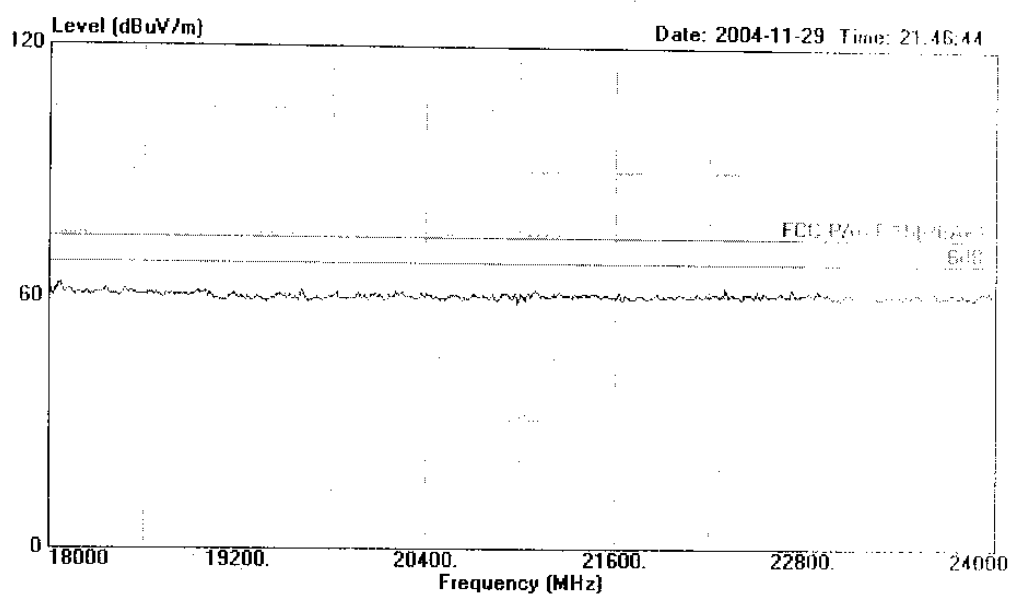

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24' Humi:54%
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 87 File#: C:\EMI TEST DATA\O\Roule.EMI

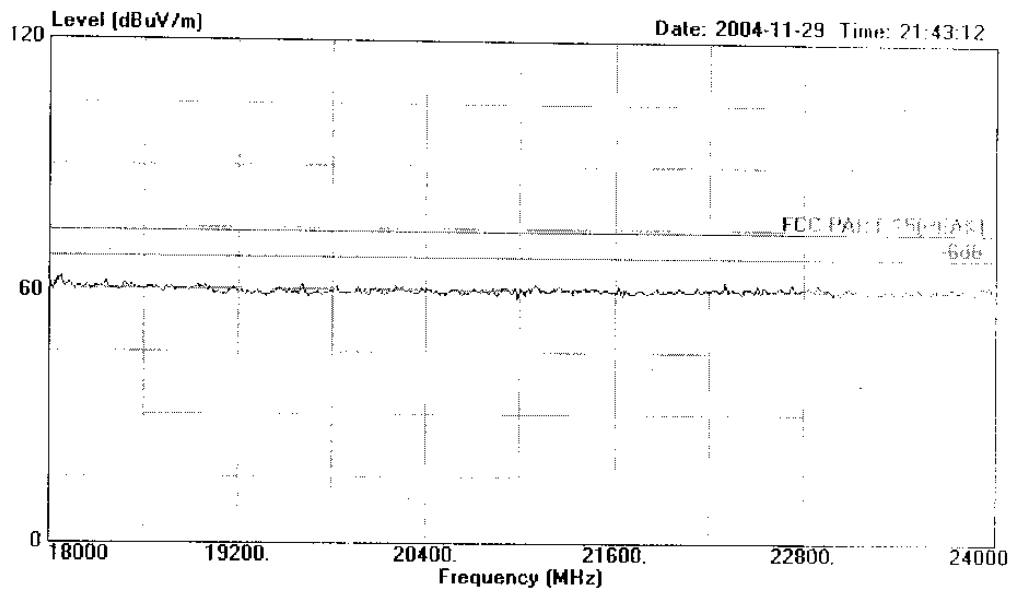

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 3




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block S2,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632677

Data#: 89 File#: C:\EMI TEST DATA\O\Boule.EMI

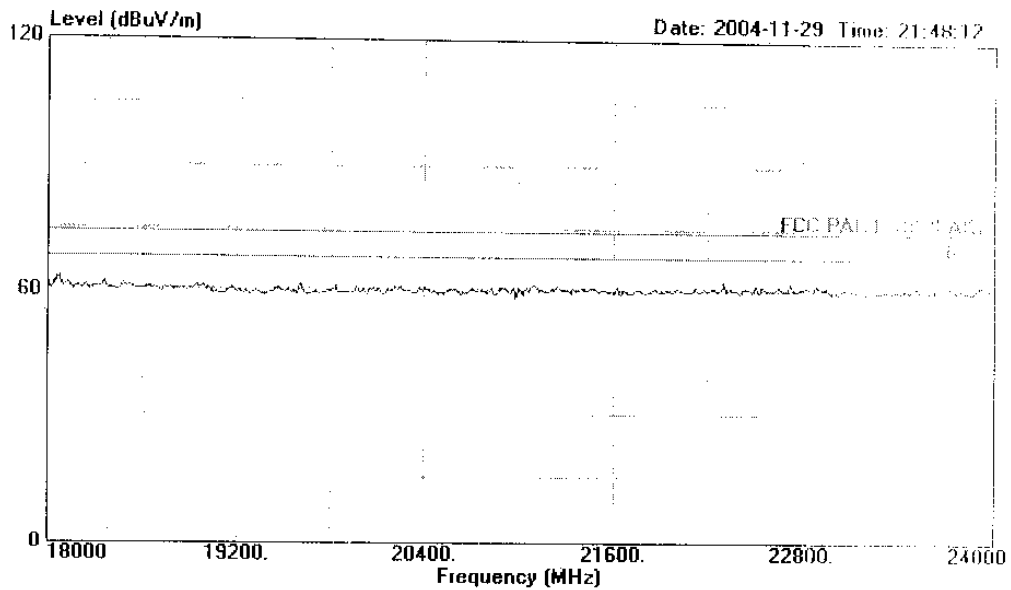

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 3115FACTOR HORIZONTAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp:24° Humi:54%
: TX Channel 4




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 90 File#: C:\EMI TEST DATA\O\Boule.EMI

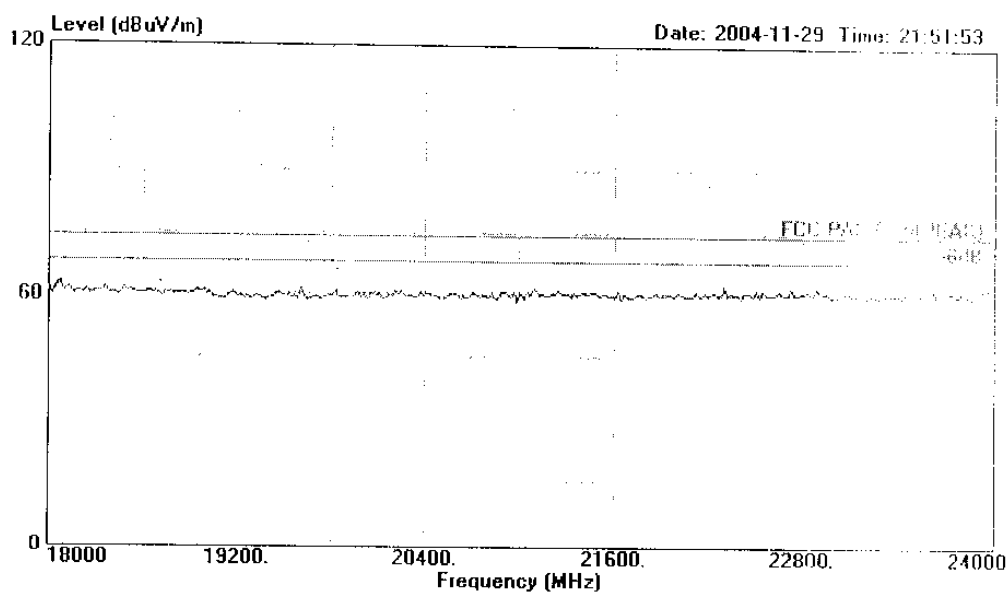

Site : 1# Chamber
Condition : FCC PART 15 (PEAK) 3m 311SFACITOR VERTICAL
EUT : monitor
M/N : RL-01CRT
Power : DC 9V With Adaptor AC Input 120V/60Hz
Test Engineer : Seco
Memo : Temp: 24° Humi: 54%
: TX Channel 4