

TX ASSY - KEYLESS ENTRY / RX ASSY - KEYLESS ENTRY

User's Manual

TX Model: Dsec - VQTXNA13, Dsec - VQTXNA15, Dsec - VQTXNA16
RX Model: 223004360

Table of contents

1. Constitution of the Radio Frequency Keyless Entry system Controller	
for vehicle	3
2. User's manual	4
3. Block Diagram	5
3.1 Transmitter	5
3.2 Receiver	6
4. Specification	7
4.1 CPU	7
4.2 RF Receiver Module	7
4.3 Other	7
5. Data structures	8

1. Constitution of the Radio Frequency Keyless Entry System for vehicle

The radio frequency keyless entry is a system that it controls locking and unlocking doors. It can open and close sliding doors and tail gate automatically. It can notice us where the car is by panic button.

The TRANSMITTER is a device that transmits the signal when the button is pressed. The transmission signal consists of several synchronous codes, unique identification code, security code and function code.

The RECEIVER is fixed inside the vehicle. It works intermittently to prevent the battery exhaustion. When the receiver detects the synchronous code, it runs continuously to receive the signals completely. After receiving the signal, the receiver decides which operation will be performed. The user can select the following operations by pressing the button of the remote transmitter.




2. User's manual


Key	Mark	Operation	Function	Model
Lock		Lock key is pressed	CENTRAL LOCK	Dsec-VQTXNA13 Dsec-VQTXNA15 Dsec-VQTXNA16
			Horning for 30ms	
			Lighting turn lamp for 1 second	
		Lock key is pressed for 0.5 seconds	DRIVER POWER WINDOW CLOSE	
			Closing window of driver's seat	
Unlock		Unlock key is pressed	CENTRAL UNLOCK	Dsec-VQTXNA13 Dsec-VQTXNA15 Dsec-VQTXNA16
			Blinking turn lamp twice for 1 second	
		Unlock key is pressed for 0.5 seconds	DRIVER POWER WINDOW OPEN	
			Opening window of driver's seat	
Panic		Panic key is pressed	To stop horning by pressing the panic key	Dsec-VQTXNA13 Dsec-VQTXNA15 Dsec-VQTXNA16
			Horning for 27 seconds	
			Blinking turn lamp for 27 seconds	
Sliding Door Left		Sliding door left key is pressed for 0.5 seconds	To open or close LEFT sliding door by pressing the Sliding Door Left button	Dsec-VQTXNA15 Dsec-VQTXNA16
Sliding Door Right		Sliding door right key is pressed for 0.5 seconds	To open or close RIGHT sliding door by pressing the Sliding Door Right button	Dsec-VQTXNA15 Dsec-VQTXNA16
Tail Gate		Tailgate key is pressed for 0.5 seconds	To open or close tailgate by pressing the tailgate button	Dsec-VQTXNA16
			Blinking turn lamps 5 times	

3. Block diagram

3.1 Transmitter

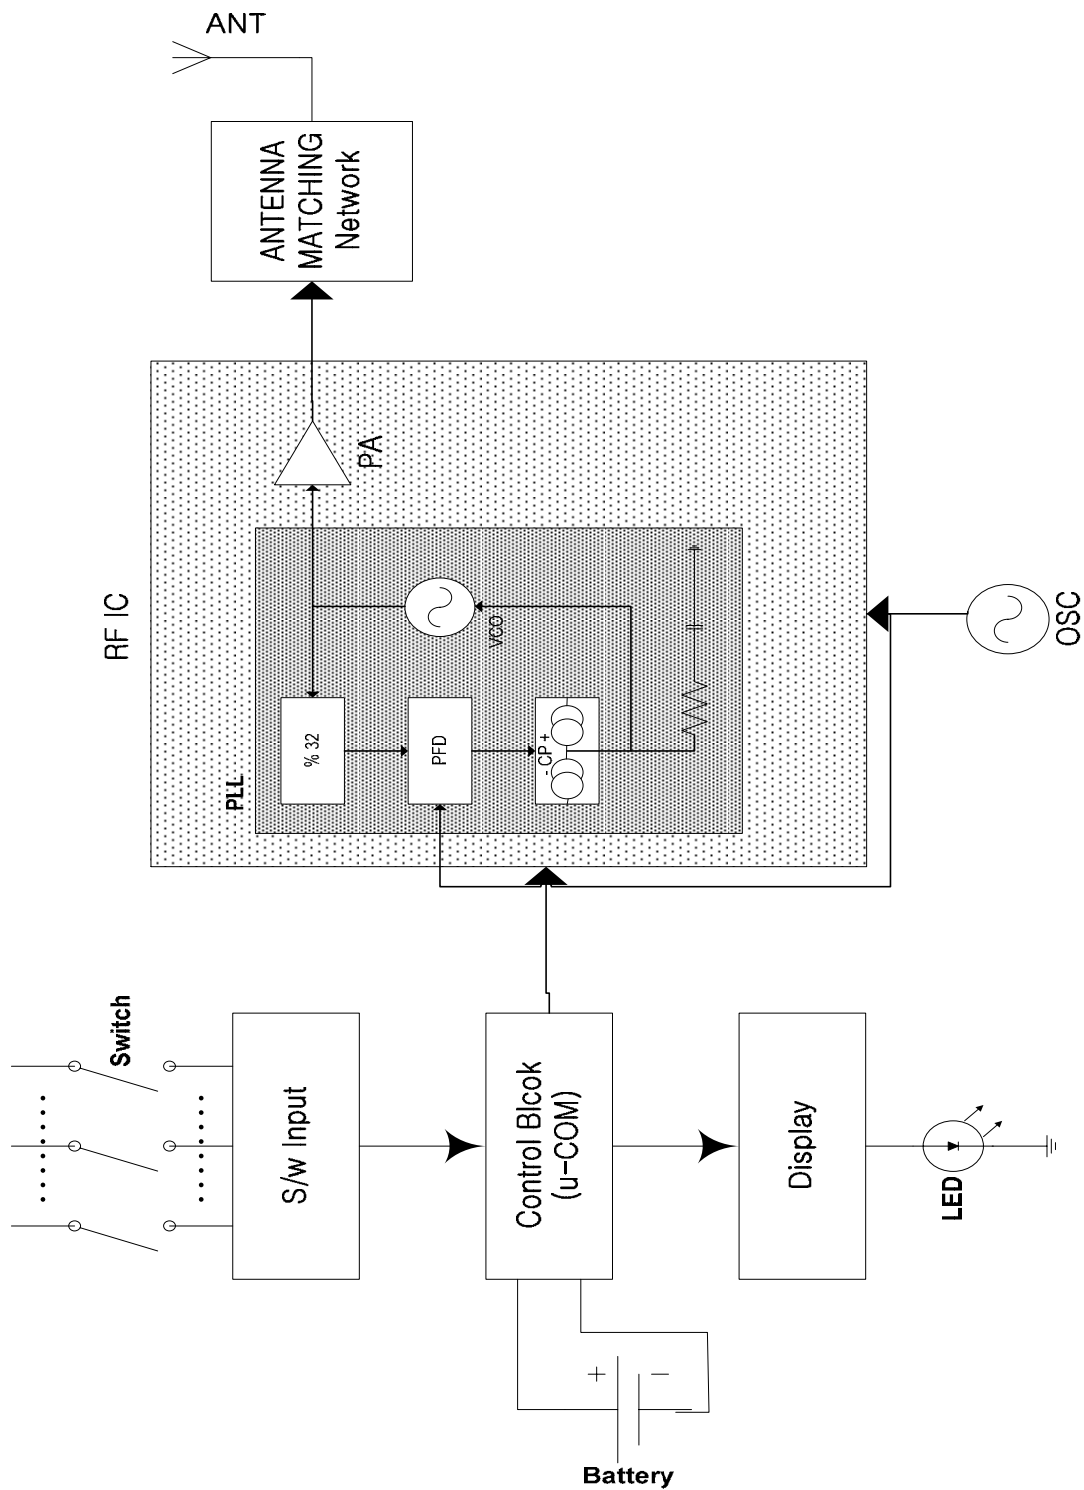

3.2 Receiver

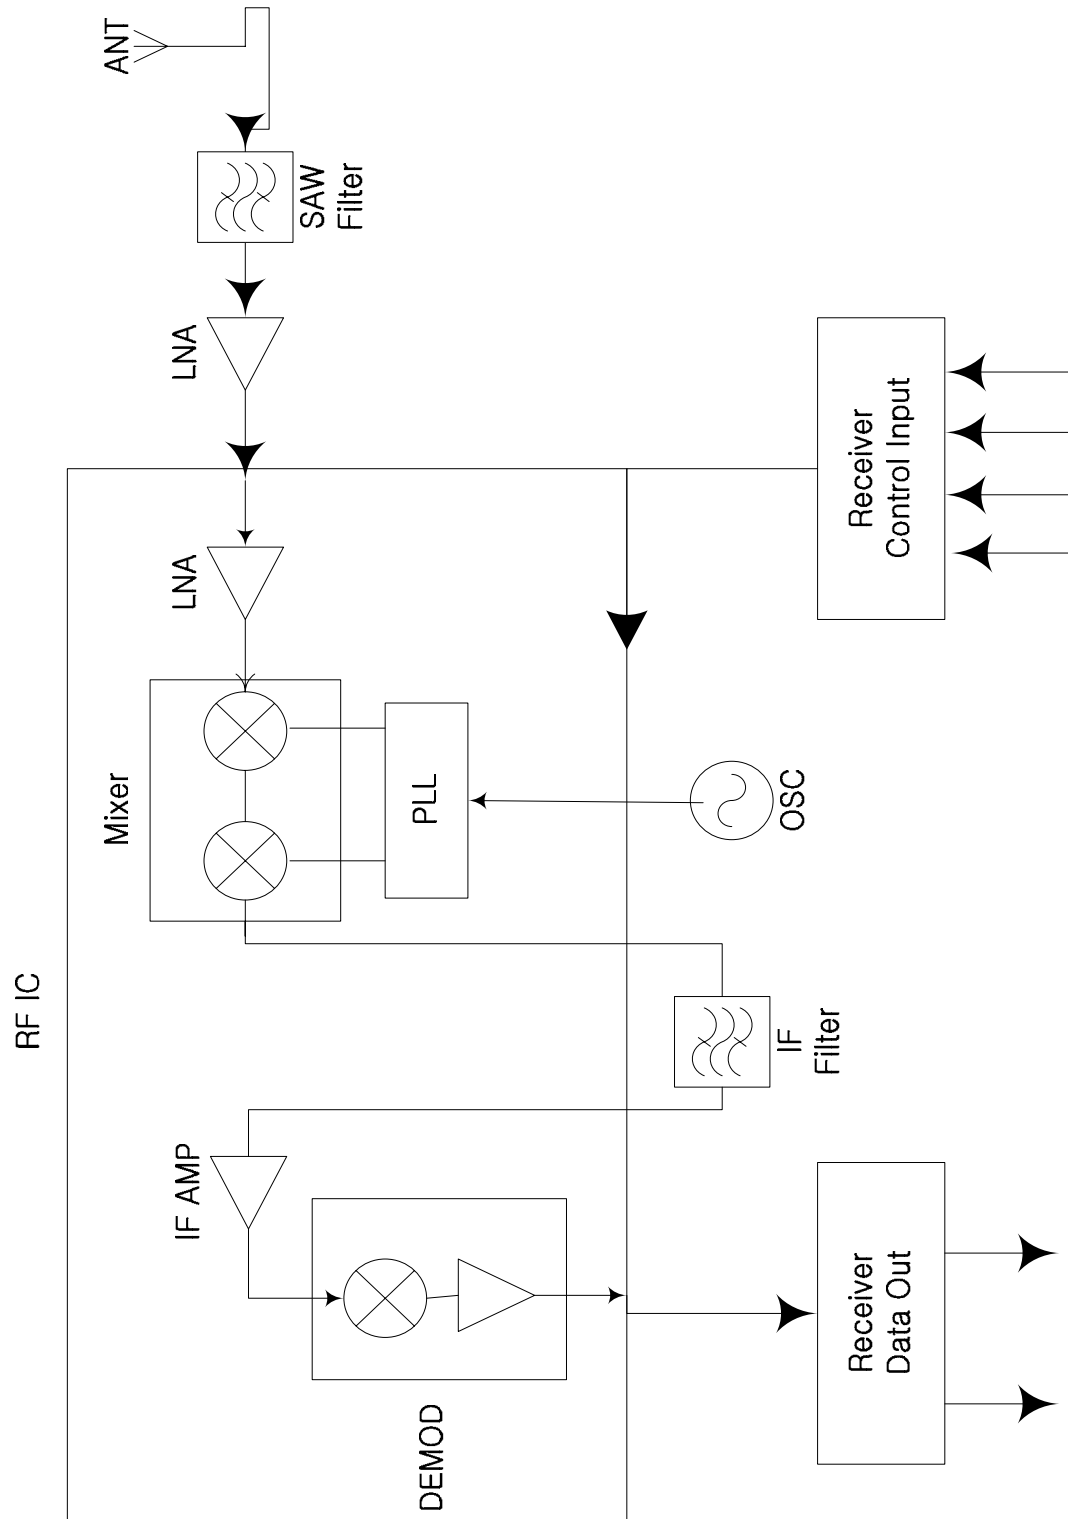

4. Specification

4.1 CPU

Type	PIC16F676 Manufacturer : MICROCHIP
RFIC	TH72001 Manufacturer : Melexis
Memory	2K × 8bit
Clock frequency	4.00MHz
Clock frequency generation	INTERNAL
Package	14pin TSSOP


4.2 RF Receiver module

Local clock frequency	315 MHz
Frequency generation	Crystal
Modulation Scheme	FM (Single Superheterodyne)
Bandwidth	±100KHz
RFIC	TH71102 Manufacturer : Melexis

4.3 Others

Dimension	68.3 x 37.8 x 11.0
Weigh	30g
Battery	Car Battery(DC 12V)
Operation Voltage,Current	DC3V, 14mA(1uA on standby)
Operation Temperature	-30 +80

5. DATA structures

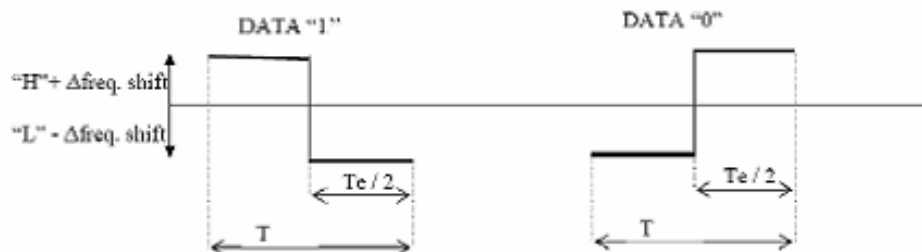

First frame structure :

Preamble T_{preamble}	Header T_{head}	Random code T_{rand}	Key data (T_{keydata})	Synch. Counter (T_{synch})	Check Sum (T_{chksum})	Interframe (T_{inter})
40 bits Manchester data "0" (1200Hz 50% duty cycle)	4 bits Mauch data at "1010"	20 bits coded data	6 bits key data	20 bits incremental counter data	8 bit SUM of data	Manchester code violation

Message field table :

FRAME	Field	Length (Tbits)	Value (Bin=binary/hex= hexadecimal)	Duration (ms)
First frame	Preamble	40	00000 hex	33.33
	Header	4	1010 bin	3.332
	Random	20	RRRRR hex	16.66
	Key	6	k-k-k-k-k-k-bin	4.998
	Sync.	20	SSSSS hex	16.66
	Check sum	8	XX hex	6.664
	Inter-frame	6	"H"+"L" + 0000 bin	4.998
Second frame	Header	4	1010 bin	3.332
	Random	20	RRRRR hex	16.66
	Key	6	k-k-k-k-k-k-bin	4.998
	Sync.	20	SSSSS hex	16.66
	Check sum	8	XX hex	6.664
	Inter-frame	6	"H"+"L" + 0000 bin	4.998
Third frame	Header	4	1010 bin	3.332
	Random	20	RRRRR hex	16.66
	Key	6	k-k-k-k-k-k-(b)	4.998
	Sync.	20	SSSSS (h)	16.66
	Check sum	8	XX (b)	6.664
	Inter-frame	2	"H"+"L"	1.666
TOTAL		228 bits		190 ms

FCC Compliance Statement.

**This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions :
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including
interference
that may cause undesired operation.**

Do Not.



**Any changes or modifications to the equipment not expressly
approved by the party
responsible for compliance could void user's authority to operate
the equipment.**