

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

Dong guan Synst Electronics.Co.,Ltd

Bluetooth speaker

Model Number: NYNE Cruiser

FCC ID: SV9-NYNECRUISE

Prepared for : Dong guan Synst Electronics.Co.,Ltd
The Science&Technology Industrial Park Houjie Town,
Dongguan,Guangdong. china

Prepared By : EST Technology Co., Ltd.
Santun(guantai Road), Houjie Town, DongGuan City,
GuangDong, China.

Tel: 86-769-83081888-808

Report Number: ESTE-R1310009
Date of Test : September 09~ 30, 2013
Date of Report : October 11, 2013

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION.....	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities	7
2.3. Assistant equipment used for test.....	8
2.4. Block Diagram	8
2.5. Test mode	9
2.6. Channel List for Bluetooth.....	9
2.7. Test Equipment.....	10
3. MAXIMUM PEAK OUTPUT POWER	11
3.1. Limit	11
3.2. Test Procedure.....	11
3.3. Test Result.....	11
3.4. Test Data	12
4. 20 DB BANDWIDTH.....	16
4.1. Limit	16
4.2. Test Procedure.....	16
4.3. Test Result.....	16
4.4. Test Data	17
5. CARRIER FREQUENCY SEPARATION	21
5.1. Limit	21
5.2. Test Procedure.....	21
5.3. Test Result.....	21
5.4. Test Data	22
6. NUMBER OF HOPPING CHANNEL	26
6.1. Limit	26
6.2. Test Procedure.....	26
6.3. Test Result.....	26
6.4. Test Data	27
7. DWELL TIME	29
7.1. Limit	29
7.2. Test Result.....	29
7.3. Test Data	30
8. RADIATED EMISSIONS.....	36
8.1. Limit	36
8.2. Block Diagram of Test setup.....	37
8.3. Test Procedure.....	37
8.4. Test Result.....	37
8.5. Test Data	38

9. BAND EDGE COMPLIANCE74

9.1. Limit74

9.2. Block Diagram of Test setup74

9.3. Test Procedure74

9.4. Test Result74

9.5. Test Data75

10. ANTENNA REQUIREMENTS91


10.1. Limit91

10.2. Result.....91

11. TEST SETUP PHOTO.....92

12. PHOTOS OF EUT93

Test Report Verification

Applicant:	Dong guan Synst Electronics.Co.,Ltd		
Address:	The Science&Technology Industrial Park Houjie Town,Dongguan, Guangdong. china		
Manufacturer Address:	Dong guan Synst Electronics.Co.,Ltd The Science&Technology Industrial Park Houjie Town,Dongguan, Guangdong. china		
E.U.T:	Bluetooth speaker		
Model Number:	NYNE Cruiser		
Additional Model:	NB350 Note: The products are difference in model number only.		
Power Supply:	DC 3.7V From Internal Battery		
Test Voltage:	DC 3.7V		
Trade Name:	NYNE	Serial No.:	-----
Date of Receipt:	September 09, 2013	Date of Test:	September 09~30, 2013
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2012 ANSI C63.4:2009		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the ETSI EN FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd. Date: October 11, 2013		
Prepared by:	Tested by:	Approved by:	
			
Ada / Assistant	Tony.Tang/ Engineer	IcemanHu / Manager	
Other Aspects:	None.		
Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	: Bluetooth speaker
Model Number	: NYNE Cruiser
FCC ID	: SV9-NYNECRUISE
Operation frequency	: 2402MHz~2480MHz
Number of channel	: 79
Antenna	: Internal antenna, 0 dBi gain
Modulation	: FHSS (GFSK, $\pi/4$ -DQPSK, 8-DPSK)
Sample Type	: Prototype production

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Maximum Peak Output Power	FCC Part 15: 15.247(b)(1) DA 00-705	PASS
20dB Bandwidth	FCC Part 15: 15.215 DA 00-705	PASS
Carrier Frequency Separation	FCC Part 15: 15.247(a)(1) DA 00-705	PASS
Number Of Hopping Channel	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Dwell Time	FCC Part 15: 15.247(a)(1)(iii) DA 00-705	PASS
Radiated Emission	FCC Part 15: 15.209 FCC Part 15: 15.247(d) ANSI C63.4: 2003 DA 00-705	PASS
Band Edge Compliance	FCC Part 15: 15.247(d) DA 00-705	PASS
Power Line Conducted Emissions	FCC Part 15: 15.207 ANSI C63.4: 2003 DA 00-705	N/A
Antenna requirement	FCC Part 15: 15.203	PASS

2.2. Test Facilities

EMC Lab	:	Certificated by CNAL, CHINA Registration No.: L5288 Date of registration: October 28, 2011 Certificated by FCC, USA Registration No.: 989591 Date of registration: December 07, 2010 Certificated by Industry Canada Registration No.: 46405-9405 Date of registration: December 16, 2010 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2011 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: January 07, 2011 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Assistant equipment used for test

2.3.1. N/A

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 meter high above ground. EUT was be set into BT test mode by software before test.



(EUT: Bluetooth speaker)

2.5. Test mode

The test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode

Mode	Channel	Frequency
GFSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz
8-DPSK	Low	2402MHz
	Middle	2441MHz
	High	2480MHz

2.6. Channel List for Bluetooth

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	May,30,13	1 Year
Artificial Mains Networ	Rohde & Schwarz	ENV216	101260	May,30,13	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	July.25,13	1 Year

2.7.2. For radiated emission test(30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	May,30,13	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	May,30,13	1 Year
Bilog Antenna	Teseq	CBL 6111D	25872	Nov,08,12	1.5 Year
Signal Amplifier	Agilent	310N	187037	July.25,13	1 Year

2.7.3. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Temperature controller	Terchy	MHQ	120	May.08,13	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	May.08,13	1 Year
Vector Signal Generator	R&S	SMBV100A	1407.6004K02	May.08,13	1 Year
Double Ridged Horn Antenna	R&S	HF907	100276	Jan.16.13	2 Year
Double Ridged Horn Antenna	R&S	HF907	100268	Jan.16.13	2 Year
Log-periodic Dipole Antenna	R&S	HL223	100435	Jan.16.13	2 Year
Biconical Antenna	R&S	HK116	100431	Jan.16.13	2 Year
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	9163-462	Jan.16.13	2 Year
Pre-amplifier	AH	PAM-0118	10008	May.08,13	1 Year
Pre-amplifier	R&S	SCU-01	10049	May.08,13	1 Year
High Pass filter	Micro	HPM50111	324455	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534096	May.08,13	1 Year
RF Cable	Hubersuhner	W10.02	534123	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	May.08,13	1 Year
RF Cable	Hubersuhner	RG 214/U	523455	May.08,13	1 Year

3. MAXIMUM PEAK OUTPUT POWER

3.1. Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts, the e.i.r.p shall not exceed 4W

3.2. Test Procedure


The transmitter output (antenna port) was connected to the spectrum analyzer

3.3. Test Result


EUT: Bluetooth speaker					
M/N: NYNE Cruiser					
Test date: 2013-09-28		Test site: RF site		Tested by: Tony Tang	
Mode	Freq (MHz)	Result (dBm)	Limit		Margin (dB)
			dBm	W	
GFSK	2402	1.234	30.00	1	28.766
	2441	2.599	30.00	1	27.401
	2480	2.841	30.00	1	27.159
8-DPSK	2402	0.138	21.00	0.125	20.862
	2441	1.777	21.00	0.125	19.223
	2480	1.826	21.00	0.125	19.174
Conclusion: PASS					

3.4. Test Data


GFSK 2402 MHz

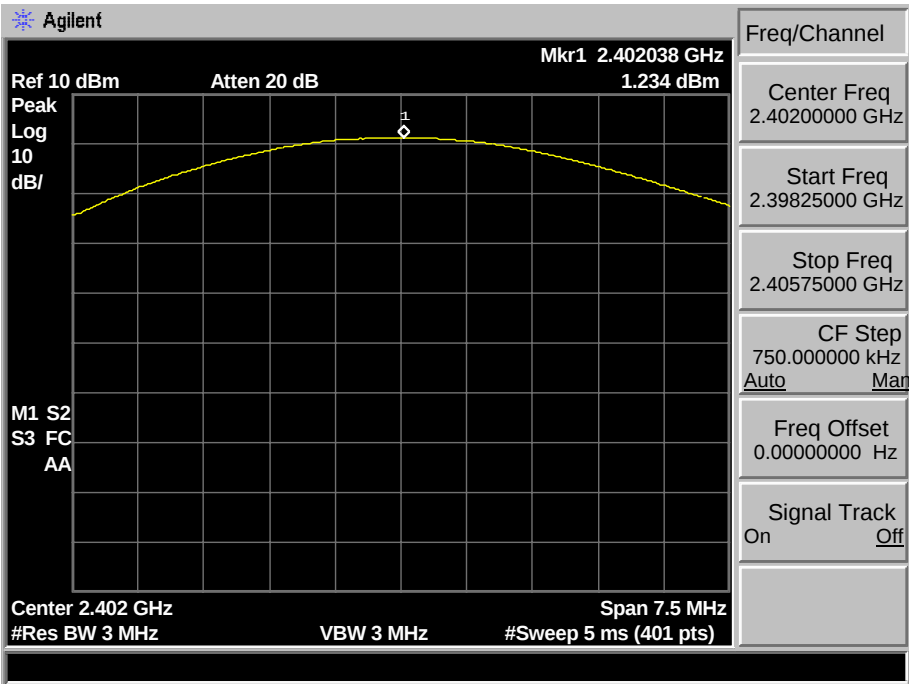


GFSK 2441 MHz

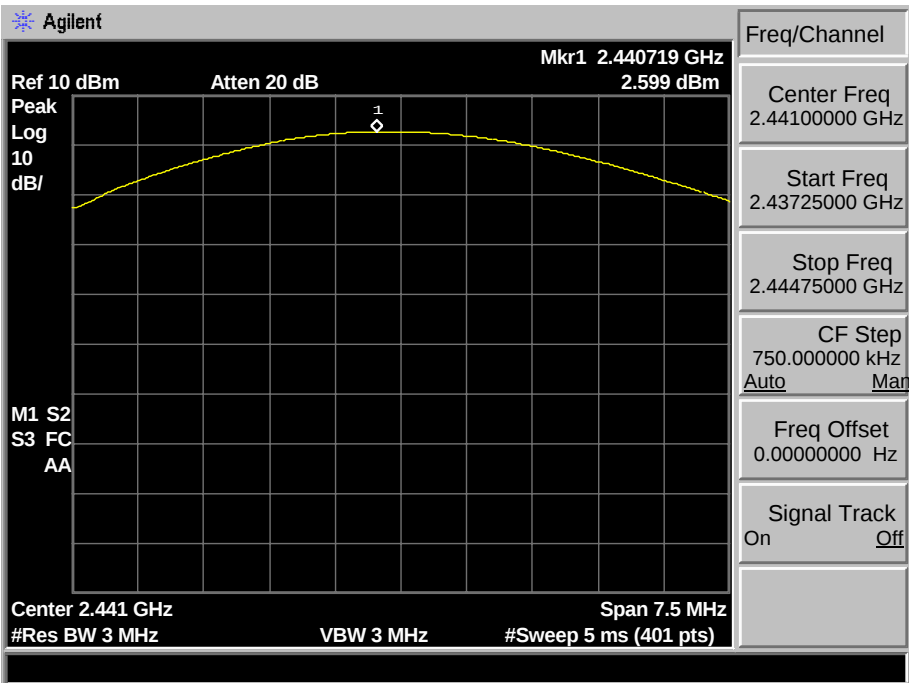


GFSK 2480 MHz

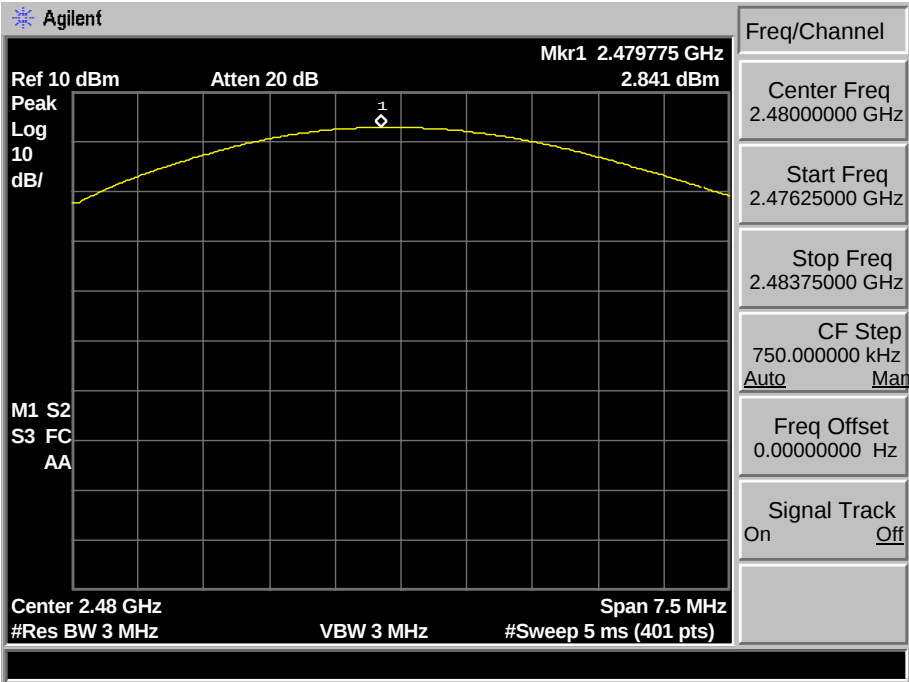


8-DPSK 2402 MHz

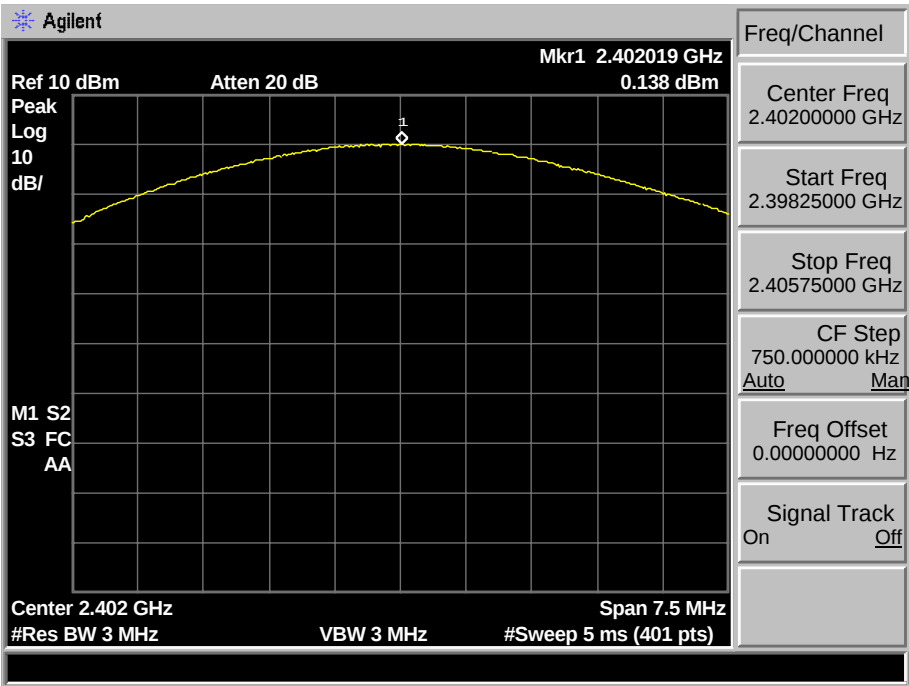

8-DPSK 2441 MHz

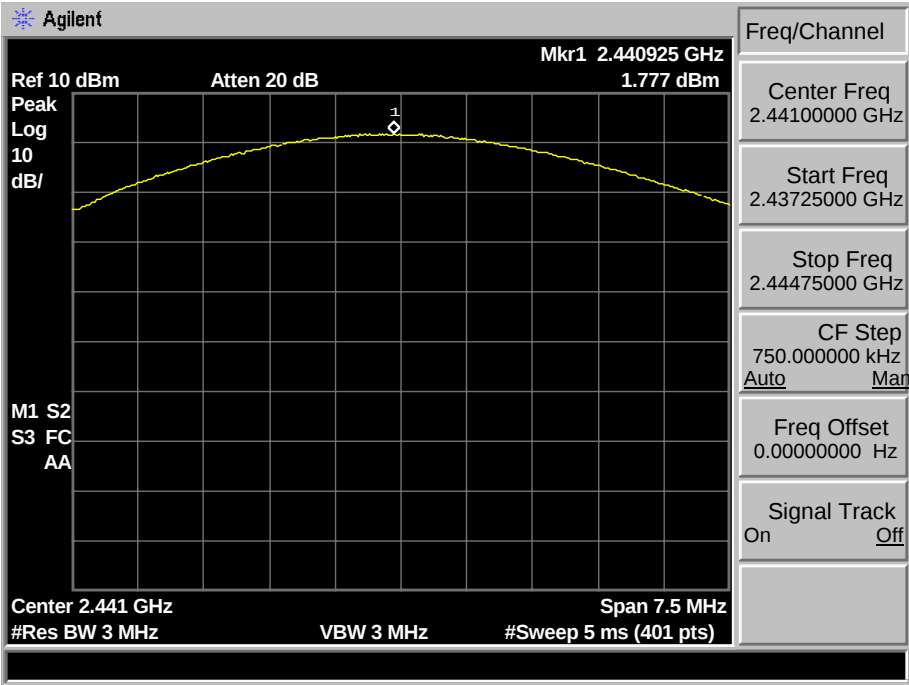

8-DPSK 2480 MHz

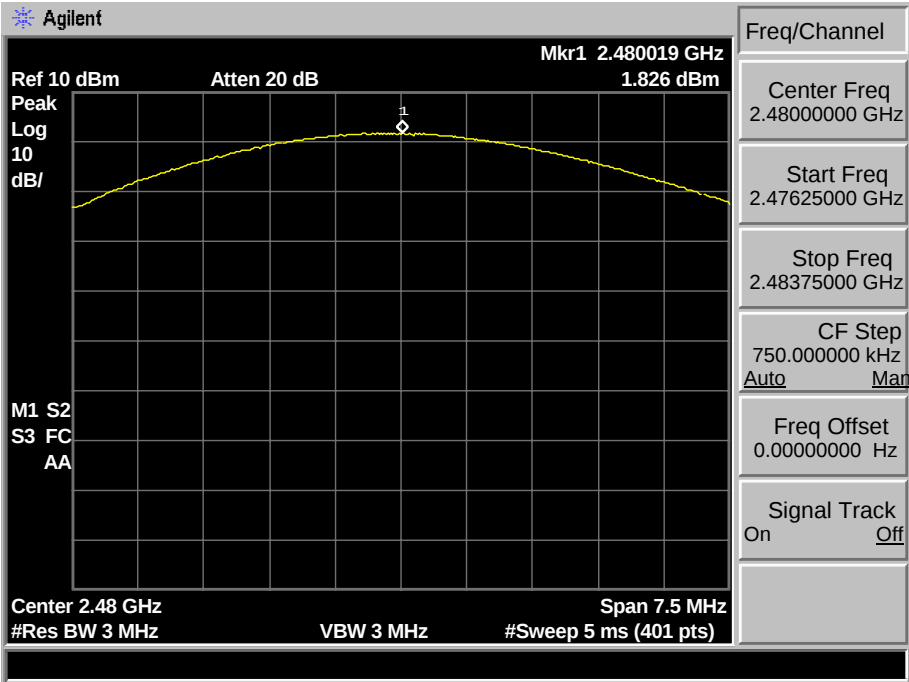

4. 20 DB BANDWIDTH

4.1. Limit

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

4.2. Test Procedure


The transmitter output was coupled to a spectrum analyzer via a antenna. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and 100kHz VBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

4.3. Test Result


EUT: Bluetooth speaker				
M/N: NYNE Cruiser				
Test date: 2013-09-28		Test site: RF site		Tested by: Tony Tang
Mode	Freq (MHz)	20dB Bandwidth (MHz)	Limit (kHz)	Conclusion
GFSK	2402	0.880	/	PASS
	2441	0.863	/	PASS
	2480	0.862	/	PASS
8-DPSK	2402	1.209	/	PASS
	2441	1.222	/	PASS
	2480	1.228	/	PASS

4.4. Test Data


GFSK 2402MHz

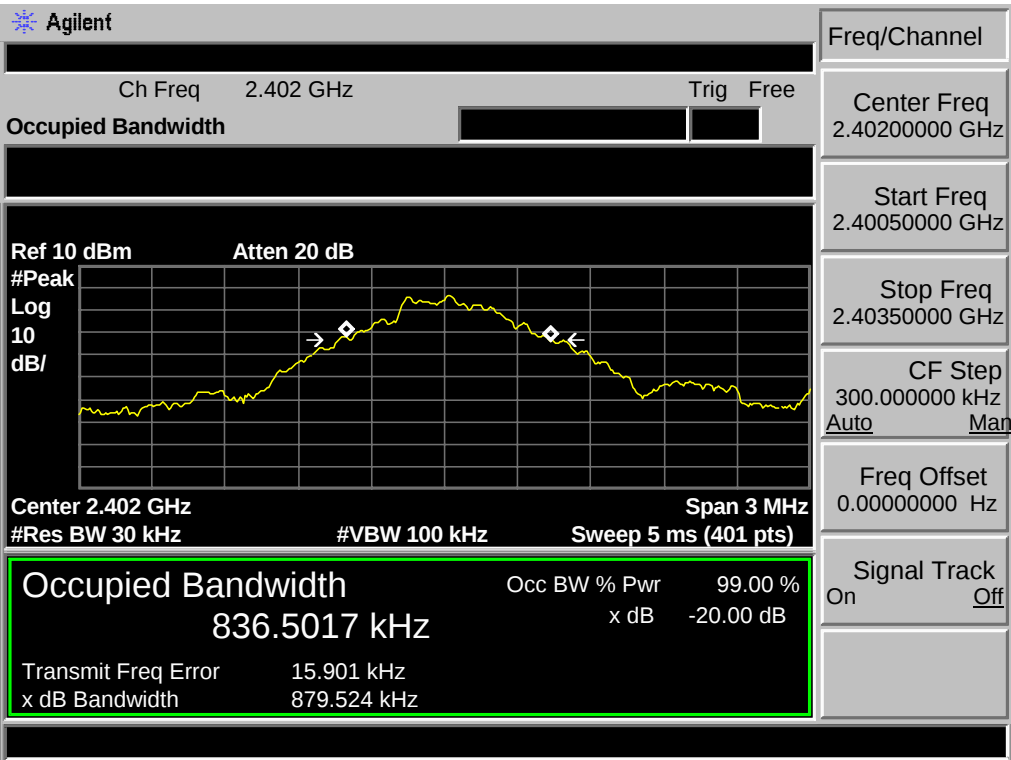


GFSK 2441MHz

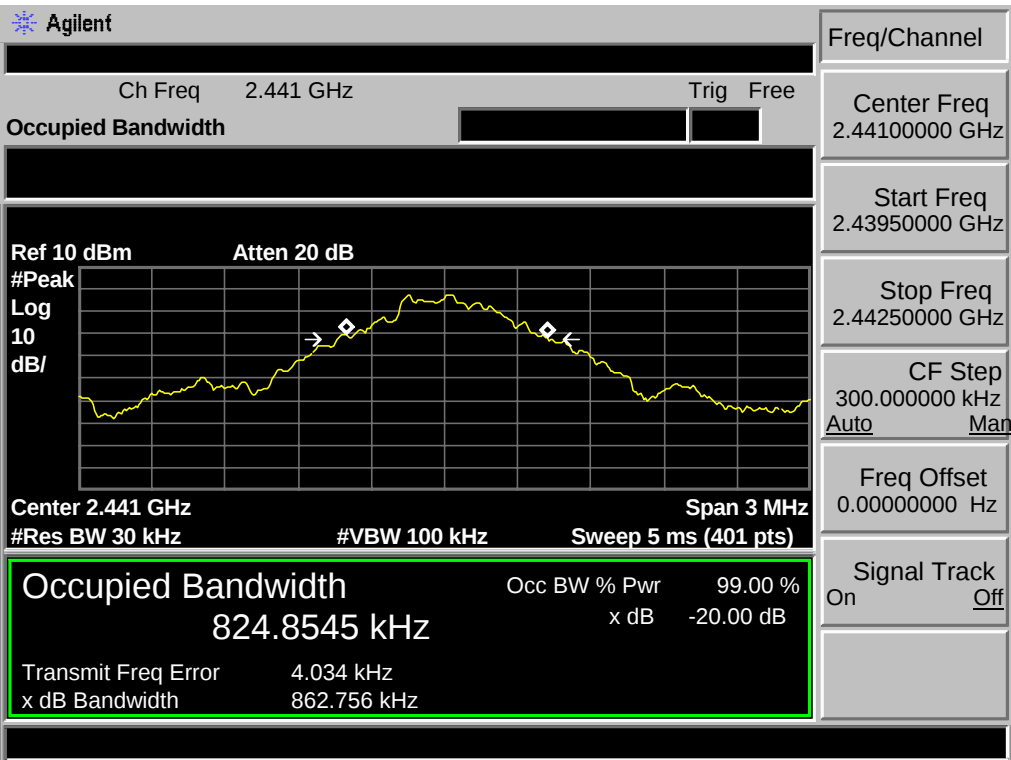


GFSK 2480MHz

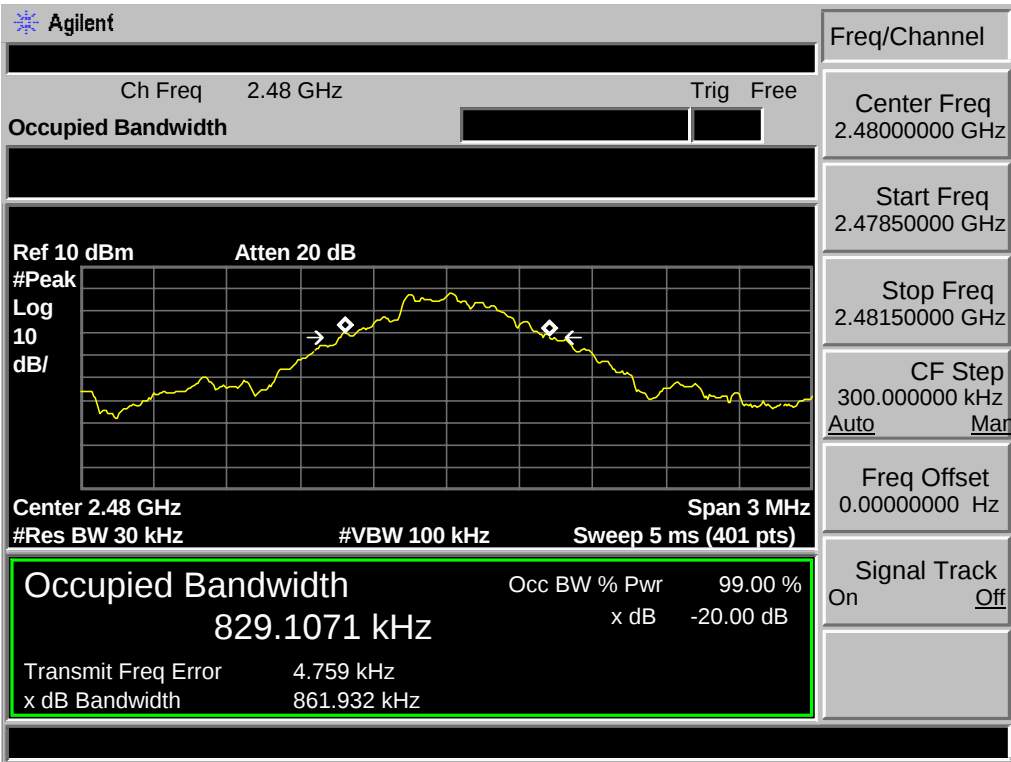


8-DPSK 2402MHz

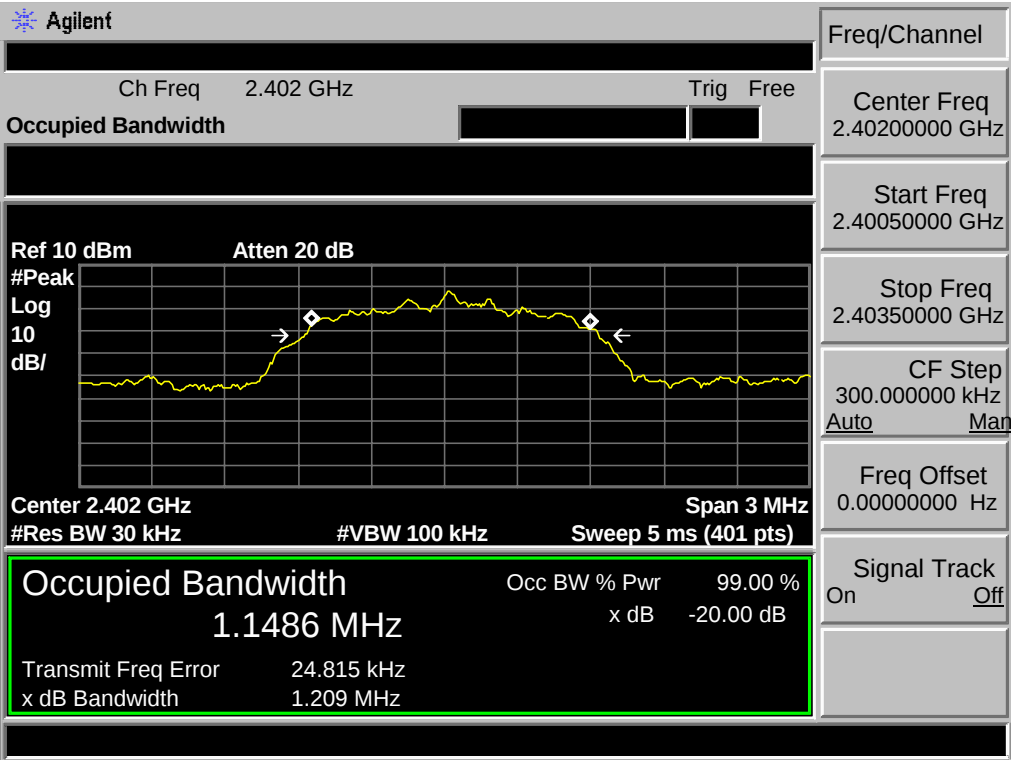

8-DPSK 2441MHz

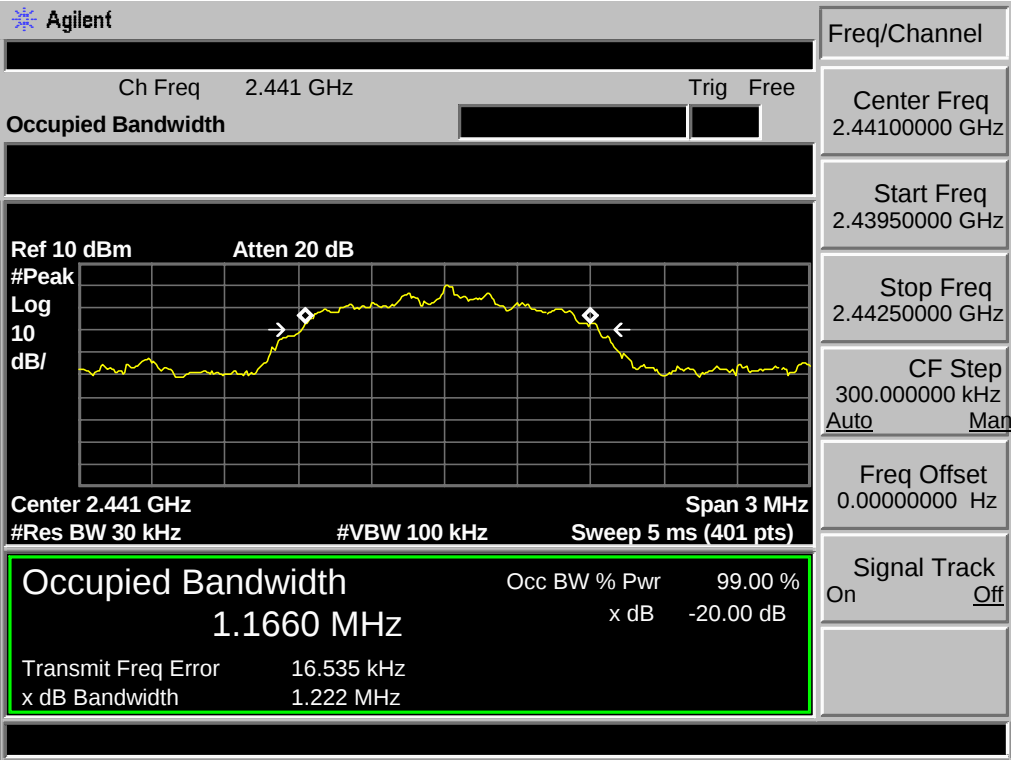

8-DPSK 2480MHz

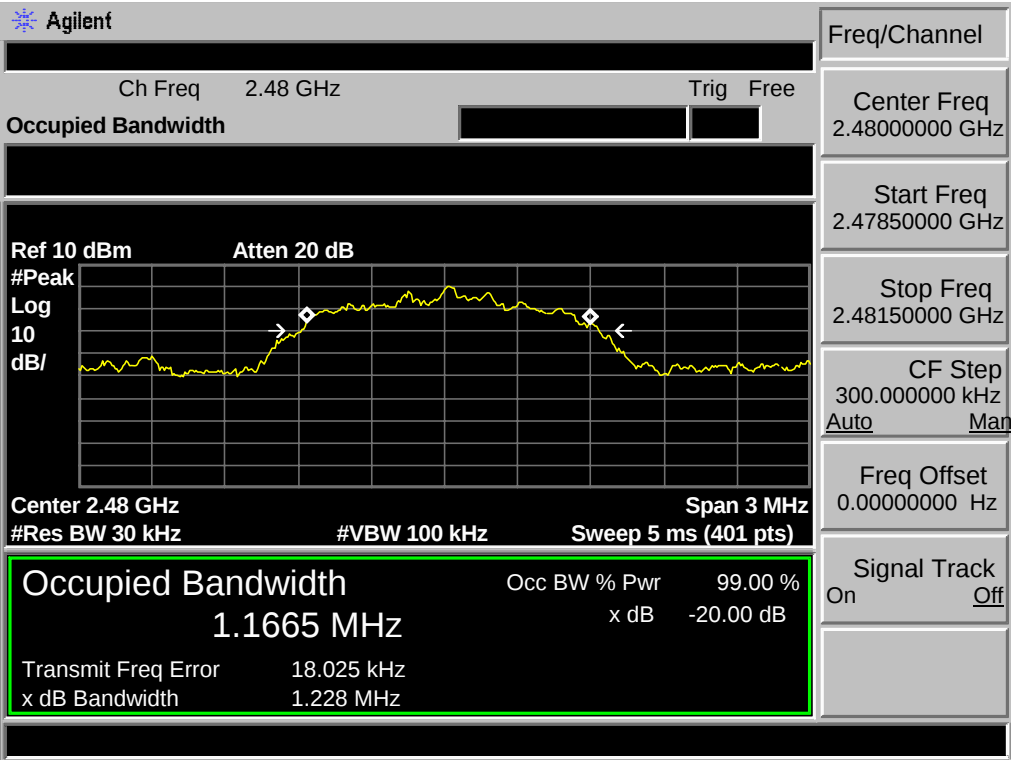

5. CARRIER FREQUENCY SEPARATION

5.1. Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW


5.2. Test Procedure

The transmitter output was coupled to a spectrum analyzer via a antenna. The carrier frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW.


5.3. Test Result

EUT: Bluetooth speaker M/N: NYNE Cruiser				
Test date: 2013-09-28		Test site: RF site Tested by: Tony Tang		
Mode	Channel	Channel separation (MHz)	Limit	Conclusion
GFSK	Low CH	1.000	0.880MHz	PASS
	Mid CH	1.006	0.863MHz	PASS
	High CH	1.000	0.862MHz	PASS
8-DPSK	Low CH	1.006	> 2/3 of the 20dB Bandwidth or 25[kHz](whichever is greater)	PASS
	Mid CH	1.000		PASS
	High CH	1.013		PASS


5.4. Test Data

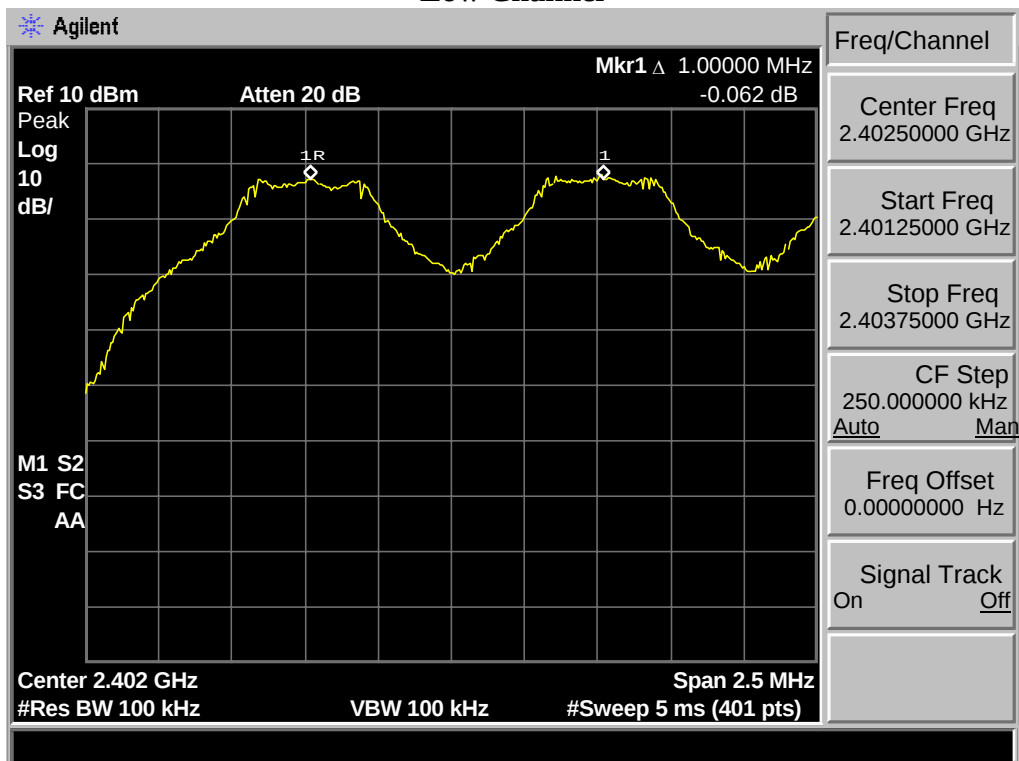GFSK
Low Channel


Mid Channel

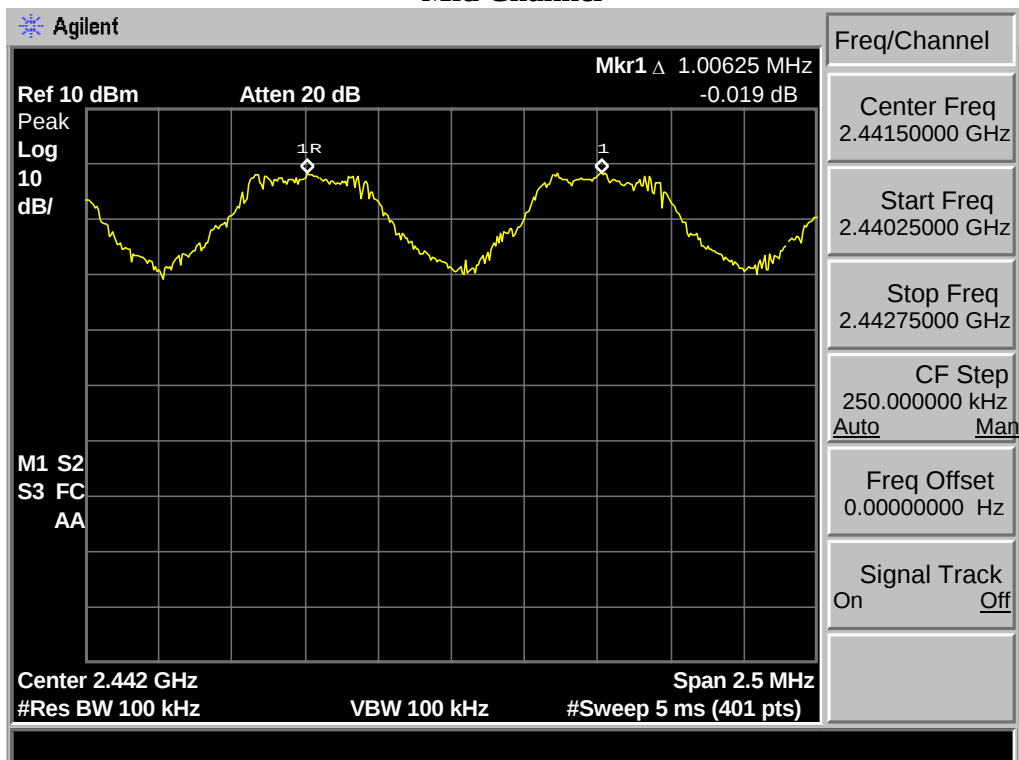


High Channel

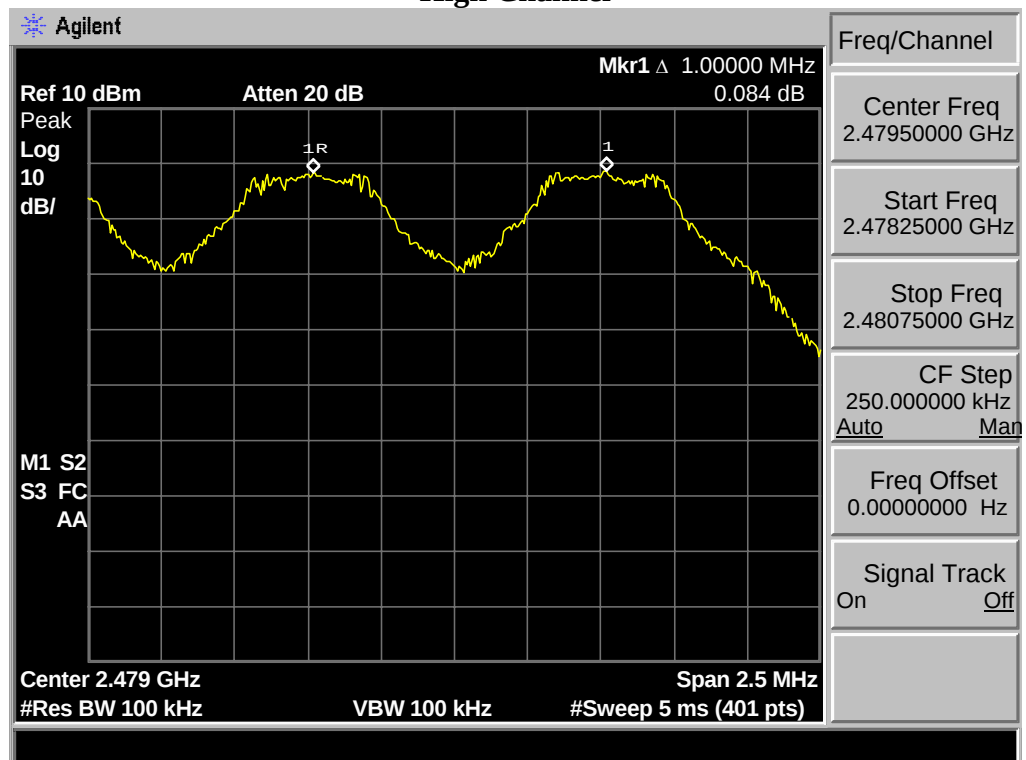


8-DPSK Low Channel

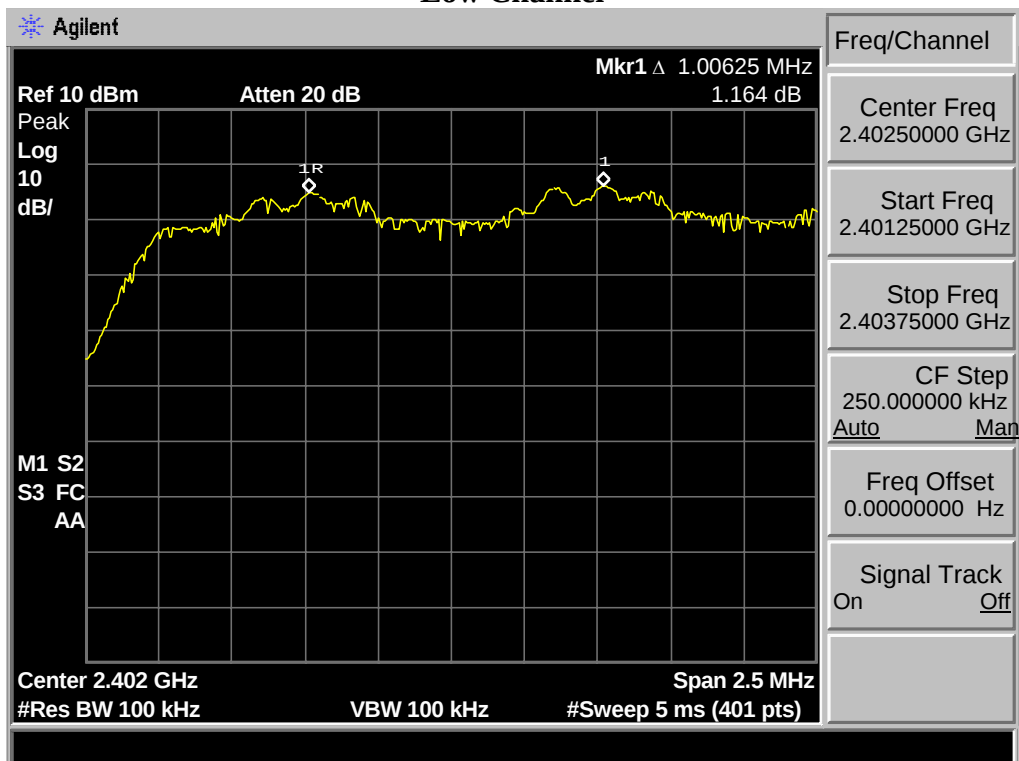

Mid Channel

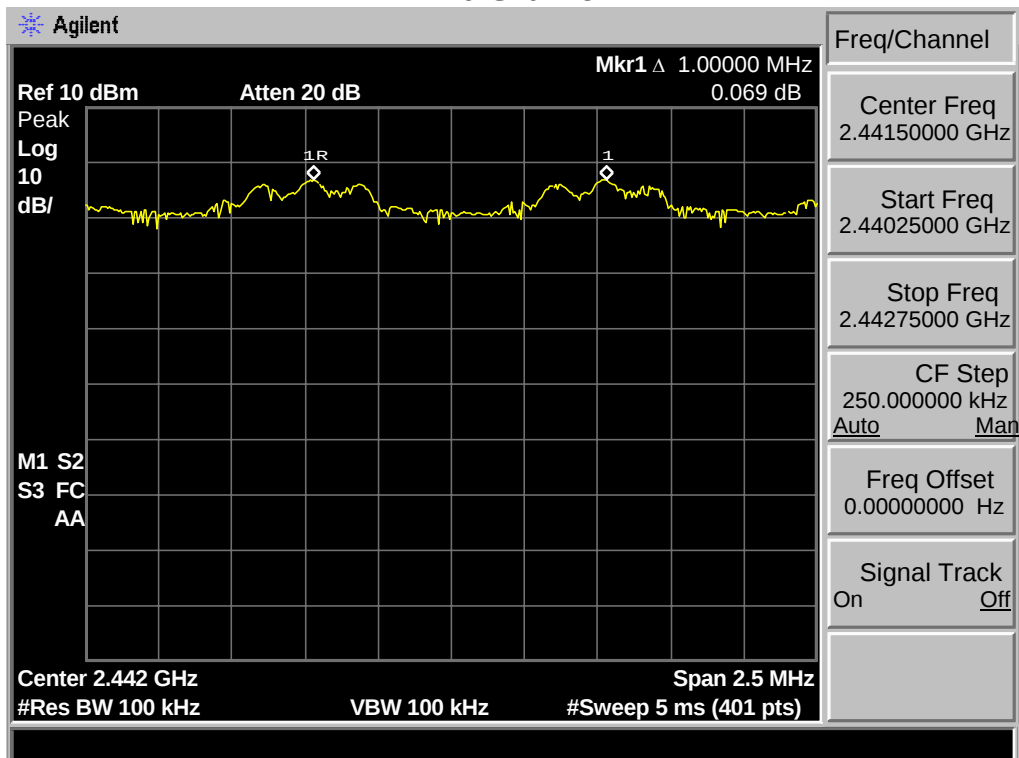

High Channel

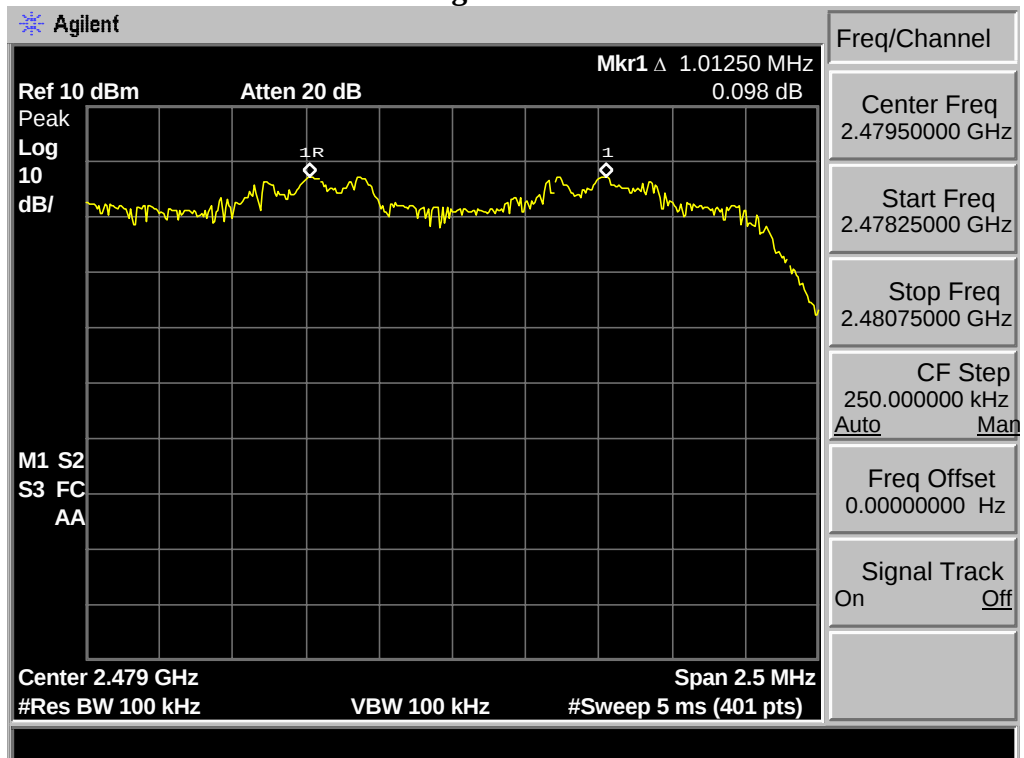

6. NUMBER OF HOPPING CHANNEL

6.1. Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels

6.2. Test Procedure




The transmitter output was coupled to a spectrum analyzer via a antenna. The number of hopping channel was measured by spectrum analyzer with 300kHz RBW and 300kHz VBW.

6.3. Test Result




EUT: Bluetooth speaker			
M/N: NYNE Cruiser			
Test date: 2013-09-28		Test site: RF site	Tested by: Tony.Tang
Mode	Number of hopping channel	Limit	Conclusion
GFSK	79	>15	PASS
8-DPSK	79	>15	PASS

6.4. Test Data

GFSK

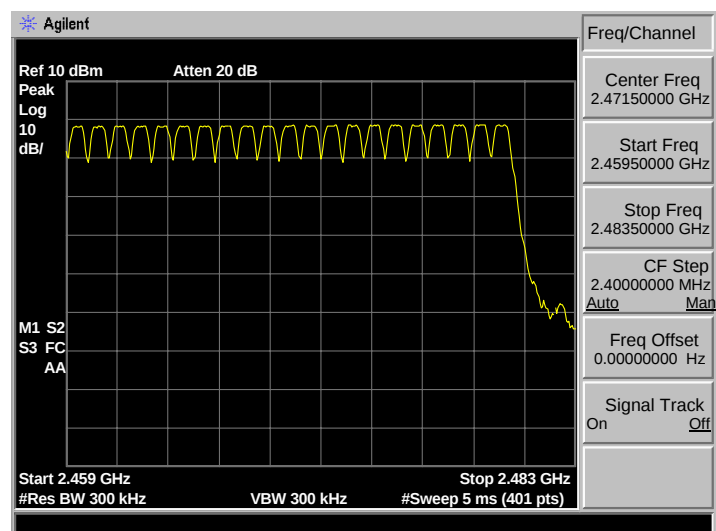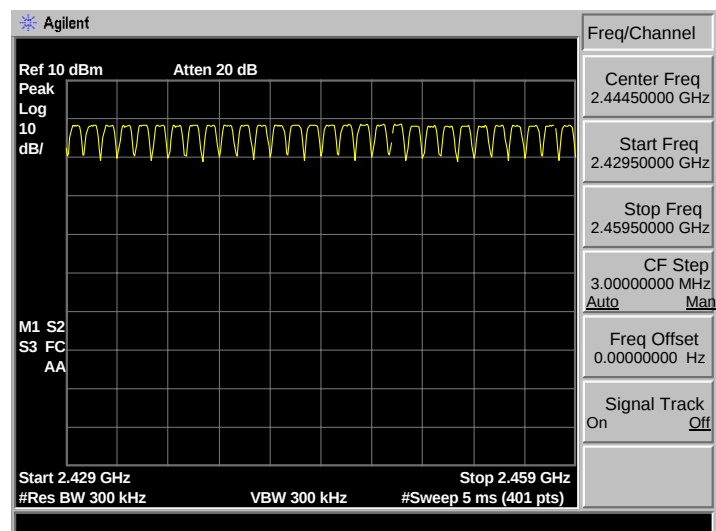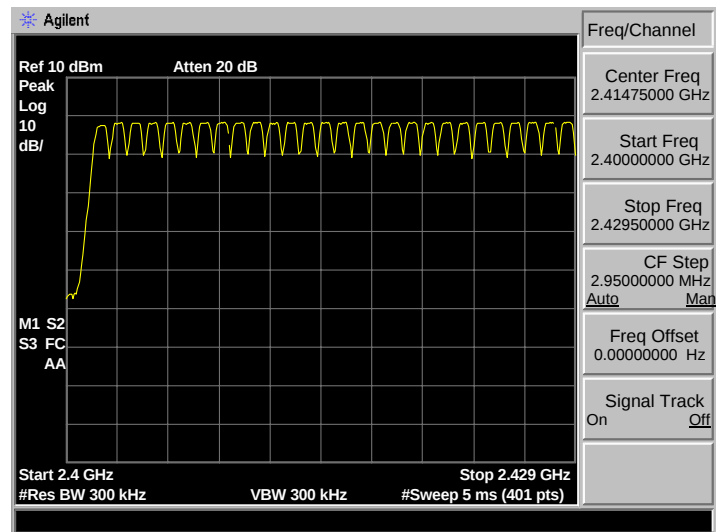

8-DPSK

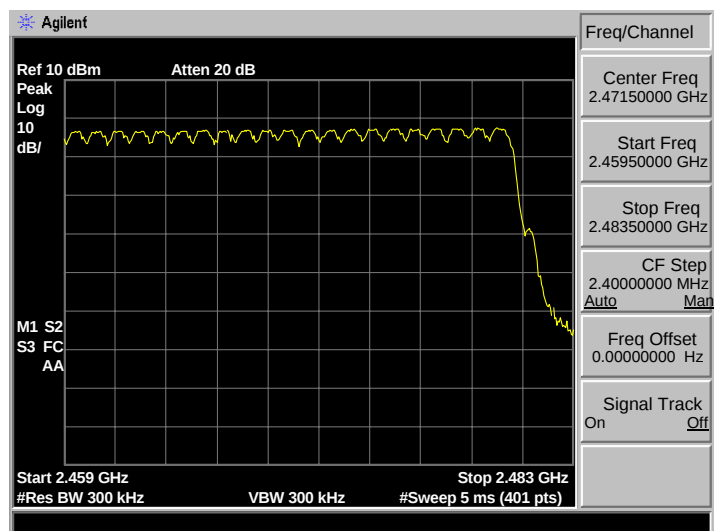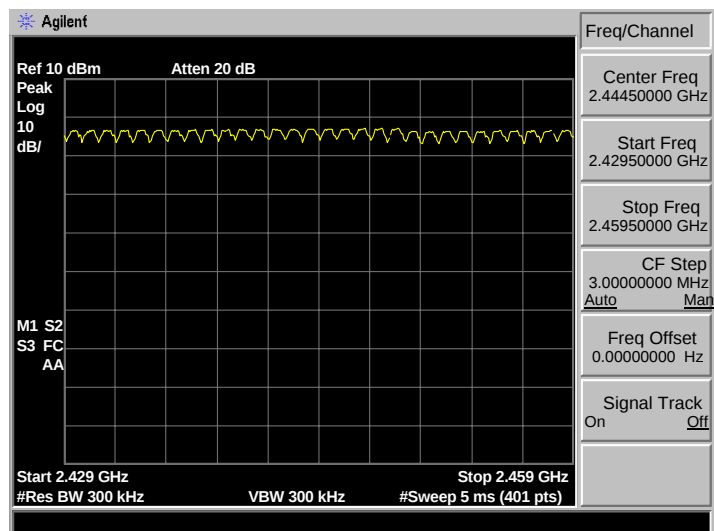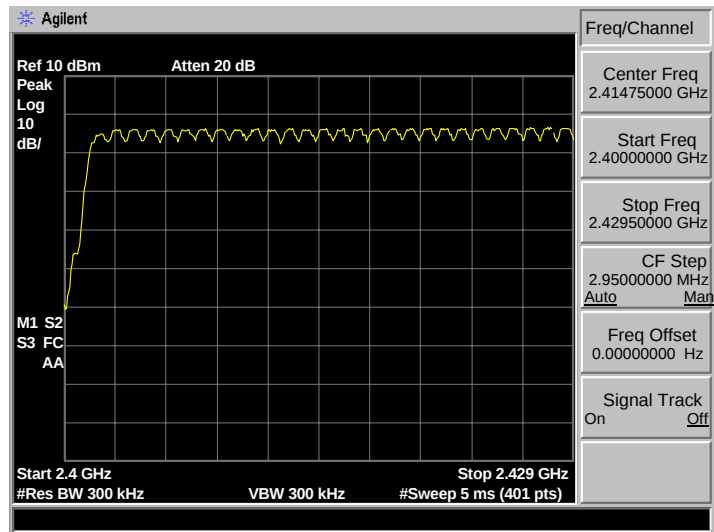

7. DWELL TIME

7.1. Limit



The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2. Test Result



EUT: Bluetooth speaker			
M/N: NYNE Cruiser			
Test date: 2013-09-28		Test site: RF site	Tested by: Tony Tang
Mode	Dwell time (ms)	Limit	Conclusion
GFSK DH1	151.68	<400ms	PASS
GFSK DH3	273.34	<400ms	PASS
GFSK DH5	321.25	<400ms	PASS
8-DPSK DH1	151.68	<400ms	PASS
8-DPSK DH3	271.76	<400ms	PASS
8-DPSK DH5	322.32	<400ms	PASS

7.3. Test Data



GFSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.48\text{ms} = 151.68$

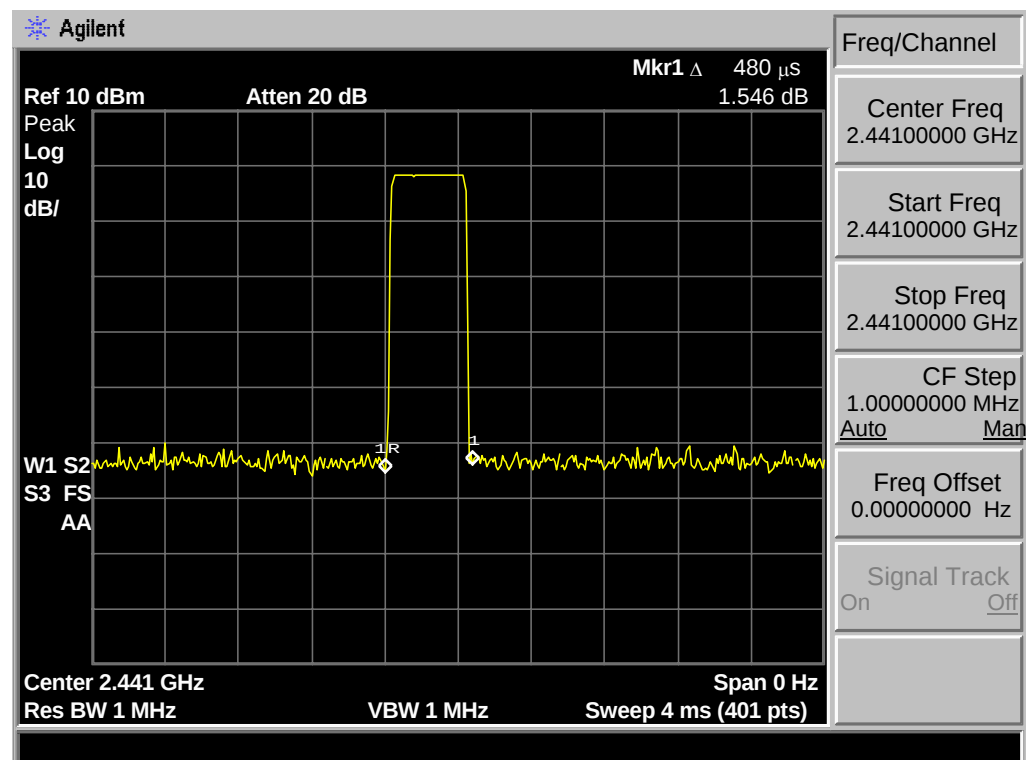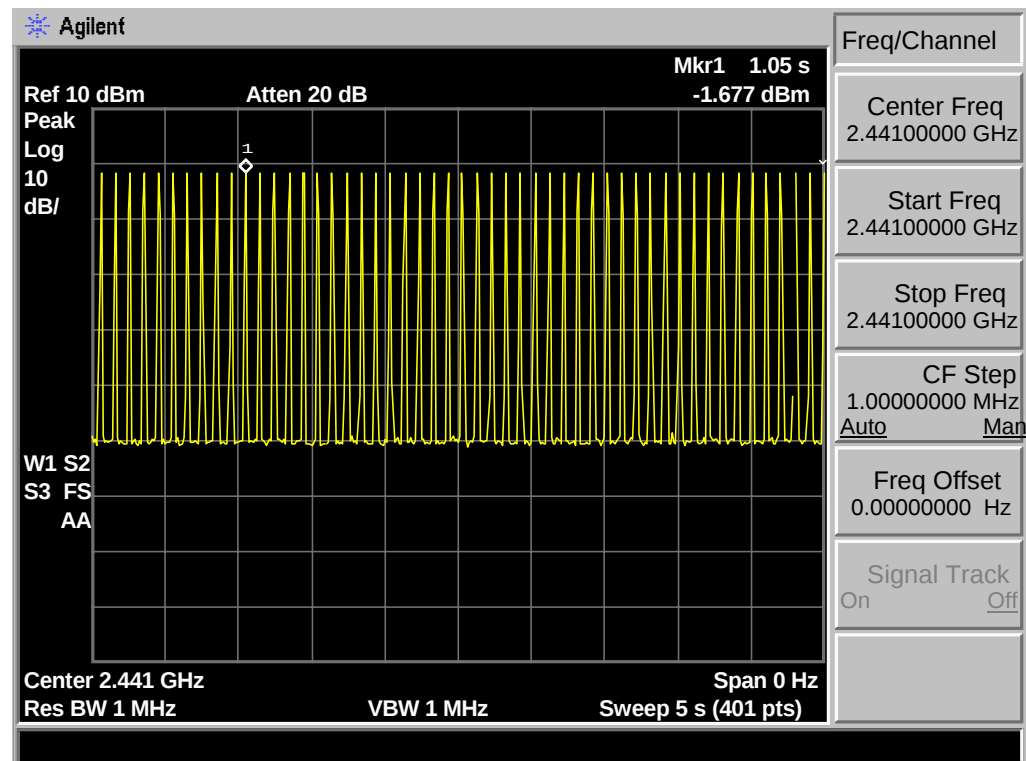



GFSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.73\text{ms} = 273.34$

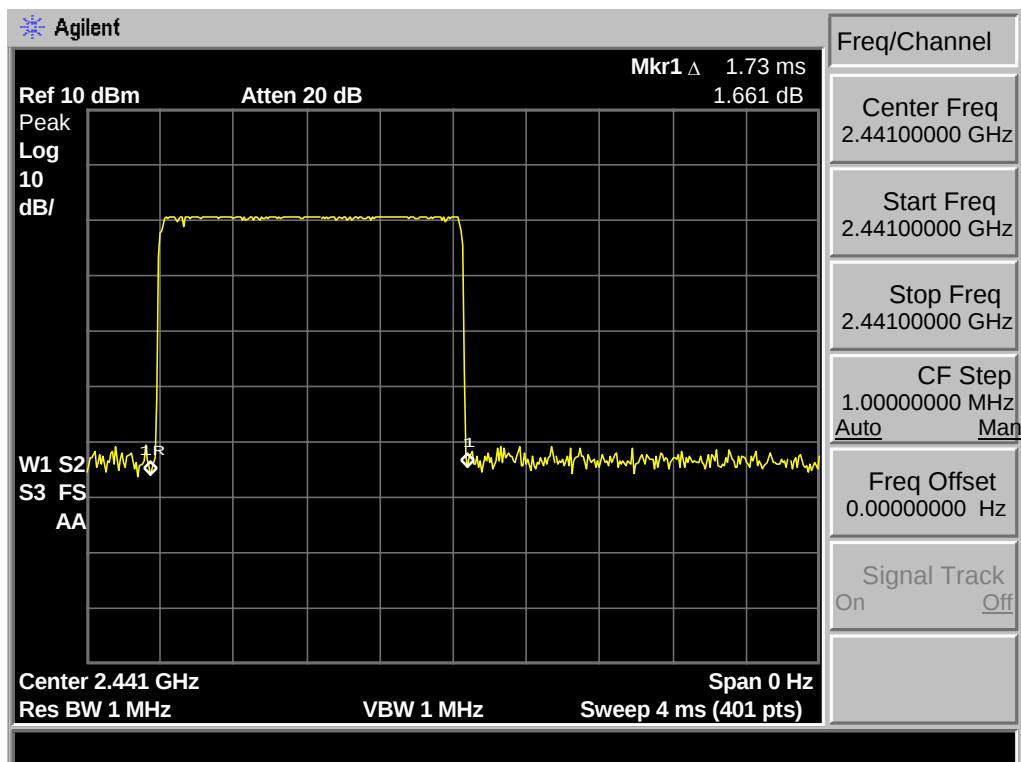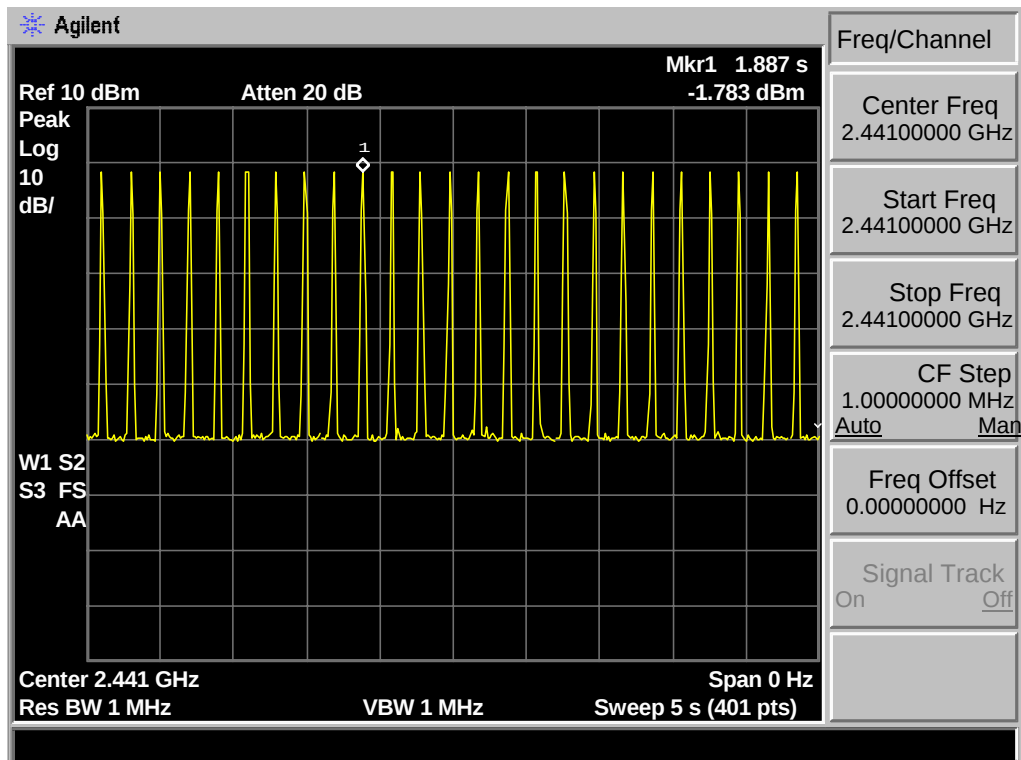



GSFK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 2.99\text{ms} = 321.25$

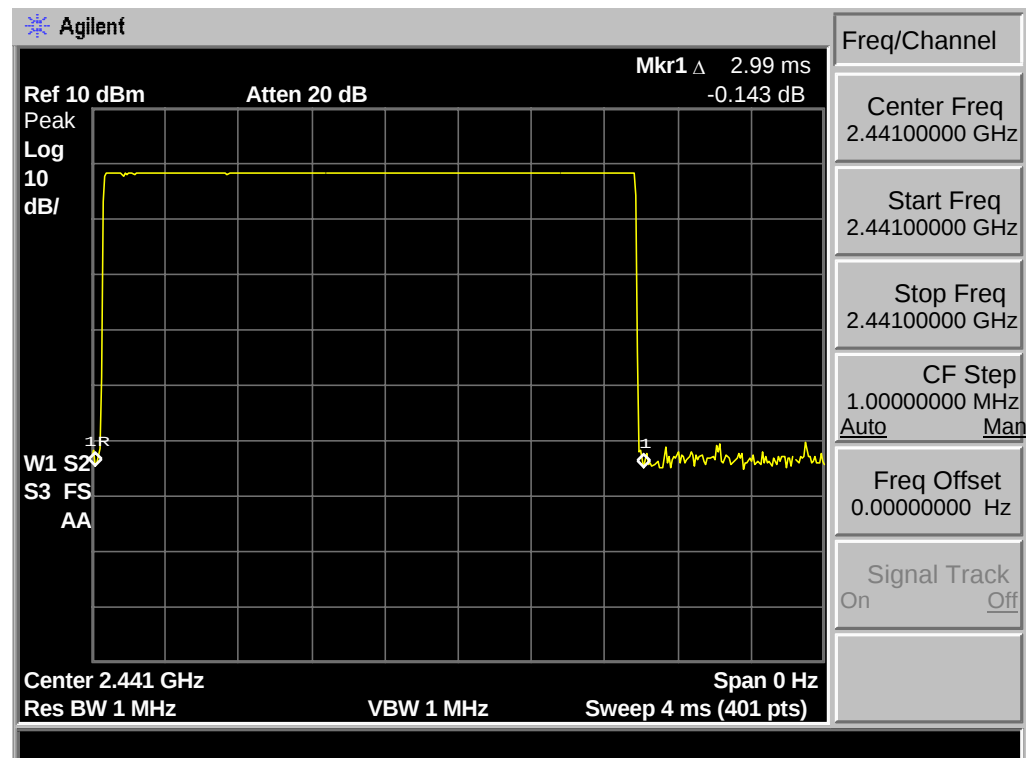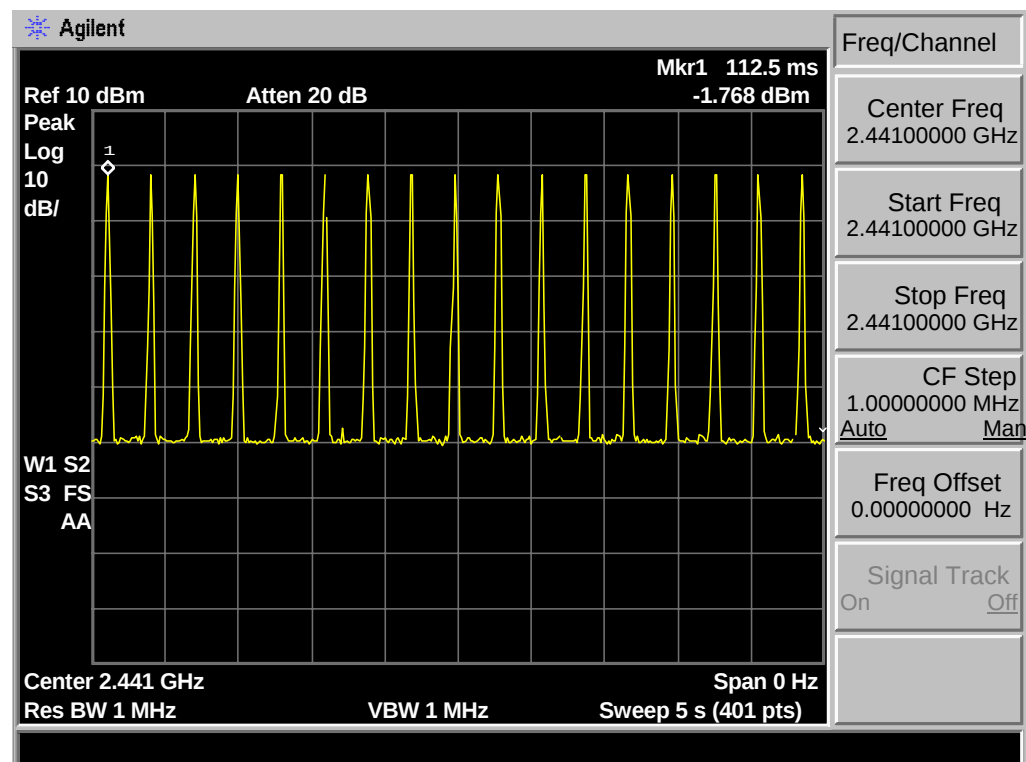



8-DPSK DH1 : $50\text{hop}/5\text{s} * 0.4 * 79 * 0.48\text{ms} = 151.68$

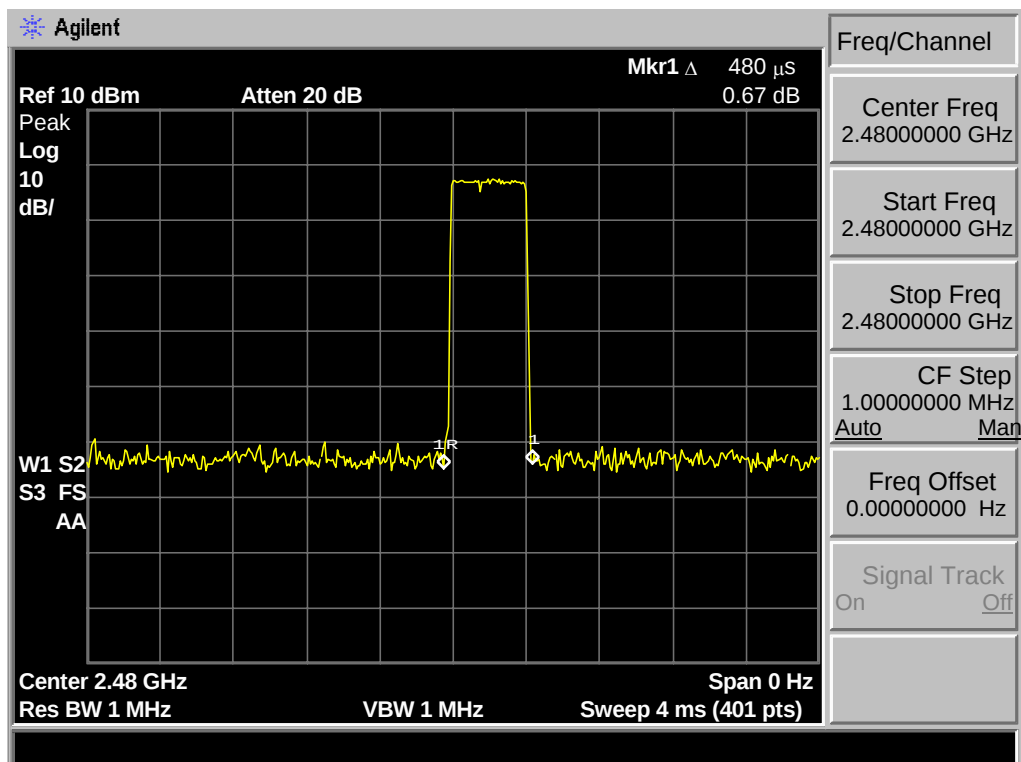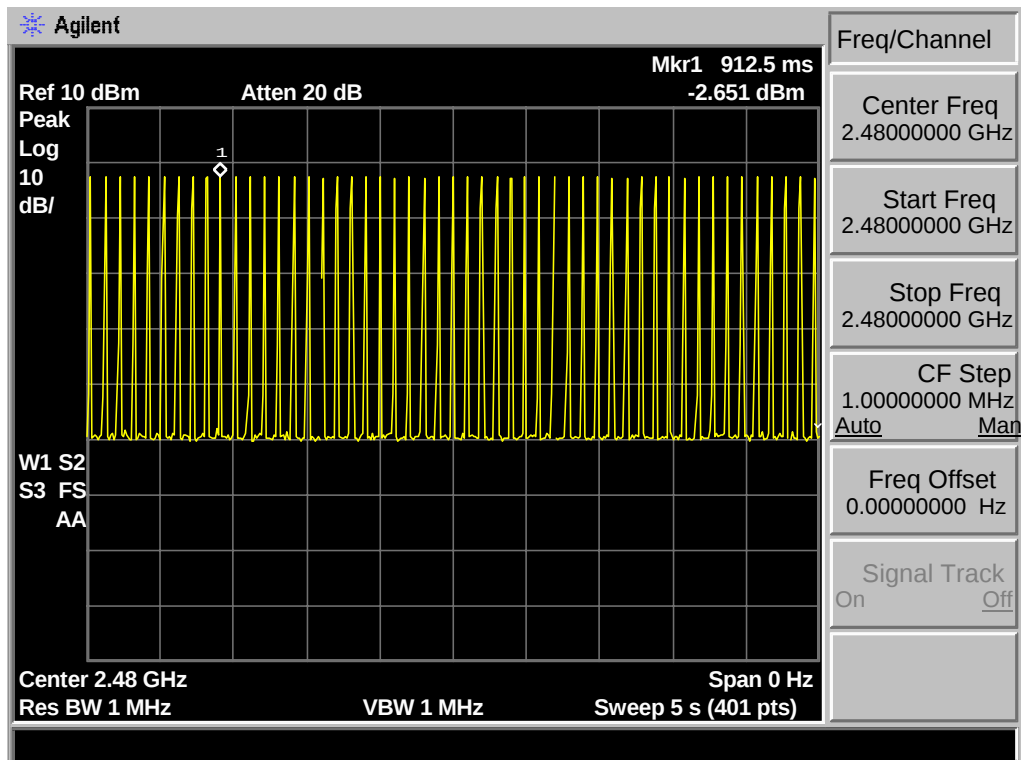

8-DPSK DH3 : $25\text{hop}/5\text{s} * 0.4 * 79 * 1.72\text{ms} = 271.76$

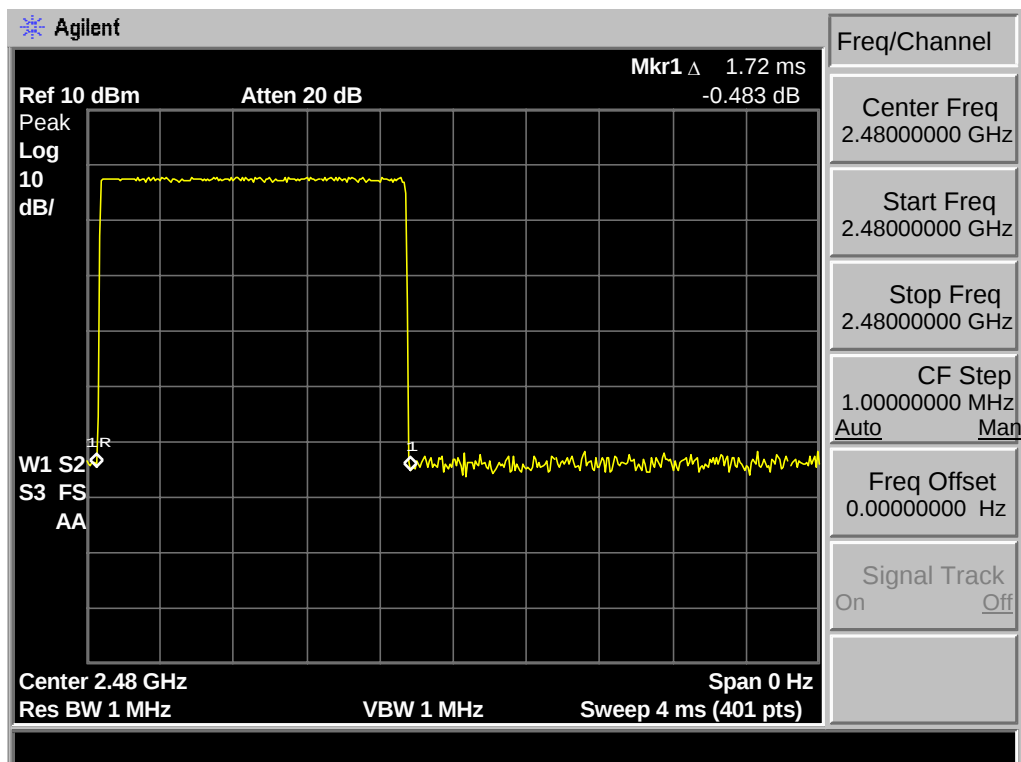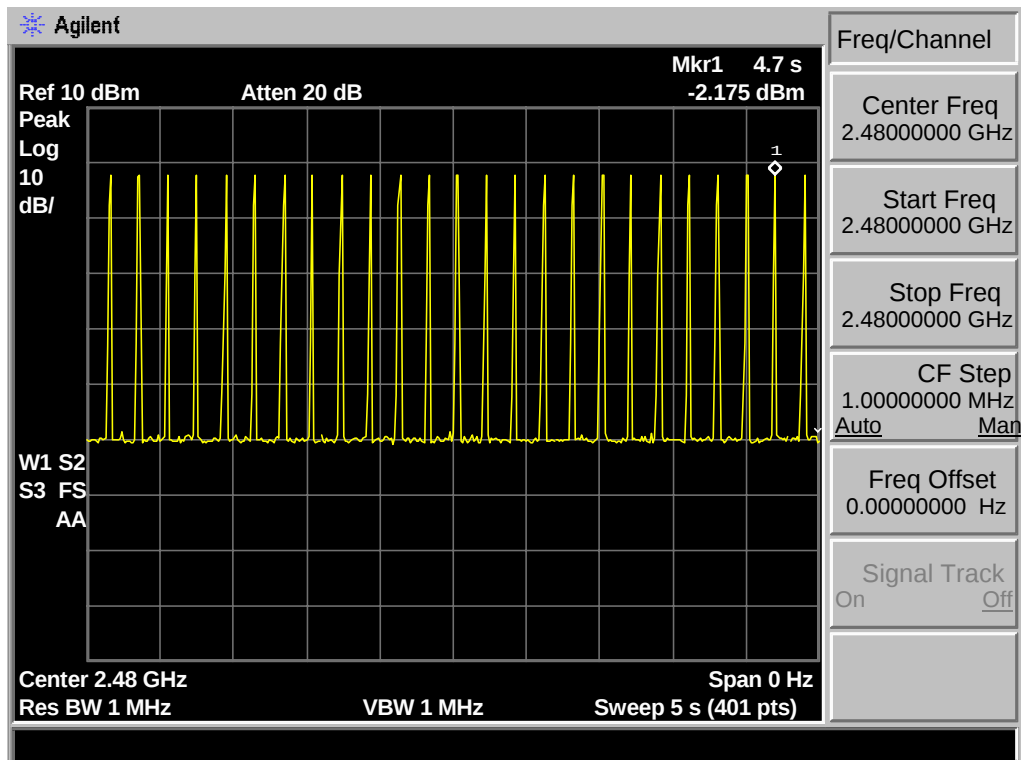

8-DPSK DH5 : $17\text{hop}/5\text{s} * 0.4 * 79 * 3.00\text{ms} = 322.32$

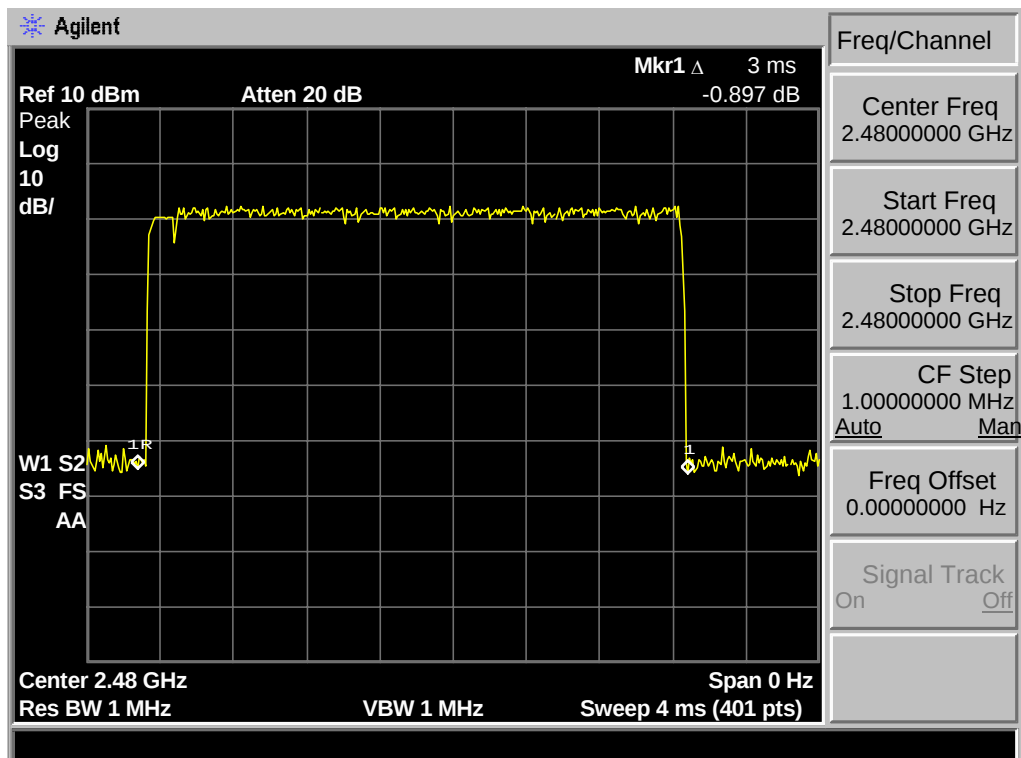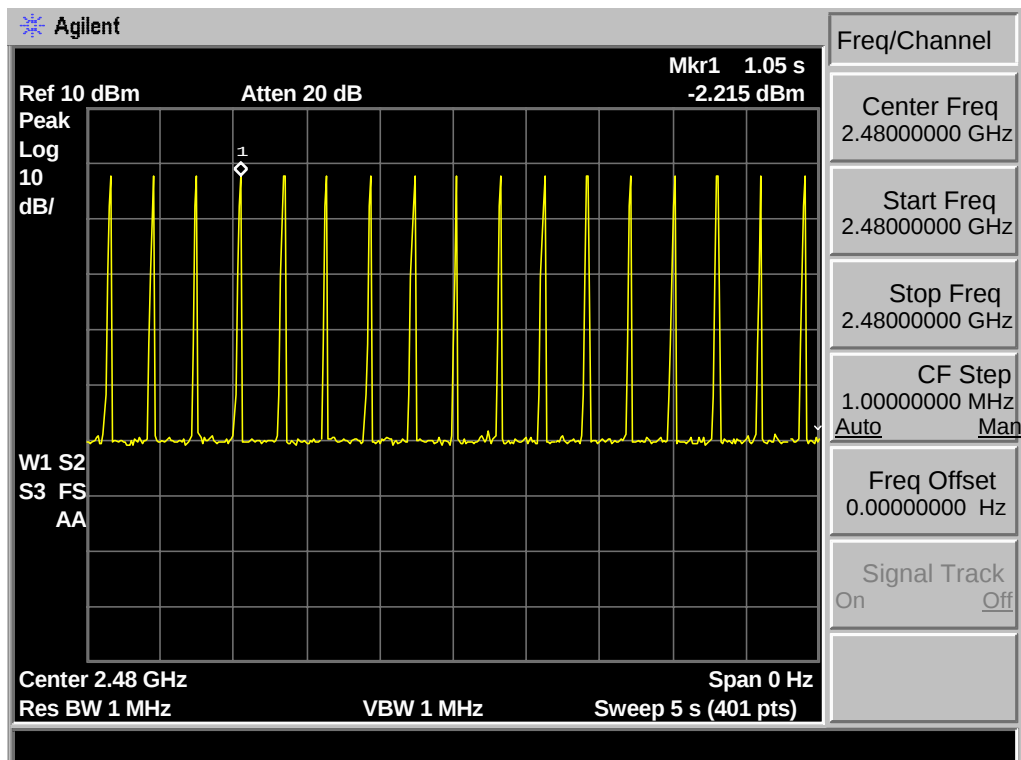

8. RADIATED EMISSIONS

8.1. Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.


15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(μV)/m (Peak) 54.0 dB(μV)/m (Average)	

8.2. Block Diagram of Test setup

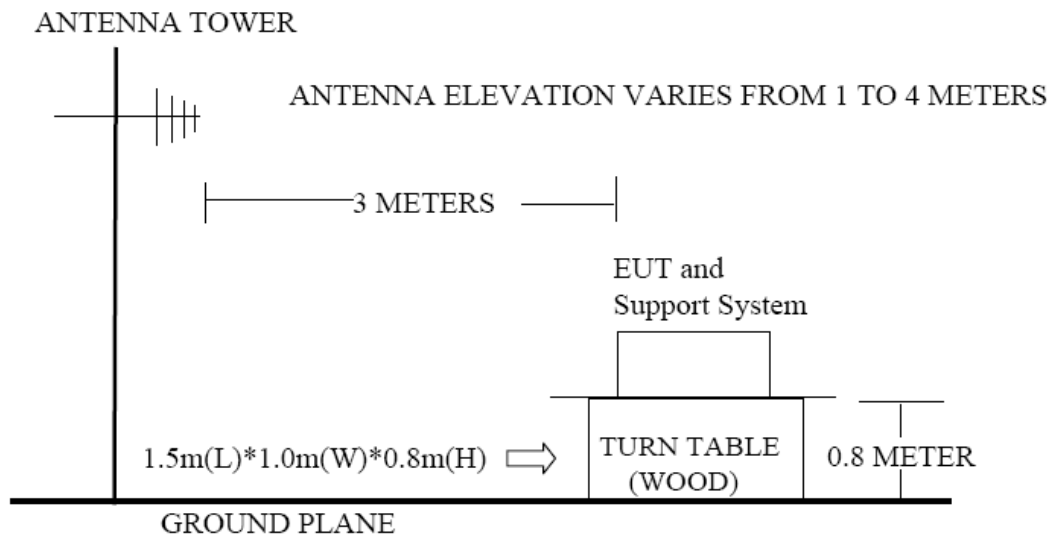

8.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

8.4. Test Result


30MHz—25GHz Radiated emissison Test result		
EUT: Bluetooth speaker		
M/N: NYNE Cruiser		
Power: DC 3.7V		
Test date: 2013-09-27	Test site: 3m Chamber	Tested by: Tony Tang
Test mode: Tx Mode		
Pass		

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2402MHz 、2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


8.5. Test Data

30 MHz – 1000 MHz

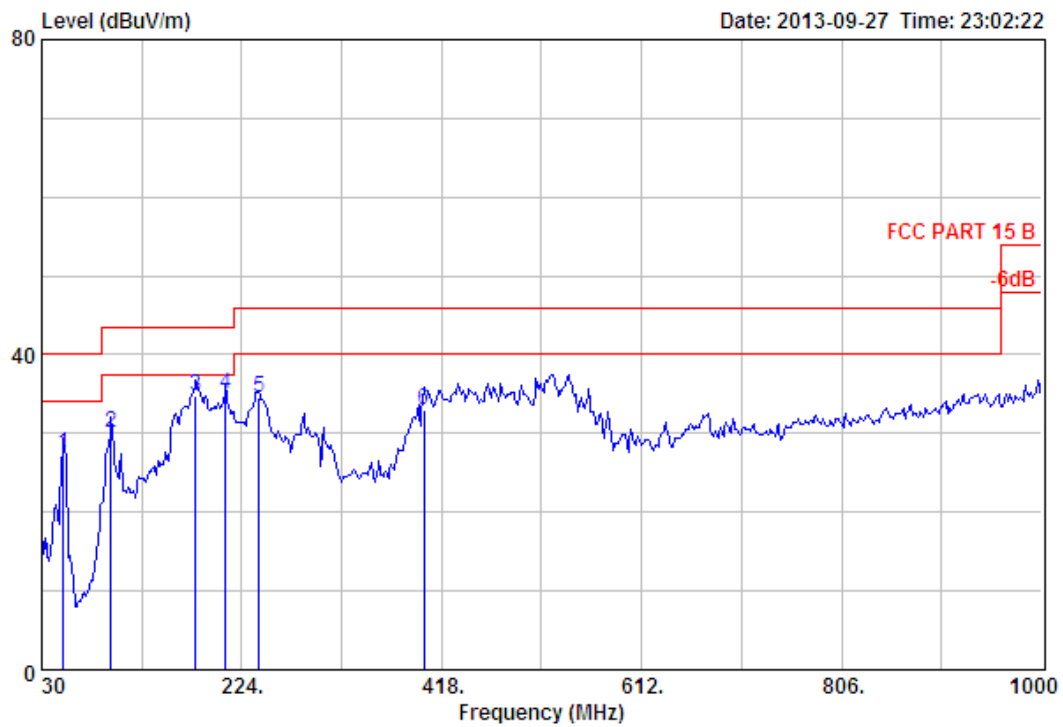


Site no.	: 3m Chamber	Data no. :	240
Dis. / Ant.	: 3m 27137	Ant. pol. :	VERTICAL
Limit	: FCC PART 15 B		
Env. / Ins.	: Temp:25.6';Humi:56%;Press:101.52kPa		
Engineer	: Dick		
EUT	: Bluetooth speaker		
Power	: DC 3.7V		
M/N	: NYNE Cruiser		
Test Mode	: GFSK TX 2402MHz		

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	51.34	6.92	2.38	18.09	27.39	40.00	12.61	QP
2	96.93	8.92	3.03	18.06	30.01	43.50	13.49	QP
3	179.38	8.96	4.11	21.78	34.85	43.50	8.65	QP
4	208.48	8.28	4.31	22.49	35.08	43.50	8.42	QP
5	240.49	10.36	4.71	19.38	34.45	46.00	11.55	QP
6	400.54	16.07	5.98	10.89	32.94	46.00	13.06	QP

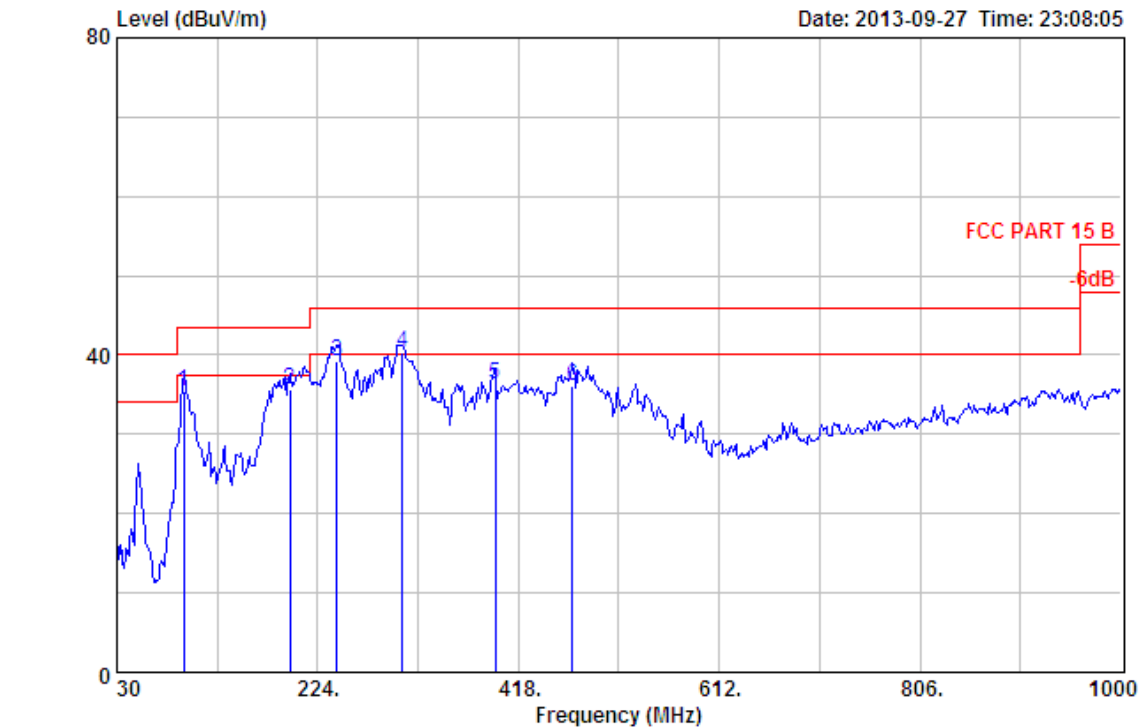


Site no. : 3m Chamber Data no. : 241
Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : GFSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Reamark
					Level (dBuV/m)	Limits (dBuV/m)		
1	94.99	8.83	2.99	23.69	35.51	43.50	7.99	QP
2	196.84	7.72	4.26	23.73	35.71	43.50	7.79	QP
3	242.43	10.64	4.72	23.81	39.17	46.00	6.83	QP
4	305.48	13.11	5.28	21.92	40.31	46.00	5.69	QP
5	395.69	15.87	5.93	14.48	36.28	46.00	9.72	QP
6	470.38	17.21	6.57	12.29	36.07	46.00	9.93	QP

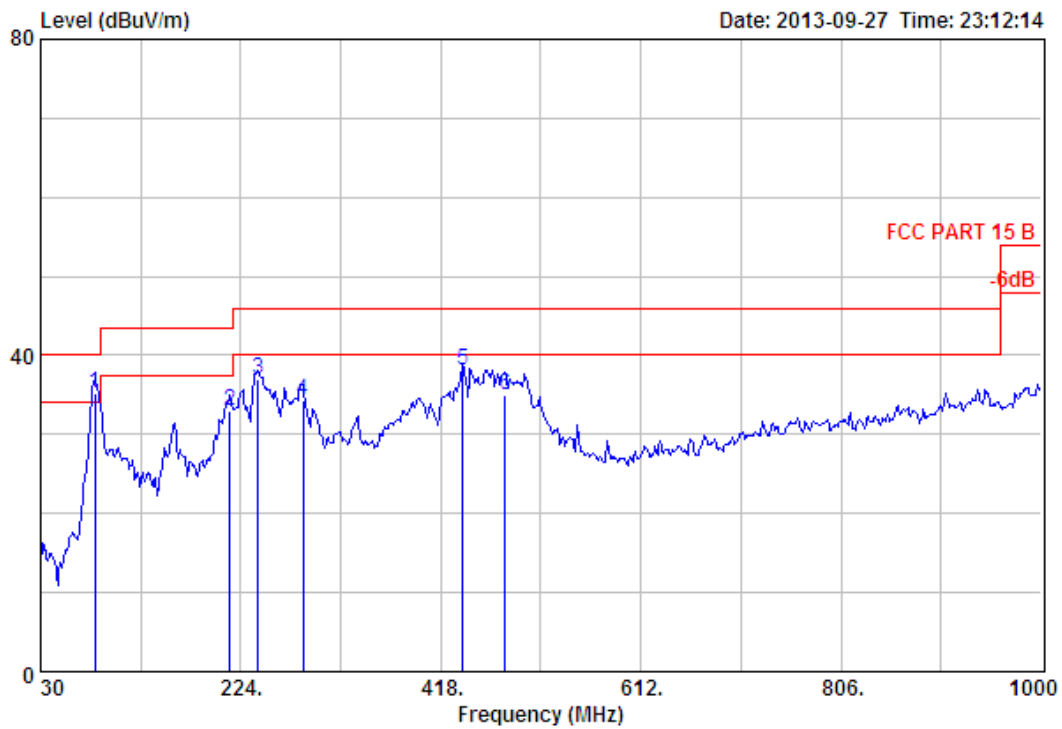


Site no. : 3m Chamber Data no. : 242
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	82.38	7.34	2.88	25.06	35.28	40.00	4.72	QP
2	213.33	8.60	4.35	20.12	33.07	43.50	10.43	QP
3	240.49	10.36	4.71	22.01	37.08	46.00	8.92	QP
4	284.14	12.52	5.12	16.71	34.35	46.00	11.65	QP
5	439.34	16.23	6.31	15.47	38.01	46.00	7.99	QP
6	480.08	17.45	6.60	10.94	34.99	46.00	11.01	QP

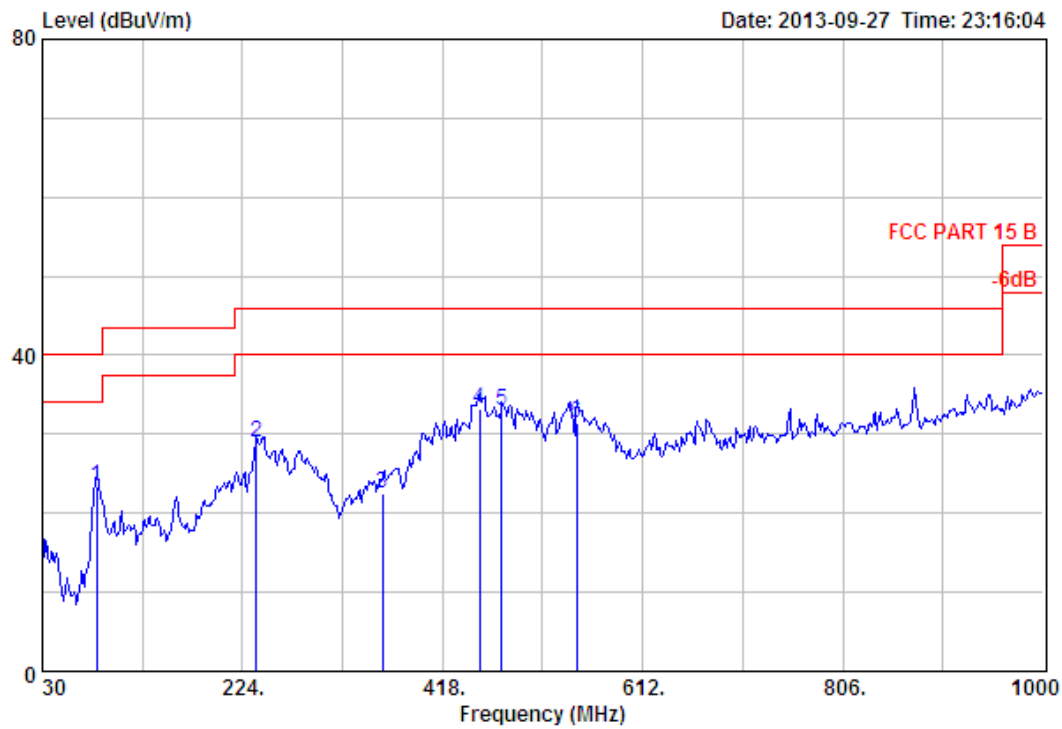


Site no. : 3m Chamber Data no. : 243
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	82.38	7.34	2.88	13.16	23.38	40.00	16.62	QP
2	237.58	10.01	4.65	14.29	28.95	46.00	17.05	QP
3	359.80	14.45	5.74	2.29	22.48	46.00	23.52	QP
4	453.89	16.62	6.41	10.09	33.12	46.00	12.88	QP
5	475.23	17.33	6.61	9.14	33.08	46.00	12.92	QP
6	547.98	19.45	7.04	4.92	31.41	46.00	14.59	QP

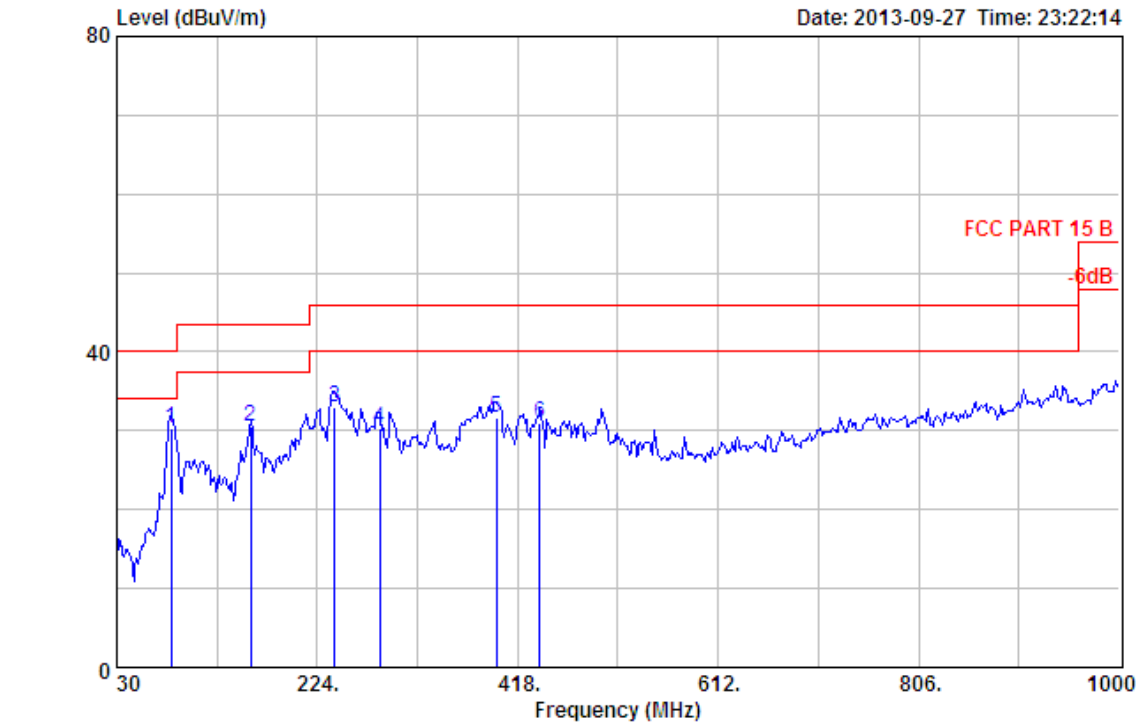


Site no. : 3m Chamber Data no. : 244
Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : GFSK TX 2480MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission		Margin (dB)	Reamark
				Level (dBUV/m)	Limits (dBUV/m)		
1	82.38	7.34	20.06	30.28	40.00	9.72	QP
2	159.98	10.36	16.19	30.44	43.50	13.06	QP
3	240.49	10.36	18.01	33.08	46.00	12.92	QP
4	284.14	12.52	12.71	30.35	46.00	15.65	QP
5	397.63	15.96	9.72	31.64	46.00	14.36	QP
6	439.34	16.23	8.47	31.01	46.00	14.99	QP

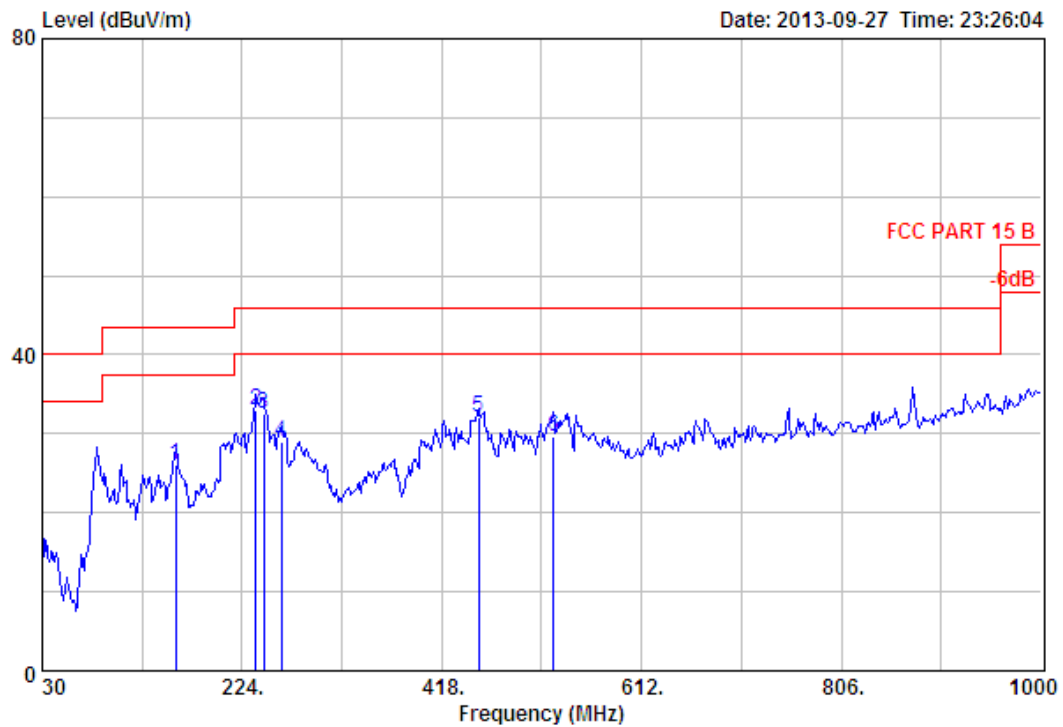


Site no. : 3m Chamber Data no. : 245
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	159.98	10.36	3.89	11.73	25.98	43.50	17.52	QP
2	237.58	10.01	4.65	18.29	32.95	46.00	13.05	QP
3	245.34	11.06	4.77	16.80	32.63	46.00	13.37	QP
4	261.83	12.96	4.95	11.15	29.06	46.00	16.94	QP
5	453.89	16.62	6.41	9.09	32.12	46.00	13.88	QP
6	526.64	18.15	6.92	4.64	29.71	46.00	16.29	QP

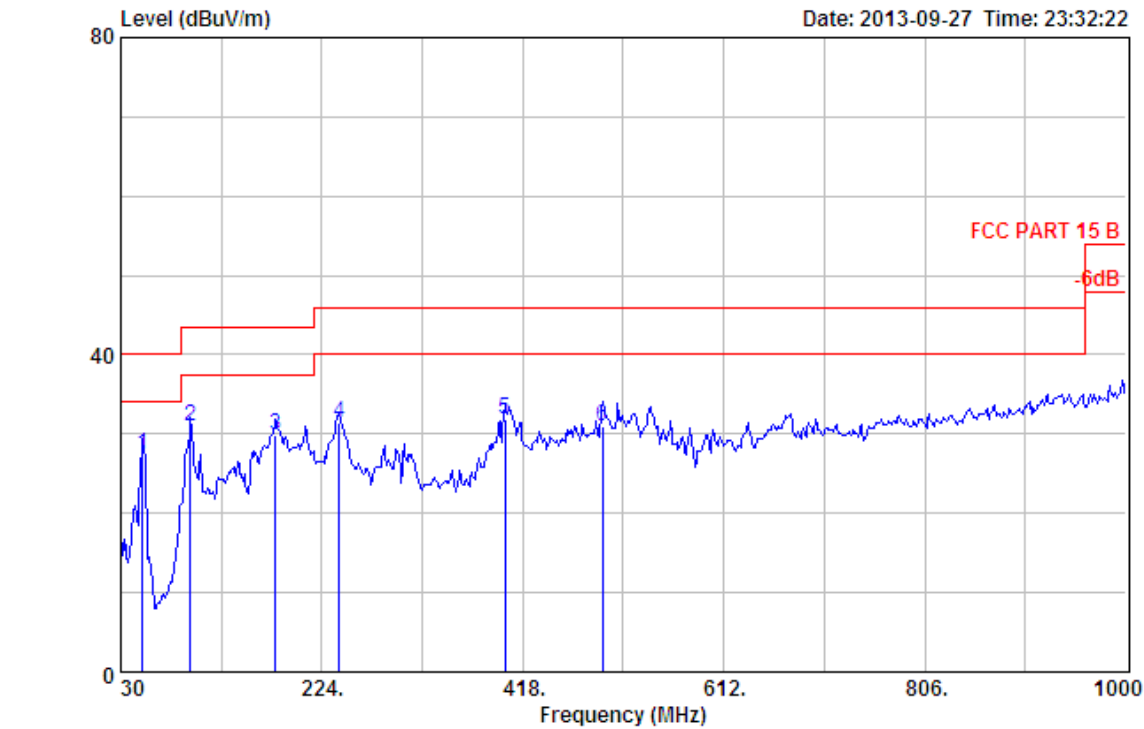


Site no. : 3m Chamber Data no. : 246
Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
Limit : FCC PART 15 B
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Dick
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission		Margin (dB)	Reamark (dB)
					Level (dBUV/m)	Limits (dBUV/m)		
1	51.34	6.92	2.38	18.09	27.39	40.00	12.61	QP
2	96.93	8.92	3.03	19.06	31.01	43.50	12.49	QP
3	179.38	8.96	4.11	16.78	29.85	43.50	13.65	QP
4	240.49	10.36	4.71	16.38	31.45	46.00	14.55	QP
5	400.54	16.07	5.98	9.89	31.94	46.00	14.06	QP
6	494.63	17.84	6.70	6.54	31.08	46.00	14.92	QP

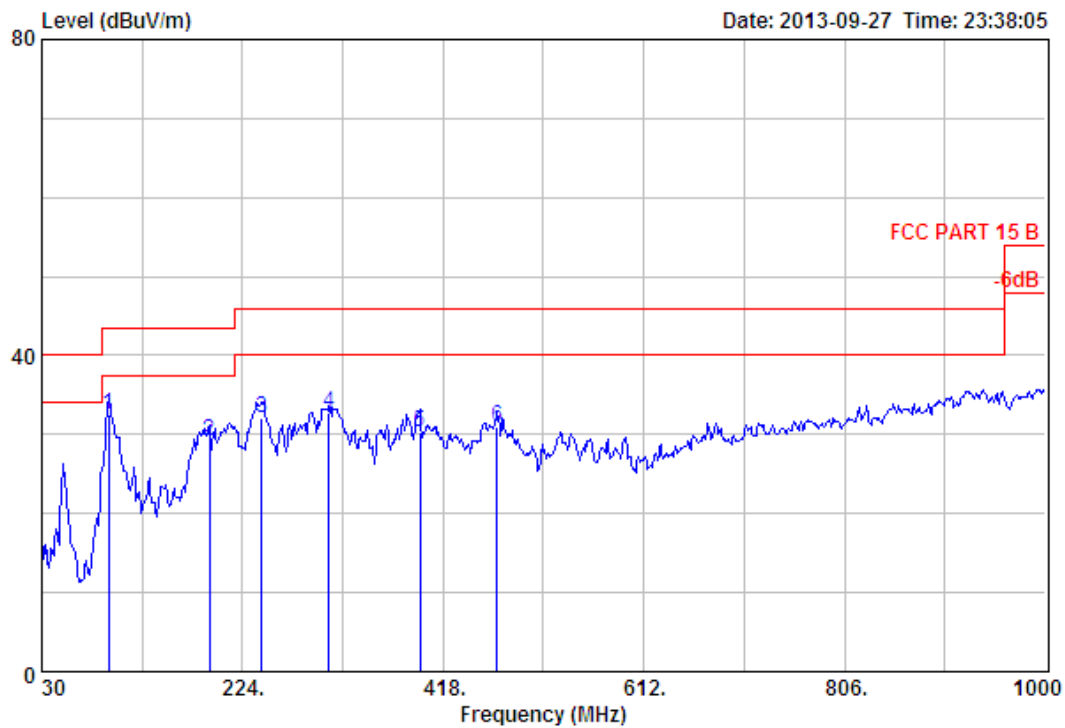


Site no. : 3m Chamber Data no. : 247
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	94.99	8.83	2.99	20.69	32.51	43.50	10.99	QP
2	191.99	7.85	4.22	17.13	29.20	43.50	14.30	QP
3	242.43	10.64	4.72	16.81	32.17	46.00	13.83	QP
4	307.42	13.15	5.30	14.30	32.75	46.00	13.25	QP
5	395.69	15.87	5.93	8.48	30.28	46.00	15.72	QP
6	470.38	17.21	6.57	7.29	31.07	46.00	14.93	QP

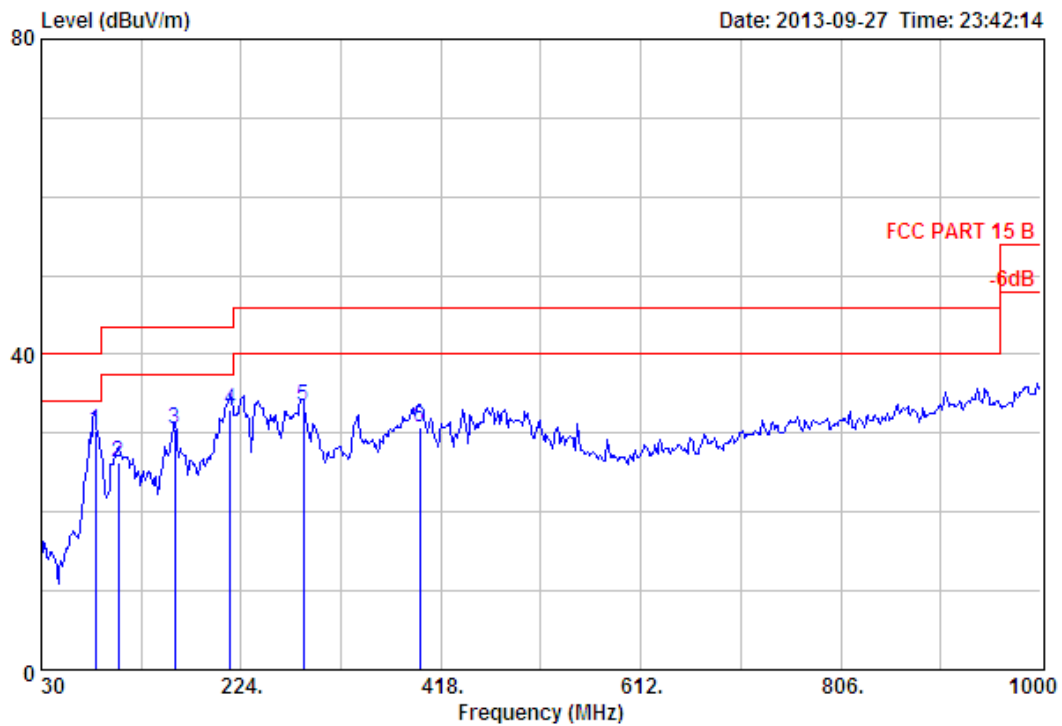


Site no. : 3m Chamber Data no. : 248
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	82.38	7.34	2.88	20.06	30.28	40.00	9.72	QP
2	104.69	9.95	3.11	13.17	26.23	43.50	17.27	QP
3	159.98	10.36	3.89	16.19	30.44	43.50	13.06	QP
4	213.33	8.60	4.35	20.12	33.07	43.50	10.43	QP
5	284.14	12.52	5.12	15.71	33.35	46.00	12.65	QP
6	397.63	15.96	5.96	8.72	30.64	46.00	15.36	QP

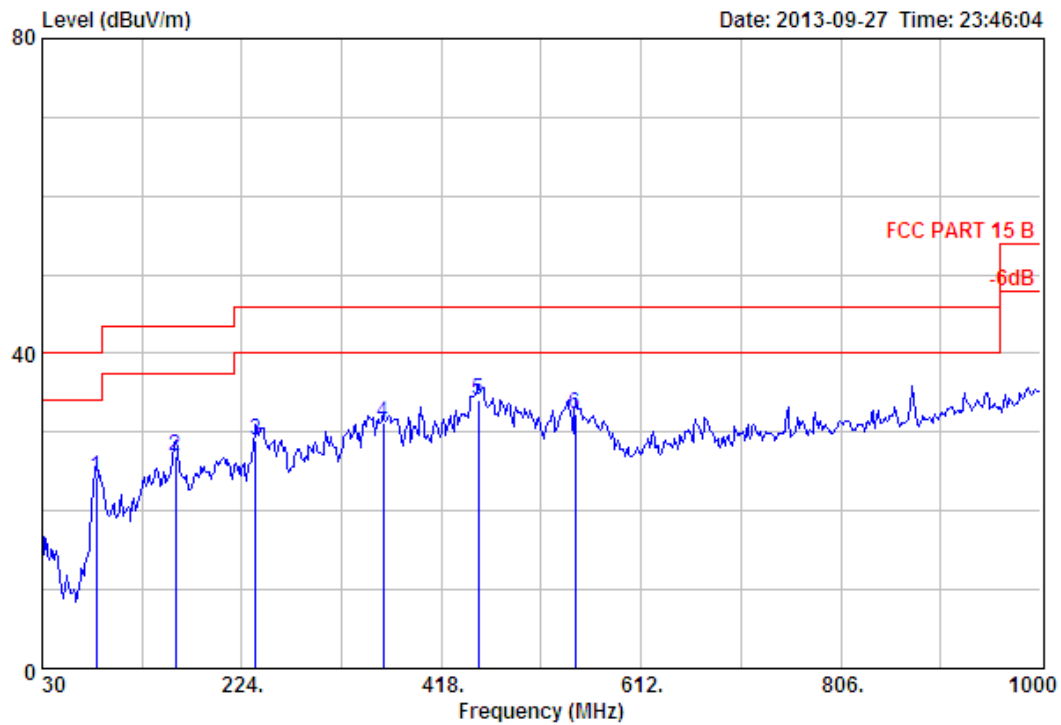


Site no. : 3m Chamber Data no. : 249
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable		Emission			
	(MHz)	Factor	Loss	Reading	Level	Limits	Margin	Reamark
		(dB/m)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	(dB)
1	82.38	7.34	2.88	14.16	24.38	40.00	15.62	QP
2	159.98	10.36	3.89	12.73	26.98	43.50	16.52	QP
3	237.58	10.01	4.65	14.29	28.95	46.00	17.05	QP
4	361.74	14.53	5.75	11.02	31.30	46.00	14.70	QP
5	453.89	16.62	6.41	11.09	34.12	46.00	11.88	QP
6	547.98	19.45	7.04	5.92	32.41	46.00	13.59	QP

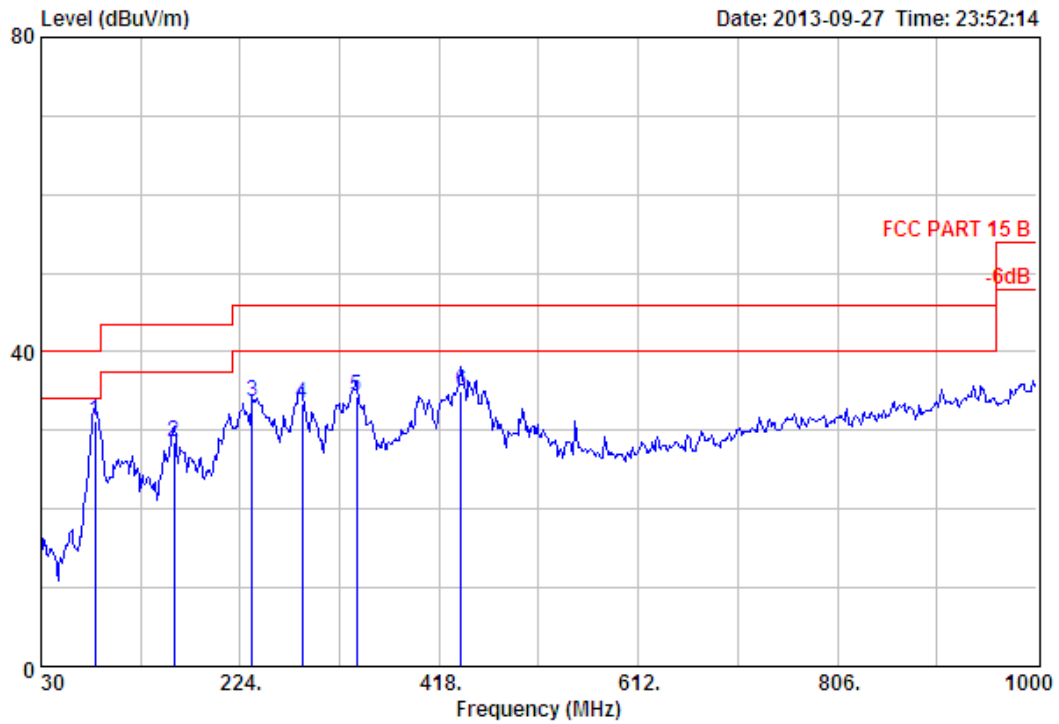

Site no. : 3m Chamber Data no. : 250
 Dis. / Ant. : 3m 27137 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz


	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Reamark (dB)
1	82.38	7.34	2.88	21.06	31.28	40.00	8.72	QP
2	159.98	10.36	3.89	14.19	28.44	43.50	15.06	QP
3	235.64	9.80	4.64	19.15	33.59	46.00	12.41	QP
4	284.14	12.52	5.12	15.71	33.35	46.00	12.65	QP
5	337.49	14.08	5.55	14.67	34.30	46.00	11.70	QP
6	439.34	16.23	6.31	12.47	35.01	46.00	10.99	QP

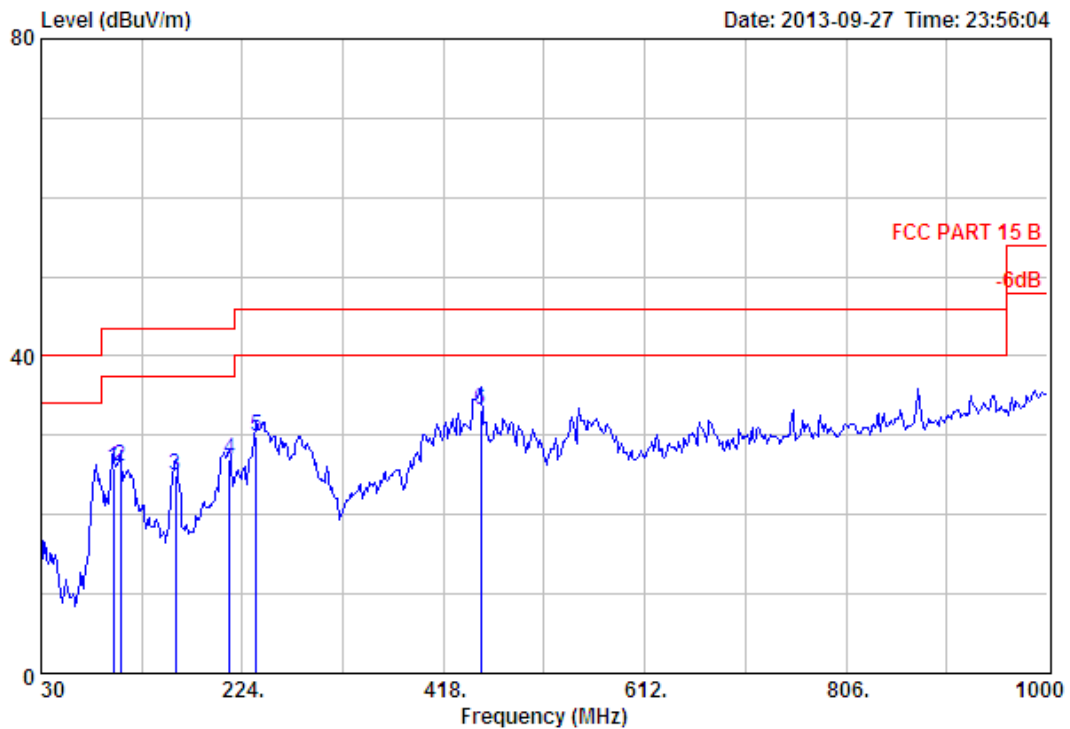

Site no. : 3m Chamber Data no. : 251
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Dick
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1	99.84	9.45	3.04	13.41	25.90	43.50	17.60	QP
2	106.63	10.15	3.15	12.87	26.17	43.50	17.33	QP
3	159.98	10.36	3.89	10.73	24.98	43.50	18.52	QP
4	211.39	8.51	4.34	14.19	27.04	43.50	16.46	QP
5	237.58	10.01	4.65	15.29	29.95	46.00	16.05	QP
6	453.89	16.62	6.41	10.09	33.12	46.00	12.88	QP


1000 MHz – 18000MHz

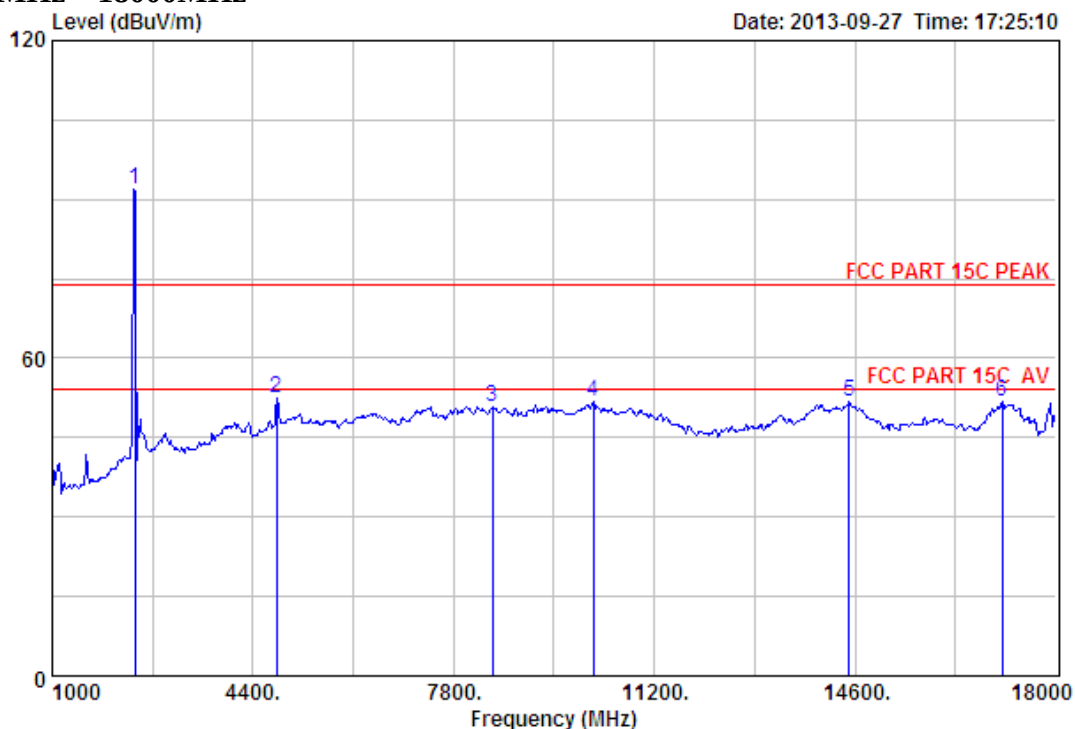

Site no. : 3m Chamber Data no. : 262
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	91.97	92.02	74.00	-18.02	Peak
2	4804.00	31.25	11.77	31.81	41.39	52.60	74.00	21.40	Peak
3	8463.00	36.87	11.45	31.86	34.46	50.92	74.00	23.08	Peak
4	10163.00	38.39	11.50	32.08	34.10	51.91	74.00	22.09	Peak
5	14498.00	41.88	10.93	33.08	32.04	51.77	74.00	22.23	Peak
6	17099.00	40.13	10.95	32.96	33.68	51.80	74.00	22.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

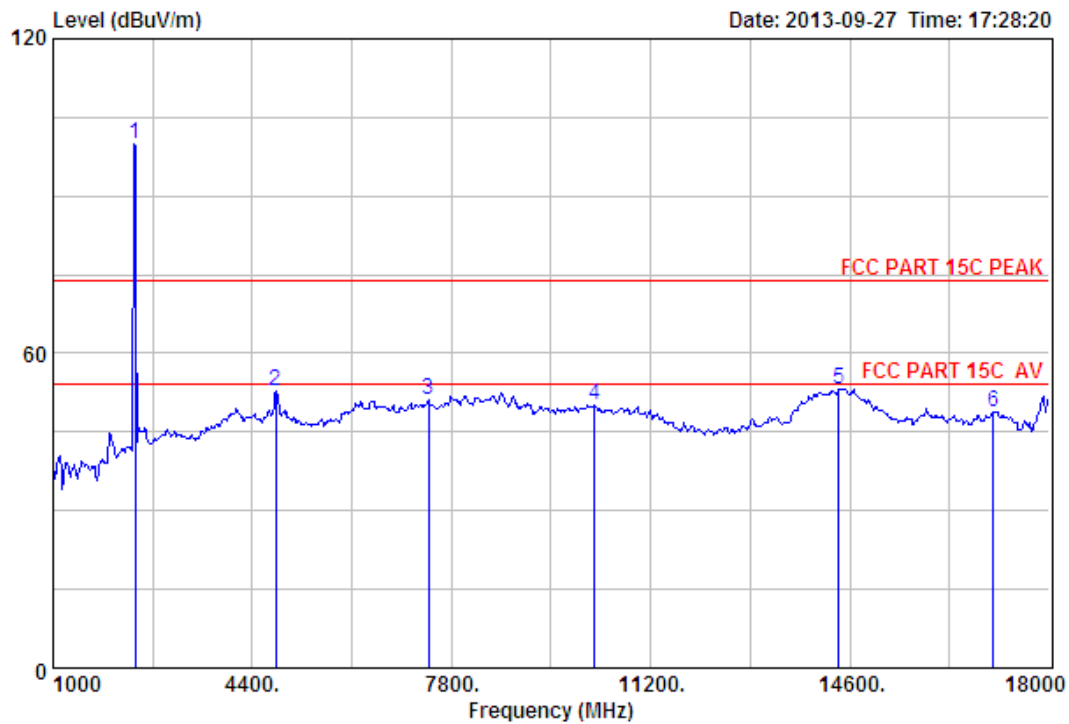

Site no. : 3m Chamber Data no. : 263
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level (dBuV/m)				
1	2402.00	27.61	6.62	34.18	99.99	100.04	74.00	-26.04	Peak
2	4804.00	31.25	11.77	31.81	41.55	52.76	74.00	21.24	Peak
3	7409.00	36.58	11.60	31.97	34.93	51.14	74.00	22.86	Peak
4	10248.00	38.53	11.45	32.24	32.41	50.15	74.00	23.85	Peak
5	14413.00	41.80	10.92	32.78	33.24	53.18	74.00	20.82	Peak
6	17048.00	39.93	10.97	33.09	30.94	48.75	74.00	25.25	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

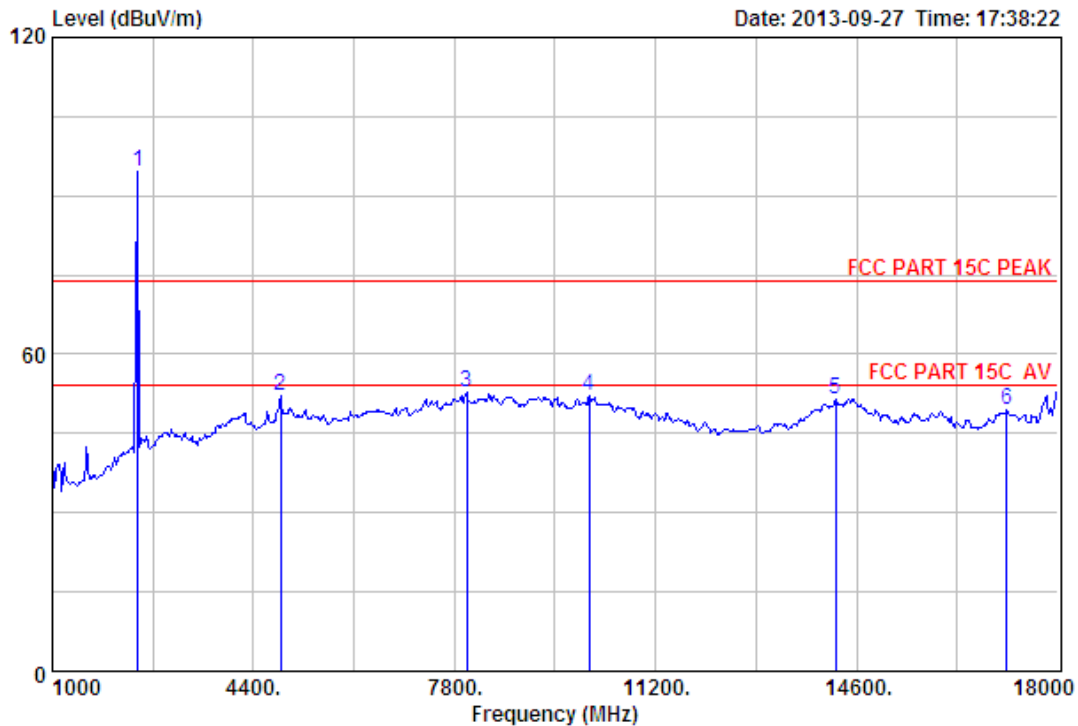

Site no. : 3m Chamber Data no. : 266
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission					Remark
				Reading	Level	Limits	Margin		
(dBuV)	(dBuV/m)	(dBuV/m)	(dB)				(dB)		
1	2441.00	27.60	6.67	34.12	94.33	94.48	74.00	-20.48	Peak
2	4859.00	31.34	11.99	31.88	40.78	52.23	74.00	21.77	Peak
3	8004.00	37.01	11.40	31.22	35.51	52.70	74.00	21.30	Peak
4	10078.00	38.24	11.54	31.92	34.31	52.17	74.00	21.83	Peak
5	14243.00	41.67	10.91	33.24	32.16	51.50	74.00	22.50	Peak
6	17133.00	40.26	10.94	33.03	31.30	49.47	74.00	24.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

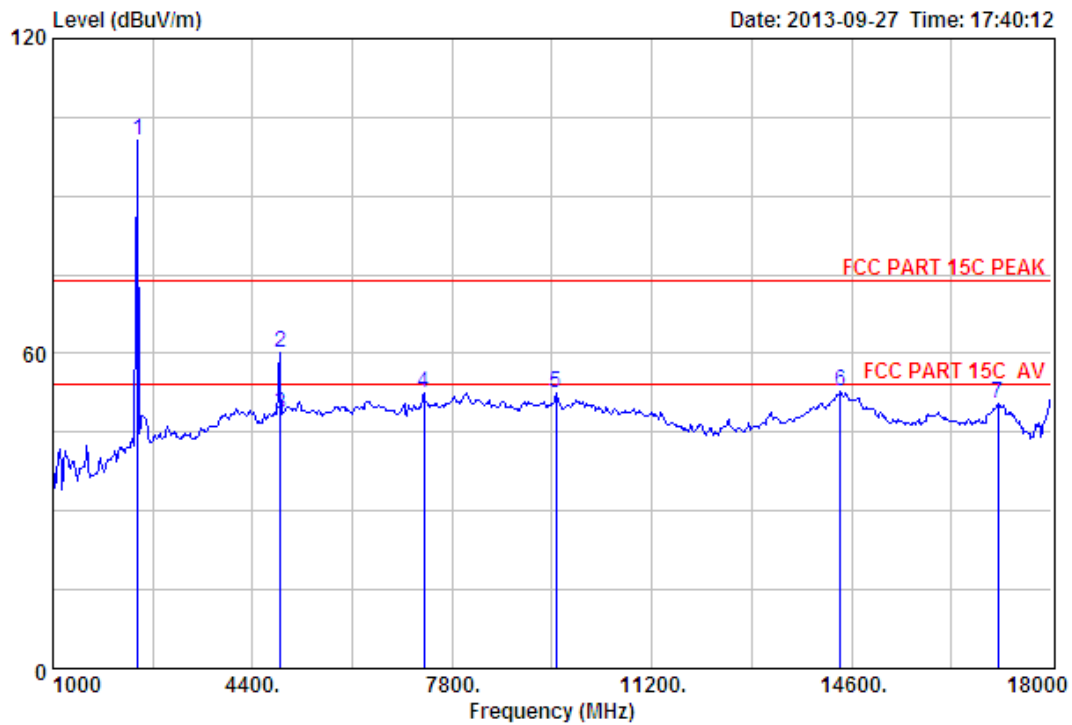

Site no. : 3m Chamber Data no. : 267
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission		Limits	Margin	Remark
	(MHz)	Factor	Loss	Factor	Reading	Level	(dBuV/m)	(dB)	
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)			
1	2441.00	27.60	6.67	34.12	100.62	100.77	74.00	-26.77	Peak
2	4882.00	31.37	12.07	31.90	48.58	60.12	74.00	13.88	Peak
3	4882.00	31.37	12.07	31.90	36.77	48.31	54.00	5.69	Average
4	7324.00	36.55	11.57	31.99	36.31	52.44	74.00	21.56	Peak
5	9568.00	37.94	11.69	31.93	34.86	52.56	74.00	21.44	Peak
6	14413.00	41.80	10.92	32.78	32.72	52.66	74.00	21.34	Peak
7	17099.00	40.13	10.95	32.96	32.46	50.58	74.00	23.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

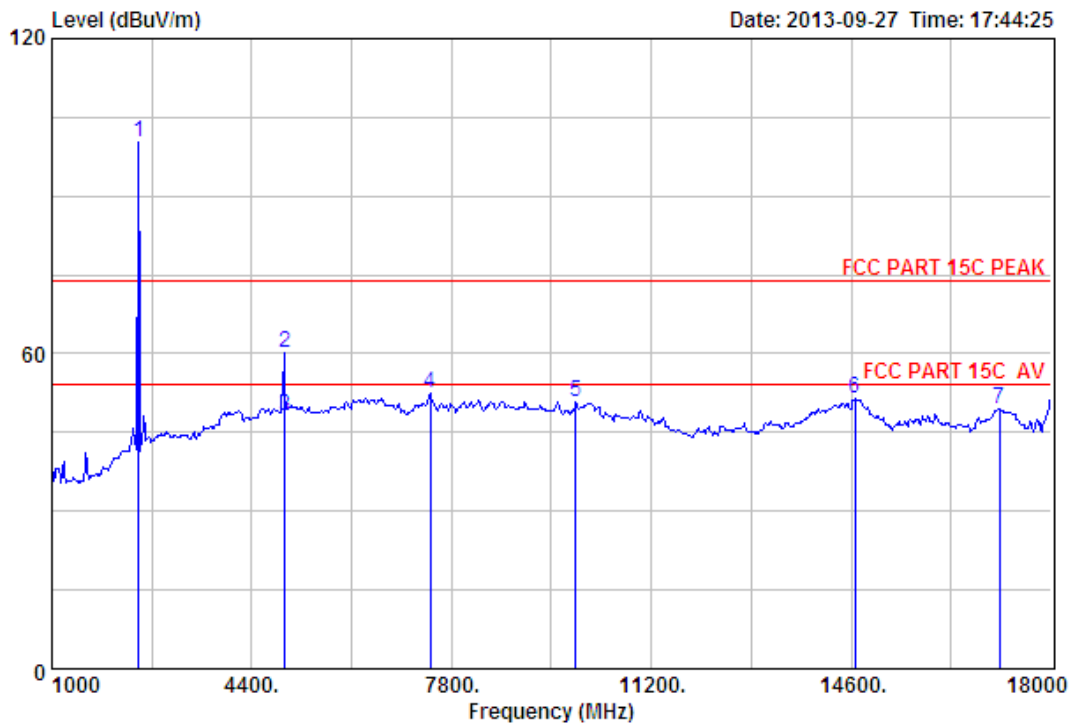

Site no. : 3m Chamber Data no. : 268
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	100.07	100.33	74.00	-26.33	Peak
2	4960.00	31.49	12.44	31.97	48.27	60.23	74.00	13.77	Peak
3	4960.00	31.49	12.44	31.97	36.05	48.01	54.00	5.99	Average
4	7443.00	36.54	11.61	31.93	36.11	52.33	74.00	21.67	Peak
5	9908.00	38.14	11.61	31.76	32.72	50.71	74.00	23.29	Peak
6	14668.00	41.36	10.91	33.68	32.92	51.51	74.00	22.49	Peak
7	17116.00	40.19	10.95	32.92	31.10	49.32	74.00	24.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

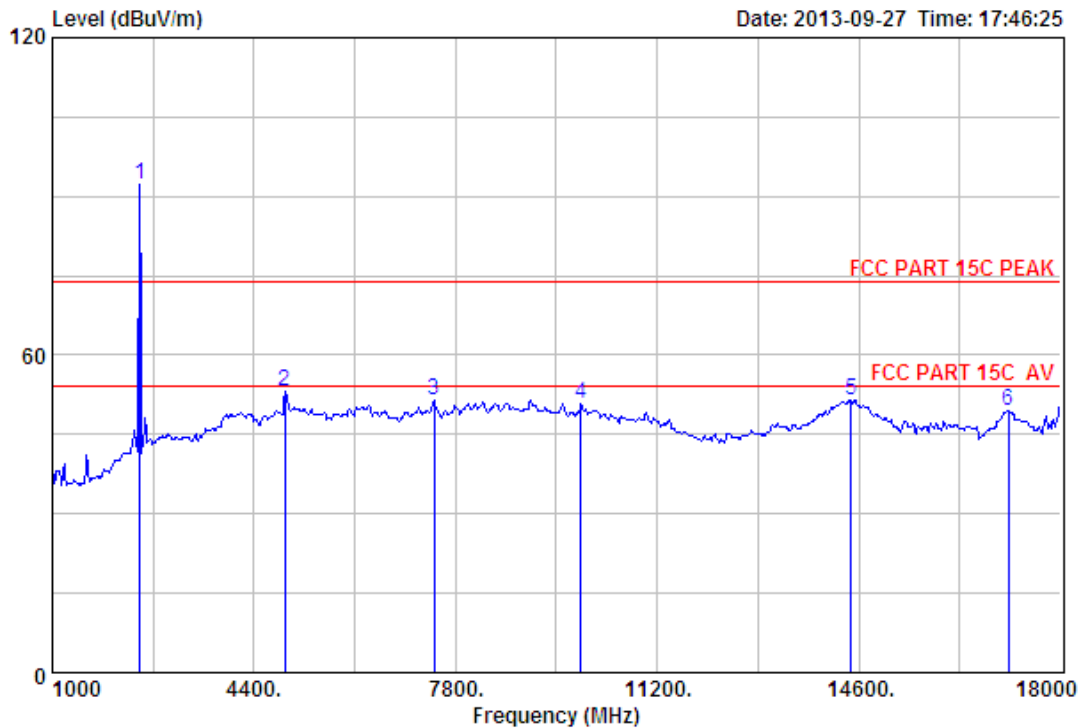

Site no. : 3m Chamber Data no. : 269
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2480.00	27.58	6.71	34.03	92.07	92.33	74.00	-18.33	Peak
2	4927.00	31.45	12.29	31.95	41.32	53.11	74.00	20.89	Peak
3	7443.00	36.54	11.61	31.93	35.11	51.33	74.00	22.67	Peak
4	9908.00	38.14	11.61	31.76	32.72	50.71	74.00	23.29	Peak
5	14464.00	41.85	10.93	32.96	31.75	51.57	74.00	22.43	Peak
6	17116.00	40.19	10.95	32.92	31.10	49.32	74.00	24.68	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

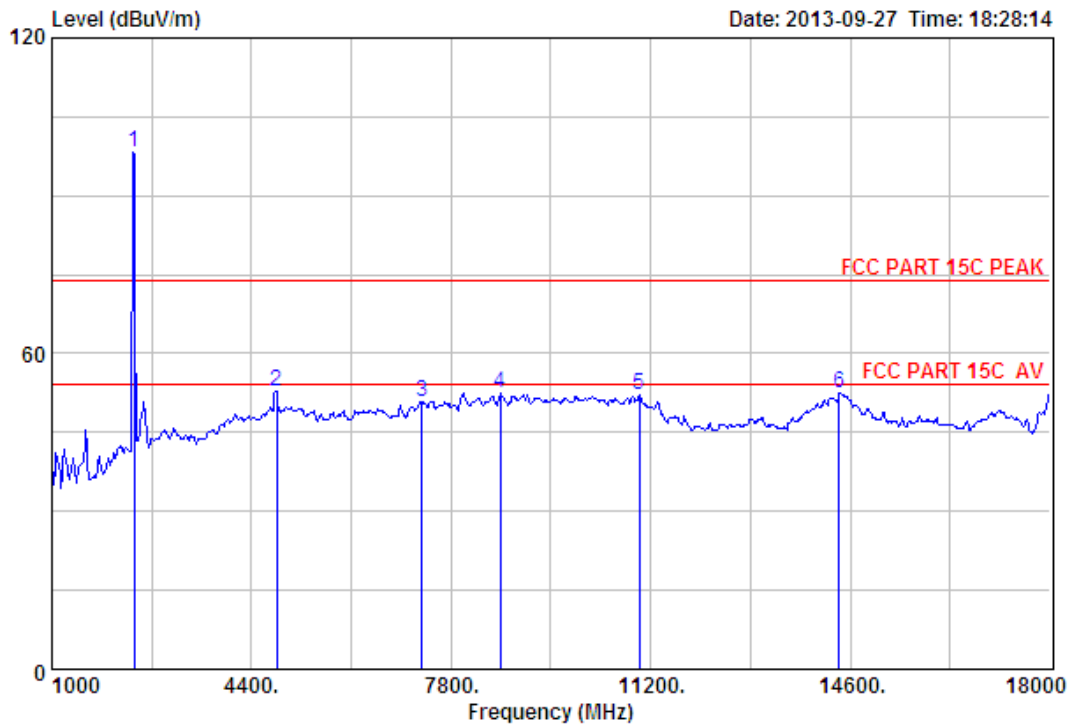

Site no. : 3m Chamber Data no. : 148
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2402.00	27.61	6.62	34.18	98.08	98.13	74.00	-24.13	Peak
2	4825.00	31.28	11.84	31.83	41.53	52.82	74.00	21.18	Peak
3	7307.00	36.55	11.57	32.00	34.65	50.77	74.00	23.23	Peak
4	8633.00	37.24	11.45	32.31	35.96	52.34	74.00	21.66	Peak
5	11013.00	39.51	11.28	33.68	34.98	52.09	74.00	21.91	Peak
6	14413.00	41.80	10.92	32.78	32.67	52.61	74.00	21.39	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

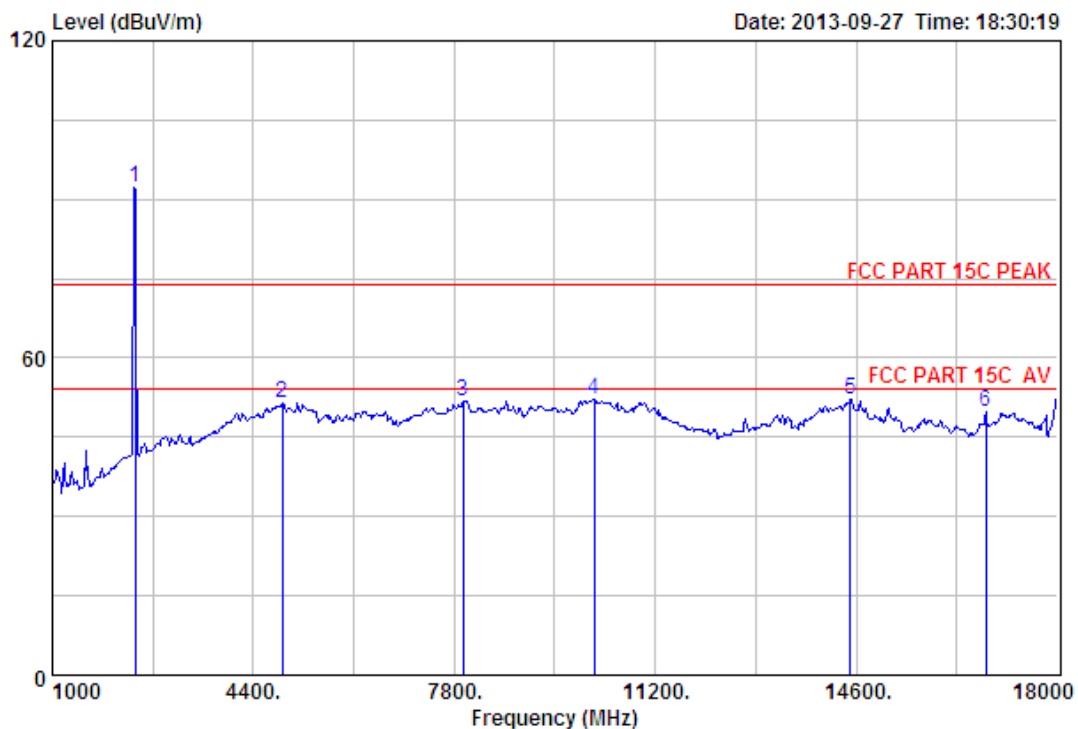

Site no. : 3m Chamber Data no. : 149
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Reading (dBuV)	Level (dBuV/m)			
1	2402.00	27.61	6.62	34.18	92.26	92.31	74.00	-18.31	Peak
2	4893.00	31.40	12.14	31.92	39.80	51.42	74.00	22.58	Peak
3	7953.00	36.91	11.42	31.26	34.65	51.72	74.00	22.28	Peak
4	10163.00	38.39	11.50	32.08	34.31	52.12	74.00	21.88	Peak
5	14498.00	41.88	10.93	33.08	32.57	52.30	74.00	21.70	Peak
6	16793.00	39.14	10.80	34.49	34.21	49.66	74.00	24.34	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

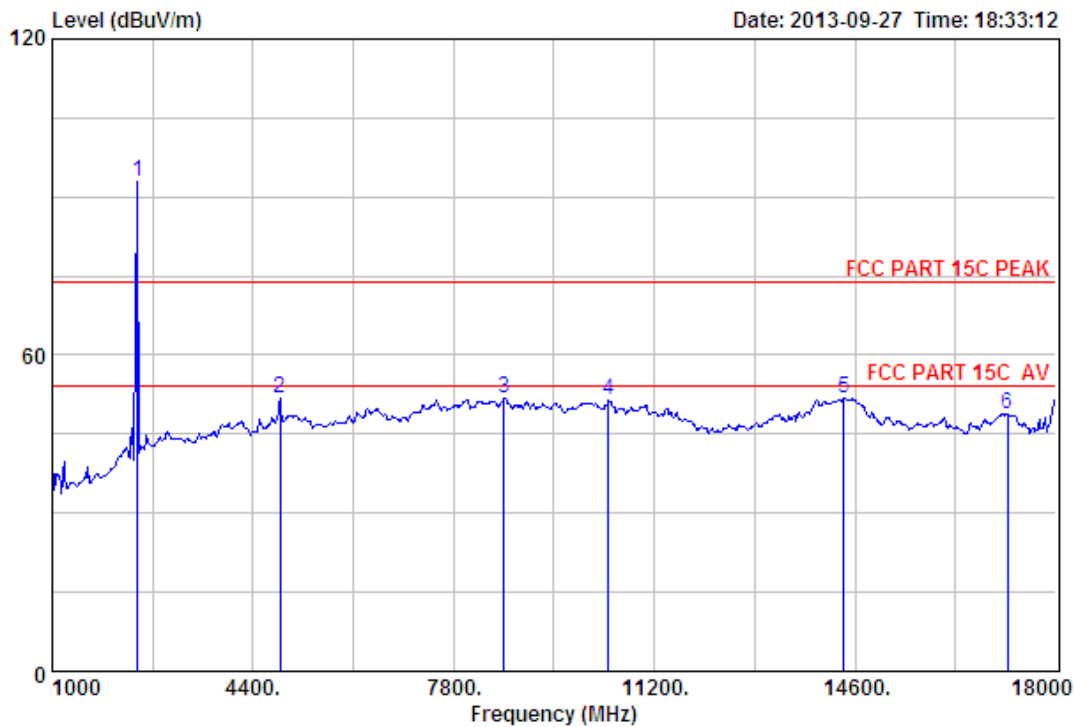

Site no. : 3m Chamber Data no. : 150
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	92.92	93.07	74.00	-19.07	Peak
2	4859.00	31.34	11.99	31.88	40.51	51.96	74.00	22.04	Peak
3	8650.00	37.27	11.45	32.35	35.29	51.66	74.00	22.34	Peak
4	10418.00	38.83	11.36	32.56	33.74	51.37	74.00	22.63	Peak
5	14413.00	41.80	10.92	32.78	31.92	51.86	74.00	22.14	Peak
6	17184.00	40.45	10.92	33.34	30.82	48.85	74.00	25.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

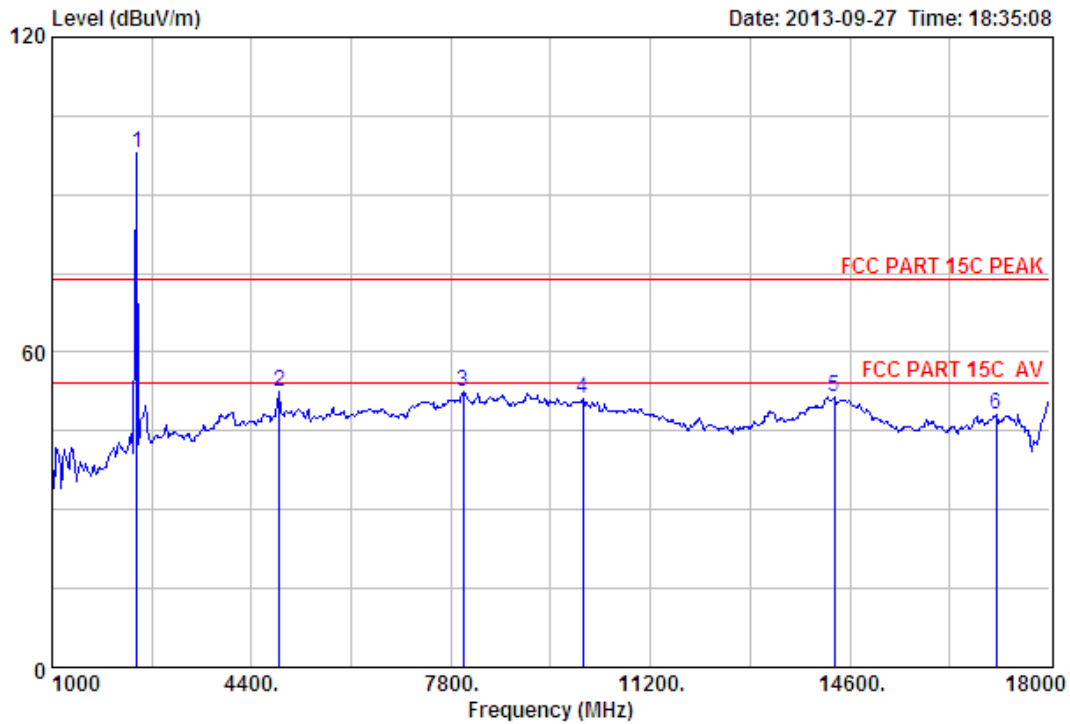

Site no. : 3m Chamber Data no. : 151
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2441.00	27.60	6.67	34.12	97.87	98.02	74.00	-24.02	Peak
2	4876.00	31.37	12.07	31.90	40.97	52.51	74.00	21.49	Peak
3	8004.00	37.01	11.40	31.22	35.33	52.52	74.00	21.48	Peak
4	10044.00	38.18	11.56	31.85	33.12	51.01	74.00	22.99	Peak
5	14328.00	41.74	10.92	32.98	31.86	51.54	74.00	22.46	Peak
6	17099.00	40.13	10.95	32.96	29.94	48.06	74.00	25.94	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

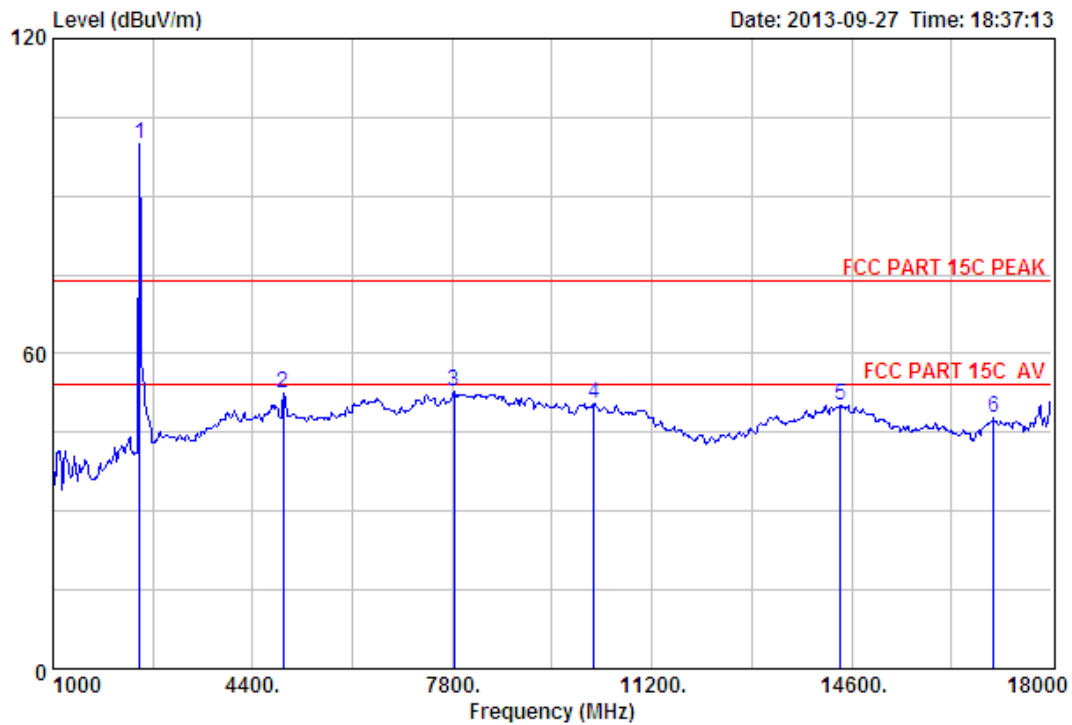

Site no. : 3m Chamber Data no. : 152
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	99.76	100.02	74.00	-26.02	Peak
2	4927.00	31.45	12.29	31.95	40.60	52.39	74.00	21.61	Peak
3	7834.00	36.68	11.47	31.40	35.97	52.72	74.00	21.28	Peak
4	10214.00	38.48	11.47	32.17	32.71	50.49	74.00	23.51	Peak
5	14413.00	41.80	10.92	32.78	30.35	50.29	74.00	23.71	Peak
6	17014.00	39.80	10.98	33.17	30.25	47.86	74.00	26.14	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

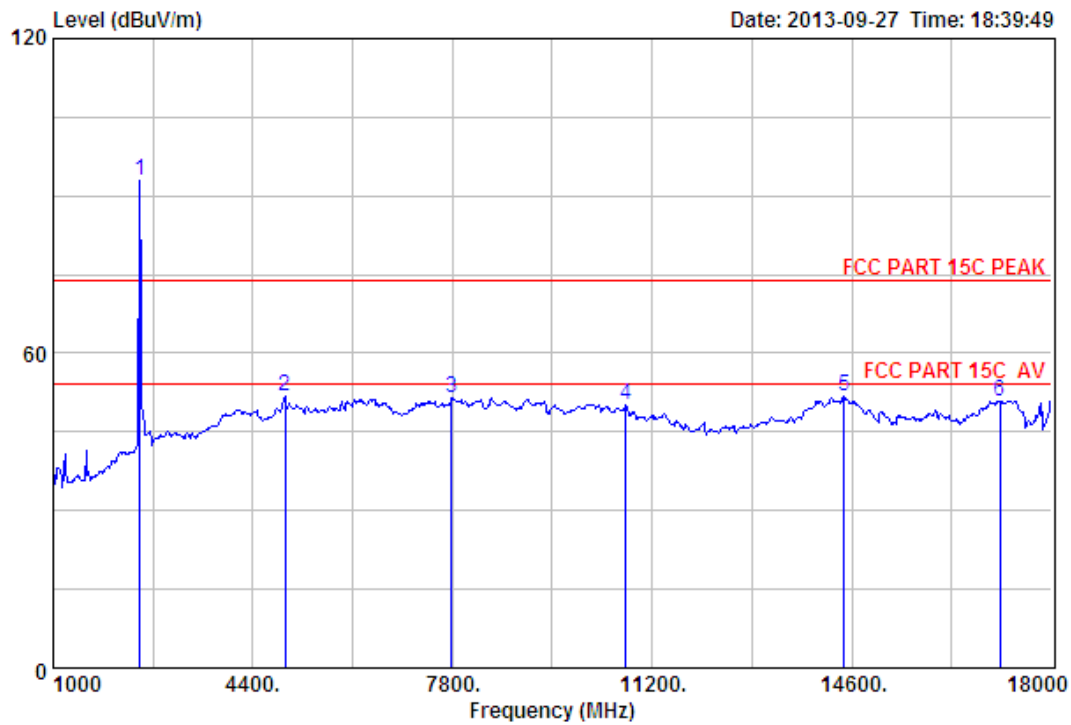

Site no. : 3m Chamber Data no. : 153
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.00	27.58	6.71	34.03	92.74	93.00	74.00	-19.00	Peak
2	4944.00	31.47	12.37	31.96	39.95	51.83	74.00	22.17	Peak
3	7783.00	36.59	11.50	31.45	34.94	51.58	74.00	22.42	Peak
4	10758.00	39.26	11.30	33.20	32.95	50.31	74.00	23.69	Peak
5	14464.00	41.85	10.93	32.96	31.87	51.69	74.00	22.31	Peak
6	17116.00	40.19	10.95	32.92	32.74	50.96	74.00	23.04	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

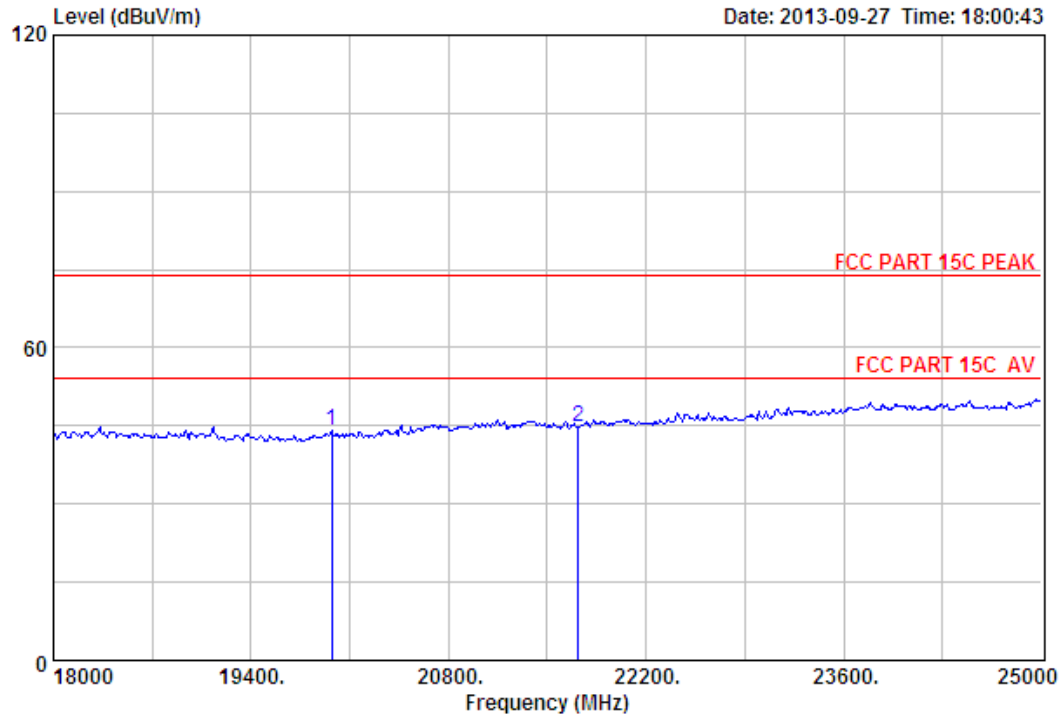18000MHz – 25000MHz

Site no. : 3m Chamber Data no. : 138
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz

	Ant.	Cable	Amp		Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 19974.00	46.09	19.65	36.68	14.93	43.99	74.00	30.01	Peak	
2 21717.00	45.87	20.44	35.15	13.65	44.81	74.00	29.19	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

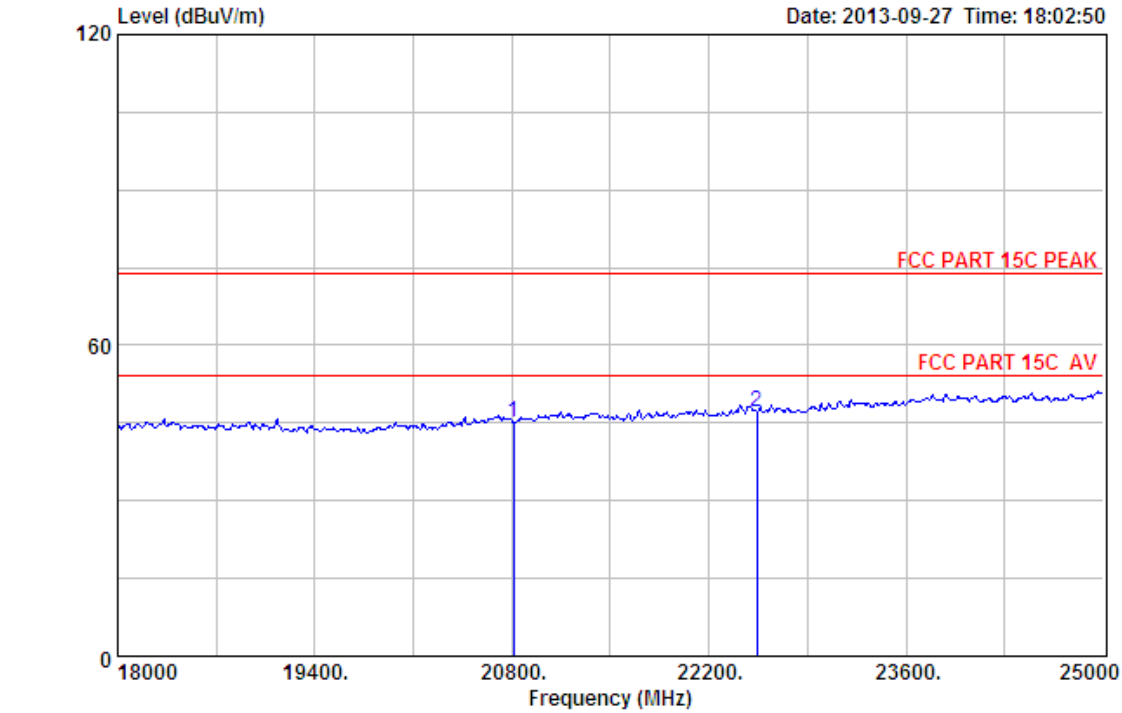

Site no. : 3m Chamber Data no. : 139
Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Tony
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : GFSK TX 2402MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 20814.00	46.19	20.05	35.96	14.69	44.97	74.00	29.03	Peak
2 22543.00	45.79	20.88	34.32	14.85	47.20	74.00	26.80	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

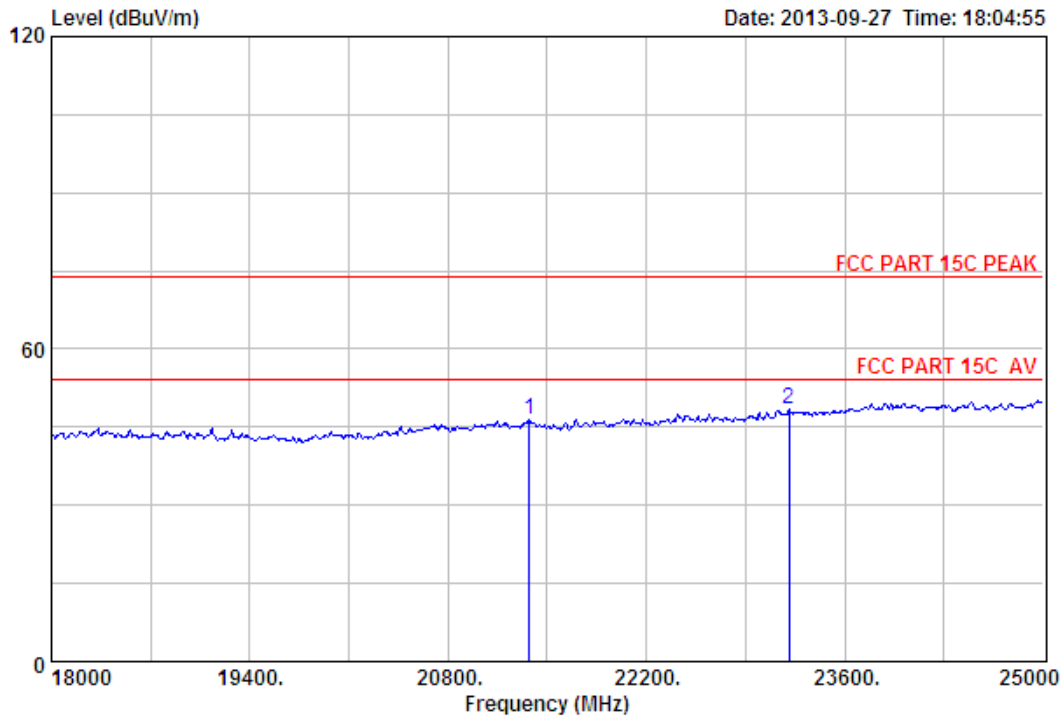

Site no. : 3m Chamber Data no. : 140
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 21374.00	46.08	20.29	35.46	15.66	46.57	74.00	27.43	Peak
2 23208.00	45.64	21.34	33.64	15.06	48.40	74.00	25.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

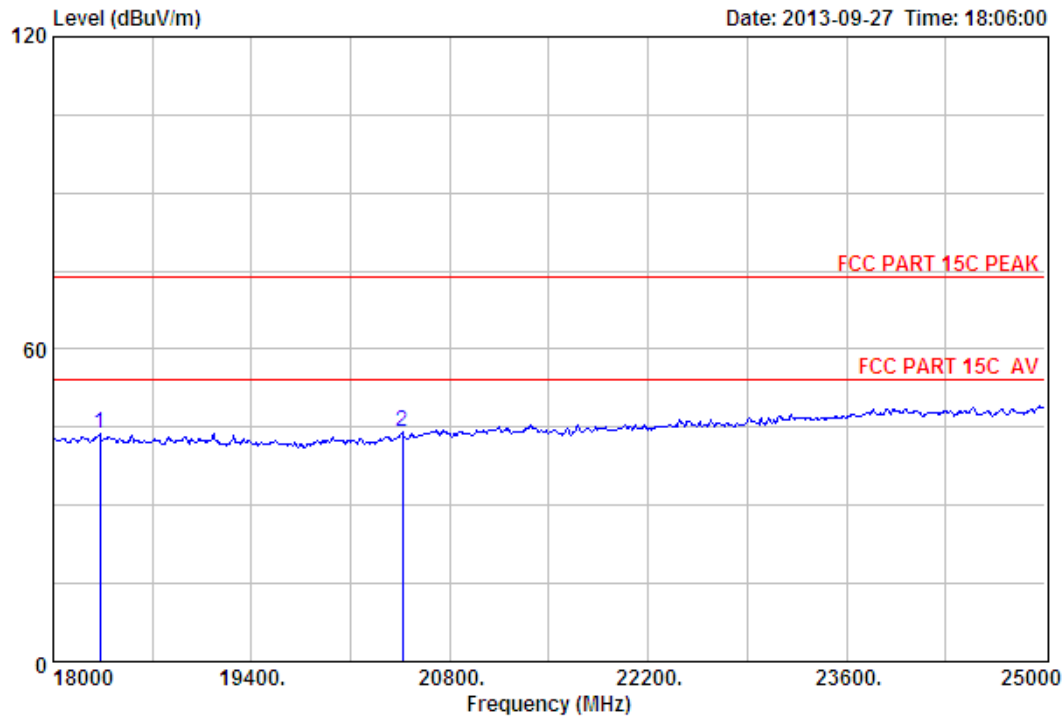

Site no. : 3m Chamber Data no. : 141
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2441MHz

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 18329.00	44.66	17.73	35.28	16.74	43.85	74.00	30.15	Peak	
2 20464.00	46.01	19.89	36.27	14.60	44.23	74.00	29.77	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

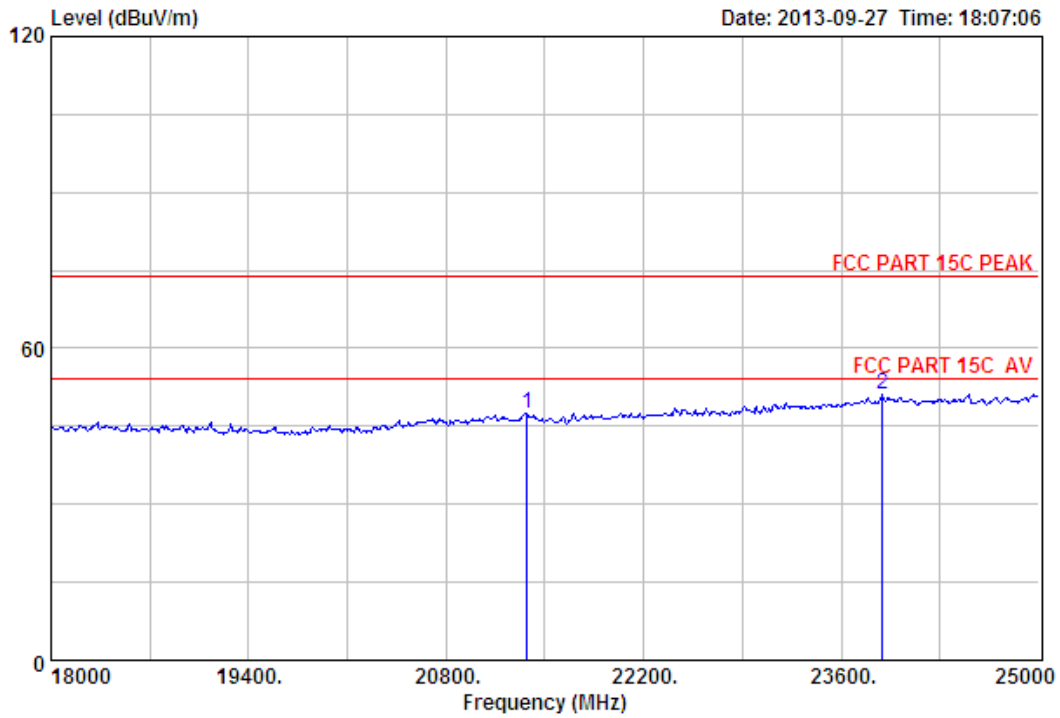

Site no. : 3m Chamber Data no. : 142
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21374.00	46.08	20.29	35.46	16.66	47.57	74.00	26.43	Peak
2	23894.00	45.62	21.95	32.90	16.38	51.05	74.00	22.95	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

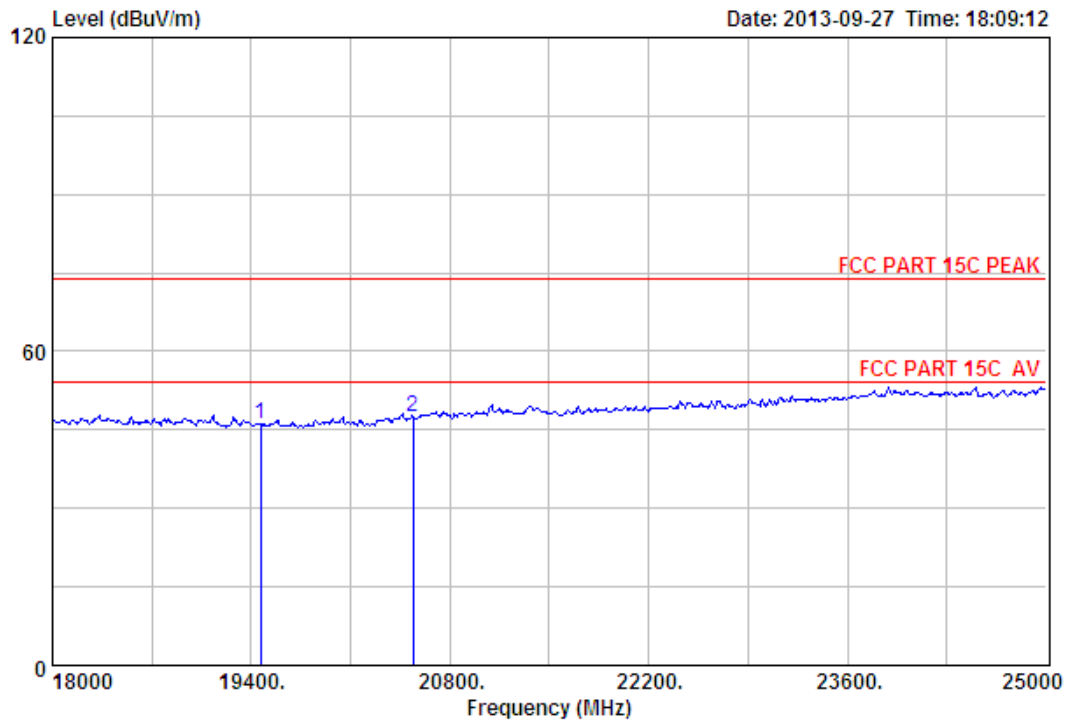

Site no. : 3m Chamber Data no. : 143
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading Level (dBuV)	Level (dBuV/m)			
1 19463.00	45.86	19.07	36.25	17.56	46.24	74.00	27.76	Peak
2 20541.00	46.03	19.92	36.21	17.71	47.45	74.00	26.55	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

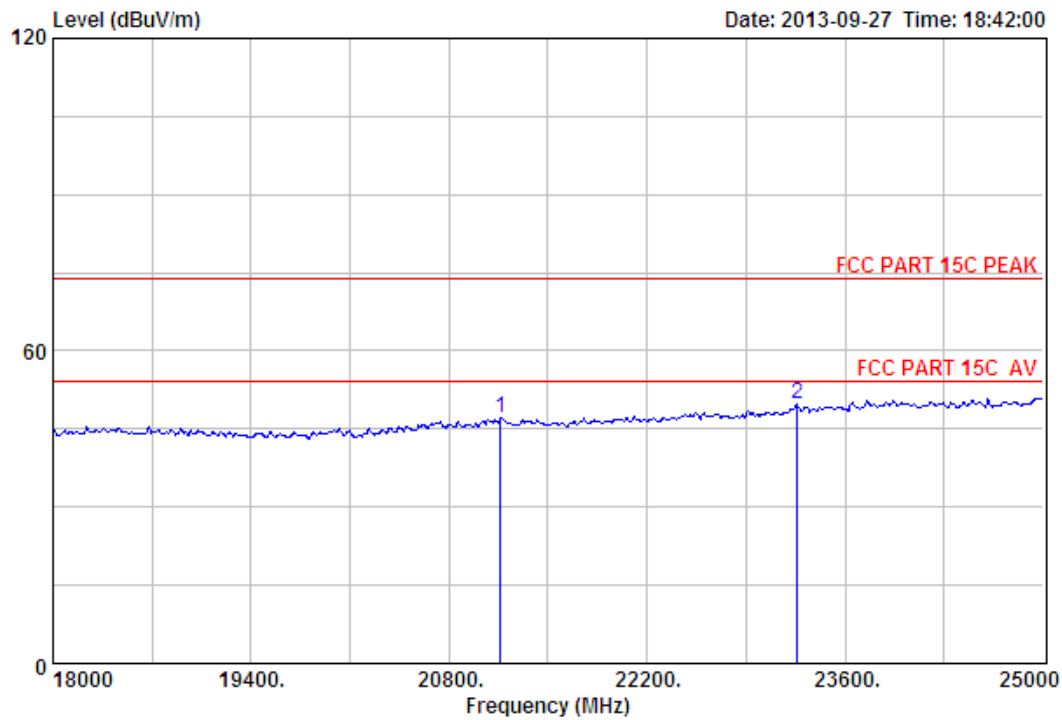

Site no. : 3m Chamber Data no. : 154
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	21164.00	46.20	20.20	35.64	16.43	47.19	74.00	26.81	Peak
2	23264.00	45.65	21.39	33.56	16.40	49.88	74.00	24.12	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

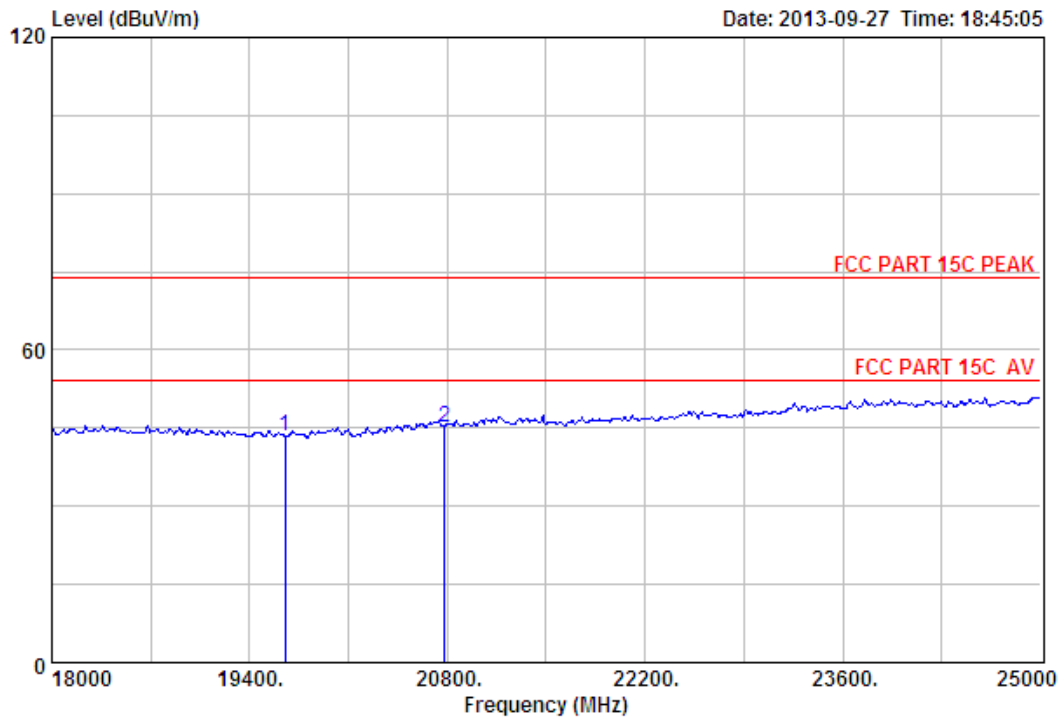

Site no. : 3m Chamber Data no. : 155
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1 19652.00	45.96	19.29	36.40	14.60	43.45	74.00	30.55	Peak	
2 20779.00	46.16	20.03	36.00	15.00	45.19	74.00	28.81	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

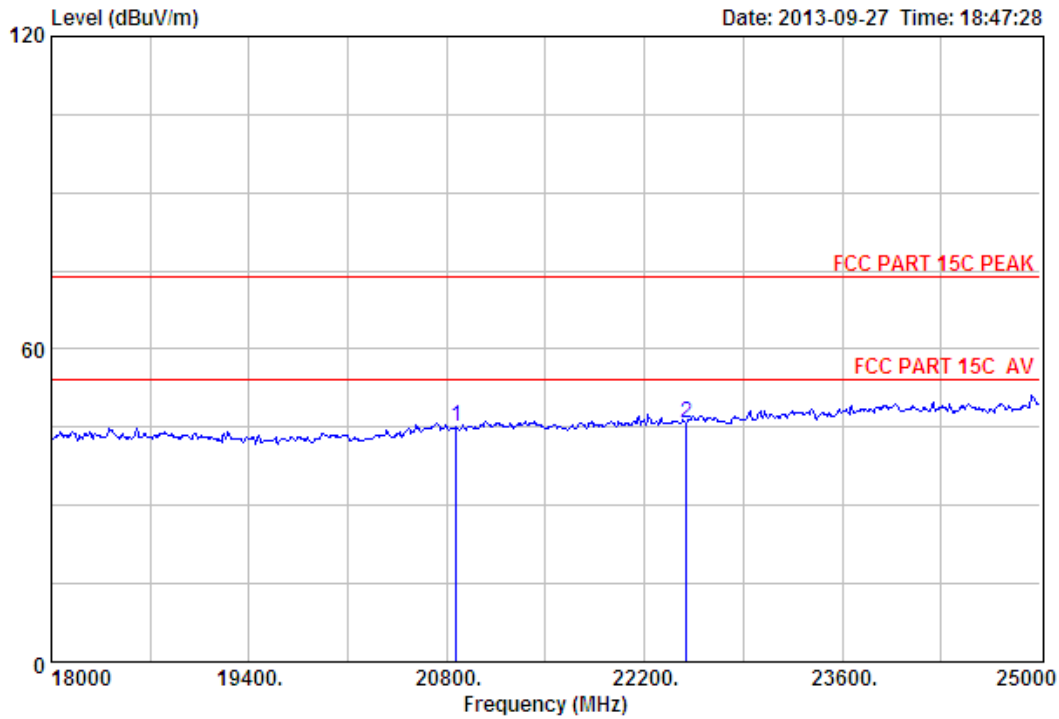

Site no. : 3m Chamber Data no. : 156
 Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

		Ant.	Cable	Amp	Emission				
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	20870.00	46.22	20.07	35.91	14.60	44.98	74.00	29.02	Peak
2	22494.00	45.80	20.85	34.38	13.58	45.85	74.00	28.15	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

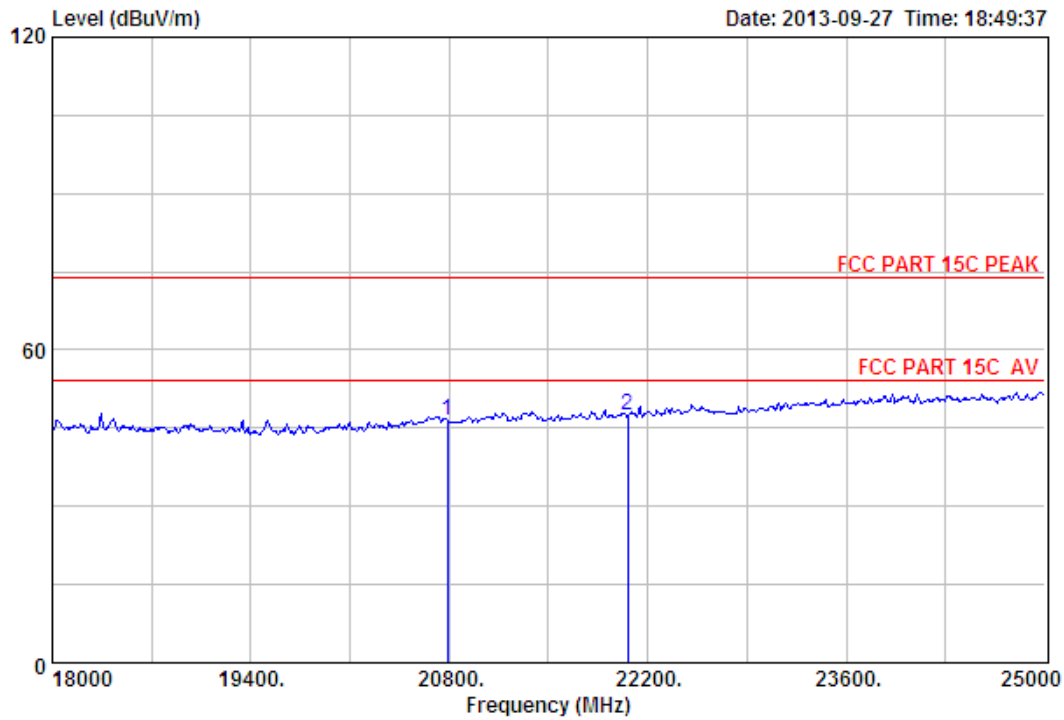

Site no. : 3m Chamber Data no. : 157
 Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2441MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Margin (dB)	Remark
					Level (dBuV/m)	Limits (dBuV/m)		
1 20786.00	46.18	20.04	36.00	16.18	46.40	74.00	27.60	Peak
2 22060.00	45.71	20.60	34.85	15.90	47.36	74.00	26.64	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

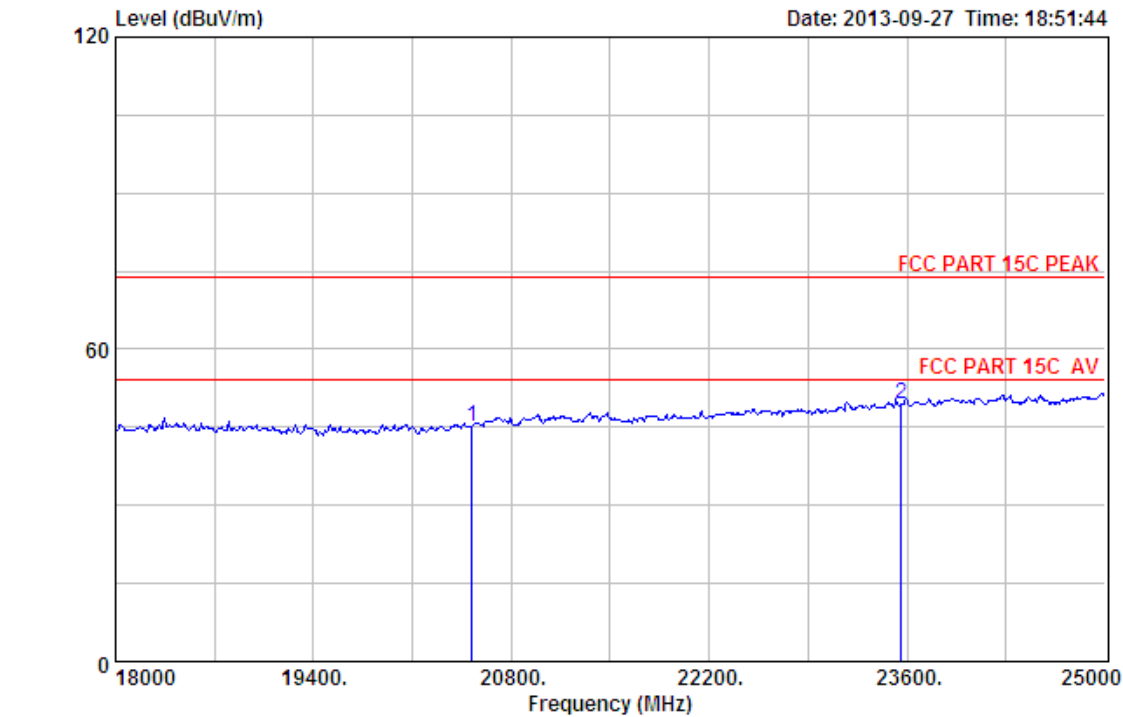

Site no. : 3m Chamber Data no. : 158
Dis. / Ant. : 3m ANT ABVOE 18G Ant. pol. : HORIZONTAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Tony
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : 8-DPSK TX 2480MHz

	Freq. (MHz)	Ant.	Cable	Amp	Emission				Remark
		Factor (dB/m)	Loss (dB)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	
1	20520.00	46.01	19.92	36.23	15.54	45.24	74.00	28.76	Peak
2	23558.00	45.69	21.65	33.27	15.43	49.50	74.00	24.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

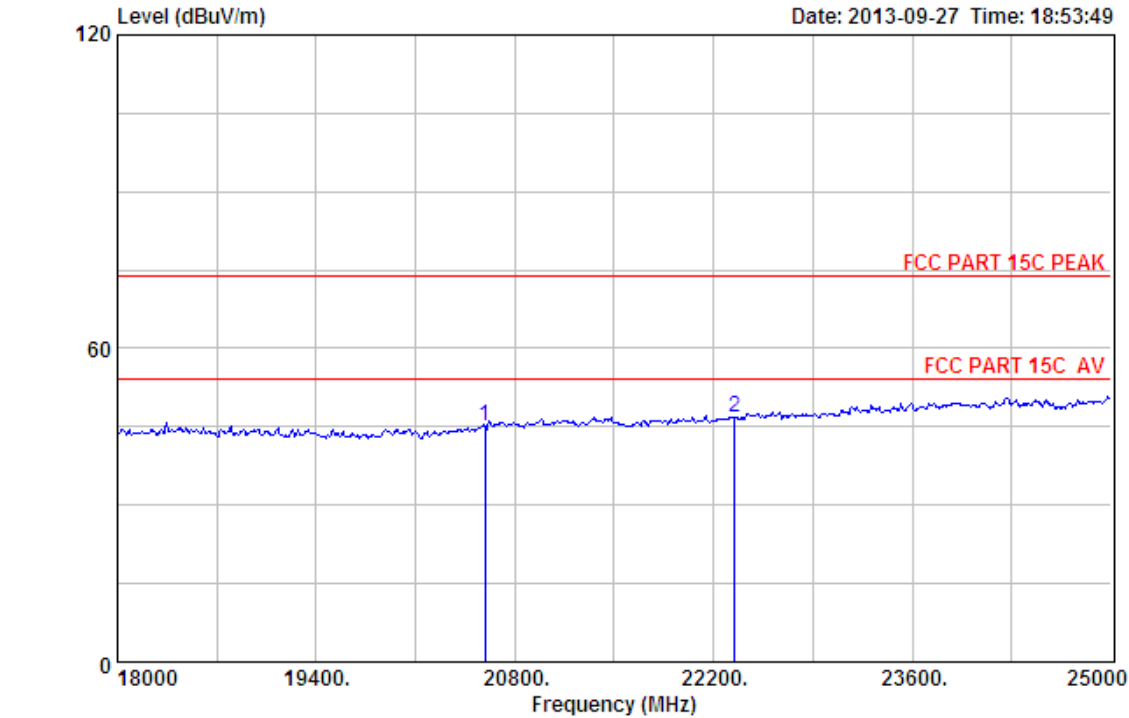

Site no. : 3m Chamber Data no. : 159
Dis. / Ant. : 3m ANT ABOVE 18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Tony
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : 8-DPSK TX 2480MHz

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level (dBuV/m)				
1	20590.00	46.05	19.95	36.16	15.30	45.14	74.00	28.86	Peak
2	22347.00	45.77	20.77	34.53	14.72	46.73	74.00	27.27	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

9. BAND EDGE COMPLIANCE

9.1. Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

9.2. Block Diagram of Test setup

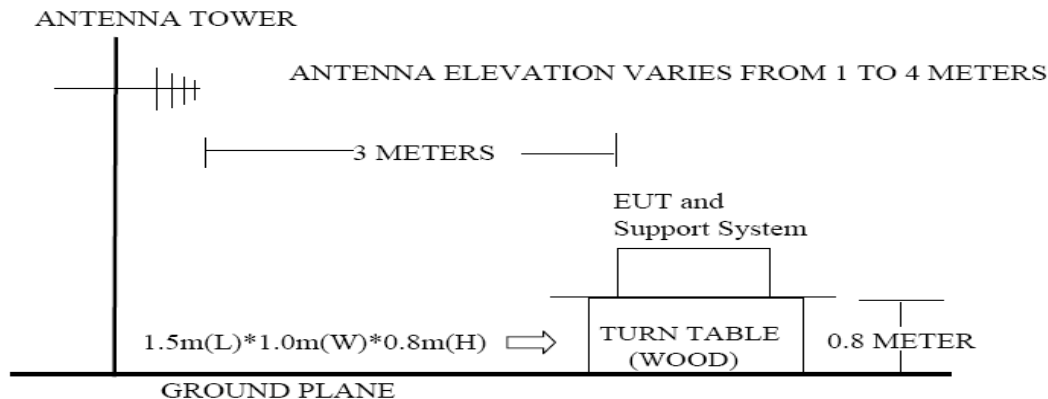

9.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO


9.4. Test Result

EUT: Bluetooth speaker
M/N: NYNE CRUISER
Power: DC 3.7V
Test date: 2013-09-27 Test site: 3m Chamber Tested by: Tony Tang
Test mode: Tx Mode (Hopping On & No Hopping)
Pass

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

- 2、 The frequency 2402MHz 、 2441MHz and 2480MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


9.5. Test Data

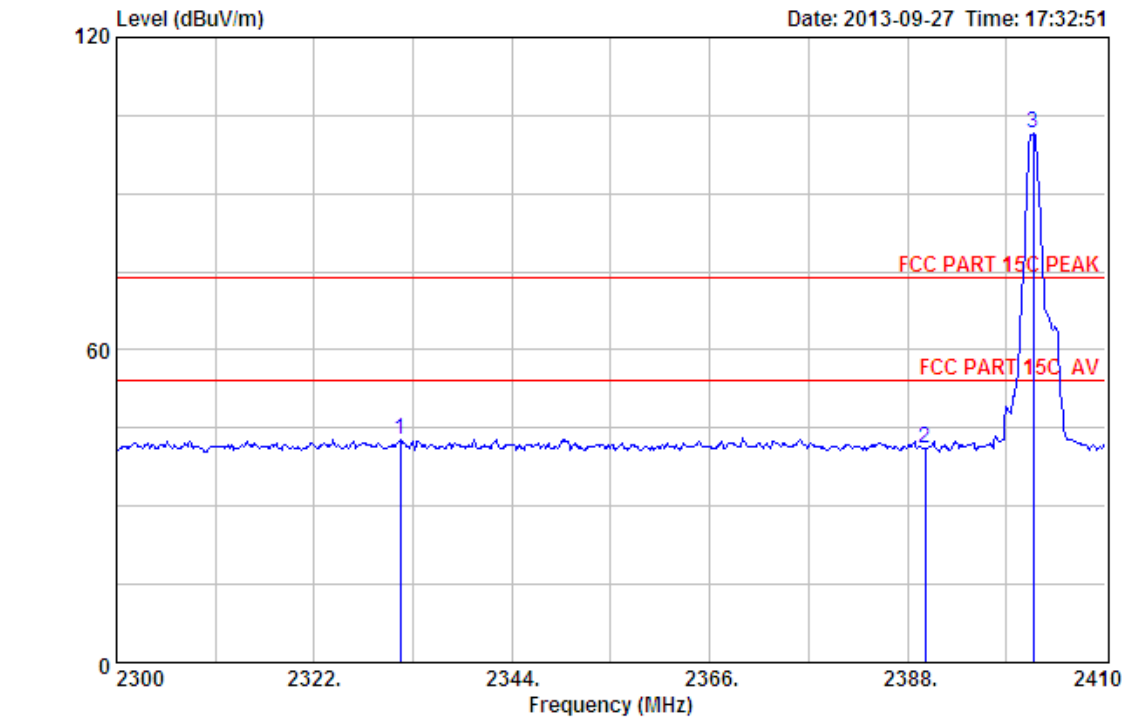

Site no. : 3m Chamber Data no. : 264
Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
Limit : FCC PART 15C PEAK
Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
Engineer : Tony
EUT : Bluetooth speaker
Power : DC 3.7V
M/N : NYNE Cruiser
Test Mode : GFSK TX 2402MHz (No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2331.57	27.73	6.54	34.23	42.79	42.83	74.00	31.17	Peak
2	2390.00	27.64	6.62	34.19	41.05	41.12	74.00	32.88	Peak
3	2401.97	27.61	6.62	34.18	101.43	101.48	74.00	-27.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
2. The emission levels that are 20dB below the official limit are not reported.

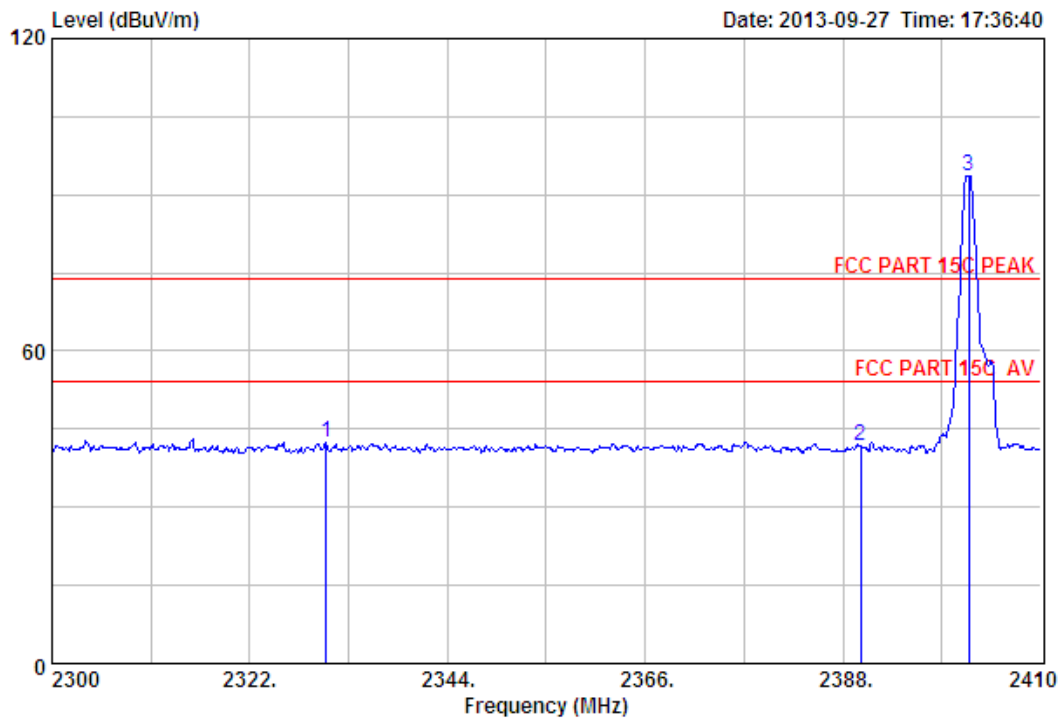

Site no. : 3m Chamber Data no. : 265
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz (No Hopping)

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	27.73	6.54	34.23	42.54	42.58	74.00	31.42	Peak	
2	27.64	6.62	34.19	41.58	41.65	74.00	32.35	Peak	
3	27.61	6.62	34.18	93.68	93.73	74.00	-19.73	Peak	


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

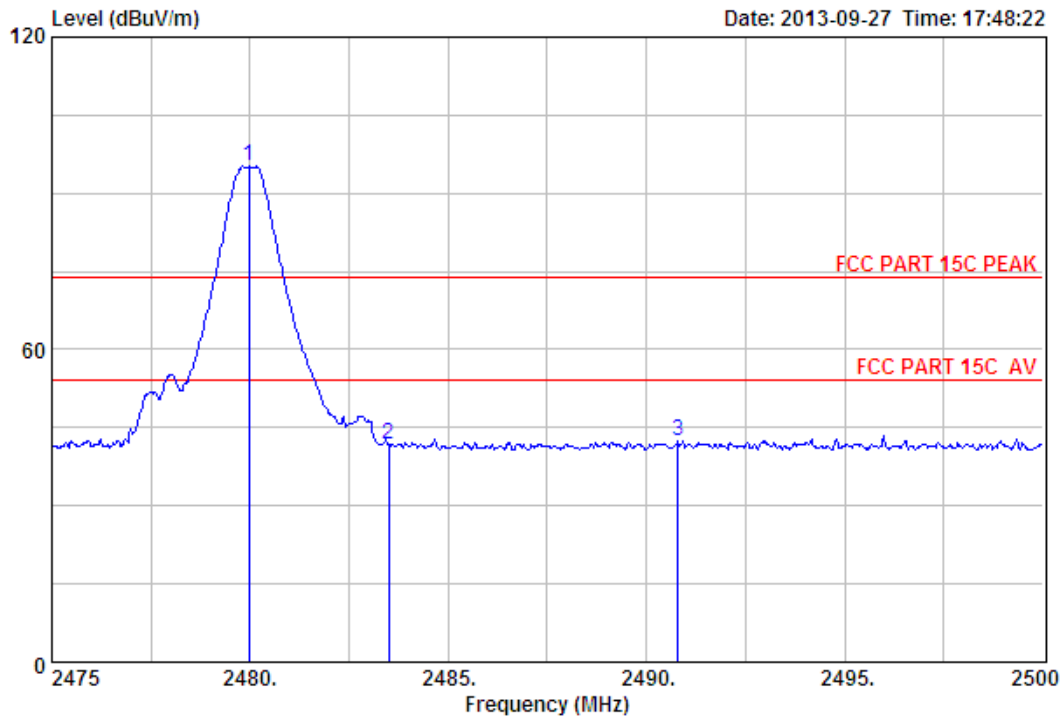

Site no. : 3m Chamber Data no. : 270
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz (No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1 2479.98	27.58	6.71	34.03	94.93	95.19		74.00	-21.19	Peak
2 2483.50	27.58	6.71	34.03	41.44	41.70		74.00	32.30	Peak
3 2490.80	27.58	6.73	34.03	42.19	42.47		74.00	31.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

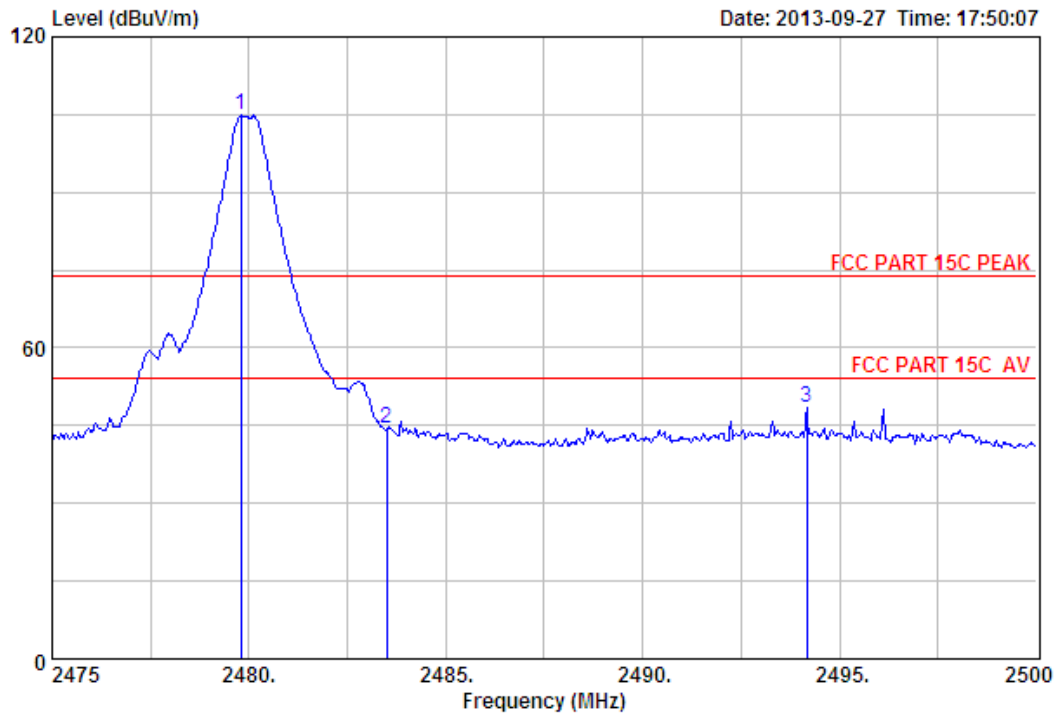

Site no. : 3m Chamber Data no. : 271
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz(No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2479.80	27.58	6.71	34.03	104.63	104.89	74.00	-30.89	Peak
2	2483.50	27.58	6.71	34.03	44.14	44.40	74.00	29.60	Peak
3	2494.18	27.58	6.73	34.03	48.28	48.56	74.00	25.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

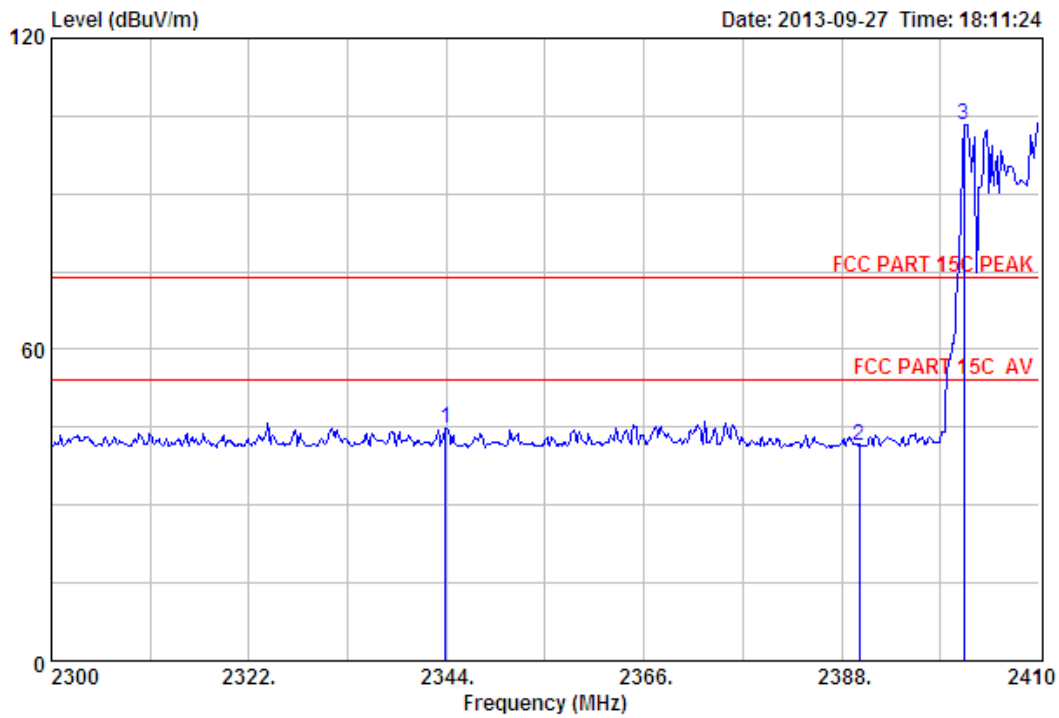

Site no. : 3m Chamber Data no. : 144
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2343.89	27.70	6.56	34.22	44.68	44.72	74.00	29.28	Peak
2	2390.00	27.64	6.62	34.19	41.49	41.56	74.00	32.44	Peak
3	2401.64	27.61	6.62	34.18	103.39	103.44	74.00	-29.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

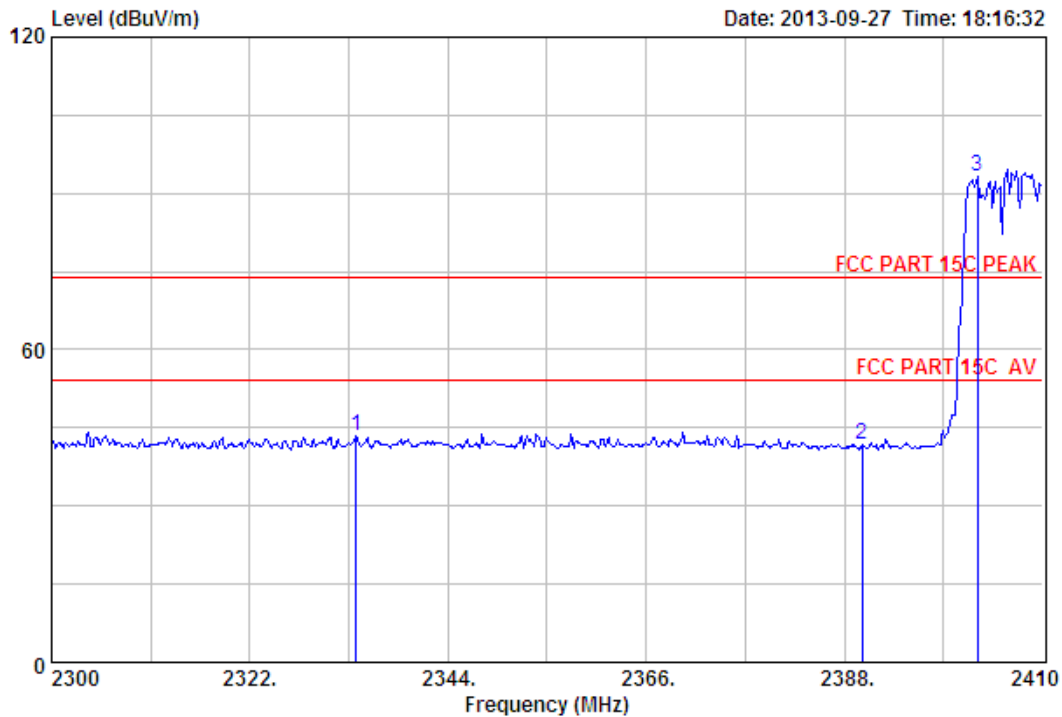

Site no. : 3m Chamber Data no. : 145
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2402MHz(Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1	2333.77	27.73	6.54	34.23	43.53	74.00	30.43	Peak
2	2390.00	27.64	6.62	34.19	41.55	74.00	32.38	Peak
3	2402.74	27.61	6.64	34.18	93.28	74.00	-19.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

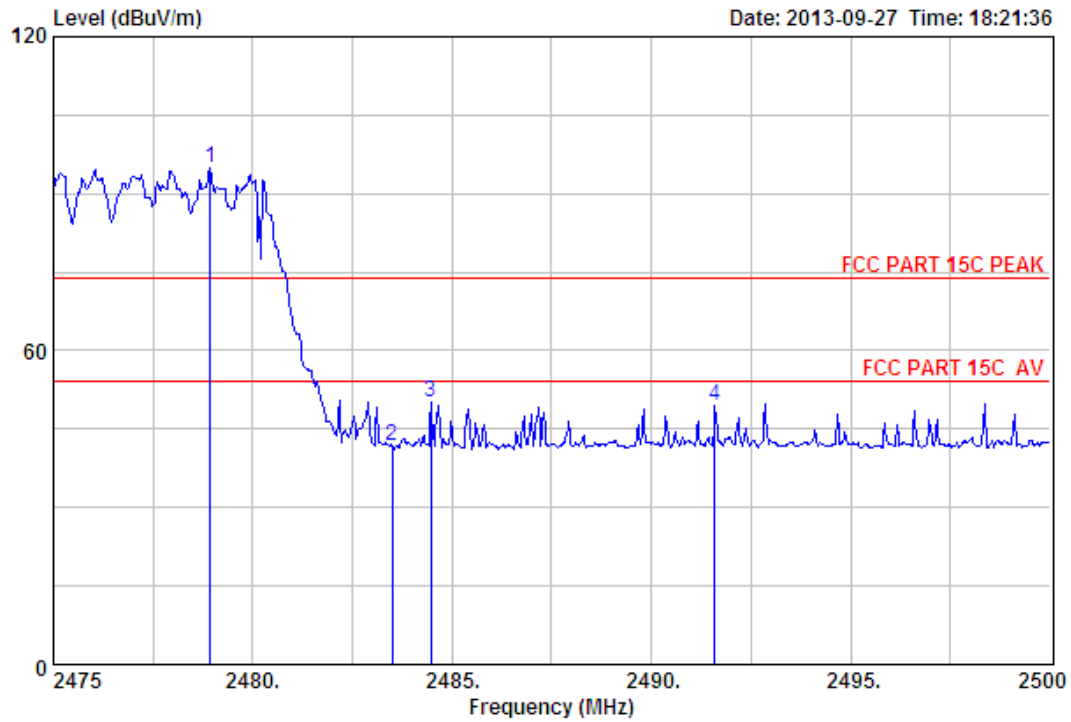

Site no. : 3m Chamber Data no. : 146
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.93	27.58	6.71	34.03	94.75	95.01	74.00	-21.01	Peak
2	2483.50	27.58	6.71	34.03	41.50	41.76	74.00	32.24	Peak
3	2484.48	27.58	6.71	34.03	49.90	50.16	74.00	23.84	Peak
4	2491.60	27.58	6.73	34.03	49.12	49.40	74.00	24.60	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

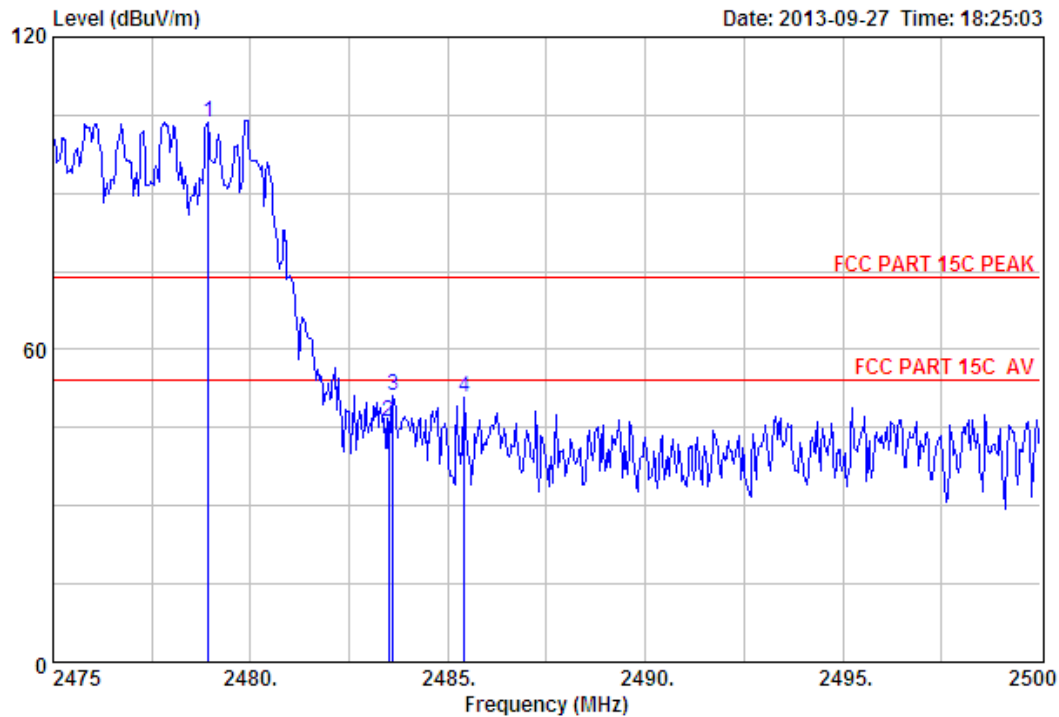

Site no. : 3m Chamber Data no. : 147
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : GFSK TX 2480MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBUV)	(dBUV/m)	(dBUV/m)	(dB)	
1	2478.93	27.58	6.71	34.03	103.38	103.64	74.00	-29.64	Peak
2	2483.50	27.58	6.71	34.03	46.01	46.27	74.00	27.73	Peak
3	2483.60	27.58	6.71	34.03	50.91	51.17	74.00	22.83	Peak
4	2485.43	27.58	6.71	34.03	50.54	50.80	74.00	23.20	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

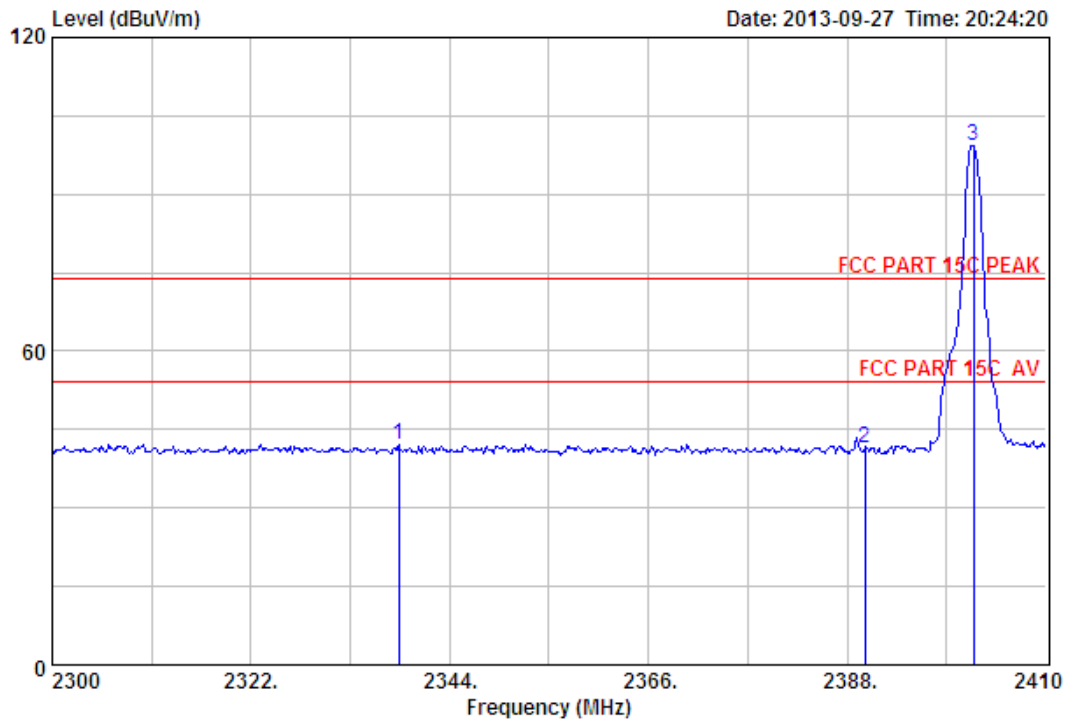

Site no. : 3m Chamber Data no. : 180
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level				
1	2338.39	27.73	6.56	34.23	42.00	42.06	74.00	31.94	Peak
2	2390.00	27.64	6.62	34.19	41.24	41.31	74.00	32.69	Peak
3	2401.97	27.61	6.62	34.18	99.30	99.35	74.00	-25.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

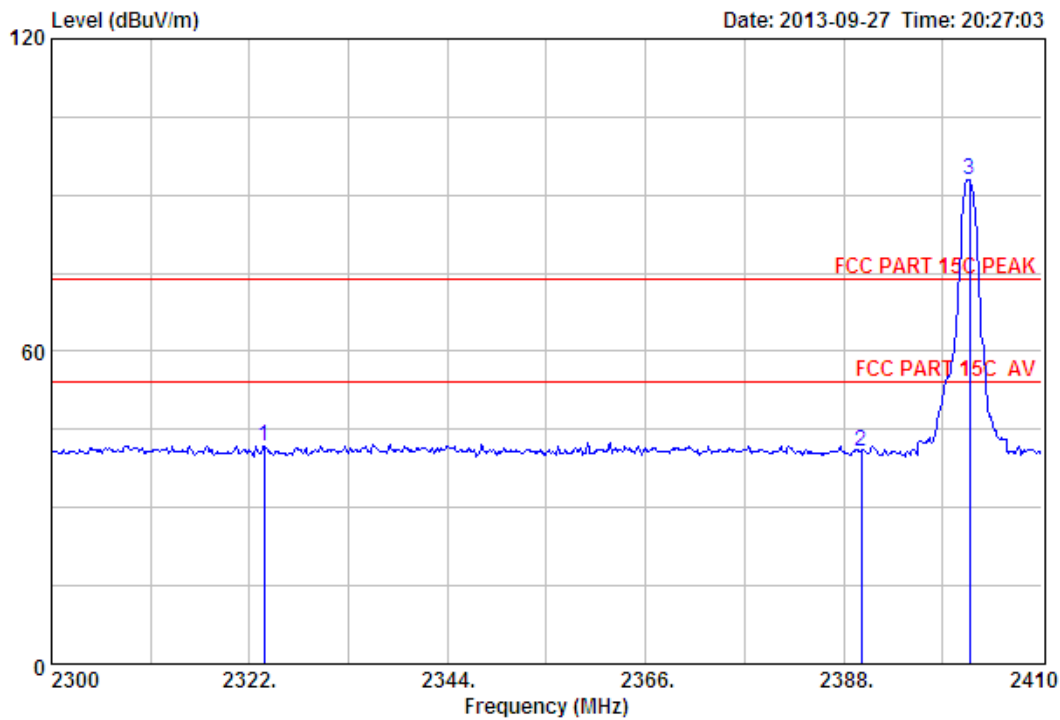

Site no. : 3m Chamber Data no. : 181
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz (No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2323.65	27.73	6.54	34.23	41.70	41.74	74.00	32.26	Peak
2	2390.00	27.64	6.62	34.19	40.88	40.95	74.00	33.05	Peak
3	2401.97	27.61	6.62	34.18	93.02	93.07	74.00	-19.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

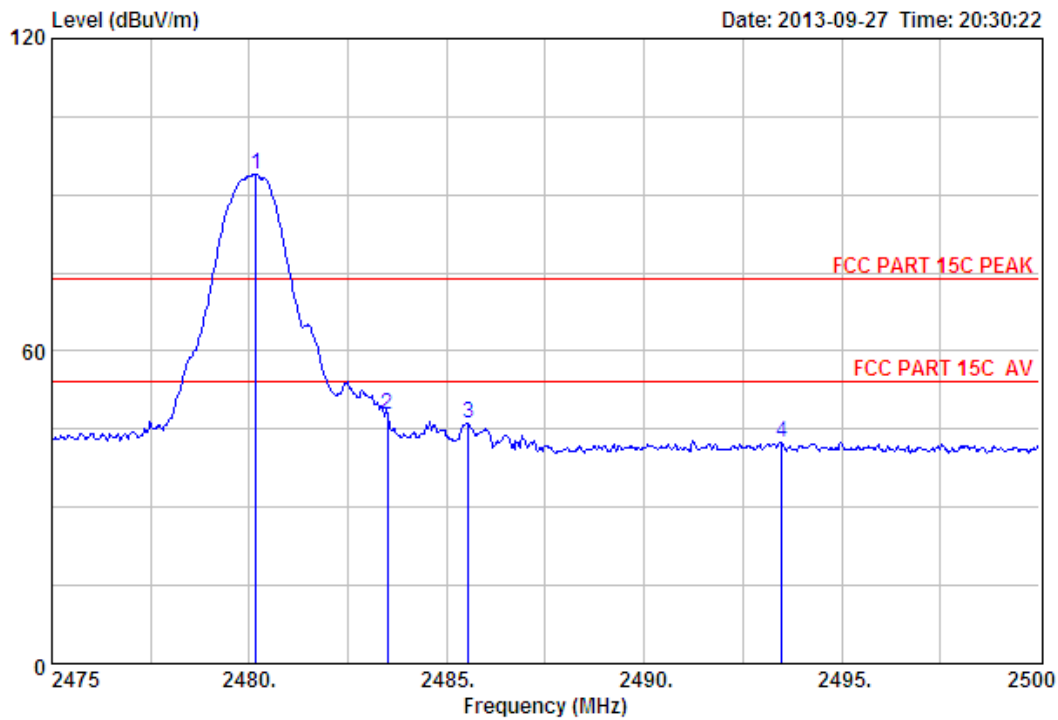

Site no. : 3m Chamber Data no. : 182
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2480.18	27.58	6.71	34.03	93.81	94.07	74.00	-20.07	Peak
2	2483.50	27.58	6.71	34.03	47.59	47.85	74.00	26.15	Peak
3	2485.55	27.58	6.71	34.03	45.98	46.24	74.00	27.76	Peak
4	2493.48	27.58	6.73	34.03	42.30	42.58	74.00	31.42	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

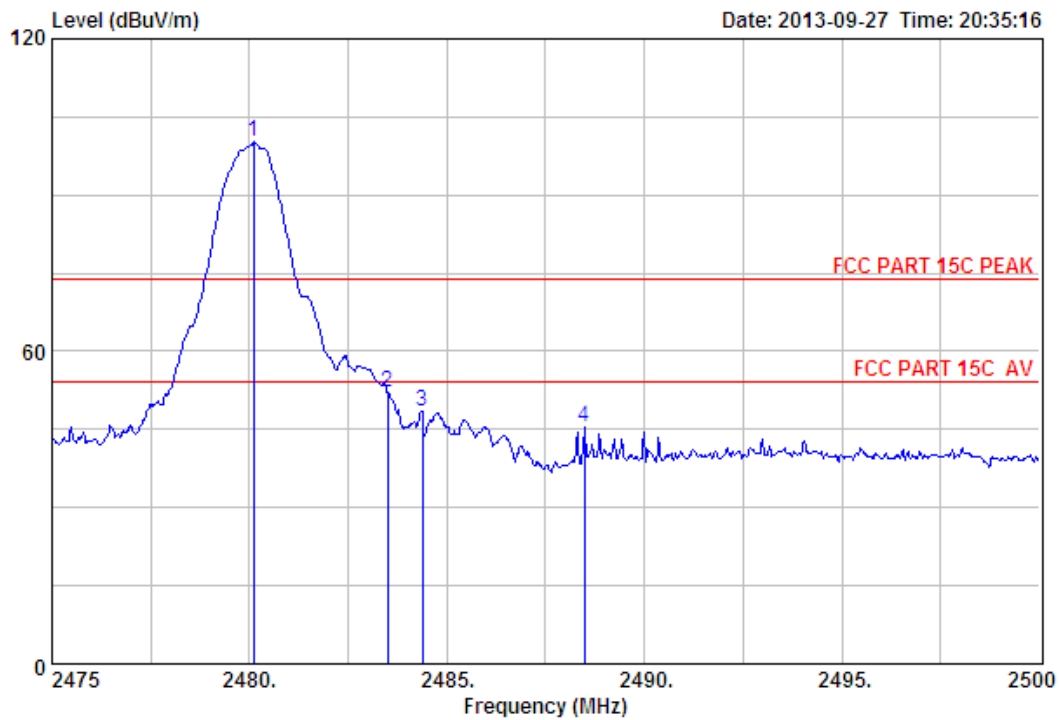

Site no. : 3m Chamber Data no. : 183
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz (No Hopping)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
					Level (dBuV/m)				
1	2480.10	27.58	6.71	34.03	99.88	100.14	74.00	-26.14	Peak
2	2483.50	27.58	6.71	34.03	51.85	52.11	74.00	21.89	Peak
3	2484.38	27.58	6.71	34.03	48.29	48.55	74.00	25.45	Peak
4	2488.48	27.58	6.73	34.03	45.01	45.29	74.00	28.71	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

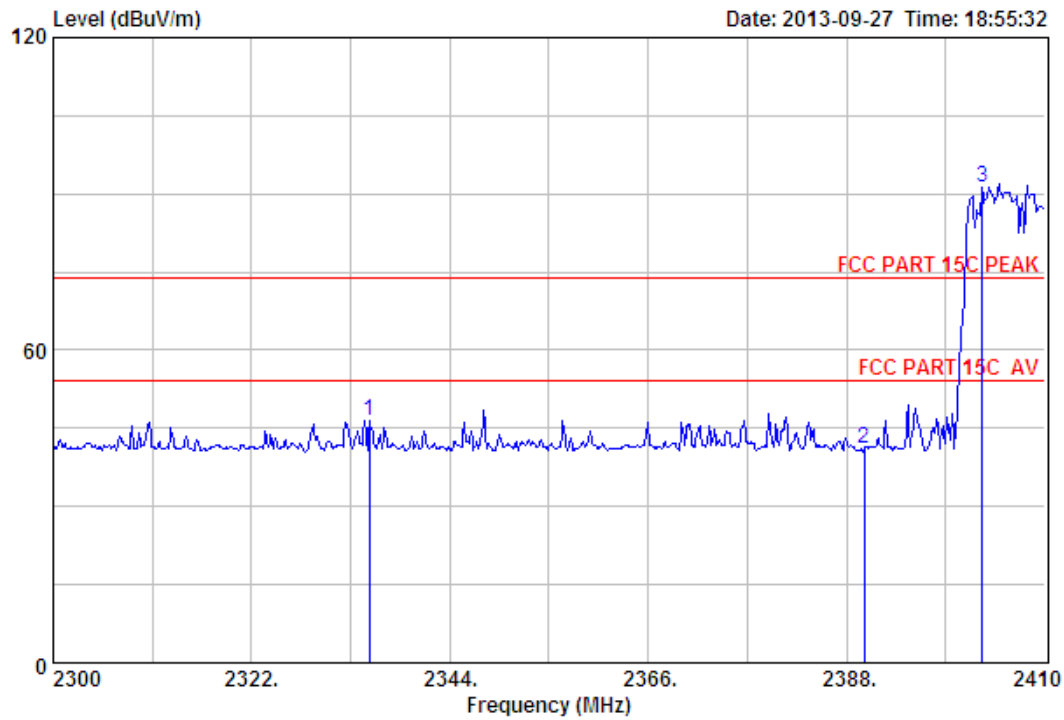

Site no. : 3m Chamber Data no. : 160
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Emission		Limits (dBuV/m)	Margin (dB)	Remark
				Reading (dBuV)	Level (dBuV/m)			
1 2335.09	27.73	6.56	34.23	46.48	46.54	74.00	27.46	Peak
2 2390.00	27.64	6.62	34.19	40.98	41.05	74.00	32.95	Peak
3 2403.07	27.61	6.64	34.18	91.02	91.09	74.00	-17.09	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

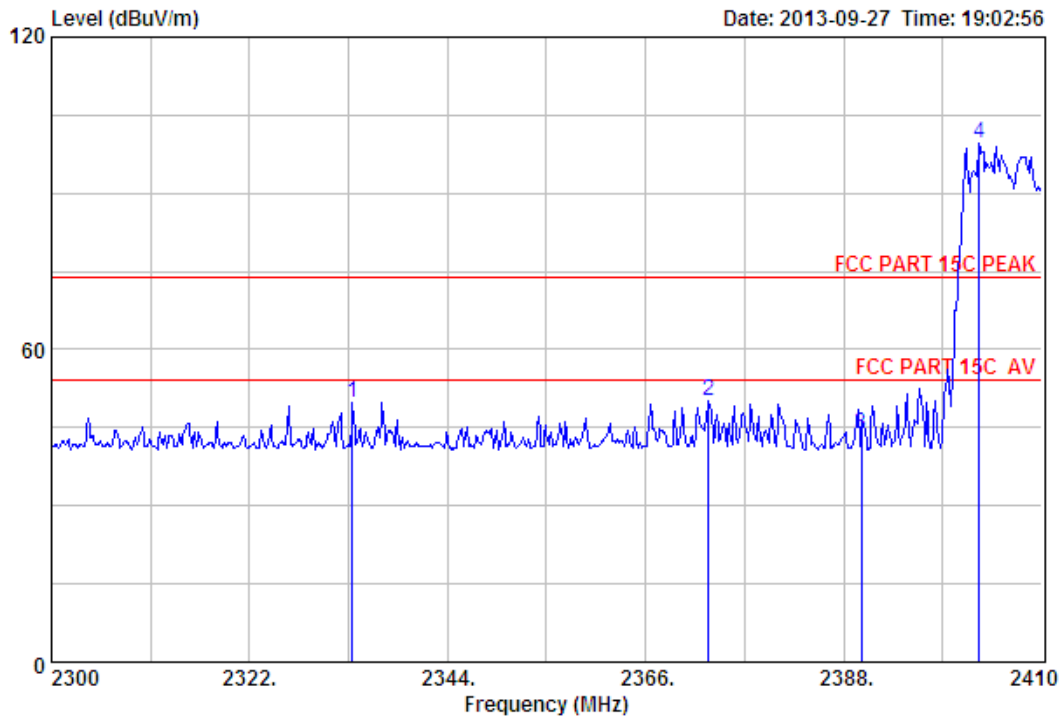

Site no. : 3m Chamber Data no. : 161
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2402MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2333.44	27.73	6.54	34.23	49.63	49.67	74.00	24.33	Peak
2	2373.04	27.67	6.60	34.20	50.14	50.21	74.00	23.79	Peak
3	2390.00	27.64	6.62	34.19	43.84	43.91	74.00	30.09	Peak
4	2403.07	27.61	6.64	34.18	99.66	99.73	74.00	-25.73	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

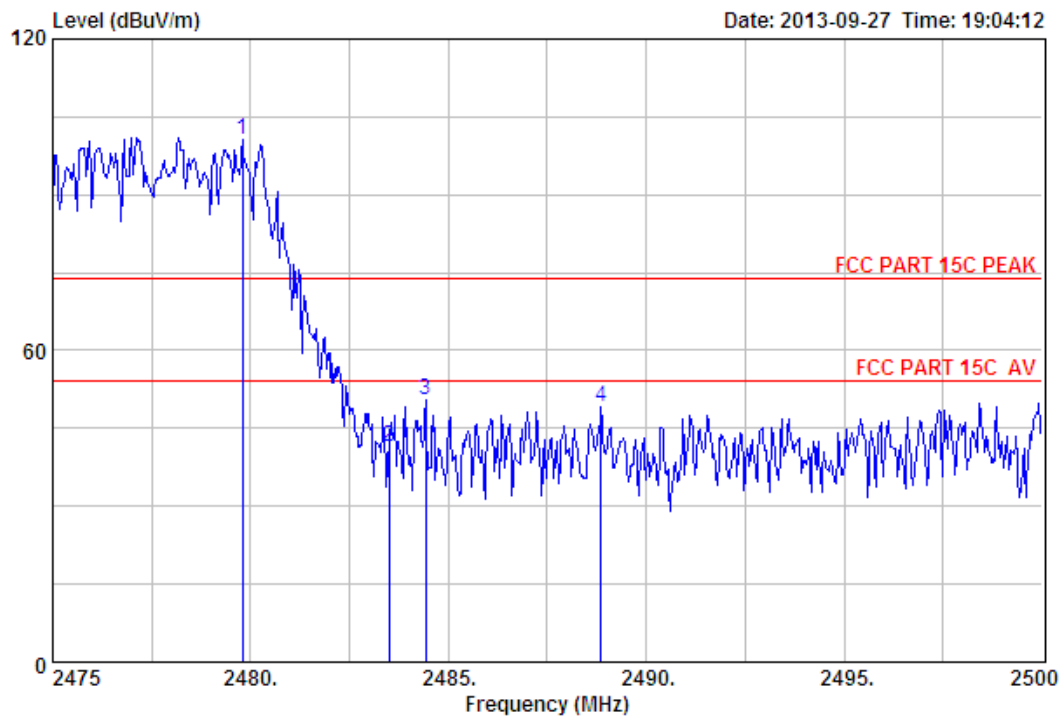

Site no. : 3m Chamber Data no. : 162
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz(Hopping On)

	Ant.	Cable	Amp	Emission					
Freq.	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark	
(MHz)	(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)		
1	2479.80	27.58	6.71	34.03	100.29	100.55	74.00	-26.55	Peak
2	2483.50	27.58	6.71	34.03	41.30	41.56	74.00	32.44	Peak
3	2484.43	27.58	6.71	34.03	50.10	50.36	74.00	23.64	Peak
4	2488.85	27.58	6.73	34.03	49.01	49.29	74.00	24.71	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

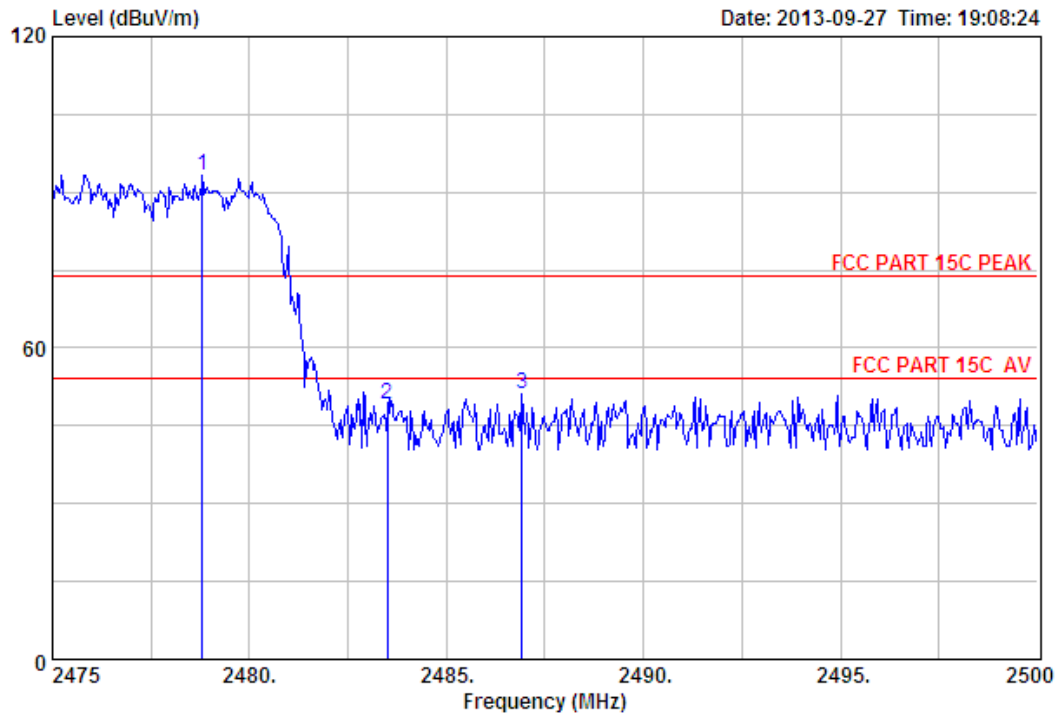

Site no. : 3m Chamber Data no. : 163
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:25.6';Humi:56%;Press:101.52kPa
 Engineer : Tony
 EUT : Bluetooth speaker
 Power : DC 3.7V
 M/N : NYNE Cruiser
 Test Mode : 8-DPSK TX 2480MHz (Hopping On)

	Freq.	Ant.	Cable	Amp	Emission				
	(MHz)	Factor	Loss	Factor	Reading	Level	Limits	Margin	Remark
		(dB/m)	(dB)	(dB)	(dBuV)	(dBuV/m)	(dBuV/m)	(dB)	
1	2478.80	27.58	6.71	34.03	92.86	93.12	74.00	-19.12	Peak
2	2483.50	27.58	6.71	34.03	48.82	49.08	74.00	24.92	Peak
3	2486.93	27.58	6.71	34.03	50.87	51.13	74.00	22.87	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

10. ANTENNA REQUIREMENTS

10.1. Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

10.2. Result


The antennas used for this product are integral Patch Antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 0dBi.

11. TEST SETUP PHOTO

Radiated Test (30-1000 MHz)

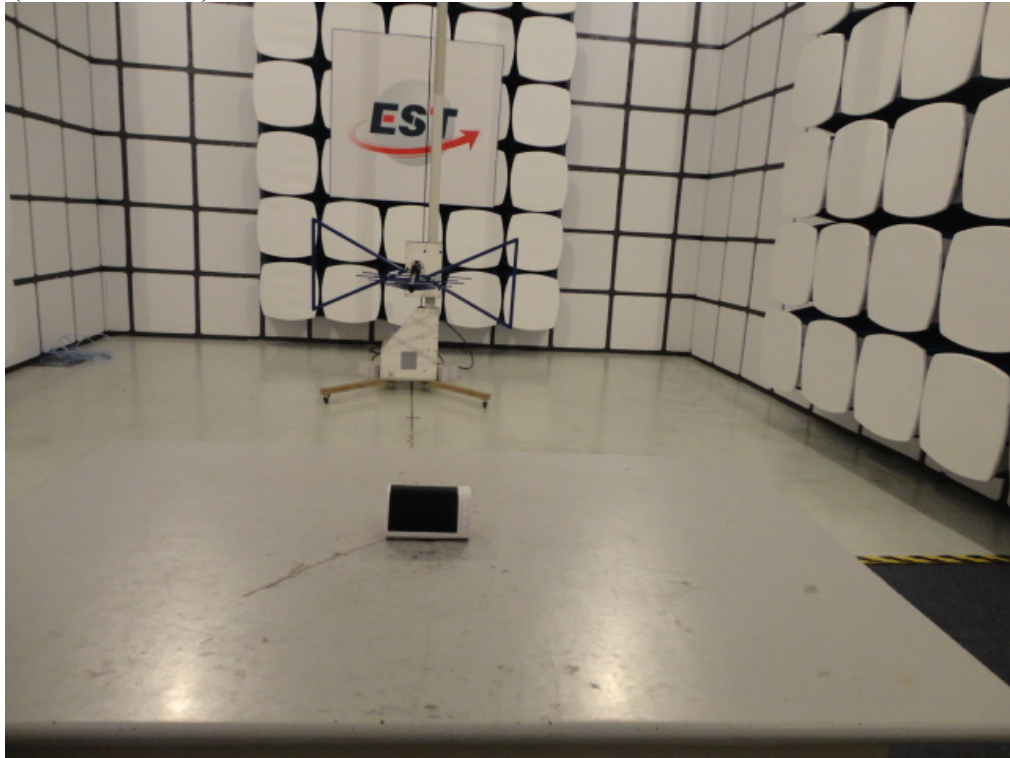


Radiated Test (1000-25000 MHz)

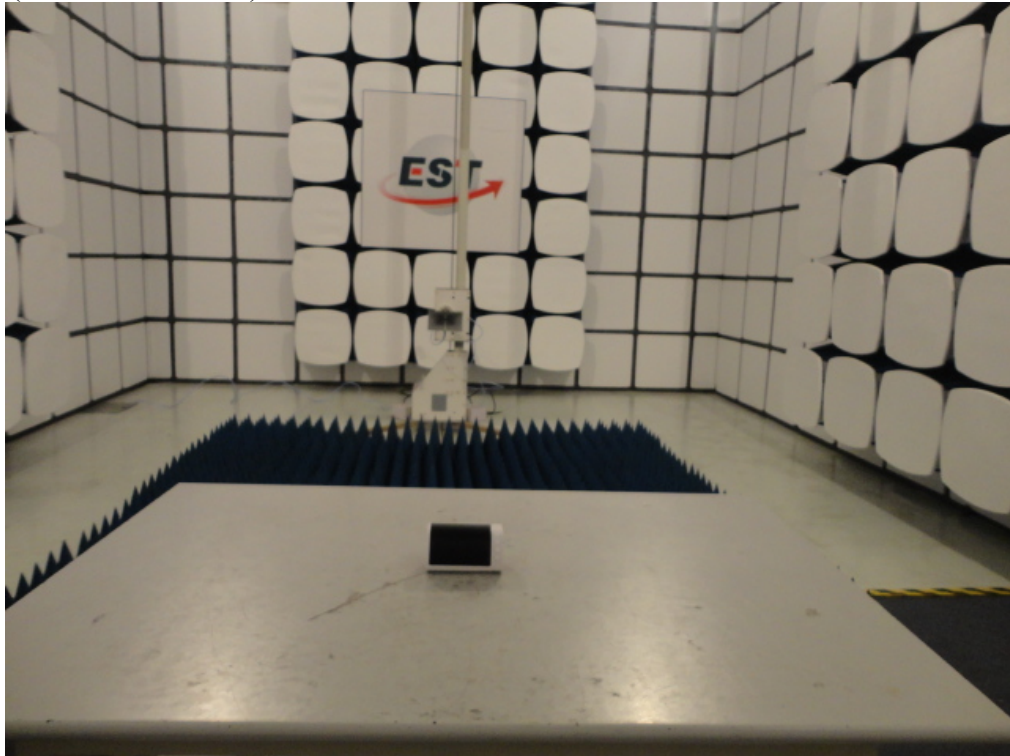

12. PHOTOS OF EUT

External Photos
M/N: NYNE Cruiser

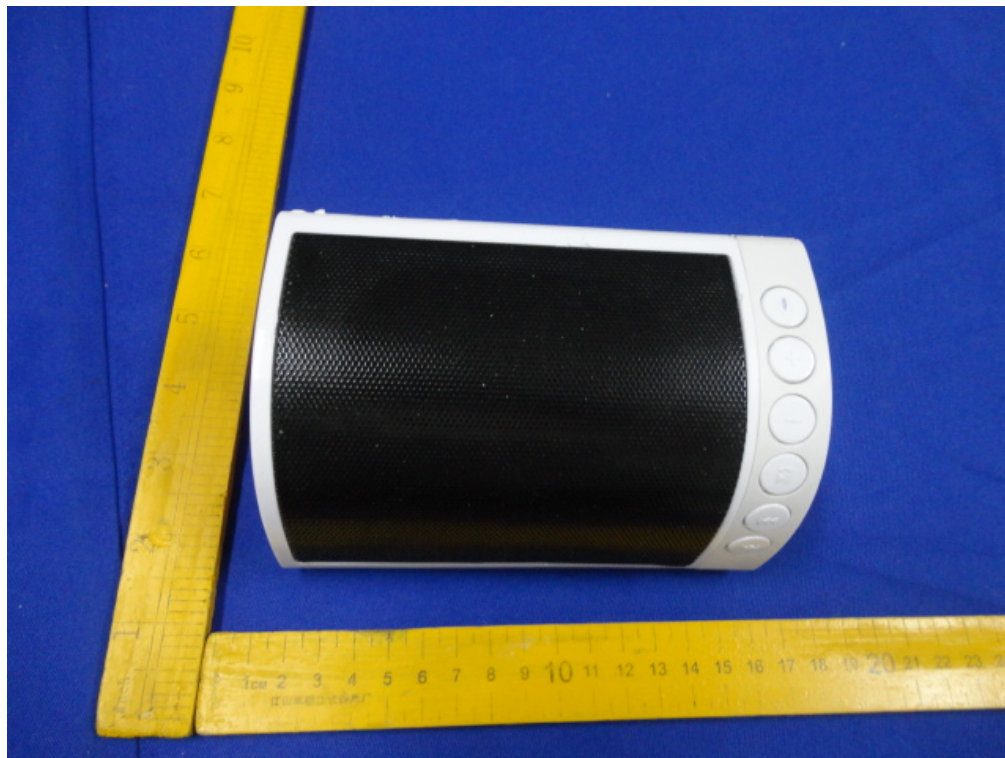



External Photos
M/N: NYNE Cruiser





External Photos
M/N: NYNE Cruiser




Internal Photos
M/N: NYNE Cruiser

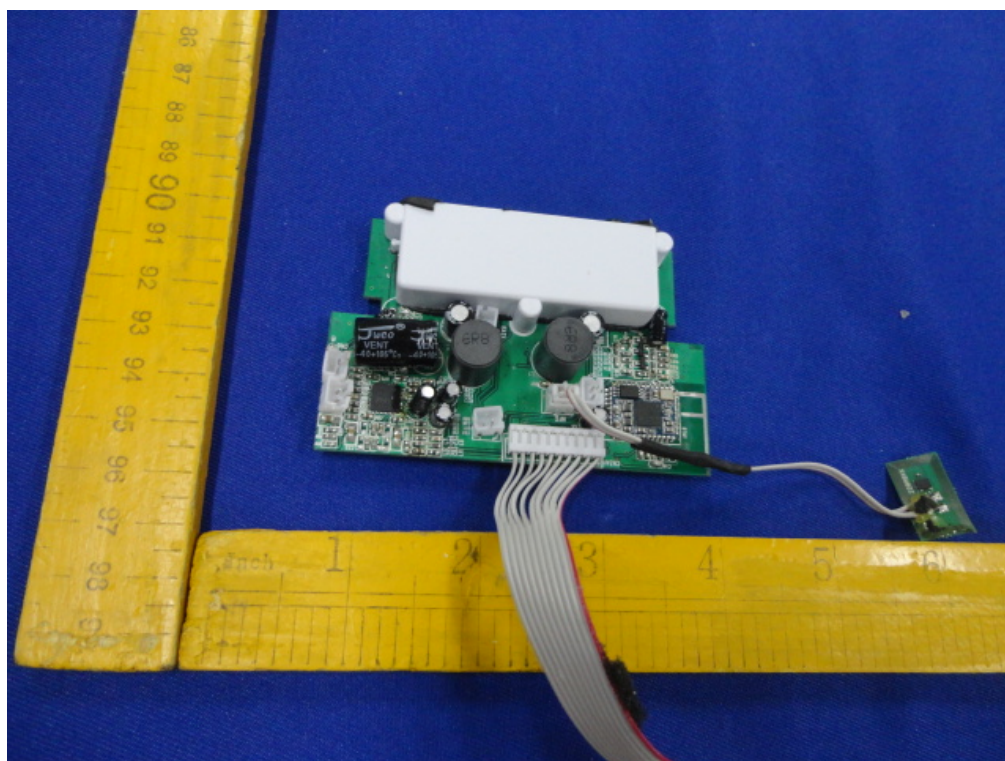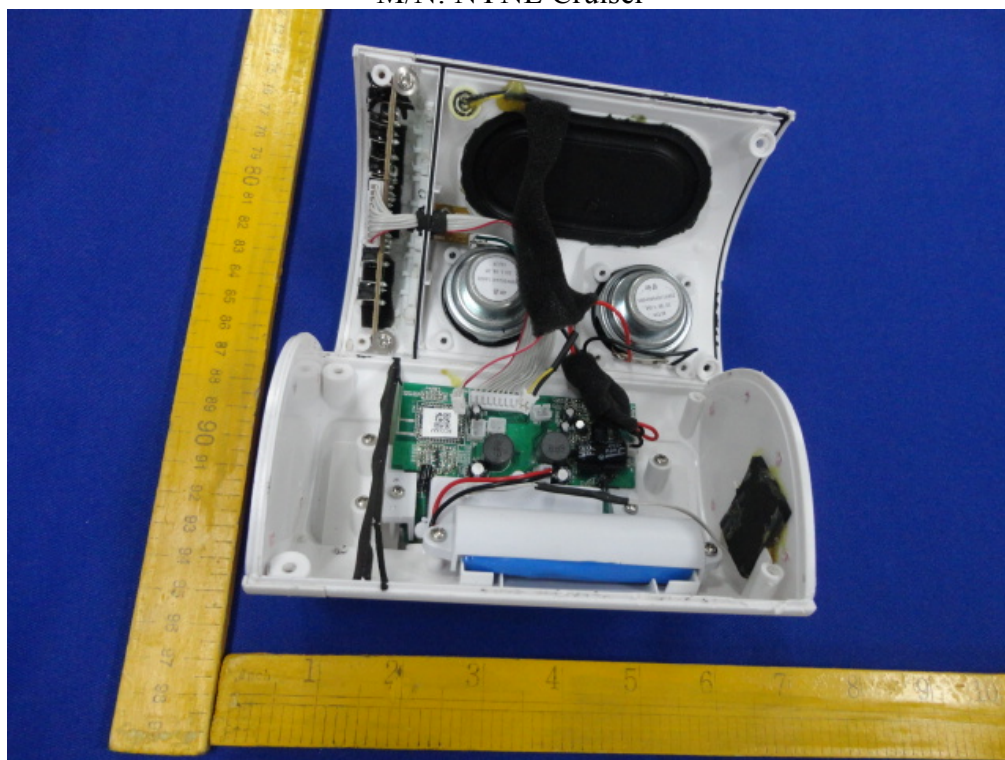


Internal Photos
M/N: NYNE Cruiser

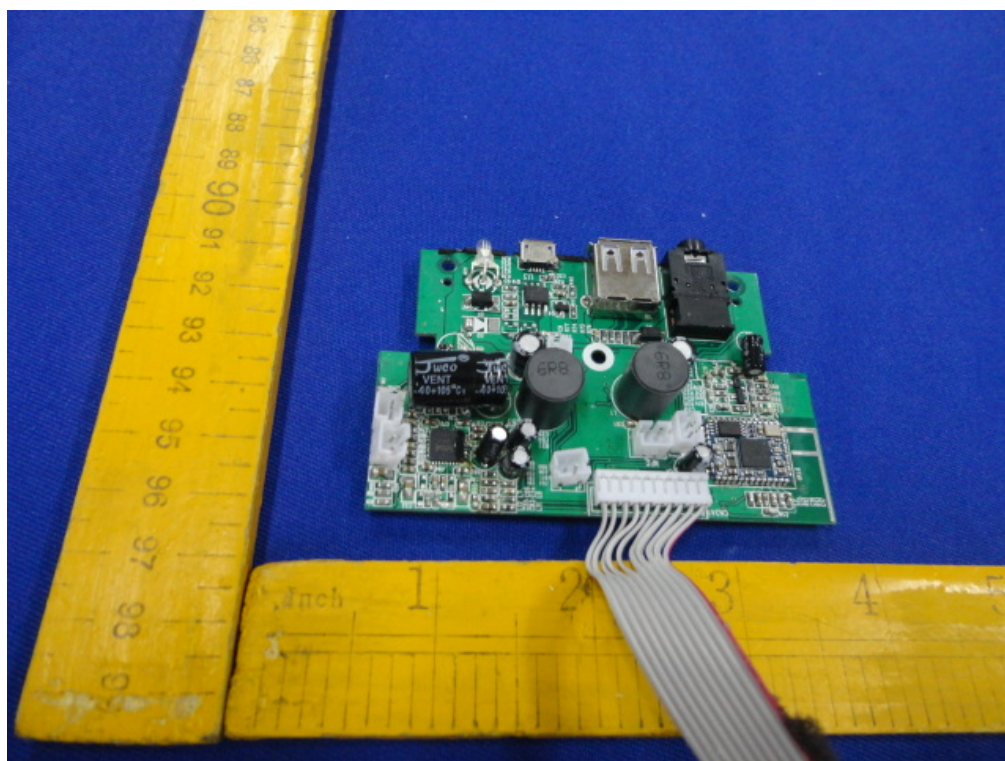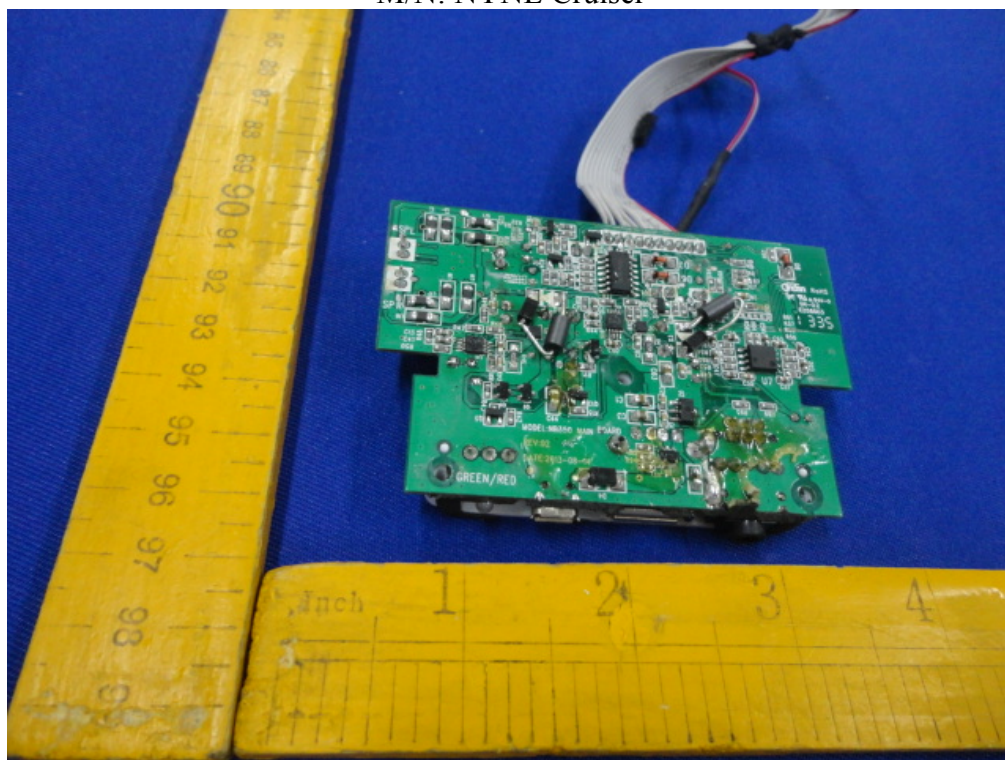



Internal Photos
M/N: NYNE Cruiser

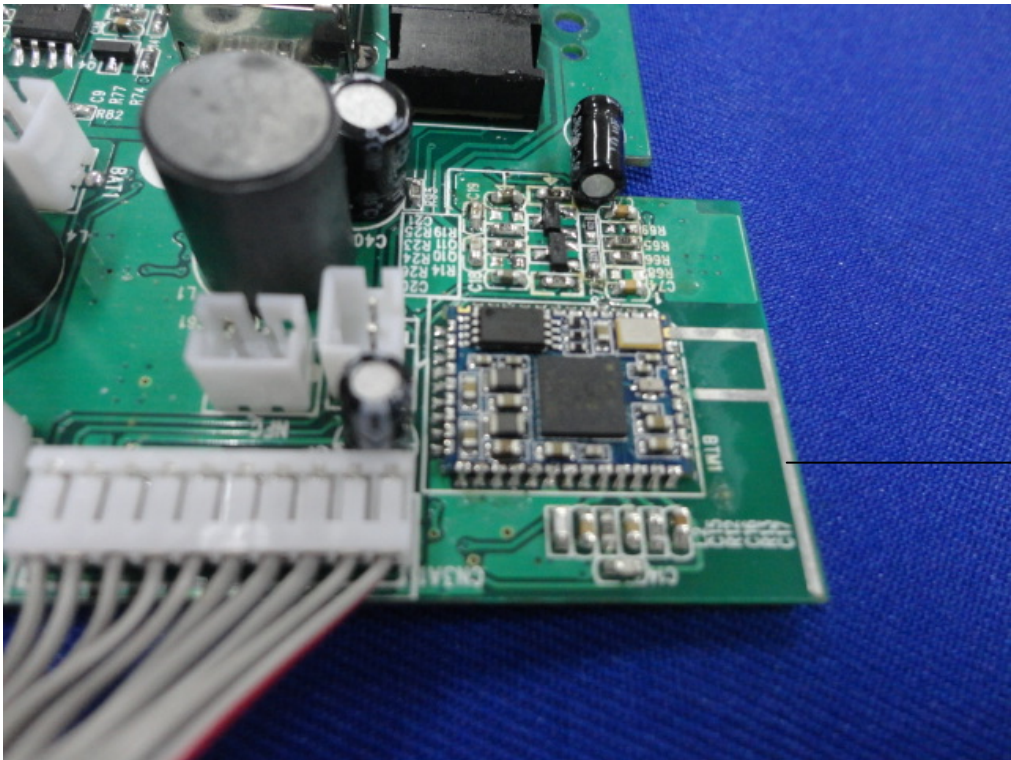



Bluetooth
Antenna

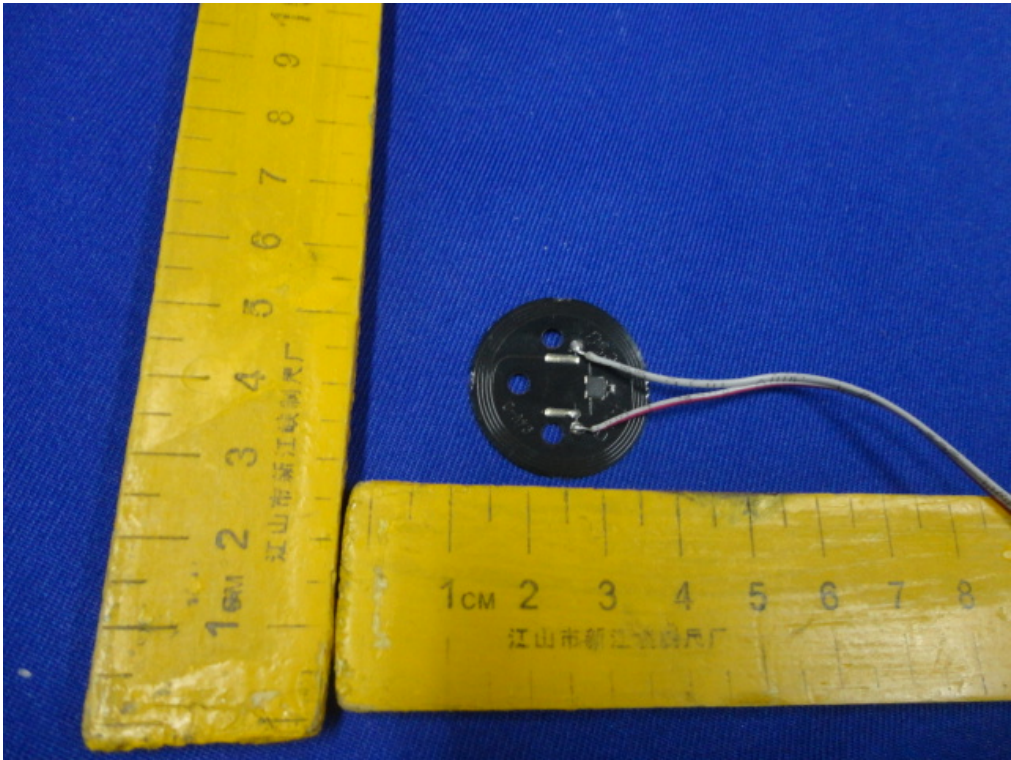


Internal Photos
M/N: NYNE Cruiser

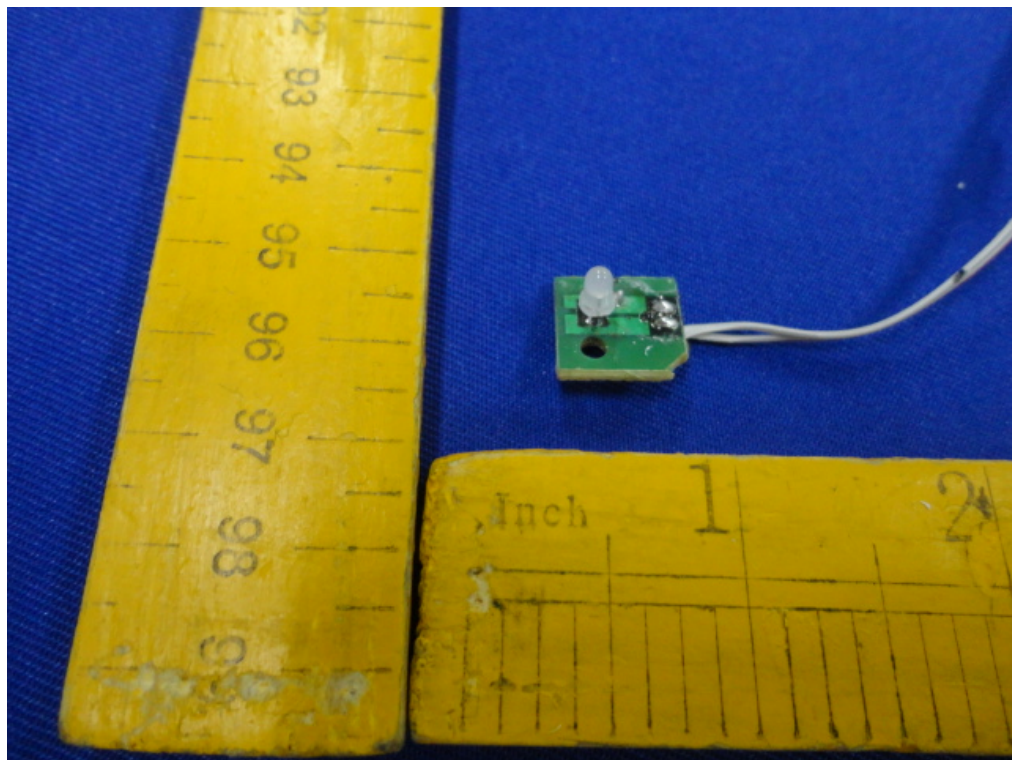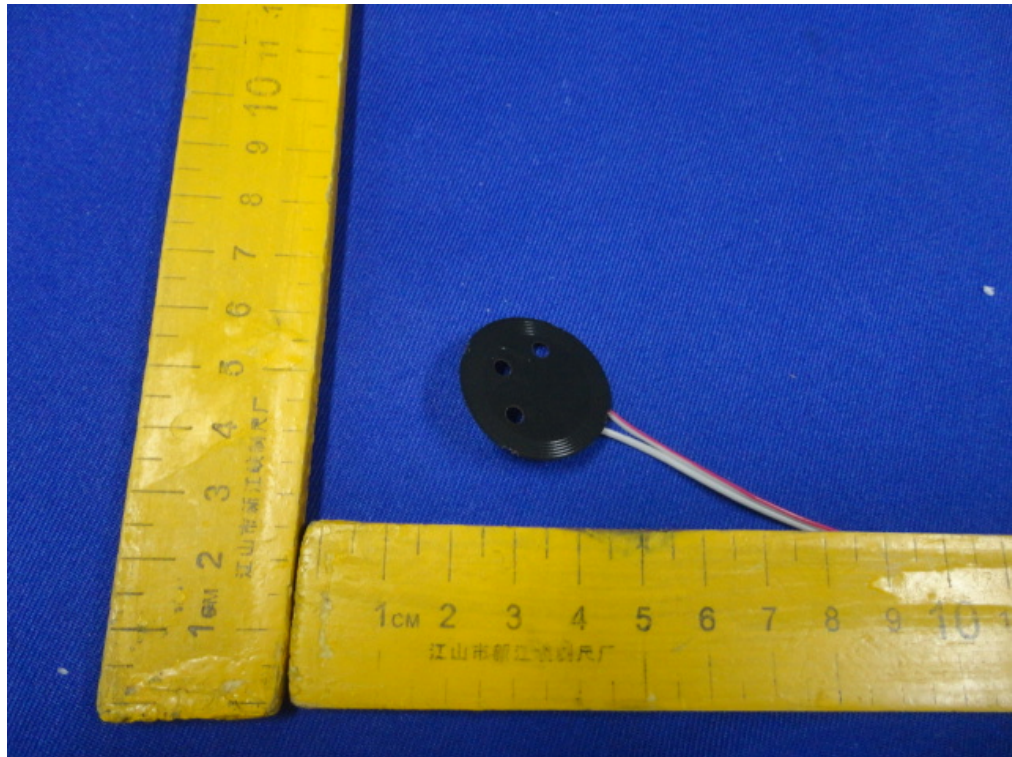

Internal Photos
M/N: NYNE Cruiser

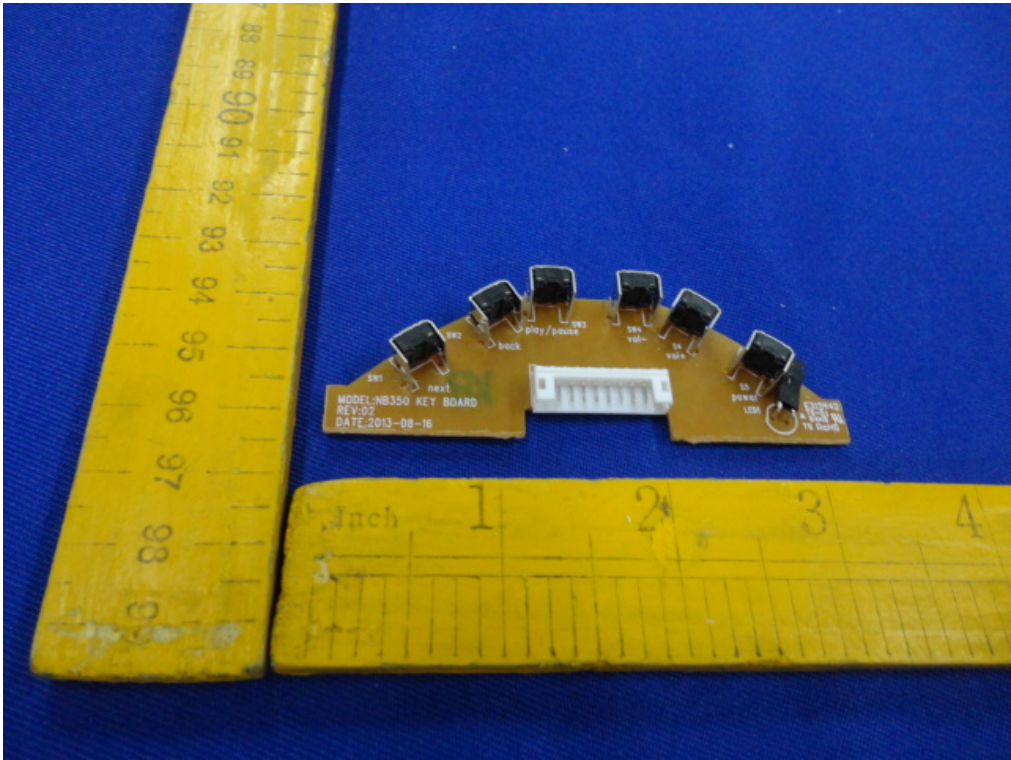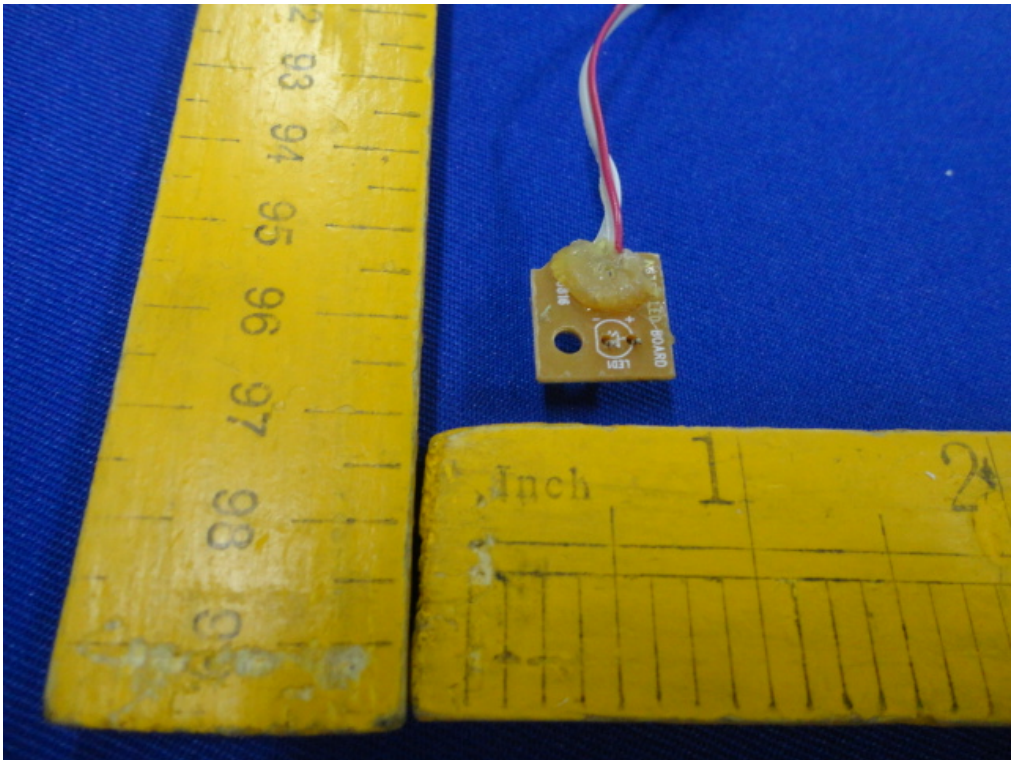

Internal Photos
M/N: NYNE Cruiser

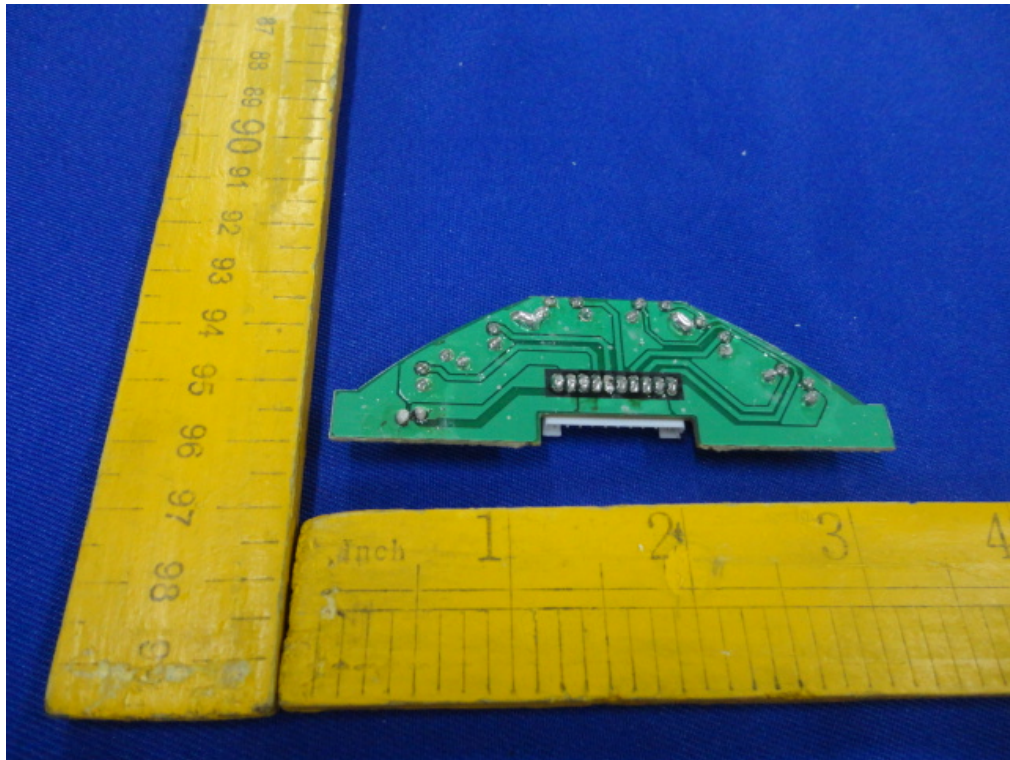

Internal Photos
M/N: NYNE Cruiser

