



## STC Test Report

Date : 2009-06-29

Page 1 of 15

No. : HM163855

**Applicant (JPP001):**

JP Products Co., Ltd.  
Rm 1303 Grandmark, No 8-10 Granville Road Tsimshatsui,  
Kowloon, Hong Kong

**Manufacturer:**

DALANG MEILI ELECT FTY  
Dongguan, China

**Description of Samples:**

Product: Walkie Talkie  
Brand Name: N/A  
Model Number: 098-54009  
FCC ID: SVDJP09-854009

**Date Samples Received:** 2009-06-19

**Date Tested:** 2009-06-25

**Investigation Requested:**

Perform ElectroMagnetic Interference measurement in  
accordance with FCC 47CFR [Codes of Federal Regulations]  
Part 15: 2008 and ANSI C63.4:2003 for FCC Certification.

**Conclusions:**

The submitted product COMPLIED with the requirements of  
Federal Communications Commission [FCC] Rules and  
Regulations Part 15. The tests were performed in accordance  
with the standards described above and on Section 2.2 in this  
Test Report.

**Remarks:**

----

Dr. LEE Kam Chuen,  
Authorized Signatory  
ElectroMagnetic Compatibility Department  
For and on behalf of  
The Hong Kong Standards and Testing Centre Ltd.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date : 2009-06-29

Page 2 of 15

No. : HM163855

### **CONTENT:**

Cover	Page 1 of 15
Content	Page 2 of 15
<b><u>1.0 General Details</u></b>	
1.1 Test Laboratory	Page 3 of 15
1.2 Applicant Details	Page 3 of 15
Applicant	
Manufacturer	
1.3 Equipment Under Test [EUT]	Page 4 of 15
Description of EUT operation	
1.4 Date of Order	Page 4 of 15
1.5 Submitted Samples	Page 4 of 15
1.6 Test Duration	Page 4 of 15
1.7 Country of Origin	Page 4 of 15
<b><u>2.0 Technical Details</u></b>	
2.1 Investigations Requested	Page 5 of 15
2.2 Test Standards and Results Summary	Page 5 of 15
<b><u>3.0 Test Results</u></b>	
3.1 Emission	Page 6-9 of 15
3.2 Bandwidth Measurement	Page 10-12 of 15
<b><u>Appendix A</u></b>	
List of Measurement Equipment	Page 13 of 15
<b><u>Appendix B</u></b>	
Photographs	Page 14-15 of 15

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date : 2009-06-29

Page 3 of 15

No. : HM163855

### **1.0 General Details**

#### **1.1 Test Laboratory**

The Hong Kong Standards and Testing Centre Ltd.  
EMC Laboratory  
10 Dai Wang Street, Taipo Industrial Estate  
New Territories, Hong Kong

Telephone: 852 2666 1888  
Fax: 852 2664 4353

#### **1.2 Applicant Details**

##### **Applicant**

JP Products Co., Ltd.  
Rm 1303 Grandmark, No 8-10 Granville Road  
Tsimshatsui, Kowloon, Hong Kong

##### **Manufacturer**

MEILI ELECTRONIC FACTORY DA LANG  
Dongguan, China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2009-06-29

Page 4 of 15

No. : HM163855

### **1.3 Equipment Under Test [EUT]**

#### **Description of Sample**

Product:	Walkie Talkie
Manufacturer:	DALANG MEILI ELECT FTY
Brand Name:	N/A
Model Number:	098-54009
Input Voltage:	6Vd.c. ("LR44" size battery x 4)

#### **1.3.1 Description of EUT Operation**

The Equipment Under Test (EUT) is a JP Products Co., Ltd., Walkie Talkie. The transmitter is a button transmitter. The EUT continues to transmit while button is being pressed. It is voice transmission, Modulation by microphone, and type is amplitude modulation.

### **1.4 Date of Order**

2009-06-19

### **1.5 Submitted Sample(s):**

3 Samples

### **1.6 Test Duration**

2009-06-25

### **1.7 Country of Origin**

China

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date : 2009-06-29

Page 5 of 15

No. : HM163855

### **2.0 Technical Details**

#### **2.1 Investigations Requested**

Perform ElectroMagnetic Interference measurement in accordance with FCC 47CFR [Codes of Federal Regulations] Part 15:2008 and ANSI C63.4:2003 for FCC Certification.

#### **2.2 Test Standards and Results Summary Tables**

<b>EMISSION Results Summary</b>				
Test Condition	Test Requirement	Test Method	Class / Severity	
			Pass	Failed
Field Strength of Fundamental Emissions & Spurious Emissions	FCC 47CFR 15.235	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/> <input type="checkbox"/>
Radiated Emissions, 30MHz to 1GHz	FCC 47CFR 15.209	ANSI C63.4:2003	N/A	<input checked="" type="checkbox"/> <input type="checkbox"/>

Note: N/A - Not Applicable

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2009-06-29

Page 6 of 15

No. : HM163855

### **3.0 Test Results**

#### **3.1 Emission**

##### **3.1.1 Radiated Emissions (30 – 1000MHz)**


Test Requirement: FCC 47CFR 15.209  
Test Method: ANSI C63.4:2003  
Test Date: 2009-06-25  
Mode of Operation: Tx mode

#### **Test Method:**

The sample was placed 0.8m above the ground plane of Semi-Anechoic Chamber\*. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

\*: Semi-Anechoic Chamber located on the G/F of The Hong Kong Standards and Testing Centre Ltd. with a metal ground plane filed with the FCC pursuant to section 2.948 of the FCC rules, with Registration Number: 607756.

#### **Test Setup:**

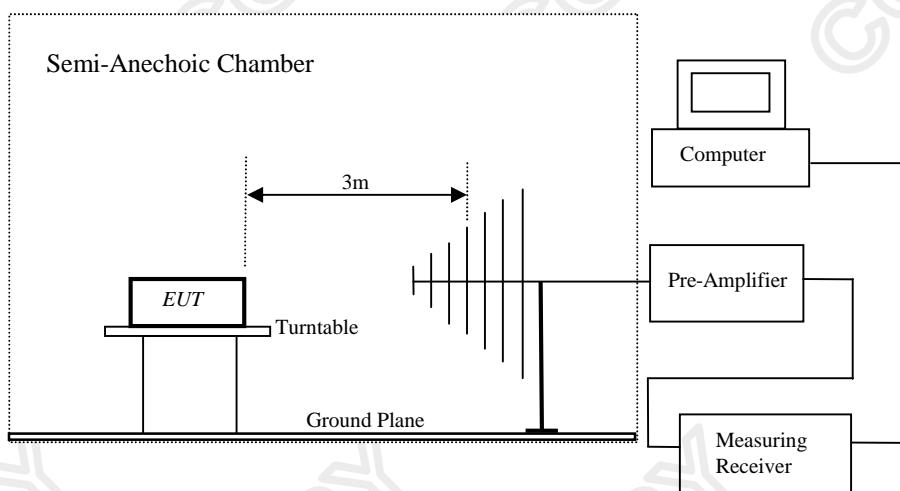

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2009-06-29

Page 7 of 15

No. : HM163855

### Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.235]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [ $\mu$ V/m]	Field Strength of Fundamental Emission [Average] [ $\mu$ V/m]
49.82-49.90	100,000	10,000

Results of Tx Mode: PASS

Field Strength of Fundamental Emissions Peak Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
49.84	36.3	8.5	44.8	173.8	100,000	Vertical

Field Strength of Fundamental Emissions Average Value						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
49.84	35.4	8.5	43.9	156.7	10,000	Vertical

#### Remarks:

According to FCC 47CFR15.35, the limit on the radio frequency emissions as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For effective averaging, the bandwidth of the video filter must be greater than the resolution bandwidth. The higher the ratio of resolution bandwidth to video bandwidth, the greater the averaging will be recorded. Below setting for HP8572A EMI Receiver.

Resolution Bandwidth =100kHz  
Video Bandwidth =300kHz

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz  
Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2009-06-29

Page 8 of 15

No. : HM163855

### **Limits for Radiated Emissions [FCC 47 CFR 15.209]:**

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### **Results of Tx Mode: PASS**

Radiated Emissions Quasi-Peak						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
99.68	25.0	9.0	34.0	50.1	150	Vertical
149.52	30.7	9.4	40.1	101.2	150	Vertical
199.36	< 1.0	11.5	< 12.5	< 4.2	150	Vertical
249.20	< 1.0	15.9	< 16.9	< 7.0	200	Vertical
299.04	< 1.0	16.9	< 17.9	< 7.9	200	Vertical
348.88	< 1.0	17.2	< 18.2	< 8.1	200	Vertical
398.72	< 1.0	18.8	< 19.8	< 9.8	200	Vertical
448.56	< 1.0	19.7	< 20.7	< 10.8	200	Vertical
498.40	< 1.0	20.6	< 21.6	< 12.0	200	Vertical

#### Remarks:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz  
Correction Factor includes Antenna Factor and Cable Attenuation.

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

#### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## STC Test Report

Date : 2009-06-29

Page 9 of 15

No. : HM163855

### **Limits for Radiated Emissions [FCC 47 CFR 15.209]:**

Frequency Range [MHz]	Quasi-Peak Limits [ $\mu$ V/m]
30-88	100
88-216	150
216-960	200
Above 960	500

The emission limits shown in the above table are based on measurement employing a CISPR quasi-peak detector and above 1000MHz are based on measurements employing an average detector.

### **Results of Rx Mode: PASS**

<b>Radiated Emissions</b> <b>Quasi-Peak</b>						
Frequency MHz	Measured Level @3m dB $\mu$ V	Correction Factor dB/m	Field Strength dB $\mu$ V/m	Field Strength $\mu$ V/m	Limit @3m $\mu$ V/m	E-Field Polarity
Emissions detected are more than 20dB below the FCC limits.						

#### Remark:

No additional spurious emissions found between lowest internal used/generated frequency and 30 MHz

Calculated measurement uncertainty : 30MHz to 1GHz 5.1dB

#### **The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)



## **STC Test Report**

Date : 2009-06-29

Page 10 of 15

No. : HM163855

### **3.2 20dB Bandwidth of Fundamental Emission**

Test Requirement:	FCC 47 CFR 15.235
Test Method:	ANSI C63.4:2003 (Section 13.1.7)
Test Date:	2009-06-25
Mode of Operation:	On mode

#### **Test Method:**

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.

#### **Test Setup:**

As Test Setup of clause 3.1.1 in this test report.

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## STC Test Report

Date : 2009-06-29


Page 11 of 15

No. : HM163855

### Limits for 20dB Bandwidth of Fundamental Emission:

Frequency Range [MHz]	20dB Bandwidth [KHz]	FCC Limits [MHz]
49.842	19.23	within 49.82-49.90

### 20dB Bandwidth of Fundamental Emission

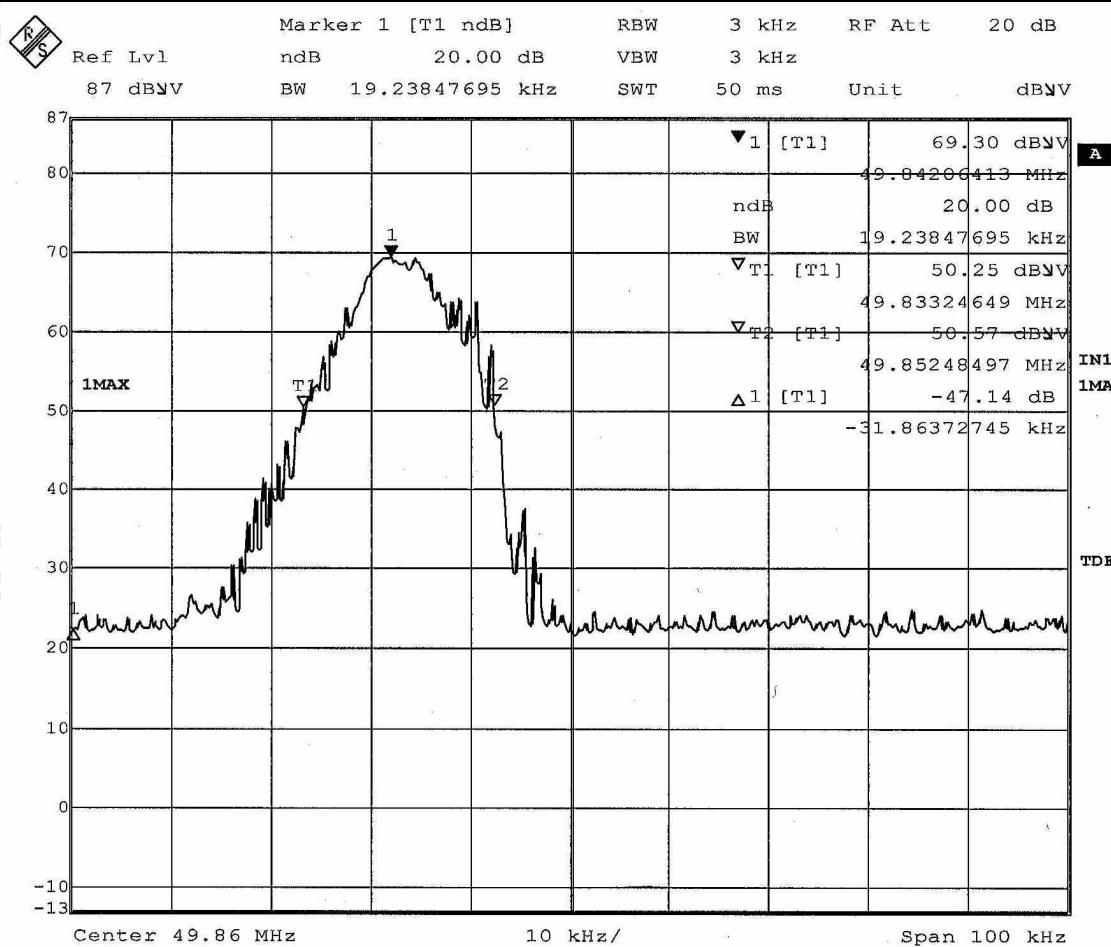

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage




## STC Test Report

Date : 2009-06-29

Page 12 of 15

No. : HM163855

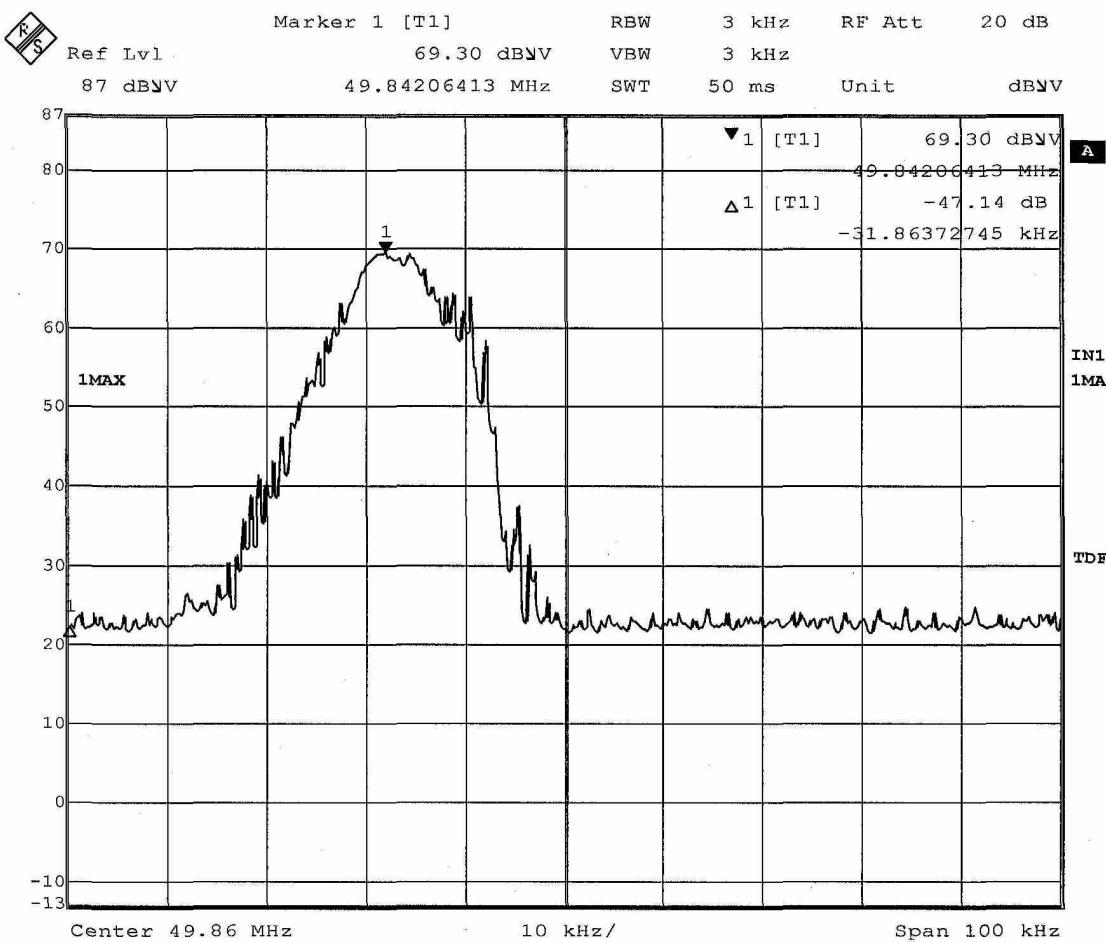

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2009-06-29

Page 13 of 15

No. : HM163855

### **Appendix A**

#### **List of Measurement Equipment**

##### **Radiated Emission**

EQP NO.	DESCRIPTION	MANUFACTURER	MODEL NO.	SERIAL NO.	LAST CAL	DUE CAL
EM020	HORN ANTENNA	EMCO	3115	4032	2006/07/11	2009/07/11
EM215	MULTIDEVICE CONTROLER	EMCO	2090	00024676	N/A	N/A
EM216	MINI MAST SYSTEM	EMCO	2075	00026842	N/A	N/A
EM217	ELECTRIC POWERED TURNTABLE	EMCO	2088	00029144	N/A	N/A
EM218	ANECHOIC CHAMBER	ETS-Linggren	FACT-3	--	2008/12/01	2011/12/01
EM174	BICONILOG ANTENNA	EMCO	3142B	1671	2008/01/24	2010/01/24
EM194	BICONILOG	EMCO	3142B	1795	2008/09/08	2010/09/08
EM229	EMI Test Receiver	R&S	ESIB40	100248	2008/09/08	2009/09/08
EM022	LOOP ANTENNA	EMCO	6502	1189-2424	2006/07/26	2009/07/26

#### **Remarks:-**

CM      Corrective Maintenance

N/A      Not Applicable or Not Available

TBD      To Be Determined

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**

Date : 2009-06-29

Page 14 of 15

No. : HM163855

### **Appendix B**

#### **Photographs of EUT**

**Front View of the product**




**Rear View of the product**



**Inner Circuit Top View**



**Inner Circuit Bottom View**

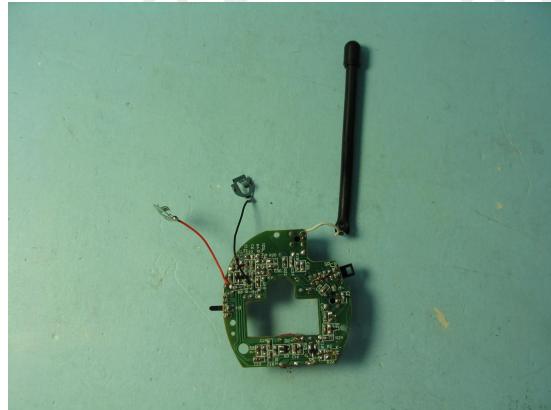

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage



## **STC Test Report**


Date : 2009-06-29

Page 15 of 15

No. : HM163855

### **Photographs of EUT**

**Measurement of Radiated Emission Test Set Up**

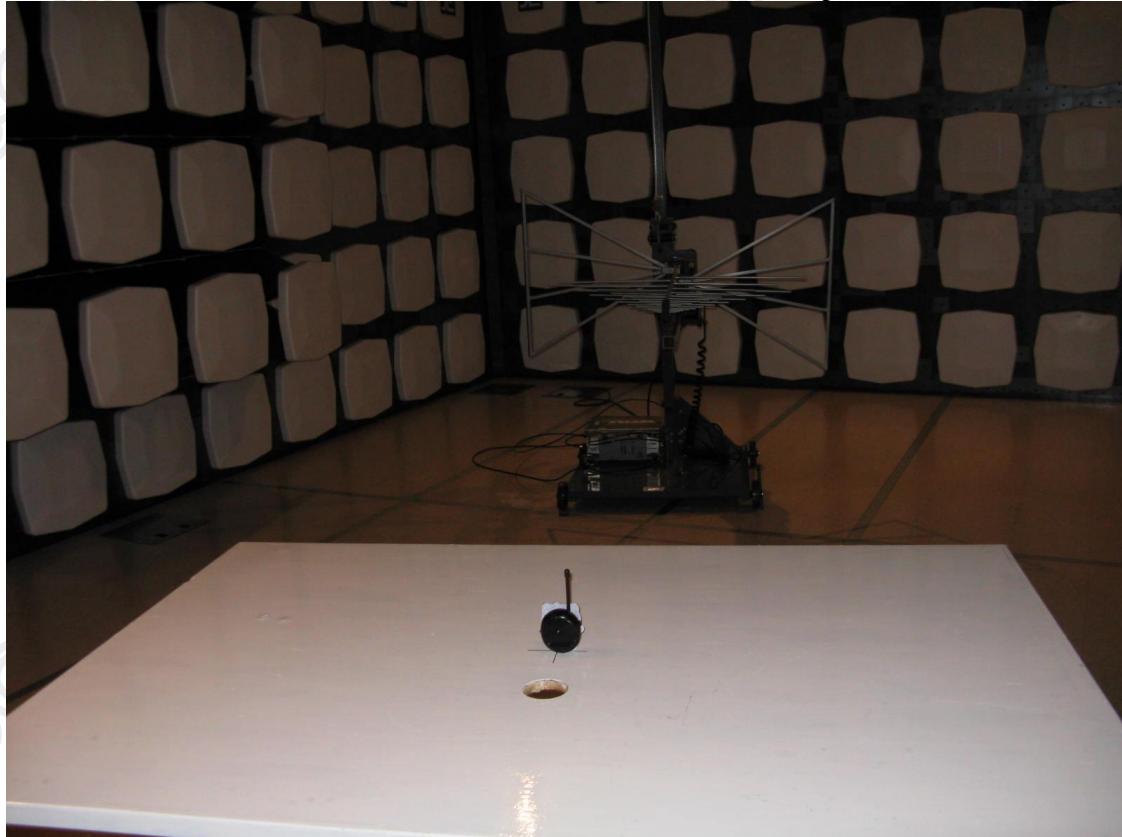

**\*\*\*\*\* End of Test Report \*\*\*\*\***

**The Hong Kong Standards and Testing Centre Ltd.**

10 Dai Wang Street, Taipo Industrial Estate, N.T., Hong Kong

Tel: (852) 2666 1888 Fax: (852) 2664 4353 Homepage: [www.hkstc.org](http://www.hkstc.org) E-mail: [hkstc@hkstc.org](mailto:hkstc@hkstc.org)

This report shall not be reproduced unless with prior written approval from The Hong Kong Standards and Testing Centre Ltd.  
For Conditions of Issuance of this test report, please refer to the overleaf or Homepage