



FCC TEST REPORT

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Zhejiang Dahua Vision Technology Co., Ltd.
Address	: The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.
Equipment	: Network Camera
Model No.	: DH-IPC-K100W
FCC ID	: SVNIPC-K100

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Cerpass Technology(Suzhou) Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of **FCC Rules and Regulations Part 15.** The test report has been issued separately.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.




Contents

1. Report of Measurements and Examinations	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test	7
2.1 Manufacturer	7
2.2 Feature of Equipment under Test	7
2.3 Carrier Frequency of Channels	8
2.4 Test Mode and Test Software	9
2.5 Description of Test System	9
2.6 General Information of Test	10
2.7 Measurement Uncertainty	10
3. Antenna Requirements	11
3.1 Standard Applicable	11
3.2 Antenna Construction and Directional Gain	11
4. Test of Conducted Emission	12
4.1 Test Limit	12
4.2 Test Procedures	12
4.3 Typical Test Setup	13
4.4 Measurement equipment	13
4.5 Test Result and Data	14
5. Test of Radiated Emission	16
5.1 Test Limit	16
5.2 Test Procedures	16
5.3 Typical Test Setup	17
5.4 Measurement equipment	18
5.5 Test Result and Data	19
6. 6dB Bandwidth Measurement Data	32
6.1 Test Limit	32
6.2 Test Procedures	32
6.3 Test Setup Layout	32
6.4 Measurement equipment	32
6.5 Test Result and Data	32
7. Maximum Peak Output Power	39
7.1 Test Limit	39
7.2 Test Procedures	39
7.3 Test Setup Layout	39
7.4 Measurement equipment	39
7.5 Test Result and Data	39
8. Band Edges Measurement	52
8.1 Test Limit	52
8.2 Test Procedure	52
8.3 Test Setup Layout	52
8.4 Measurement equipment	52



8.5	Test Result and Data	52
8.6	Restrict Band Emission Measurement Data	61
9.	Power Spectral Density	63
9.1	Test Limit	63
9.2	Test Procedures	63
9.3	Test Setup Layout	63
9.4	Measurement equipment	63
9.5	Test Result and Data	63
10.	Restricted Bands of Operation	70
10.1	Labeling Requirement	70



■ ORIGINAL.

☐ Additional attachment as following record:

[illegible]



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations Part 15 Subpart C

Applicant	: Zhejiang Dahua Vision Technology Co., Ltd.
Address	: The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.
Equipment	: Network Camera
Model No.	: DH-IPC-K100W
FCC ID	: SVNIPC-K100

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C.**

The test was carried out on Mar 22,2013 at **Cerpass Technology(Suzhou) Corp.**

Signature

Miro Chueh/ Technical director



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	. Antenna Requirement	Pass
15.207	. Conducted Emission	Pass
15.209 15.247(d)	. Radiated Emission	Pass
15.247(a)(2)	. 6dB Bandwidth	Pass
15.247(b)	. Maximum Peak Output Power	Pass
15.247(d)	. 100kHz Bandwidth of Frequency Band Edges	Pass
15.247(e)	. Power Spectral Density	Pass
1.1307 1.1310 2.1091 2.1093	. RF Exposure Compliance	Pass



2. Test Configuration of Equipment under Test

2.1 Manufacturer

Zhejiang Dahua Vision Technology Co., Ltd.

The 1st floor, building F, No.1199 Bin'an road, Changhe Street, Binjiang District, Hangzhou, P.R. China.

2.2 Feature of Equipment under Test

Network Camera	Model No :	DH-IPC-K100W
Power Adapter	Manufacturer:	ISO
	Model No.:	KPA-060F
	Input:	100-240V~, 50/60Hz, 1.7A
	Output:	12V $\overline{\text{---}}$ 1A
Power supply cable	Non-Shielded, 1.5m	

WLAN	CDT-A05370-00
Spreading	802.11b: DSSS/CCK 802.11g: OFDM 802.11n: OFDM
Frequency Range	802.11b/g/n(20MHz): 2412-2462MHz 802.11n(40MHz): 2422-2452MHz
Number of Channels	802.11b/g/n (20MHz):11 802.11n (40MHz): 7
Data Rate	802.11b: 1, 2, 5.5, 11Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: 6.5,13,26,65,13.5,27,135Mbps
Antenna	PIFA Antenna (1.5dBi)

Note: for more details, please refer to the User's manual of the EUT.



2.3 Carrier Frequency of Channels

802.11b, 802.11g, 802.11n, HT20

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437	---	---

802.11n, HT40

Channel	Frequency(MHz)	Channel	Frequency(MHz)
---	---	07	2442
---	---	08	2447
03	2422	09	2452
04	2427	---	---
05	2432	---	---
06	2437	---	---



2.4 Test Mode and Test Software

- During testing, the interface cables and equipment positions were varied according to ANSI C63.4.
- The complete test system included remote workstation and EUT.
- An executive program, "RF Control Kit v1.0 Test" under WIN XP was executed to transmit and receive data via wireless.
- The following test mode and test software was performed for conduction and radiation test:

Test mode:

The EUT transmitting and receiving with one antenna working at b/g/n mode, so one antenna working configuration was used for b/g/n mode testing in this report.

The worst-case data rates are determined to be as follows for each mode based on investigation by measuring the average power, peak power and PPSD across all data rates, bandwidths, and modulations.

The worst-case data rates:

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 11Mbps data rate were chosen for full testing.

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 54Mbps data rate were chosen for full testing.

IEEE 802.11gn Standard-20 MHz Channel mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 135 Mbps data rate were chosen for full testing.

IEEE 802.11gn Wide-40 MHz Channel mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 135 Mbps data rate were chosen for full testing.

Then, the EUT configuration and cable configuration of the above highest emission mode was recorded for all final test items.

2.5 Description of Test System

Device	Manufacturer	Model No.	Description
Remote workstation			
N/A	N/A	N/A	N/A

Use Cable:

Cable	Quantity	Description
N/A	N/A	N/A



2.6 General Information of Test

Test Site:	CerpPASS Technology (Suzhou) Co.,Ltd
Test Site Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572, 331395
IC Registration Number :	7290A-1, 7290A-2
VCCI Registration Number :	T-1945 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test below 1GHz G-227 for Radiated emission test above 1GHz
Frequency Range Investigated:	Conducted: from 150kHz to 30MHz Radiation: from 9kHz to 25000MHz
Test Distance:	The test distance of radiated emission from antenna to EUT is 3 M.

LABORATORY ACCREDITATION



2.7 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	2.71 dB
Radiated Emission	30 MHz ~ 25GHz	Vertical	4.11 dB
		Horizontal	4.10 dB
6 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	1.4 dB



3. Antenna Requirements

3.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

3.2 Antenna Construction and Directional Gain

Antenna 1:

Antenna type: PIFA Antenna

Antenna Gain: 1.5 dBi



4. Test of Conducted Emission

4.1 Test Limit


Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2009 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50

*Decreases with the logarithm of the frequency.

4.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

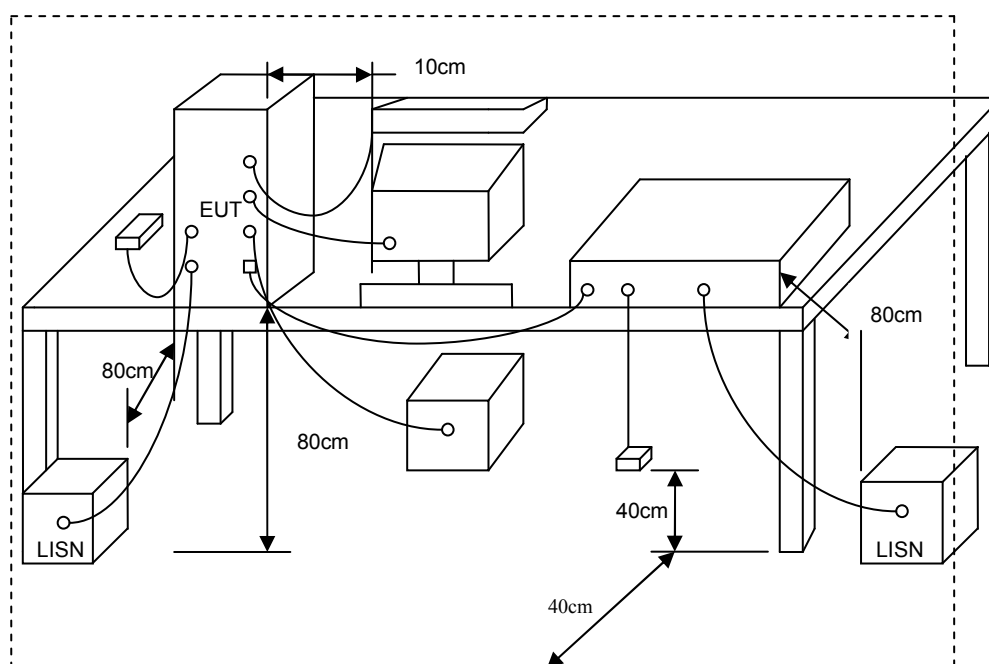


4.4 Measurement equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Valid Date.
Test Receiver	R&S	ESCI	100565	2012.11.05	2013.11.04
AMN	R&S	ESH2-Z5	100182	2012.11.05	2013.11.04
Two-Line V-Network	R&S	ENV216	100325	2013.03.10	2014.03.09
ISN	FCC	FCC-TLISN-T 2-02	20379	2012.12.08	2013.12.07
ISN	FCC	FCC-TLISN-T 4-02	20380	2012.12.08	2013.12.07
ISN	FCC	FCC-TLISN-T 8-02	20381	2012.12.08	2013.12.07
ISN	TESEQ	ISN ST08	30175	2012.09.13	2013.09.12
Current Probe	R&S	EZ-17	100303	2013.03.10	2014.03.09
Passive Voltage Probe	R&S	ESH2-Z3	100026	2013.03.10	2014.03.09
Attenuator	R&S	ESH3-Z2	100529	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2013.03.10	2014.03.09



4.5 Test Result and Data

Test Mode :	Normal link		
AC Power :	AC 120V/60Hz	Phase :	NEUTRAL
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2013/03/21

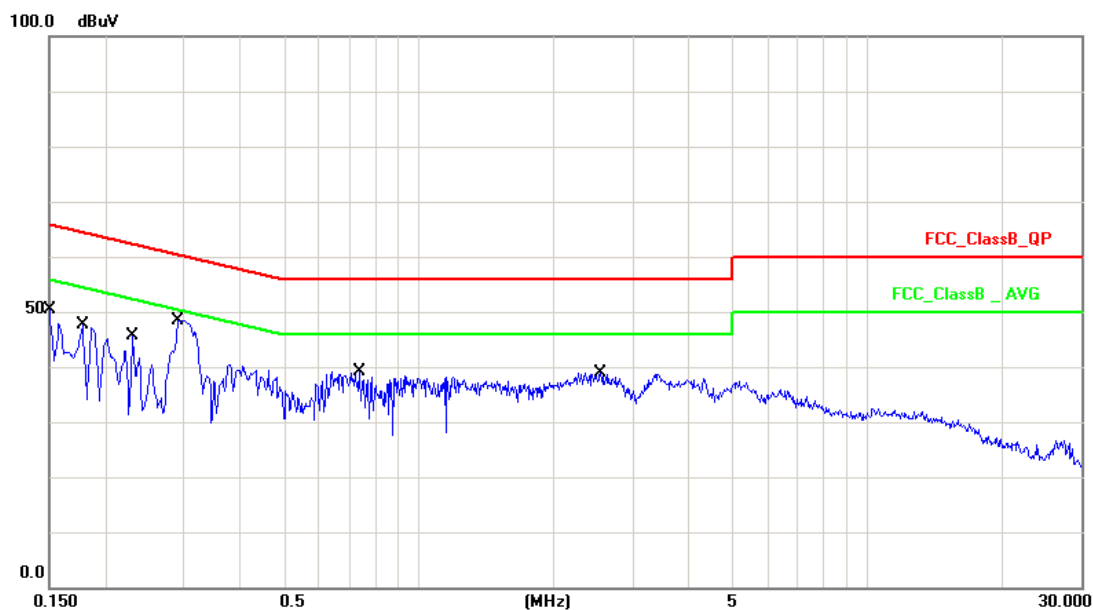


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	9.50	38.24	47.74	66.00	-18.26	QP
2	0.1500	9.50	19.91	29.41	56.00	-26.59	AVG
3	0.1780	9.50	35.40	44.90	64.58	-19.68	QP
4	0.1780	9.50	20.55	30.05	54.58	-24.53	AVG
5	0.2300	9.50	31.05	40.55	62.45	-21.90	QP
6	0.2300	9.50	16.62	26.12	52.45	-26.33	AVG
7	0.2900	9.51	36.21	45.72	60.52	-14.80	QP
8	0.2900	9.51	28.46	37.97	50.52	-12.55	AVG
9	0.7380	9.49	26.87	36.36	56.00	-19.64	QP
10	0.7380	9.49	19.14	28.63	46.00	-17.37	AVG
11	2.5500	9.53	25.85	35.38	56.00	-20.62	QP
12	2.5500	9.53	18.41	27.94	46.00	-18.06	AVG

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Normal link		
AC Power :	AC 120V/60Hz	Phase :	LINE
Temperature :	22°C	Humidity :	50%
Pressure(mbar) :	1002	Date:	2013/03/21

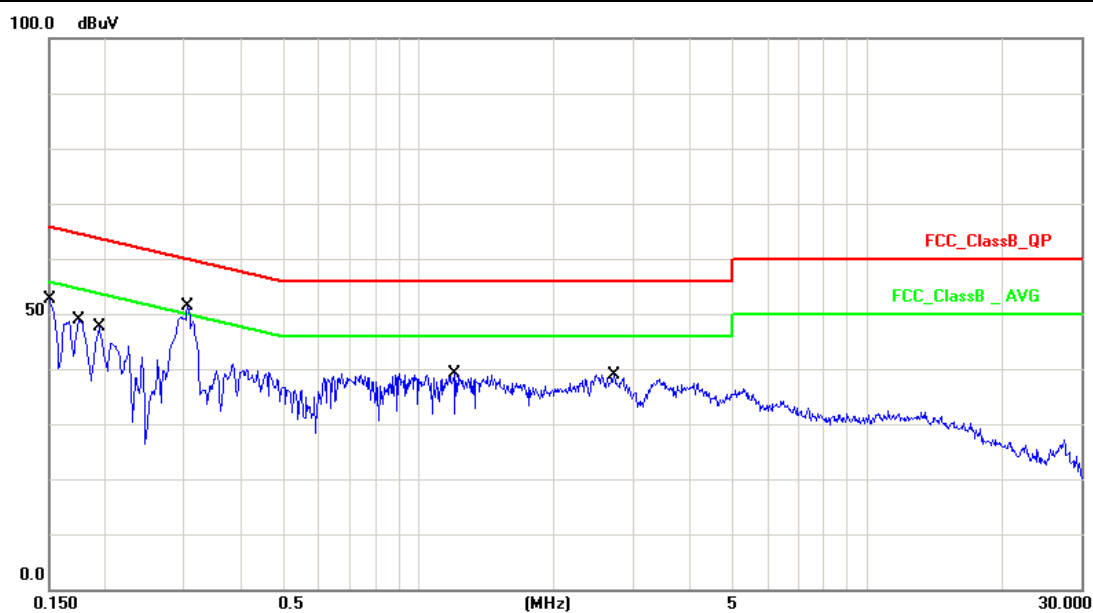

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1500	9.87	38.78	48.65	65.99	-17.34	QP
2	0.1500	9.87	20.58	30.45	55.99	-25.54	AVG
3	0.1740	9.87	36.13	46.00	64.76	-18.76	QP
4	0.1740	9.87	21.31	31.18	54.76	-23.58	AVG
5	0.1940	9.87	33.69	43.56	63.86	-20.30	QP
6	0.1940	9.87	20.37	30.24	53.86	-23.62	AVG
7	0.3060	9.87	38.77	48.64	60.08	-11.44	QP
8	0.3060	9.87	30.69	40.56	50.08	-9.52	AVG
9	1.1980	9.74	26.44	36.18	56.00	-19.82	QP
10	1.1980	9.74	18.33	28.07	46.00	-17.93	AVG
11	2.7220	9.71	25.54	35.25	56.00	-20.75	QP
12	2.7220	9.71	18.13	27.84	46.00	-18.16	AVG

Note: Measurement Level = Reading Level + Correct Factor



5. Test of Radiated Emission

5.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2009. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions. For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37

5.2 Test Procedures


- The EUT was placed on a rotatable table top 0.8 meter above ground.
- The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- The table was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average




mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.3 Typical Test Setup

Below 1GHz Test Setup

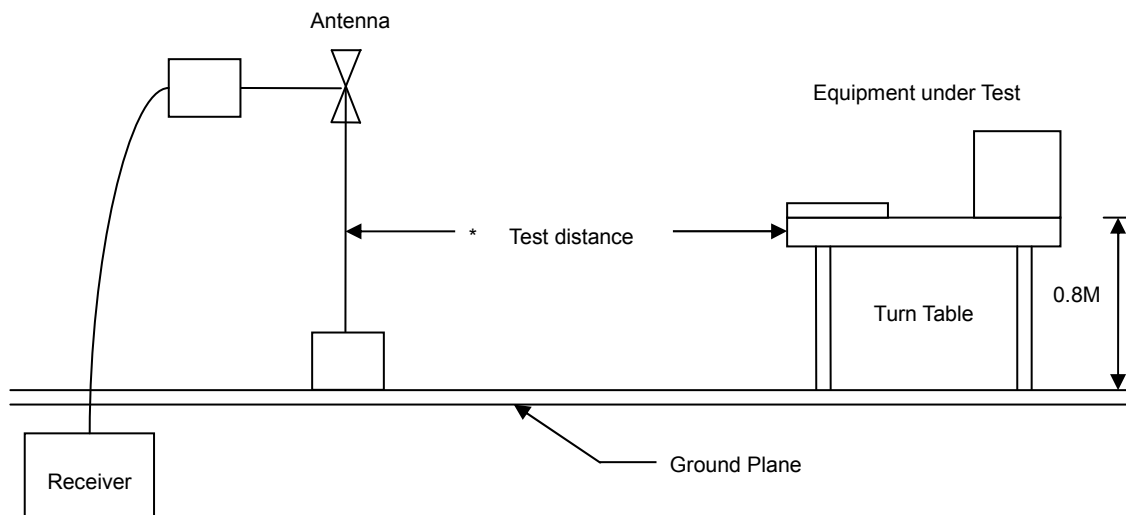

Above 1GHz Test Setup

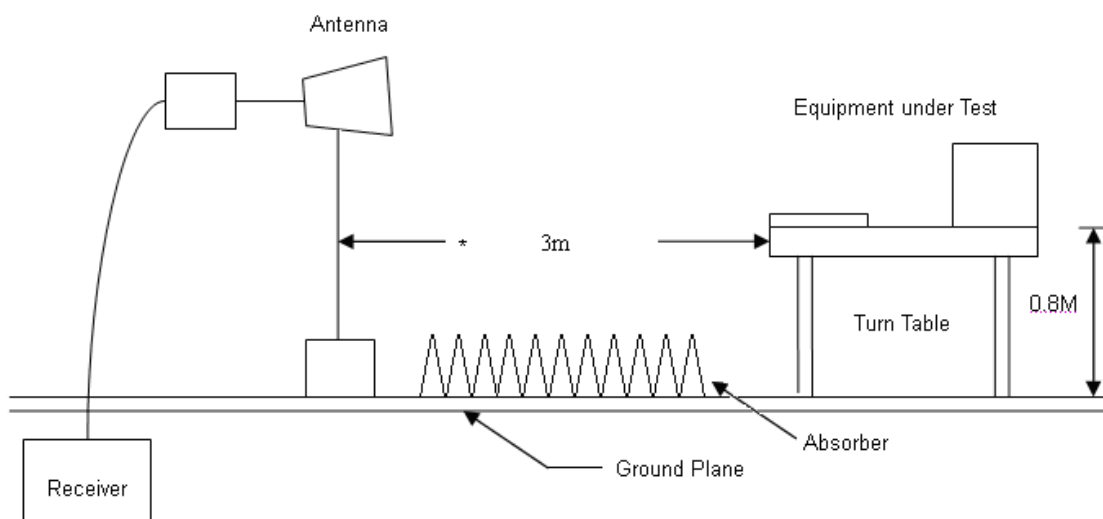



5.4 Measurement equipment

Instrument	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
EMI Test Receiver	R&S	ESCI	100563	2013.03.10	2014.03.09
H64 Preamplifier	HP	8447F	3113A05582	2013.03.10	2014.03.09
Preamplifier	Agilent	8449B	3008A02342	2013.03.10	2014.03.09
Ultra Broadband Antenna	R&S	HL562	100362	2012.05.03	2013.05.02
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2012.05.03	2013.05.02
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	9170-347	2012.05.15	2013.05.15
Spectrum Analyzer	R&S	FSP40	100324	2013.03.10	2014.03.09
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-002	2013.03.10	2014.03.09



5.5 Test Result and Data

The 9kHz-30MHz spurious emission is under limit 20dB more.

5.5.1 Test Result and Data of Transmitter

Under 1G

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: normal link	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

Freq. (MHz)	Ant.Pol. H/V	Reading Level (dBuV)	Correct Factor (dB)	Measure Level (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)	Detector Mode (PK/QP)
53.2800	V	46.31	-13.84	32.47	40	-7.53	QP
320.0300	V	40.79	-10.22	30.57	46	-15.43	QP
443.2200	V	45.91	-6.37	39.54	46	-6.46	QP
474.2600	V	45.06	-5.52	39.54	46	-6.46	QP
524.7000	V	45.93	-4.28	41.65	46	-4.35	QP
540.0200	V	46.63	-3.95	42.68	46	-3.32	QP
83.3500	H	41.72	-15.38	26.34	40	-13.66	QP
320.0299	H	45.09	-10.22	34.87	46	-11.13	QP
441.2800	H	42.69	-6.42	36.27	46	-9.73	QP
472.3200	H	41.44	-5.57	35.87	46	-10.13	QP
540.2199	H	46.34	-3.95	42.39	46	-3.61	QP
613.9400	H	32.83	-2.35	30.48	46	-15.52	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Above 1G

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11b (2412MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11b (2437MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11b (2462MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11g (2412MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11g (2437MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11g (2462MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margin (dB)	Detector Mode (PK/QP)
					Peak (dBuV/m)	AV (dBuV/m)				
4924.42	V	45.96	36.44	6.99	52.95	43.43	74.00	54.00	-10.57	average
7384.72	V	35.67	26.45	15.60	51.27	42.05	74.00	54.00	-11.95	average
4925.01	H	45.27	36.04	6.99	52.26	43.03	74.00	54.00	-10.97	average
7384.99	H	35.96	25.87	15.60	51.56	41.47	74.00	54.00	-12.53	average

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (20MHz) (2412MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (20MHz) (2437MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Safe Margin (dB)	Detector Mode (PK/QP)
					Peak (dBuV/m)	AV (dBuV/m)				
4874.85	V	47.01	36.44	6.85	53.86	43.29	74.00	54.00	-10.71	average
7313.39	V	35.98	27.55	15.52	51.50	43.07	74.00	54.00	-10.93	average
4875.03	H	45.77	35.96	6.85	52.62	42.81	74.00	54.00	-11.19	average
7313.57	H	35.24	26.58	15.52	50.76	42.10	74.00	54.00	-11.90	average

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (20MHz) (2462MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (40MHz) (2422MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (40MHz) (2437MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor

Site : EMC Lab AC 102	Time : 2013/03/21
Limit : FCC_CLASS_B_03M_QP	Margin : 6
Test mode: Transmit by 802.11n (20MHz) (2452MHz)	Probe : VERTICAL/ HORIZONTAL
Power : AC 120V/60Hz	

[illegible]

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor



6. 6dB Bandwidth Measurement Data


6.1 Test Limit

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz.
- The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

6.3 Test Setup Layout



6.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	100324	2013.03.10	2014.03.09

6.5 Test Result and Data

Test Date: Mar 22,2013

Temperature: 25℃


Atmospheric pressure: 1020 hPa

Humidity: 46%


Modulation Standard	Channel	Frequency (MHz)	6dB Bandwidth (MHz)
802.11b (11Mbps)	01	2412	12.3
	06	2437	12.4
	11	2462	12.4
802.11g (54Mbps)	01	2412	16.5
	06	2437	16.5
	11	2462	16.5
802.11n HT20 (135Mbps)	01	2412	17.8
	06	2437	17.7
	11	2462	17.7
802.11n HT40 (135Mbps)	03	2422	35.8
	06	2437	35.2
	09	2452	35.2



Modulation Standard: 802.11b (11Mbps)
Channel: 01

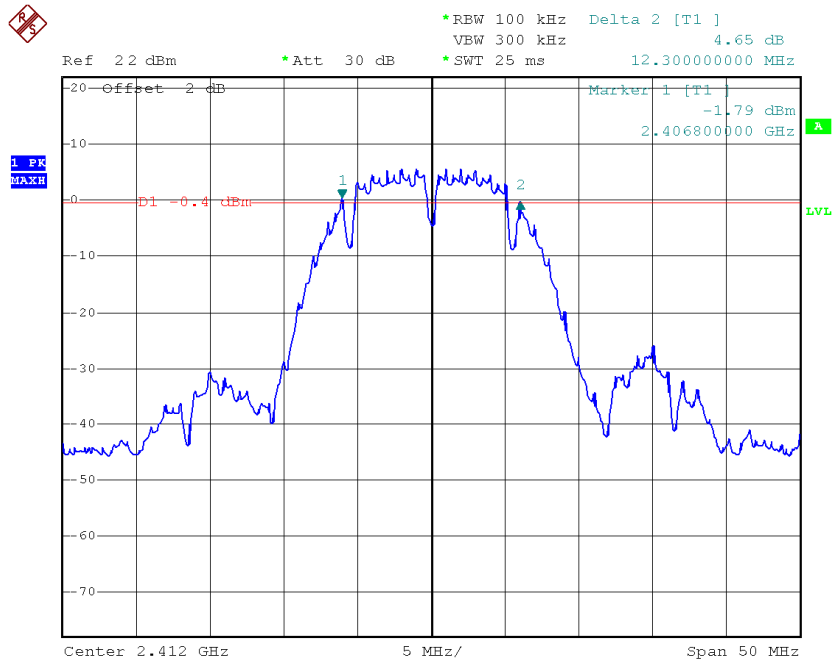


Modulation Standard: 802.11b (11Mbps),
Channel: 06

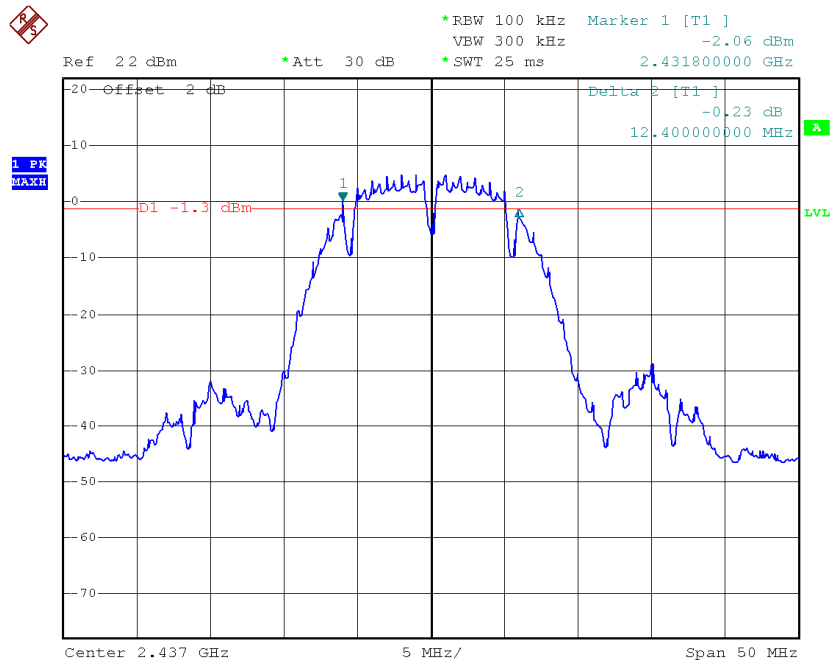




Modulation Standard: 802.11b (11Mbps)
Channel: 11

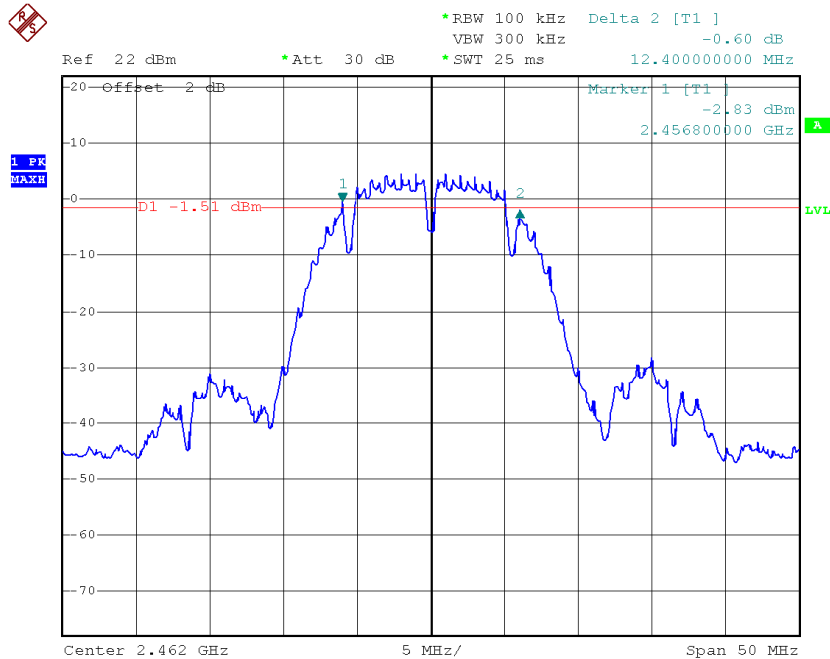


Modulation Standard: 802.11g (54Mbps),
Channel: 01

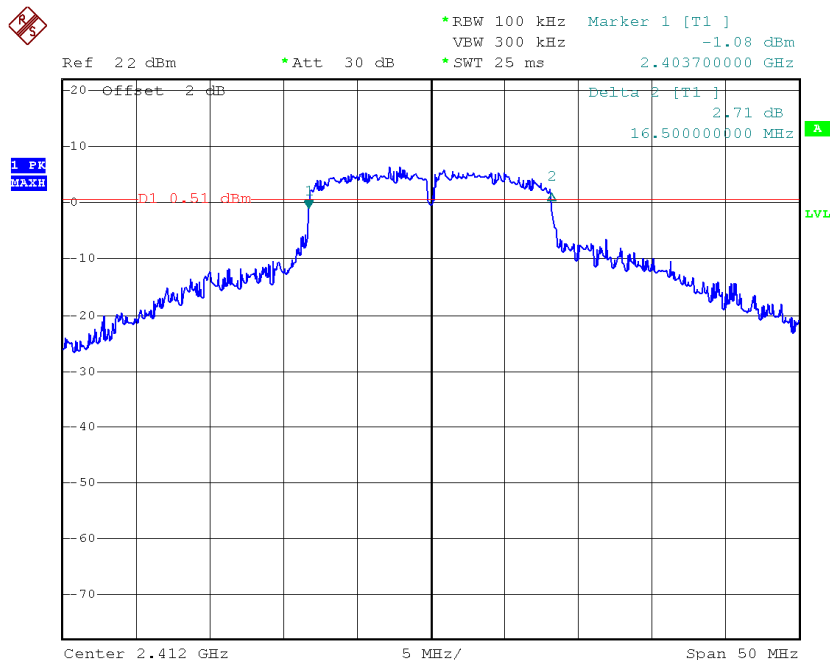




Modulation Standard: 802.11g (54Mbps)
Channel: 06

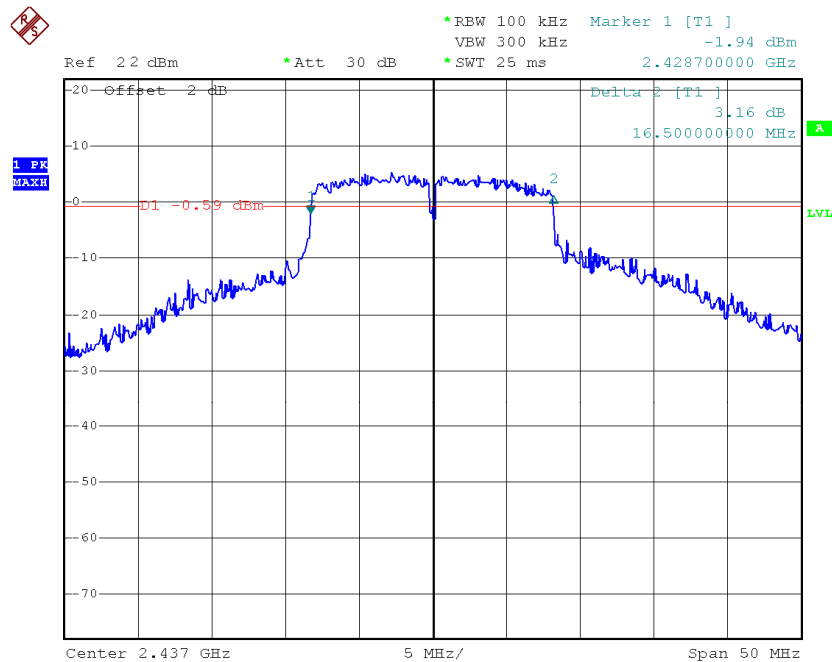


Modulation Standard: 802.11g (54Mbps)
Channel: 11

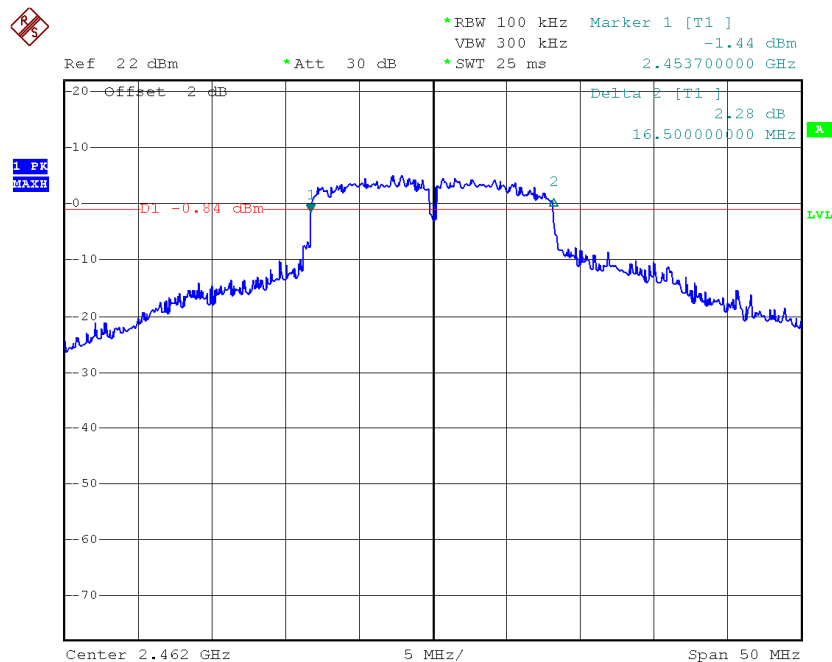




Modulation Standard: 802.11n HT20 (135Mbps)

Channel: 01

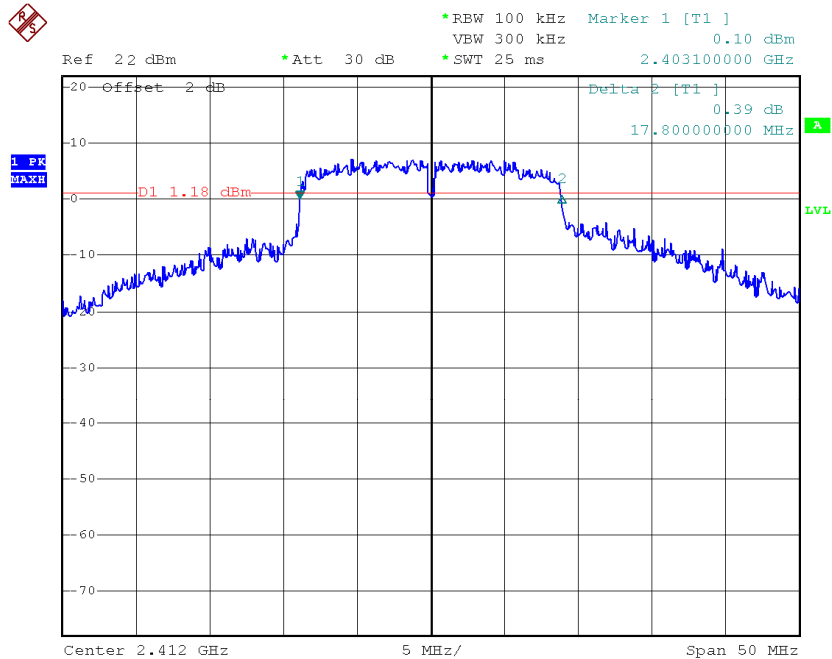

Modulation Standard: 802.11n HT20 (135Mbps)


Channel: 06

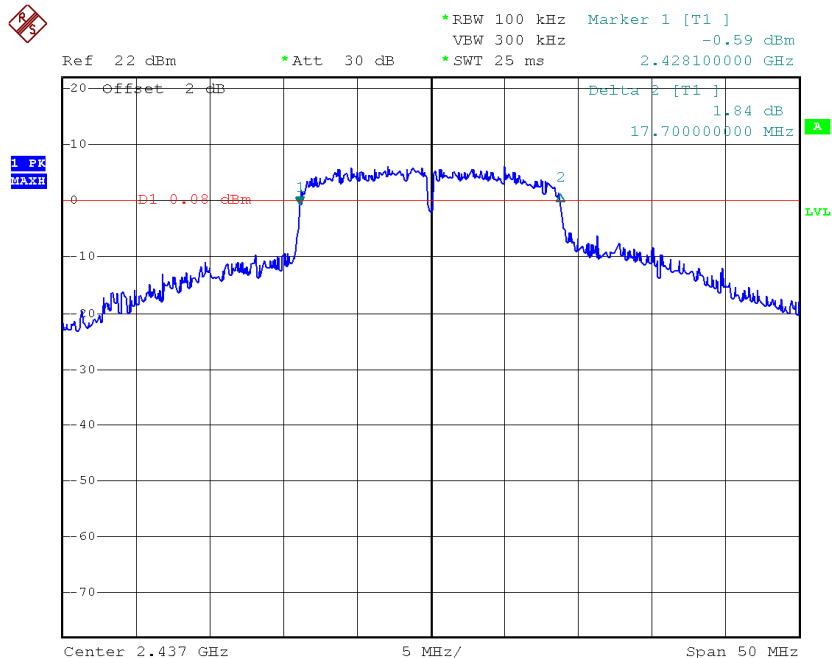




Modulation Standard: 802.11n HT20 (135Mbps)

Channel: 11

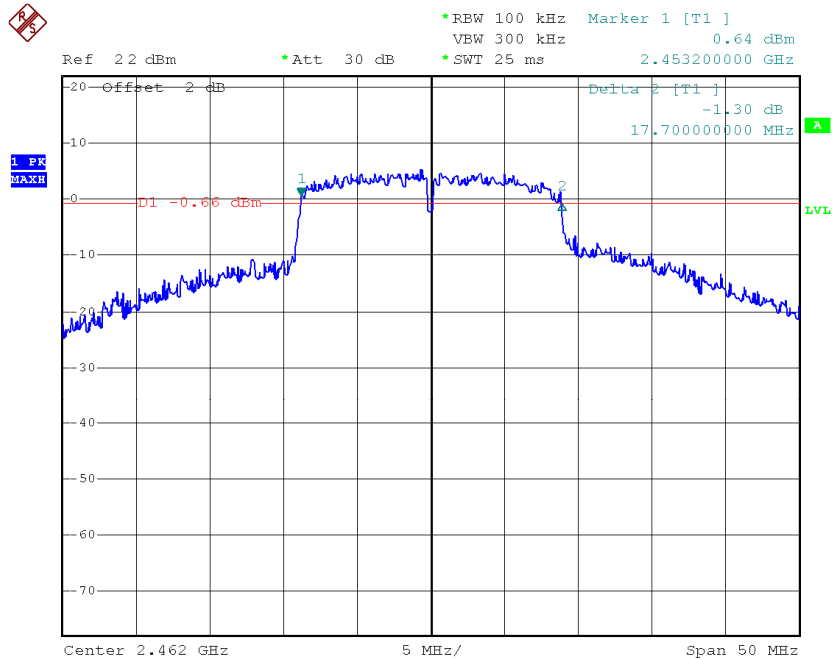

Modulation Standard: 802.11n HT40 (135Mbps)


Channel: 03

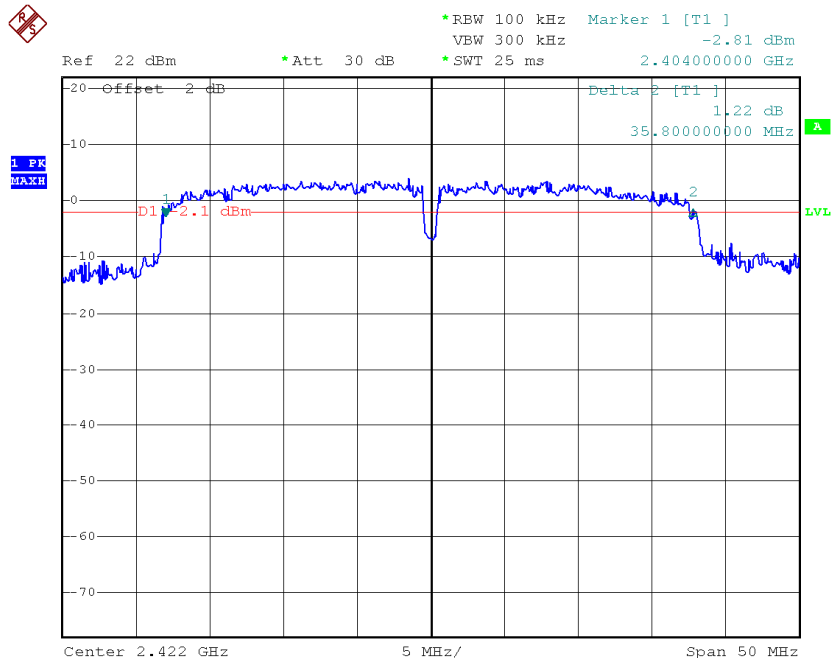




Modulation Standard: 802.11n HT40 (135Mbps)

Channel: 06

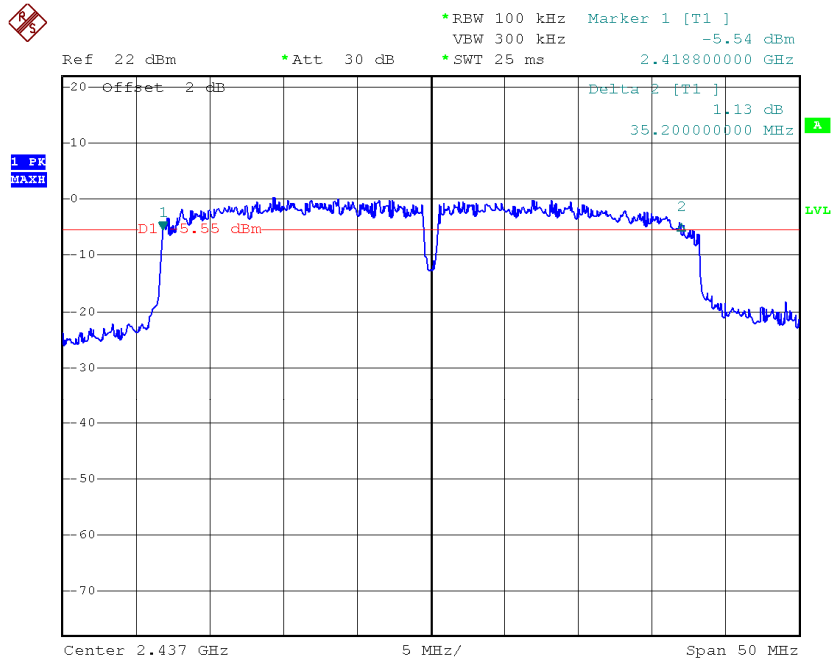

Modulation Standard: 802.11n HT40 (135Mbps)

Channel: 09

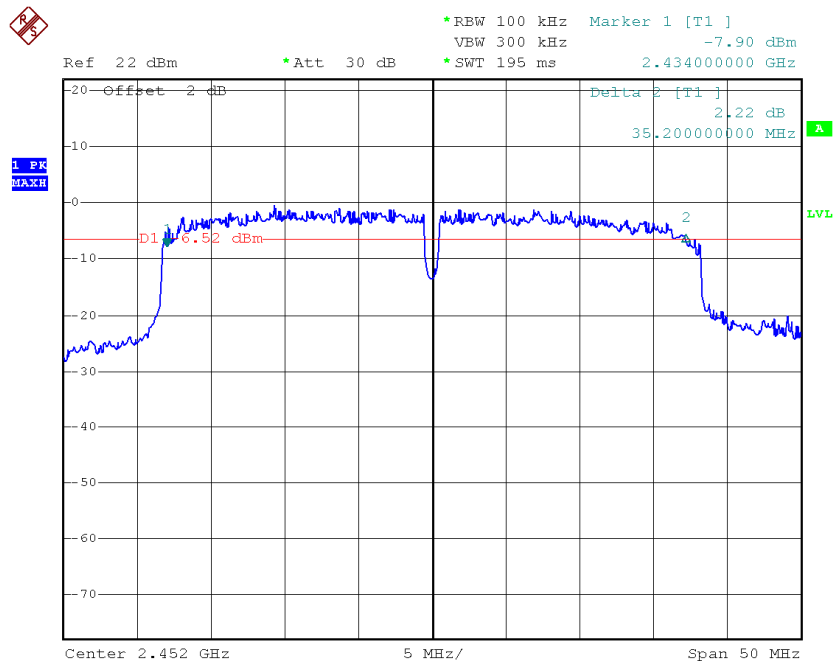



7. Maximum Peak Output Power


7.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

7.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

7.3 Test Setup Layout



7.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	100324	2013.03.10	2014.03.09

7.5 Test Result and Data

Test Date: Mar 22,2012

Temperature: 25℃

Atmospheric pressure: 1020 hPa

Humidity: 46%


Modulation Standard	Channel	Frequency (MHz)	Peak Power Output (dBm)		Required Limit (dBm)
			Peak	Average	
802.11b (11Mbps)	01	2412	20.48	16.77	30
	06	2437	20.21	16.96	30
	11	2462	19.51	16.42	30
802.11g (54Mbps)	01	2412	17.58	11.28	30
	06	2437	16.87	10.93	30
	11	2462	16.36	10.46	30
802.11n HT20 (135Mbps)	01	2412	17.27	9.77	30
	06	2437	16.79	10.26	30
	11	2462	16.32	9.83	30
802.11n HT40 (135Mbps)	03	2422	17.24	11.06	30
	06	2437	16.6	10.31	30
	09	2452	16.47	10.24	30



Peak:


Modulation Standard: 802.11b (11Mbps)

Channel: 01

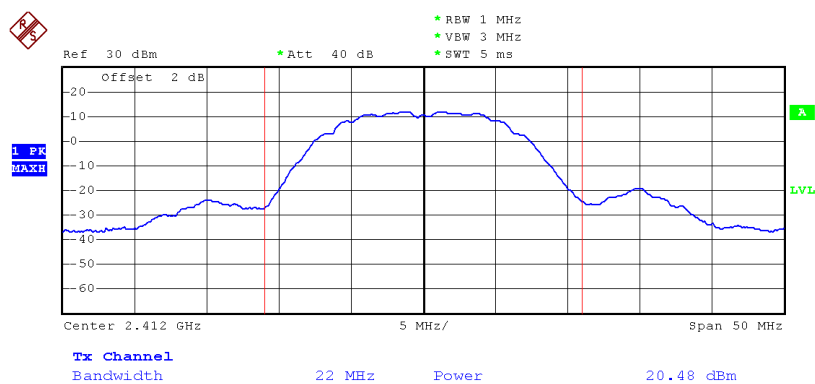


Modulation Standard: 802.11b (11Mbps)

Channel: 06

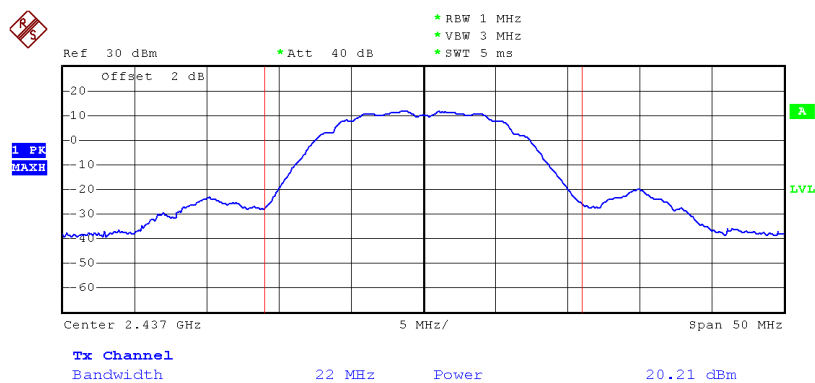




Modulation Standard: 802.11b (11Mbps)
Channel: 11

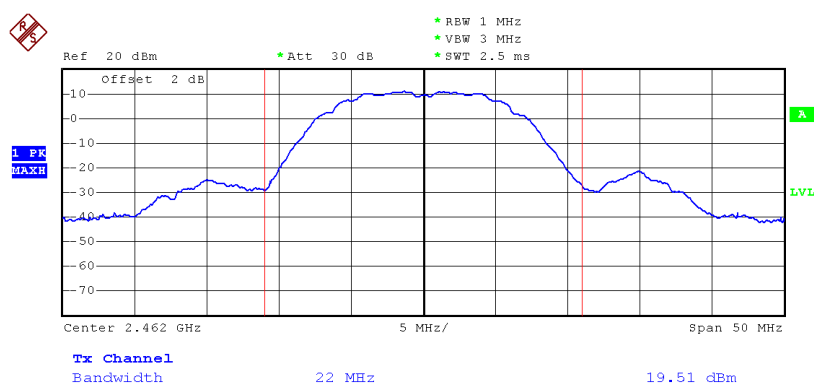


Modulation Standard: 802.11g (54Mbps)
Channel: 01

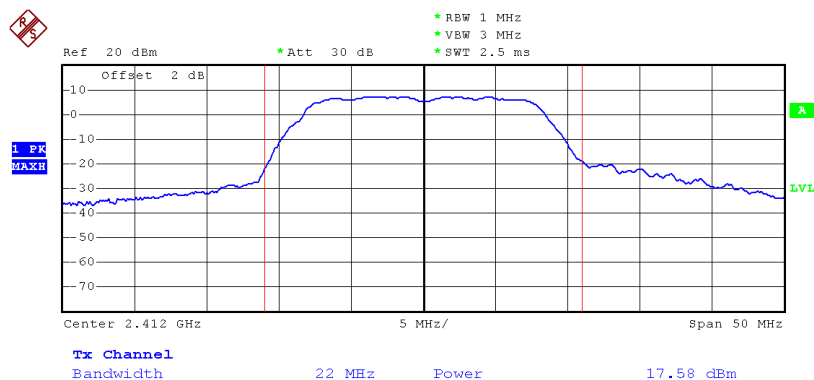




Modulation Standard: 802.11g (54Mbps)
Channel: 06

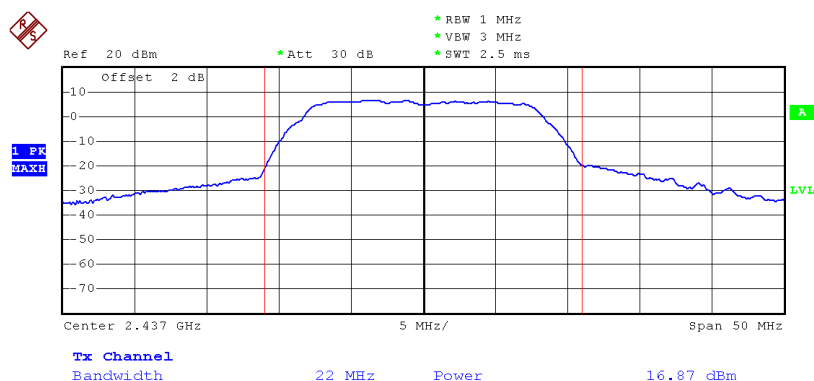


Modulation Standard: 802.11g (54Mbps)
Channel: 11

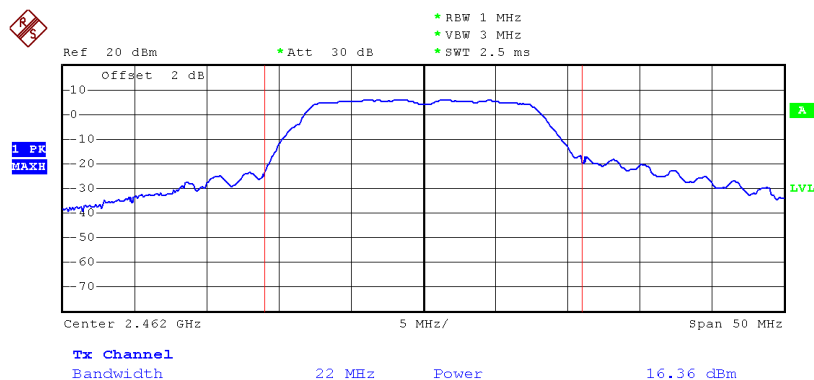




Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 01

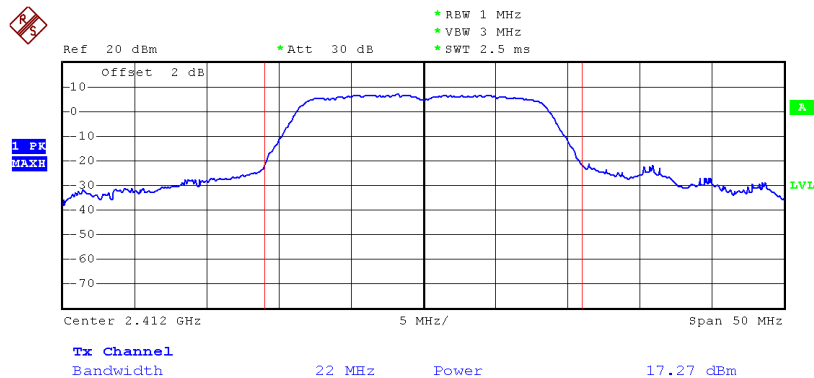


Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 06

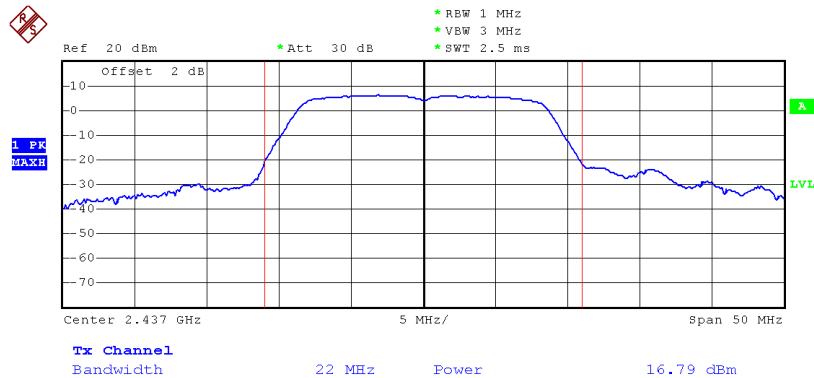




Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 11

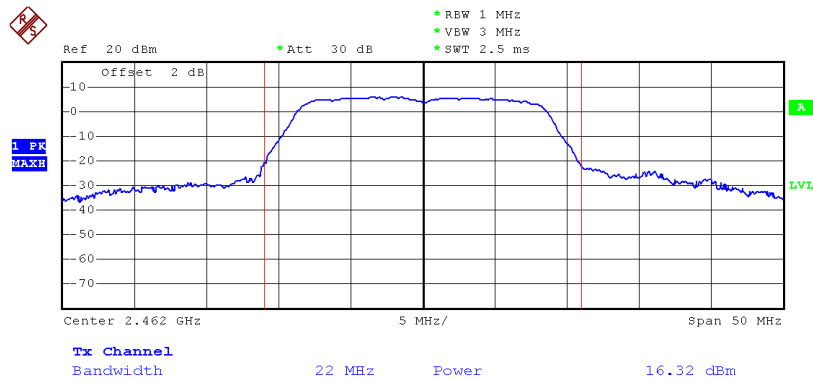


Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 03

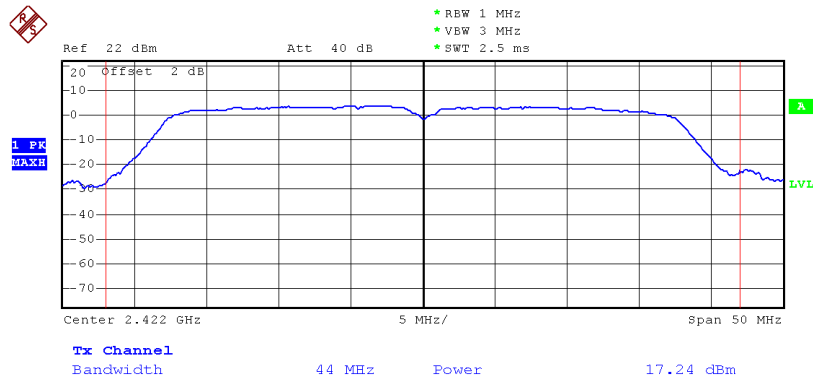




Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 06

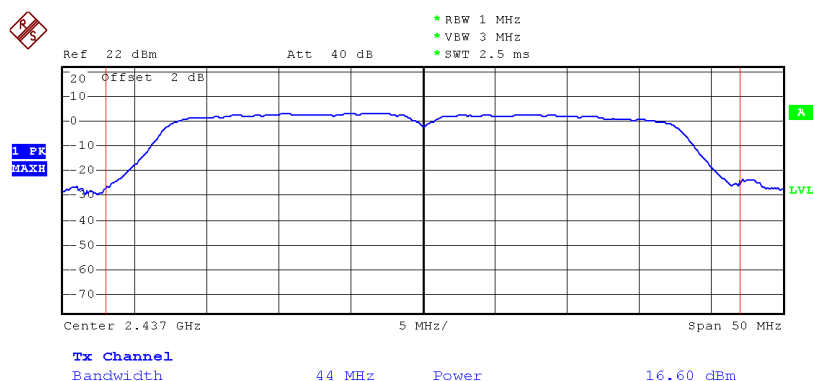

Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 09

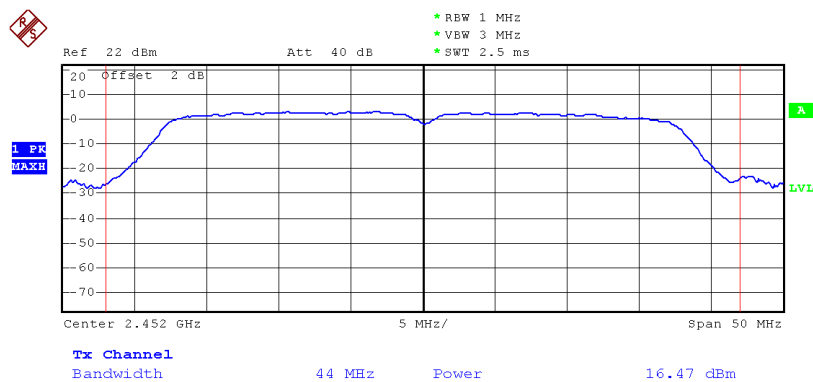




Average:


Modulation Standard: 802.11b (11Mbps)

Channel: 01

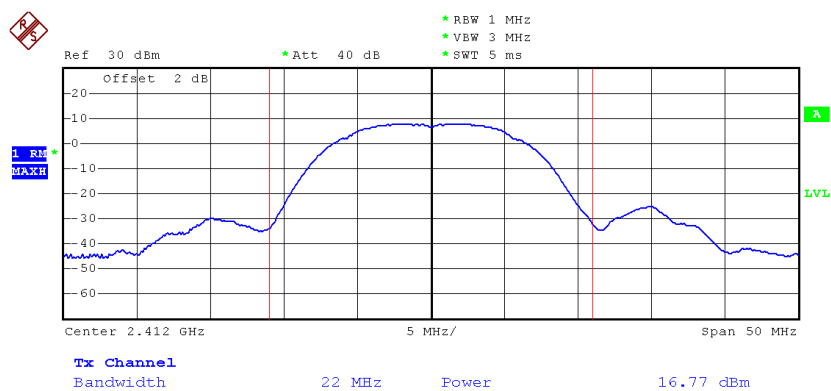


Modulation Standard: 802.11b (11Mbps)

Channel: 06

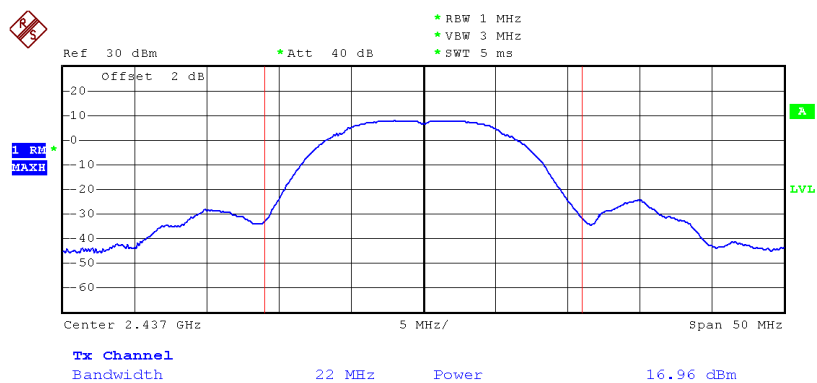




Modulation Standard: 802.11b (11Mbps)
Channel: 11

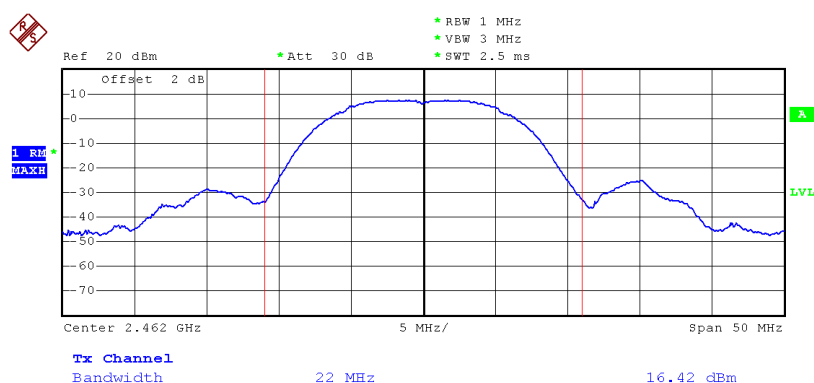


Modulation Standard: 802.11g (54Mbps)
Channel: 01

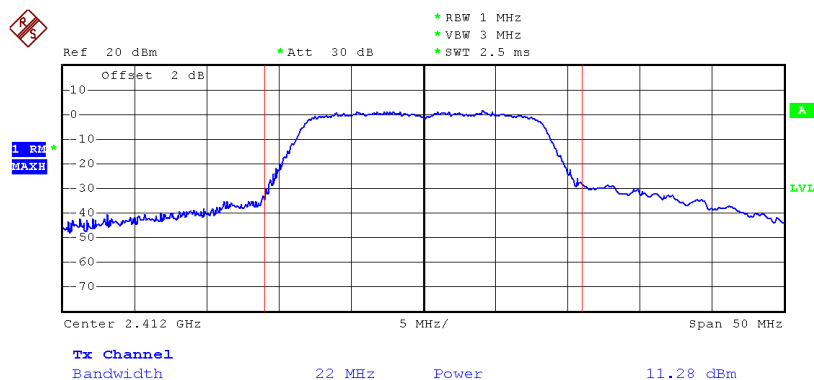




Modulation Standard: 802.11g (54Mbps)
Channel: 06

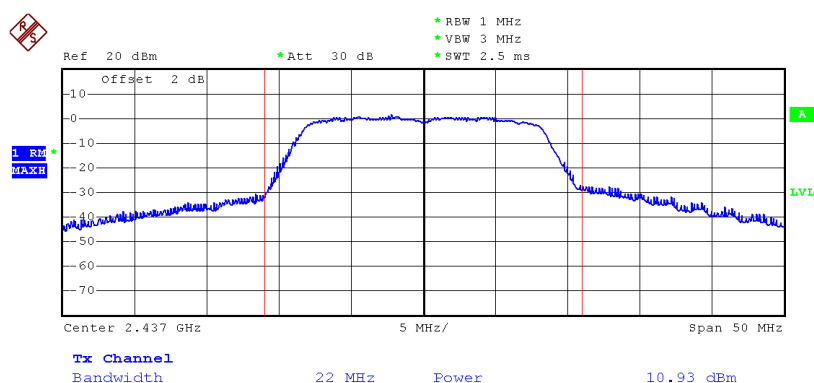


Modulation Standard: 802.11g (54Mbps)
Channel: 11

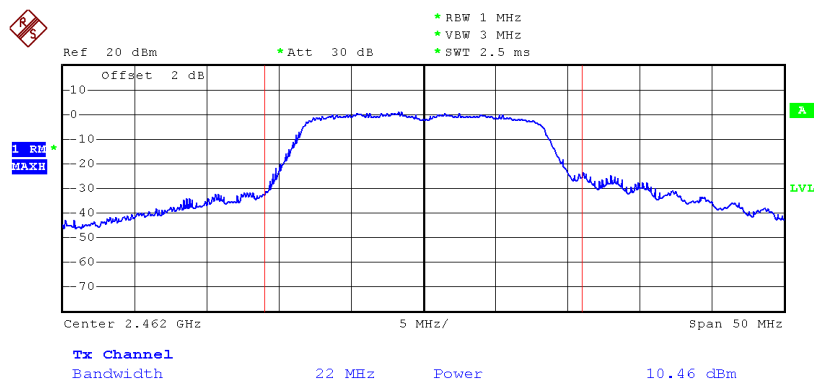




Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 01

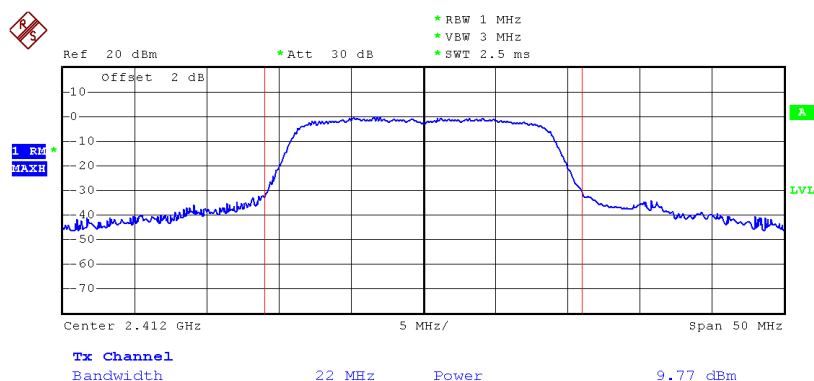


Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 06

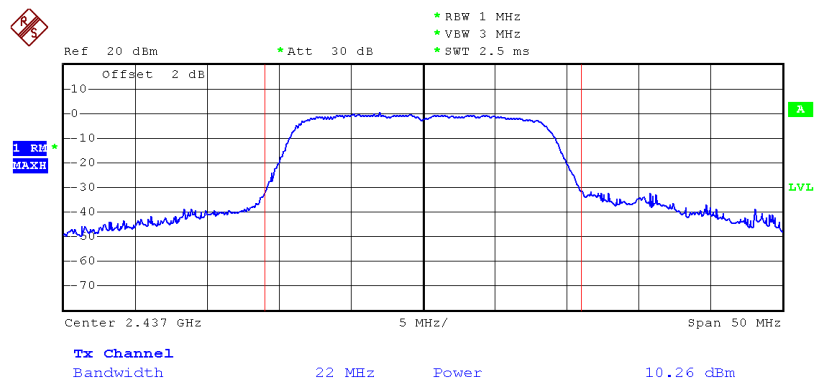




Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 11

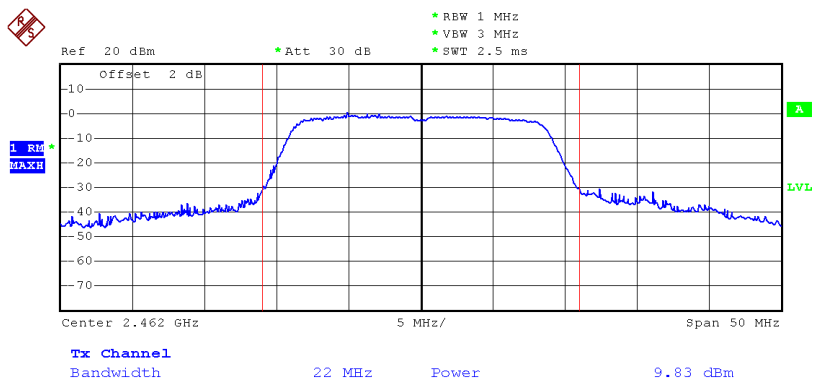


Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 03

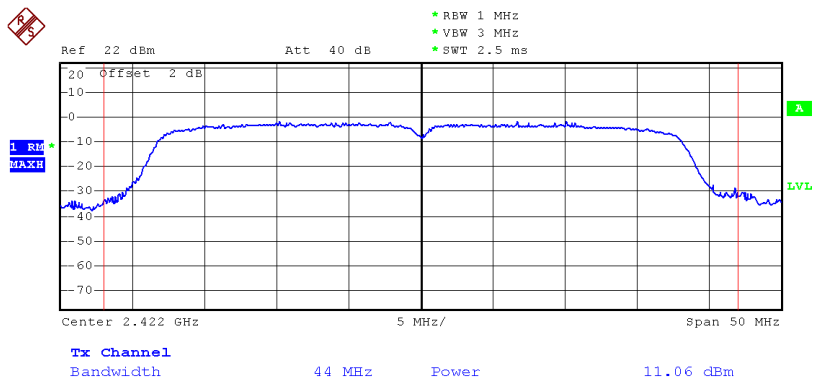




Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 06

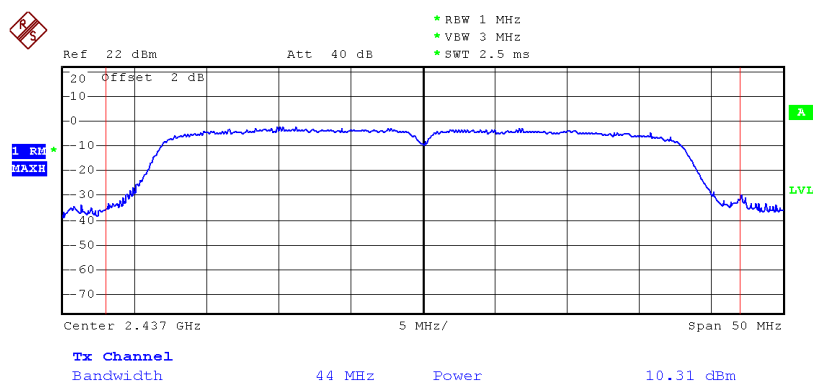

Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 09

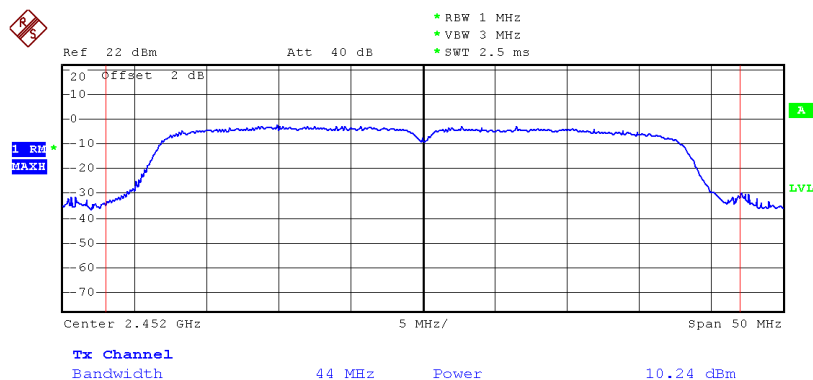



8. Band Edges Measurement


8.1 Test Limit

Below -20dB of the highest emission level of operating band (In 100 kHz Resolution Bandwidth)

8.2 Test Procedure

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 300 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

8.3 Test Setup Layout



8.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	100324	2013.03.10	2014.03.09

8.5 Test Result and Data

Test Date: Mar 22,2013

Temperature: 25℃



Atmospheric pressure: 1020 hPa

Humidity: 46 %

Modulation Standard	Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
802.11b (11Mbps)	01	2412	2397.2	-30.19
	11	2462	2483.5	-47.27
802.11g (54Mbps)	01	2412	2399.8	-26.60
	11	2462	2483.5	-22.94
802.11n HT20 (135Mbps)	01	2412	2400.0	-27.06
	11	2462	2483.5	-20.85
802.11n HT40 (135Mbps)	03	2422	2399.8	-19.18
	09	2452	2483.5	-19.83





Modulation Standard: 802.11b (11Mbps)
Channel: 01

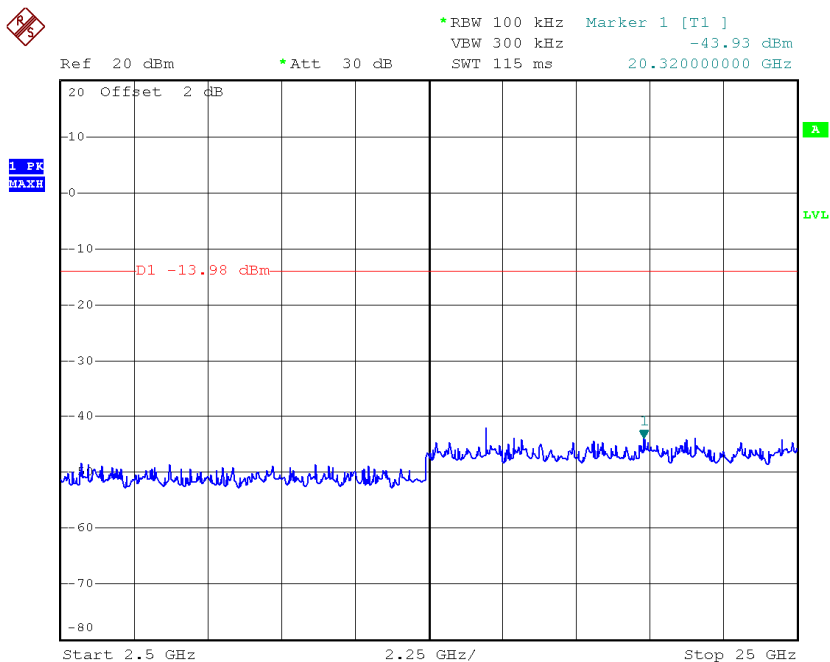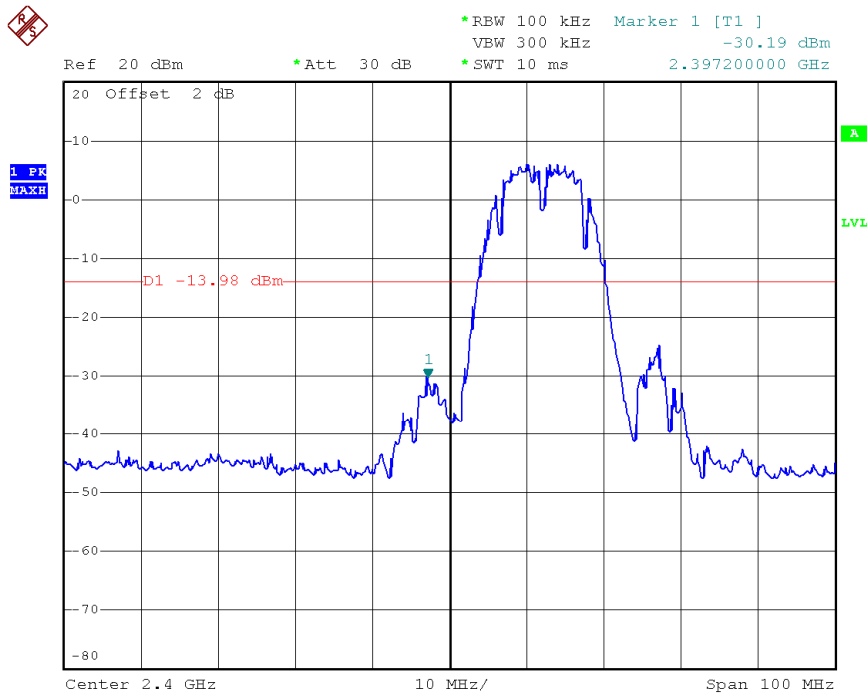





Modulation Standard: 802.11b (11Mbps)
Channel: 11

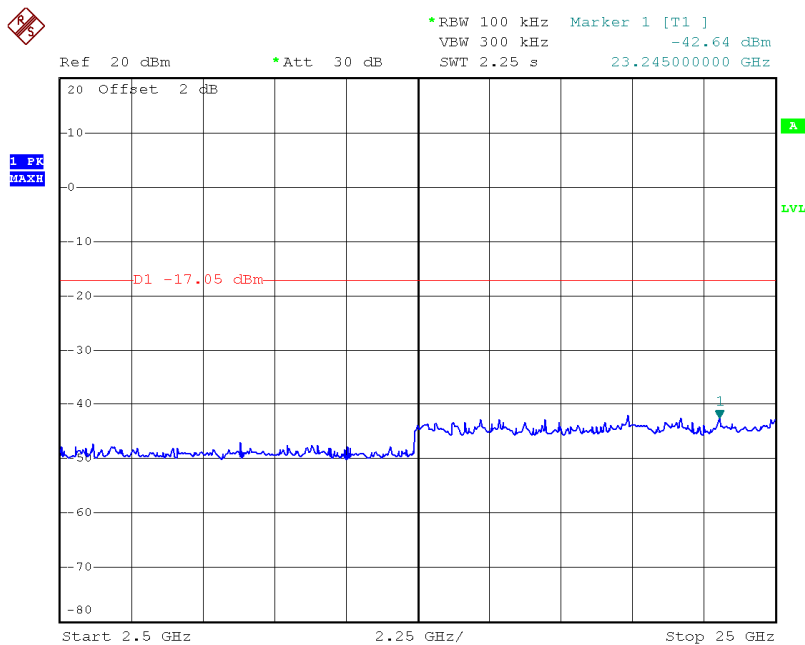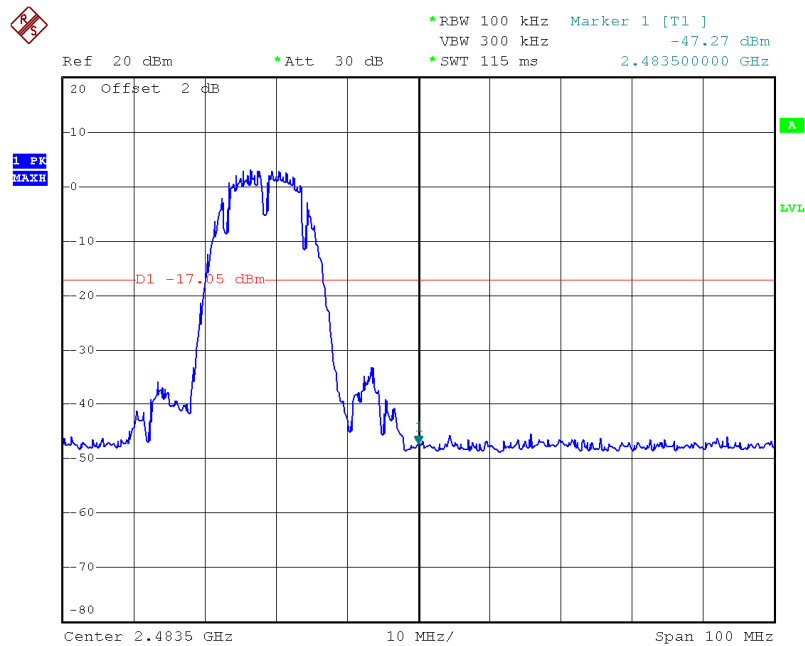





Modulation Standard: 802.11g (54Mbps)

Channel: 01

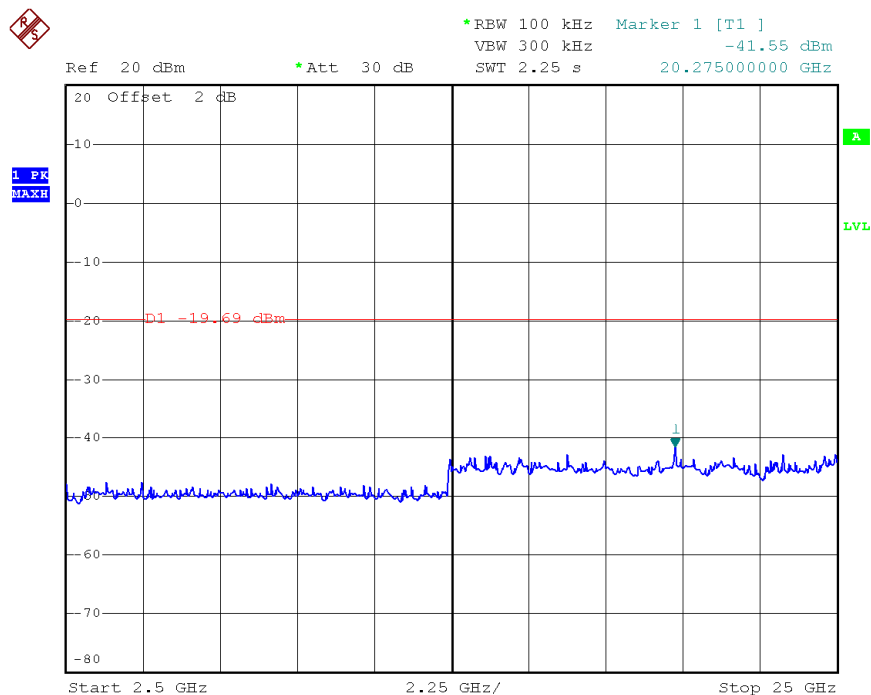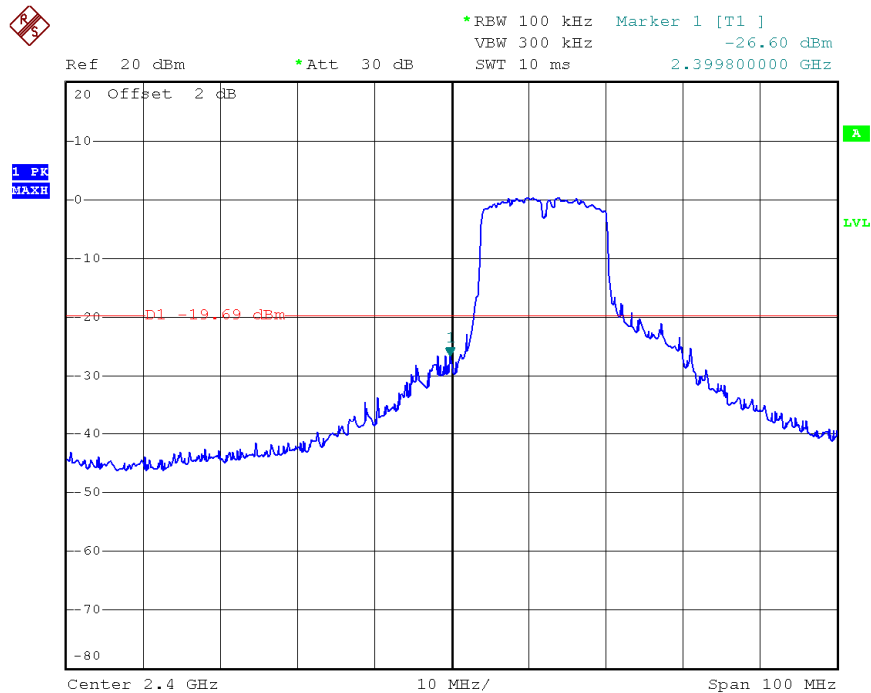





Modulation Standard: 802.11g (54Mbps)
Channel: 11

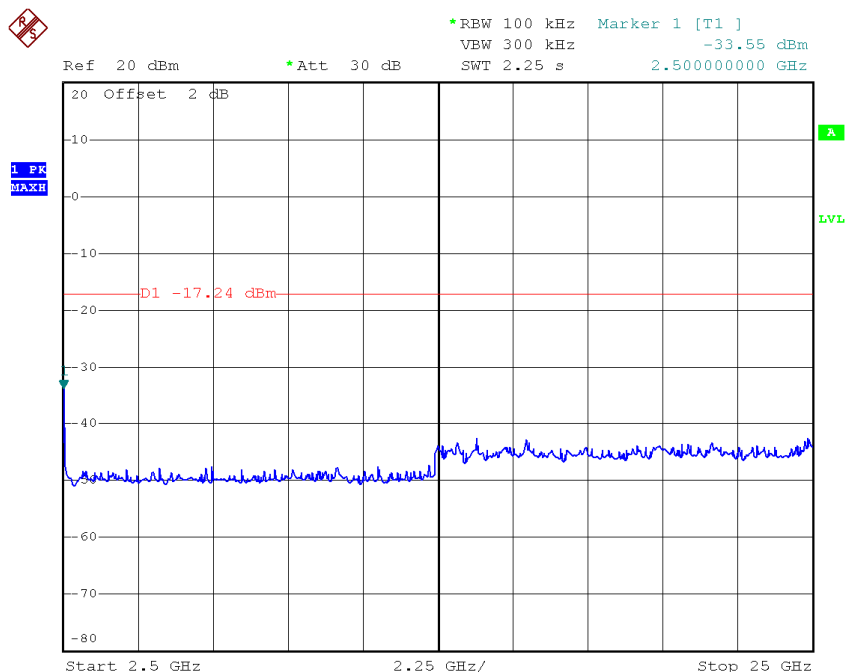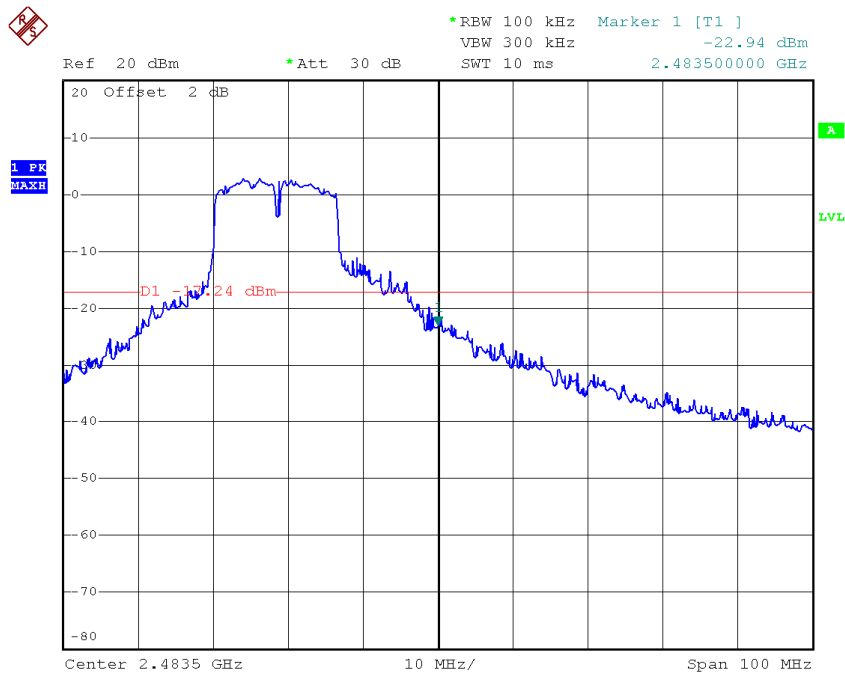





Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 01

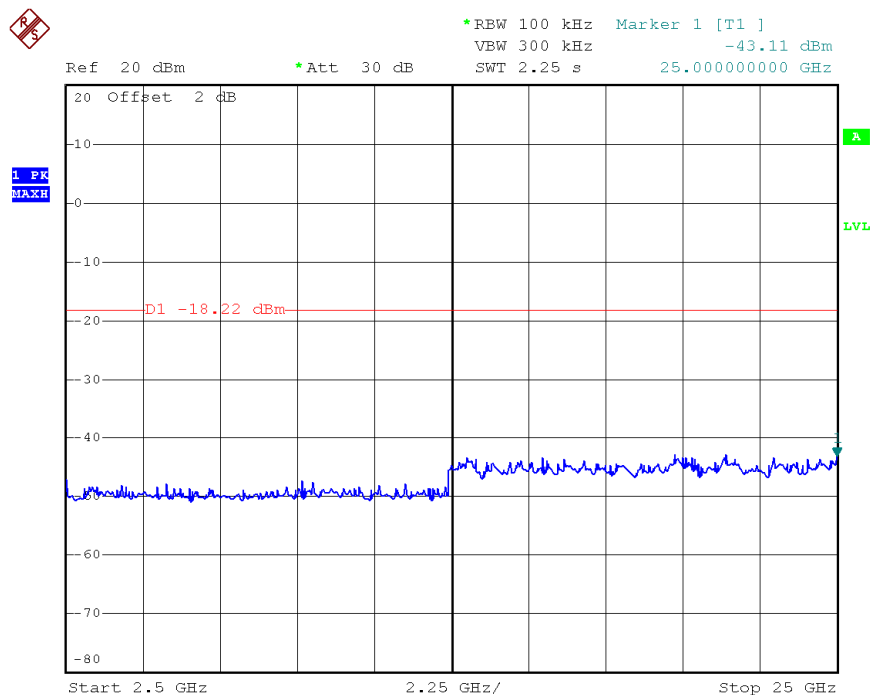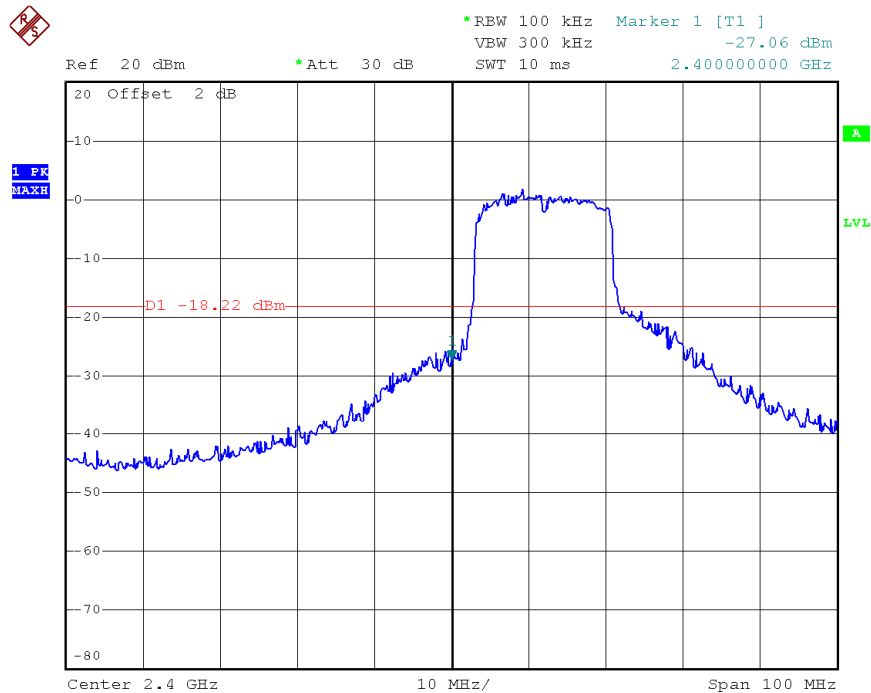



Modulation Standard: 802.11n HT20 (135Mbps)



Channel: 11

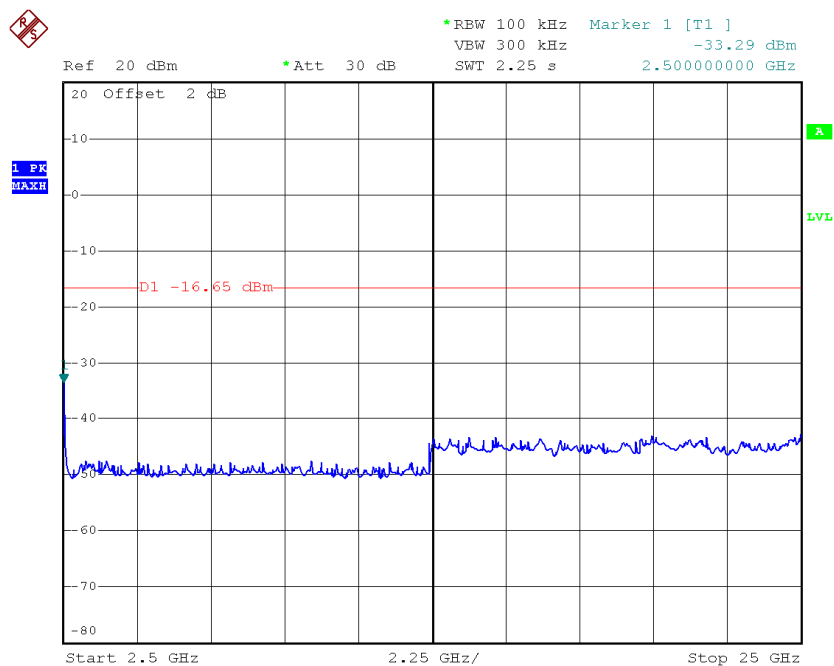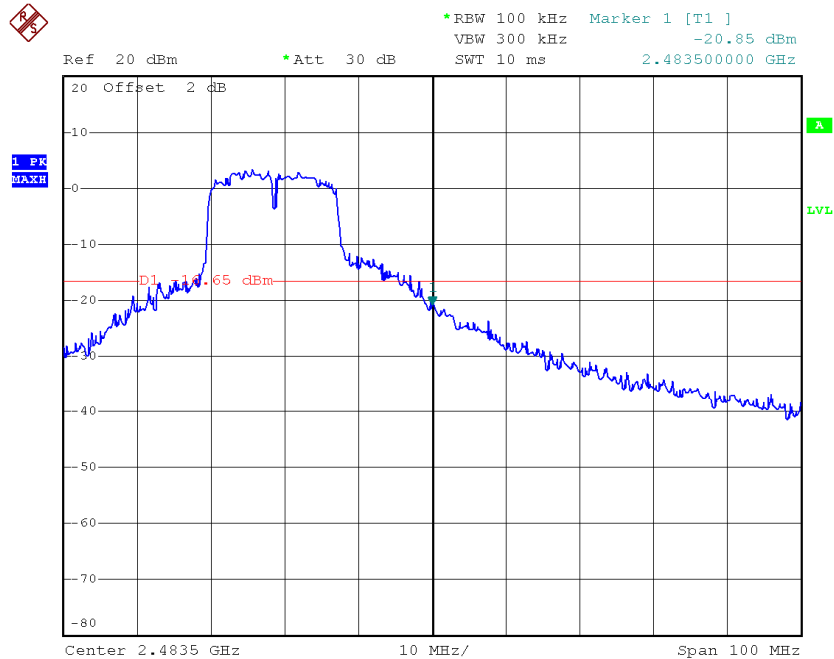





Modulation Standard: 802.11n HT40 (135Mbps)

Channel: 03

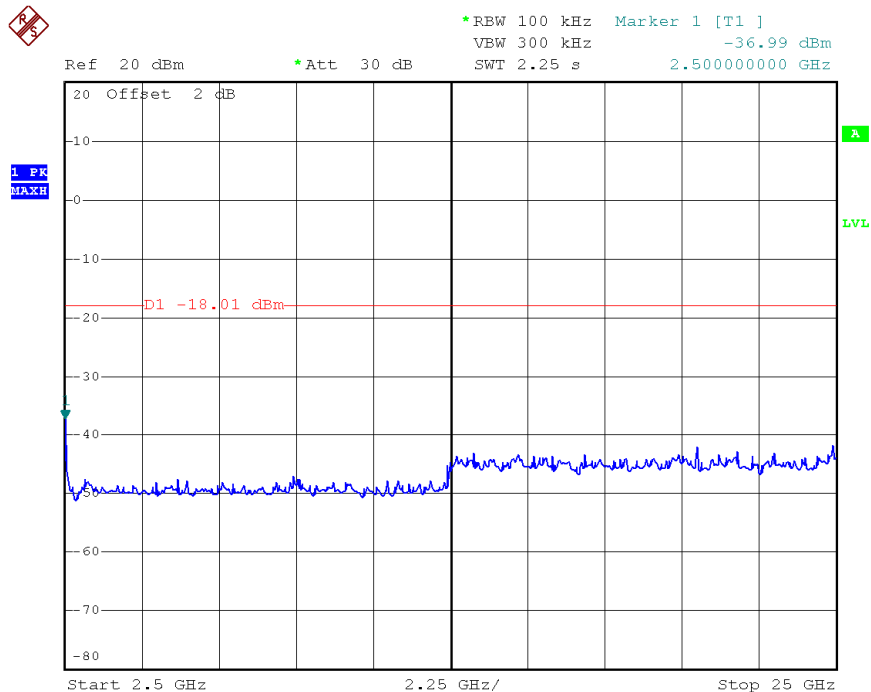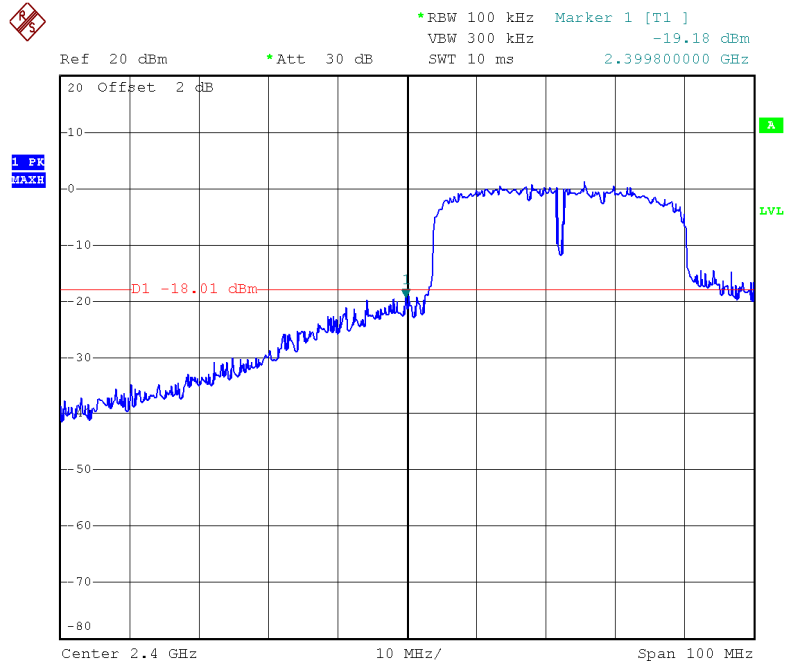



Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 09

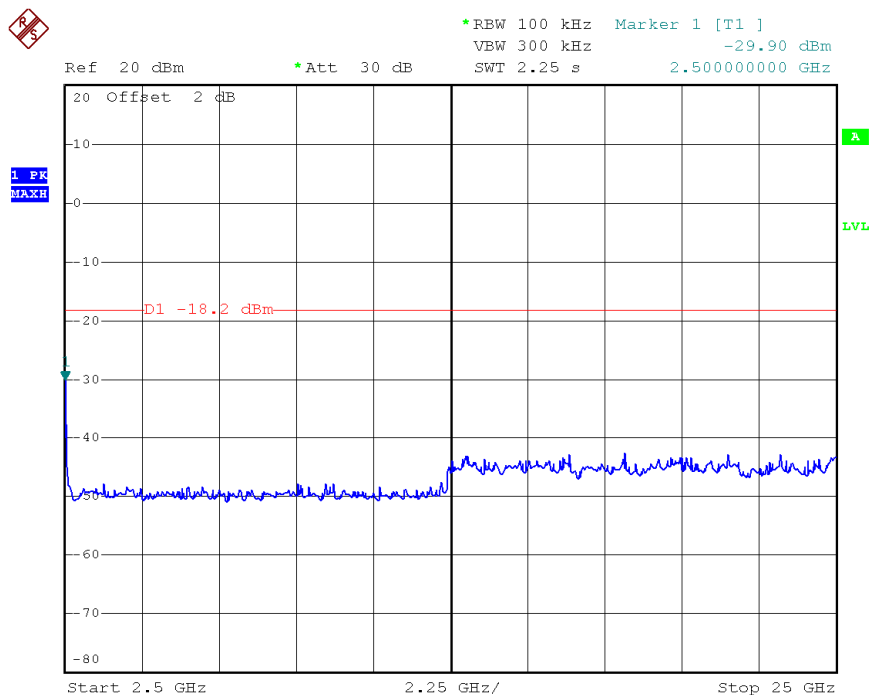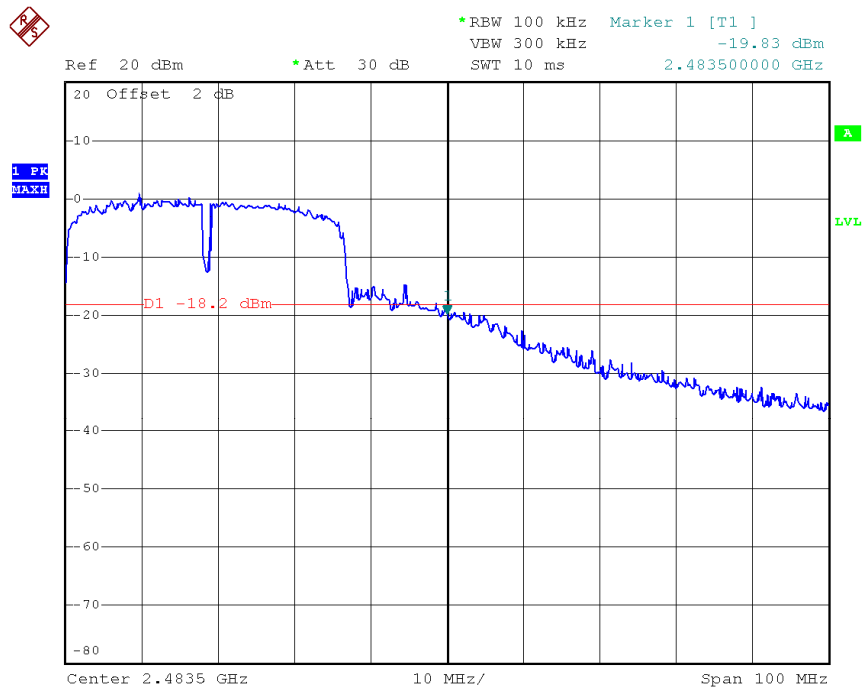



8.6 Restrict Band Emission Measurement Data

Test Date : Mar 22, 2013
 Temperature : 25 °C
 Humidity : 46 %
 Atmospheric Pressure : 1020 hPa
 Test Mode 1 :

Modulation Standard: IEEE 802.11b (11Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (cm)
						Peak	Ave.			
2329.48	H	50.26	10.6	60.86	Peak	74	54	-13.14	360	100
2329.48	H	35.14	10.6	45.74	Ave	74	54	-8.26	360	100
2359.28	V	54.27	10.98	65.25	Peak	74	54	-8.75	360	100
2359.28	V	36.17	10.98	47.15	Ave	74	54	-6.85	0	100
Channel 11						Fundamental Frequency: 2462 MHz				
2499.74	H	48.62	10.72	59.34	Peak	74	54	-14.66	50	100
2499.74	H	32.57	10.72	43.29	Ave	74	54	-10.71	50	100
2483.52	V	51.96	11.02	62.98	Peak	74	54	-11.02	0	100
2483.52	V	36.98	11.02	48.00	Ave	74	54	-6.00	180	100

Modulation Standard: IEEE 802.11g (54Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (cm)
						Peak	Ave.			
2312.45	H	50.53	10.54	61.07	Peak	74	54	-12.93	34	100
2312.45	H	31.87	10.54	42.41	Ave	74	54	-11.59	34	100
2359.62	V	51.36	10.98	62.34	Peak	74	54	-11.66	266	100
2359.62	V	34.59	10.98	45.57	Ave	74	54	-8.43	266	100
Channel 11						Fundamental Frequency: 2462 MHz				
2499.33	H	52.39	10.72	63.11	Peak	74	54	-10.89	360	100
2499.33	H	32.08	10.72	42.80	Ave	74	54	-11.20	360	100
2483.27	V	54.03	11.02	65.05	Peak	74	54	-8.95	103	100
2483.27	V	37.15	11.02	48.17	Ave	74	54	-5.83	103	100



Modulation Standard: IEEE 802.11n HT20 (135Mbps)

Channel 1						Fundamental Frequency: 2412 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (cm)
						Peak	Ave.			
2340.57	H	50.96	10.55	61.51	Peak	74	54	-12.49	0	100
2340.57	H	27.14	10.55	37.69	Ave	74	54	-16.31	0	100
2359.39	V	51.88	10.99	62.87	Peak	74	54	-11.13	360	100
2359.39	V	28.69	10.99	39.68	Ave	74	54	-14.32	360	100
Channel 11						Fundamental Frequency: 2462 MHz				
2496.17	H	48.96	10.71	59.67	Peak	74	54	-14.33	360	100
2496.17	H	34.96	10.71	45.67	Ave	74	54	-8.33	-----	-----
2496.39	V	51.26	11.01	62.27	Peak	74	54	-11.73	0	100
2496.39	V	36.59	11.01	47.60	Ave	74	54	-6.40	0	100

Modulation Standard: IEEE 802.11n HT40 (135Mbps)

Channel 3						Fundamental Frequency: 2422 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (cm)
						Peak	Ave.			
2323.78	H	51.63	10.53	62.16	Peak	74	54	-11.84	0	100
2323.78	H	33.17	10.53	43.70	Ave	74	54	-10.30	0	100
2388.41	V	52.67	10.97	63.64	Peak	74	54	-10.36	360	100
2388.41	V	29.67	10.97	40.64	Ave	74	54	-13.36	360	100
Channel 9						Fundamental Frequency: 2452 MHz				
2494.53	H	50.33	10.7	61.03	Peak	74	54	-12.97	360	100
2494.53	H	32.47	10.7	43.17	Ave	74	54	-10.83	360	100
2483.93	V	54.89	11.01	65.9	Peak	74	54	-8.1	360	100
2483.93	V	28.69	11.01	39.7	Ave	74	54	-14.3	0	100

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz.



9. Power Spectral Density


9.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

9.2 Test Procedures

- The transmitter output was connected to spectrum analyzer.
- The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
- The power spectral density was measured and recorded.
- Set the analyzer span to at least 1.5 times the DTS channel bandwidth.

9.3 Test Setup Layout



9.4 Measurement equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date	Valid Date
Spectrum Analyzer	FSP40	R&S	100324	2013.03.10	2014.03.09

9.5 Test Result and Data

Test Date: Mar 22, 2013

Temperature: 25 °C

Atmospheric pressure: 1020 hPa


Humidity: 46 %

Modulation Standard	Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)
802.11b (11Mbps)	01	2412	-10.11
	06	2437	-12.63
	11	2462	-14.69
802.11g (54Mbps)	01	2412	-14.01
	06	2437	-14.36
	11	2462	-16.10
802.11n HT20 (135Mbps)	01	2412	-12.78
	06	2437	-13.80
	11	2462	-15.80
802.11n HT40 (135Mbps)	03	2422	-15.56
	06	2437	-16.03
	09	2452	-17.37




Modulation Standard: 802.11b (11Mbps)

Channel: 01

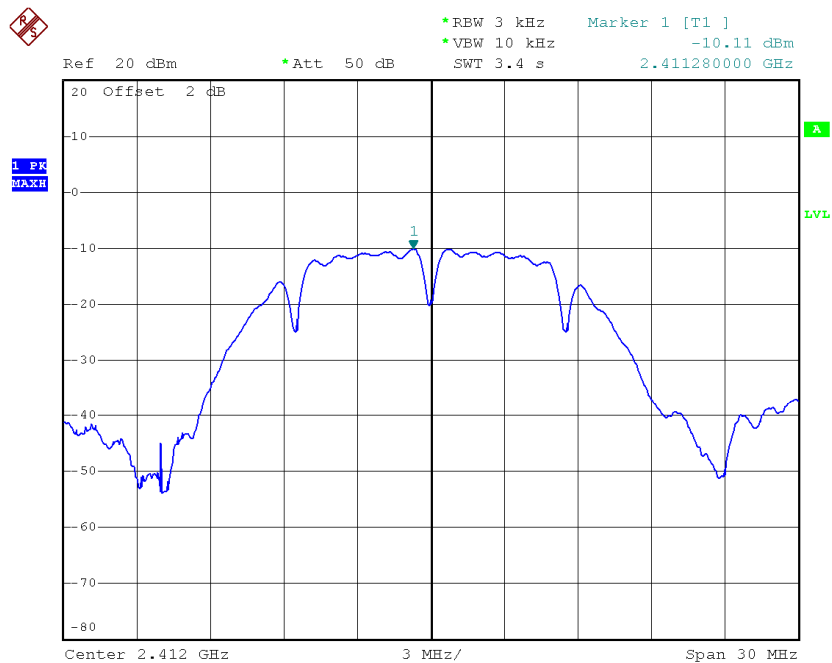


Modulation Standard: 802.11b (11Mbps)

Channel: 06

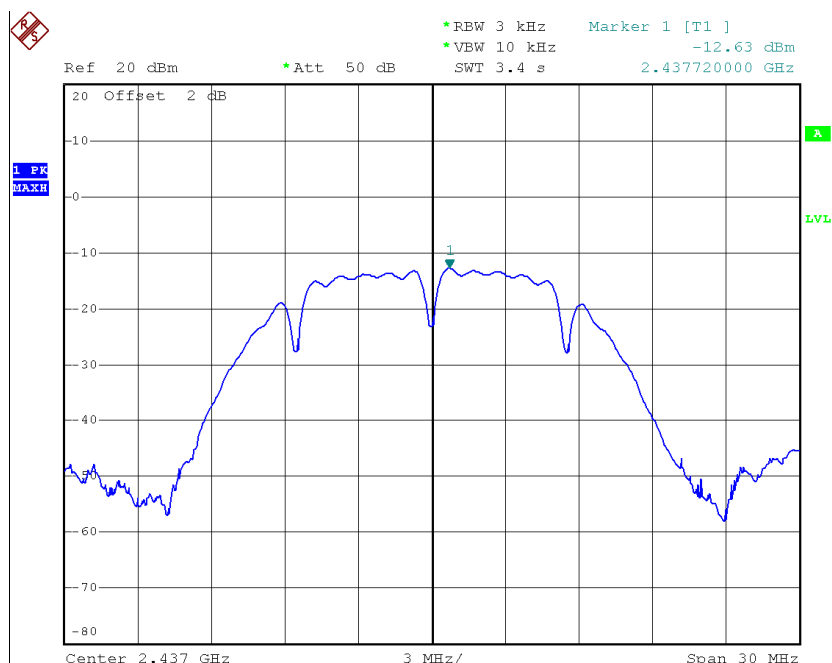




Modulation Standard: 802.11b (11Mbps)
Channel: 11

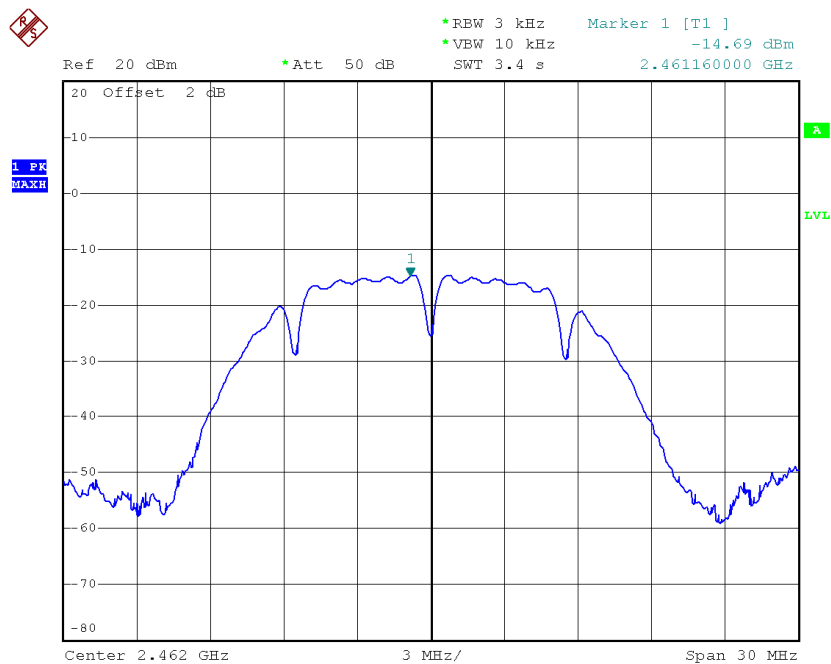


Modulation Standard: 802.11g (54Mbps)
Channel: 01

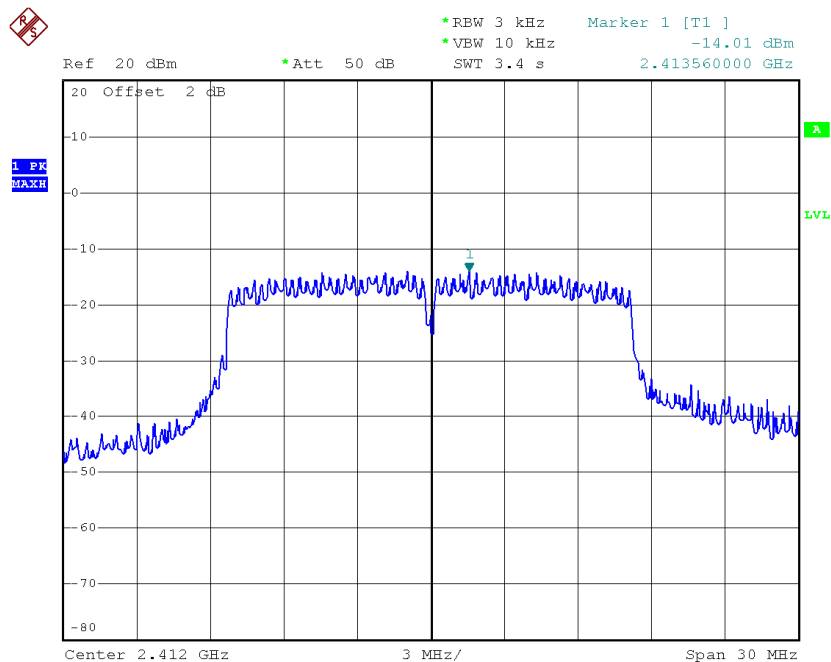




Modulation Standard: 802.11g (54Mbps)
Channel: 06

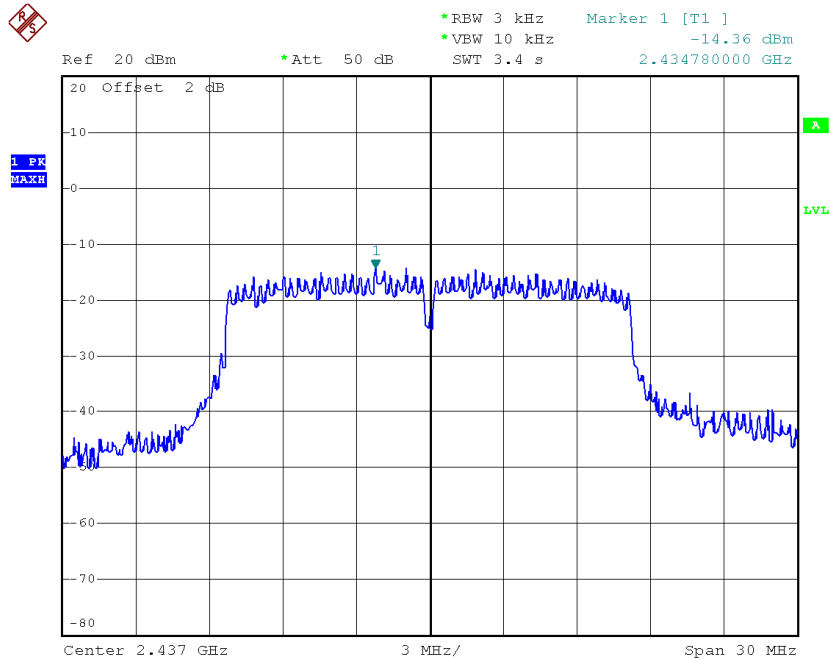


Modulation Standard: 802.11g (54Mbps)
Channel: 11

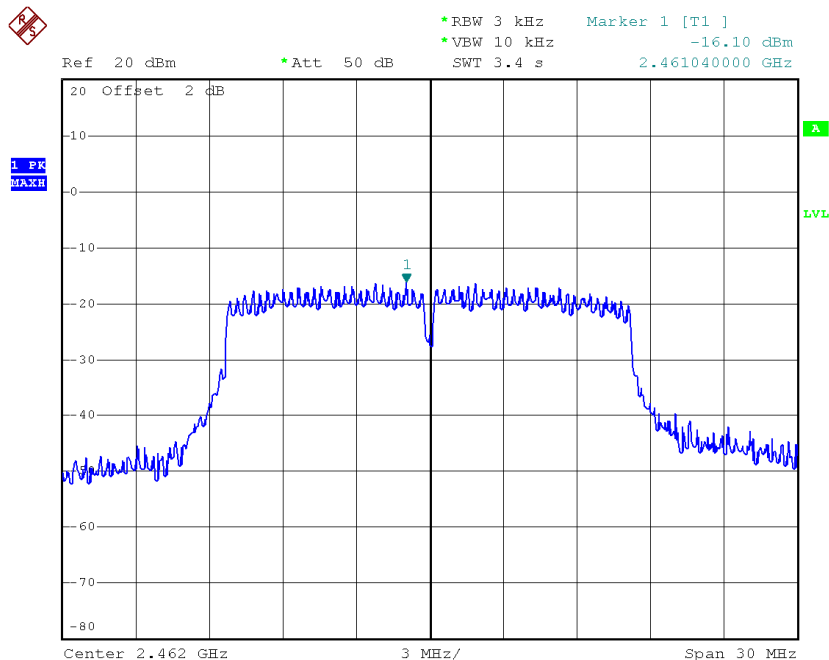




Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 01

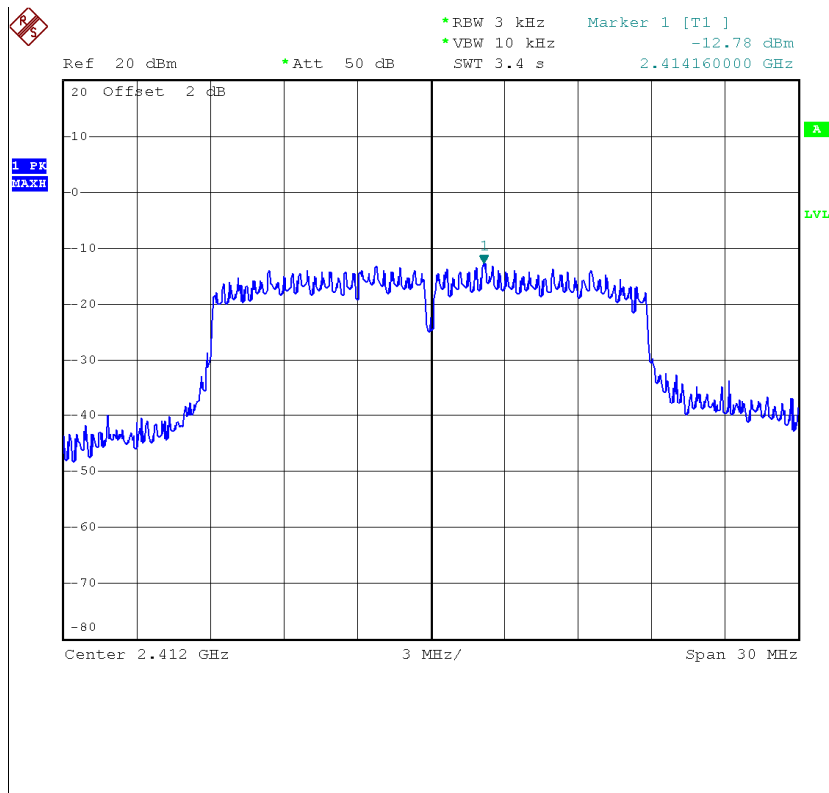


Modulation Standard: 802.11n HT20 (135Mbps)
Channel: 06

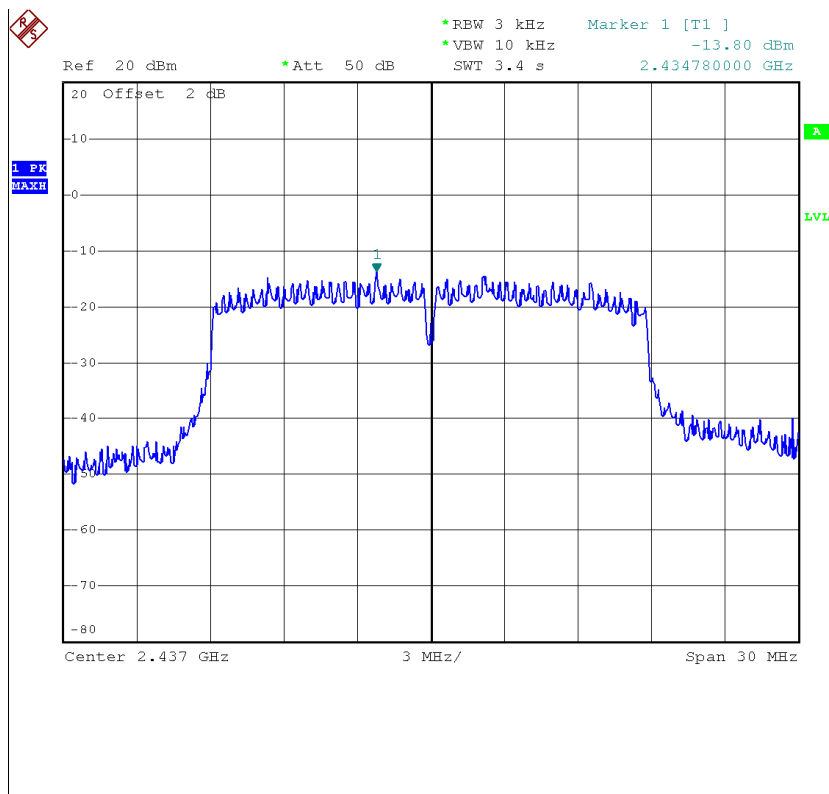




Modulation Standard: 802.11n HT20 (135Mbps)

Channel: 11

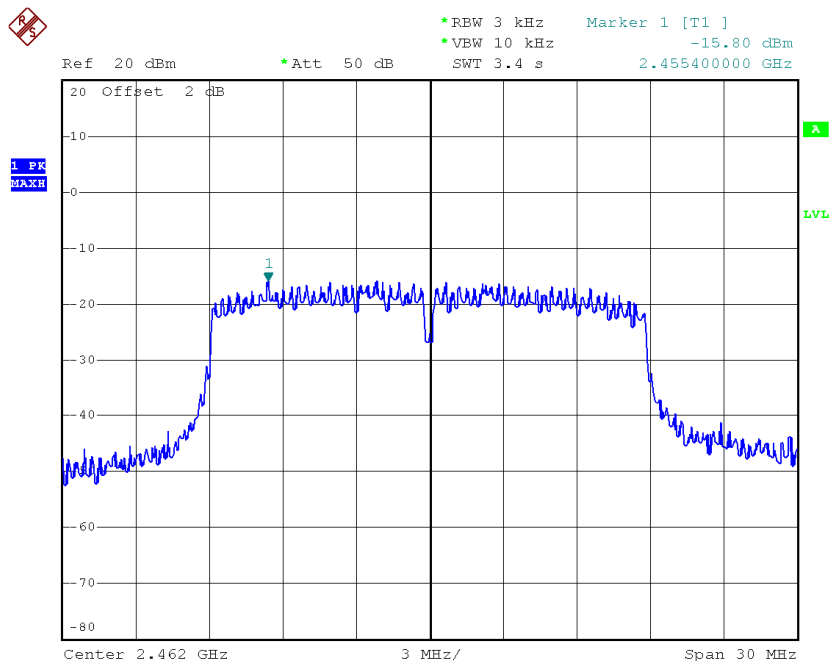


Modulation Standard: 802.11n HT40 (135Mbps)

Channel: 03

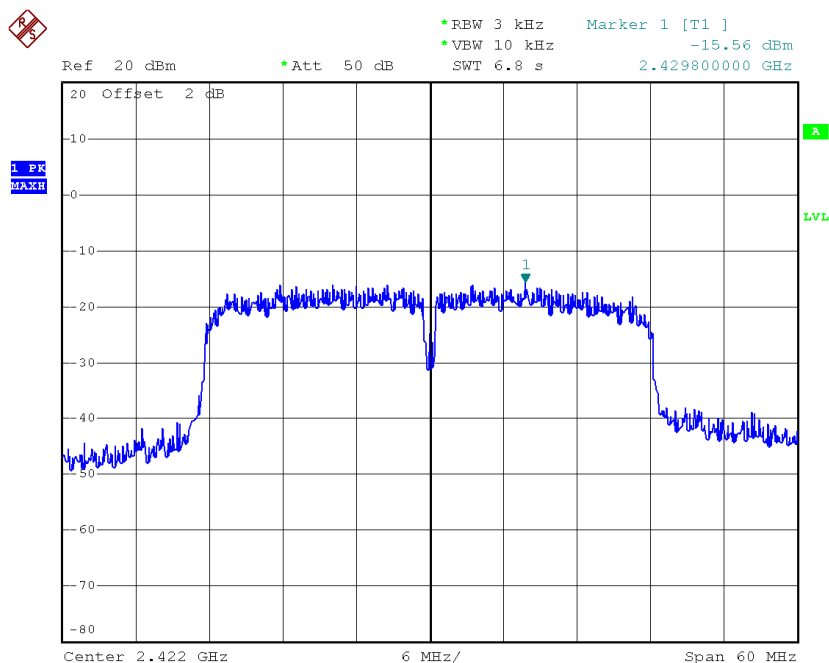




Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 06

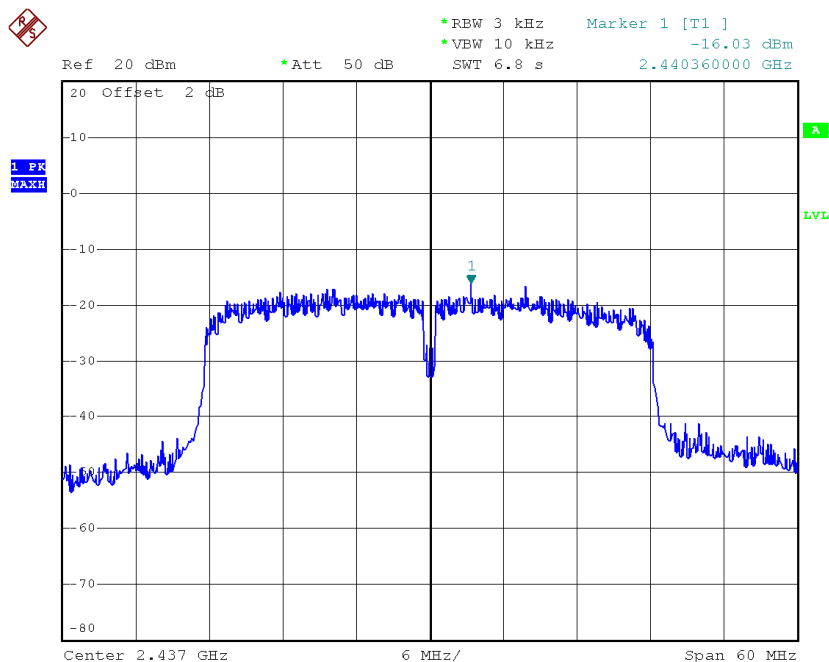

Modulation Standard: 802.11n HT40 (135Mbps)
Channel: 09

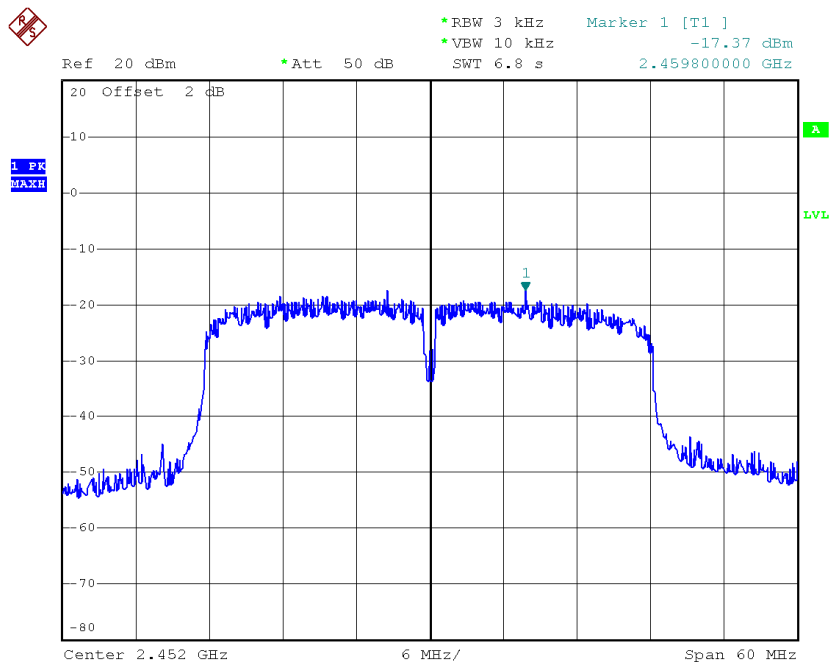



10. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

10.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.