

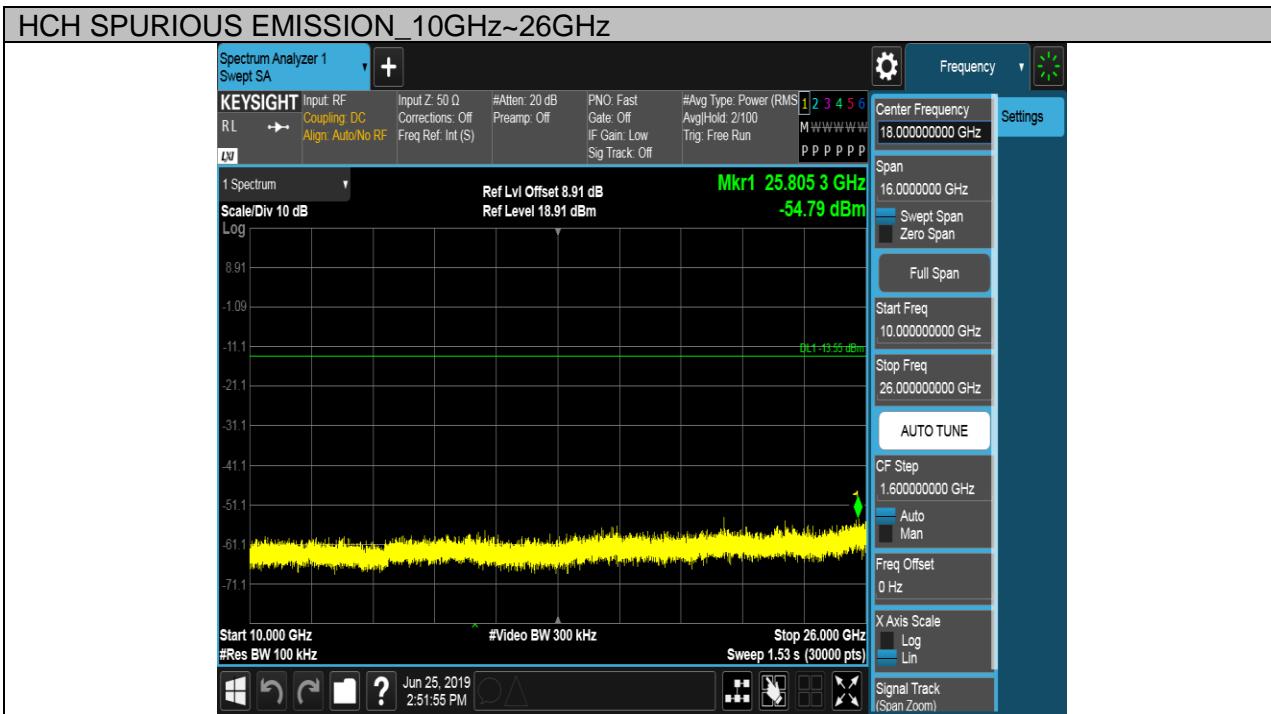


Puw test Plot


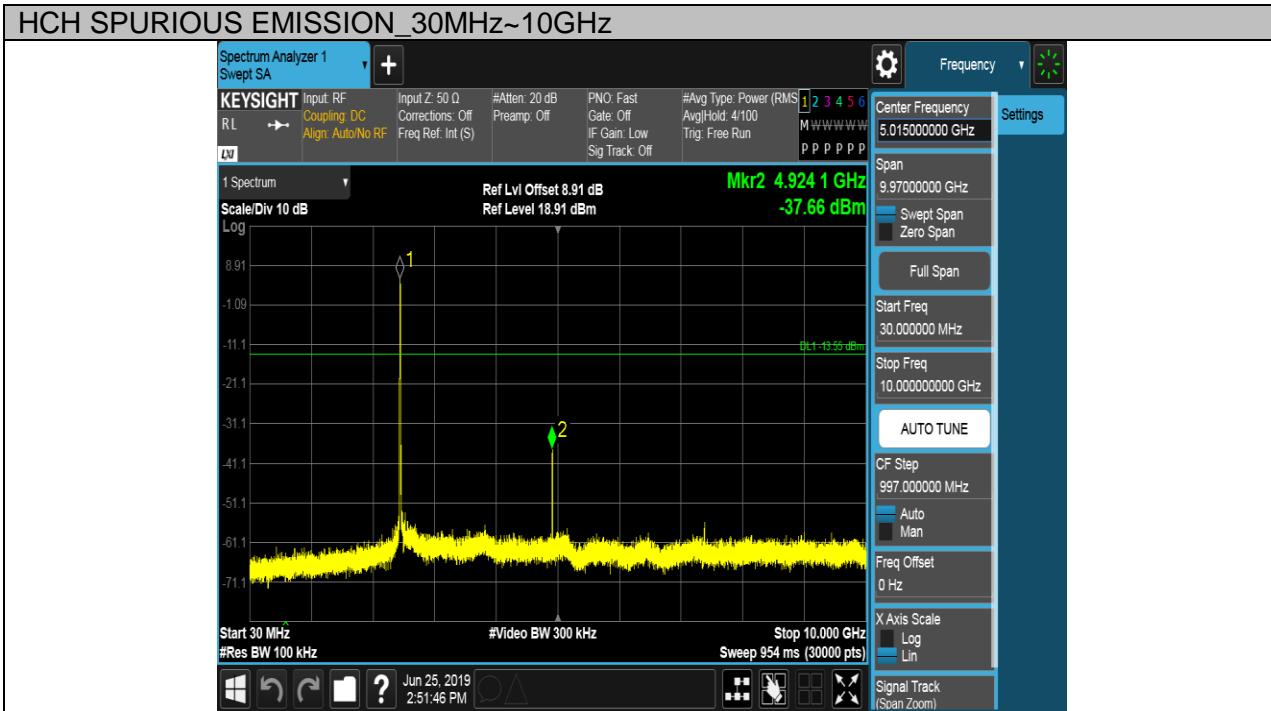


Test Mode	Channel	Verdict
11G	LCH	PASS

Pref test Plot

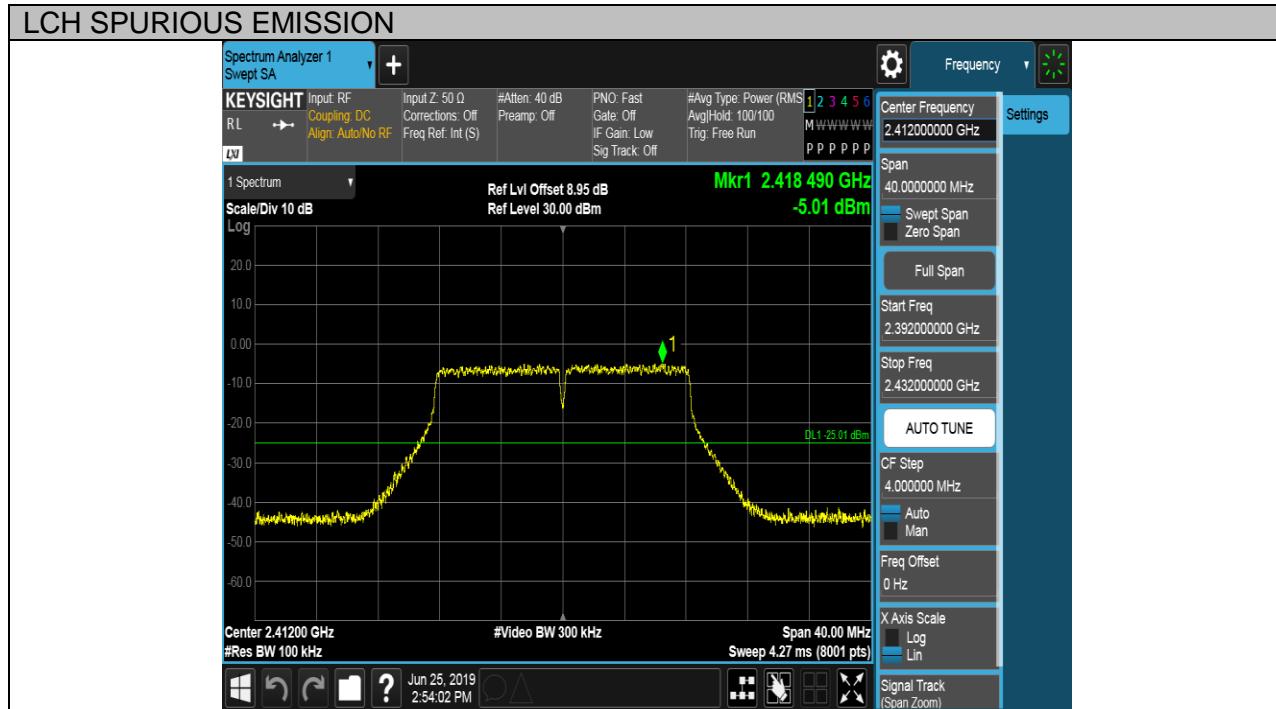


Puw test Plot

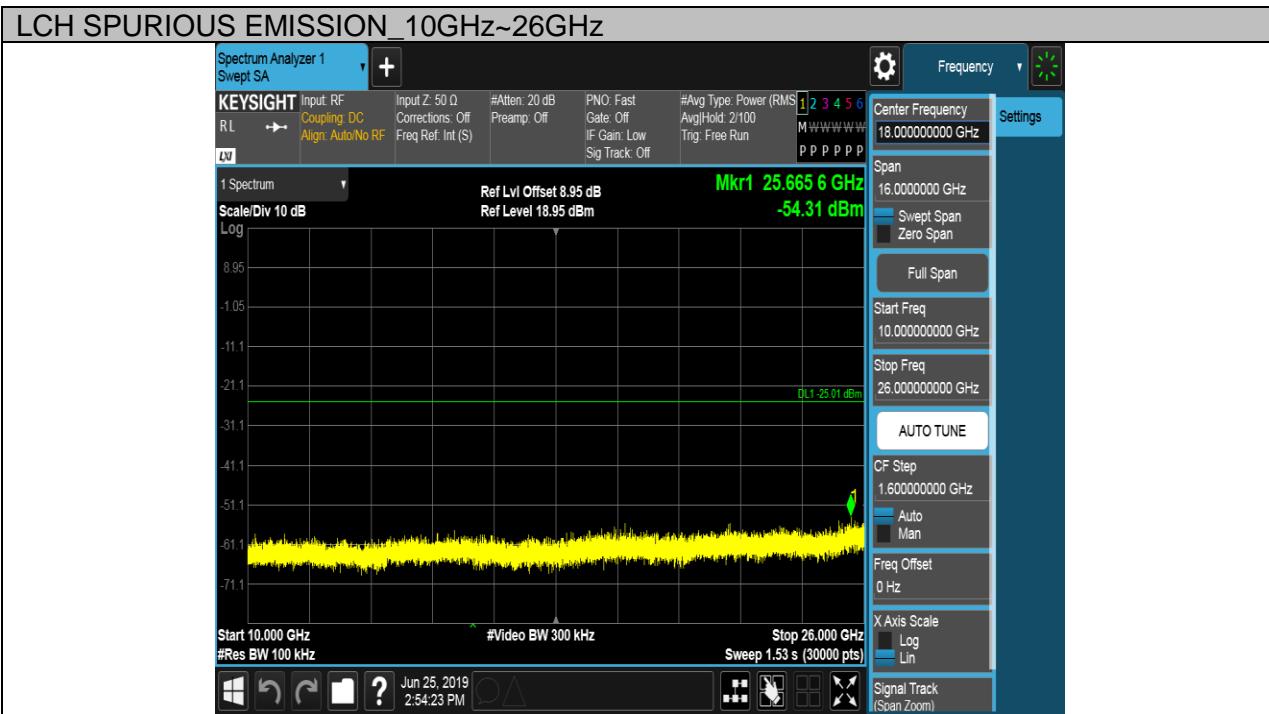
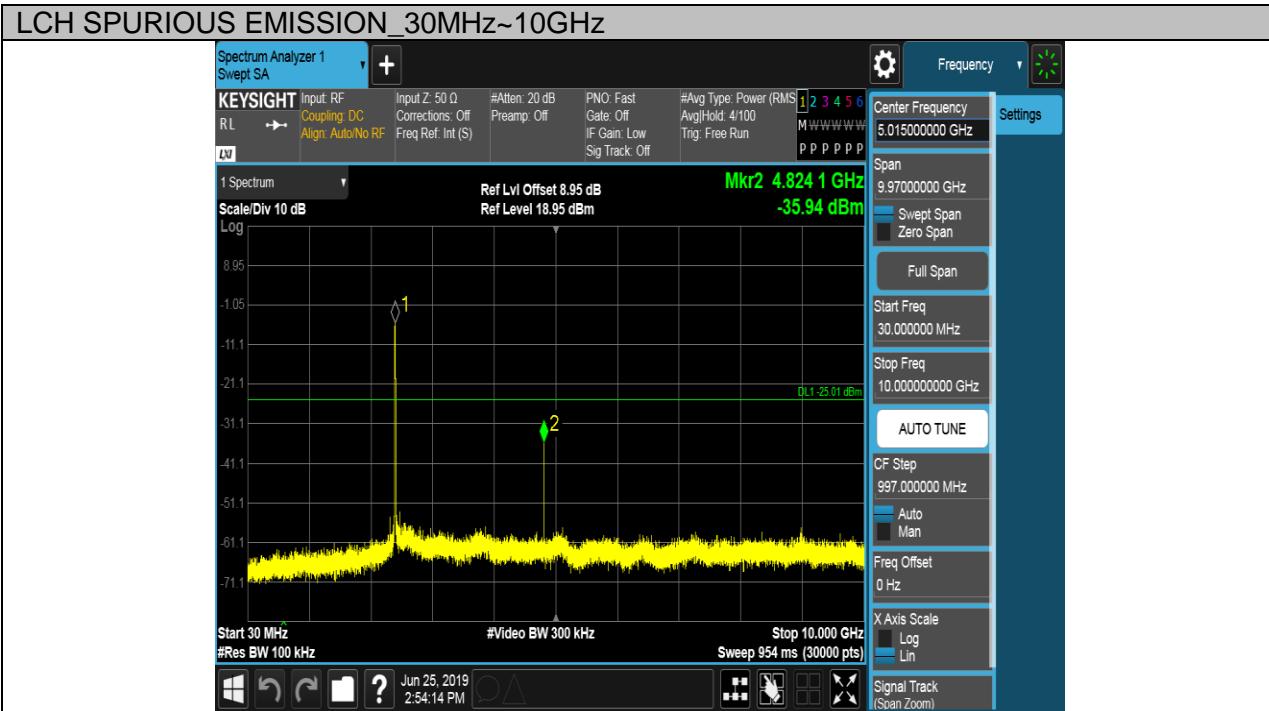


Test Mode	Channel	Verdict
11G	MCH	PASS

Pref test Plot

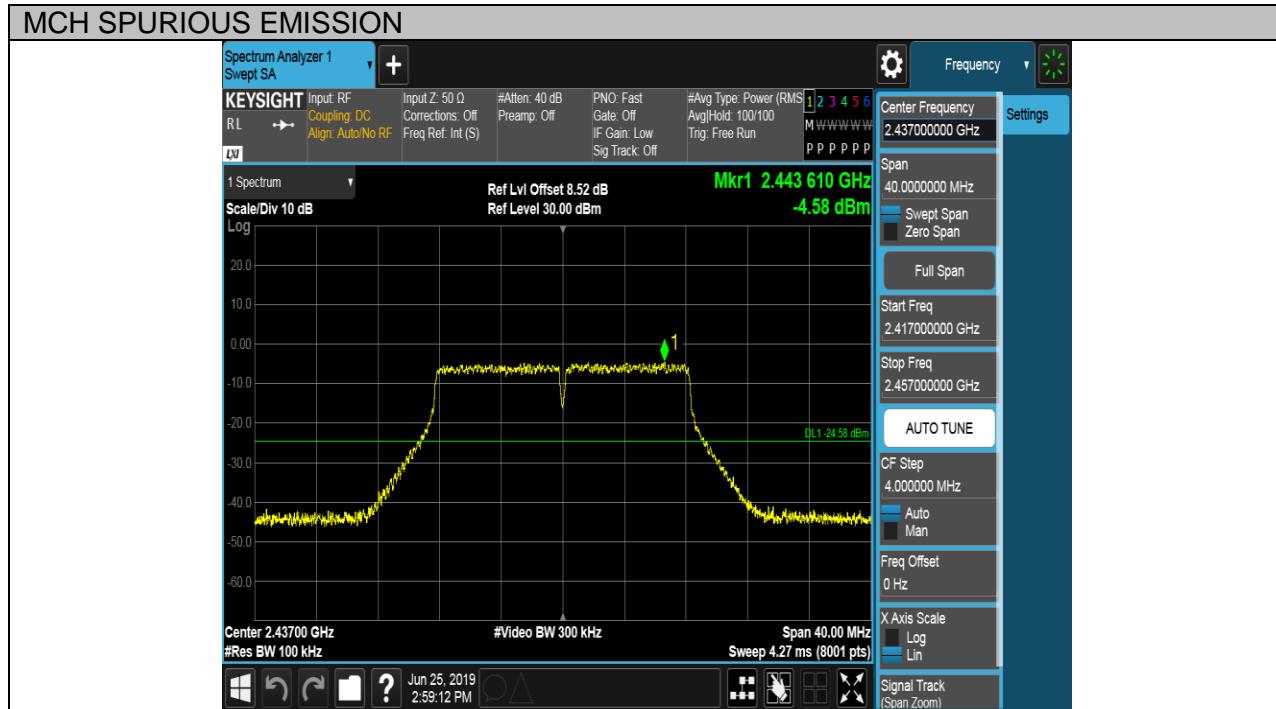


Puw test Plot

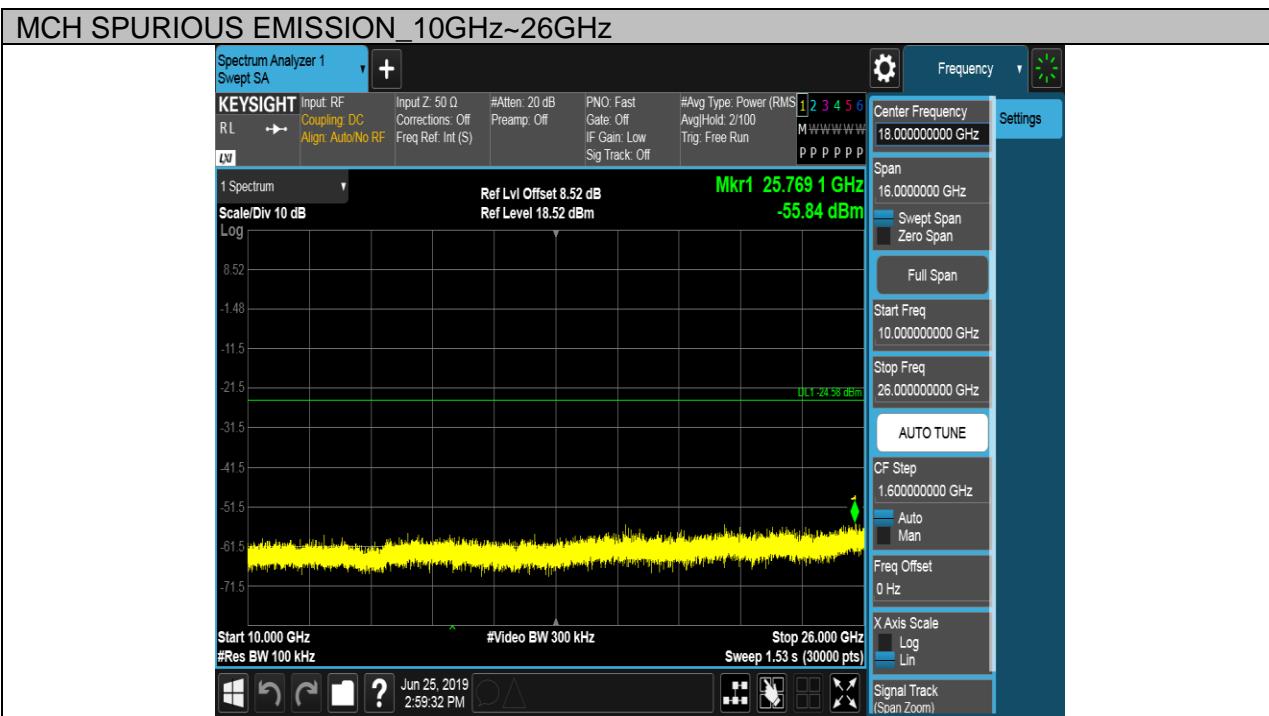
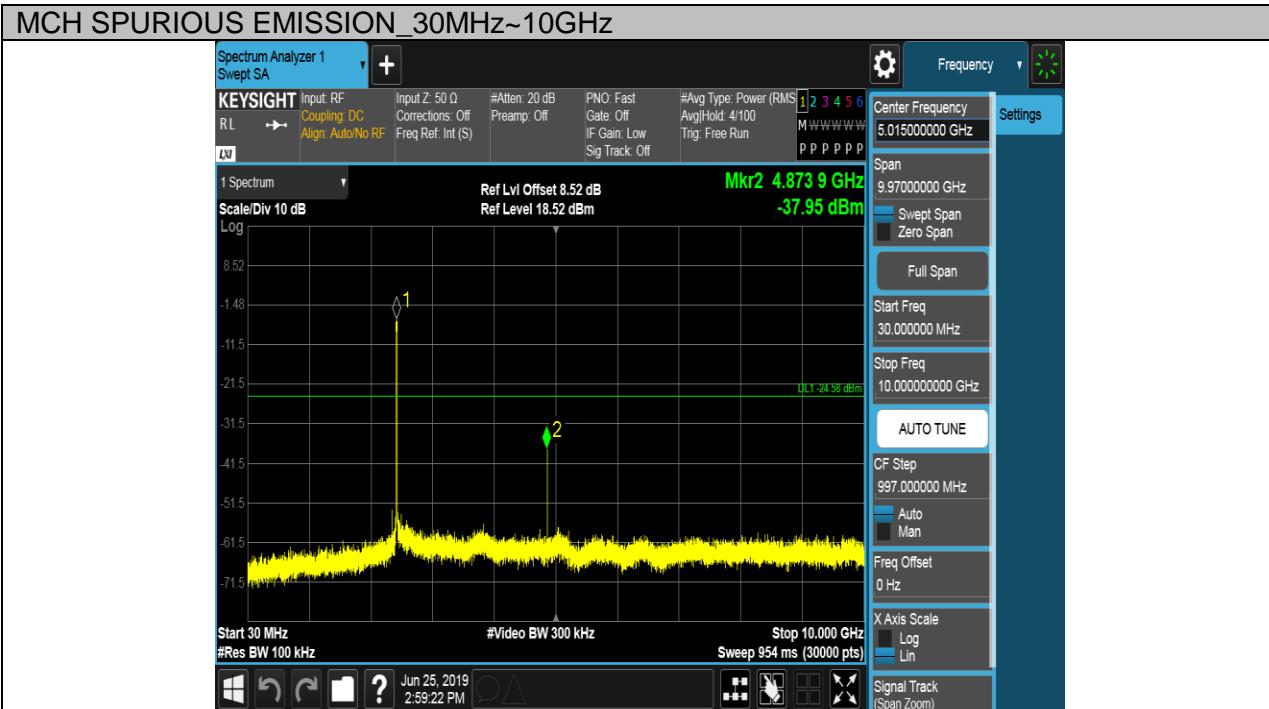


Test Mode	Channel	Verdict
11G	HCH	PASS

Pref test Plot

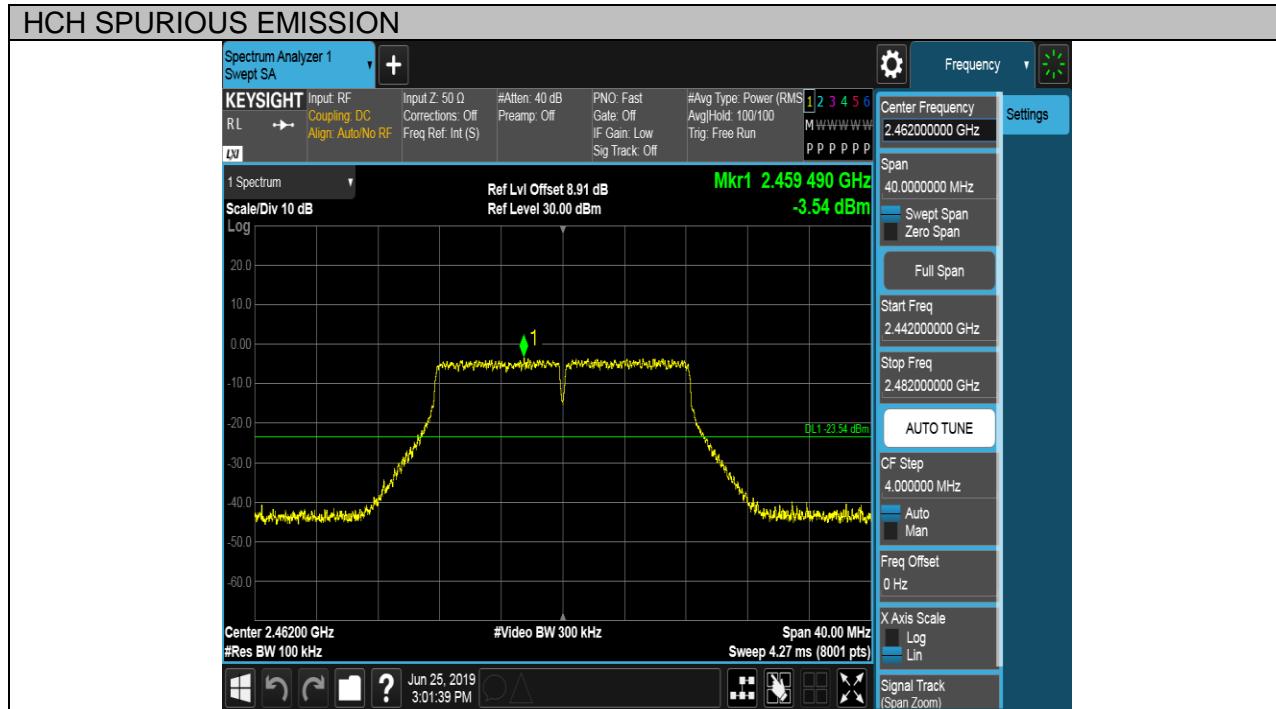


Puw test Plot

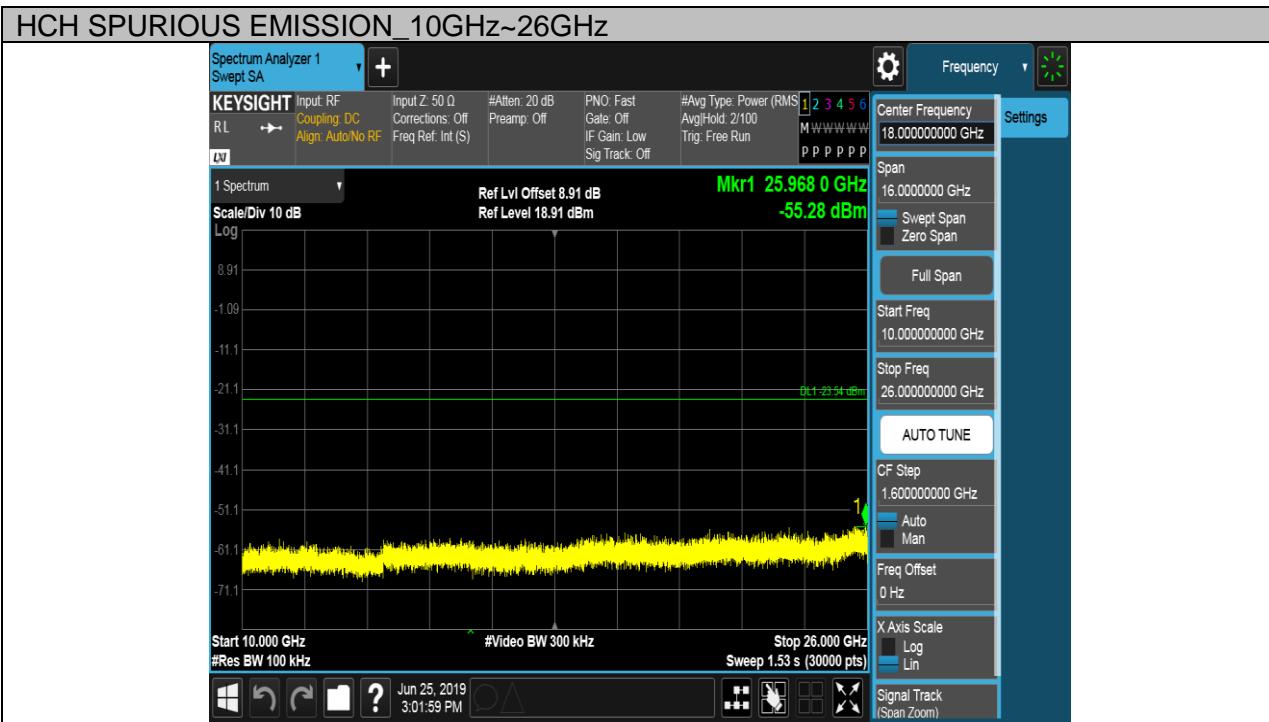
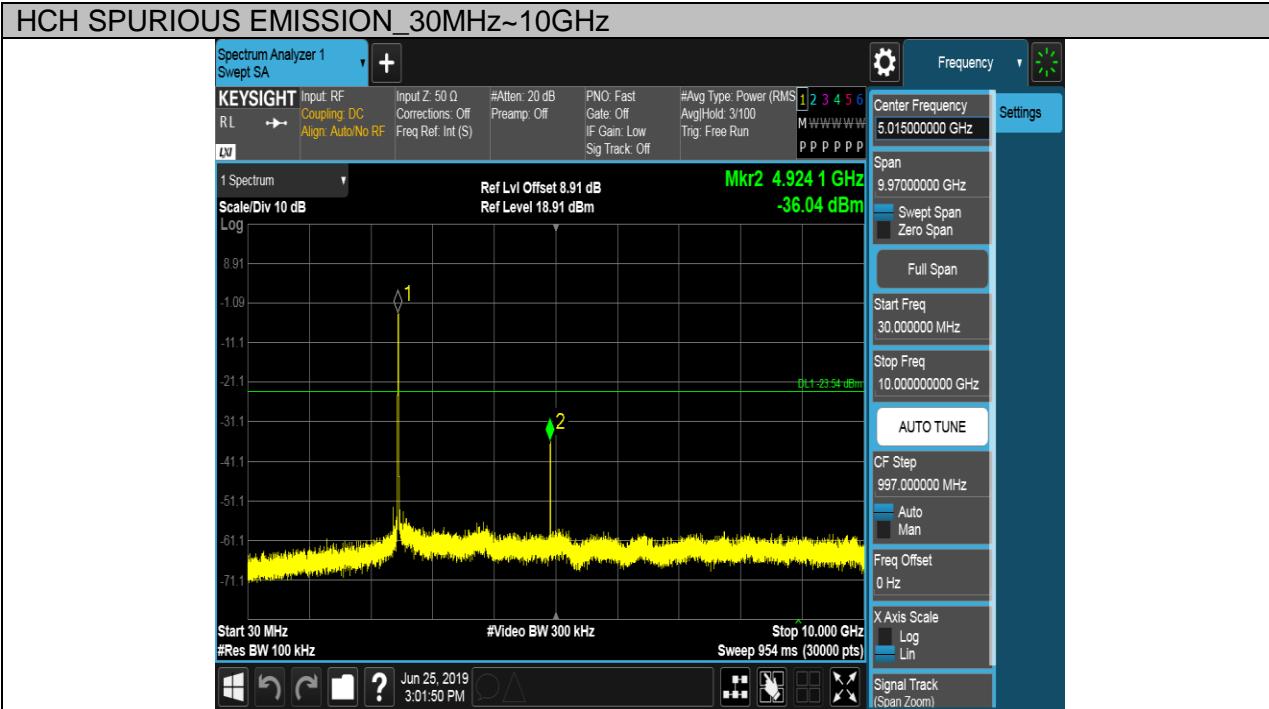


Test Mode	Channel	Verdict
11N HT20	LCH	PASS

Pref test Plot

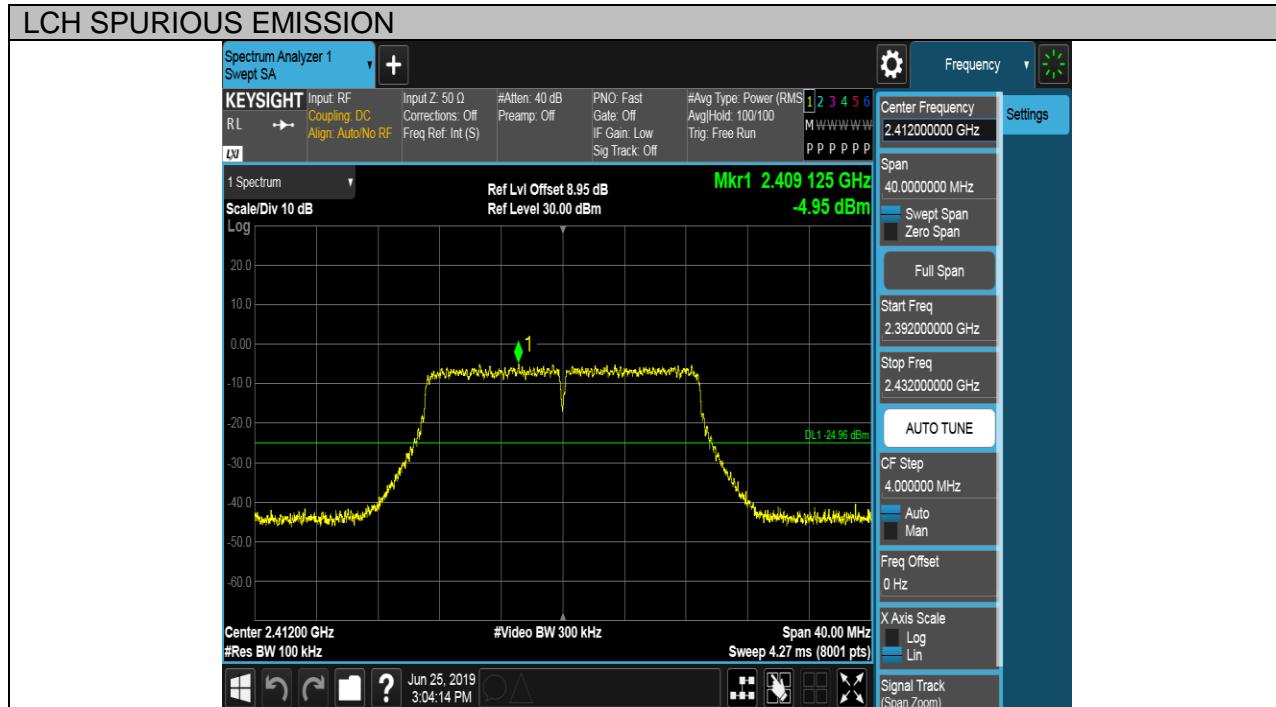


Puw test Plot

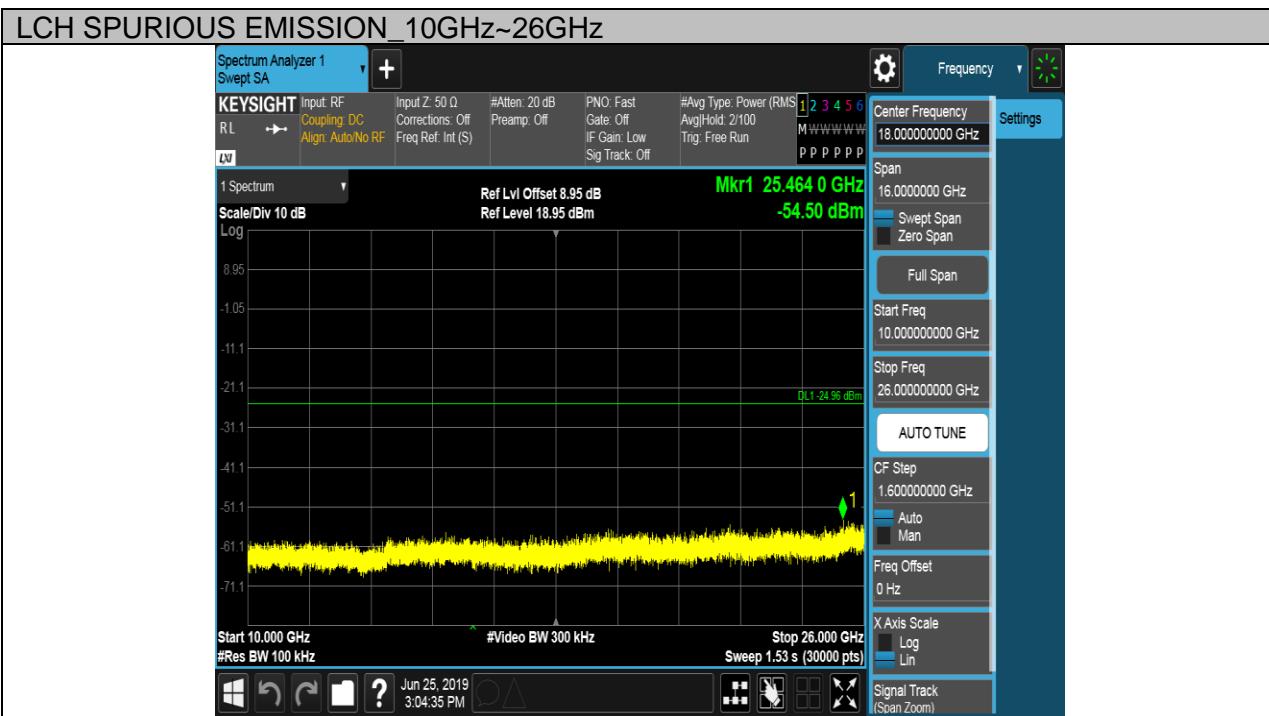
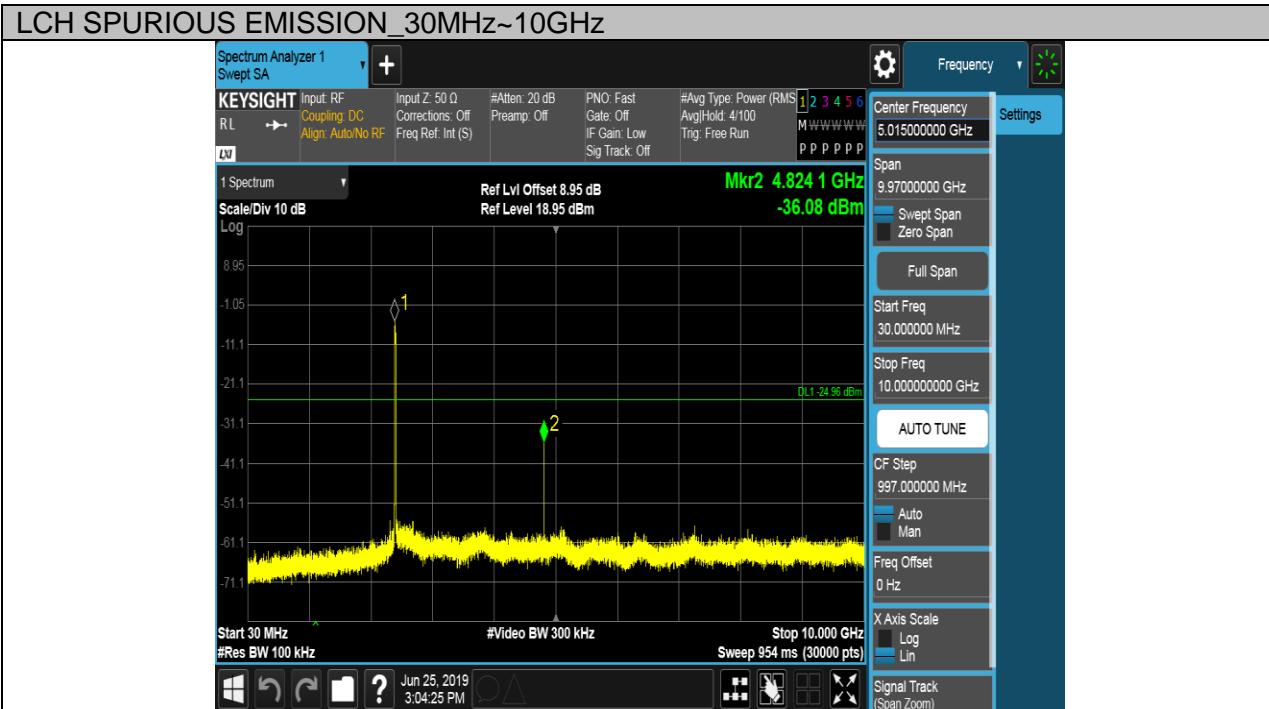


Test Mode	Channel	Verdict
11N HT20	MCH	PASS

Pref test Plot

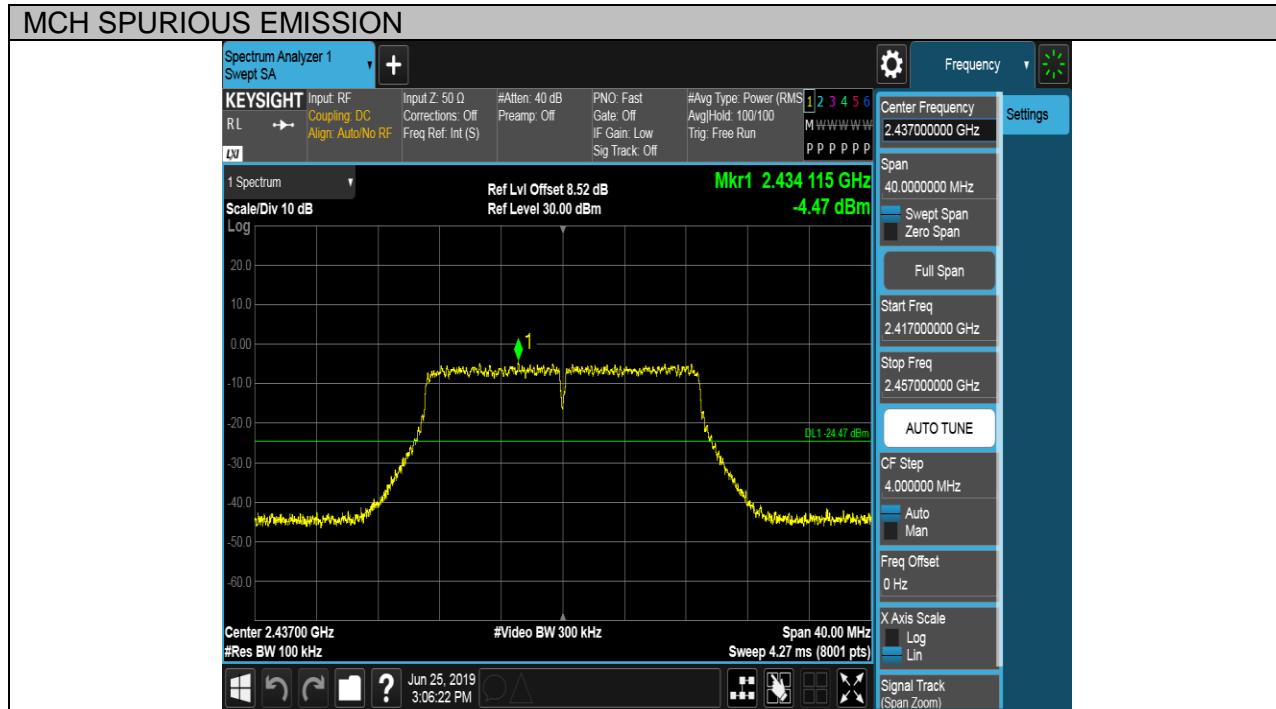


Puw test Plot

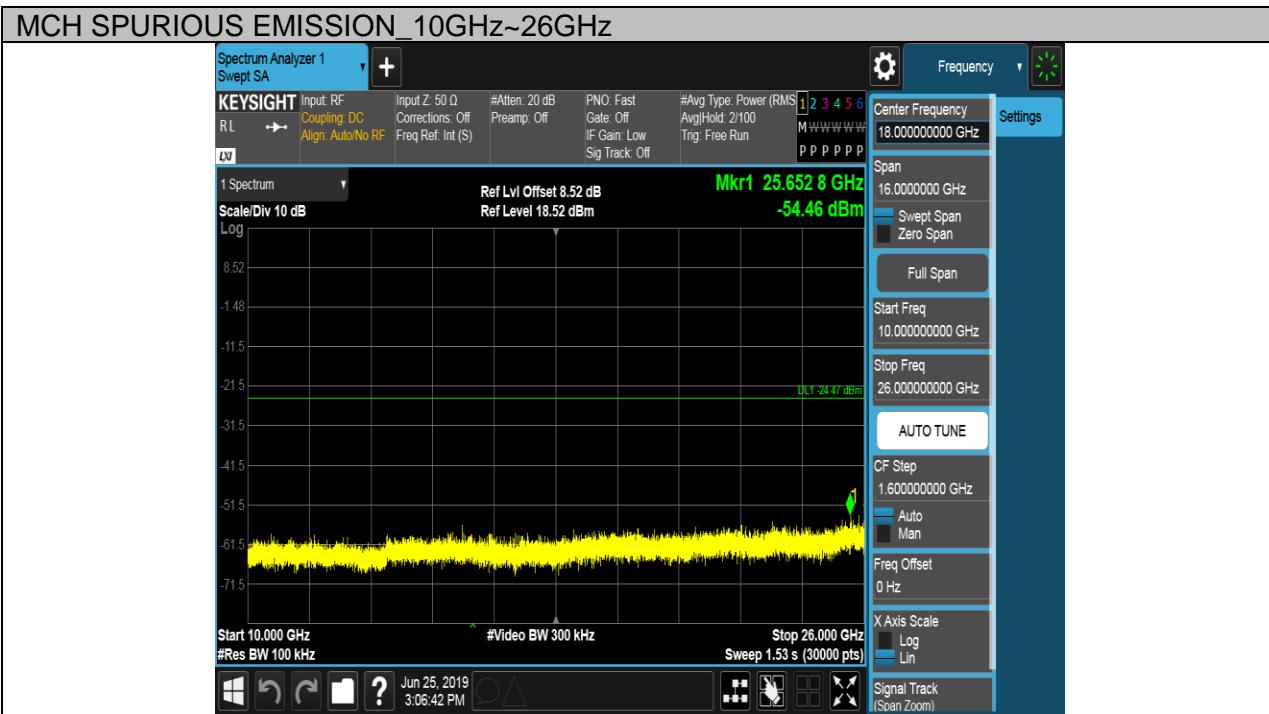
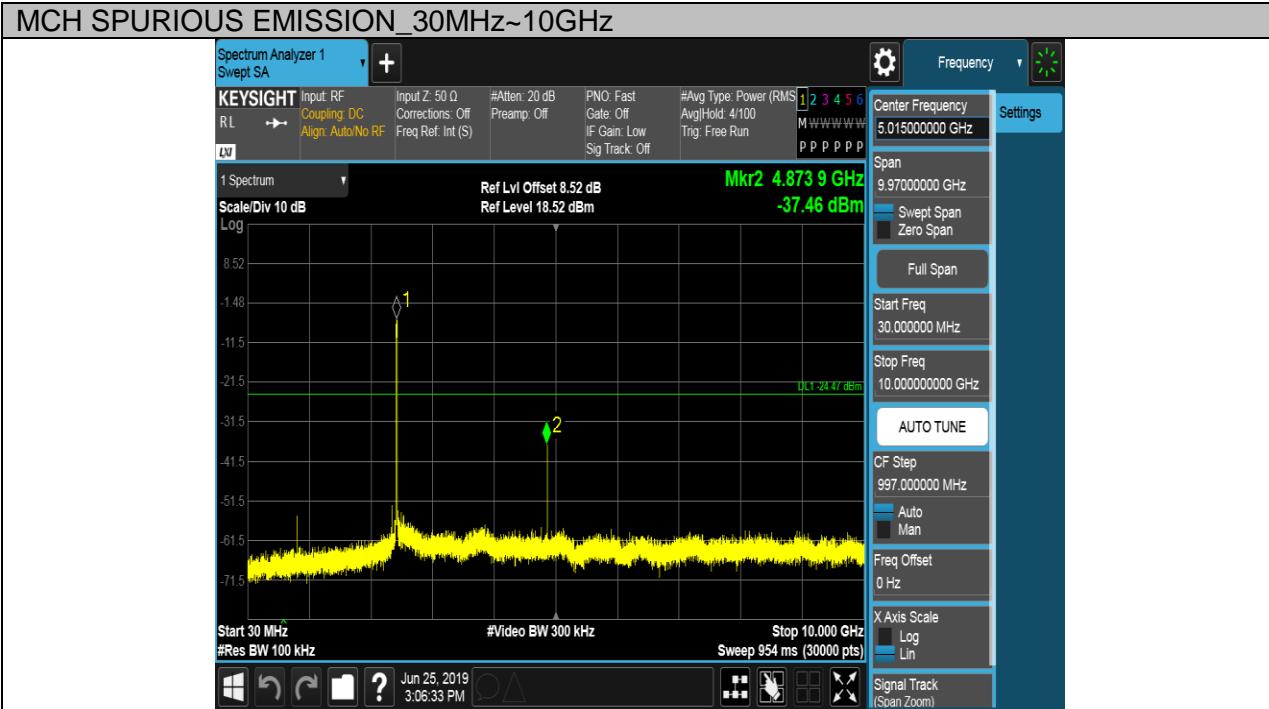


Test Mode	Channel	Verdict
11N HT20	HCH	PASS

Pref test Plot

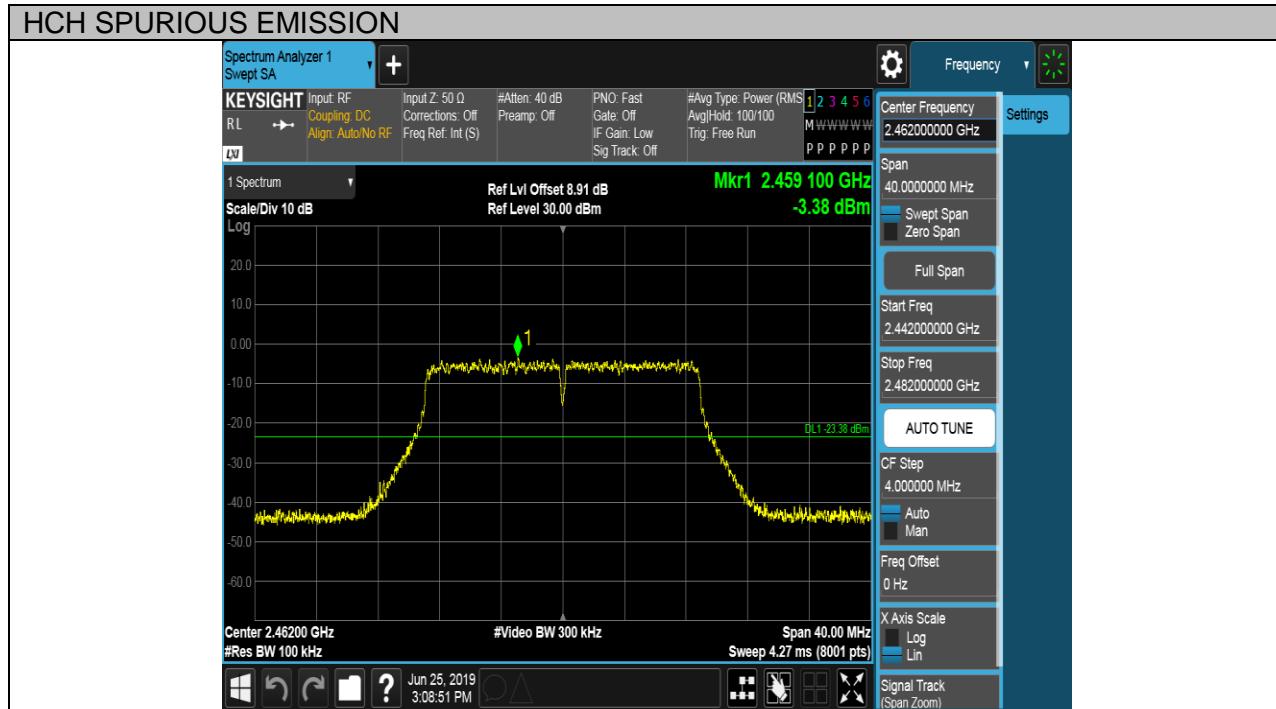


Puw test Plot

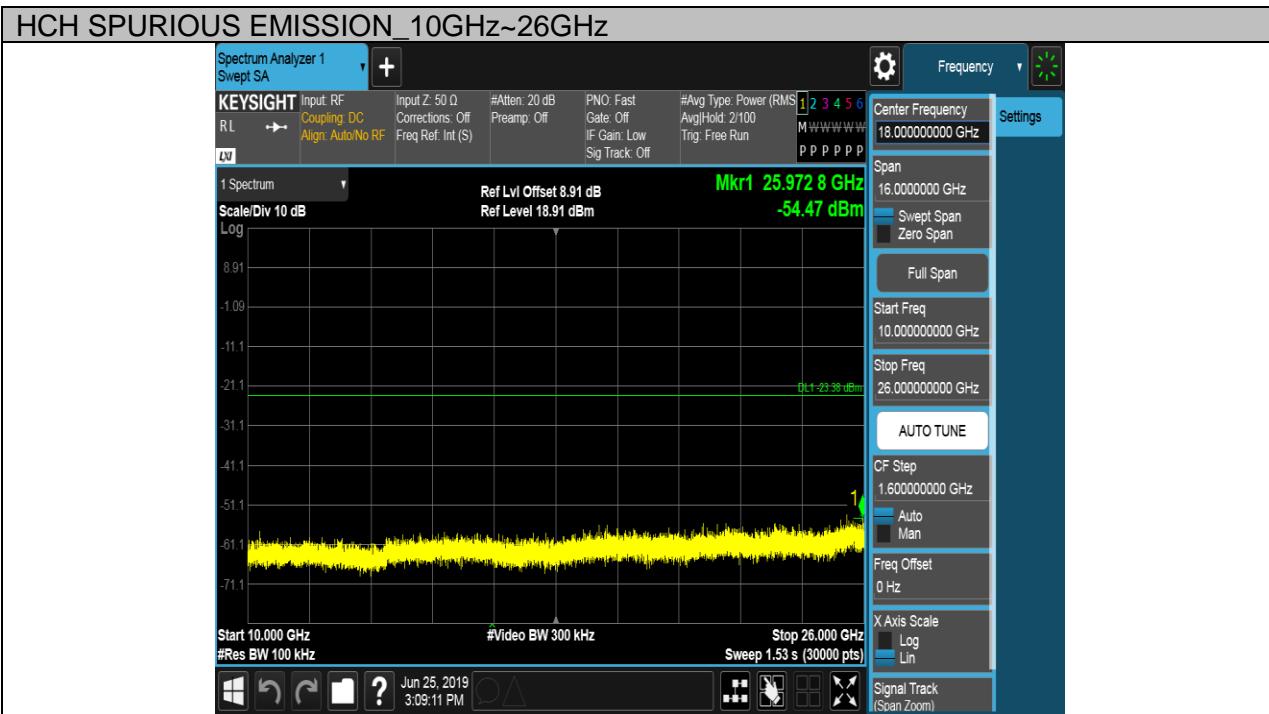
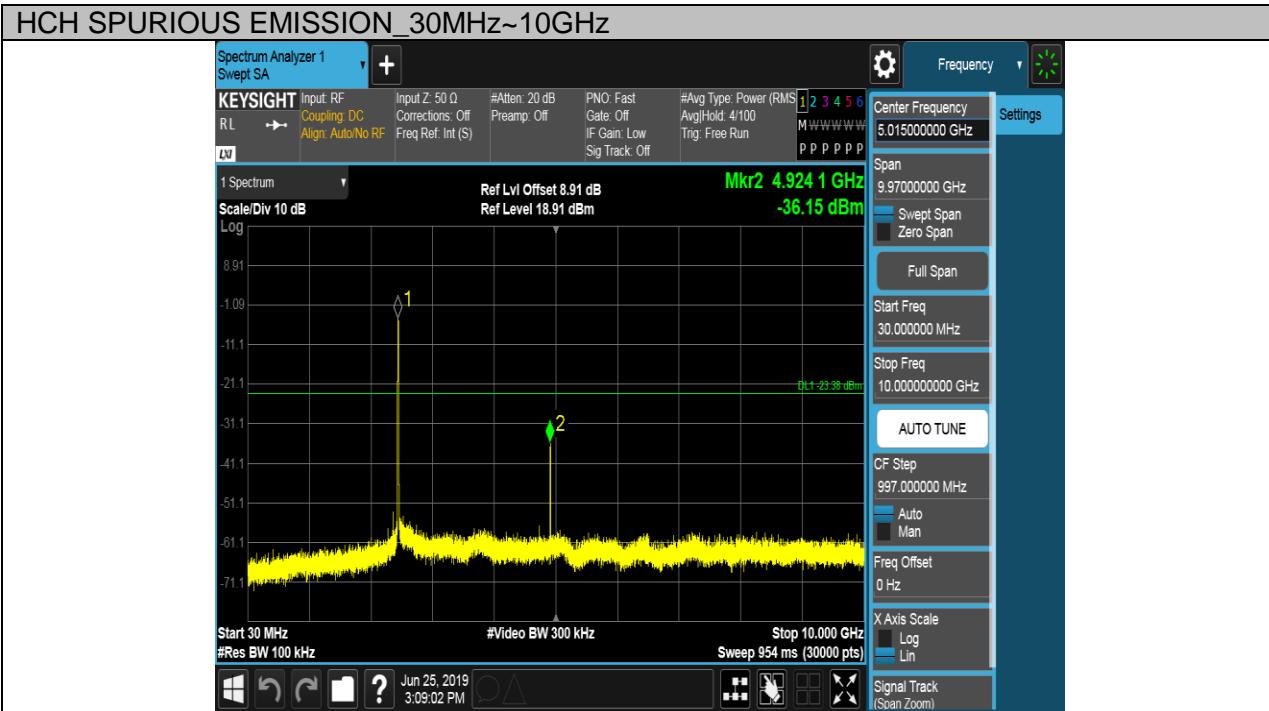


Test Mode	Channel	Verdict
11N HT40	LCH	PASS

Pref test Plot

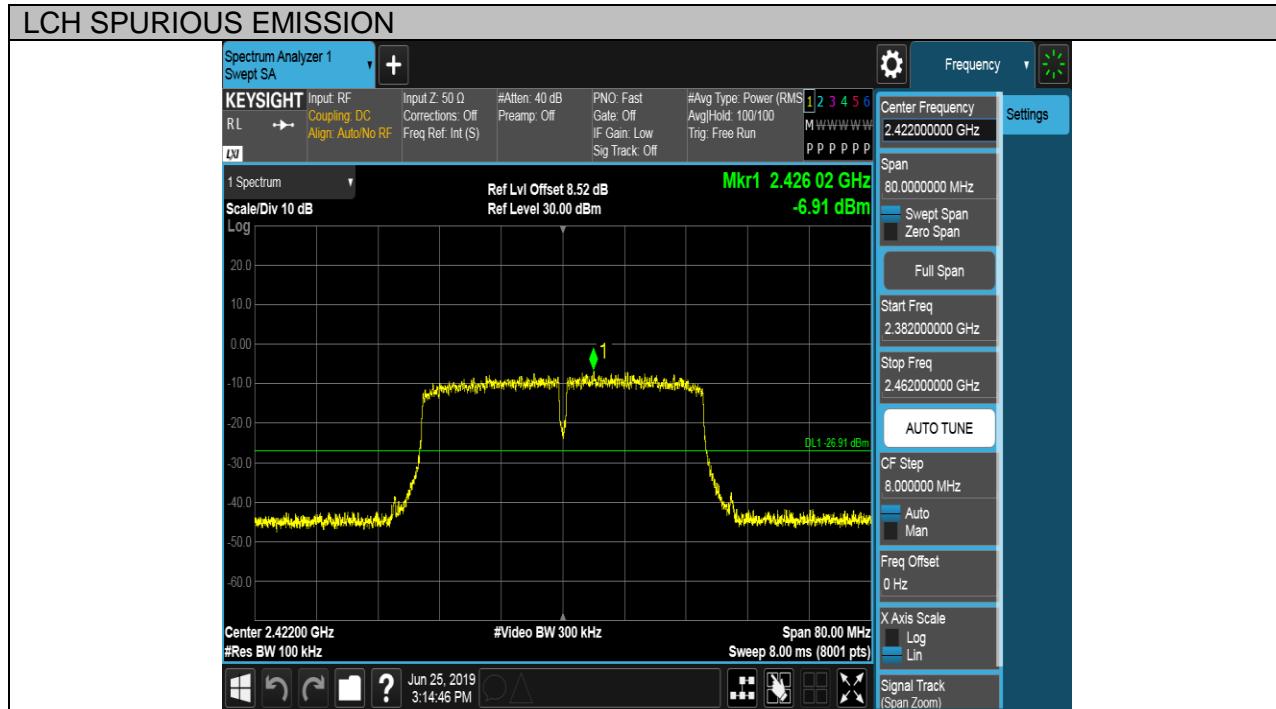


Puw test Plot

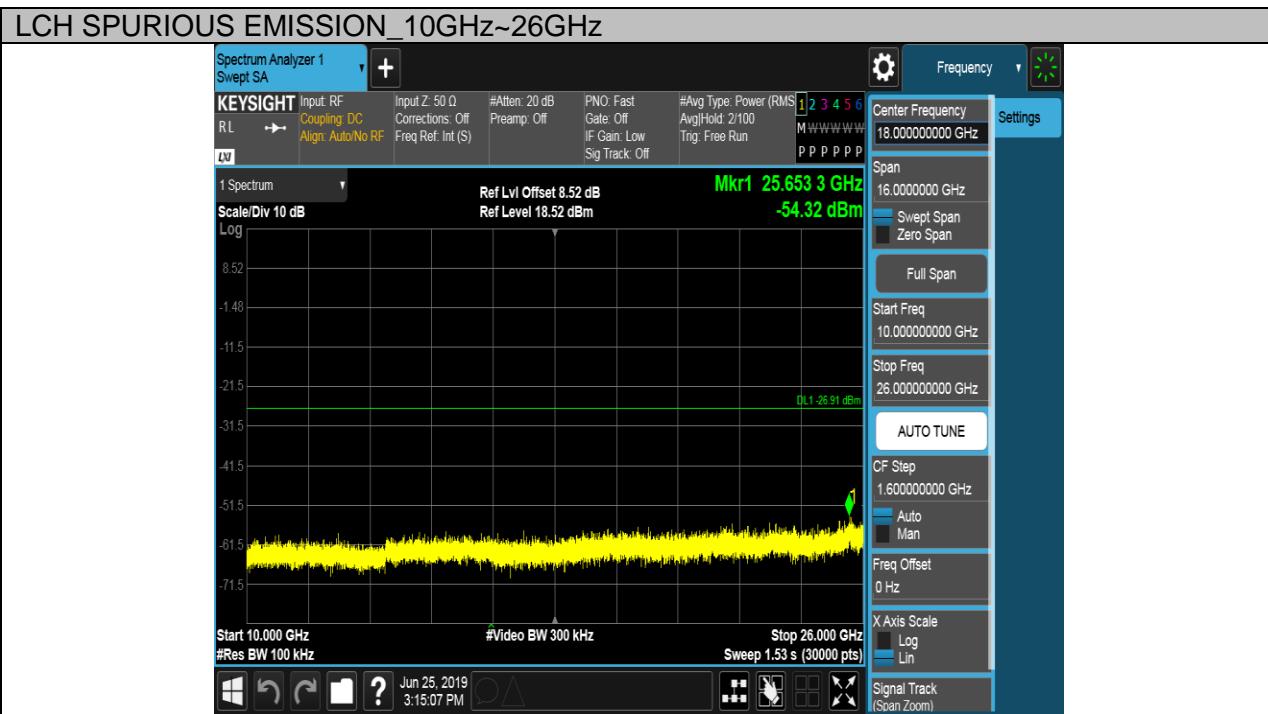
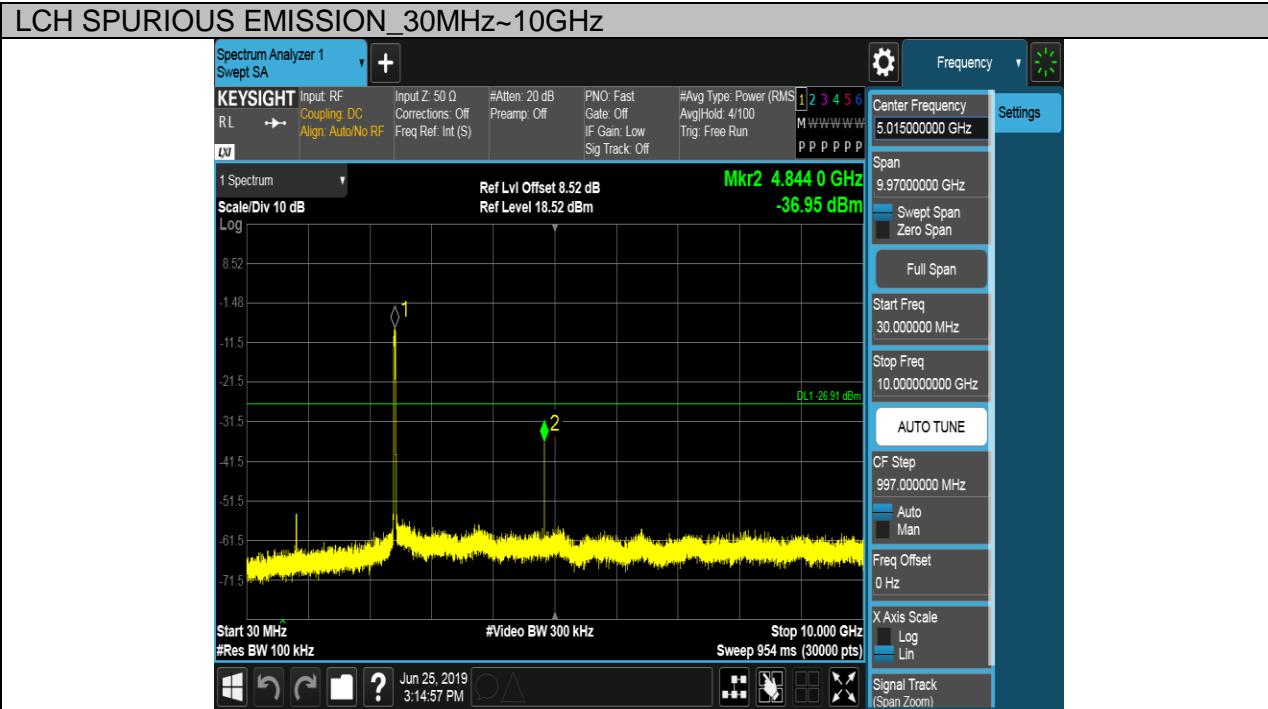


Test Mode	Channel	Verdict
11N HT40	MCH	PASS

Pref test Plot

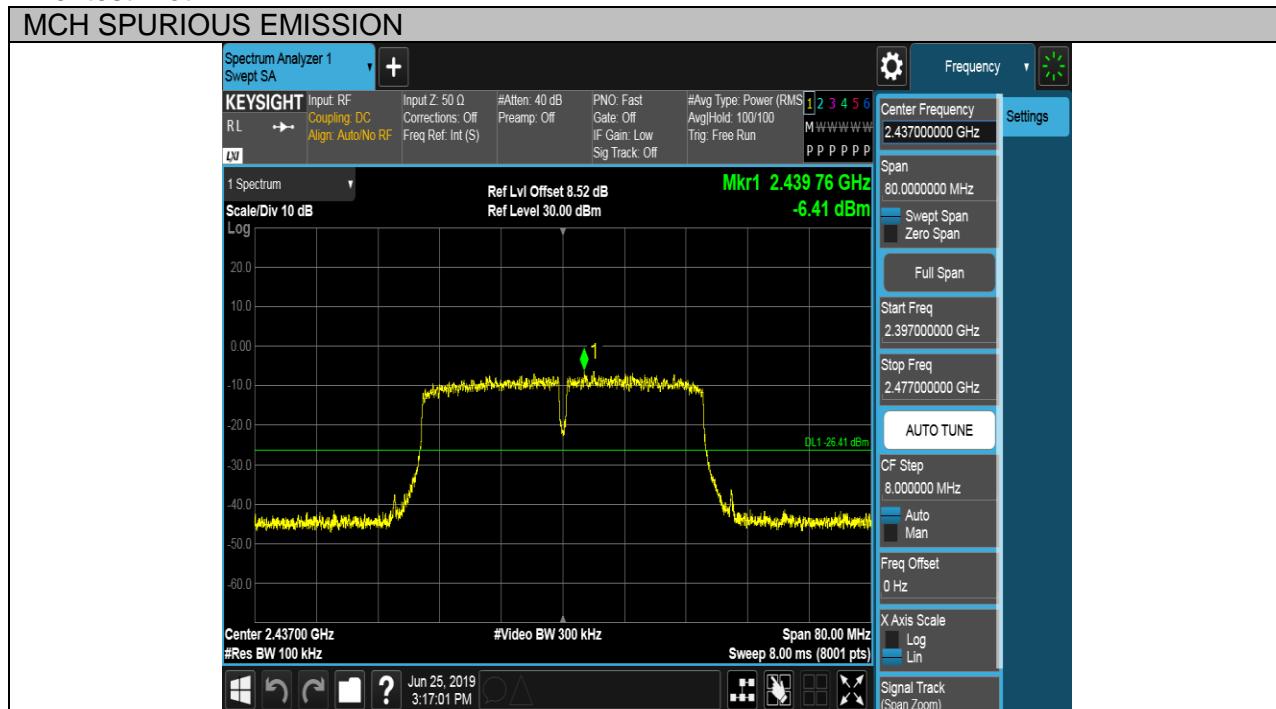

Puw test Plot

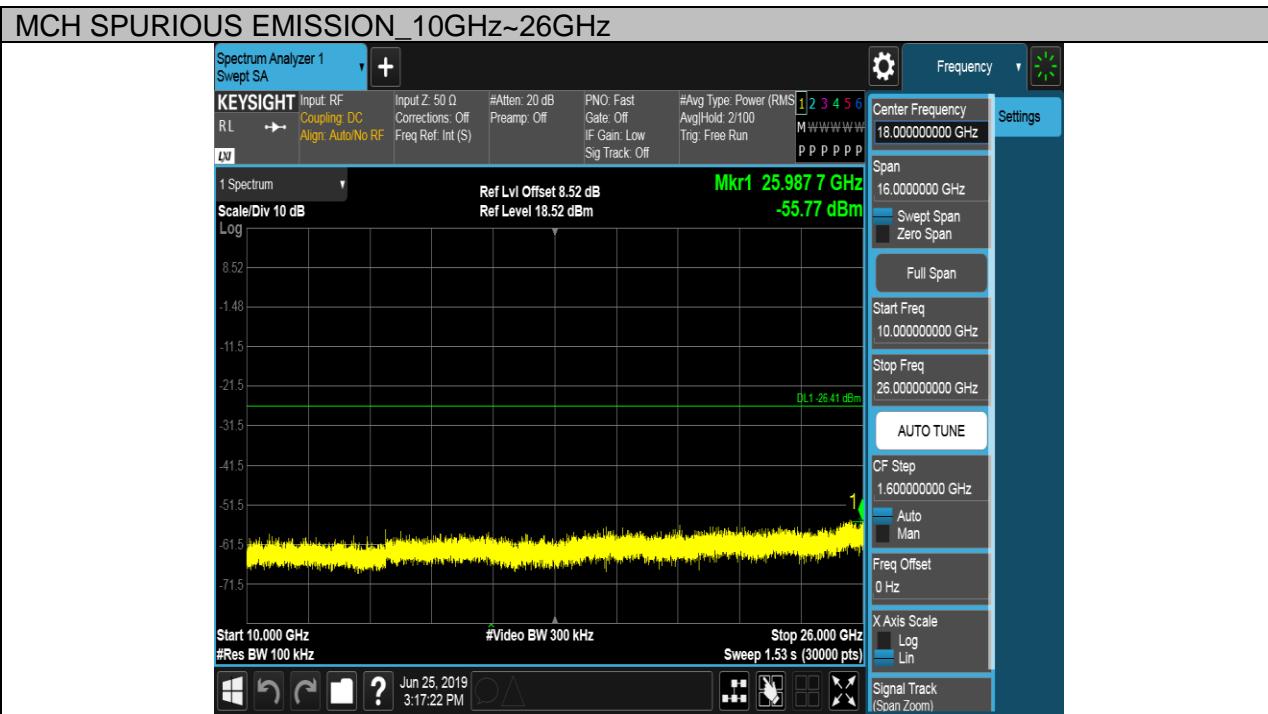
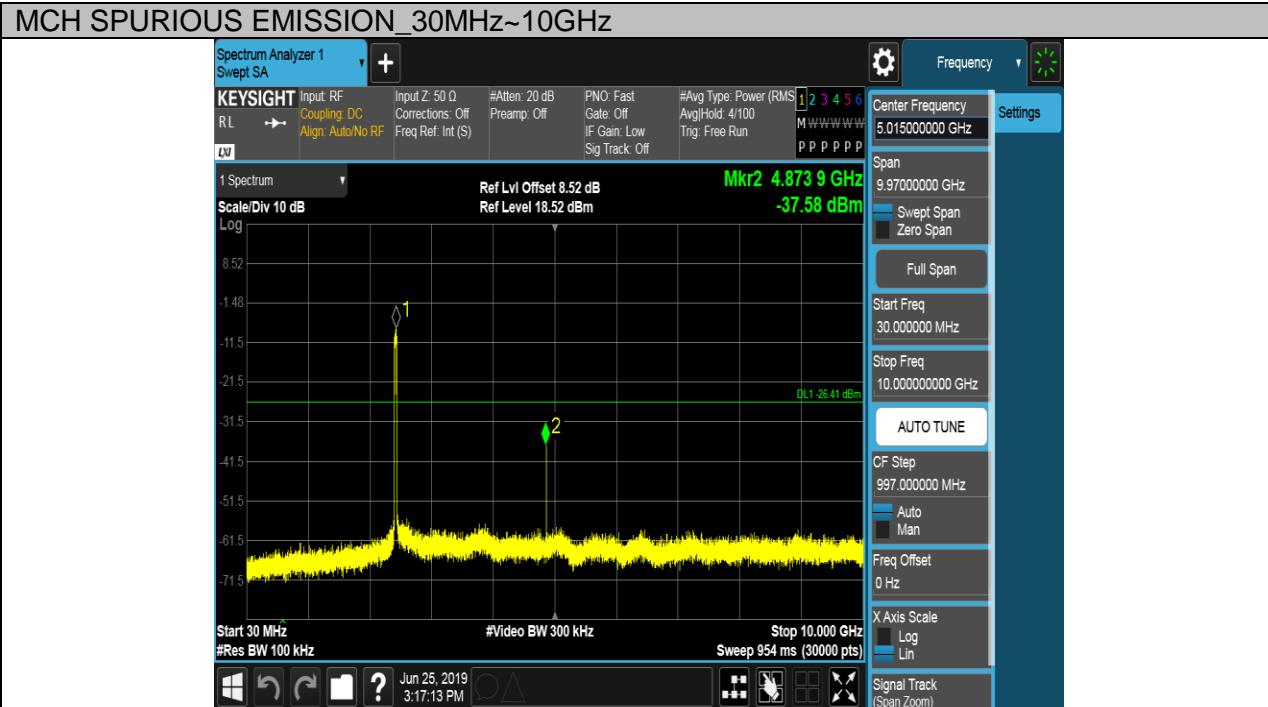


Test Mode	Channel	Verdict
11N HT40	HCH	PASS

Pref test Plot



Puw test Plot

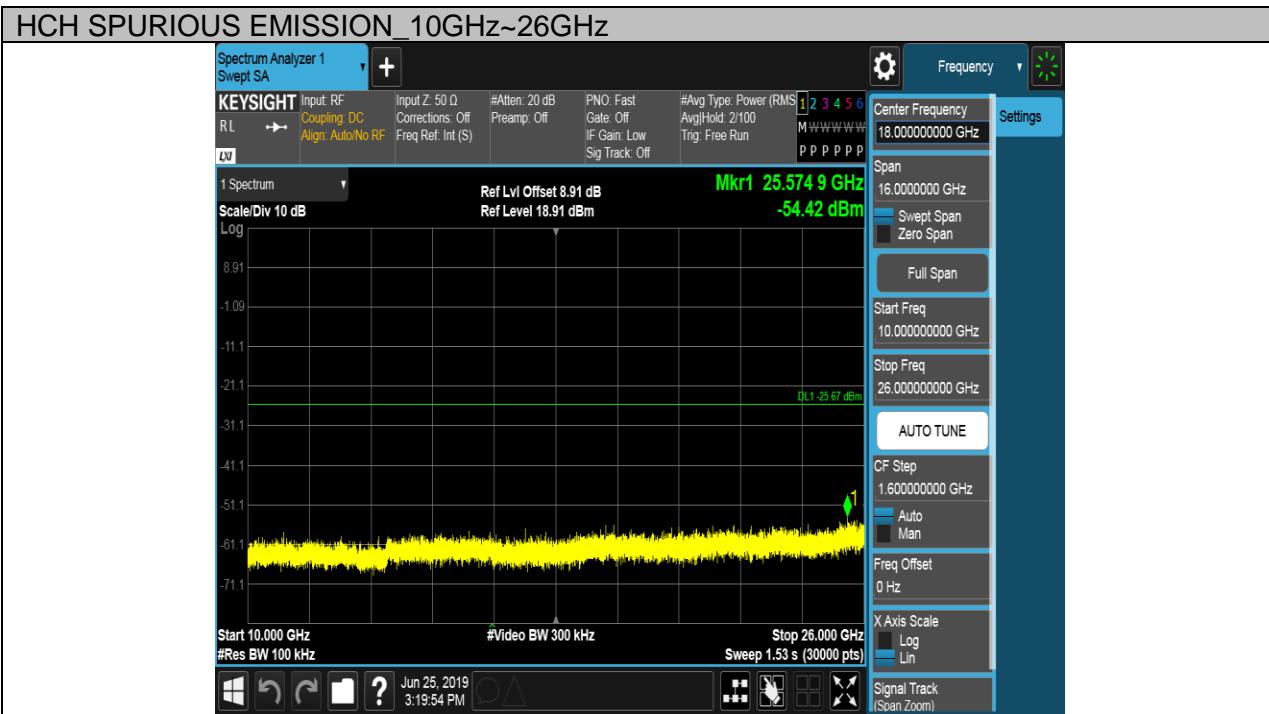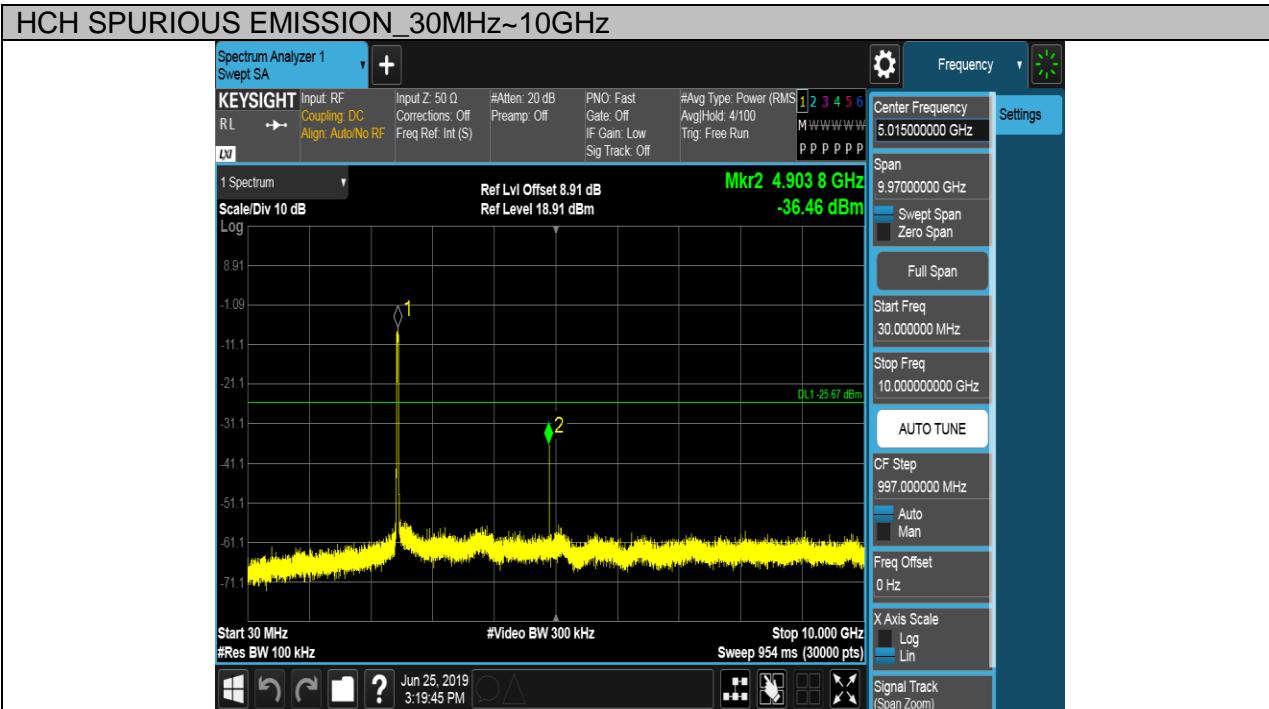

7.6. RADIATED TEST RESULTS

7.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

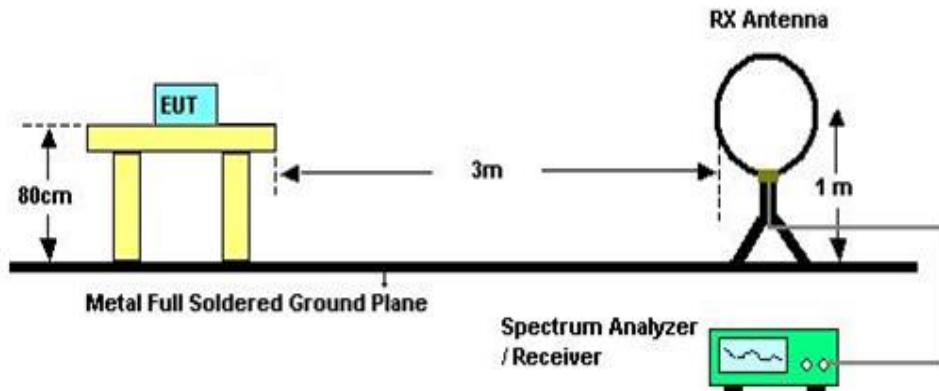


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/ Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Below 1G

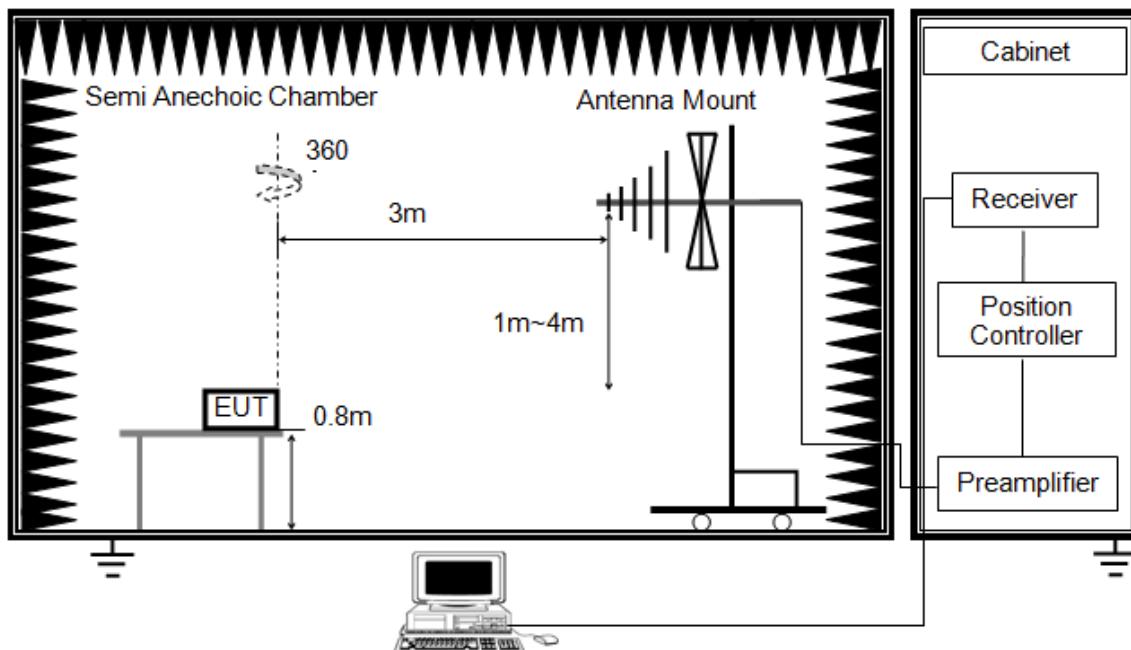


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related Item in this test report (Photographs of the Test Configuration)

ABOVE 1G

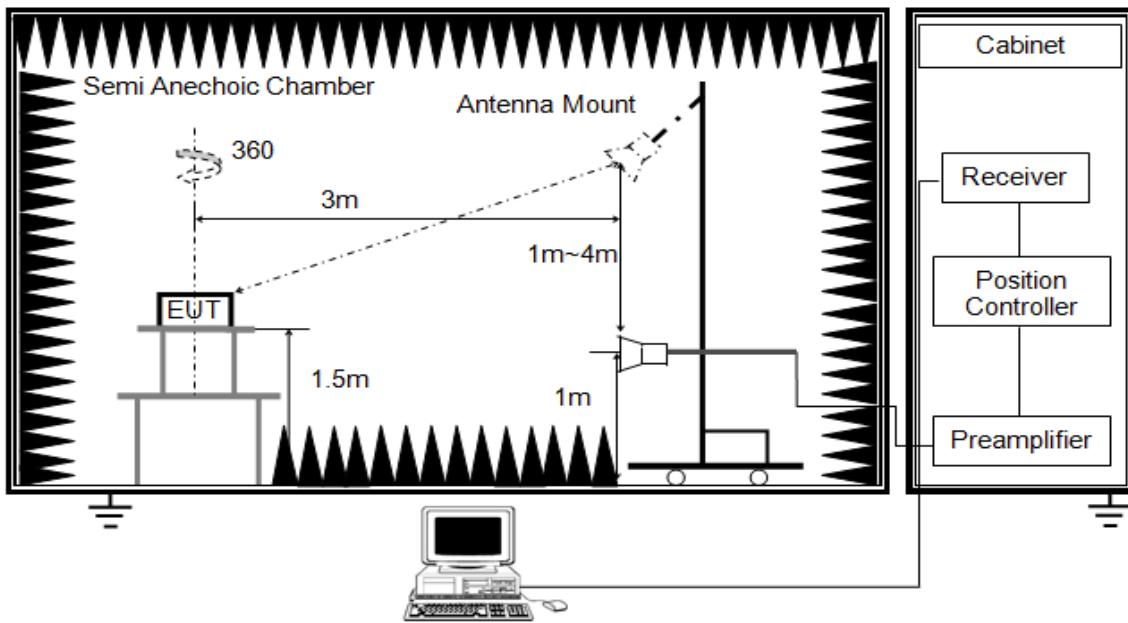


The setting of the spectrum analyser

RBW	1M
VBW	PEAK:3M AVG: See note6
Sweep	Auto
Detector	Peak/Average(10Hz)
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with set $VBW \leq RBW/100$, but not less than 10Hz video bandwidth with peak detector, max hold to be run for at least 50 traces for average measurements.
8. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

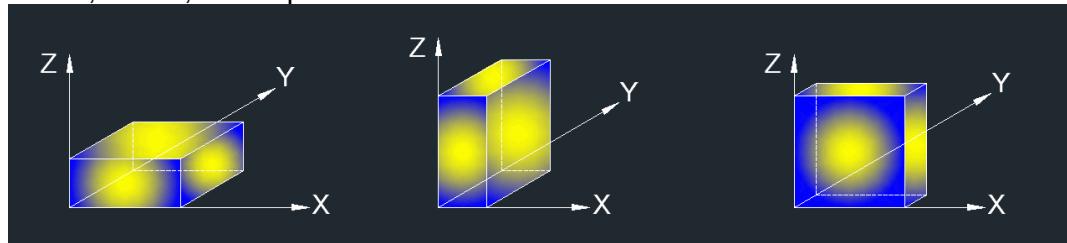

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

7.6.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V


7.6.3. RESTRICTED BANDEDGE

Test Result Table

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11B	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11G	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11N HT20	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11N HT40	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS

Test Graphs:

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

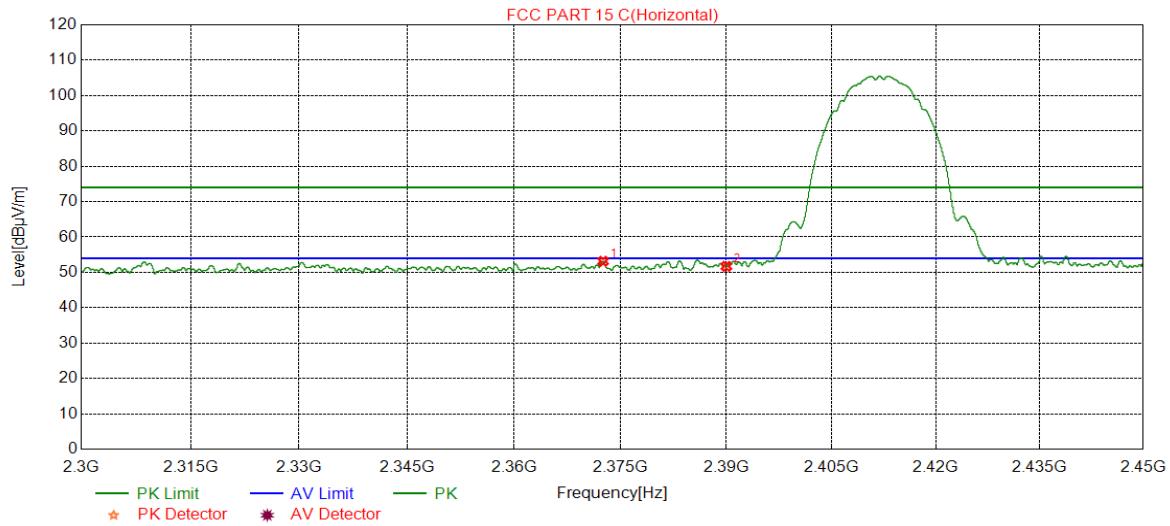


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dB _{µV/m})	(dB)	(dB _{µV/m})	(dB _{µV/m})	(dB)	
1	2372.5341	39.25	13.88	53.13	74.00	-20.87	peak
2	2390.0000	37.60	14.09	51.69	74.00	-22.31	peak

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

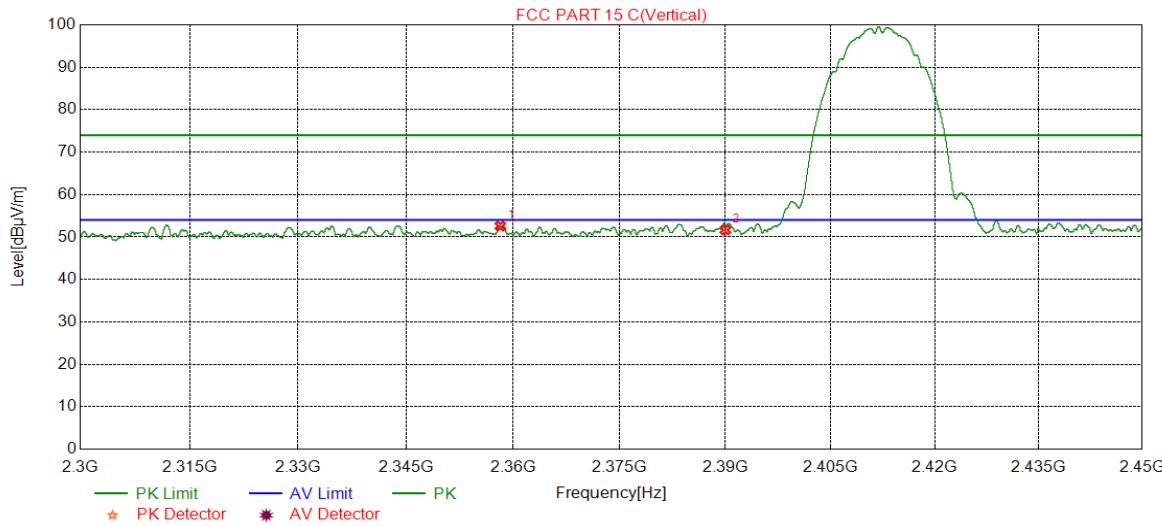

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	2358.2073	38.87	13.71	52.58	74.00	-21.42	peak
2	2390.0000	37.57	14.09	51.66	74.00	-22.34	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS

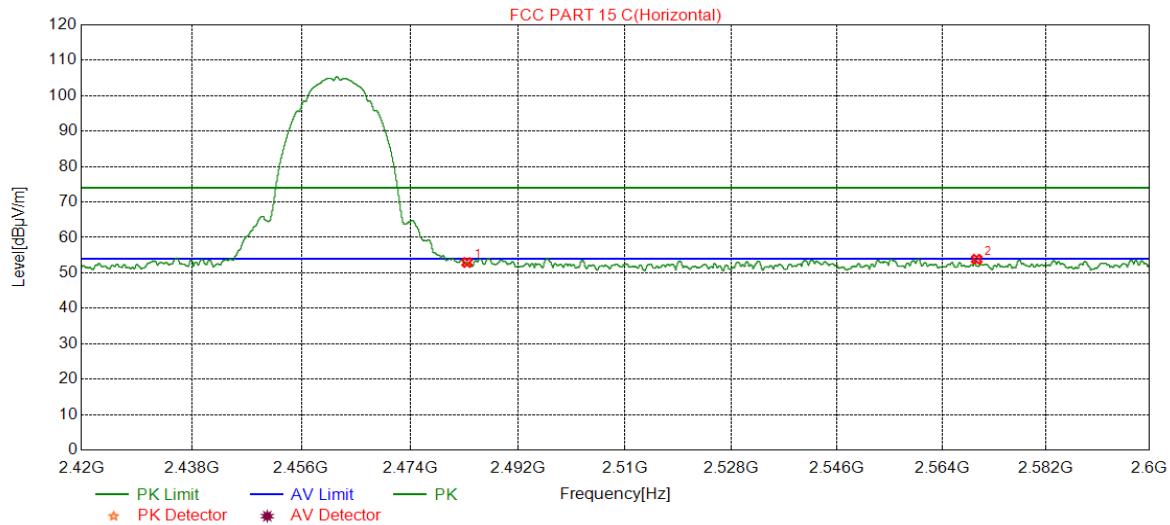

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	39.04	13.88	52.92	74.00	-21.08	peak
2	2569.9730	39.39	14.45	53.84	74.00	-20.16	peak


Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

3. Measurement = Reading Level + Correct Factor.

4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

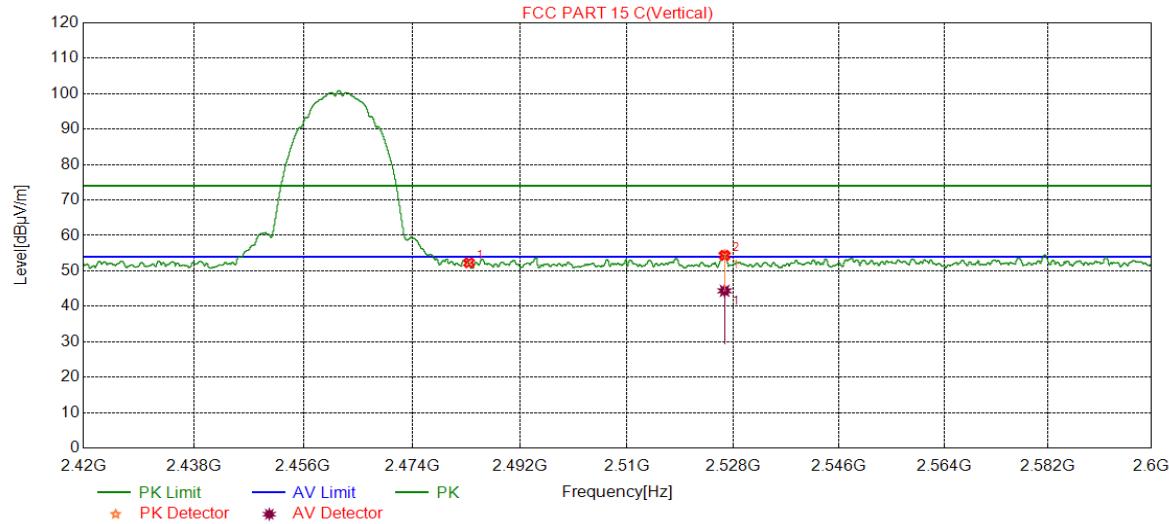

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	38.41	13.88	52.29	74.00	-21.71	peak
2	2526.4987	40.08	14.29	54.37	74.00	-19.63	peak
		30.08	14.29	44.37	54.00	-9.63	average

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
 4. Measurement = Reading Level + Correct Factor.
 5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

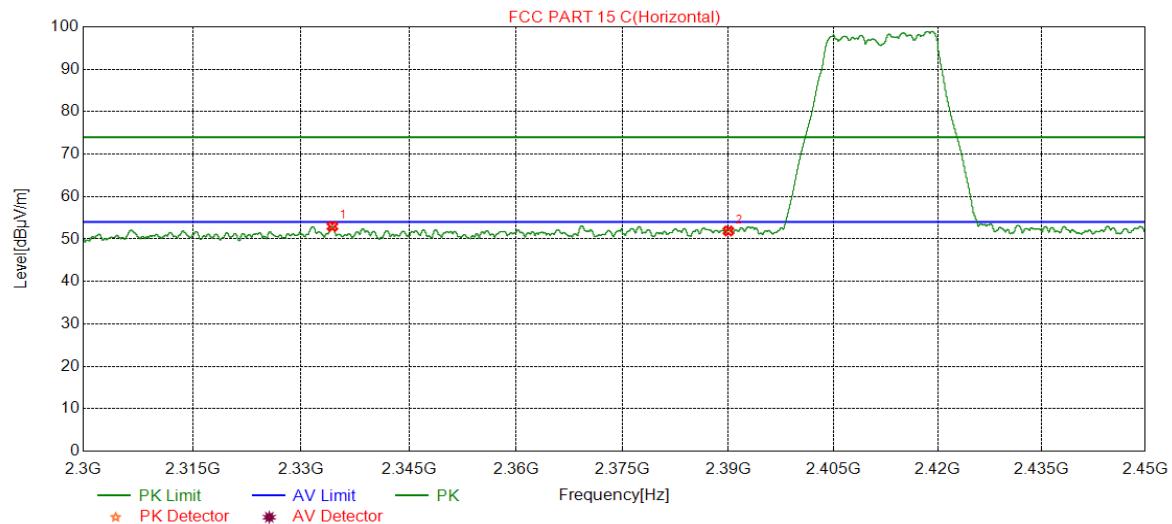


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2334.3355	39.42	13.54	52.96	74.00	-21.04	peak
2	2390.0000	37.80	14.09	51.89	74.00	-22.11	peak

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

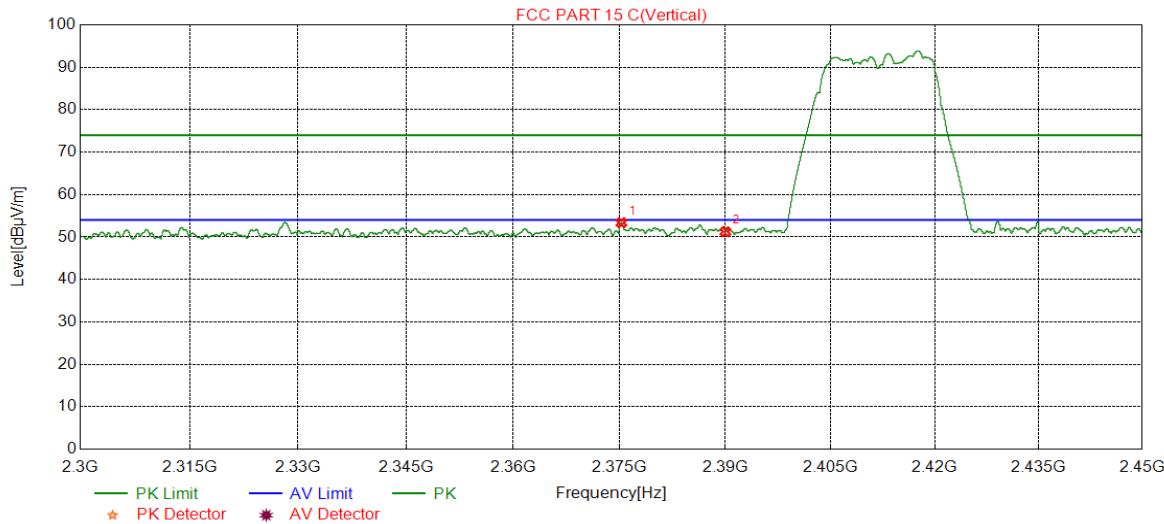

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2375.2532	39.41	13.94	53.35	74.00	-20.65	peak
2	2390.0000	37.15	14.09	51.24	74.00	-22.76	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

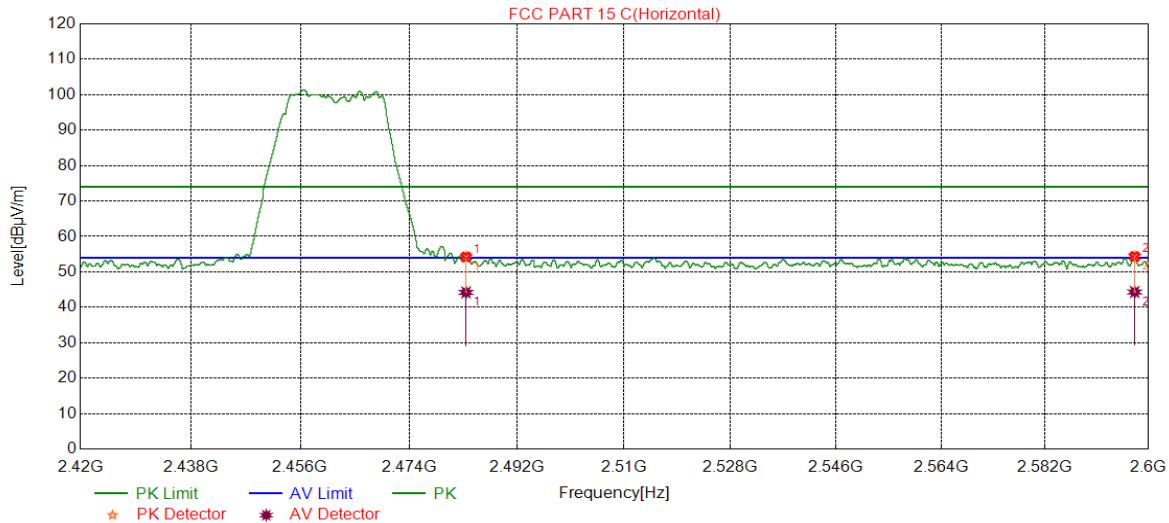


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	40.32	13.88	54.20	74.00	-19.80	peak
		30.32	13.88	44.20	54.00	-9.80	average
2	2597.5698	39.79	14.53	54.32	74.00	-19.68	peak
		29.79	14.53	44.32	54.00	-9.68	average

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
4. Measurement = Reading Level + Correct Factor.
5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

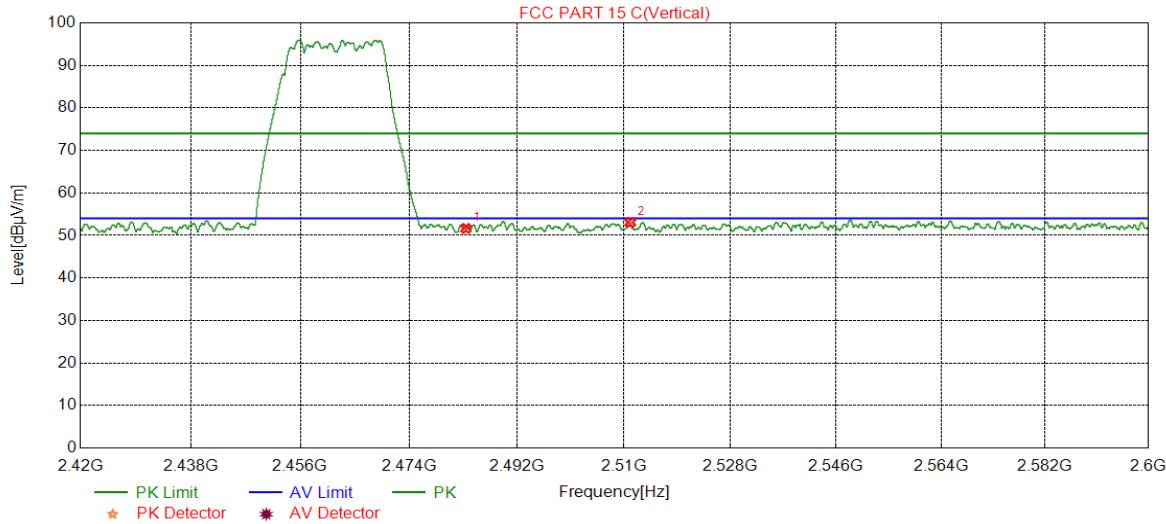


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	37.75	13.88	51.63	74.00	-22.37	peak
2	2511.0531	38.80	14.24	53.04	74.00	-20.96	peak

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS

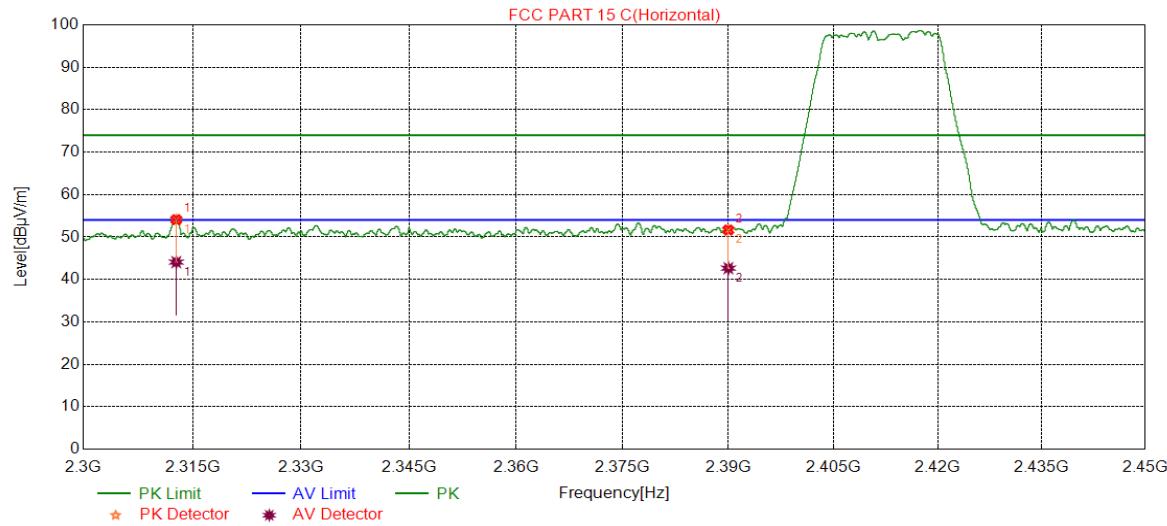


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2312.7516	40.87	13.21	54.08	74.00	-19.92	peak
		30.87	13.21	44.08	54.00	-9.92	average
2	2390.0000	37.56	14.09	51.65	74.00	-22.35	peak
		28.56	14.09	42.65	54.00	-11.35	average

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
4. Measurement = Reading Level + Correct Factor.
5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS

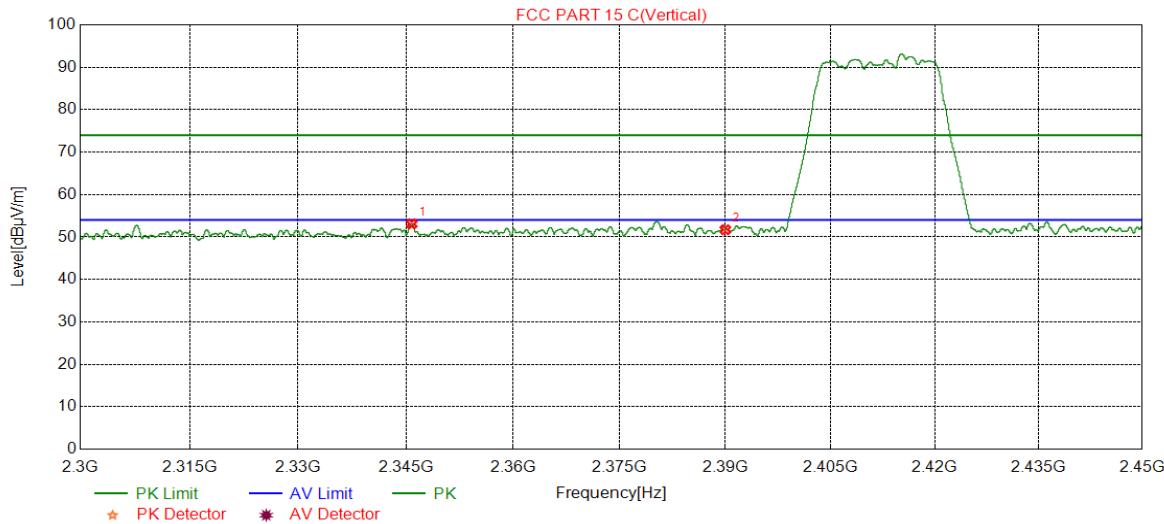


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	2345.8120	39.44	13.64	53.08	74.00	-20.92	peak
2	2390.0000	37.62	14.09	51.71	74.00	-22.29	peak

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. Measurement = Reading Level + Correct Factor.
4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS

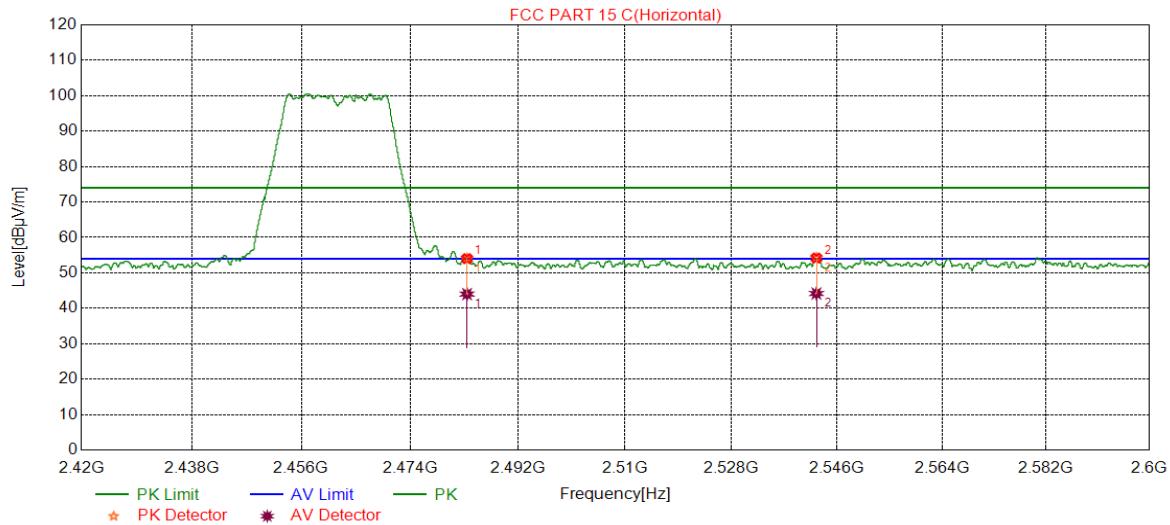


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	40.13	13.88	54.01	74.00	-19.99	peak
		30.13	13.88	44.01	54.00	-9.99	average
2	2542.4662	39.84	14.34	54.18	74.00	-19.82	peak
		29.84	14.34	44.18	54.00	-9.82	average

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
4. Measurement = Reading Level + Correct Factor.
5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS

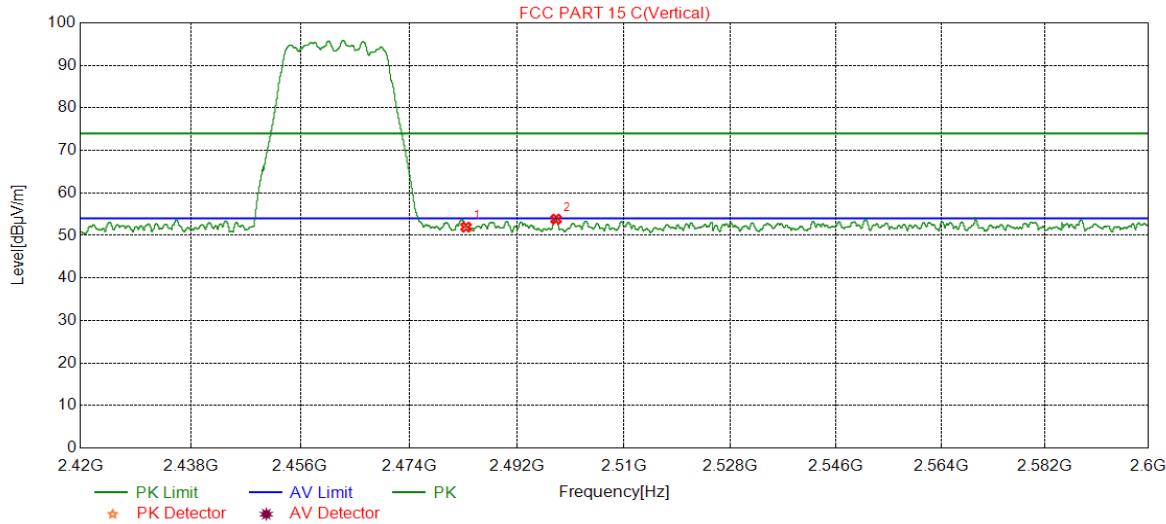

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2483.5000	38.08	13.88	51.96	74.00	-22.04	peak
2	2498.5599	39.75	14.08	53.83	74.00	-20.17	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS

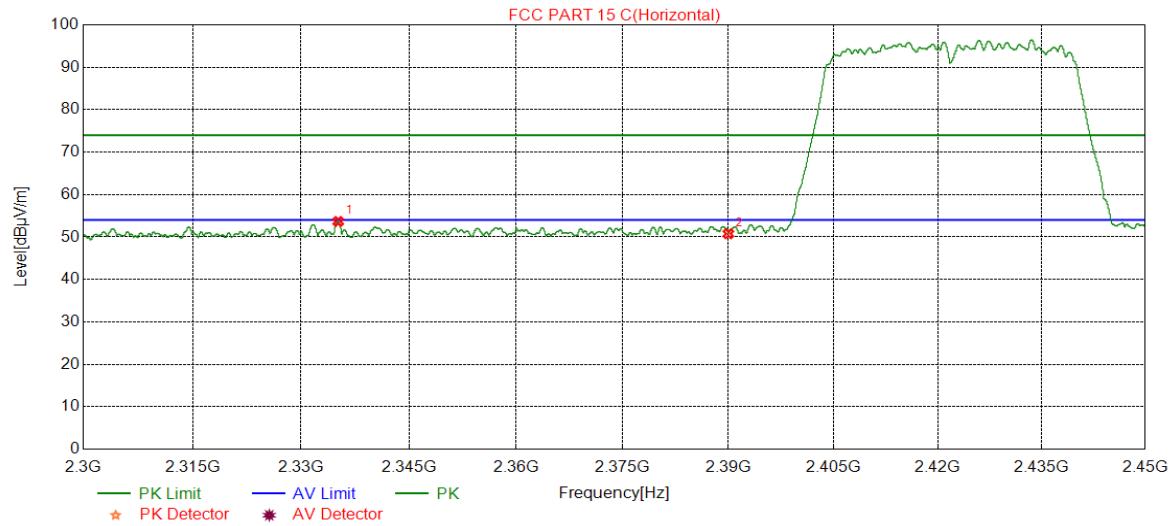

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	2335.1419	40.14	13.52	53.66	74.00	-20.34	peak
2	2390.0000	36.67	14.09	50.76	74.00	-23.24	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit


Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS

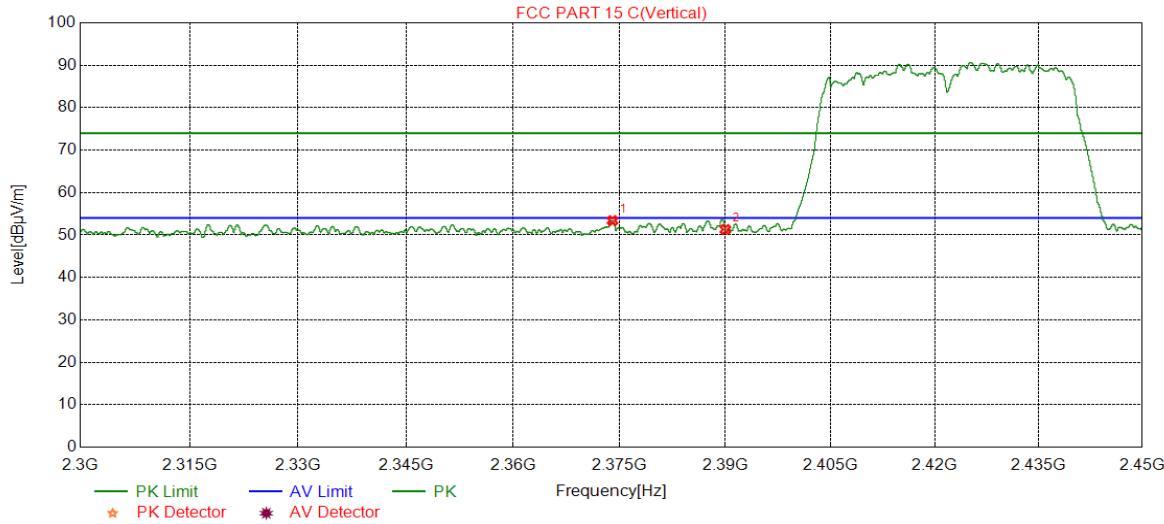

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	2373.9968	39.45	13.93	53.38	74.00	-20.62	peak
2	2390.0000	37.20	14.09	51.29	74.00	-22.71	peak

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 3. Measurement = Reading Level + Correct Factor.
 4. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS

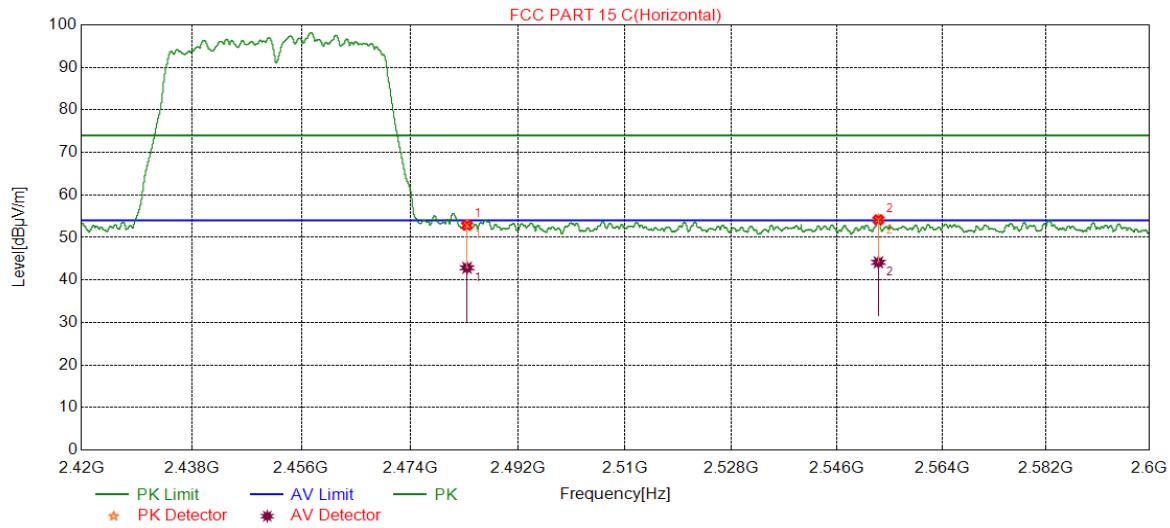


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.5000	38.98	13.88	52.86	74.00	-21.14	peak
		28.98	13.88	42.86	54.00	-11.14	average
2	2553.0693	39.72	14.43	54.15	74.00	-19.85	peak
		29.72	14.43	44.15	54.00	-9.85	average

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
4. Measurement = Reading Level + Correct Factor.
5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

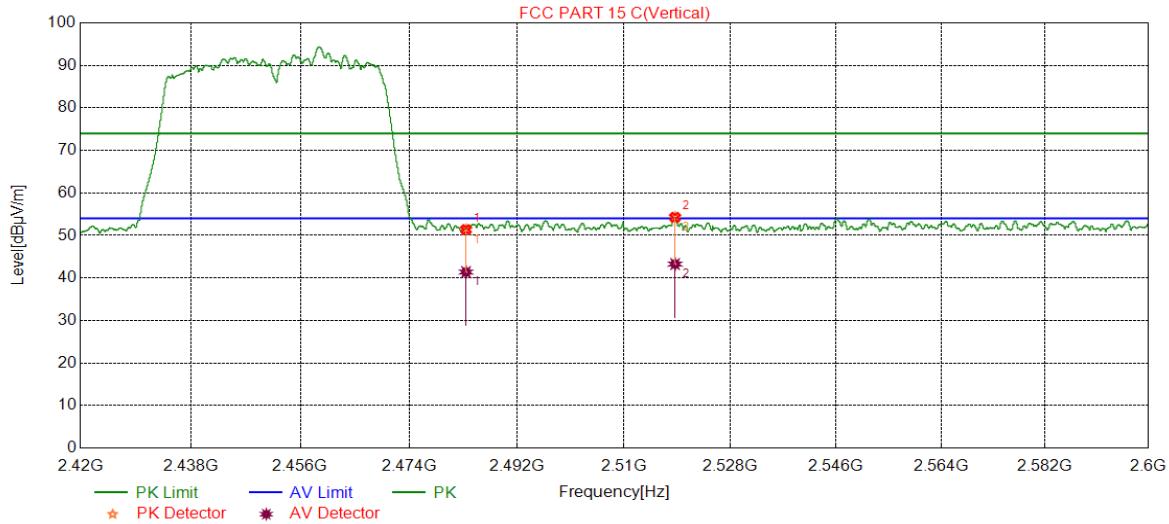

No.	Frequency (MHz)	Reading Level	Correct Factor	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
		(dBuV/m)	(dB)				
1	2483.5000	37.50	13.88	51.38	74.00	-22.62	peak
		27.50	13.88	41.38	54.00	-12.62	average
2	2518.6139	39.98	14.28	54.26	74.00	-19.74	peak
		28.98	14.28	43.26	54.00	-10.74	average

Note:

1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
3. For average power measurement, set the VBW to Minimum VBW=10 Hz.
4. Measurement = Reading Level + Correct Factor.
5. only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit

7.6.4. SPURIOUS EMISSIONS

Test Result Table:

1) For 1GHz~18GHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
11B	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11G	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11N HT20	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS
11N HT40	Antenna1	LCH	<Limit	PASS
		MCH	<Limit	PASS
		HCH	<Limit	PASS

2) For 9KHz~30MHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
1B	Antenna1	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
1B	Antenna1	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz


Test Mode	Test Antenna	Channel	Puw(dBm)	Verdict
1B	Antenna1	HCH	<Limit	PASS

Remark:

1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part I: 1GHz~18GHz
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS

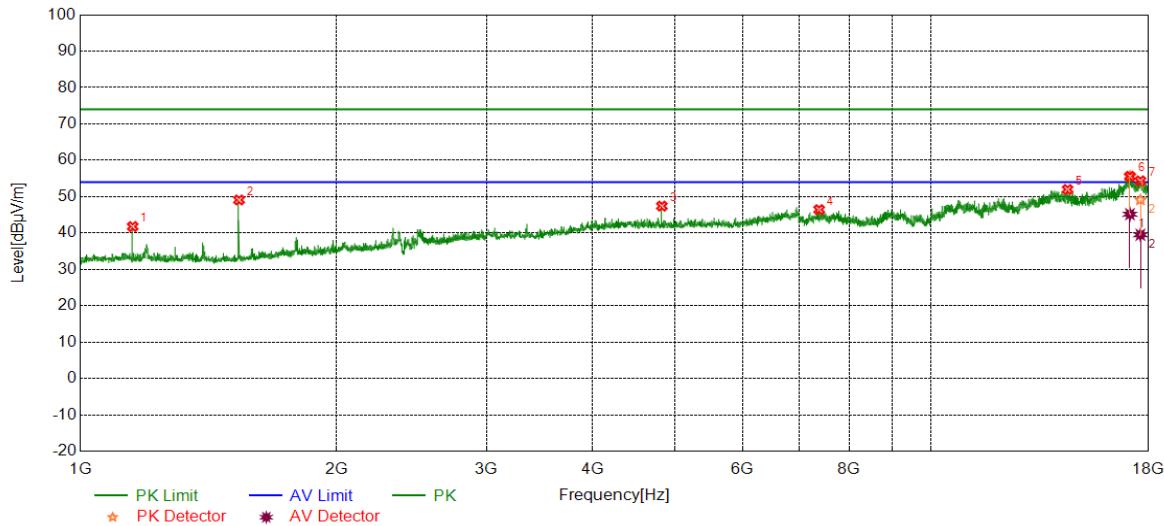


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1152.0507	47.31	-5.54	41.77	74.00	-32.23	peak
2	1536.1787	54.77	-5.68	49.09	74.00	-24.91	peak
3	4822.8038	42.46	4.94	47.40	74.00	-26.60	peak
4	7380.7301	37.16	9.26	46.42	74.00	-27.58	peak
5	14456.9095	36.60	15.37	51.97	74.00	-22.03	peak
6	17112.3521	36.18	19.41	55.59	74.00	-18.41	peak
		25.76	19.41	45.17	54.00	-8.83	average
7	17604.9342	35.30	19.03	54.33	74.00	-19.67	peak
		20.49	19.03	39.52	54.00	-14.48	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS

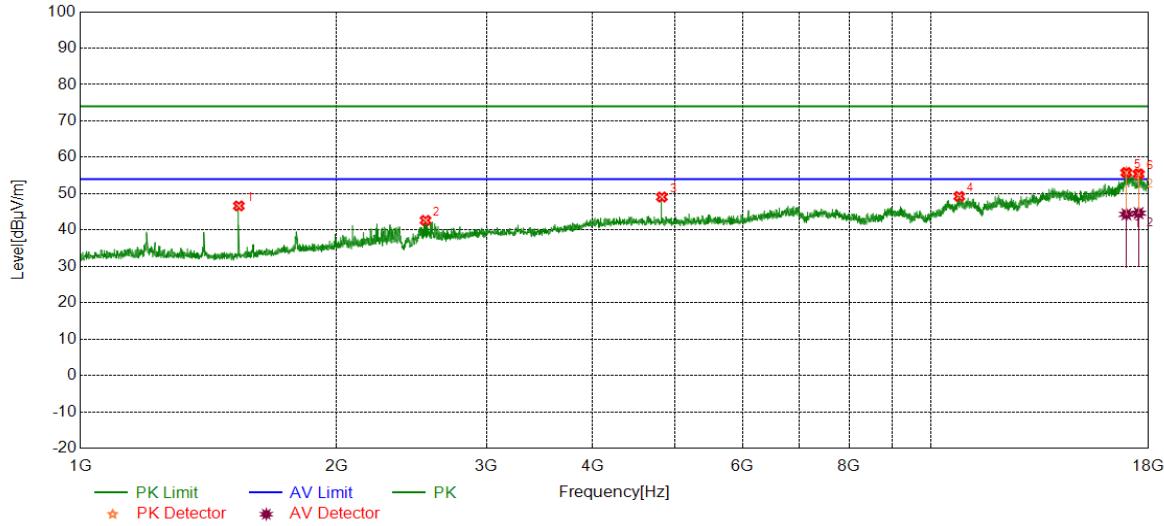


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dB μ V/m)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)	
1	1535.5118	52.32	-5.69	46.63	74.00	-27.37	peak
2	2544.5148	43.73	-1.08	42.65	74.00	-31.35	peak
3	4822.8038	44.13	4.94	49.07	74.00	-24.93	peak
4	10783.7973	36.65	12.59	49.24	74.00	-24.76	peak
5	16947.3246	35.89	19.91	55.80	74.00	-18.20	peak
		24.40	19.91	44.31	54.00	-9.69	average
6	17519.9200	35.56	19.89	55.45	74.00	-18.55	peak
		24.74	19.89	44.63	54.00	-9.37	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS

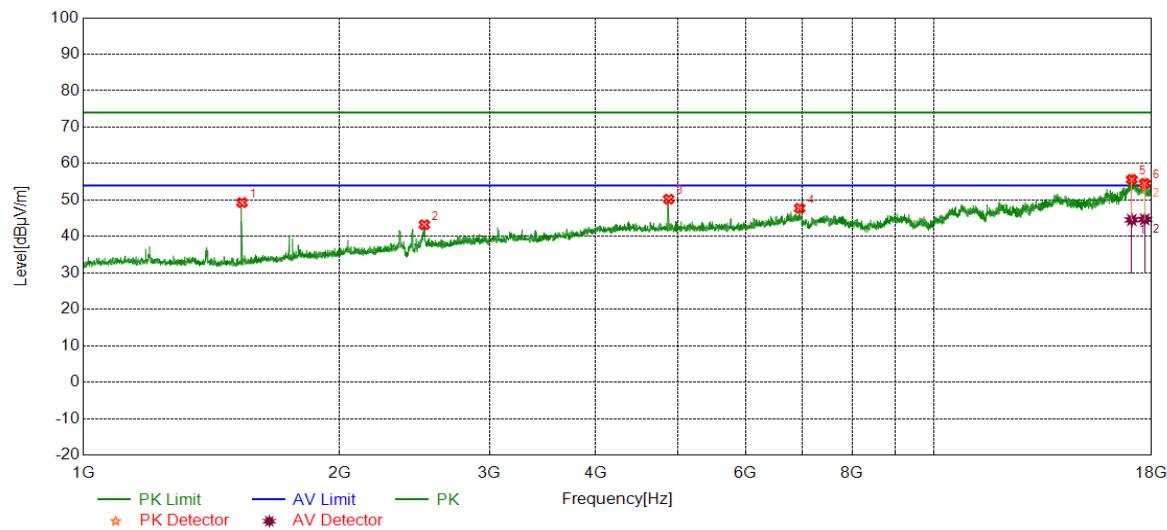

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1536.1787	54.96	-5.68	49.28	74.00	-24.72	peak
2	2515.8386	43.88	-0.66	43.22	74.00	-30.78	peak
3	4872.8121	45.02	5.21	50.23	74.00	-23.77	peak
4	6945.6576	39.02	8.70	47.72	74.00	-26.28	peak
5	17059.8433	35.12	20.52	55.64	74.00	-18.36	peak
		24.02	20.52	44.54	54.00	-9.46	average
6	17667.4446	34.93	19.60	54.53	74.00	-19.47	peak
		25.09	19.60	44.69	54.00	-9.31	average


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS

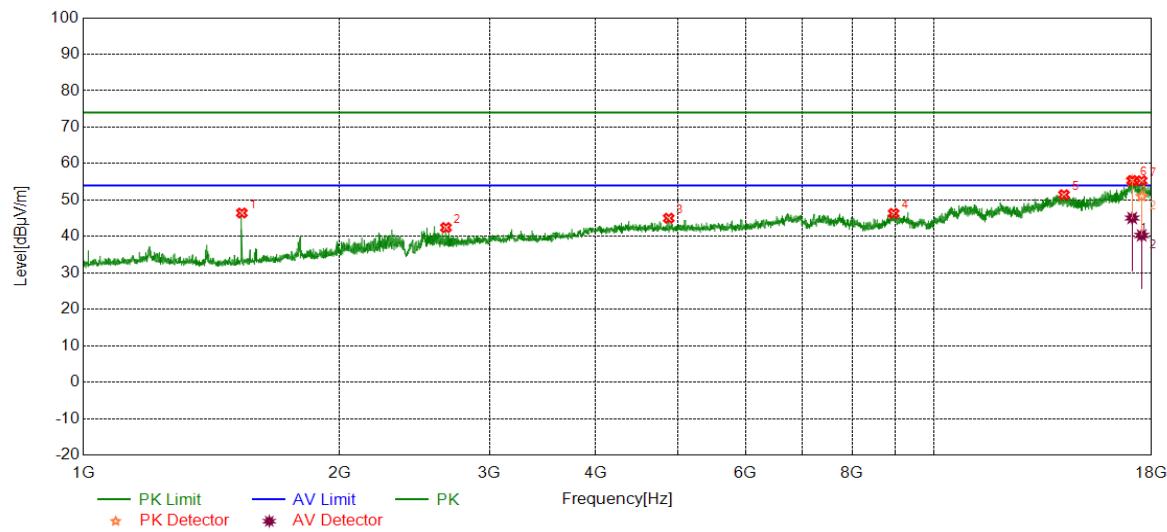

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.5118	52.12	-5.69	46.43	74.00	-27.57	peak
2	2667.2224	43.18	-0.76	42.42	74.00	-31.58	peak
3	4872.8121	39.79	5.21	45.00	74.00	-29.00	peak
4	8955.9927	37.02	9.29	46.31	74.00	-27.69	peak
5	14199.3666	36.08	15.36	51.44	74.00	-22.56	peak
6	17077.3462	35.59	19.76	55.35	74.00	-18.65	peak
		25.29	19.76	45.05	54.00	-8.95	average
7	17522.4204	35.70	19.57	55.27	74.00	-18.73	peak
		20.71	19.57	40.28	54.00	-13.72	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

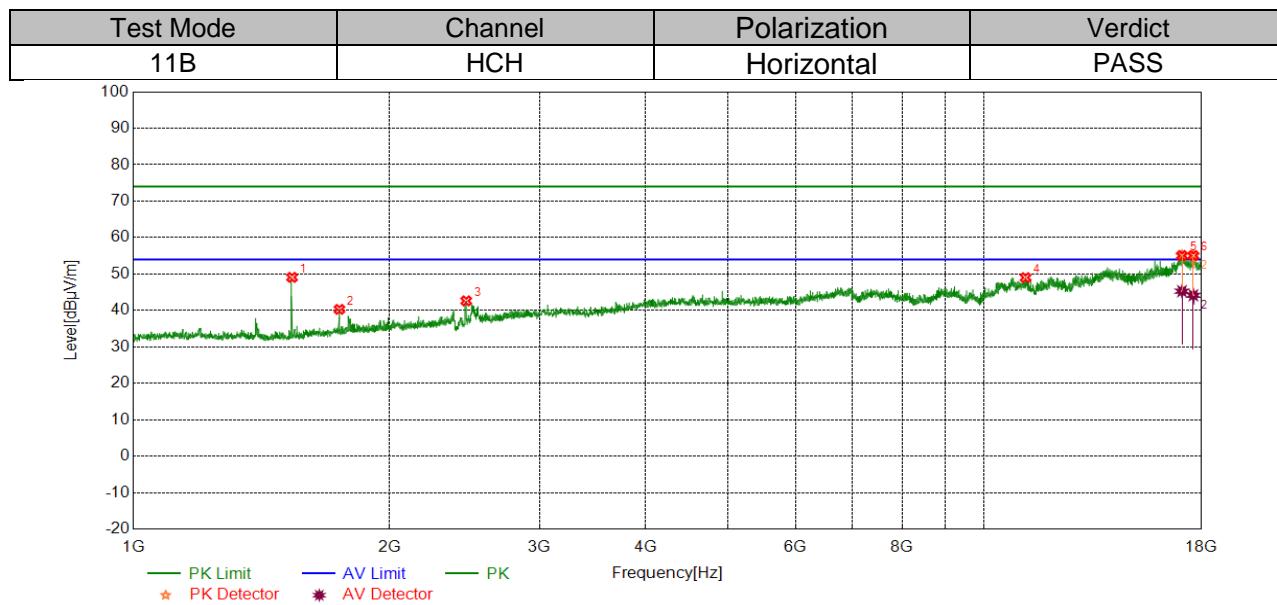


No.	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
							PK
1	1536.1787	54.75	-5.68	49.07	74.00	-24.93	peak
2	1746.2488	44.70	-4.41	40.29	74.00	-33.71	peak
3	2461.1537	43.51	-0.89	42.62	74.00	-31.38	peak
4	11178.8631	36.40	12.59	48.99	74.00	-25.01	peak
5	17067.3446	34.55	20.52	55.07	74.00	-18.93	peak
		24.76	20.52	45.28	54.00	-8.72	average
6	17602.4337	35.81	19.26	55.07	74.00	-18.93	peak
		24.89	19.26	44.15	54.00	-9.85	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS

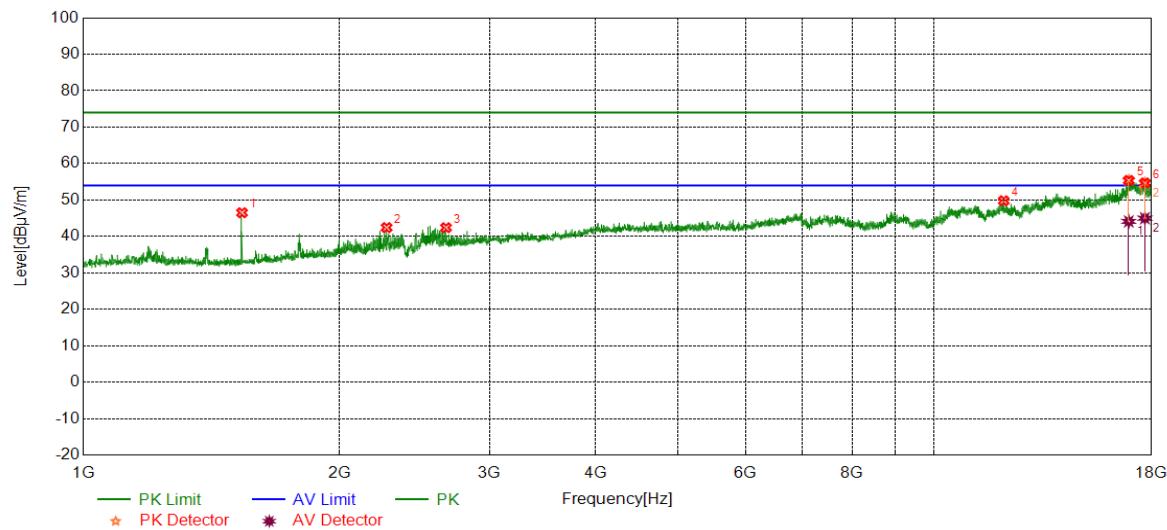

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1536.1787	52.19	-5.68	46.51	74.00	-27.49	peak
2	2271.7573	44.58	-2.16	42.42	74.00	-31.58	peak
3	2667.8893	43.16	-0.76	42.40	74.00	-31.60	peak
4	12064.0107	36.15	13.65	49.80	74.00	-24.20	peak
5	16919.8200	36.33	19.05	55.38	74.00	-18.62	peak
		25.07	19.05	44.12	54.00	-9.88	average
6	17674.9458	35.42	19.26	54.68	74.00	-19.32	peak
		25.74	19.26	45.00	54.00	-9.00	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS

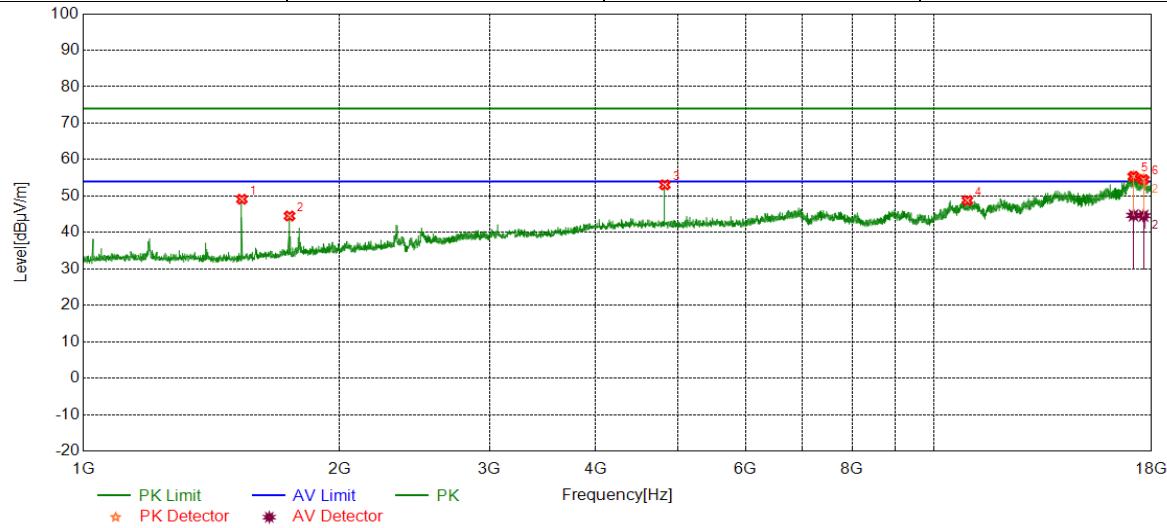


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.5118	54.80	-5.69	49.11	74.00	-24.89	peak
2	1746.9156	48.92	-4.41	44.51	74.00	-29.49	peak
3	4822.8038	48.11	4.94	53.05	74.00	-20.95	peak
4	10933.8223	35.80	12.97	48.77	74.00	-25.23	peak
5	17139.8566	36.09	19.30	55.39	74.00	-18.61	peak
		25.38	19.30	44.68	54.00	-9.32	average
6	17612.4354	35.92	18.59	54.51	74.00	-19.49	peak
		25.99	18.59	44.58	54.00	-9.42	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS

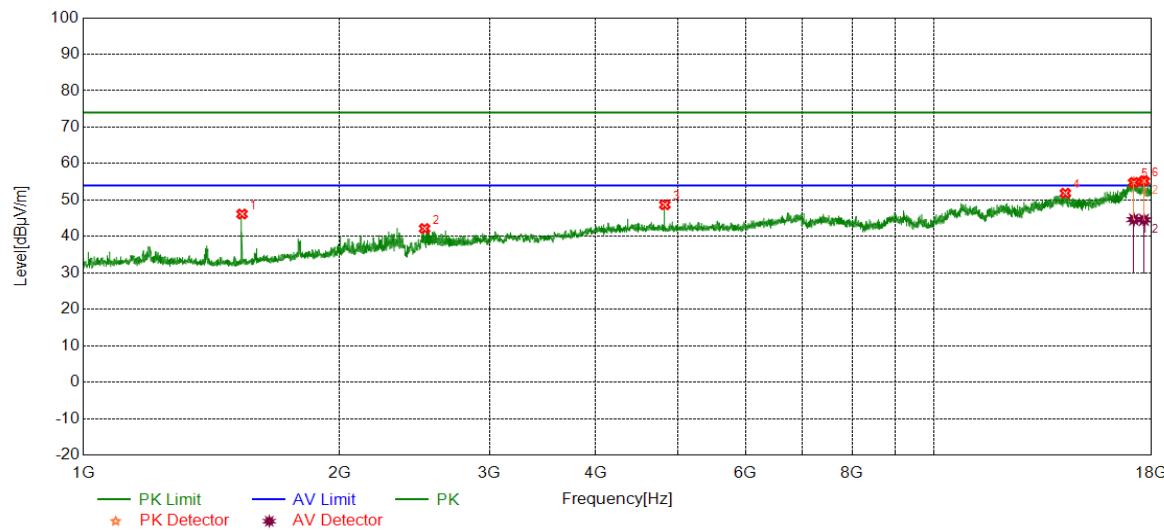


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1536.1787	51.83	-5.68	46.15	74.00	-27.85	peak
2	2517.1724	42.86	-0.70	42.16	74.00	-31.84	peak
3	4822.8038	43.75	4.94	48.69	74.00	-25.31	peak
4	14254.3757	36.05	15.81	51.86	74.00	-22.14	peak
5	17154.8591	35.07	19.74	54.81	74.00	-19.19	peak
		24.90	19.74	44.64	54.00	-9.36	average
6	17632.4387	35.91	19.33	55.24	74.00	-18.76	peak
		25.23	19.33	44.56	54.00	-9.44	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS

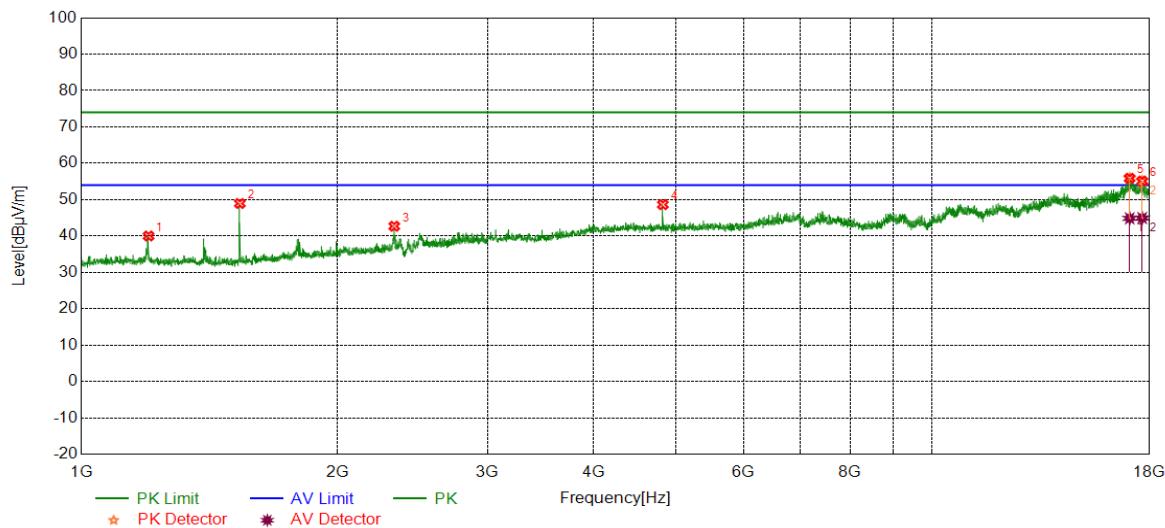

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1199.3998	45.55	-5.54	40.01	74.00	-33.99	peak
2	1535.5118	54.63	-5.69	48.94	74.00	-25.06	peak
3	2331.7773	44.51	-1.82	42.69	74.00	-31.31	peak
4	4822.8038	43.69	4.94	48.63	74.00	-25.37	peak
5	17054.8425	35.39	20.49	55.88	74.00	-18.12	peak
		24.37	20.49	44.86	54.00	-9.14	average
6	17642.4404	35.78	19.34	55.12	74.00	-18.88	peak
		25.60	19.34	44.94	54.00	-9.06	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS

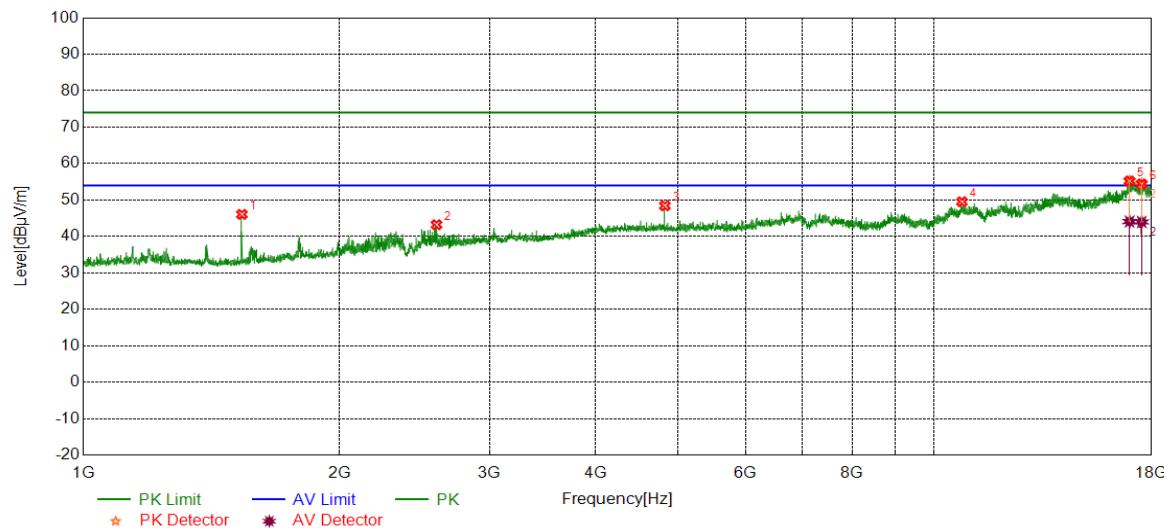

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1535.5118	51.74	-5.69	46.05	74.00	-27.95	peak
2	2599.8666	43.88	-0.67	43.21	74.00	-30.79	peak
3	4822.8038	43.47	4.94	48.41	74.00	-25.59	peak
4	10773.7956	36.90	12.61	49.51	74.00	-24.49	peak
5	16957.3262	35.09	20.13	55.22	74.00	-18.78	peak
		23.96	20.13	44.09	54.00	-9.91	average
6	17524.9208	35.18	19.23	54.41	74.00	-19.59	peak
		24.75	19.23	43.98	54.00	-10.02	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS

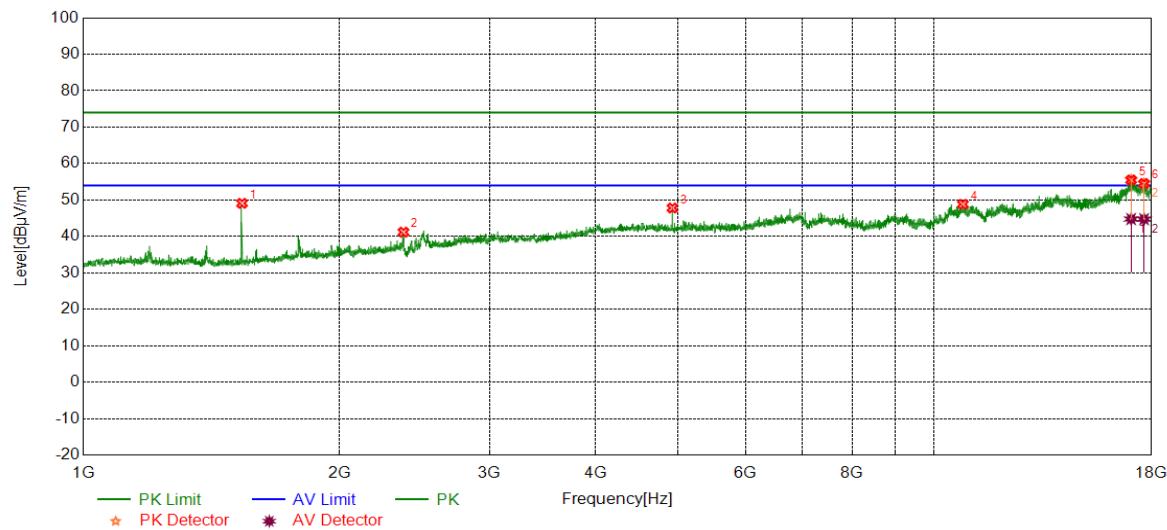


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1536.1787	54.77	-5.68	49.09	74.00	-24.91	peak
2	2377.7926	42.68	-1.51	41.17	74.00	-32.83	peak
3	4922.8205	42.56	5.24	47.80	74.00	-26.20	peak
4	10801.3002	35.79	13.03	48.82	74.00	-25.18	peak
5	17029.8383	35.28	20.22	55.50	74.00	-18.50	peak
		24.55	20.22	44.77	54.00	-9.23	average
6	17634.9392	35.17	19.36	54.53	74.00	-19.47	peak
		25.38	19.36	44.74	54.00	-9.26	average

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. AVG: VBW=10 Hz.
6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS

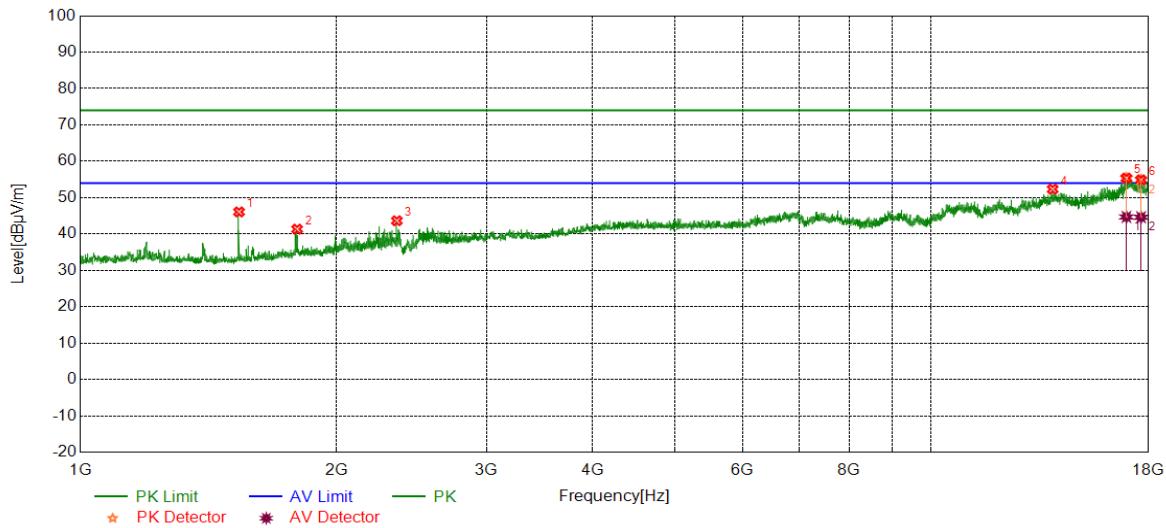

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	1536.1787	51.75	-5.68	46.07	74.00	-27.93	peak
2	1797.5992	45.24	-3.90	41.34	74.00	-32.66	peak
3	2354.4515	45.33	-1.69	43.64	74.00	-30.36	peak
4	13884.3141	36.17	16.15	52.32	74.00	-21.68	peak
5	16949.8250	35.54	19.84	55.38	74.00	-18.62	peak
		24.85	19.84	44.69	54.00	-9.31	average
6	17634.9392	35.54	19.36	54.90	74.00	-19.10	peak
		25.25	19.36	44.61	54.00	-9.39	average

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. AVG: VBW=10 Hz.
 6. Confirm that the test have added the BRF losses during the testing. Proper operation of the transmitter prior to adding the filter to the measurement chain. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 7. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.