



FCC 47 CFR PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

NAVIGATOR X1550

MODEL NUMBER: DH-UAV-Aircraft-X1550

FCC ID: SVNX1550

REPORT NUMBER: 4788322398-3-4

ISSUE DATE: July 19, 2018

Prepared for

**Zhejiang Dahua Vision Technology Co., Ltd.
No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China**

Prepared by

**UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch
Room 101, Building 10, Innovation Technology Park,
Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China**

Tel: +86 769 33817100

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
--	7/19/2018	Initial Issue	

Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	20dB Bandwidth	15.247 (a) (i)	Pass
2	Peak Conducted Output Power	FCC 15.247 (b) (2)	Pass
3	Carrier Hopping Channel Separation	FCC 15.247 (a) (1)	Pass
4	Number of Hopping Frequency	15.247 (a) (i)	Pass
5	Time of Occupancy (Dwell Time)	15.247 (a) (i)	Pass
6	Conducted Bandedge	FCC 15.247 (d)	Pass
7	Radiated Bandedge and Spurious	FCC 15.247 (d) FCC 15.209 FCC 15.205	Pass
8	Antenna Requirement	FCC 15.203	Pass

TABLE OF CONTENTS

1. ATTESTATION OF TESCT RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>8</i>
4.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>8</i>
5. EQUIPMENT UNDER TEST	9
5.1. <i>DESCRIPTION OF EUT</i>	<i>9</i>
5.2. <i>MAXIMUM OUTPUT POWER</i>	<i>9</i>
5.3. <i>CHANNEL LIST</i>	<i>10</i>
5.4. <i>TEST CHANNEL CONFIGURATION</i>	<i>11</i>
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER</i>	<i>11</i>
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>12</i>
5.7. <i>DESCRIPTION OF TEST SETUP</i>	<i>13</i>
5.8. <i>MEASURING INSTRUMENT AND SOFTWARE USED</i>	<i>14</i>
6. ANTENNA PORT TEST RESULTS	15
6.1. <i>ON TIME AND DUTY CYCLE</i>	<i>15</i>
6.2. <i>20 dB BANDWIDTH</i>	<i>17</i>
6.3. <i>PEAK CONDUCTED OUTPUT POWER</i>	<i>20</i>
6.4. <i>CARRIER HOPPING CHANNEL SEPARATION</i>	<i>22</i>
6.5. <i>NUMBER OF HOPPING FREQUENCY</i>	<i>24</i>
6.6. <i>TIME OF OCCUPANCY (DWELL TIME)</i>	<i>27</i>
6.7. <i>CONDUCTED SPURIOUS EMISSION</i>	<i>32</i>
7. RADIATED TEST RESULTS	37
7.1. <i>LIMITS AND PROCEDURE</i>	<i>37</i>
7.2. <i>RADIATED BANDEDGE</i>	<i>43</i>
7.3. <i>SPURIOUS EMISSIONS (1~10GHz)</i>	<i>51</i>
7.4. <i>SPURIOUS EMISSIONS 30M ~ 1 GHz</i>	<i>63</i>
7.5. <i>SPURIOUS EMISSIONS BELOW 30M</i>	<i>65</i>
8. AC POWER LINE CONDUCTED EMISSIONS	69



9. ANTENNA REQUIREMENTS.....71

1. ATTESTATION OF TESCT RESULTS

Applicant Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Manufacturer Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

Factory Information

Company Name: Zhejiang Dahua Vision Technology Co., Ltd.
Address: No.1199, Bin'an Road, Binjiang District, Hangzhou, P.R. China

EUT Name: NAVIGATOR X1550



Brand:

Model:

Serial Model:


Sample Received Date: July 10, 2018

Date of Tested: July 10, 2018 ~ July 12, 2018

APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS

Tested By:



Denny Huang
Engineer
Approved By:



Stephen Guo
Laboratory Manager

Checked By:



Shawn Wen
Laboratory Leader

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with DA 00-705, KDB414788 D01 Radiated Test Site v01, ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p>A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been assessed and proved to be in compliance with A2LA.</p> <p>IAS (Lab Code: TL-702) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has demonstrated compliance with ISO/IEC Standard 17025:2005, General requirements for the competence of testing and calibration laboratories</p> <p>FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Delcaration of Conformity (DoC) and Certification rules</p> <p>IC(Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been registered and fully described in a report filed with ISED. The Company Number is 21320.</p> <p>VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793.</p> <p>Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B , the VCCI registration No. is C-20012 and T-20011</p>
---------------------------	---

Note:

1. All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China
2. The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.
3. For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30MHz had been correlated to measurements performed on an OATS.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Uncertainty for Conduction emission test	2.90dB
Uncertainty for Radiation Emission test(include Fundamental emission) (9KHz-30MHz)	2.2dB
Uncertainty for Radiation Emission test(include Fundamental emission) (30MHz-1GHz)	4.52dB
Uncertainty for Radiation Emission test (1GHz to 26GHz)(include Fundamental emission)	5.04dB(1-6GHz) 5.30dB (6GHz-18Gz) 5.23dB (18GHz-26Gz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

Equipment	NAVIGATOR X1550				
Model Name	DH-UAV-Aircraft-X1550				
Series Model	OEM-UAV-Aircraft-X1550, UAV-Aircraft-X1550, DHI-UAV-Aircraft-X1550, DHI-UAV-Aircraft-X1550-1023, DHI-UAV-Aircraft-X1550-1033, UAV-Aircraft-X1550-1023, UAV-Aircraft-X1550-1033				
Model Difference	All the same except for the appearance of the different color and graphic pattern.				
Product Description	Operation Frequency	907.15 MHz ~ 923.35 MHz			
	Modulation Type				
	2GFSK				
Rated Input Voltage	DC 44.4V				
Battery	DC 22.2V, 27000mAh*2				

5.2. MAXIMUM OUTPUT POWER

Mode	Frequency (MHz)	Channel Number	Max Output Power (dBm)
2GFSK	907.15 ~ 923.35	1-163[163]	18.233

5.3. CHANNEL LIST

Channel	Frequency (MHz)						
1	907.15	42	911.25	83	915.35	124	919.45
2	907.25	43	911.35	84	915.45	125	919.55
3	907.35	44	911.45	85	915.55	126	919.65
4	907.45	45	911.55	86	915.65	127	919.75
5	907.55	46	911.65	87	915.75	128	919.85
6	907.65	47	911.75	88	915.85	129	919.95
7	907.75	48	911.85	89	915.95	130	920.05
8	907.85	49	911.95	90	916.05	131	920.15
9	907.95	50	912.05	91	916.15	132	920.25
10	908.05	51	912.15	92	916.25	133	920.35
11	908.15	52	912.25	93	916.35	134	920.45
12	908.25	53	912.35	94	916.45	135	920.55
13	908.35	54	912.45	95	916.55	136	920.65
14	908.45	55	912.55	96	916.65	137	920.75
15	908.55	56	912.65	97	916.75	138	920.85
16	908.65	57	912.75	98	916.85	139	920.95
17	908.75	58	912.85	99	916.95	140	921.05
18	908.85	59	912.95	100	917.05	141	921.15
19	908.95	60	913.05	101	917.15	142	921.25
20	909.05	61	913.15	102	917.25	143	921.35
21	909.15	62	913.25	103	917.35	144	921.45
22	909.25	63	913.35	104	917.45	145	921.55
23	909.35	64	913.45	105	917.55	146	921.65
24	909.45	65	913.55	106	917.65	147	921.75
25	909.55	66	913.65	107	917.75	148	921.85
26	909.65	67	913.75	108	917.85	149	921.95
27	909.75	68	913.85	109	917.95	150	922.05
28	909.85	69	913.95	110	918.05	151	922.15
29	909.95	70	914.05	111	918.15	152	922.25
30	910.05	71	914.15	112	918.25	153	922.35
31	910.15	72	914.25	113	918.35	154	922.45
32	910.25	73	914.35	114	918.45	155	922.55
33	910.35	74	914.45	115	918.55	156	922.65
34	910.45	75	914.55	116	918.65	157	922.75
35	910.55	76	914.65	117	918.75	158	922.85
36	910.65	77	914.75	118	918.85	159	922.95
37	910.75	78	914.85	119	918.95	160	923.05
38	910.85	79	914.95	120	919.05	161	923.15
39	910.95	80	915.05	121	919.15	162	923.25
40	911.05	81	915.15	122	919.25	163	923.35
41	911.15	82	915.25	123	919.35		

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel Number	Test Channel
2GFSK	CH 1, CH 82, CH 163	Low, Middle, High

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 907.15 ~ 923.35MHzMHz Band				
Test Software		/		
Modulation Type	Transmit Antenna Number	Test Channel		
		CH 1	CH 82	CH 163
2GFSK	1	7	7	7

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	907.15MHz~923.35MHz	External Antenna	0.97

Test Mode	Transmit and Receive Mode	Description
2GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 1 can be used as transmitting/receiving antenna.


Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
2	907.15MHz~923.35MHz	External Antenna	0.97

Test Mode	Transmit and Receive Mode	Description
2GFSK	<input checked="" type="checkbox"/> 1TX, 1RX	Chain 2 can be used as transmitting/receiving antenna.

Note 1: The EUT have 2 antennas, but only 1 antenna active at any moment in time.

Note 2: The EUT only support SISO mode.

Note 3: The circuit before the two difference antenna are the same, so for all test we only perform one output port and one antenna.

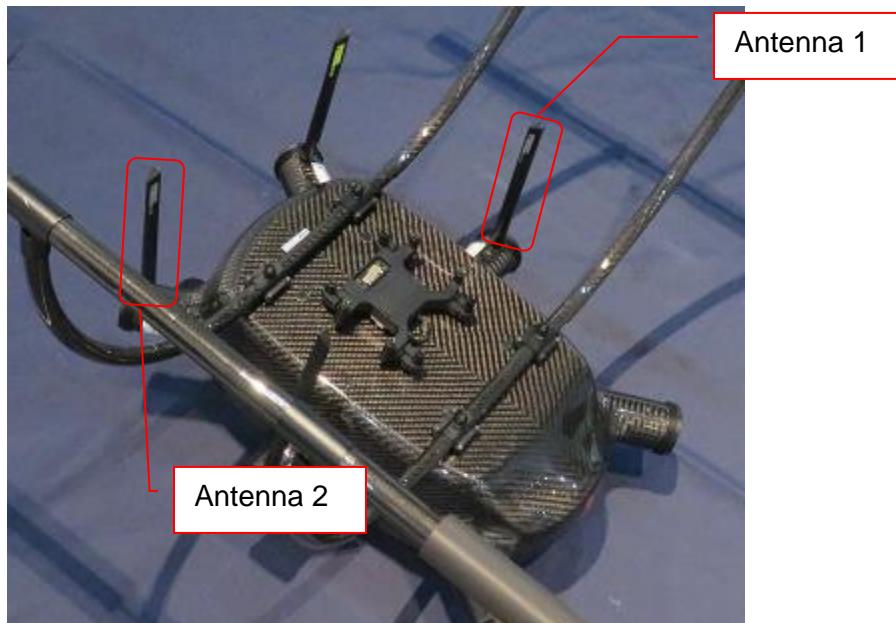

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	P/N
1	Laptop	ThinkPad	T460S	SL10K24796 JS
2	USB to Serial board	N/A	N/A	N/A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	USB	Unshielded	0.7	N/A

Note: The USB port only use for charging.


ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	N/A	N/A	N/A	N/A

TEST SETUP

The EUT can work in an engineer mode with a software through a PC.

SETUP DIAGRAM FOR TESTS

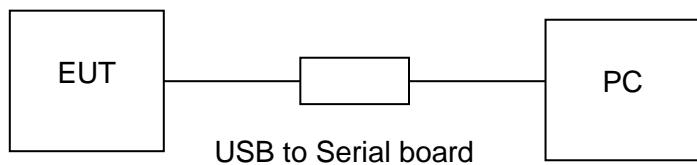



5.8. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	101961	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	101983	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Dec.12,2017	Dec.11,2018				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Conducted disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Radiated Emissions										
Instrument										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	MXE EMI Receiver	KESIGHT	N9038A	MY56400 036	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Jan.09, 2016	Jan.09, 2019				
<input checked="" type="checkbox"/>	Preamplifier	HP	8447D	2944A090 99	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	EMI Measurement Receiver	R&S	ESR26	101377	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Horn Antenna	TDK	HRN-0118	130939	Jan. 09, 2016	Jan. 09, 2019				
<input checked="" type="checkbox"/>	High Gain Horn Antenna	Schwarzbeck	BBHA-9170	691	Jan.06, 2016	Jan.06, 2019				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-0118	TRS-305-00066	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Preamplifier	TDK	PA-02-2	TRS-307-00003	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Loop antenna	Schwarzbeck	1519B	00008	Mar. 26, 2016	Mar. 25, 2019				
Software										
Used	Description		Manufacturer	Name	Version					
<input checked="" type="checkbox"/>	Test Software for Radiated disturbance		Farad	EZ-EMC	Ver. UL-3A1					
Other instruments										
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.				
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030A	MY55410512	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Power Meter	Keysight	N1911A	MY55416024	Dec.12,2017	Dec.11,2018				
<input checked="" type="checkbox"/>	Power Sensor	Keysight	N1921A	MY51100041	Dec.12,2017	Dec.11,2018				

6. ANTENNA PORT TEST RESULTS

6.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

KDB 558074 Zero-Span Spectrum Analyzer Method

TEST SETUP

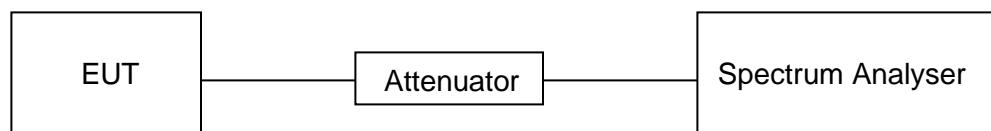

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V


RESULTS

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)
2GFSK	52.174	140.348	0.372	37.2	4.29

Note: Duty Cycle Correction Factor=10log(1/x).

Where: x is Duty Cycle(Linear)

Where: T is On Time (transmit duration)

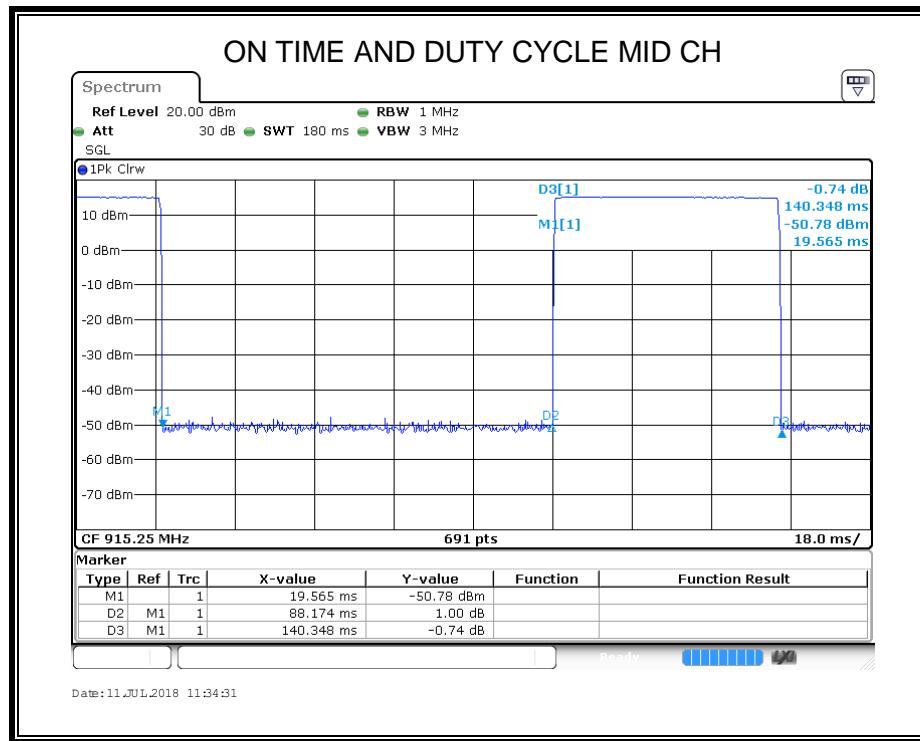

6.2. 20 dB BANDWIDTH

LIMITS

FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
15.247 (a)(i)	20dB Bandwidth	250KHz	902~928


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1% of the 20 dB bandwidth
VBW	\geq RBW
Span	approximately 2 to 3 times the 20 dB bandwidth
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

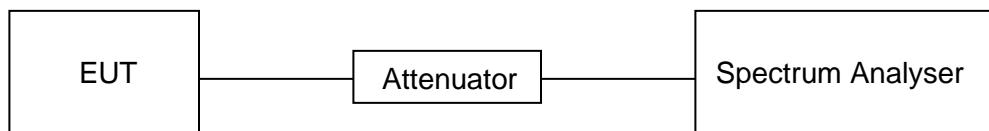




TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS

Channel	Frequency (MHz)	20dB bandwidth (KHz)	Result
Low	907.15	14.689	PASS
Middle	915.25	14.399	PASS
High	923.35	14.761	PASS

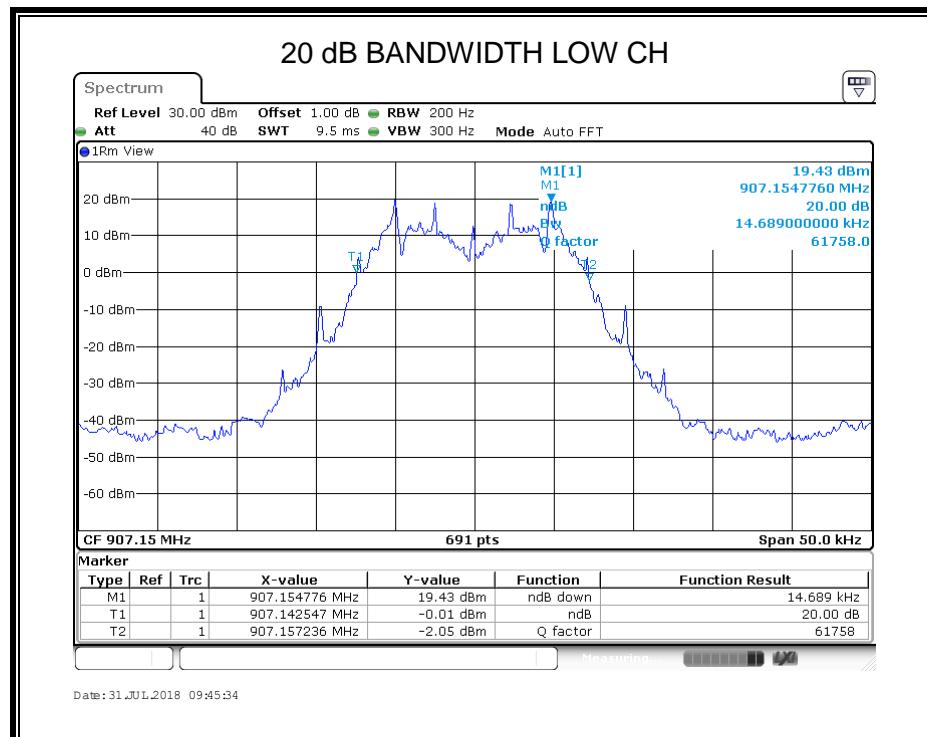

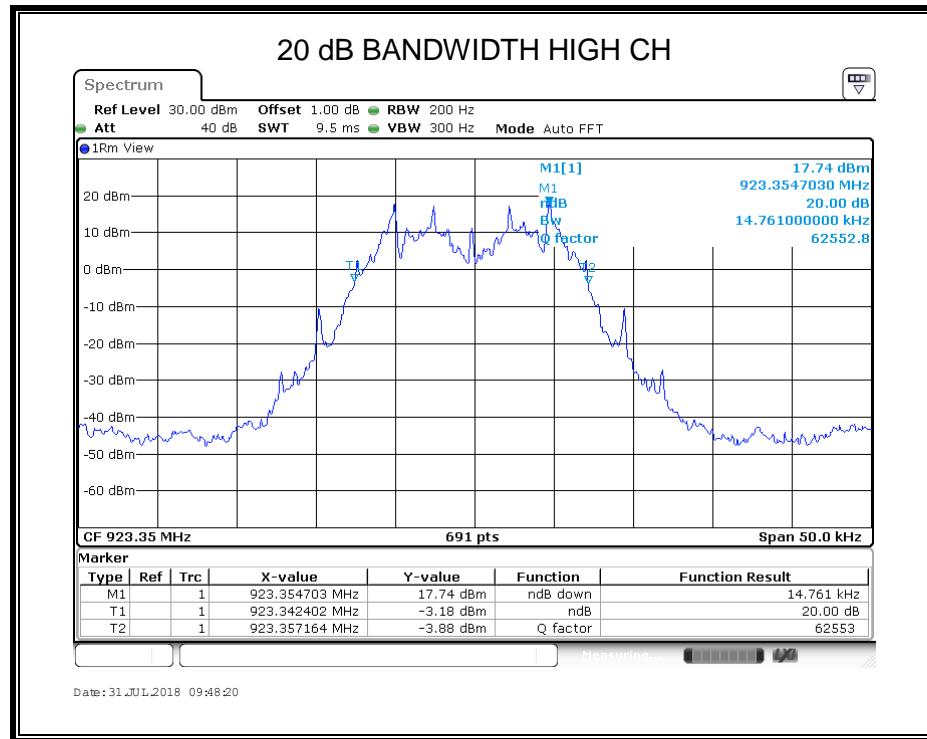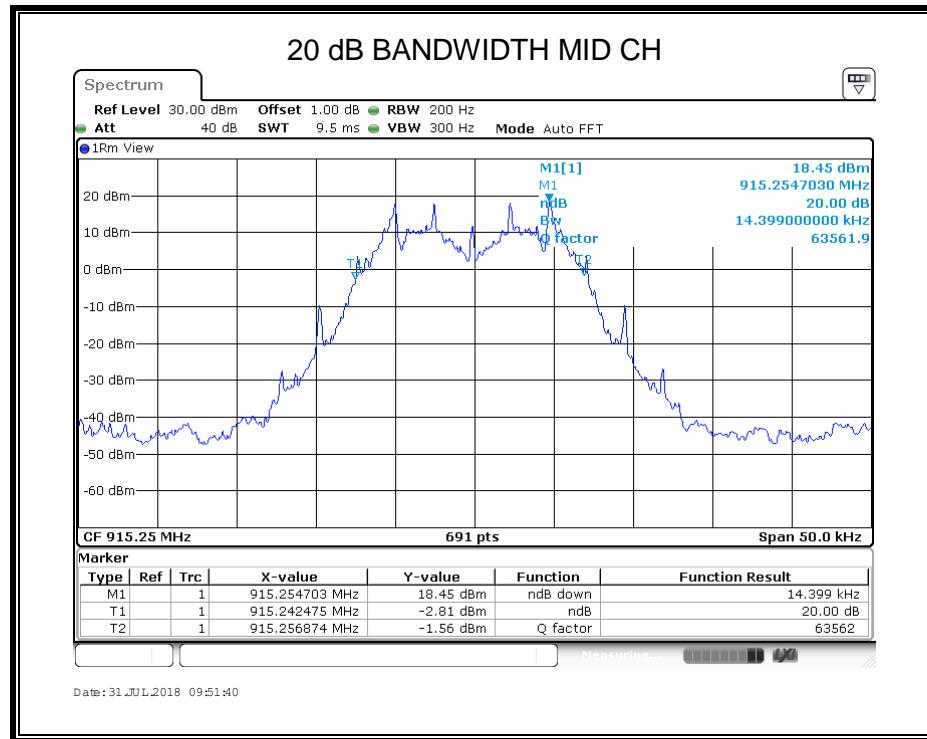

6.3. PEAK CONDUCTED OUTPUT POWER

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247 (b) (2)	Peak Conducted Output Power	1 watt for systems employing at least 50 hopping channels	902~928


TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure peak power each channel.

TEST SETUP

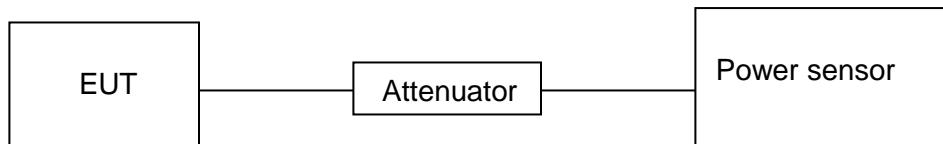

TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS

Channel	Frequency (MHz)	Maximum Conducted Output Power(PK)	Maximum Conducted Output Power(AVG)	Result
		(dBm)	(dBm)	
Low	907.15	18.233	13.967	Pass
Middle	915.25	17.411	13.105	Pass
High	923.35	16.709	12.284	Pass

6.4. CARRIER HOPPING CHANNEL SEPARATION

LIMITS

FCC Part15 (15.247) , Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247 (a) (1)	Carrier Hopping Channel Separation	25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.	902~928


TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Span	wide enough to capture the peaks of two adjacent channels
Detector	Peak
RBW	$\geq 1\%$ of the span
VBW	\geq RBW
Trace	Max hold
Sweep time	Auto couple

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot.

TEST SETUP




TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS

Channel	Carrier Hopping Channel Separation (KHz)	Limit (KHz)	Result
Middle	100.720	≥ 25	PASS

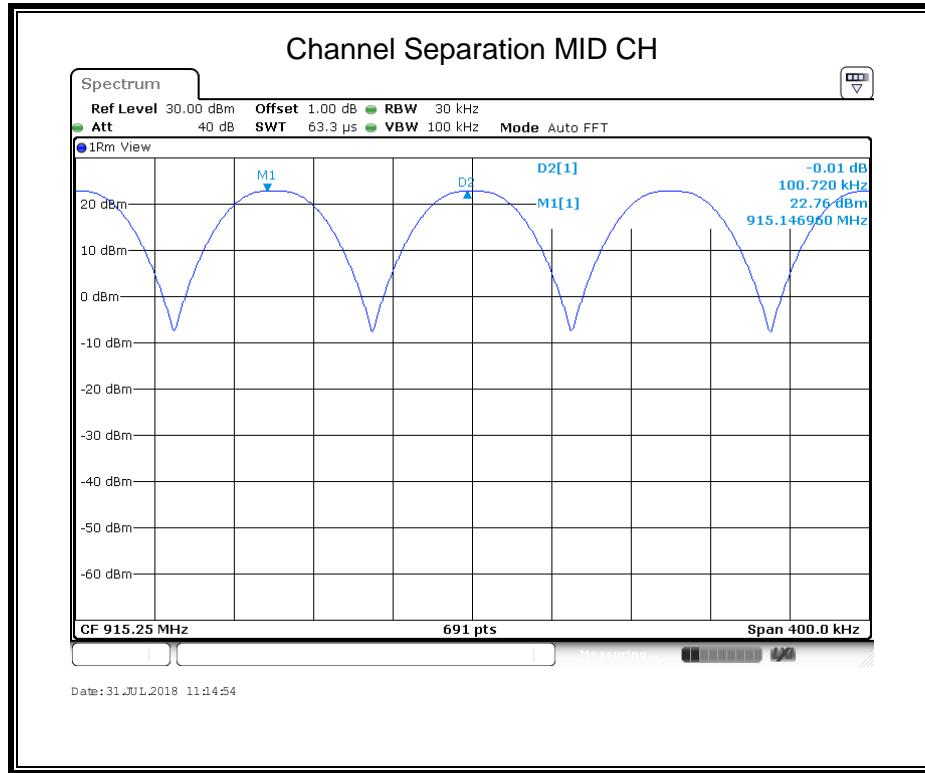

6.5. NUMBER OF HOPPING FREQUENCY

LIMITS

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
15.247 (a)(i)	Number of Hopping Frequency	at least 50 hopping channels

TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Detector	Peak
RBW	1% of the span
VBW	\geq RBW
Span	The frequency band of operation
Trace	Max hold
Sweep time	Auto couple

Set EUT to transmit maximum output power and switch on frequency hopping function. then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.

Count the quantity of peaks to get the number of hopping channels.

TEST SETUP

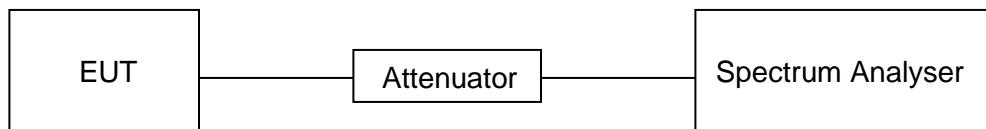




TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS

Hopping numbers	Limit	Results
163	>50	Pass

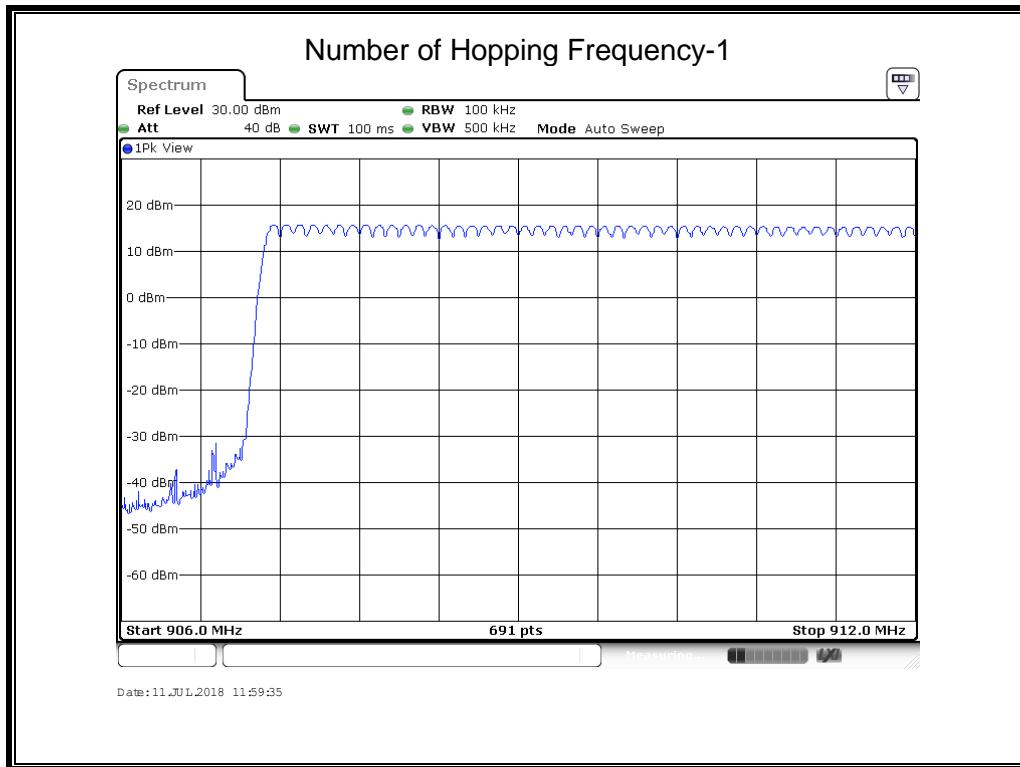

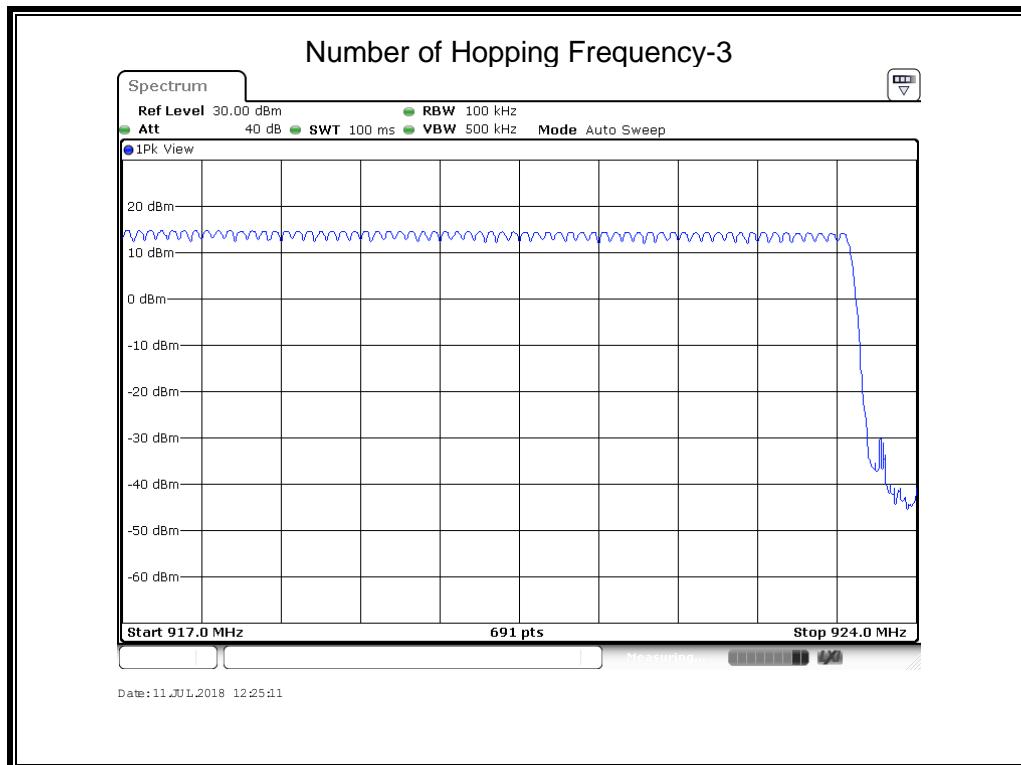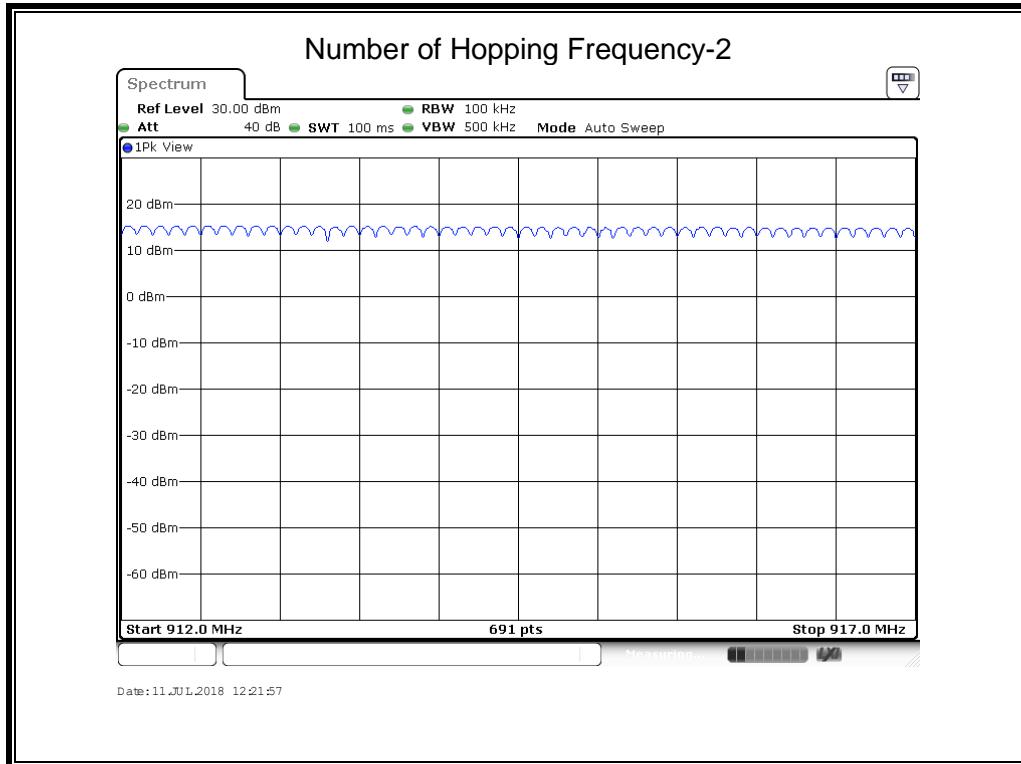

Note: The EUT doesn't support AFH mode.

6.6. TIME OF OCCUPANCY (DWELL TIME)

LIMITS

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
15.247 (a)(i)	Time of Occupancy (Dwell Time)	The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period

TEST PROCEDURE


Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	1 MHz
VBW	\geq RBW
Span	zero span
Trace	Max hold
Sweep time	As necessary to capture the entire dwell time per hopping channel

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 1MHz and VBW to 1MHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Measure the maximum time duration of one single pulse.

A Period Time = (channel number)*0.4

TEST SETUP

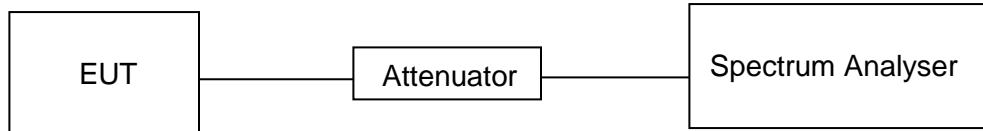


TEST ENVIRONMENT


Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS


Channel	Burst Width [ms/hop/ch]	Dwell Time [s]	Limit [s]	Results
Low	52.464	0.105	0.4	PASS
Middle	52.464	0.157	0.4	PASS
High	52.174	0.104	0.4	PASS


Note: The EUT doesn't support AFH mode.

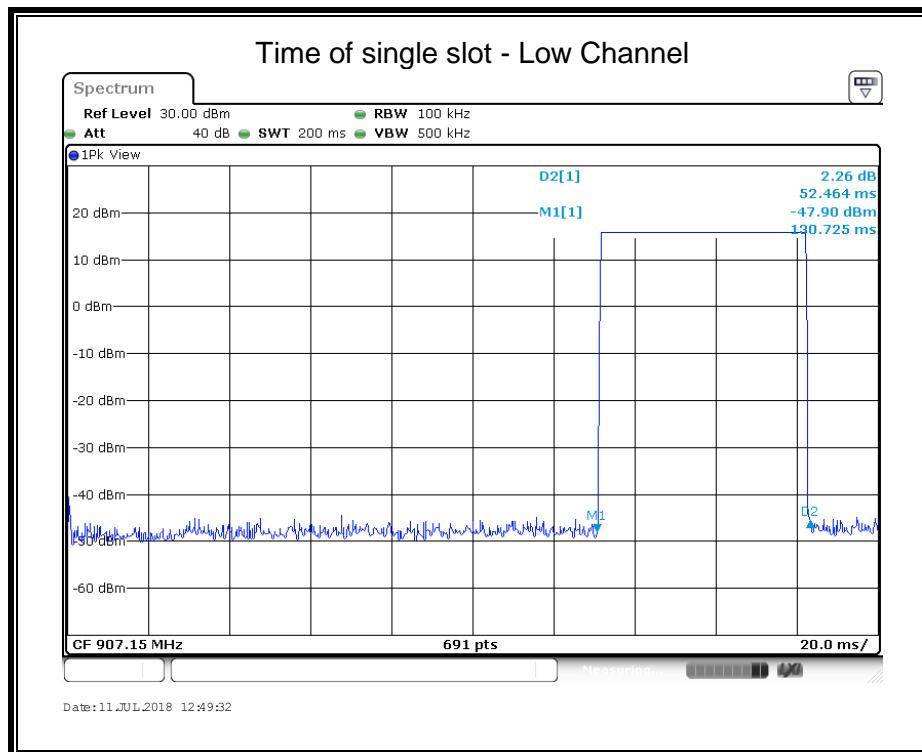

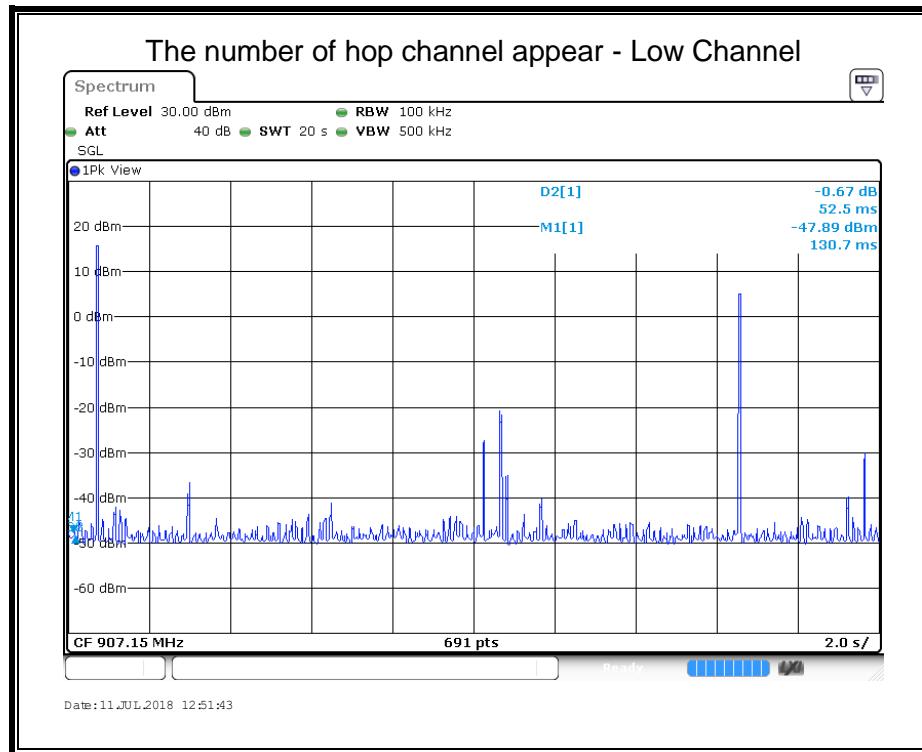



Note: The dwell time = Time of single slot * The number of hop channel appear within 20s

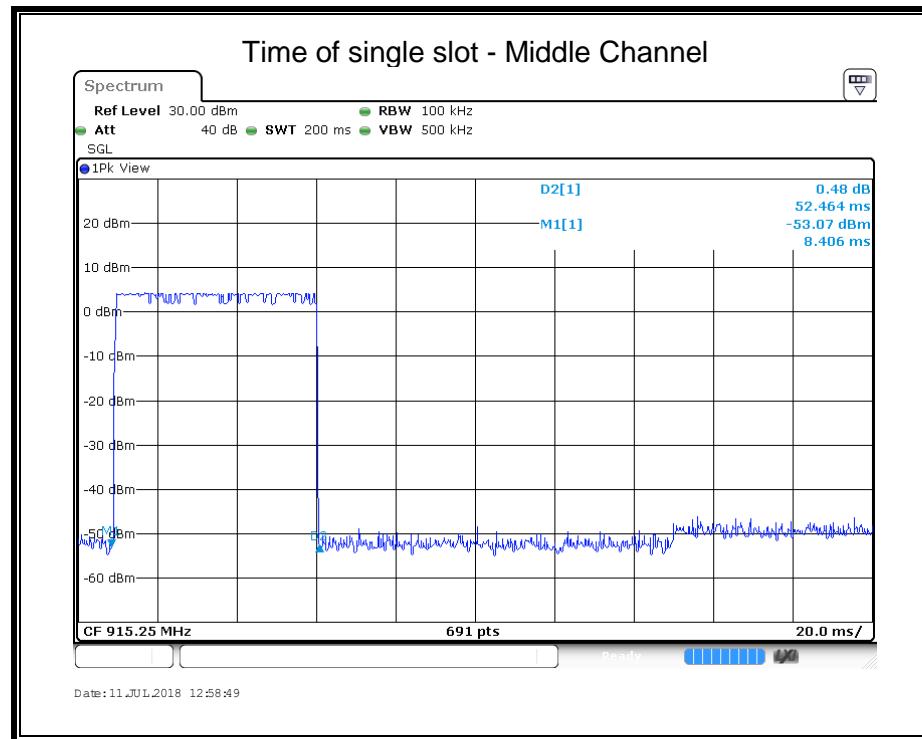

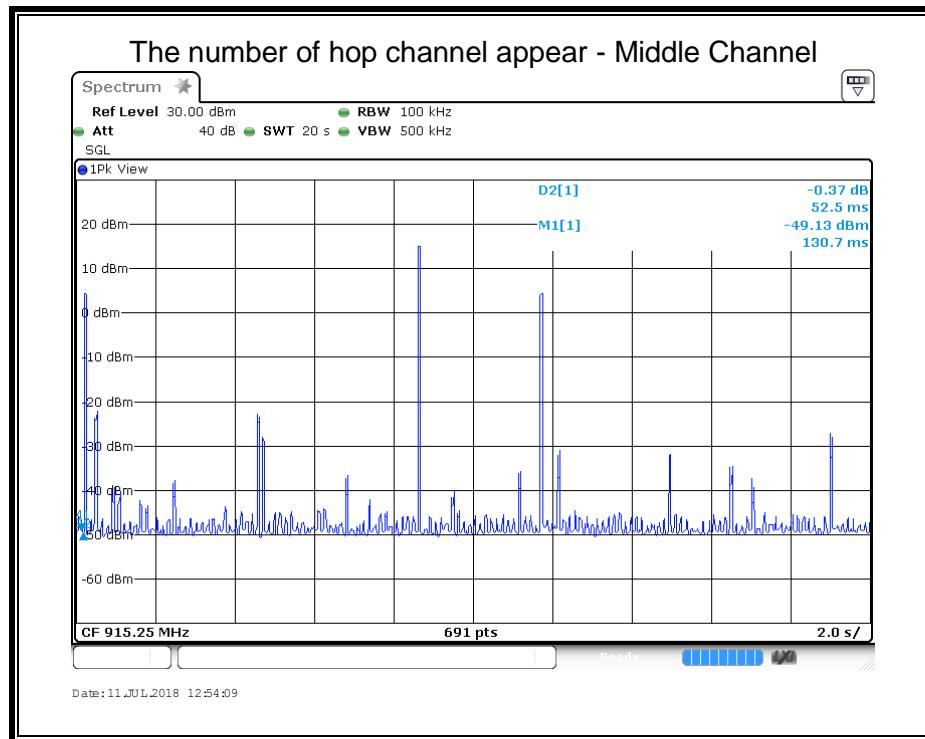

Note: The dwell time = Time of single slot * The number of hop channel appear within 20s

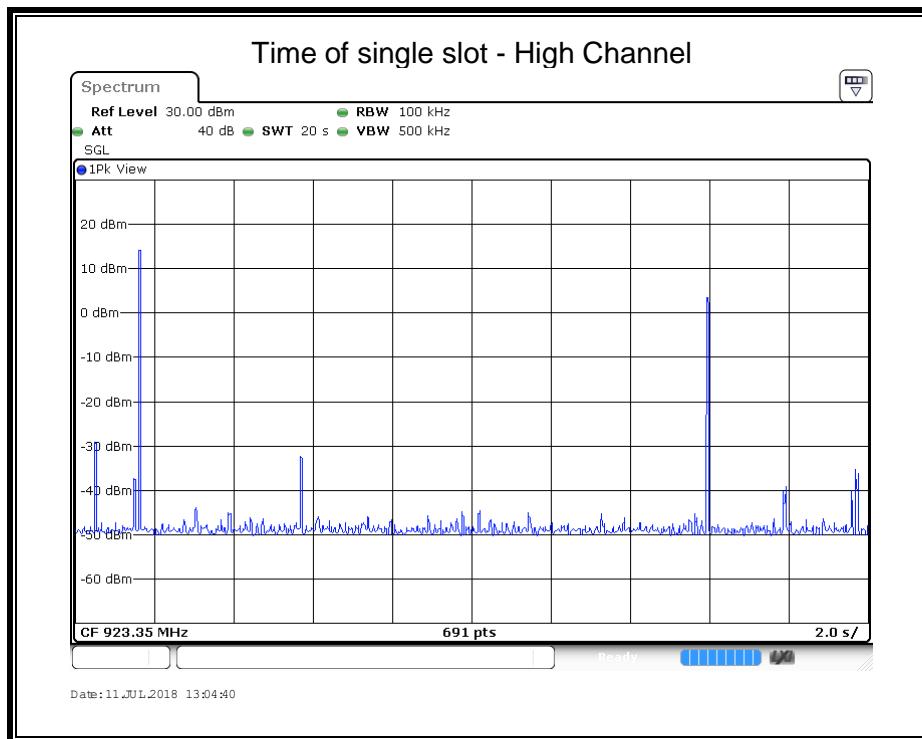

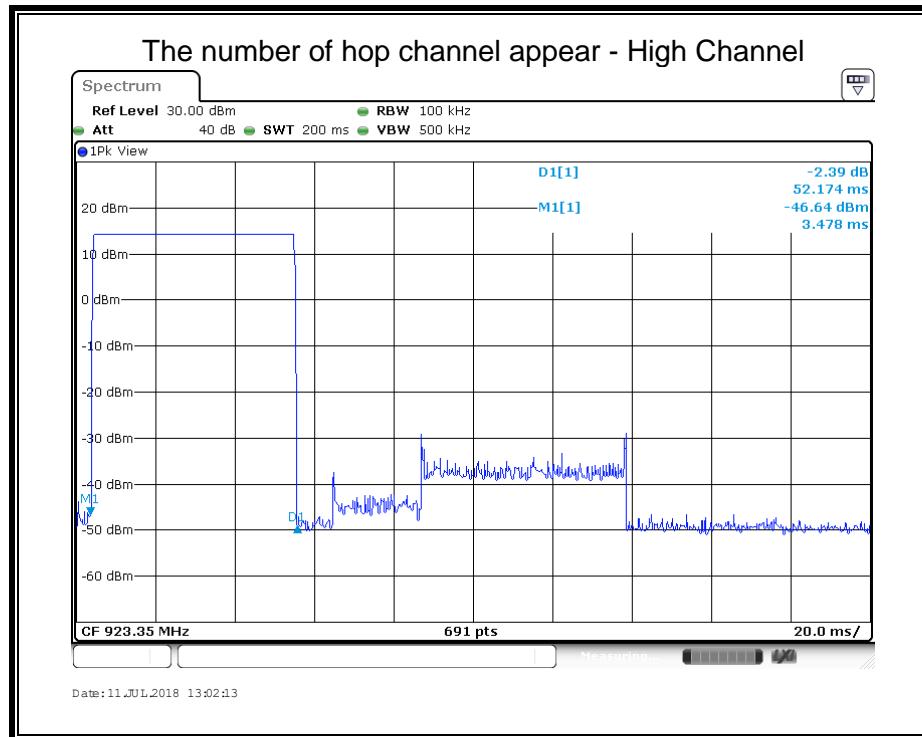

Note: The dwell time = Time of single slot * The number of hop channel appear within 20s

6.7. CONDUCTED SPURIOUS EMISSION

LIMITS

FCC Part15 (15.247) , Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Spurious Emission	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

For Bandedge use the following settings:


Detector	Peak
RBW	RBW \geq 1% of the span
VBW	\geq RBW
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

For Spurious Emission use the following settings:

Detector	Peak
RBW	100K
VBW	\geq RBW
Span	wide enough to fully capture the emission being measured
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.



TEST SETUP


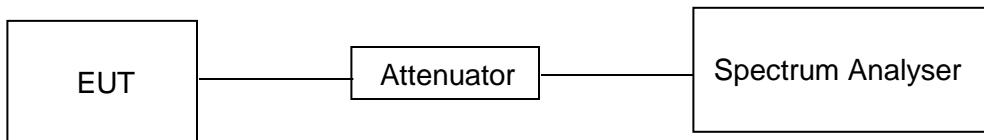




TEST ENVIRONMENT

Temperature	23.5°C	Relative Humidity	67%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V



RESULTS

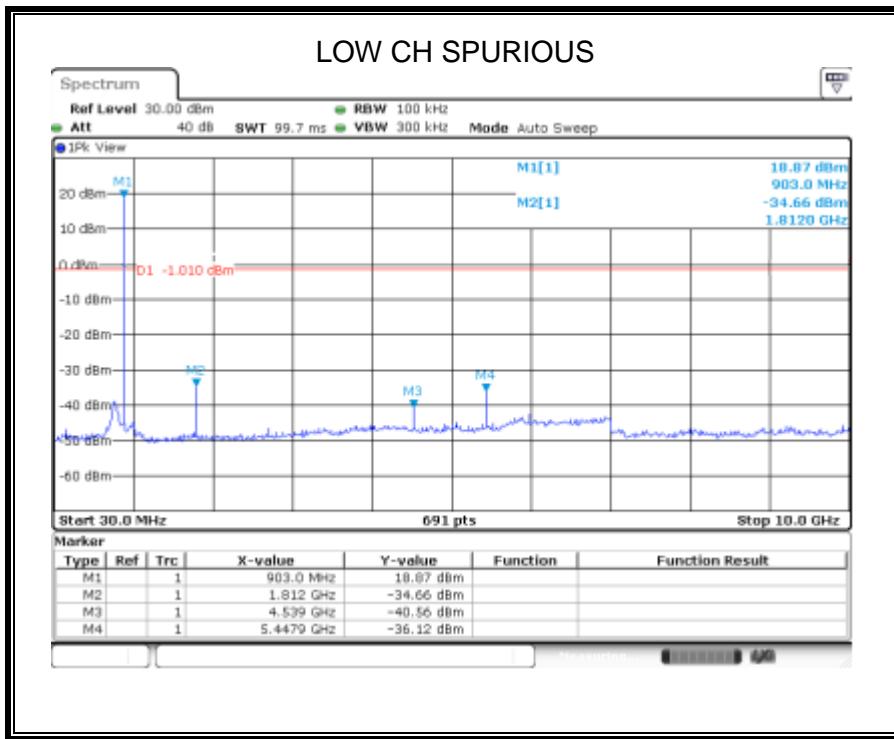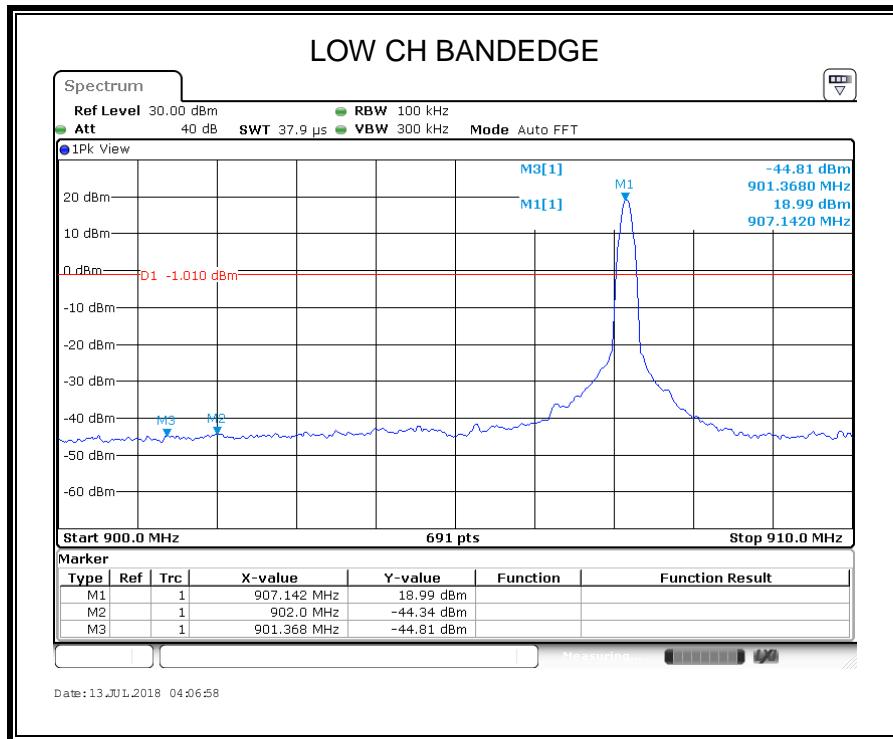SPURIOUS EMISSIONS, LOW CHANNEL

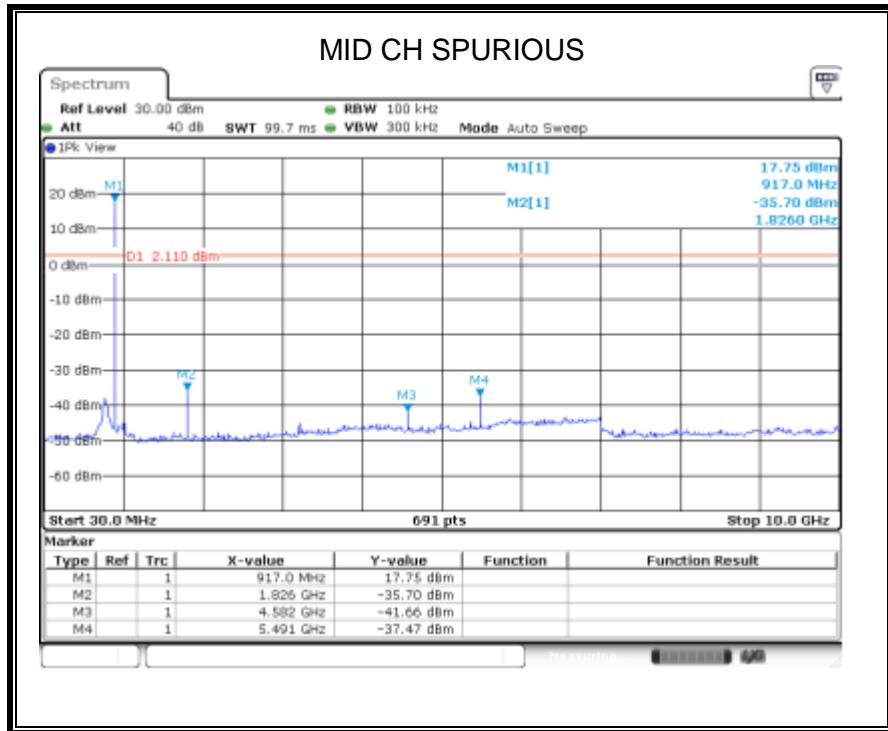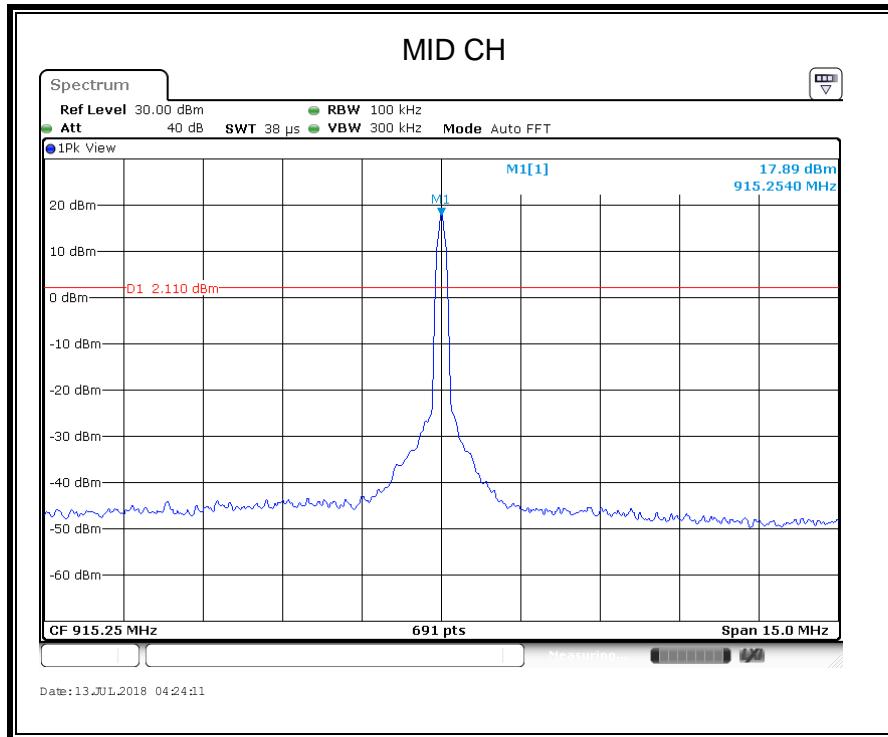SPURIOUS EMISSIONS, MID CHANNEL

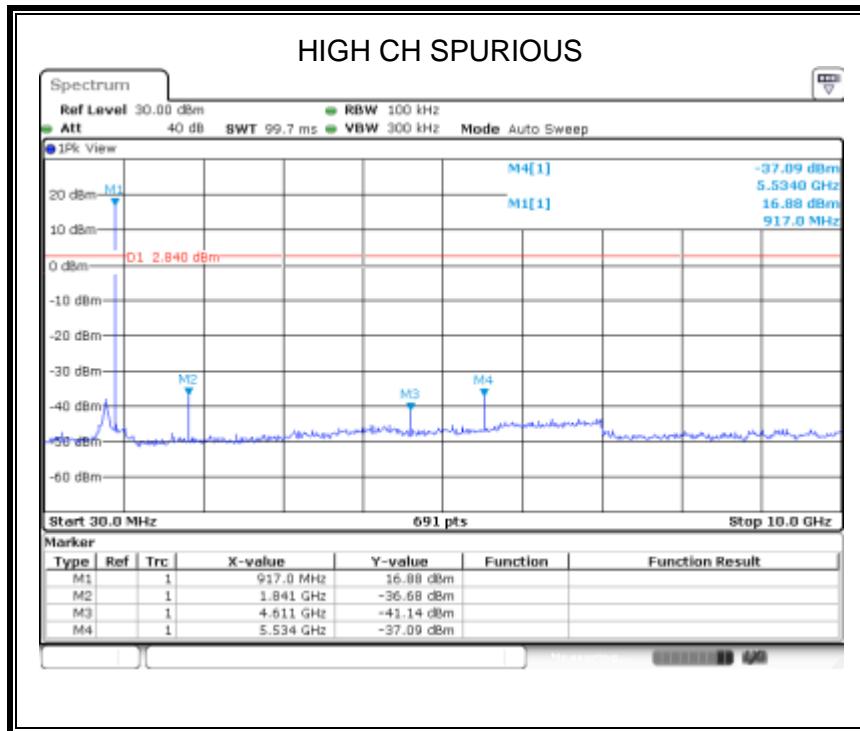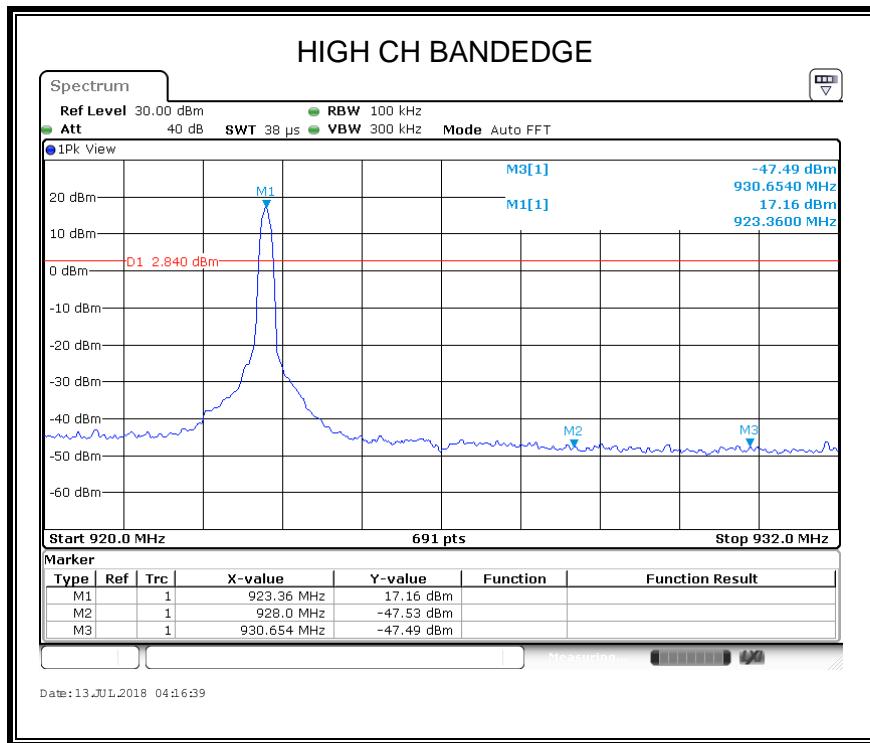SPURIOUS EMISSIONS, HIGH CHANNEL


SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

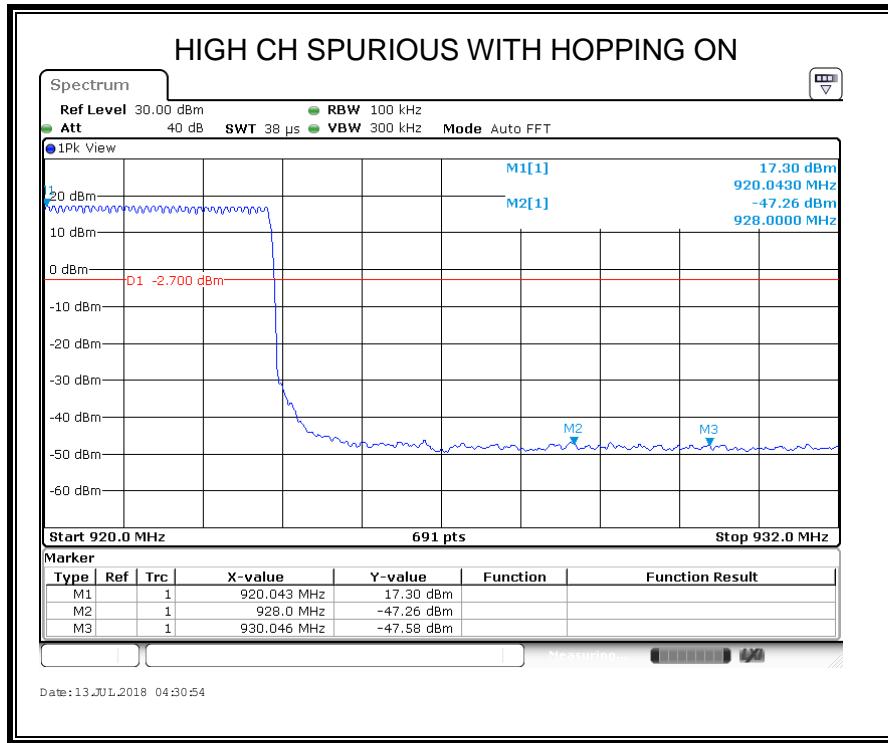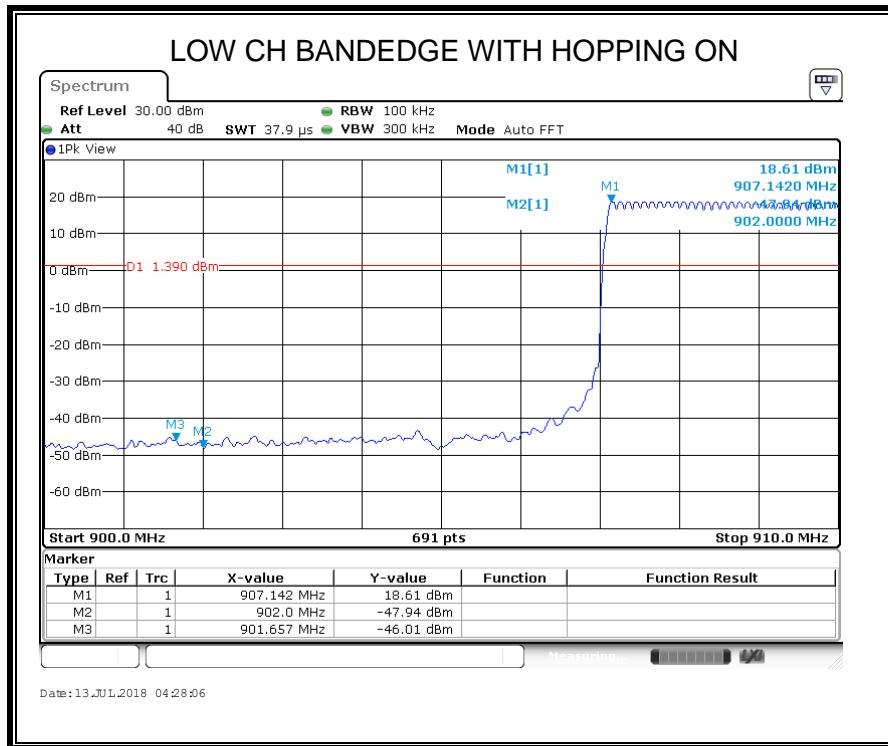

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209

Please refer to RSS-GEN Clause 8.9 and Clause 8.10

Radiation Disturbance Test Limit for FCC (Class B)(9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

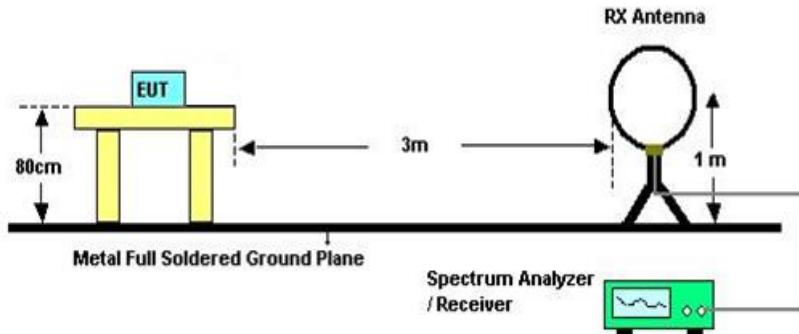


The setting of the spectrum analyser

RBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
VBW	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 and 414788 D01 Radiated Test Site v01.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788. Anechoic chamber is shown to be equivalent to or worst case from the open field site.

Below 1G and above 30MHz

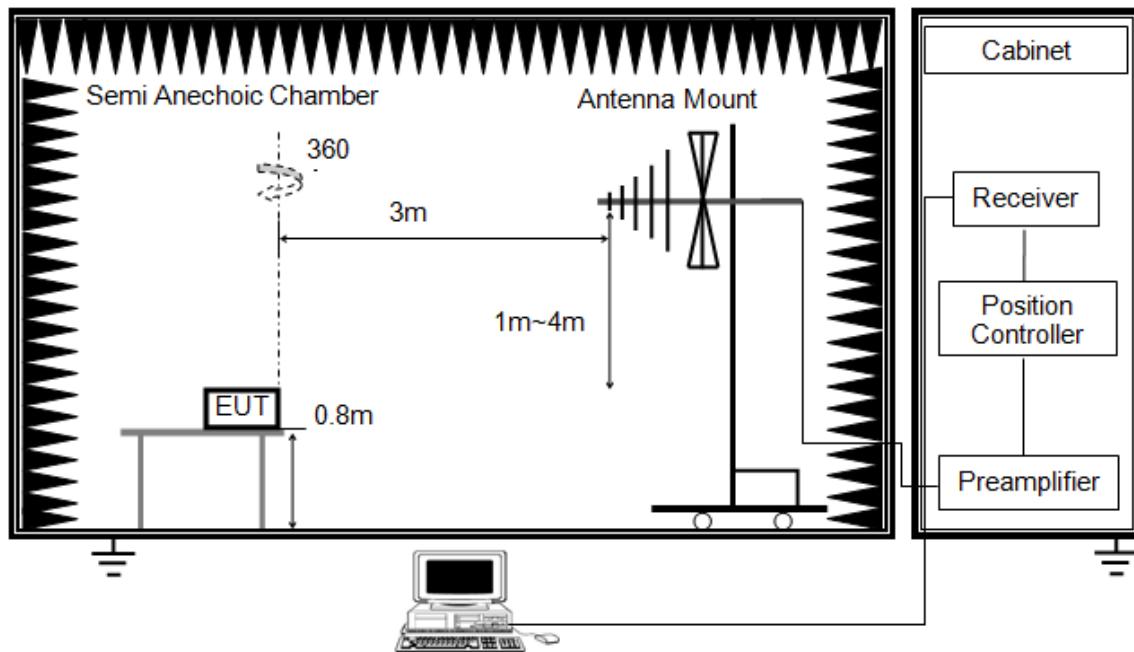


The setting of the spectrum analyser

RBW	120K
VBW	300K
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report.


Above 1G

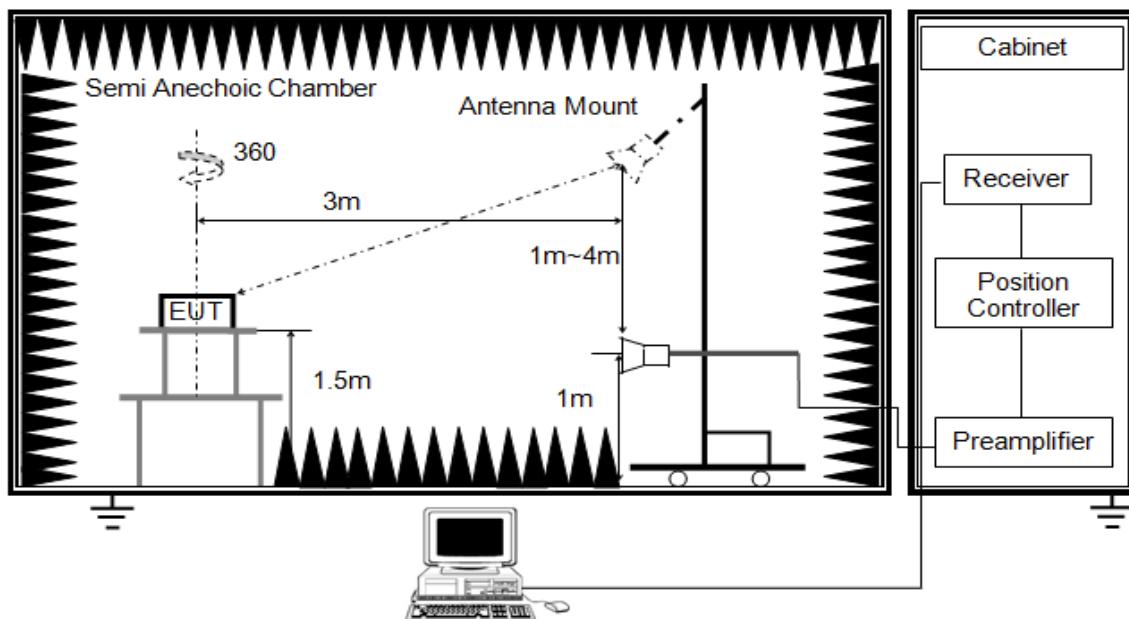

RBW	1M
VBW	3M
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For average power measurement, set the Detector to RMS, the detector and averaging type may be set for linear voltage averaging, while maintaining all of the other instrument settings, if the duty cycle of the EUT is less than 98%, the Duty Cycle Correction Factor shall be added to the measured emission levels. For the Duty Cycle and Correction Factor please refer to clause 6.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

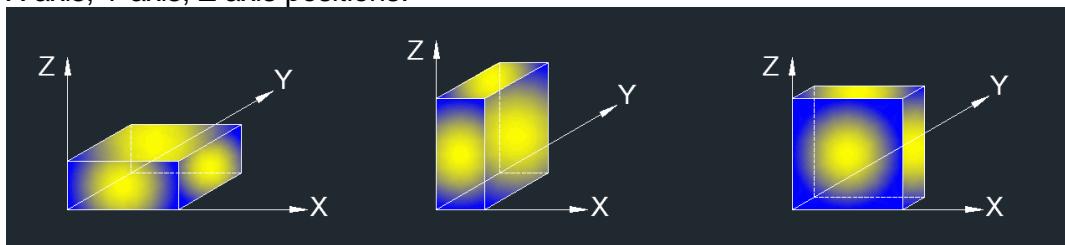

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

Note 2: All the EUT's emissions had been evaluated for simultaneous transmission with the other 2.4GHz transmitter and there were no any additional or worse emissions found.


TEST ENVIRONMENT

Temperature	22.7°C	Relative Humidity	62%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS


7.2. RADIATED BANDEDGE

RADIATED BANDEDGE (LOW CHANNEL, HORIZONTAL)

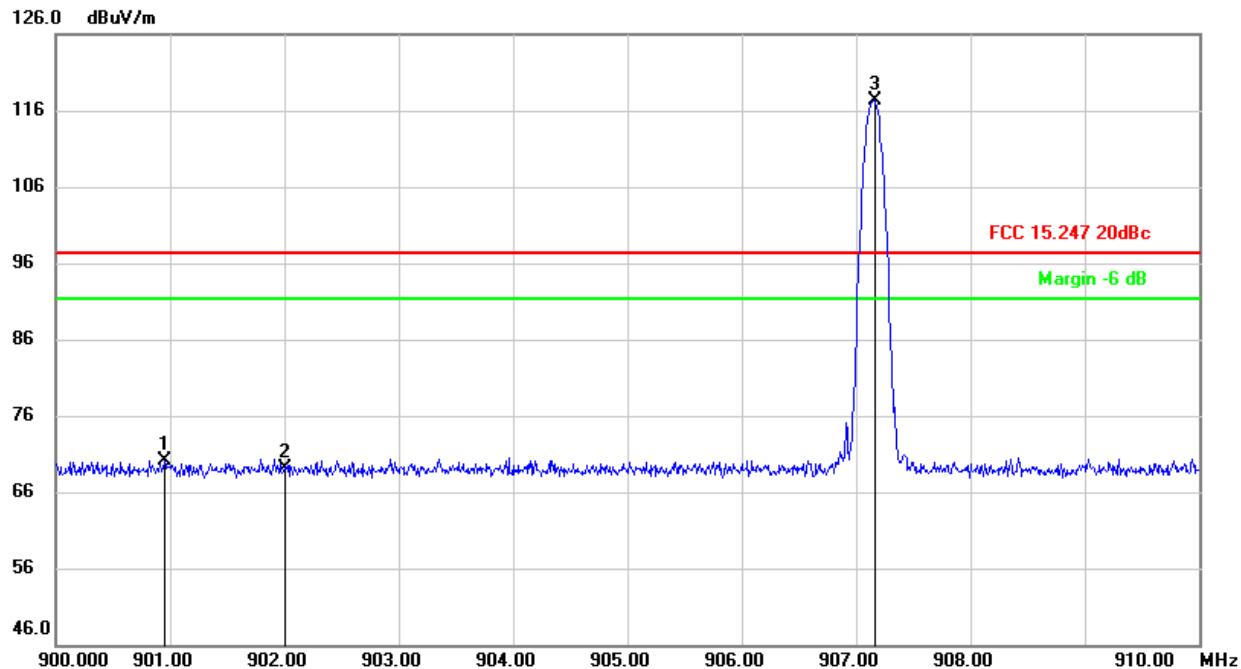


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	900.9500	45.03	25.10	70.13	97.24	-27.11	QP
2	902.0000	44.00	25.12	69.12	97.24	-28.12	QP
3	907.1600	92.09	25.15	117.24	/	/	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

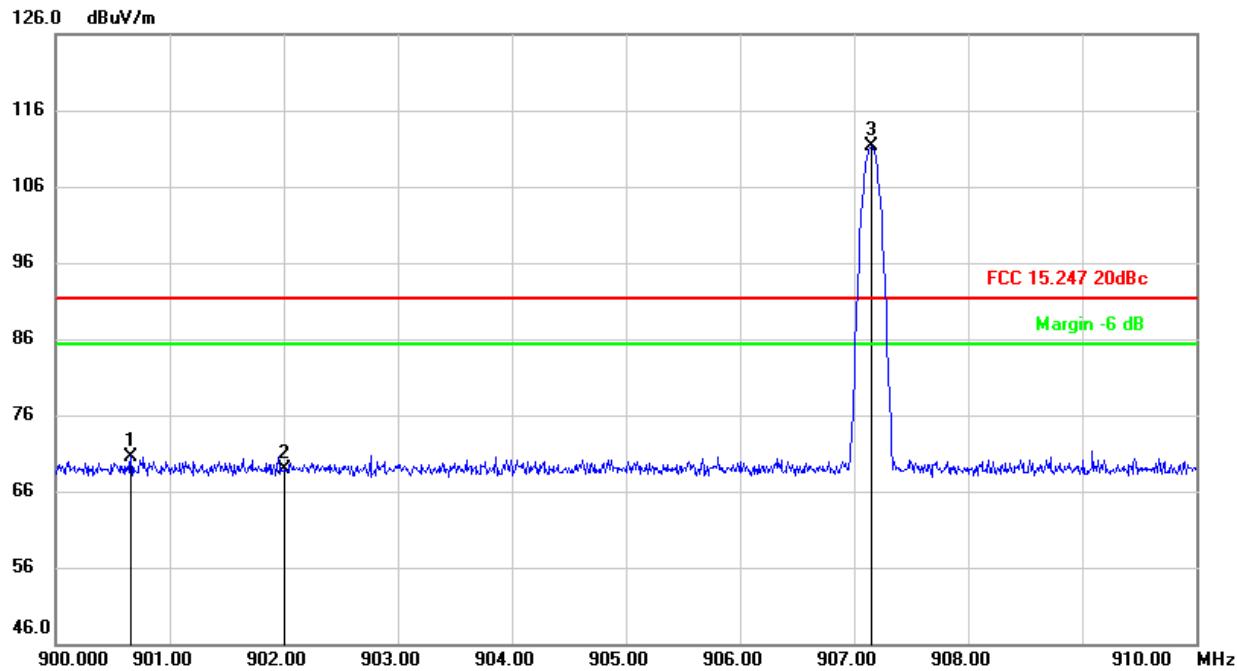RADIATED BANDEDGE (LOW CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	900.6600	45.50	25.10	70.60	91.23	-20.63	QP
2	902.0000	43.76	25.12	68.88	91.23	-22.35	QP
3	907.1500	86.08	25.15	111.23	/	/	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

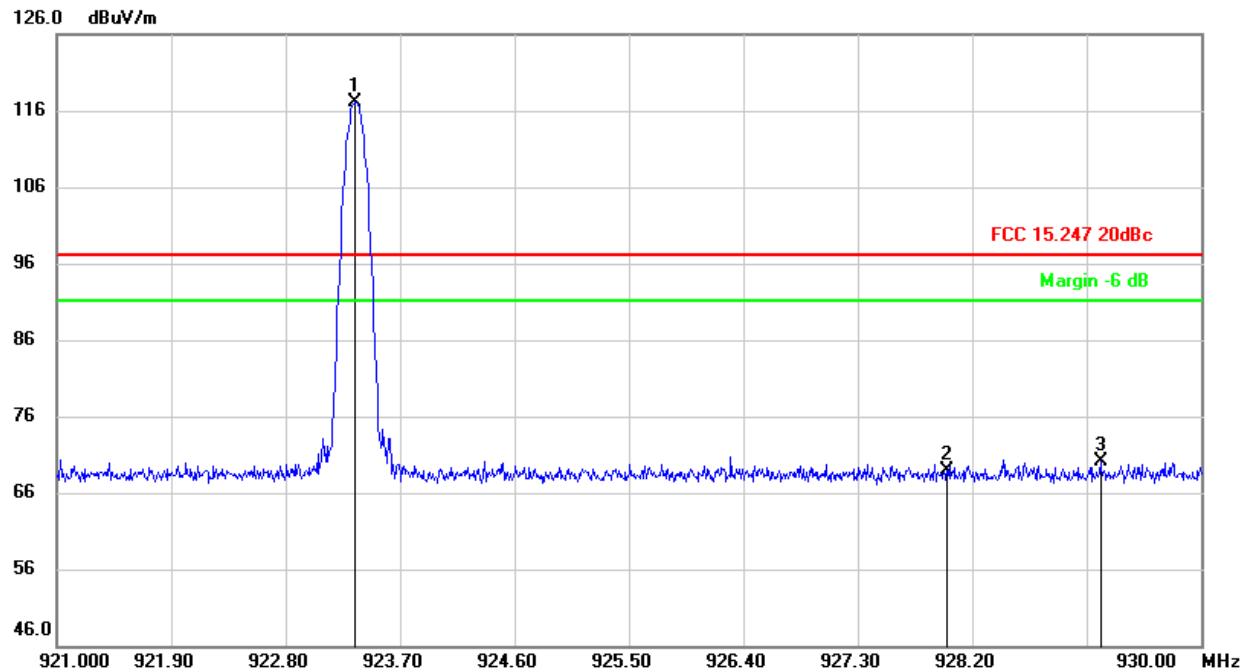RADIATED BANDEDGE (HIGH CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	923.3490	91.90	25.15	117.05	/	/	QP
2	928.0000	43.63	25.21	68.84	97.05	-28.21	QP
3	929.2079	44.93	25.22	70.15	97.05	-26.90	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

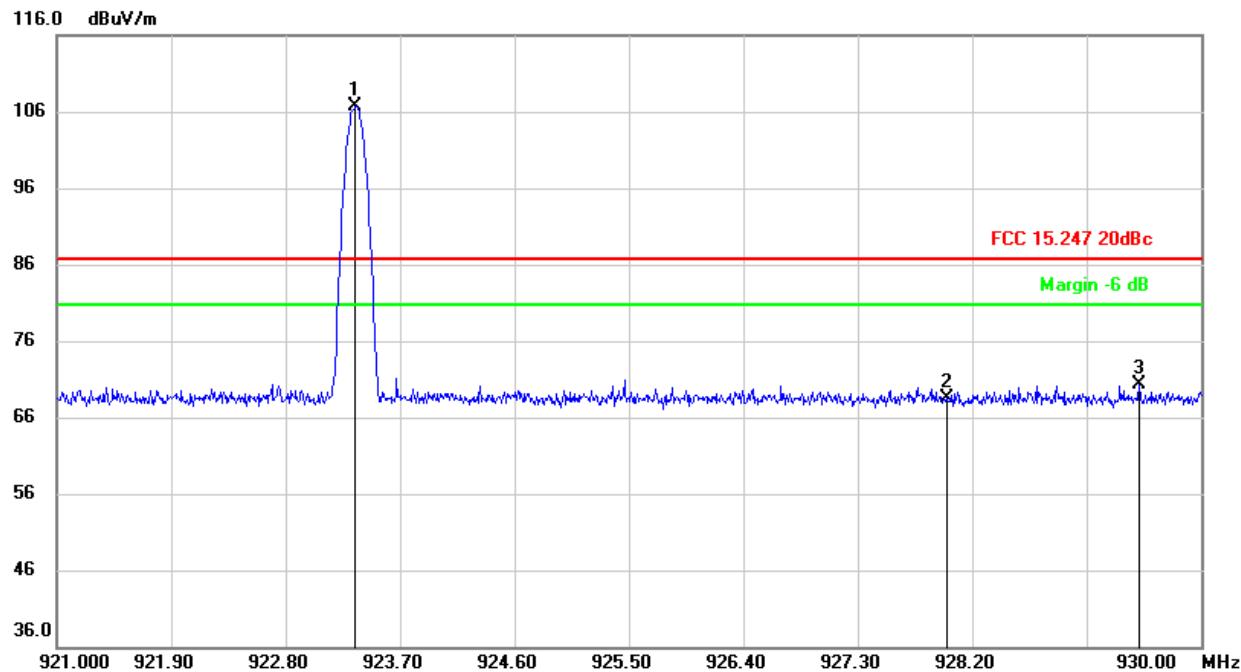RADIATED BANDEDGE (HIGH CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	923.3490	81.53	25.15	106.68	/	/	QP
2	928.0000	43.25	25.21	68.46	86.68	-18.22	QP
3	929.5140	45.10	25.23	70.33	86.68	-16.35	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

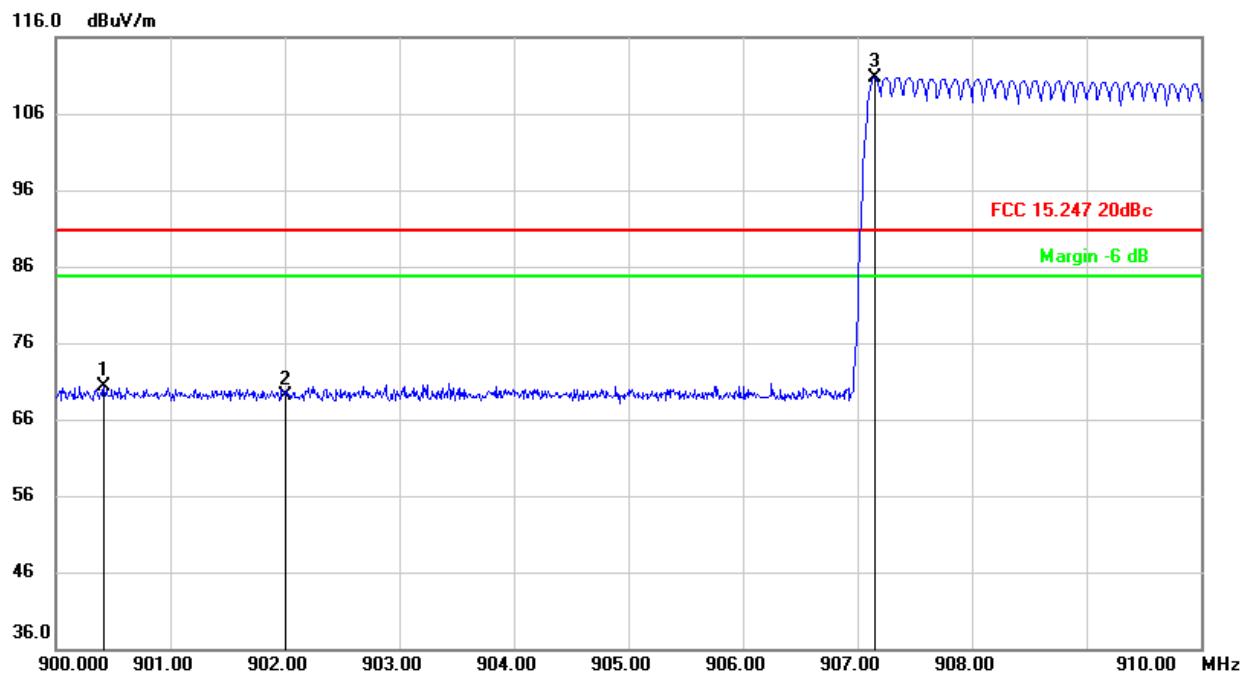RADIATED BANDEDGE (LOW HOP CHANNEL, HORIZONTAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	900.4200	45.24	25.10	70.34	90.74	-20.40	QP
2	902.0000	43.89	25.12	69.01	90.74	-21.73	QP
3	907.1500	85.59	25.15	110.74	/	/	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

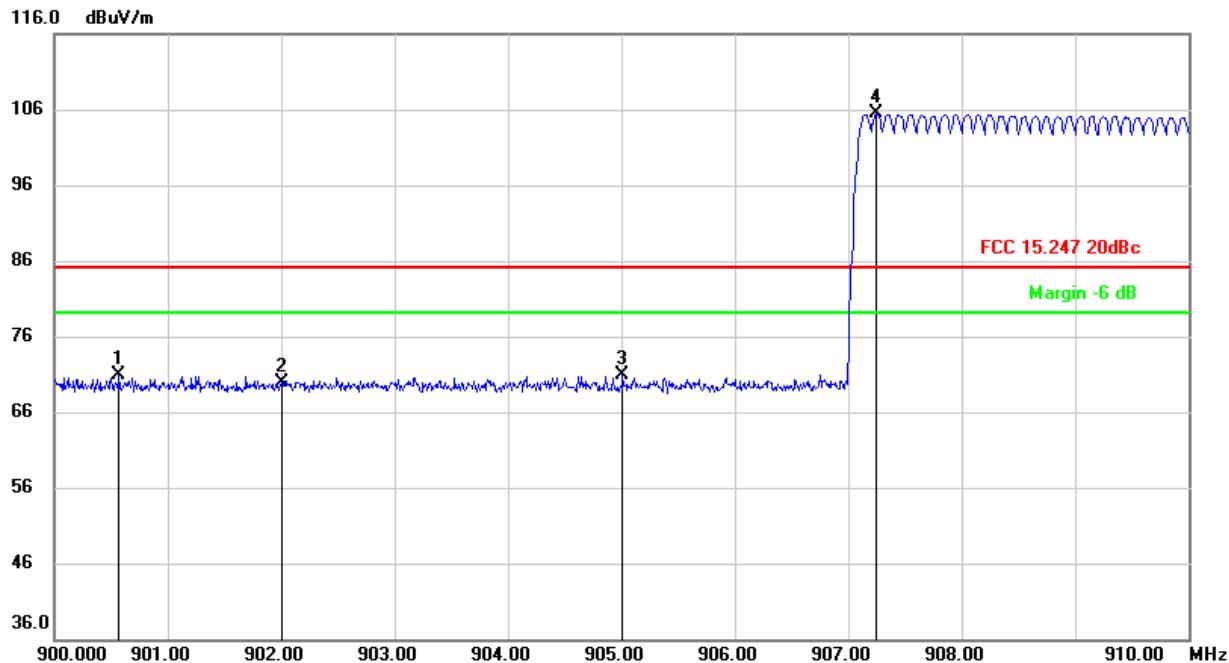RADIATED BANDEDGE (LOW HOP CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	900.5700	45.86	25.10	70.96	85.15	-14.19	QP
2	902.0000	44.85	25.12	69.97	85.15	-15.18	QP
3	905.0100	45.69	25.13	70.82	85.15	-14.33	QP
4	907.2500	80.27	25.15	105.42	/	/	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

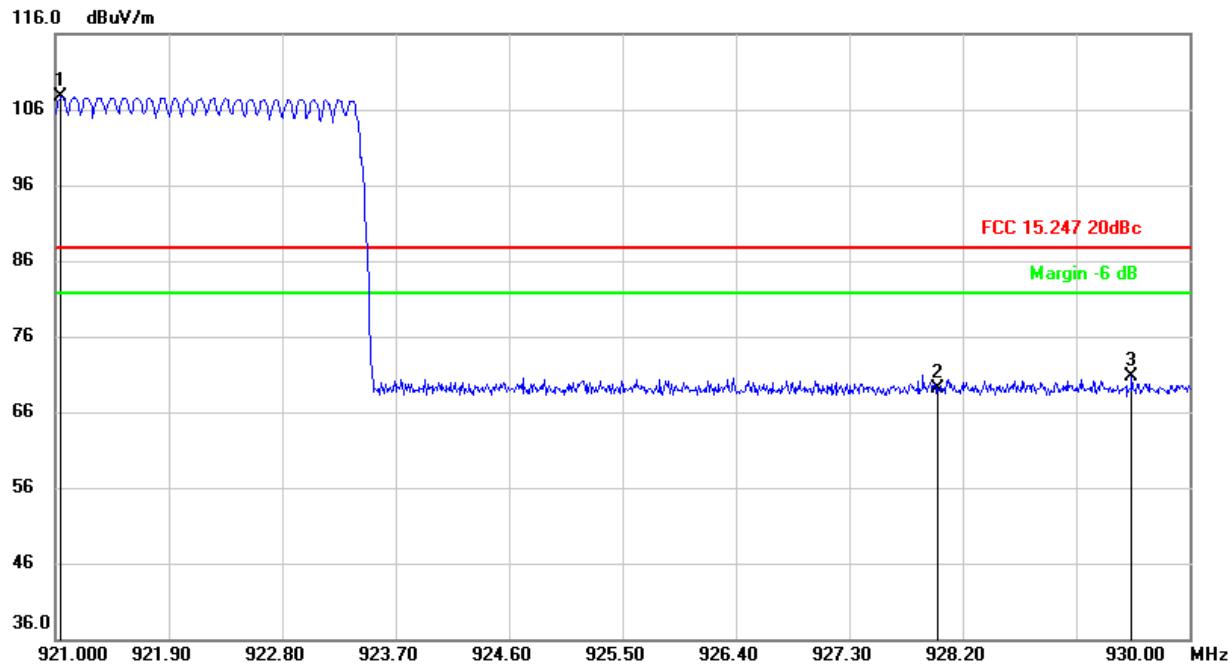RADIATED BANDEdge (HIGH HOP CHANNEL, HORIZONTAL)

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	921.0450	82.49	25.13	/	/	/	QP
2	928.0000	43.92	25.21	69.13	87.62	-18.49	QP
3	929.5410	45.52	25.23	70.75	87.62	-16.87	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

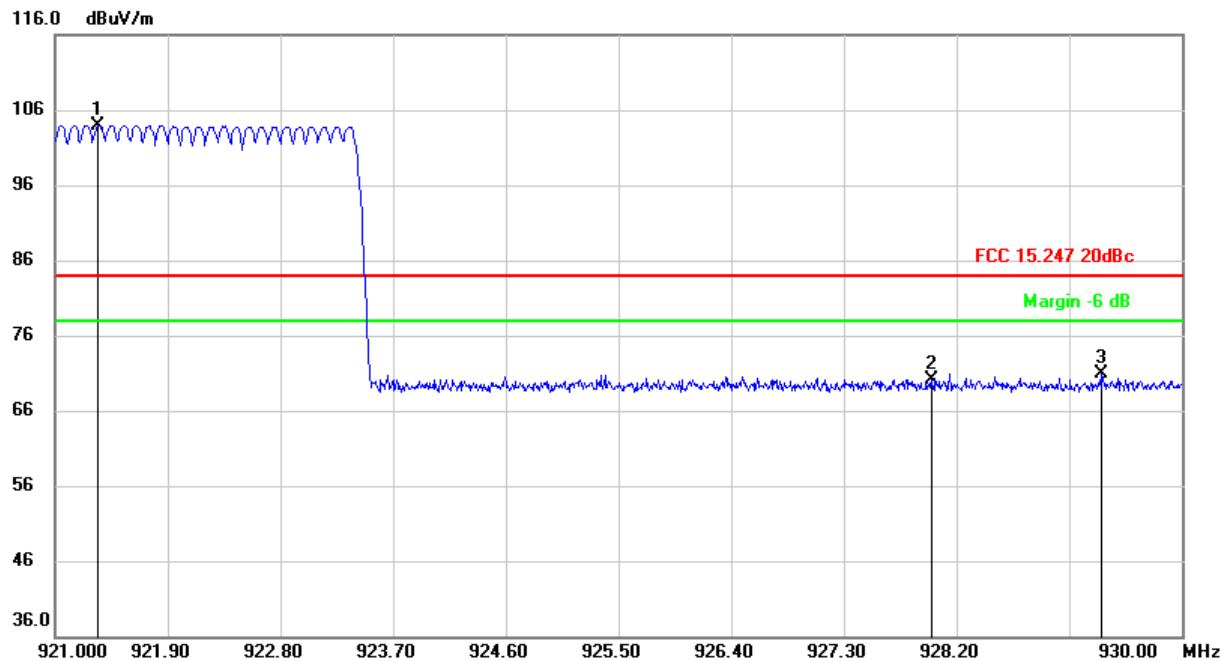RADIATED BANDEDGE (HIGH HOP CHANNEL, VERTICAL)


No.	Frequency (MHz)	Reading (dB _{uV/m})	Correct dB/m	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	921.3419	78.77	25.14	103.91	/	/	QP
2	928.0000	44.88	25.21	70.09	83.91	-13.82	QP
3	929.3609	45.63	25.23	70.86	83.91	-13.05	QP

Note: 1. Measurement = Reading Level + Correct Factor.
2. Peak: Peak detector.
3. The limit = The test result of fundamental frequency - 20dB

7.3. SPURIOUS EMISSIONS (1~10GHz)


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

1GHz ~ 3GHz

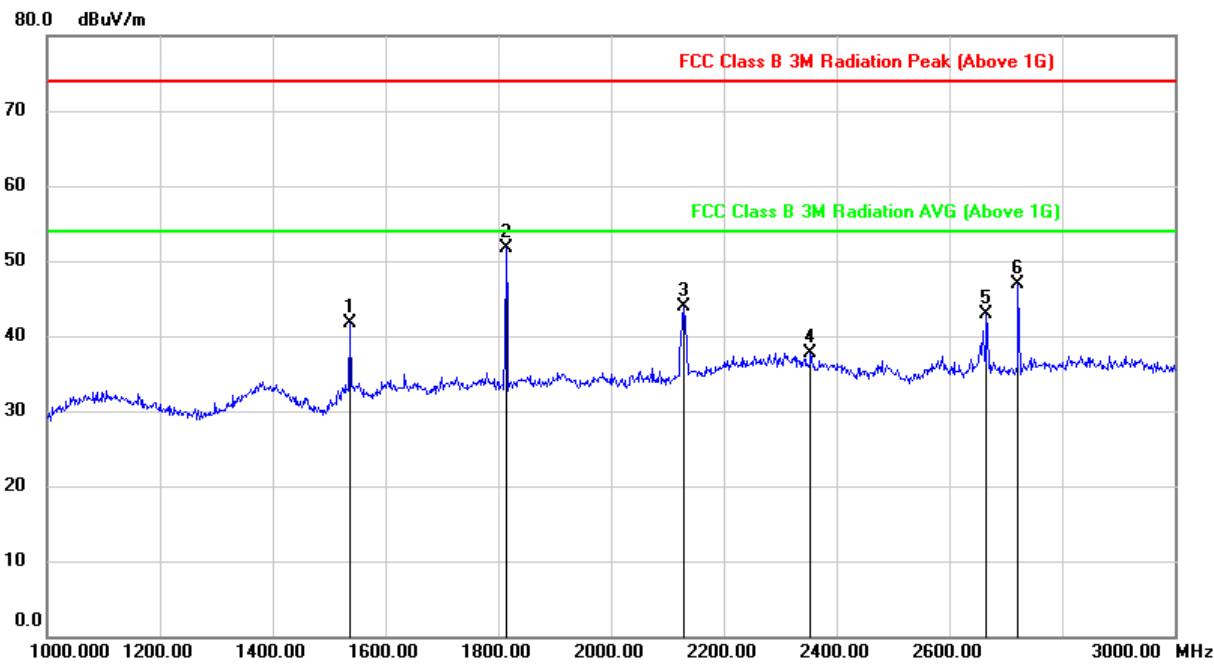

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	54.11	-12.32	41.79	74.00	-32.21	peak
2	1814.000	62.72	-11.06	51.66	74.00	-22.34	peak
3	2128.000	53.12	-9.21	43.91	74.00	-30.09	peak
4	2354.000	45.53	-7.77	37.76	74.00	-36.24	peak
5	2666.000	50.75	-7.78	42.97	74.00	-31.03	peak
6	2722.000	54.40	-7.44	46.96	74.00	-27.04	peak


Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak: Peak detector.

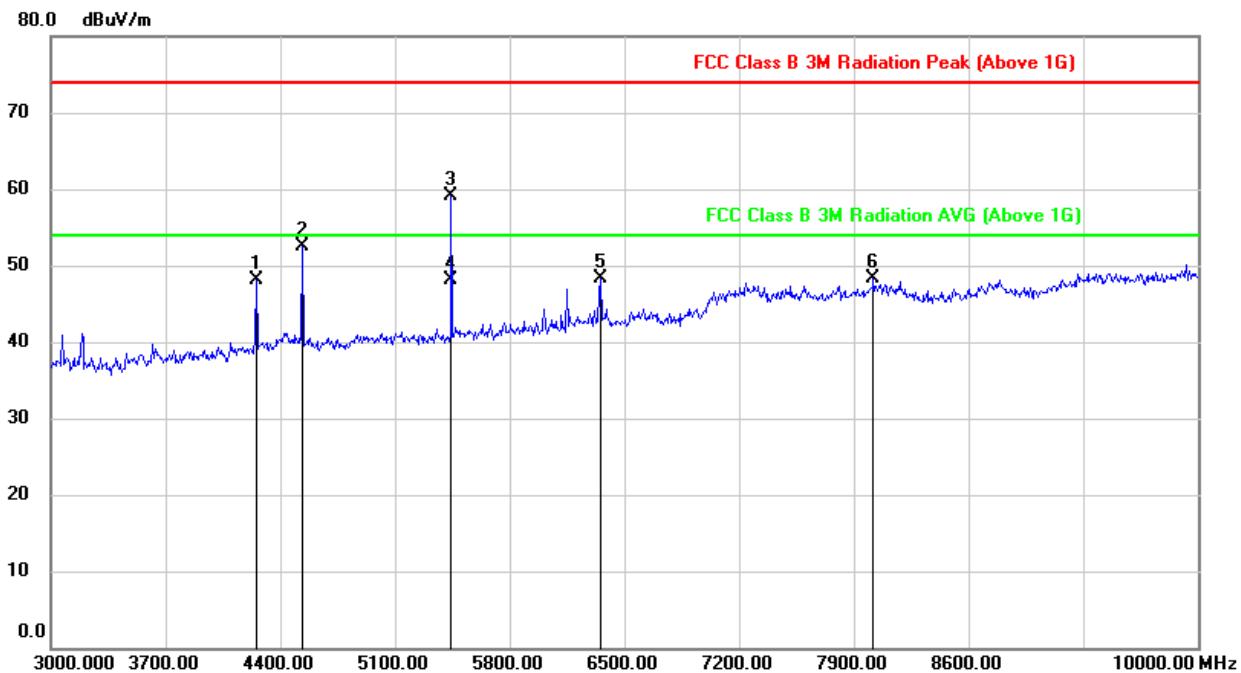3GHz ~ 10GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4253.000	50.02	-1.97	48.05	74.00	-25.95	peak
2	4533.000	53.40	-0.80	52.60	74.00	-21.40	peak
3	5443.000	57.24	1.95	59.19	74.00	-14.81	peak
4	5443.000	46.1	6.24	52.34	54.00	-1.66	AVG
5	6353.000	43.74	4.63	48.37	74.00	-25.63	peak
6	8019.000	39.75	8.51	48.26	74.00	-25.74	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. AVG: RMS detector, the detector and averaging type may be set for linear voltage averaging.
3. DCCF: Duty Cycle Correction Factor (Please refer to clause 6.1.ON TIME AND DUTY CYCLE)
4. The DCCF already added in Correct Factor.

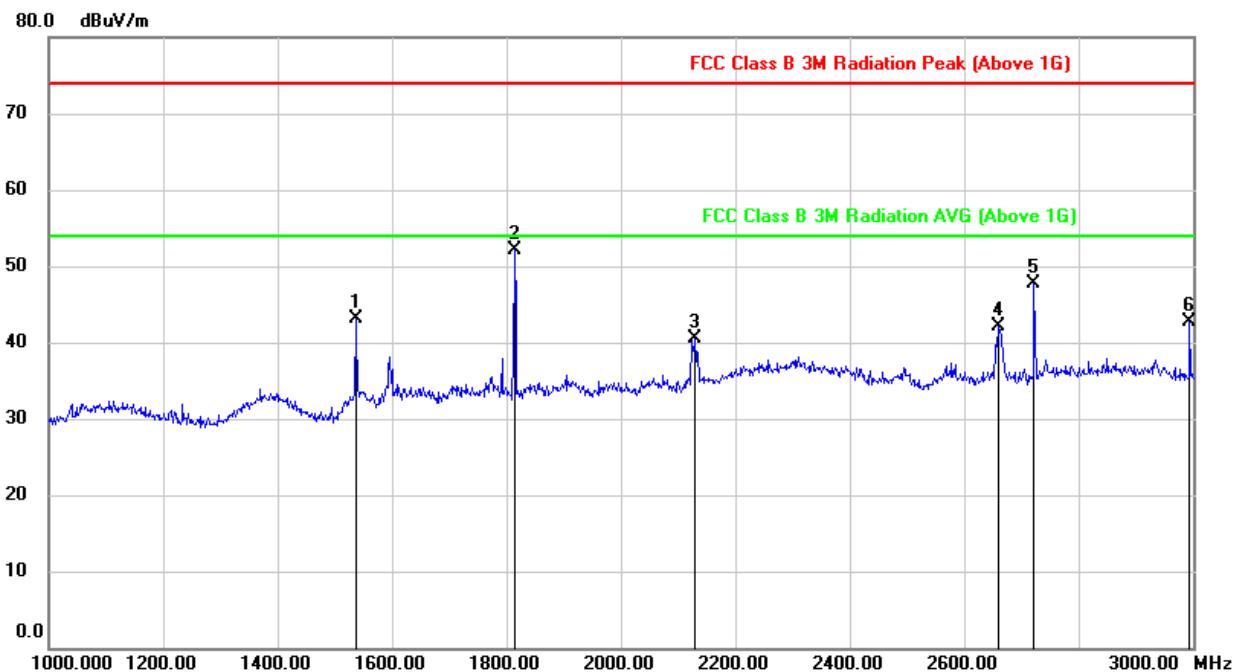
HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)1GHz ~ 3GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	55.30	-12.27	43.03	74.00	-30.97	peak
2	1814.000	63.15	-11.06	52.09	74.00	-21.91	peak
3	2130.000	49.73	-9.28	40.45	74.00	-33.55	peak
4	2660.000	50.02	-7.88	42.14	74.00	-31.86	peak
5	2722.000	55.28	-7.48	47.80	74.00	-26.20	peak
6	2994.000	49.23	-6.59	42.64	74.00	-31.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

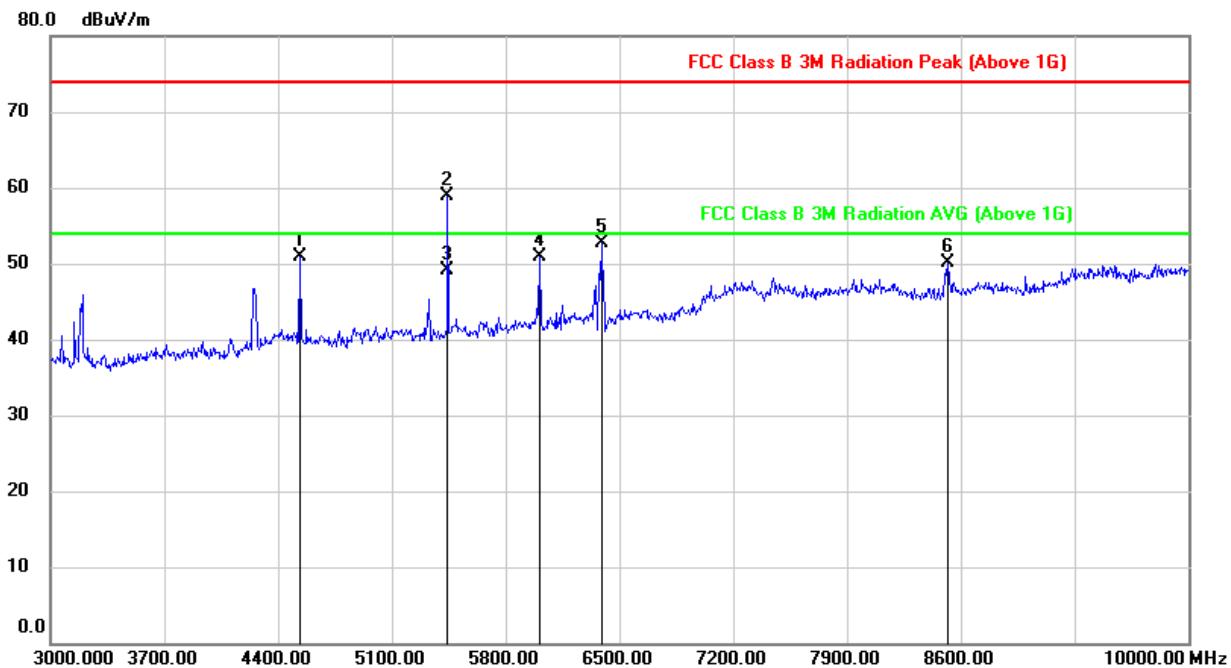3GHz ~ 10GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4533.000	51.51	-0.70	50.81	74.00	-23.19	peak
2	5443.000	56.88	1.95	58.83	74.00	-15.17	peak
3	5443.000	47.06	6.24	53.30	54.00	-0.70	AVG
4	6010.000	47.59	3.34	50.93	74.00	-23.07	peak
5	6388.000	48.03	4.74	52.77	74.00	-21.23	peak
6	8516.000	41.67	8.51	50.18	74.00	-23.82	peak


Note:

1. Measurement = Reading Level + Correct Factor.
2. AVG: RMS detector, the detector and averaging type may be set for linear voltage averaging.
3. DCCF: Duty Cycle Correction Factor (Please refer to clause 6.1.ON TIME AND DUTY CYCLE)
4. The DCCF already added in Correct Factor.

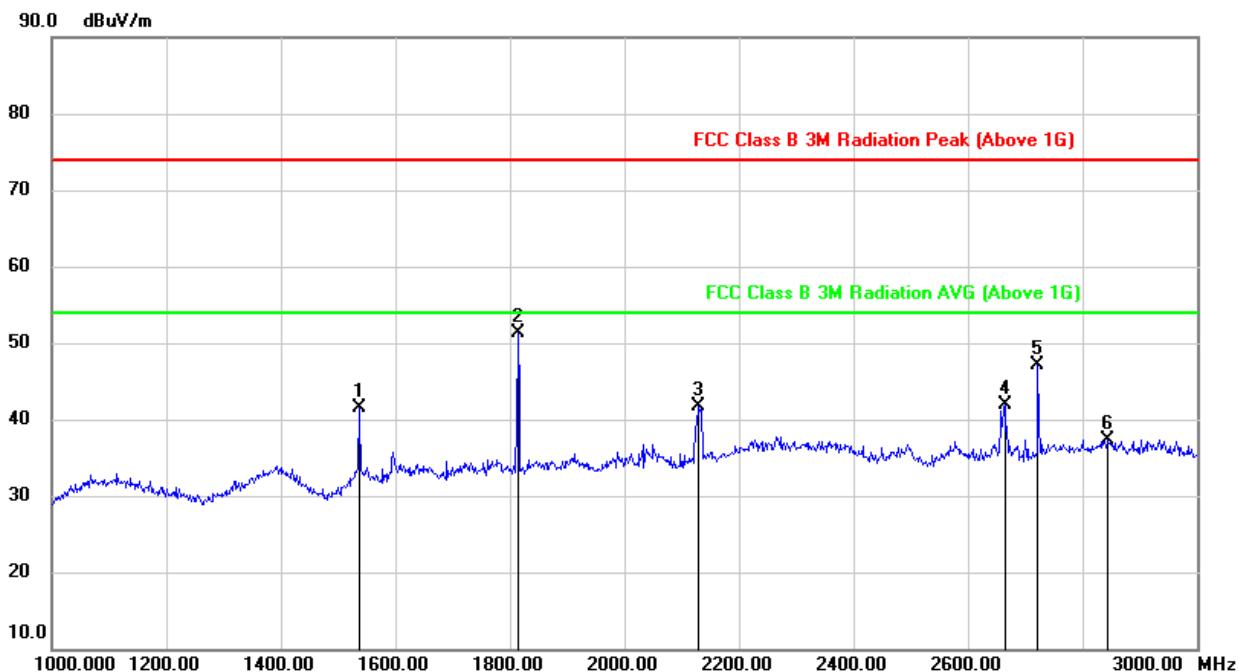HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)1GHz ~ 3GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	53.90	-12.32	41.58	74.00	-32.42	peak
2	1814.000	62.36	-11.06	51.30	74.00	-22.70	peak
3	2128.000	50.82	-9.21	41.61	74.00	-32.39	peak
4	2664.000	49.76	-7.78	41.98	74.00	-32.02	peak
5	2722.000	54.46	-7.44	47.02	74.00	-26.98	peak
6	2844.000	44.11	-6.73	37.38	74.00	-36.62	peak
7	1536.000	53.90	-12.32	41.58	74.00	-32.42	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

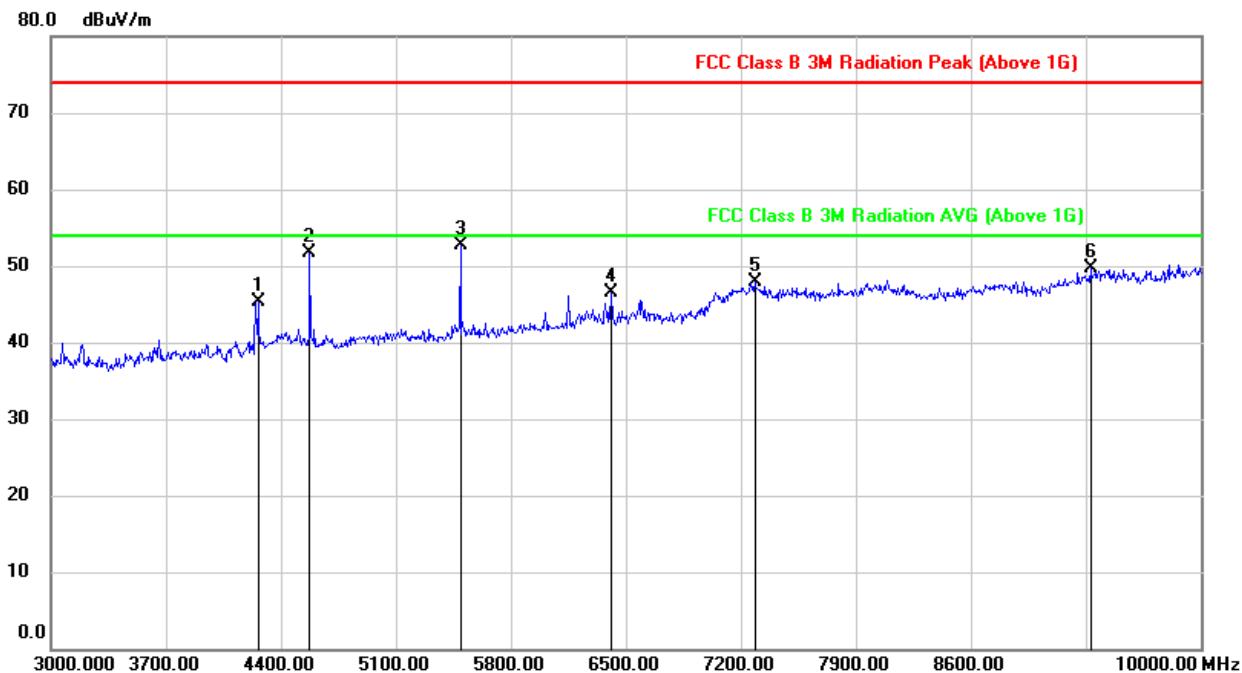3GHz ~ 10GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4260.000	47.12	-1.90	45.22	74.00	-28.78	peak
2	4575.000	52.53	-0.79	51.74	74.00	-22.26	peak
3	5492.000	50.42	2.30	52.72	74.00	-21.28	peak
4	6409.000	41.80	4.67	46.47	74.00	-27.53	peak
5	7284.000	39.97	7.85	47.82	74.00	-26.18	peak
6	9328.000	38.97	10.77	49.74	74.00	-24.26	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

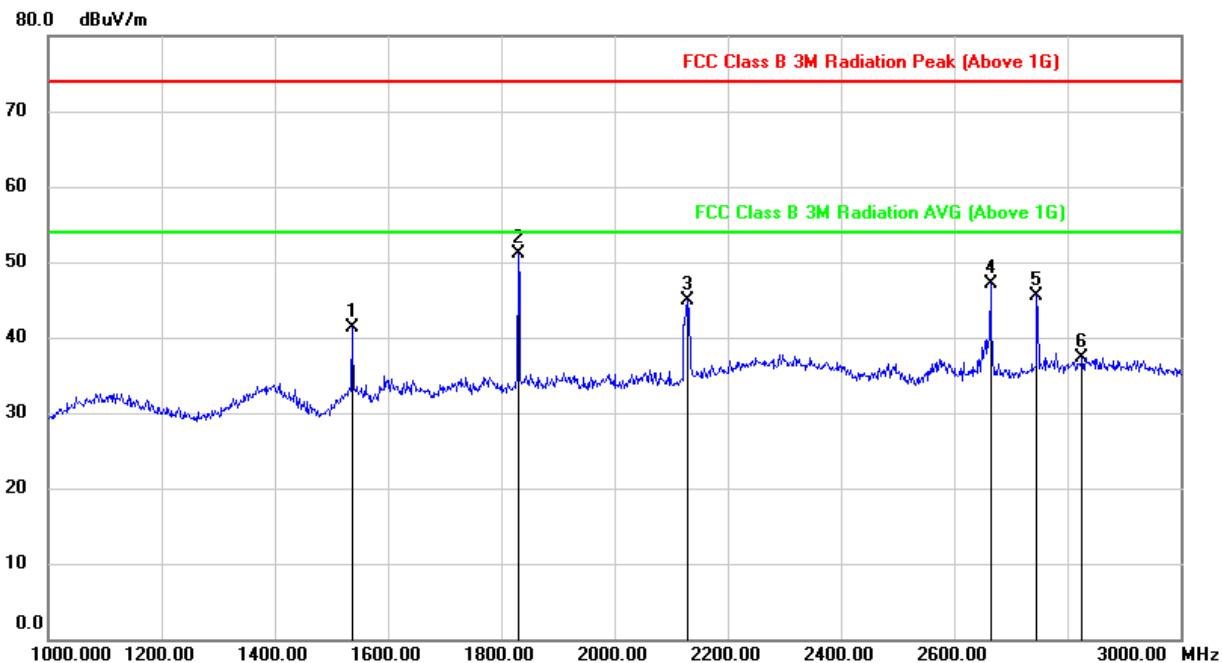HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)1GHz ~ 3GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	53.67	-12.32	41.35	74.00	-32.65	peak
2	1830.000	62.02	-10.98	51.04	74.00	-22.96	peak
3	2128.000	54.02	-9.21	44.81	74.00	-29.19	peak
4	2664.000	54.84	-7.78	47.06	74.00	-26.94	peak
5	2746.000	52.86	-7.26	45.60	74.00	-28.40	peak
6	2826.000	44.19	-6.83	37.36	74.00	-36.64	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

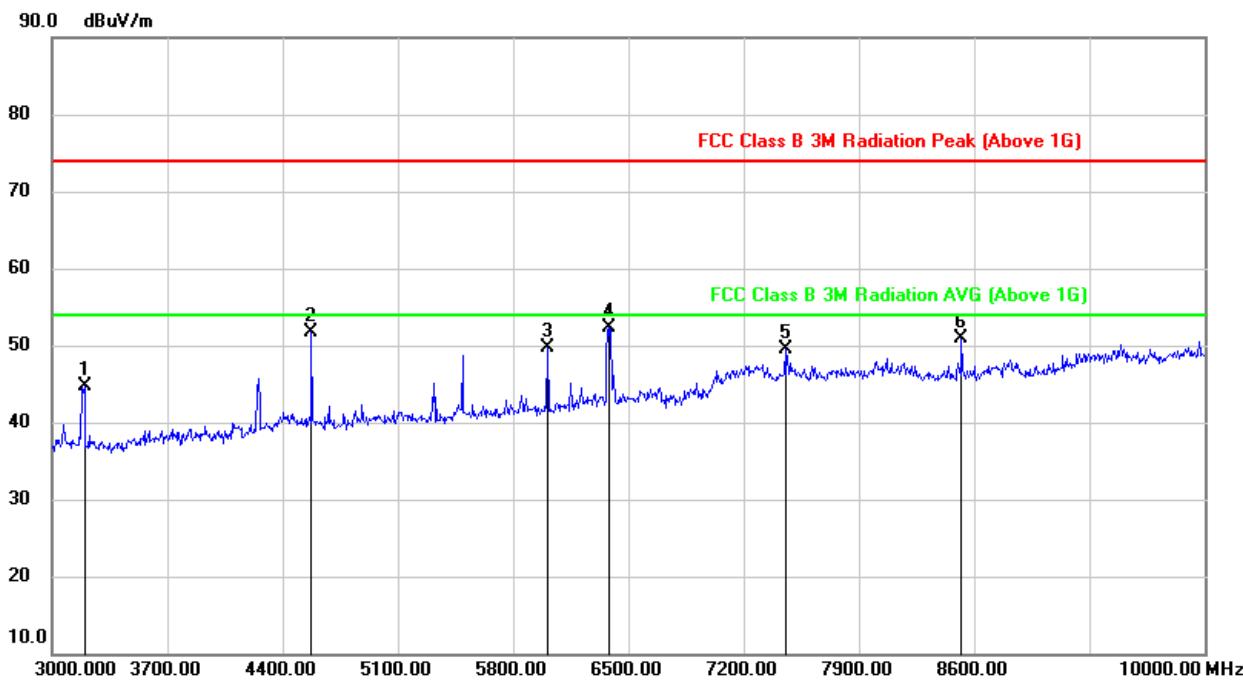3GHz ~ 10GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3196.000	49.38	-4.74	44.64	74.00	-29.36	peak
2	4575.000	52.30	-0.64	51.66	74.00	-22.34	peak
3	6010.000	46.28	3.34	49.62	74.00	-24.38	peak
4	6381.000	47.64	4.71	52.35	74.00	-21.65	peak
5	7452.000	41.90	7.68	49.58	74.00	-24.42	peak
6	8523.000	42.43	8.52	50.95	74.00	-23.05	peak
7	3196.000	49.38	-4.74	44.64	74.00	-29.36	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

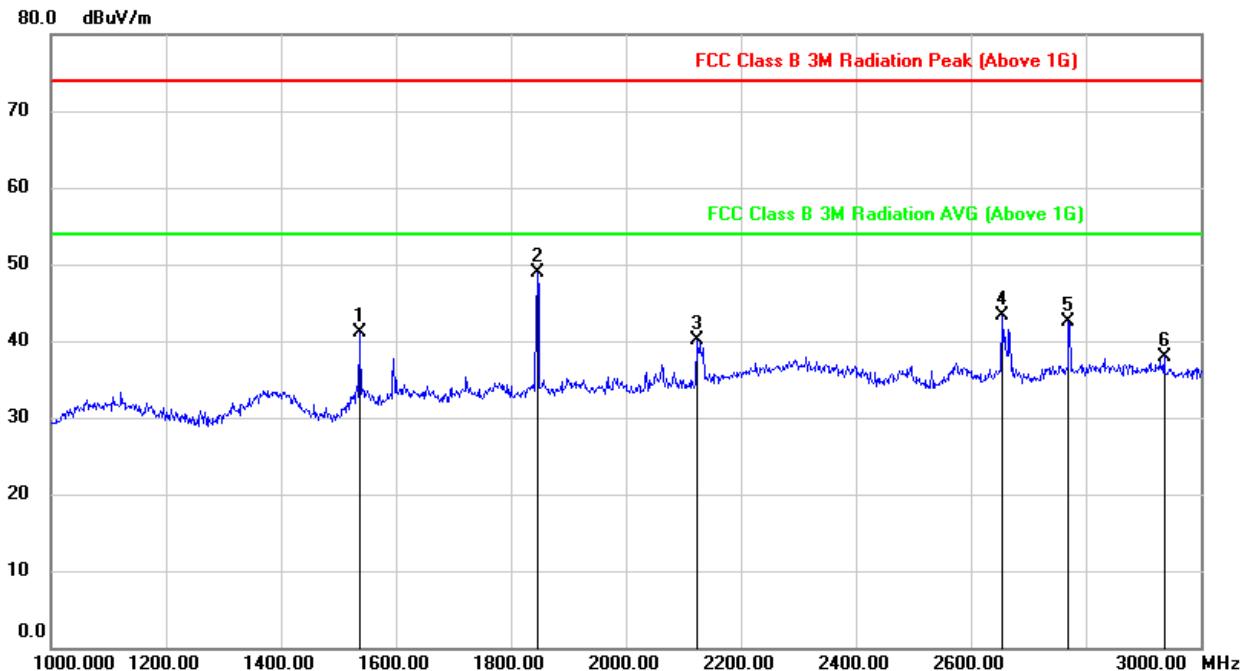HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)1GHz ~ 3GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	53.44	-12.32	41.12	74.00	-32.88	peak
2	1846.000	59.88	-10.90	48.98	74.00	-25.02	peak
3	2124.000	49.38	-9.26	40.12	74.00	-33.88	peak
4	2654.000	51.22	-7.83	43.39	74.00	-30.61	peak
5	2770.000	49.64	-7.12	42.52	74.00	-31.48	peak
6	2936.000	44.55	-6.55	38.00	74.00	-36.00	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

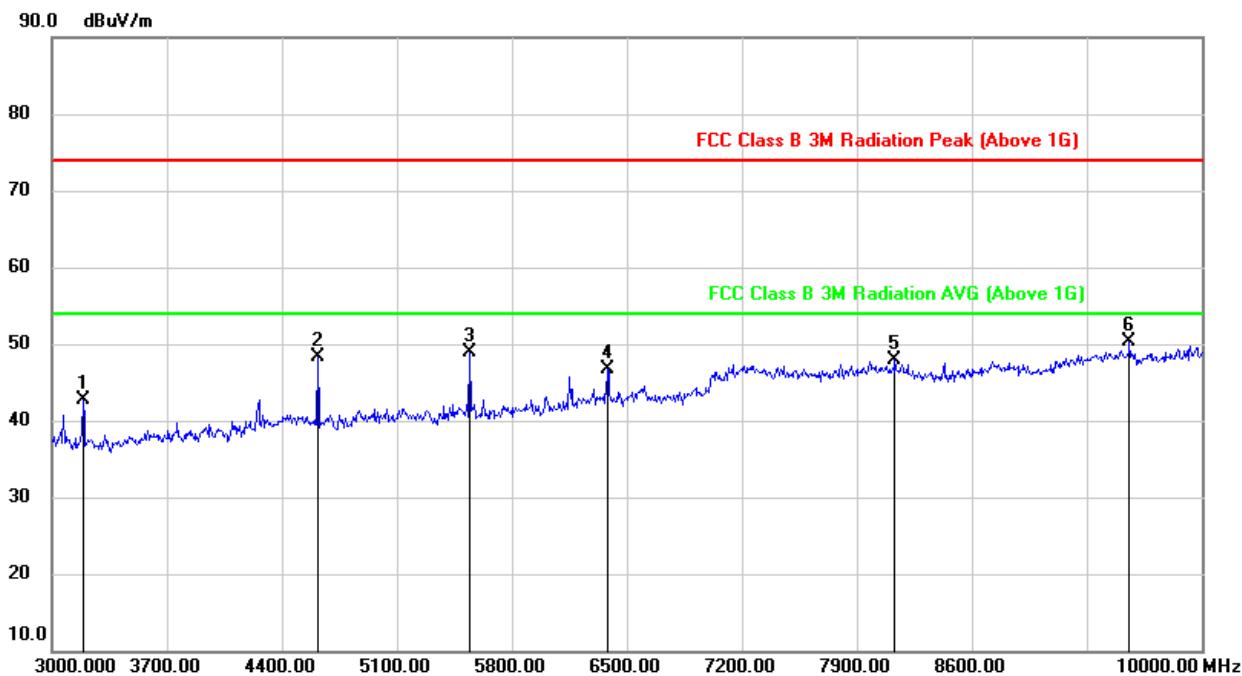3GHz ~ 10GHz


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3189.000	47.47	-4.78	42.69	74.00	-31.31	peak
2	4617.000	49.10	-0.76	48.34	74.00	-25.66	peak
3	5541.000	46.71	2.29	49.00	74.00	-25.00	peak
4	6381.000	42.04	4.65	46.69	74.00	-27.31	peak
5	8131.000	39.35	8.53	47.88	74.00	-26.12	peak
6	9559.000	39.13	11.16	50.29	74.00	-23.71	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

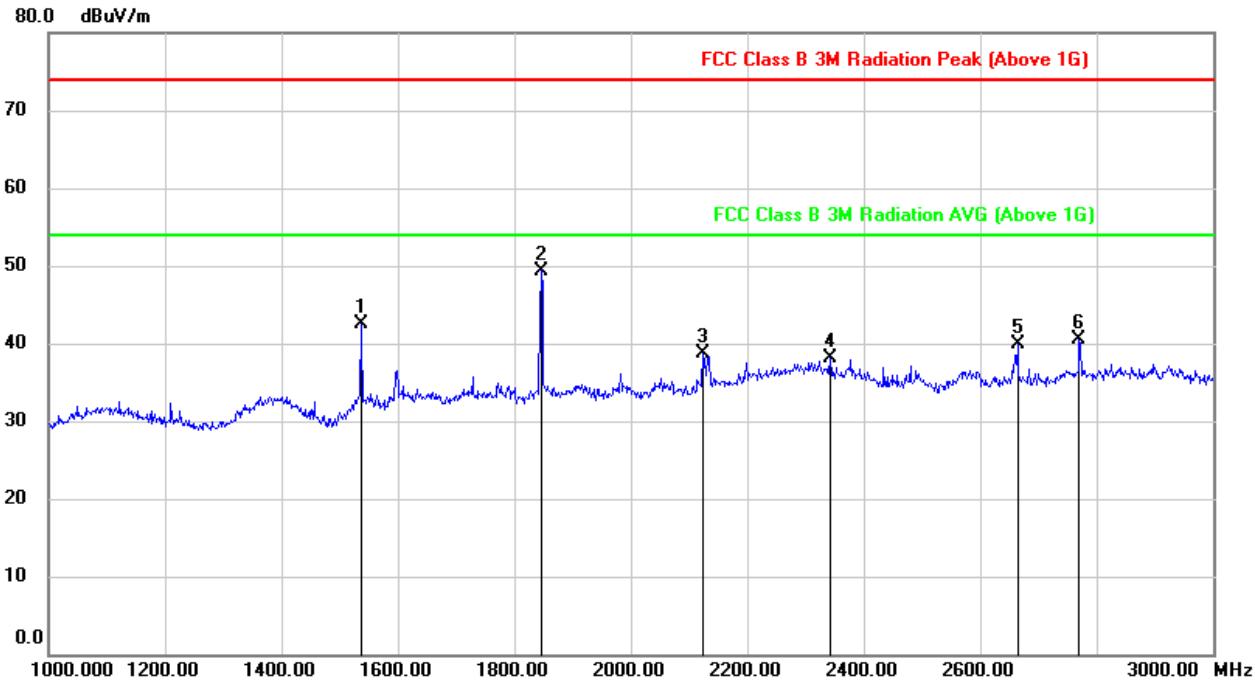HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)1GHz ~ 3GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1536.000	54.86	-12.27	42.59	74.00	-31.41	peak
2	1846.000	60.30	-10.90	49.40	74.00	-24.60	peak
3	2124.000	48.10	-9.36	38.74	74.00	-35.26	peak
4	2342.000	45.63	-7.58	38.05	74.00	-35.95	peak
5	2664.000	47.84	-7.86	39.98	74.00	-34.02	peak
6	2770.000	47.68	-7.18	40.50	74.00	-33.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.

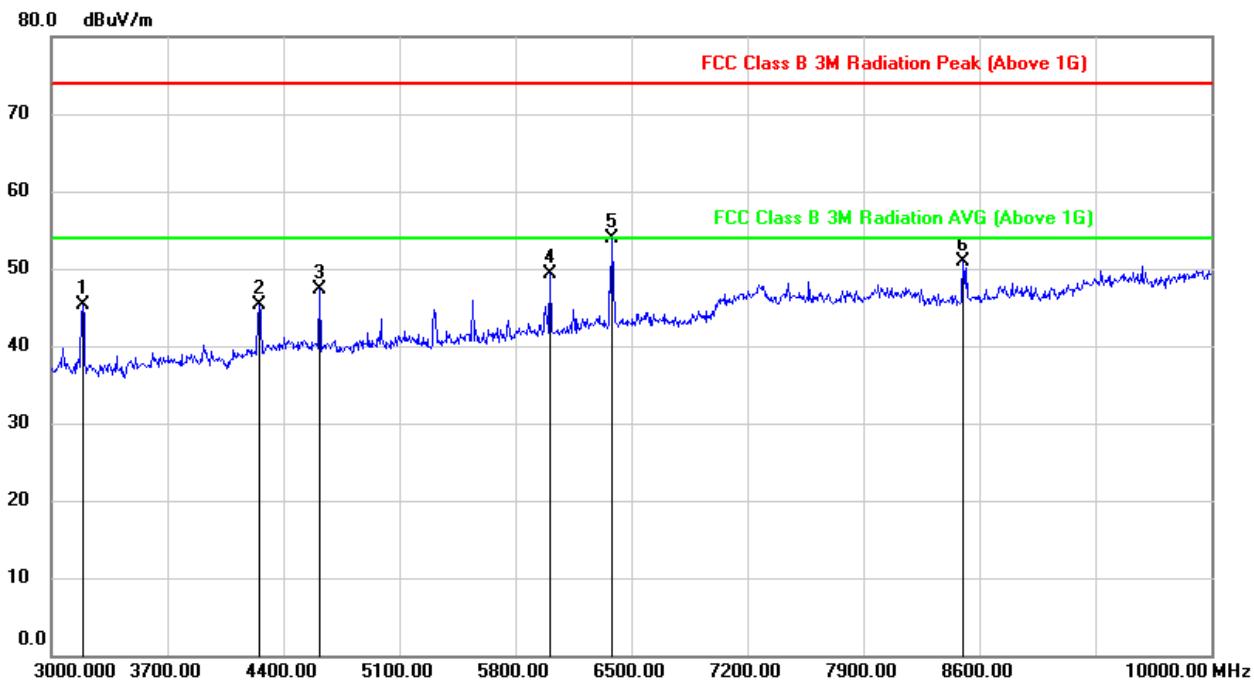
3GHz ~ 10GHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	3189.000	49.98	-4.76	45.22	74.00	-28.78	peak
2	4253.000	47.15	-1.87	45.28	74.00	-28.72	peak
3	4617.000	47.83	-0.59	47.24	74.00	-26.76	peak
4	6010.000	46.05	3.34	49.39	74.00	-24.61	peak
5	6381.000	49.21	4.71	53.92	74.00	-20.08	peak
6	8502.000	42.42	8.49	50.91	74.00	-23.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.


7.4. SPURIOUS EMISSIONS 30M ~ 1 GHz

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

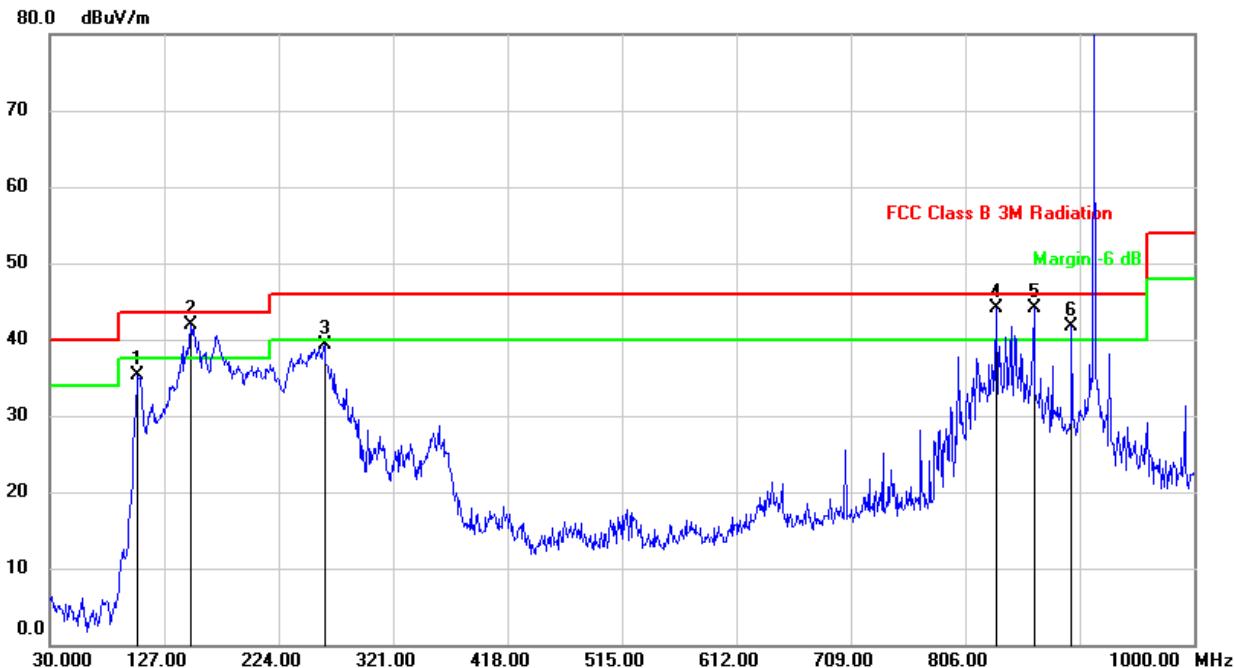

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	104.6900	57.11	-21.76	35.35	43.50	-8.15	QP
2	149.3100	60.69	-18.76	41.93	43.50	-1.57	QP
3	262.8000	55.39	-16.16	39.23	46.00	-6.77	QP
4	832.1900	49.44	-5.39	44.05	46.00	-1.95	QP
5	864.2000	49.10	-5.04	44.06	46.00	-1.94	QP
6	896.2100	46.40	-4.62	41.78	46.00	-4.22	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

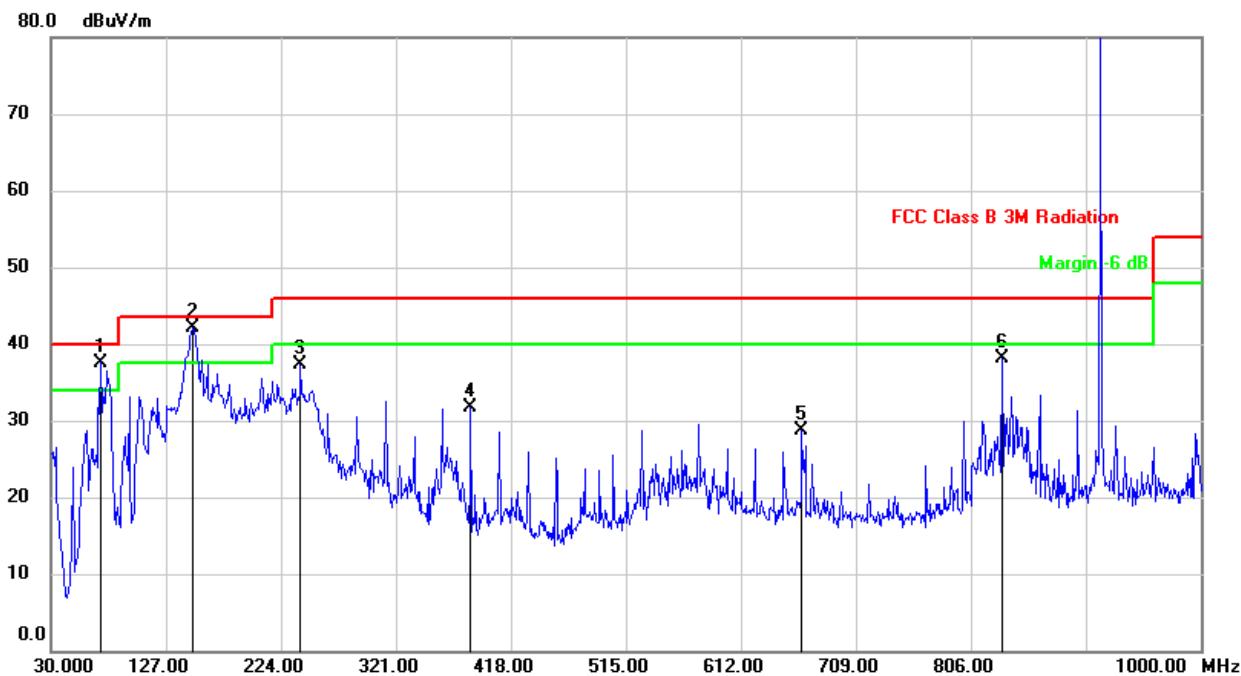SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	71.7100	57.85	-20.25	37.60	40.00	-2.40	QP
2	149.3100	60.78	-18.76	42.02	43.50	-1.48	QP
3	240.4900	54.67	-17.31	37.36	46.00	-8.64	QP
4	384.0500	45.01	-13.28	31.73	46.00	-14.27	QP
5	663.4099	36.65	-7.99	28.66	46.00	-17.34	QP
6	832.1900	43.40	-5.39	38.01	46.00	-7.99	QP

Note: 1. Result Level = Read Level + Antenna Factor + Cable loss.
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto

Note: All the modes had been tested, but only the worst data recorded in the report.


7.5. SPURIOUS EMISSIONS BELOW 30M

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

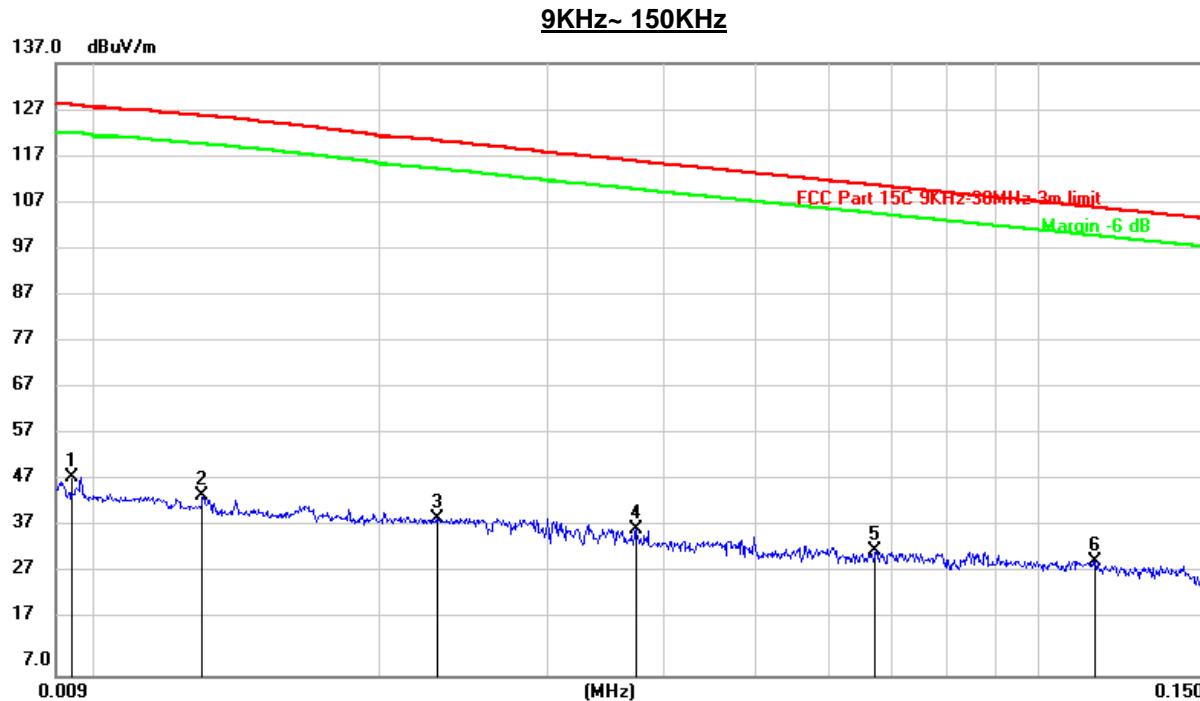


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0094	28.99	20.26	49.25	128.06	-78.81	peak
2	0.0129	24.81	20.24	45.05	125.85	-80.80	peak
3	0.0229	20.01	20.31	40.32	120.56	-80.24	peak
4	0.0374	17.74	20.31	38.05	116.21	-78.16	peak
5	0.0670	13.21	20.31	33.52	111.10	-77.58	peak
6	0.1150	11.04	20.28	31.32	106.40	-75.08	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

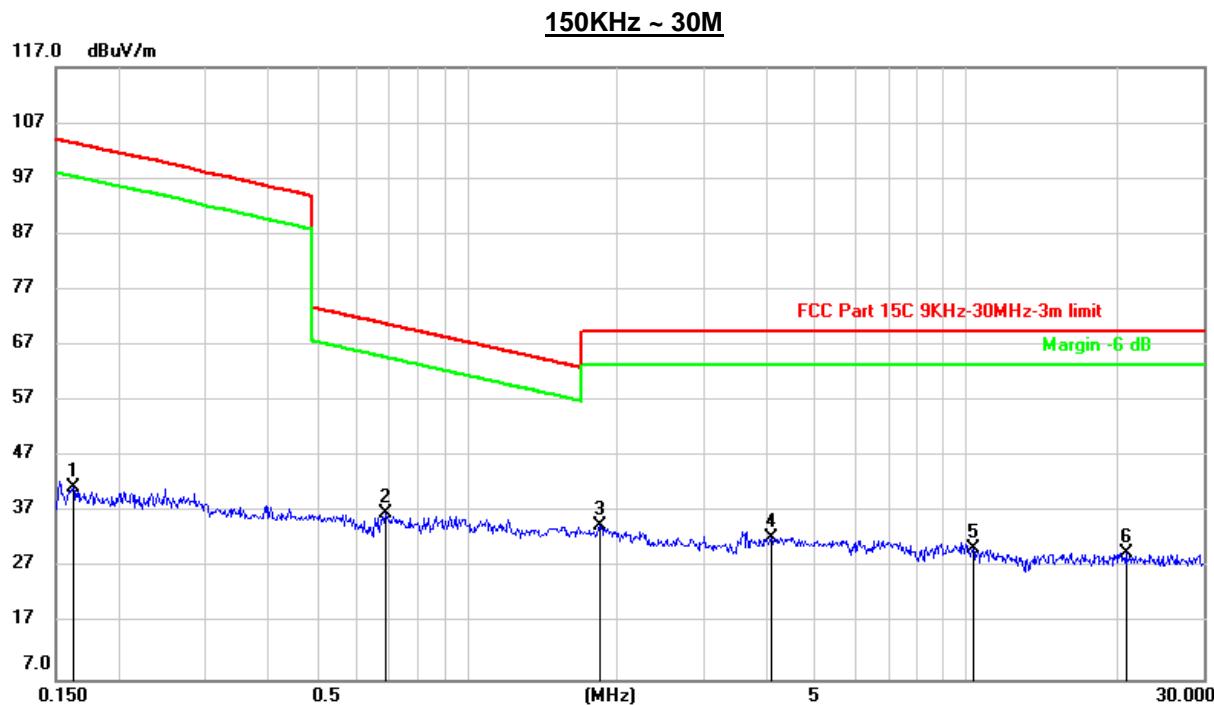


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1622	21.06	20.41	41.47	103.41	-61.94	peak
2	0.6863	16.51	20.32	36.83	70.88	-34.05	peak
3	1.8483	14.03	20.67	34.70	69.54	-34.84	peak
4	4.0704	11.46	21.04	32.50	69.54	-37.04	peak
5	10.3422	9.33	21.05	30.38	69.54	-39.16	peak
6	20.9237	8.56	21.13	29.69	69.54	-39.85	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. All the modes had been tested, but only the worst data were recorded in the report.
3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

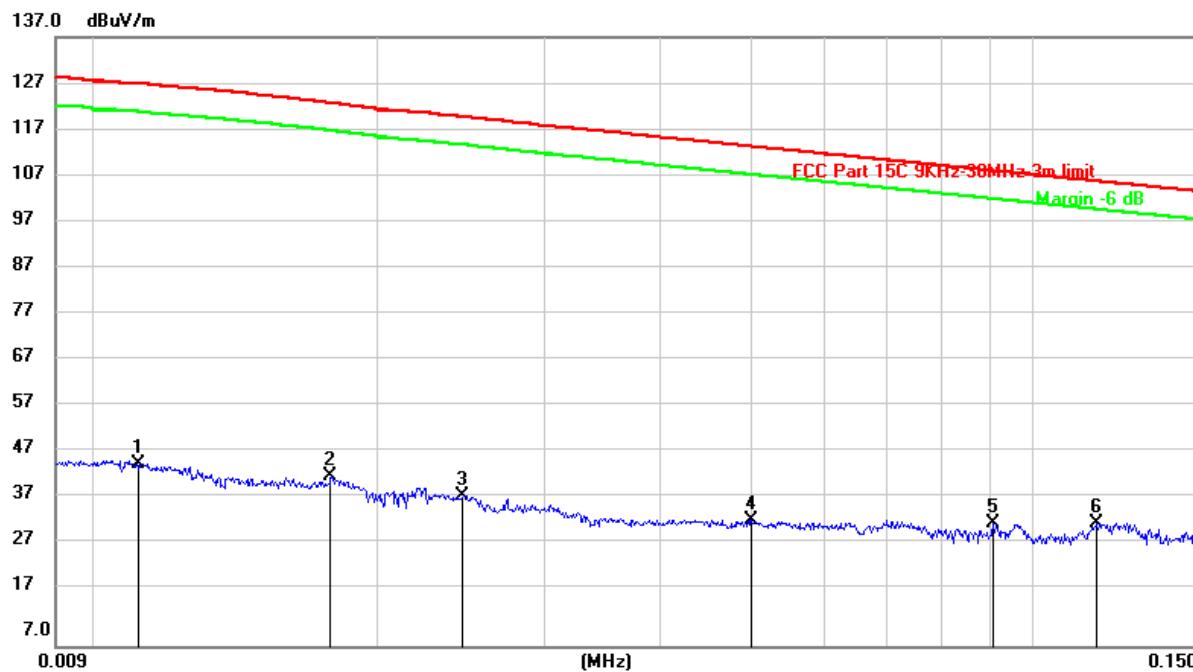SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)9KHz~ 150KHz

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0111	25.76	20.22	45.98	126.94	-80.96	peak
2	0.0177	22.96	20.29	43.25	122.96	-79.71	peak
3	0.0246	18.79	20.31	39.10	119.96	-80.86	peak
4	0.0500	13.41	20.31	33.72	113.62	-79.90	peak
5	0.0908	12.84	20.26	33.10	108.45	-75.35	peak
6	0.1174	12.90	20.29	33.19	106.22	-73.03	peak

Note: 1. Measurement = Reading Level + Correct Factor.
2. All the modes had been tested, but only the worst data were recorded in the report.
3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

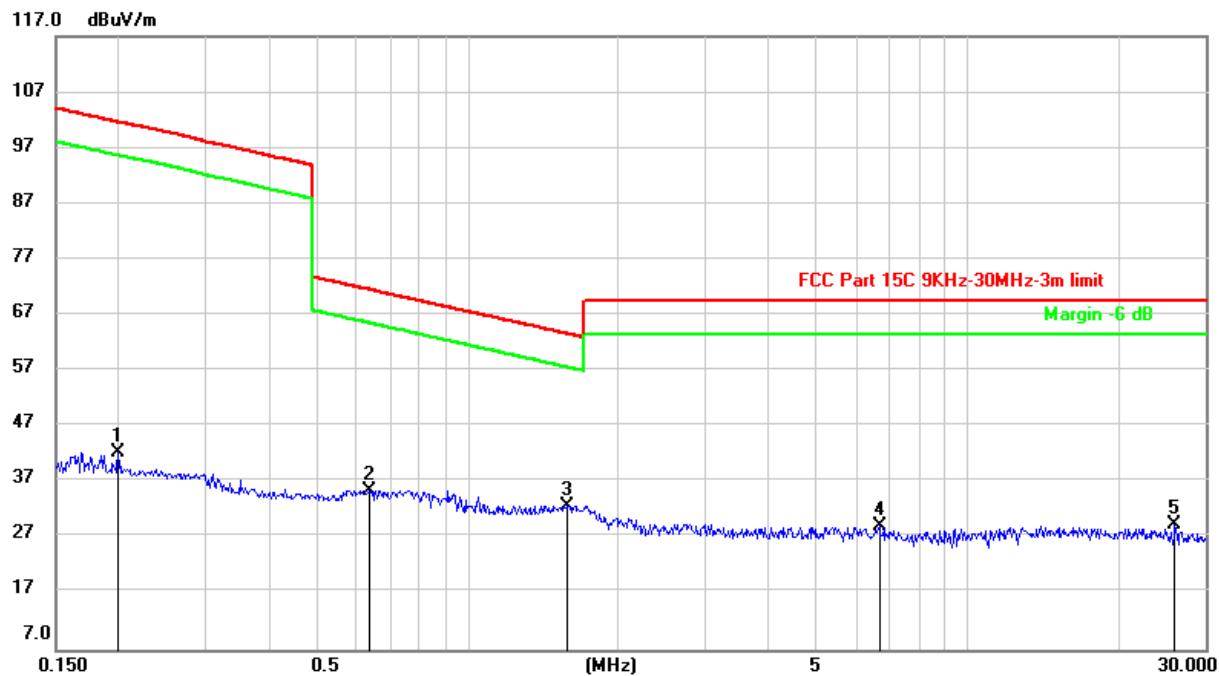150KHz ~ 30M


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1995	21.85	20.37	42.22	101.60	-59.38	peak
2	0.6370	15.23	20.30	35.53	71.54	-36.01	peak
3	1.5846	12.18	20.59	32.77	63.61	-30.84	peak
4	6.6623	8.21	20.90	29.11	69.54	-40.43	peak
5	26.0012	7.78	21.65	29.43	69.54	-40.11	peak

Note: 1. Measurement = Reading Level + Correct Factor.
 2. All the modes had been tested, but only the worst data were recorded in the report.
 3. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

Note: All the modes had been tested, but only the worst data recorded in the report.


8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

Please refer to FCC §15.207 (a) and RSS-Gen Clause 8.8.

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

TEST SETUP AND PROCEDURE

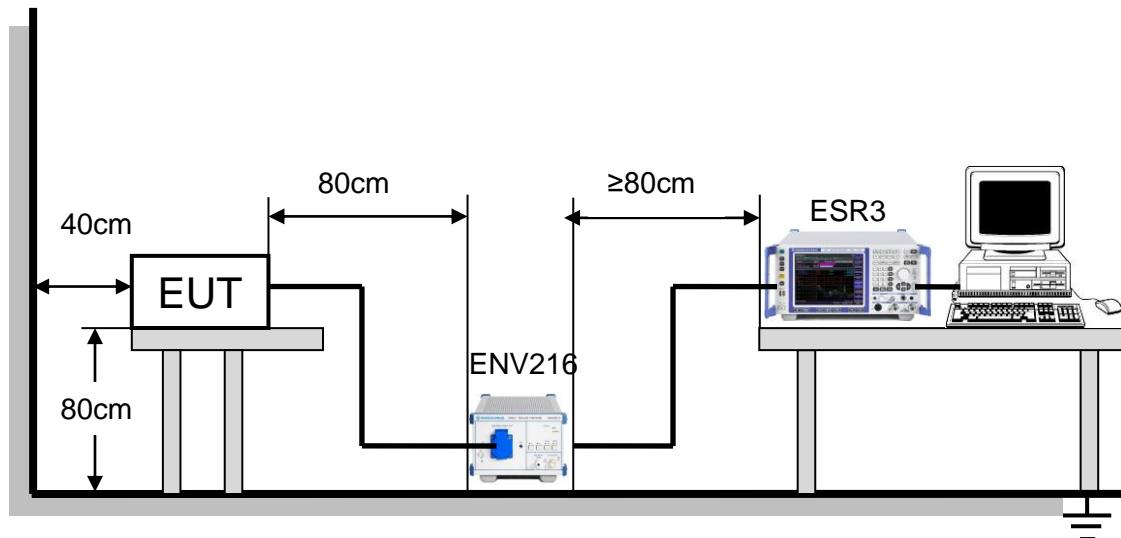

The EUT is put on a table of non-conducting material that is 0.8m high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). An EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST ENVIRONMENT

Temperature	22.8°C	Relative Humidity	65%
Atmosphere Pressure	101kPa	Test Voltage	DC 44.4V

RESULTS

Not Applicable.

Note: The EUT is powered by battery and can't charge directly.

9. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

ANTENNA CONNECTOR

EUT has a external antenna with an antenna connector.

ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi.

END OF REPORT