



**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT  
INTENTIONAL RADIATOR CERTIFICATION TO  
FCC PART 74 SUBPART H REQUIREMENT**

OF

**UHF Wireless Microphone**

**MODEL NO. U-99**

**Trade Name: None**

**FCC ID: SWFU-99**

**REPORT NO: HST0706FCC0015**

**ISSUE DATE: July 10, 2007**

Prepared for

**Enping Hengda Electronic Industry Co., Ltd.  
No.8, B District, Individual & Foreign Capital Industry Zone, Enping City,  
Guangdong Province, P.R.China**

Prepared by

**Guangzhou Huesent Testing Service Co.,Ltd.**

d.b.a.

**Guangzhou Huesent Testing Service Co.,Ltd.  
Self-ordained 68# courtyard, No. 91, Dongguanzhuang Road,  
Guangzhou, Guangdong, China.**

**TEL: 86-020-87221905 FAX: 86-020-87223892**



### VERIFICATION OF COMPLIANCE

Applicant.....: Enping Hengda Electronic Industry Co., Ltd.  
 Address.....: No.8, B District, Individual & Foreign Capital Industry Zone, Enping City,  
 Guangdong Province, P.R.China  
 Manufacturer.....: Enping Hengda Electronic Industry Co., Ltd.  
 Address.....: No.8, B District, Individual & Foreign Capital Industry Zone, Enping City,  
 Guangdong Province, P.R.China  
 Product Description.....: UHF Wireless Microphone  
 Brand Name.....: None  
 Model Number.....: U-99、HD-018、U-30、U-32、U-199、U-1608、U-1609、U-1622、U-1623、  
 U-3201、U-3202、U-3203、U-3208、HD-029、HD-006B、HD-012、UR-008、  
 UR-002、UR-005、UR-010、UH-006、UH-001、UH-004、C-01、UH-002、  
 UB-002  
 Serial Number.....: N/A  
 File Number.....: HST0706FCC0015  
 Date of Test.....: June 10, 2007~July 10, 2007  
 Remark.....: Tests were performed for one model U-99 only, and the other models are  
 U-30、U-32、U-199、U-1608、U-1609、U-1622、U-1623、U-3201、U-3202、  
 U-3203、U-3208、HD-029、HD-006B、HD-012、HD-018、UR-008、UR-002、  
 UR-005、UR-010、UH-006、UH-001、UH-004、C-01、UH-002、UB-002 which  
 has same circuit, same frequency and electrical identified as model U-99.

**We hereby certify that:**

The report for the equipment was prepared by Guangzhou Huesent Testing Service Co.,Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in TIA/EIA 603; ANSI C 63.4:2001 and the sample tested as described in this report is in compliance with the FCC Rules Part 74 Subpart H.

The test results of this report relate only to the tested sample identified in this report.

**Approved by:** Henly **Date of Issue:** July 10, 2007

**(Henly.xie/QA Manager)**

**Guangzhou Huesent Testing Service Co.,Ltd.**



## Table of Contents

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>10</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>10</b>
<b>5. MAXIMUM TRANSMITTER POWER .....</b>	<b>11</b>
<b>6. MODULATION CHARACTERISTICS .....</b>	<b>14</b>
<b>7. FREQUENCY TOLERANCE .....</b>	<b>22</b>
<b>8. EMISSION BANDWIDTH .....</b>	<b>26</b>
<b>9. UNWANTED RADIATION .....</b>	<b>29</b>
<b>APPENDIX 1 PHOTOGRAPHS OF SETUP.....</b>	<b>35</b>



## 1. GENERAL INFORMATION

### 1.1 Product Description

The Enping Hengda Electronic Industry Co., Ltd.. Model: U-99 (referred to as the EUT in this report). The EUT is a 3 channels Wireless Microphone designed as Low Power Auxiliary Stations for transmitting voice only. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical descriptions of EUT is described as following:

A). Frequency Tolerance: 0.00065% (0.005%)

B). Communication Type: Voice/Tone only

C). Modulation: FM

D). Emission type: F3E

E). Emission designator: 100K1F3E (2M+2DK, M=12, D=38.04, K=1,  
Necessary Bandwidth = 100.1KHz)

F). Emission Bandwidth: 102.7 KHz (Limit: 200 KHz)

G). Peak Frequency Deviation: 38.04 KHz (Limit  $\pm 75$  KHz)

H). Audio Frequency Response: 12 KHz

I). Maximum Transmitter Power: 2.74mW (Limit: 250 mW)

J). Output power Modification: Fixed can't be change

K). Unwanted Radiation:

1). At least 60 dB (Limit 25 dB) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

2). At least 65 dB (Limit 35 dB) on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

3). At least 27 dB (Limit 17.38 dB) on any frequency removed from the center of authorized bandwidth by more than 250%)

L). Antenna Designation: Integral

M). Power Supply: 3V dc by battery

N). DC Voltage= 2.4 V and DC Current= 26.5 mA into the final stage for normal operation over the power range

O). Battery Endpoint: DC 2.4 V

P). Operating Frequency Range and Channels

Frequency Range: 705MHz – 805 MHz

The UHF wireless microphones have 16 channels, the bottom channel's frequency is 705.00MHz, the middle channel's frequency is 756.00MHz, and the top channel's frequency is 805.00MHz.

Q). Effective distance: 120M



## 1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID filing to comply with the FCC Part 74, Subpart H Rules.

## 1.3 Test Methodology

The radiated emission testing was performed according to the procedures of ANSI TIA/EIA 603 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055 and 2.1057

## 1.4 Test Facility

The open area test site used to collect the radiated data is located on the address of COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC. No. 6, Jinao industrial park, No.35 Jukeng Road, Dashuikeng Village, Guanlan Town, Baoan District, Shenzhen, China. The Open Area Test Site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2001 and CISPR 22/EN 55022 requirements.

## 1.5 Special Accessories

Not available for this EUT intended for grant.

## 1.6 Equipment Modifications

Not available for this EUT intended for grant.

## 1.7 Differences between Models

Model Name	Differences
U-99	Outer Decoration
U-30	Outer Decoration
U-32	Outer Decoration
U-199	Outer Decoration
U-1608	Outer Decoration
U-1609	Outer Decoration
U-1622	Outer Decoration
U-1623	Outer Decoration
U-3201	Outer Decoration
U-3202	Outer Decoration



<b>Model Name</b>	<b>Differences</b>
U-3203	Outer Decoration
U-3208	Outer Decoration
HD-029	Outer Decoration
HD-006B	Outer Decoration
HD-012	Outer Decoration
HD-018	Outer Decoration
UR-008	Outer Decoration
UR-002	Outer Decoration
UR-005	Outer Decoration
UR-010	Outer Decoration
UH-006	Outer Decoration
UH-001	Outer Decoration
UH-004	Outer Decoration
C-01	Outer Decoration
UH-002	Outer Decoration
UB-002	Outer Decoration



## 2. System Test Configuration

### 2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS


- a). Section 74.861 (e) - 1: Maximum transmitter power less than 50mW
- b). Section 74.861 (e) - 3: Peak Frequency Deviation less than 75 KHz
- c). Section 74.861 (e) - 4: Frequency Tolerance less than 0.005%
- d). Section 74.861 (e) - 5: Emission Bandwidth shall less than 200KHz
- e). Section 74.861 (e) - 6: Unwanted radiation

According to Section 74.861 (e) – 6, the mean power of emission shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:

- 1). At least 25 dB on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- 2). At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- 3). At least  $43 + 10 \log_{10} (T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

## 2.4 Configuration of Tested System

**Fig. 2-1 Configuration of Tested System**





**Table 2-1 Equipment Used in Tested System**

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	UHF Wireless Microphone	N/A	U-99	SWFU-99	N/A	<b><i>EUT</i></b>



### 3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§74.861 (e)-1	Carrier Power	Compliant
§74.861 (e)-3	Frequency Deviation	Compliant
§74.861 (e)-4	Frequency Tolerance	Compliant
§74.861 (e)-5	Operating Bandwidth	Compliant
§74.861 (e)-6	Unwanted Radiation	Compliant

### 4. DESCRIPTION OF TEST MODES

The EUT (Wireless Microphone) has been tested under normal operating condition. Three channels ( the top one-805.00 MHz, the middle one-756.00 MHz and the bottom one-705.00 MHz) have been chosen for testing. On each channel three axes have been evaluated for radiated emission.



## 5. MAXIMUM TRANSMITTER POWER

### 5.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e) – 1: The power of the measured unmodulated carrier power at the output of the transmitter power amplifier may not exceed 50mW



### 5.2 MEASUREMENT PROCEDURE

- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). Replace the antenna with a proper Antenna (substitution antenna).
- 10). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 11). The substitution antenna shall be connected to a calibrated signal generator.
- 12). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- 13). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.

- 14). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 15). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 16). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.
- 17). The measure of the effective radiated power is the larger of the two levels recorded, at the input to the substitution antenna, corrected for the gain of the substitution antenna if necessary.

### 5.3 TEST SETUP BLOCK DAIGRAM(setup block diagram of configuration)

#### TEST SETUP OF SUBSTITUTION METHOD:

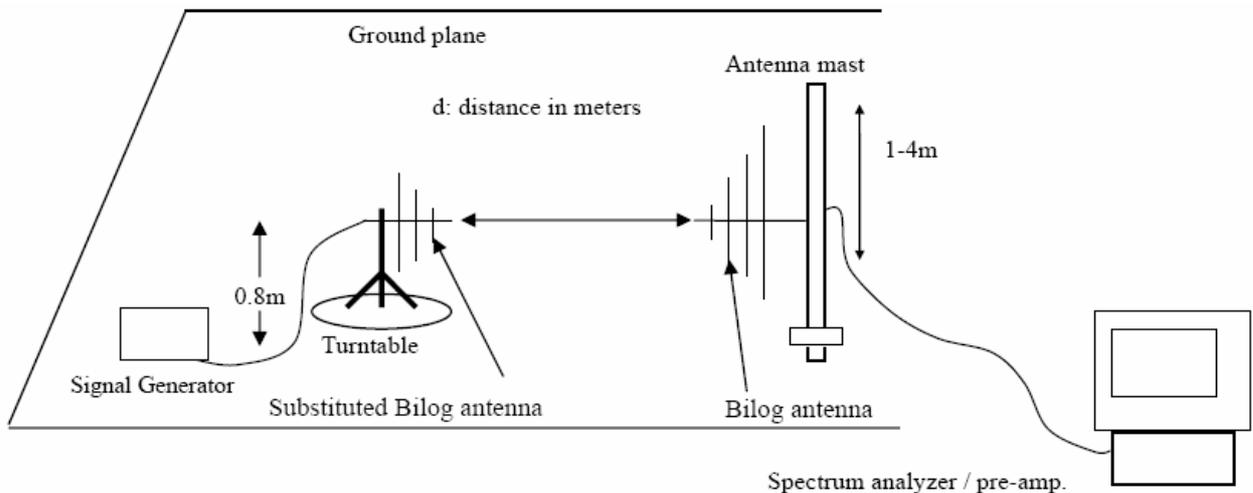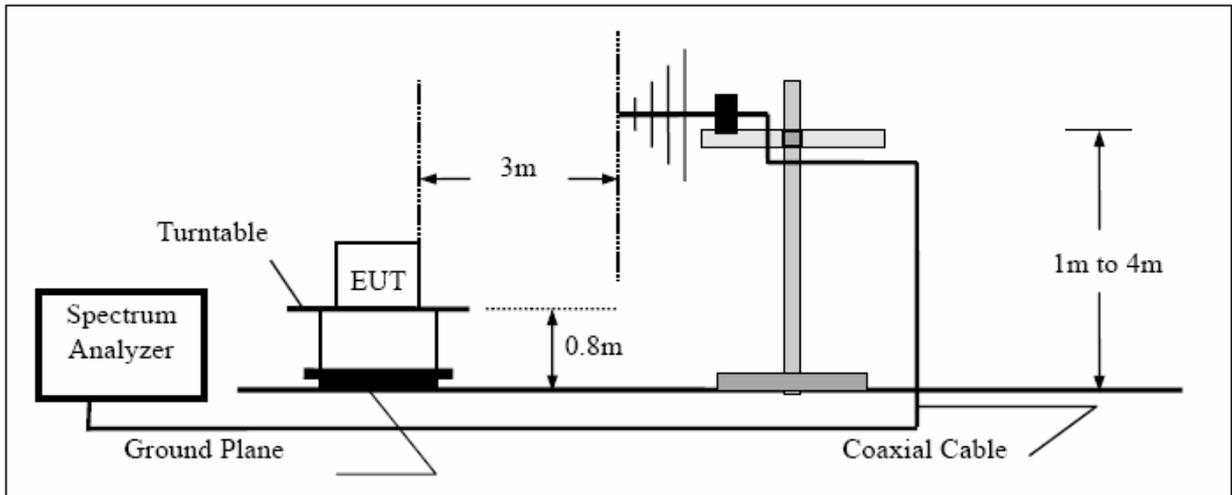



**5.4 MEASUREMENT EQUIPMENT USED:**

Open Area Test Site					
EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
Spectrum Analyzer	ADVANTEST	R3132	N/A	07/08/2007	07/07/2008
EMI Test Receiver	HP	8546A	3448A00232	07/08/2007	07/07/2008
Pre-Amplifier	HP	8447D	2944A07999	07/08/2007	07/07/2008
Bi-Log Antenna	EMCO	3142	9910-1436	07/08/2007	07/07/2008
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/08/2007	07/07/2008
CABLE	TIME MICROWAVE	LMR-400	N-TYPE04	07/08/2007	07/07/2008

**5.5 TEST RESULT**

**The Output Power of Wireless Microphone**

**The top channel-805.00 MHz**

Freq. (MHz)	Antenna Polarity	Reading (dBuV)	SGO/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (W)
							(dBm)	(mW)	
805.00	V	-30.77	-13.82	11.81	0	1.71	-3.72	0.42	0.25
805.00	H	-32.06	-16.83	11.81	0	1.71	-6.73	0.21	0.25

**The middle channel-756.00MHz**

Freq. (MHz)	Antenna Polarity	Reading (dBuV)	SGO/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (W)
							(dBm)	(mW)	
756.00	V	-21.16	-5.69	11.73	0	1.66	4.38	2.74	0.25
756.00	H	-31.63	-18.25	11.73	0	1.66	-8.18	0.15	0.25

**The bottom channel-705.00 MHz**

Freq. (MHz)	Antenna Polarity	Reading (dBuV)	SGO/P (dBm)	Ant. Gain (dB)	Dipole Gain (dBi)	Cable (dB)	Corrected Power		Limit (W)
							(dBm)	(mW)	
705.00	V	-31.31	-15.81	11.66	0	1.60	-5.75	0.27	0.25
705.00	H	-31.29	-17.24	11.66	0	1.60	-7.18	0.19	0.25

## 6. MODULATION CHARACTERISTICS

### 6.1 PROVISIONS APPLICABLE

a).According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

b). According to CFR 47 section 74.861(e)-3, any form of modulation may be used. A maximum deviation of  $\pm 75$  KHz is permitted when frequency modulation is employed.

### 6.2 MEASUREMENT METHOD

#### 6.2.1 Modulation Limit

1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from  $-20$  to  $+20$ dB. Record the frequency deviation obtained as a function of the input level.


2). Repeat step 1 with input frequency changing to 300,1000,3000, and 14000Hz in sequence.

#### 6.2.2 Audio Frequency Response

1). Configure the EUT as shown in figure 1.

2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).

3). Vary the Audio frequency from 100 Hz to 30 KHz and record the frequency deviation.

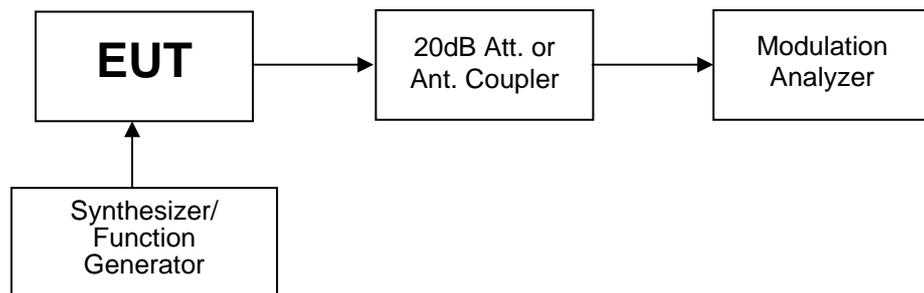

**Figure 1: Modulation characteristic measurement configuration**



### 6.3 MEASUREMENT INSTRUMENTS


EQUIPMENT TYPE	MFR	MODEL NUMBER	LAST CAL.	CAL DUE.
Audio Signal Generator	HP	3325A	07/08/2007	07/07/2008
Modulation Analyzer	HP	8920B	07/08/2007	07/07/2008
Attenuator	MINI CIRCUITS	MCL BW-S20W2	07/08/2007	07/07/2008

### 6.4 MEASUREMENT RESULT

a). Modulation Limit:

#### Top channel – 805.00 MHz


Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 11000 Hz (KHz)
-20	5.80	6.28	8.22	10.17
-15	10.51	11.54	13.12	14.76
-10	14.97	16.82	19.12	21.87
-5	17.71	20.61	24.44	27.45
0	20.45	22.92	26.61	30.51
+5	22.78	25.17	29.75	33.12
+10	24.02	26.49	31.54	34.78
+15	25.33	28.23	33.44	35.92
+20	26.31	30.35	35.66	37.08

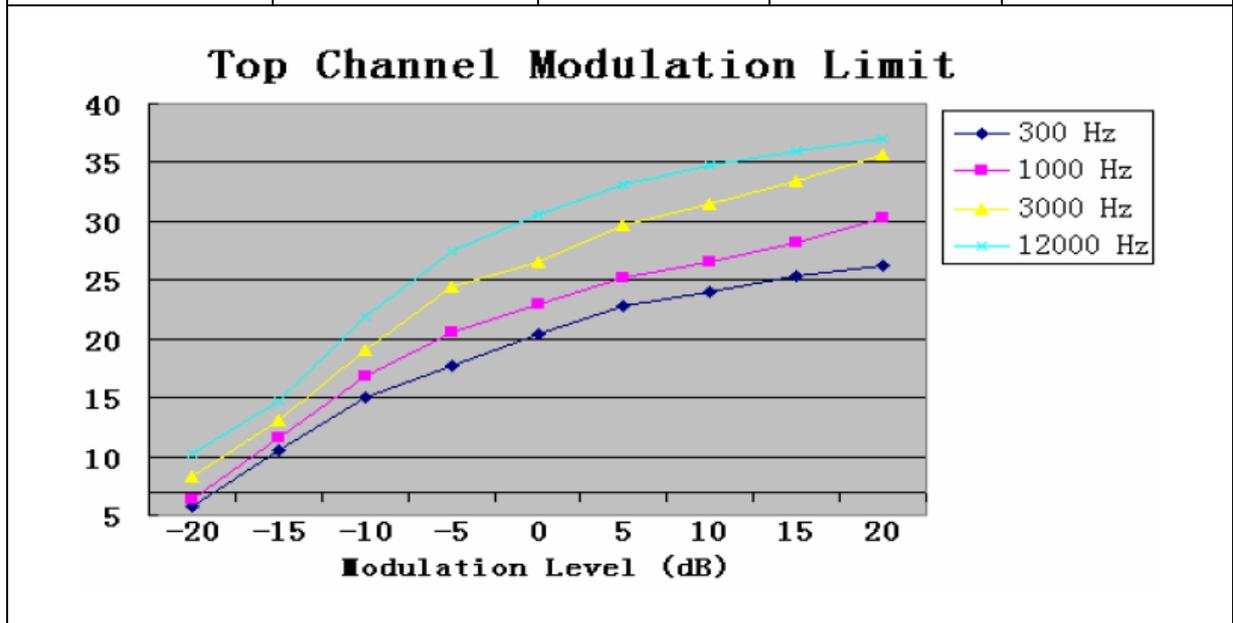



**Middle channel – 756.00 MHz**


Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 11000 Hz (KHz)
-20	5.65	6.21	7.88	9.82
-15	10.15	11.23	12.52	14.17
-10	14.39	16.26	18.17	20.86
-5	17.01	19.87	23.19	26.12
0	19.54	21.99	25.13	28.90
+5	21.80	24.17	28.14	31.42
+10	22.99	25.45	29.85	33.00
+15	24.26	27.12	31.67	34.10
+20	25.20	29.16	33.77	35.21

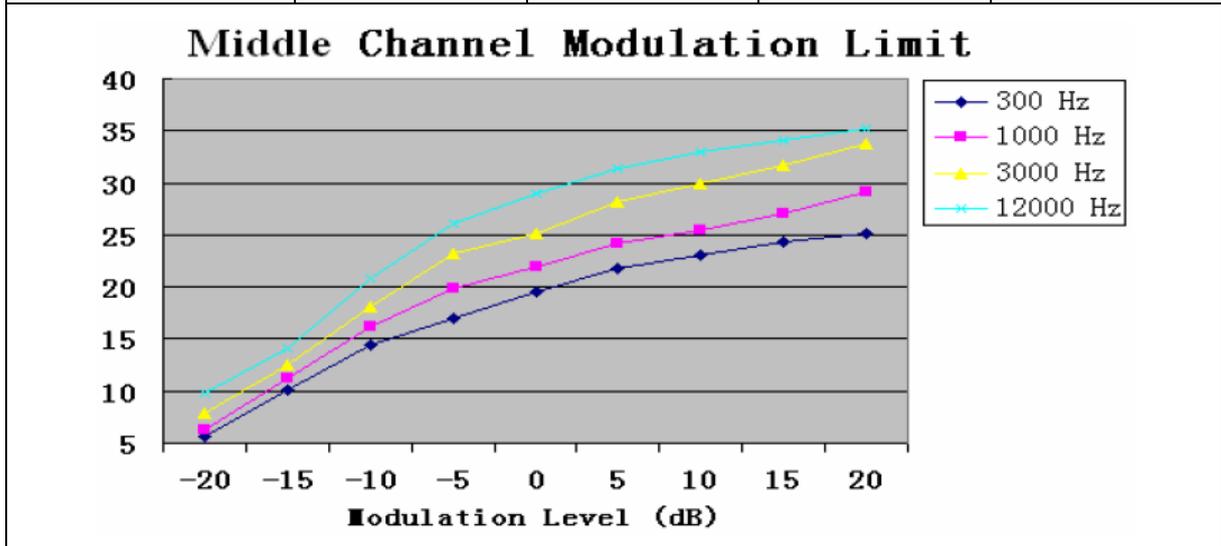



**Bottom channel – 705.00 MHz**

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz (KHz)	Peak Freq. Deviation At 1000 Hz (KHz)	Peak Freq. Deviation At 3000 Hz (KHz)	Peak Freq. Deviation At 11000 Hz (KHz)
-20	6.62	6.85	8.23	10.53
-15	11.93	12.41	13.07	15.18
-10	16.98	18.02	19.00	22.39
-5	20.08	22.03	24.25	28.05
0	23.40	24.59	26.37	31.19
+5	25.94	26.92	29.49	33.82
+10	27.30	28.30	31.26	35.50
+15	28.74	30.13	33.14	36.65
+20	29.81	32.36	35.33	38.04

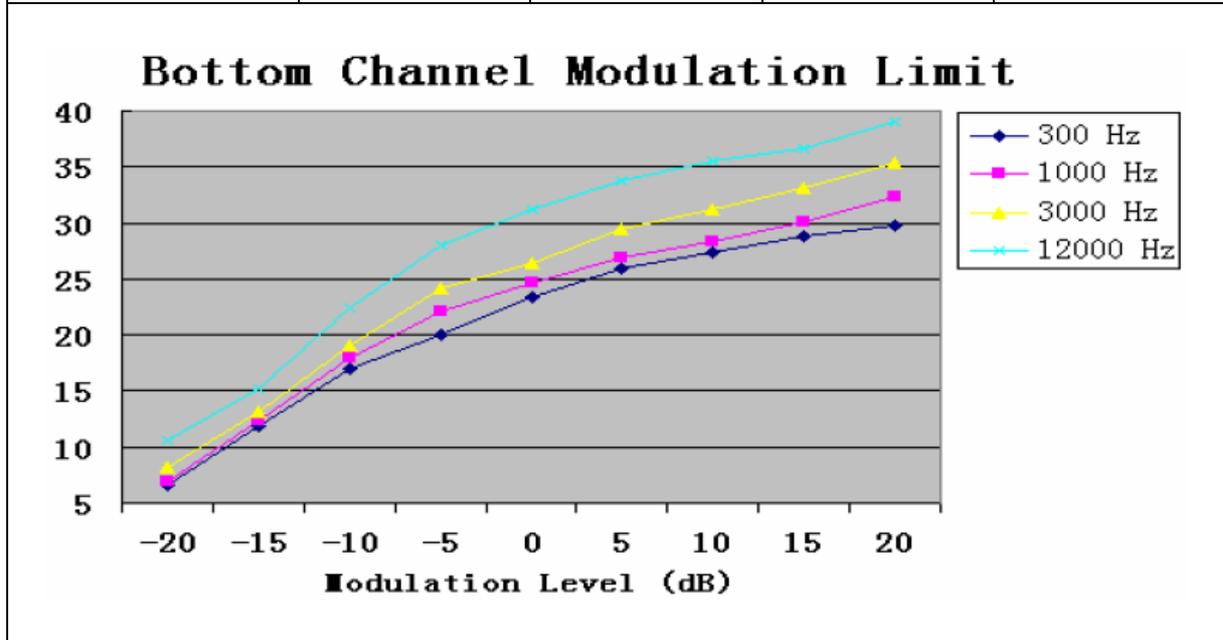


**b). Audio Frequency Response:****Top channel – 805.00MHz**


<b>Frequency (Hz)</b>	<b>Deviation (KHz)</b>
100	7.09
200	7.68
300	8.12
400	8.69
500	8.95
600	9.14
700	9.42
800	9.71
900	10.02
1000	10.32
1200	10.51
1400	10.80
1600	10.97
1800	11.10
2000	11.24
2400	11.45
2800	11.67
3200	11.94
3600	12.20
4000	12.66
4500	13.03
5000	13.14
5500	13.21
6000	13.35
6500	13.47
7000	13.54
8000	13.98
9000	14.01
10000	14.08
12000	14.16
14000	14.08
16000	13.04
18000	12.45
20000	11.96
25000	9.63
30000	8.11




### Top channel Audio Frequency response

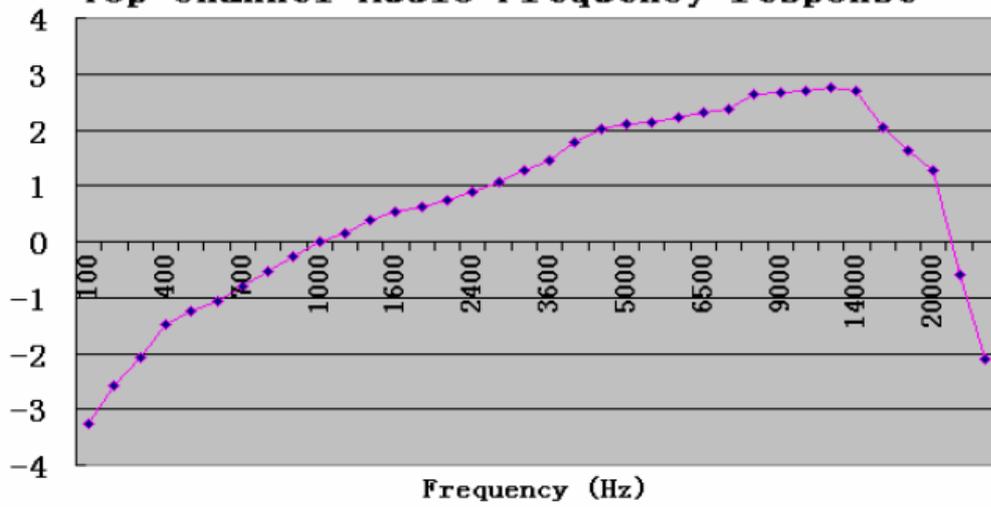

### Middle channel Audio Frequency response

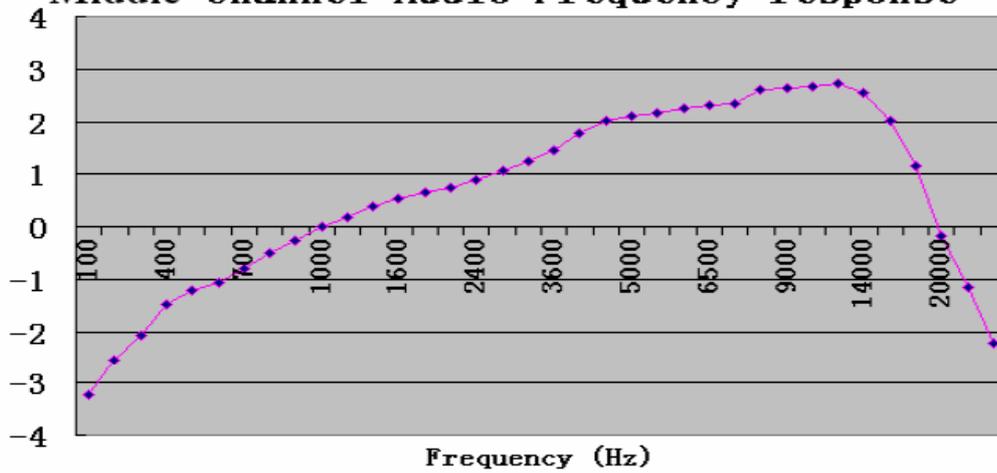

### Bottom channel Audio Frequency response

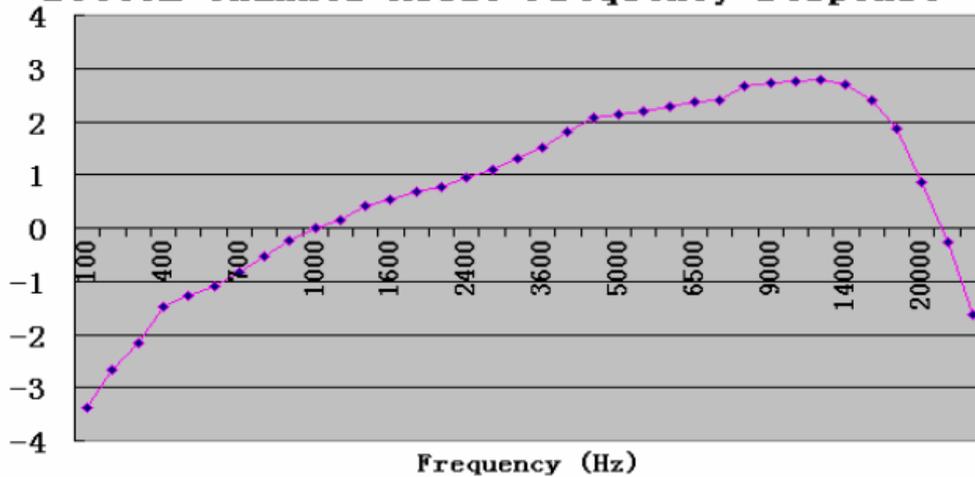



**Middle channel -756.00 MHz**

Frequency (Hz)	Deviation (KHz)
100	7.16
200	7.74
300	8.18
400	8.73
500	9.01
600	9.18
700	9.45
800	9.79
900	10.04
1000	10.37
1200	10.59
1400	10.84
1600	11.02
1800	11.16
2000	11.28
2400	11.49
2800	11.71
3200	11.96
3600	12.26
4000	12.72
4500	13.07
5000	13.19
5500	13.31
6000	13.42
6500	13.51
7000	13.59
8000	13.98
9000	14.05
10000	14.12
12000	14.19
14000	13.92
16000	13.06
18000	11.83
20000	10.16
25000	9.07
30000	8.02



**Bottom channel – 705.00MHz**

Frequency (Hz)	Deviation (KHz)
100	6.81
200	7.40
300	7.84
400	8.46
500	8.69
600	8.86
700	9.13
800	9.45
900	9.77
1000	10.05
1200	10.23
1400	10.53
1600	10.70
1800	10.86
2000	10.98
2400	11.20
2800	11.41
3200	11.67
3600	11.94
4000	12.39
4500	12.74
5000	12.85
5500	12.93
6000	13.06
6500	13.20
7000	13.26
8000	13.68
9000	13.75
10000	13.82
12000	13.87
14000	13.69
16000	13.26
18000	12.45
20000	11.08
25000	9.74
30000	8.32



## **7. FREQUENCY TOLERANCE**

### **7.1 PROVISIONS APPLICABLE**

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from  $-30^{\circ}\text{C}$  to  $+50^{\circ}\text{C}$  centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for hand carried battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacture.
- c). According to FCC Part 74 Section 74.861(e)-4, the frequency tolerance must be maintained within 0.005%.

### **7.2 MEASUREMENT PROCEDURE**

#### **7.2.1 Frequency stability versus environmental temperature**

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to  $50^{\circ}\text{C}$ . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a  $10^{\circ}\text{C}$  decreased per stage until the lowest temperature  $-30^{\circ}\text{C}$  is measured, record all measured frequencies on each temperature step.

#### **7.2.2 Frequency stability versus input voltage**

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within  $15^{\circ}\text{C}$  to  $25^{\circ}\text{C}$ . Otherwise, an environment chamber set for a temperature of  $20^{\circ}\text{C}$  shall be used. Install new battery in the EUT.
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. For battery operated only device, supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

### 7.3 TEST SETUP BLOCK DIAGRAM(block diagram of configuration)

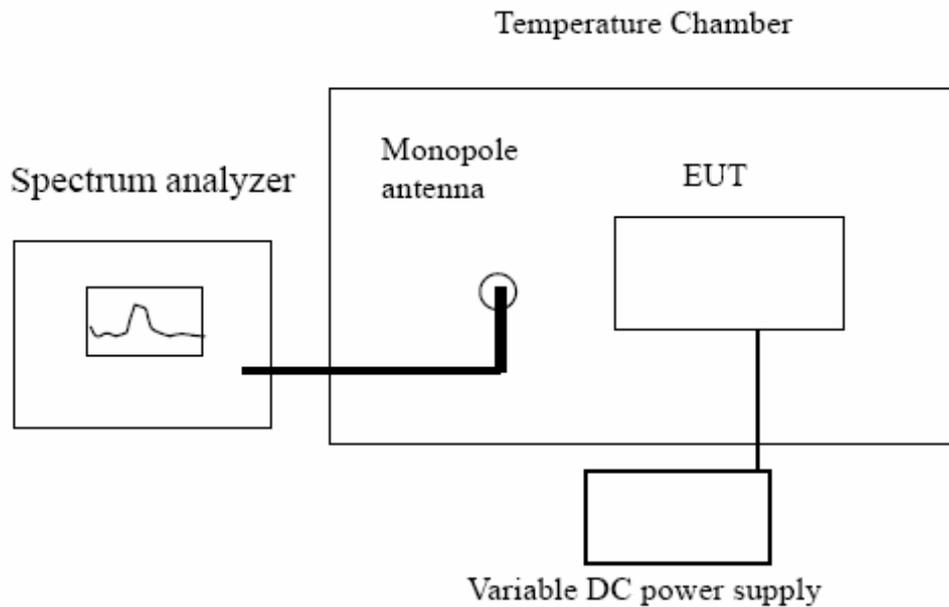


Figure 1

### 7.4 Test equipment used:

Equipment	Model No.	Serial No.	Cal. Due.
Advantest Spectrum Analyzer	R3132	120901472	07/07/2008
Shihin Temperature Chamber	BM50-CB	908	07/07/2008
DC Power Supply	WYK-605	N/A	07/07/2008
Huber + suhner low loss cable	N/A	N/A	07/07/2008
Monopole Antenna	N/A	N/A	N/A

### 7.5 TEST RESULT

a. Frequency stability versus input voltage (battery operation end point voltage is 6.7V)

Wireless Microphone	Reference Frequency (MHz)	Frequency Measured at end point voltage	Frequency Error (%)	Limit (%)
Top channel	805.00	804.99803	-0.00024	0.005
Middle channel	756.00	755.99811	-0.00025	0.005
Bottom channel	705.00	704.99825	-0.00025	0.005

**b. Frequency stability versus ambient temperature****Top channel-805.00 MHz**

Reference Frequency: 805.00 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapse (30 minutes)	
		(MHz)	%
50	New Battery	805.00102	0.00013
40	New Battery	804.99933	-0.00008
30	New Battery	804.99884	-0.00014
20	New Battery	804.99834	-0.00021
10	New Battery	804.99804	-0.00024
0	New Battery	804.99772	-0.00028
-10	New Battery	804.99723	-0.00034
-20	New Battery	804.99691	-0.00038
-30	New Battery	804.99651	-0.00043

**Middle channel-756.00 MHz**

Reference Frequency: 756.00 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapse (30 minutes)	
		(MHz)	%
50	New Battery	756.00240	0.00032
40	New Battery	756.00104	0.00014
30	New Battery	756.00013	0.00002
20	New Battery	755.99836	-0.00022
10	New Battery	755.99967	-0.00004
0	New Battery	755.99930	-0.00009
-10	New Battery	755.99907	-0.00012
-20	New Battery	755.99884	-0.00015
-30	New Battery	755.99680	-0.00042

**Bottom channel-705.00 MHz**

Reference Frequency: 705.00 MHz		Limit: $\pm 0.005\%$	
Environment Temperature (°C)	Power Supply	Frequency deviation measured with time Elapse (30 minutes)	
		(MHz)	%
50	New Battery	704.99945	-0.00008
40	New Battery	704.99804	-0.00028
30	New Battery	704.99726	-0.00039
20	New Battery	704.99851	-0.00021
10	New Battery	704.99698	-0.00043
0	New Battery	704.99670	-0.00047
-10	New Battery	704.99634	-0.00052
-20	New Battery	704.99599	-0.00057
-30	New Battery	704.99543	-0.00065

## 8. EMISSION BANDWIDTH


### 8.1 PROVISIONS APPLICABLE

According to FCC Part 74 Section 74.861(e)-5: The operation bandwidth shall not exceed 200KHz

### 8.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). Set EUT as normal operation
- 3). Set SPA Center Frequency = fundamental frequency , RBW,VBW= 1 KHz, Span =200 KHz.
- 4). Set SPA Max hold. Mark peak, -26dB.

### 8.3 TEST SETUP BLOCK DIAGRAM (Block Diagram of Configuration)

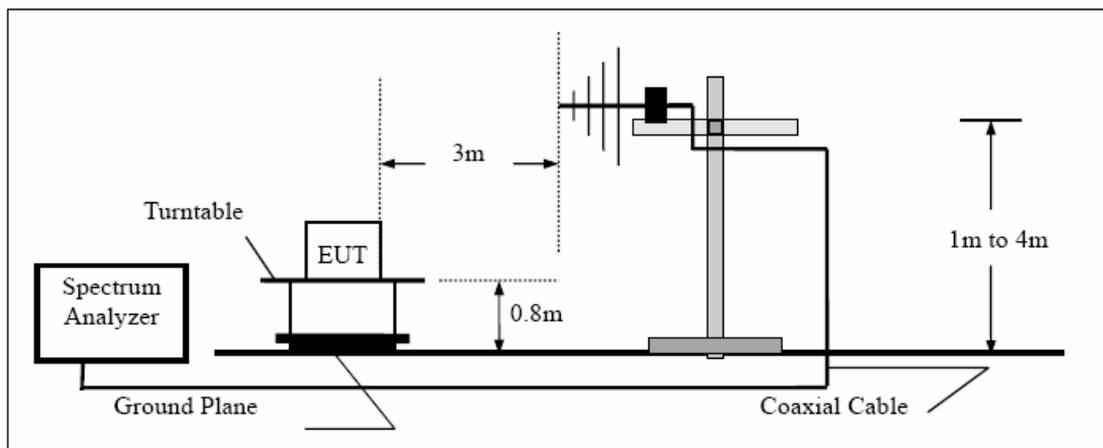

### 8.4 MEASUREMENT EQUIPMENT USED:

Open Area Test Site # 3					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.
Spectrum Analyzer	ADVANTEST	R3132	120901472	07/08/2007	07/07/2008
EMI Test Receiver	HP	8546A	3448A00232	07/08/2007	07/07/2008
Pre-Amplifier	HP	8447D	2944A07999	07/08/2007	07/07/2008
Bi-log Antenna	EMCO	3142	9910-1436	07/08/2007	07/07/2008


### 8.5 MEASUREMENT RESULT:

26dB bandwidth = 102.7KHz


Refer to attached data chart.



### Top channel - 805.0 MHz

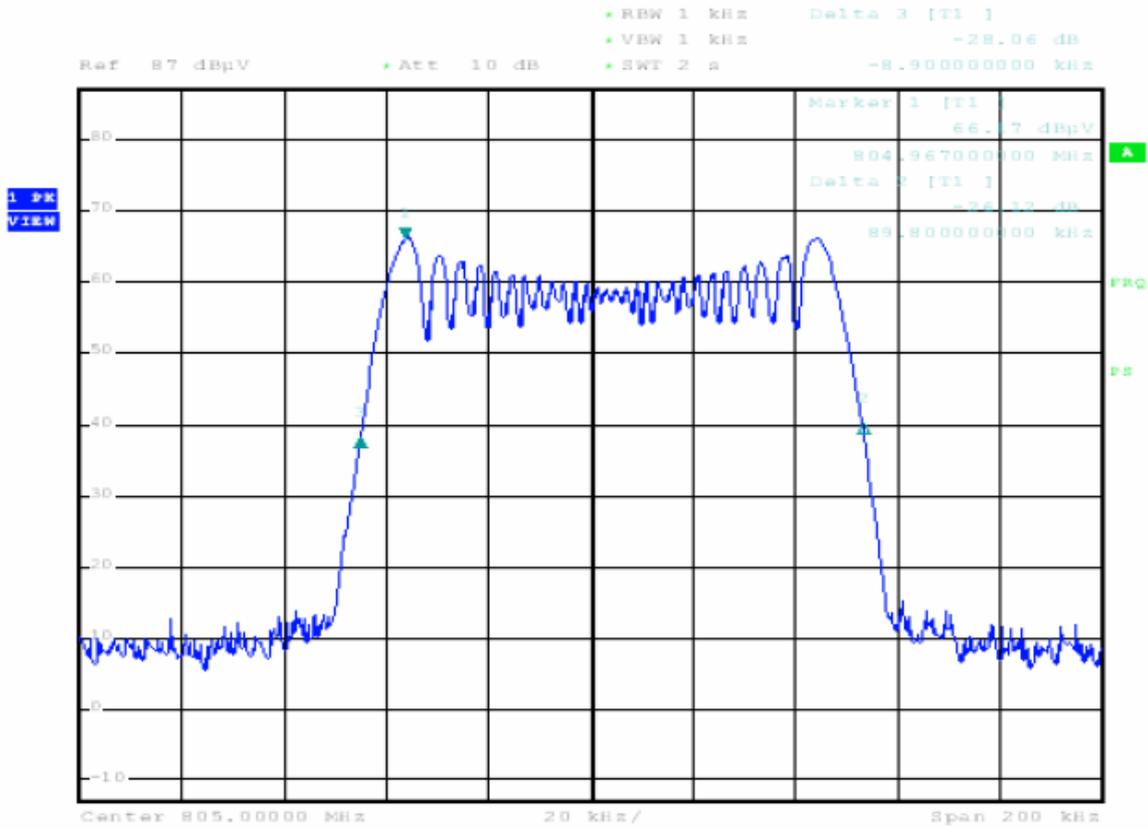


### Middle channel - 756.0 MHz

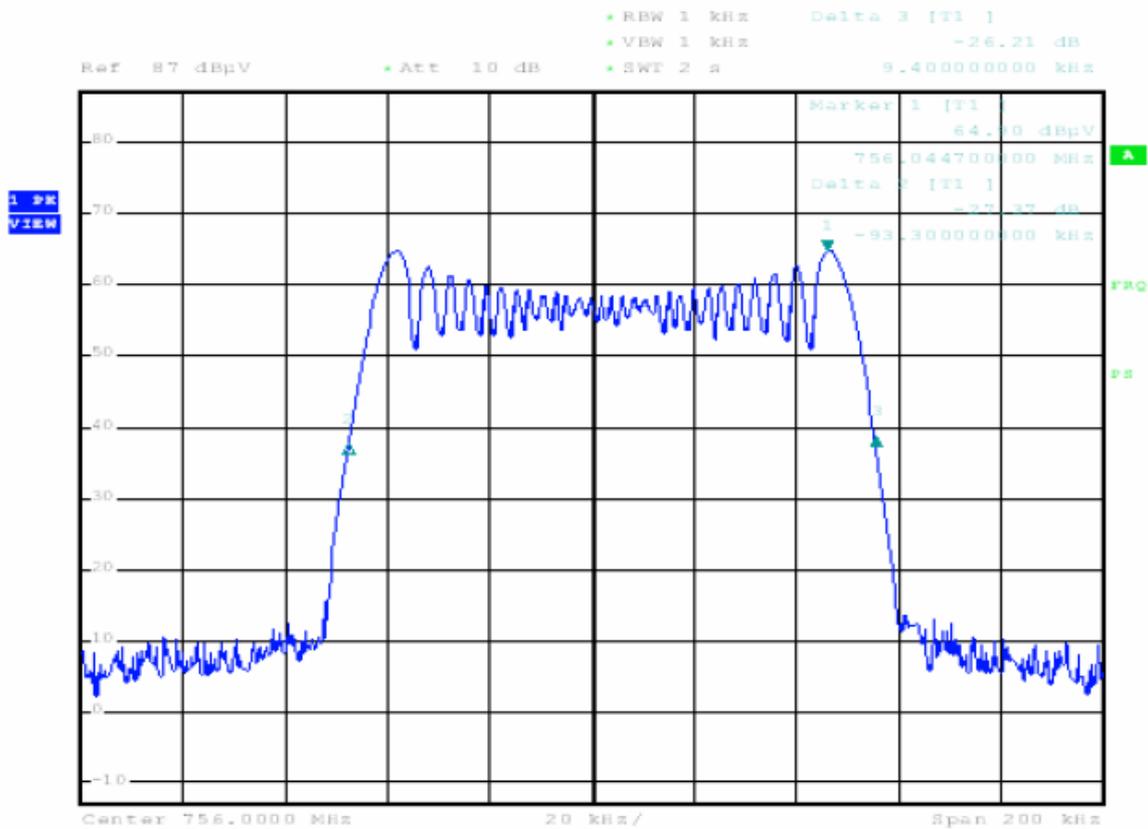



### Bottom channel – 705.0 MHz

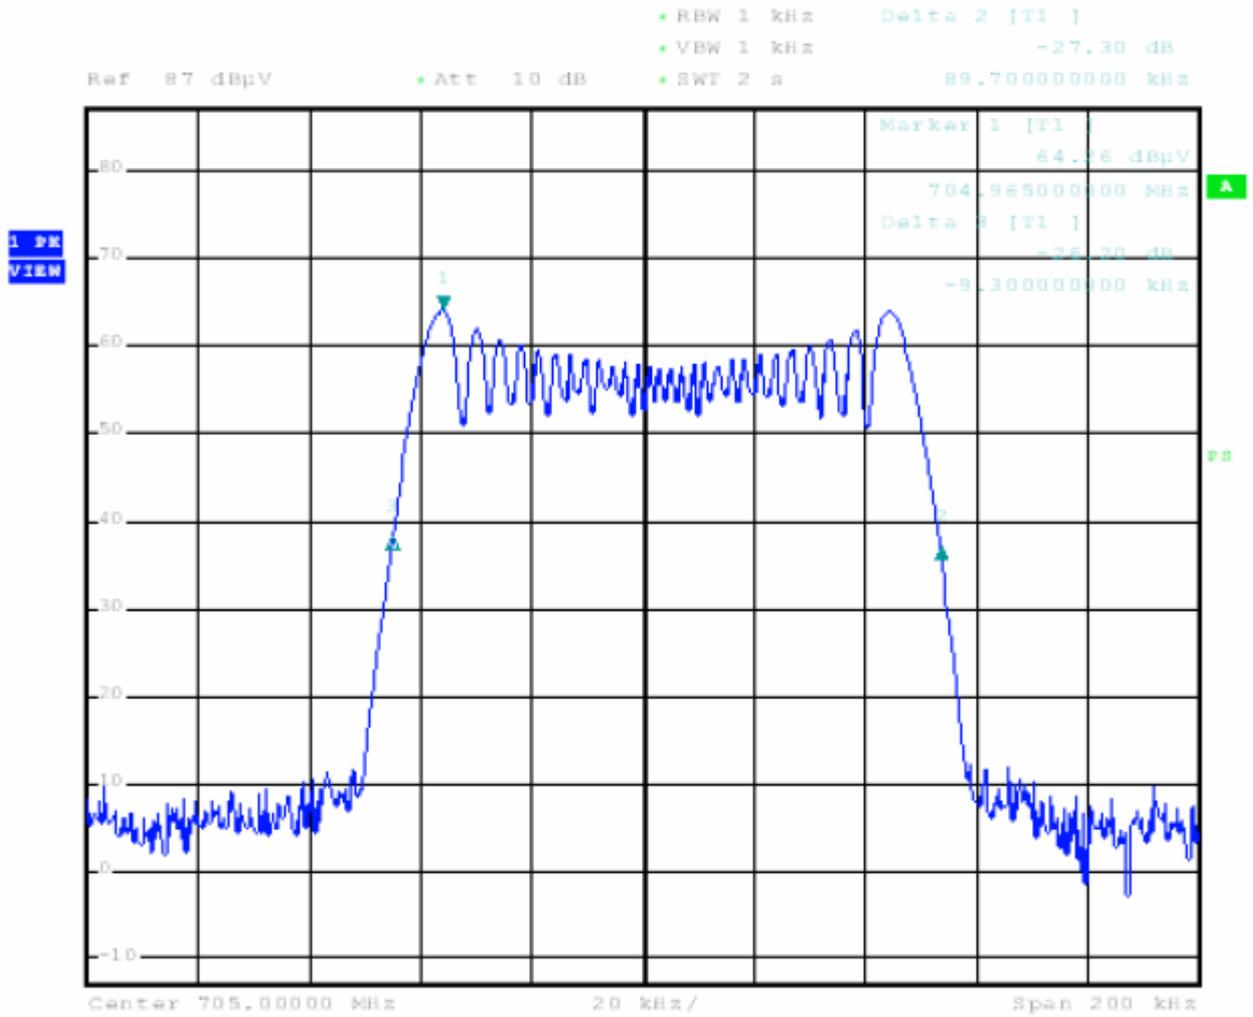



## **9. UNWANTED RADIATION**

### **9.1 PROVISIONS APPLICABLE**

According to Section 74.861(e)-6, The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:


- 1). On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25 dB;
- 2). On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35 dB;
- 3). On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least  $43 + 10 \log_{10} (TP)$  dB

### **9.2 MEASUREMENT PROCEDURE**


- 1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- 2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- 3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- 4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- 5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- 6). The transmitter shall then be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- 7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- 8). The maximum signal level detected by the measuring receiver shall be noted.
- 9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- 10). Replace the antenna with a proper Antenna (substitution antenna).
- 11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- 12). The substitution antenna shall be connected to a calibrated signal generator.
- 13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.

- 14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- 15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- 16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- 17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.


### 9.3 TEST SETUP BLOCK DIAGRAM (block diagram of configuration)

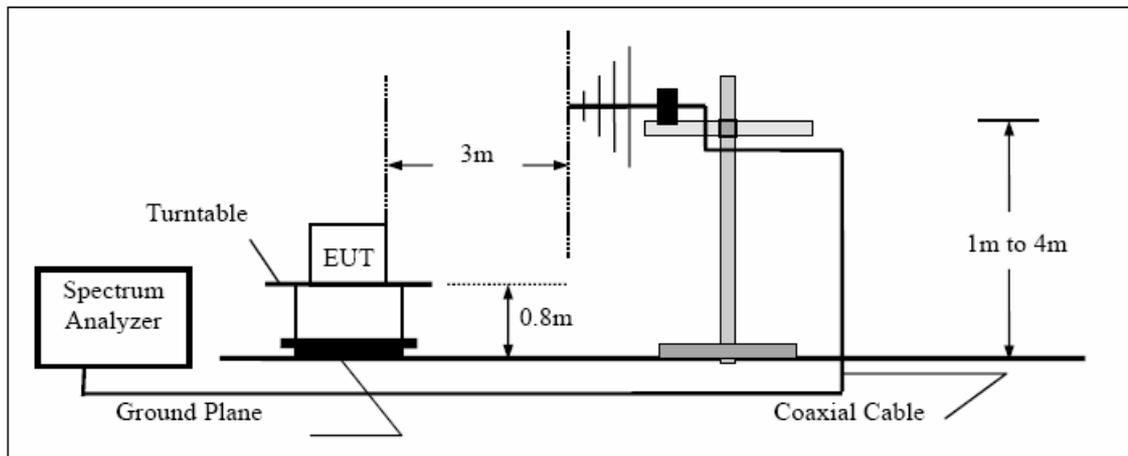

Radiation below 1GHz

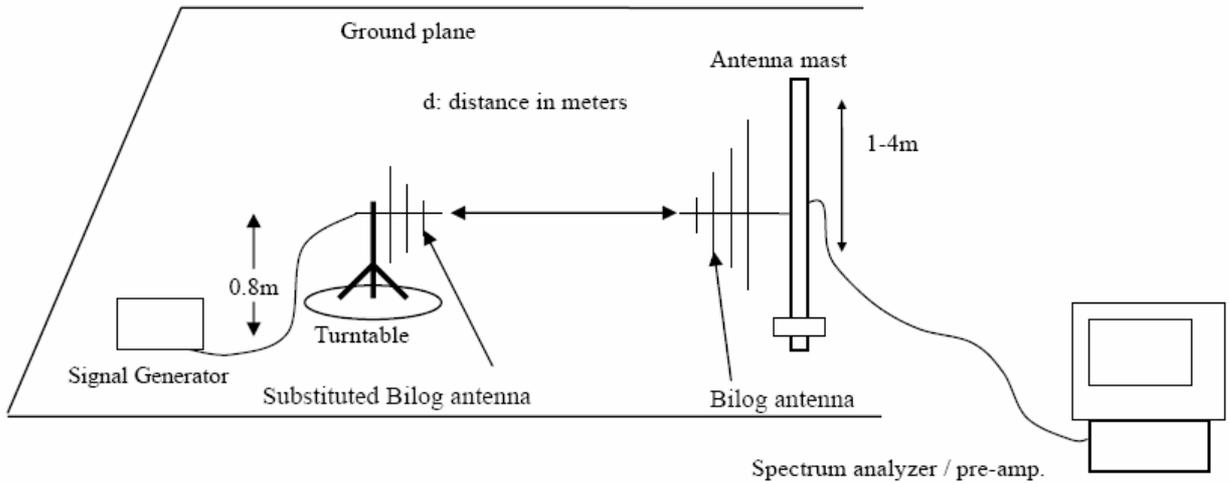

Radiation above 1GHz

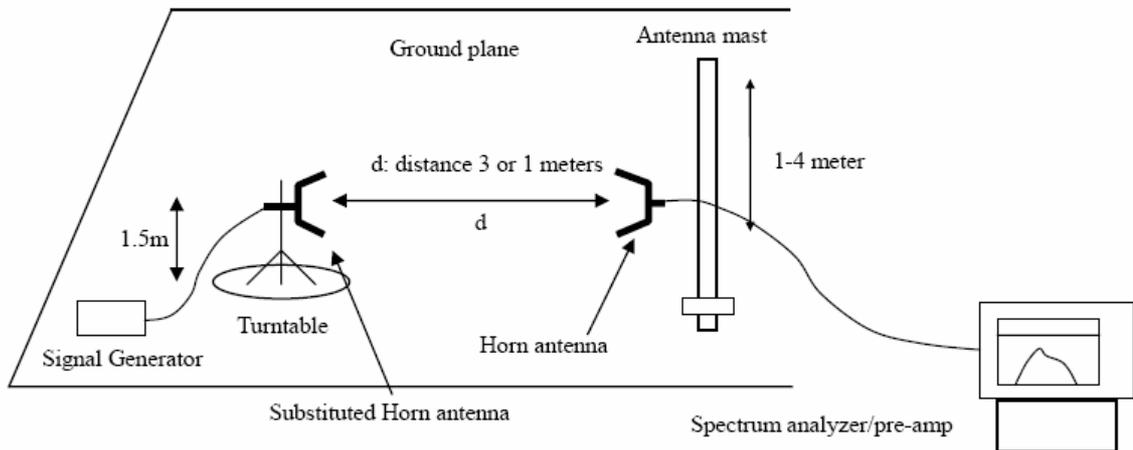

9.4 MEASUREMENT EQUIPMENT USED:

Open Area Test Site					
EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	LAST CAL.	CAL DUE.
Spectrum Analyzer	ADVANTEST	R3132	N/A	07/08/2007	07/07/2008
EMI Test Receiver	HP	8546A	3448A00232	07/08/2007	07/07/2008
Pre-Amplifier HP	HP	8447D	2944A07999	07/08/2007	07/07/2008
Bi-Log Antenna	EMCO	3142	9910-1436	07/08/2007	07/07/2008
Bi-Log Antenna	SCHAFFNER	CBL6143	5082	07/08/2007	07/07/2008
CABLE	TIME MICROWAVE	LMR-400	N-TYPE04	07/08/2007	07/07/2008
Horn Antenna	ARA	DRG-118/A	104	07/08/2007	07/07/2008



## 9.5 MEASUREMENT RESULTS:

Calculation: Limit (dBm)= EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,, in this application, the EL is 4.38 dBm.

Limit (dBm)= 4.38-43-10log 10 (0.000274) = -13

### Top channel & Middle channel & Bottom channel


Frequency (MHz)	Reading level (dBm)	Antenna Polarization	S.G. (dBm)	Cable loss (dB)	Ant.Gain (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
1610.00	-69.39	H	-43.82	1.96	12.33	-33.46	-13	-20.46
1610.00	-61.44	V	-35.96	1.96	12.33	-25.60	-13	-12.60
1513.33	-70.38	H	-44.00	1.95	12.28	-33.67	-13	-20.67
1513.33	-59.55	V	-33.82	1.95	12.28	-23.49	-13	-10.49
1410.00	-88.07	H	-61.78	1.94	12.23	-51.50	-13	-38.5
1410.00	-68.32	V	-42.87	1.94	12.23	-32.59	-13	-19.59
*	*						-13	

Notes: \* means the output power of all the spurious frequency is at least 20dB down to the limit.




### 9.6 RADIATION EMISSION MASK:

#### Top channel - 805.0 MHz

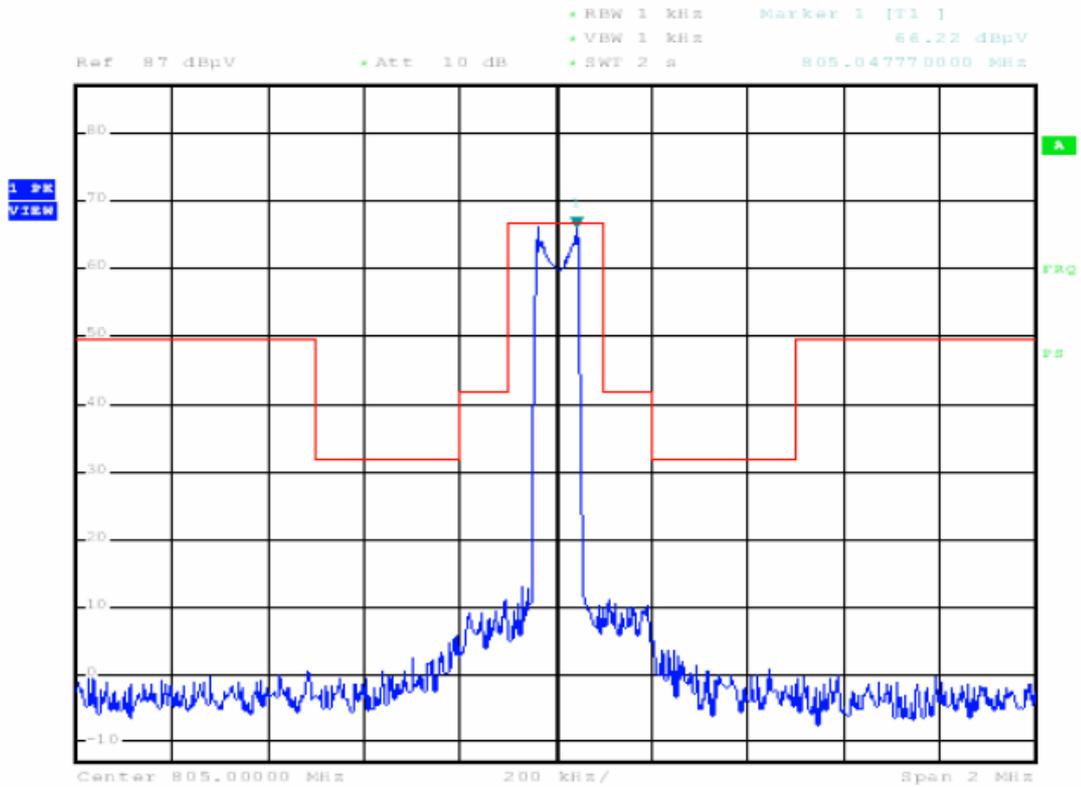


#### Middle channel - 756.0 MHz

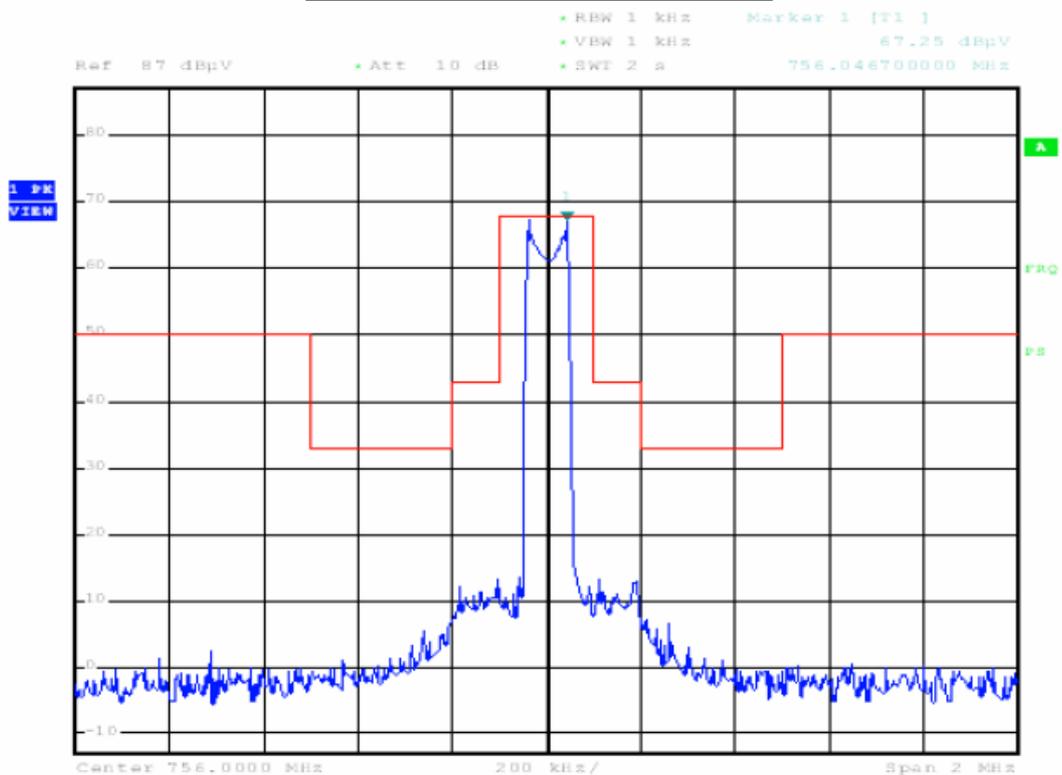



### Bottom channel – 705.0 MHz

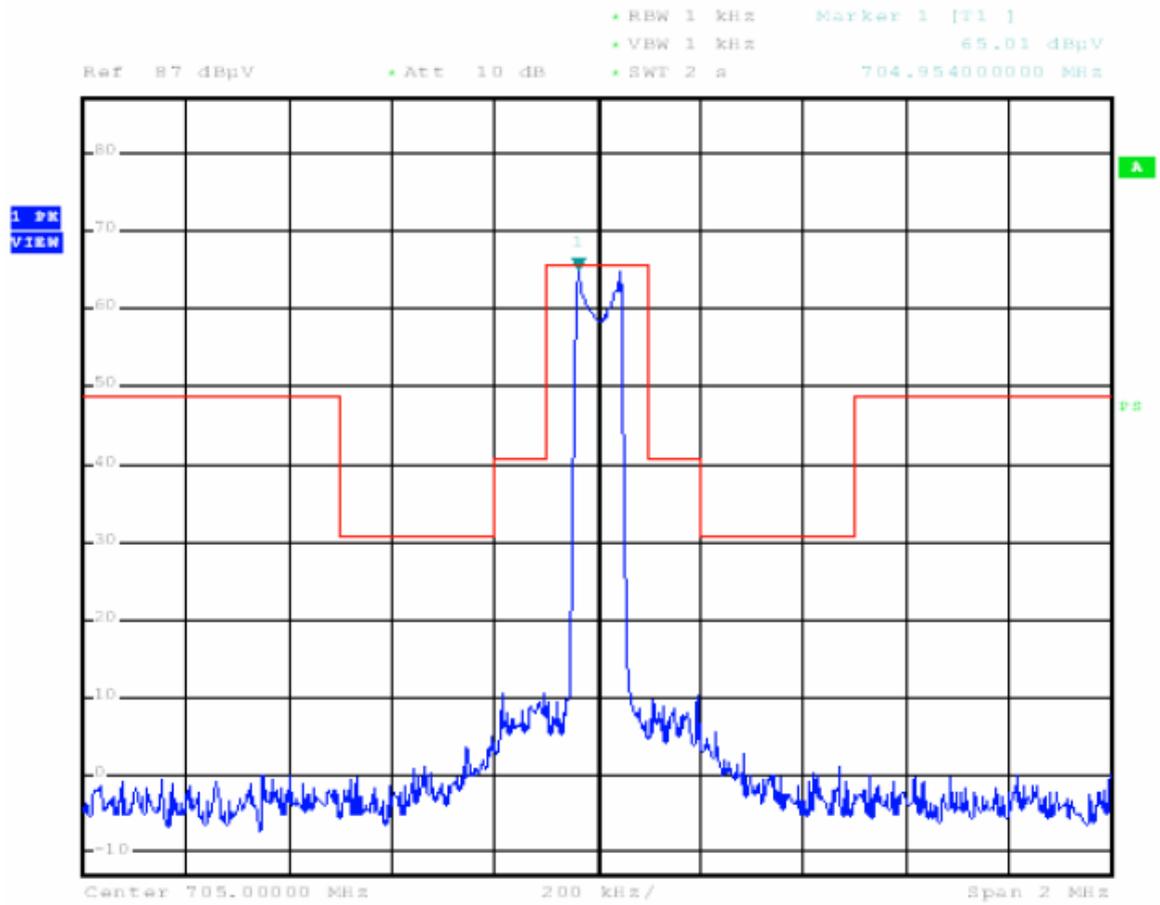



## **APPENDIX 1**

### **PHOTOGRAPHS OF SET UP**

### Radiated Emission Setup Photo

