



GPRS 850-Body Down Middle CH190.....	2
GPRS 850-Body - Right Middle CH190	4
GPRS 850-Body – Top Middle CH190	5
GSM 850-Body Down Middle CH190	6
GSM 850-Body - Right Middle CH190	8
GSM 850-Body – Top Middle CH190	9
GPRS1900-Body Down Middle CH661.....	10
GPRS1900-Body - Right Middle CH661	11
GPRS1900-Body – Top Middle CH661	12
PCS1900-Body Down Middle CH661.....	14
PCS1900-Body - Right Middle CH661	15
PCS1900-Body – Top Middle CH661	16
WCDMA Band II-Body Down Middle CH9400	18
WCDMA Band II-Body - Right Middle CH9400.....	20
WCDMA Band II-Body – Top Middle CH9400.....	21
IEEE 802.11b-Boby Down Middle CH6	22
IEEE 802.11b-Boby – Right Middle CH6	24



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GPRS 850-Body Down Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS850/GPRS850 Body Down Middle CH190/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.547 W/kg


GPRS850/GPRS850 Body Down Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm


Reference Value = 18.923 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.936 W/kg

SAR(1 g) = 0.466 W/kg; SAR(10 g) = 0.247 W/kg

Maximum value of SAR (measured) = 0.722 W/kg

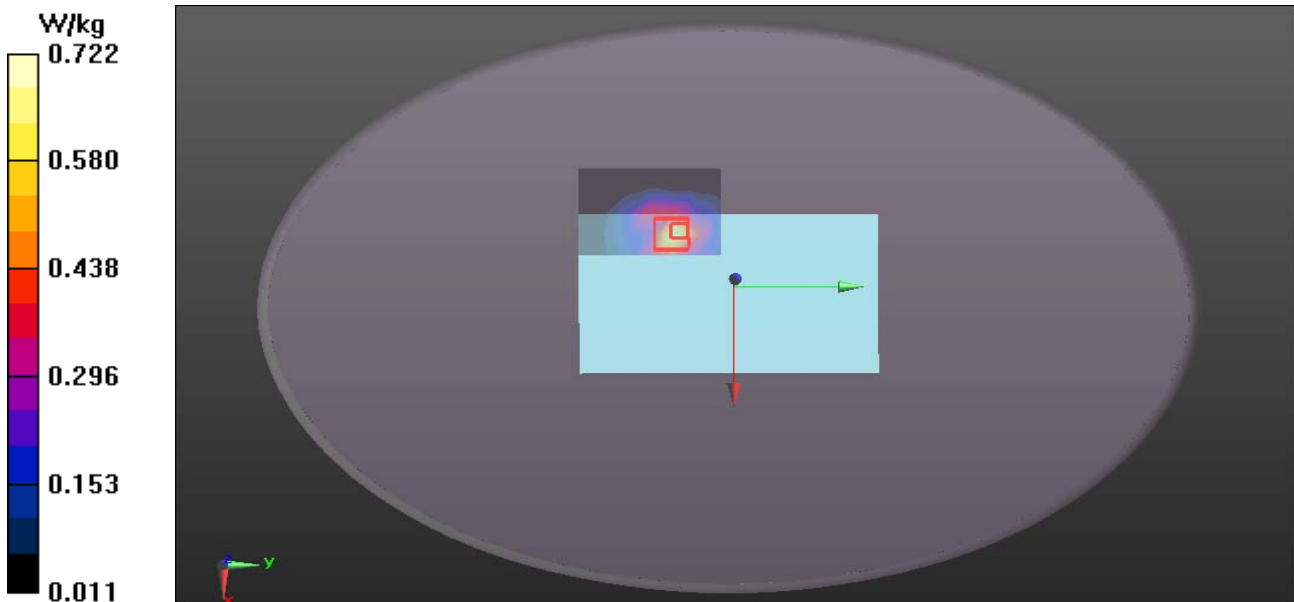

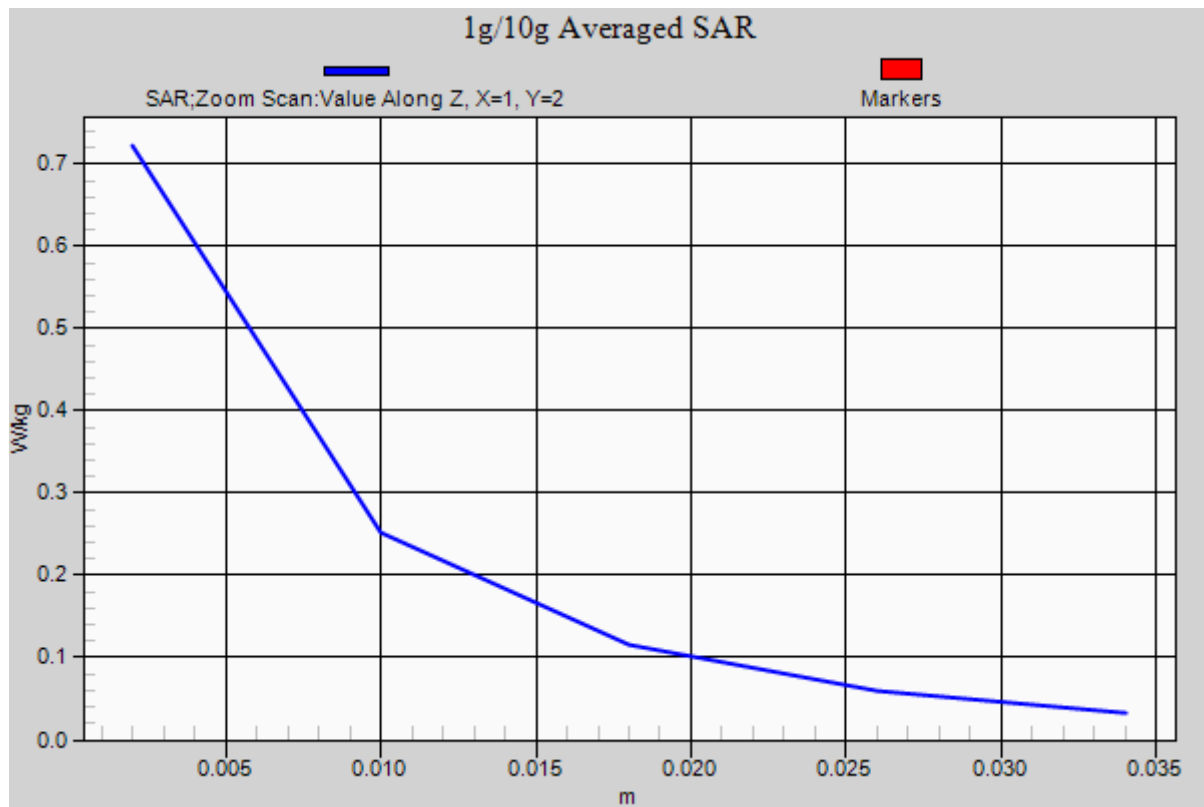



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GPRS 850-Body - Right Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS850/GPRS850 Body Right Middle CH190/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.218 W/kg


GPRS850/GPRS850 Body Right Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 10.396 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.238 W/kg

SAR(1 g) = 0.201 W/kg; SAR(10 g) = 0.152 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

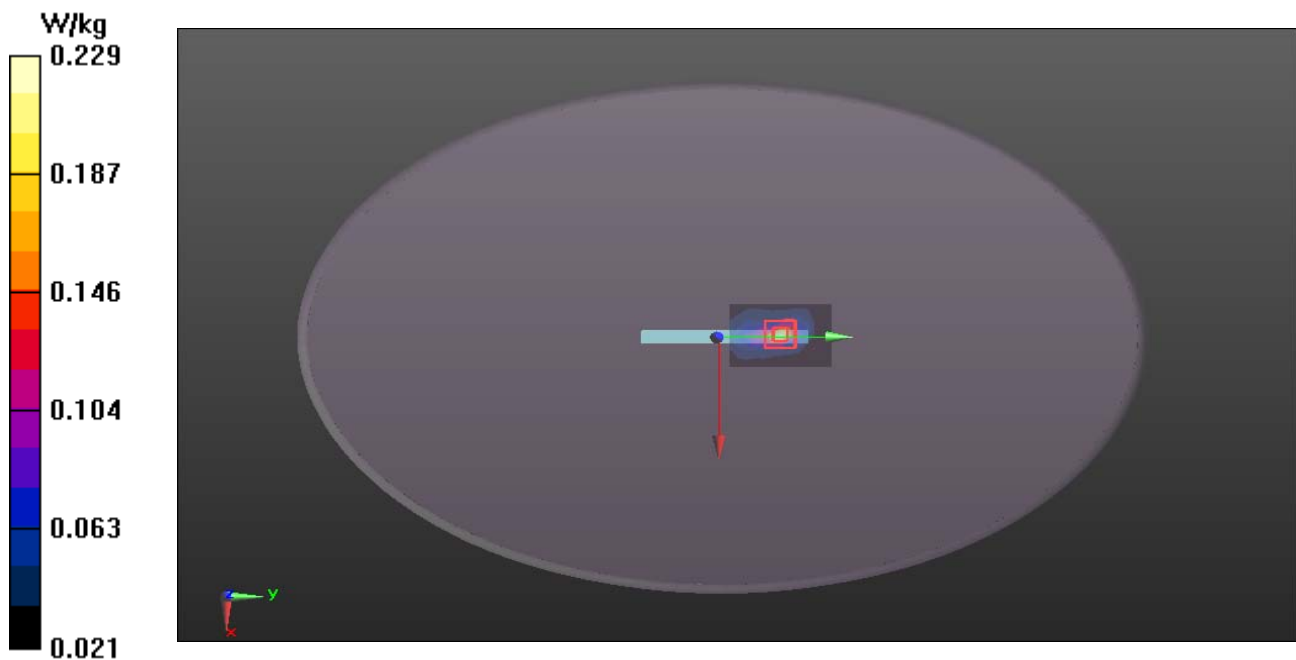



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GPRS 850-Body – Top Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

R Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS850/GPRS850 Body Top Middle CH190/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.159 W/kg


GPRS850/GPRS850 Body Top Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 9.485 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.140 W/kg; SAR(10 g) = 0.106 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

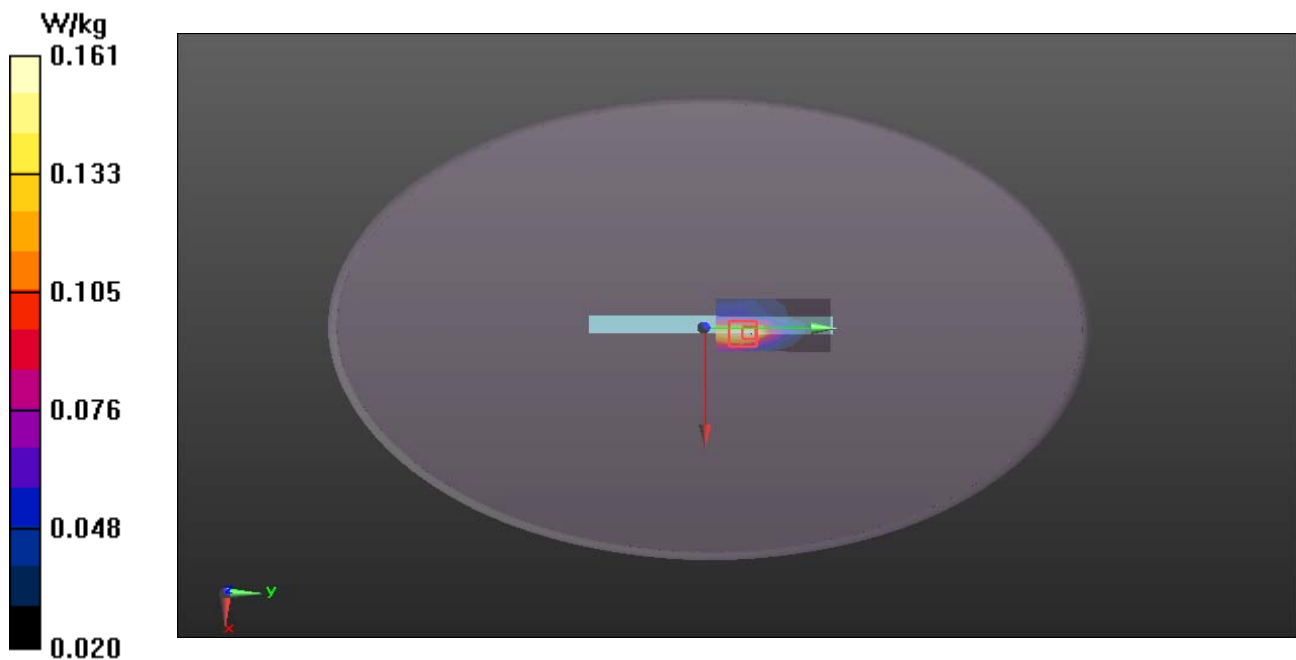



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GSM 850-Body Down Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:7.99834

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

GSM 850/GSM850 Body Down Middle CH190/Area Scan (8x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.483 W/kg

GSM 850/GSM850 Body Down Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=8mm


Reference Value = 15.801 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.197 W/kg

Maximum value of SAR (measured) = 0.585 W/kg

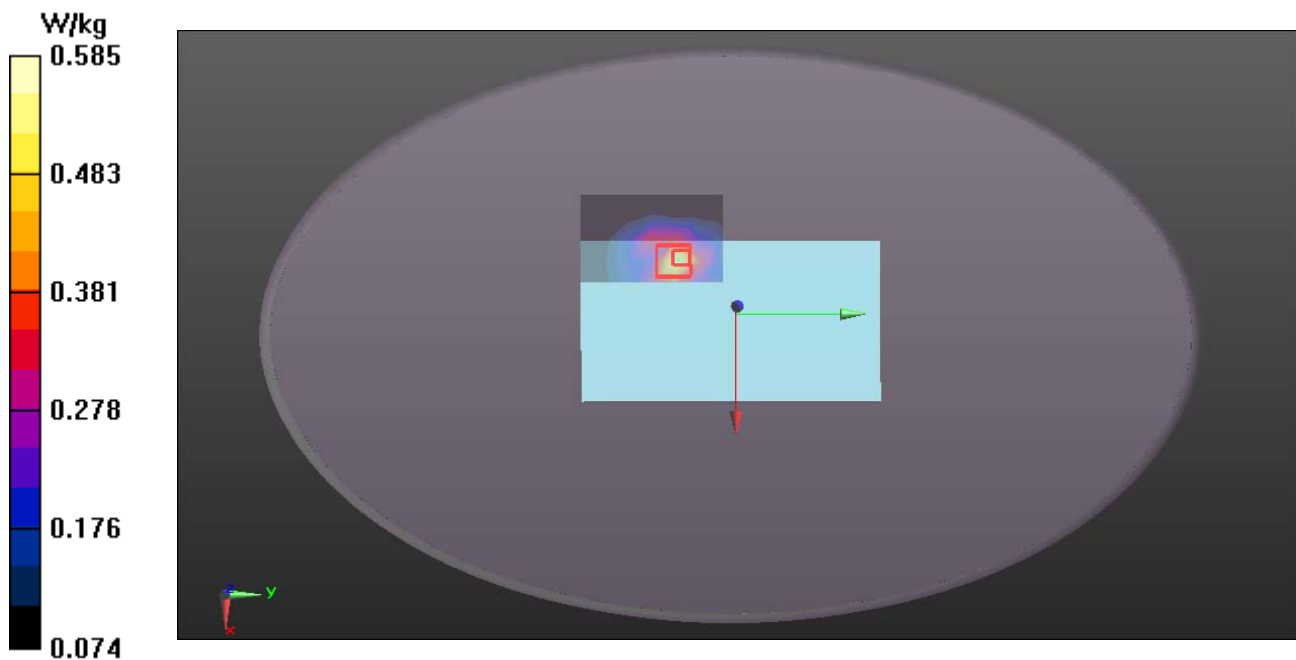

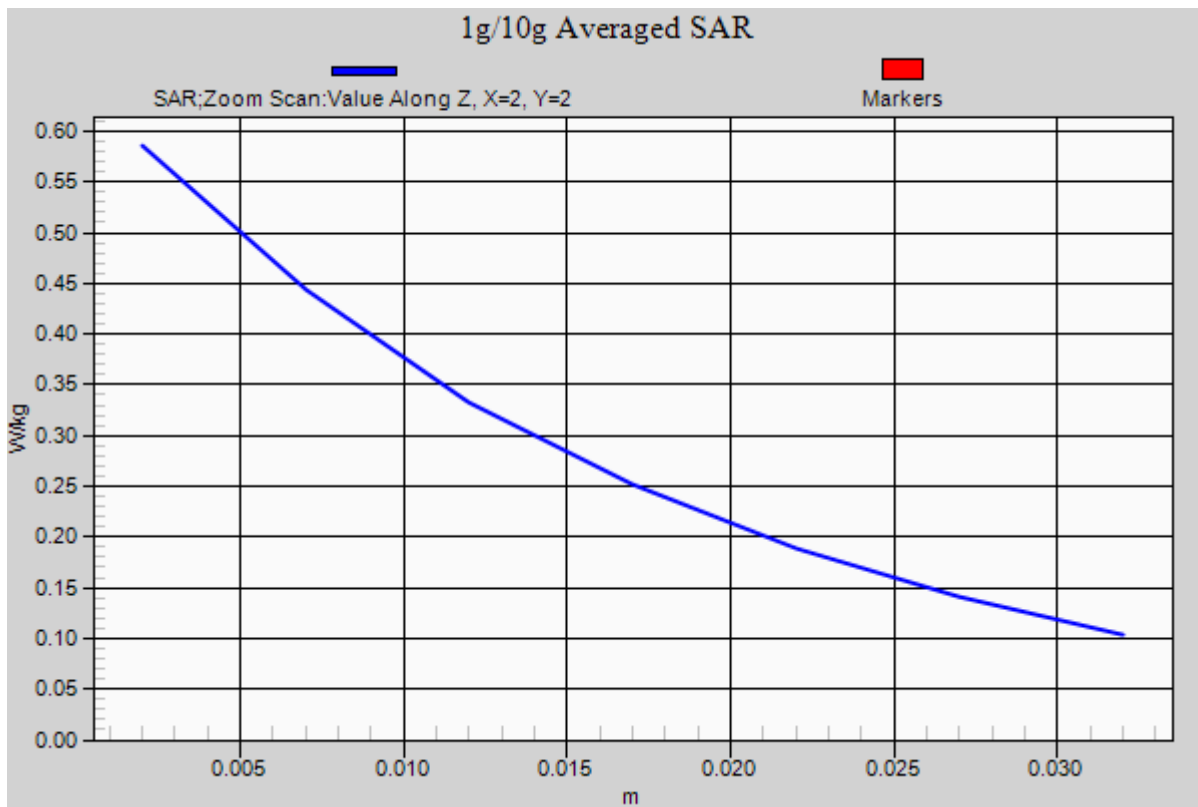



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GSM 850-Body - Right Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/ GSM 850 Body Right Middle CH190/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.212 W/kg


GSM 850/ GSM 850 Body Right Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 9.396 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.218 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.114 W/kg

Maximum value of SAR (measured) = 0.232 W/kg

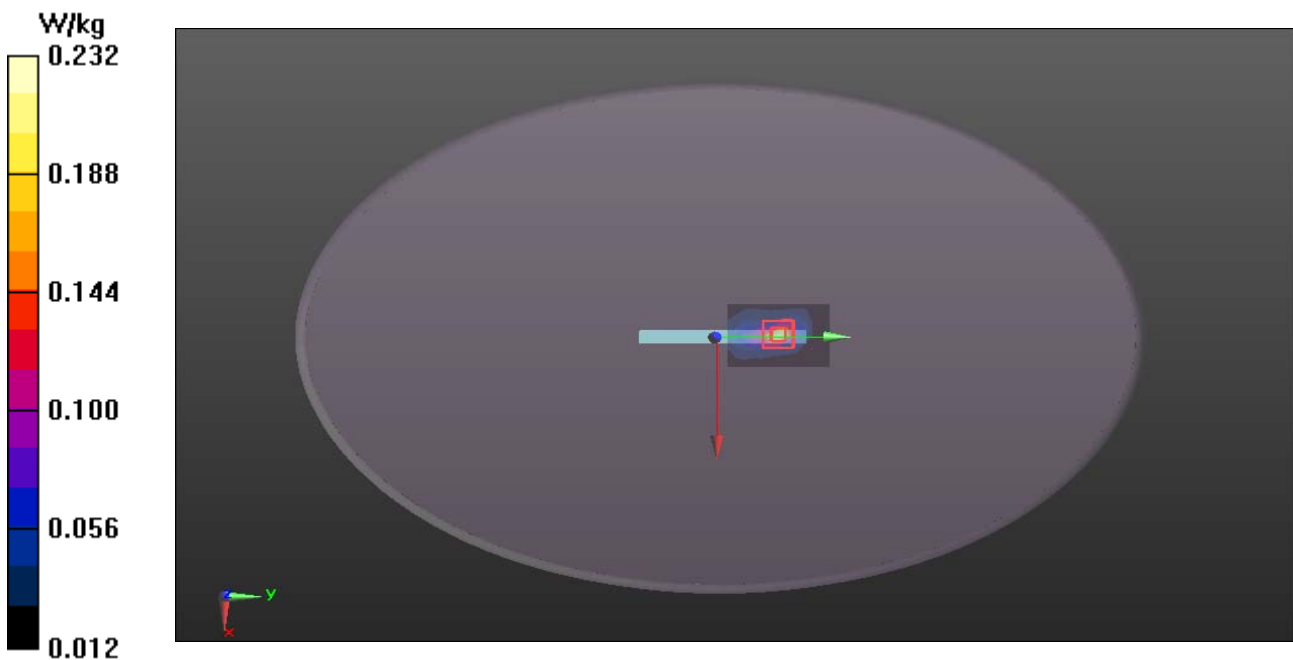



Test Laboratory: Compliance Certification Services Inc.

Date: 6/17/2013

GSM 850-Body – Top Middle CH190

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: GSM850; Frequency: 836.6 MHz; Duty Cycle: 1:8.30042

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 23.1°C; Liquid Temperature: 22.2°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2011
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GSM 850/ GSM 850 Body Top Middle CH190/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.214 W/kg


GSM 850/ GSM 850 Body Top Middle CH190/Zoom Scan (5x5x5)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=8mm

Reference Value = 9.485 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.250 W/kg

SAR(1 g) = 0.176 W/kg; SAR(10 g) = 0.118 W/kg

Maximum value of SAR (measured) = 0.230 W/kg

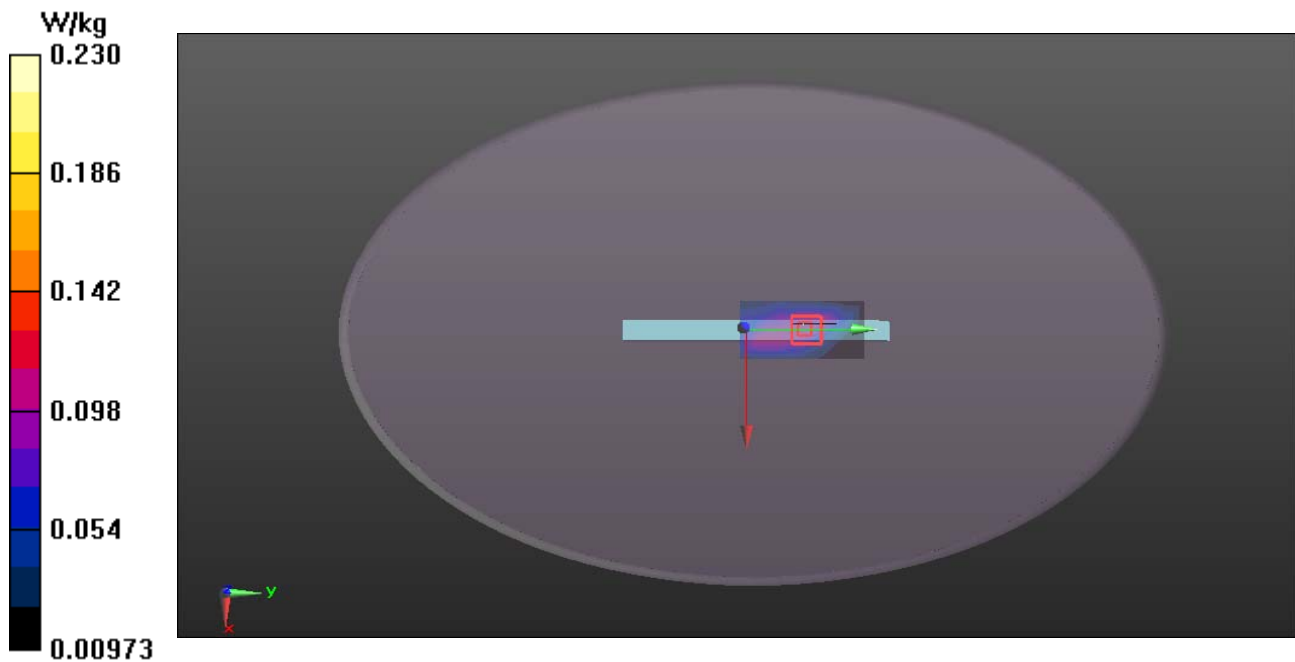



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

GPRS1900-Body Down Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS1900/GPRS 1900 Body Down Middle CH661/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.122 W/kg


GPRS1900/GPRS 1900 Body Down Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.752 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

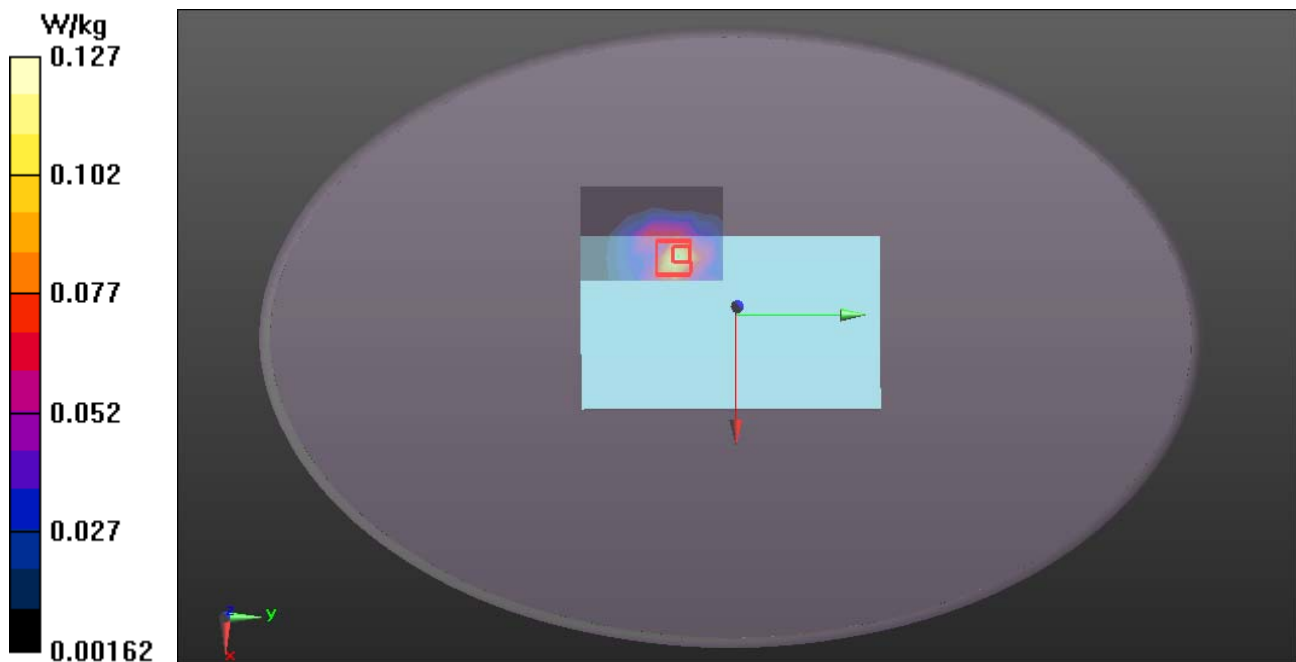



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

GPRS1900-Body - Right Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS1900/GPRS 1900 Body Right Middle CH661/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.210 W/kg


GPRS1900/GPRS 1900 Body Right Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.617 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.182 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.211 W/kg

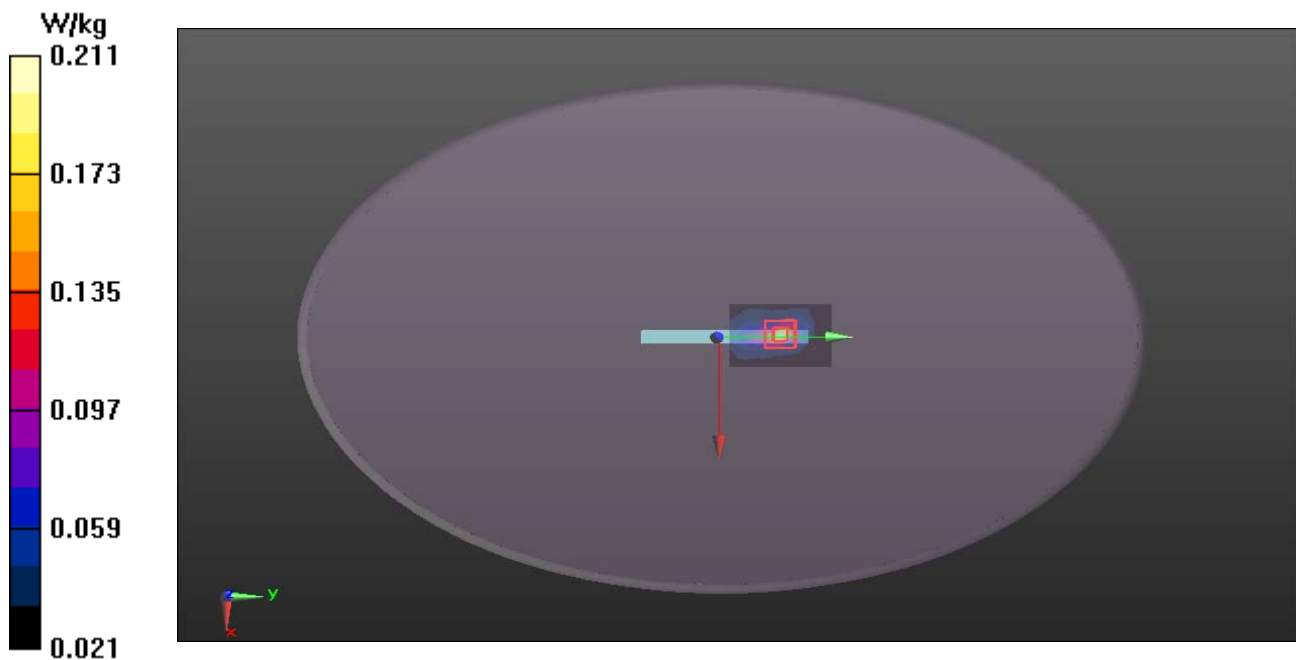



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

GPRS1900-Body – Top Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

GPRS1900/GPRS 1900 Body Middle CH661/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.356 W/kg


GPRS1900/GPRS 1900 Body Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 10.678 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.424 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.131 W/kg

Maximum value of SAR (measured) = 0.348 W/kg

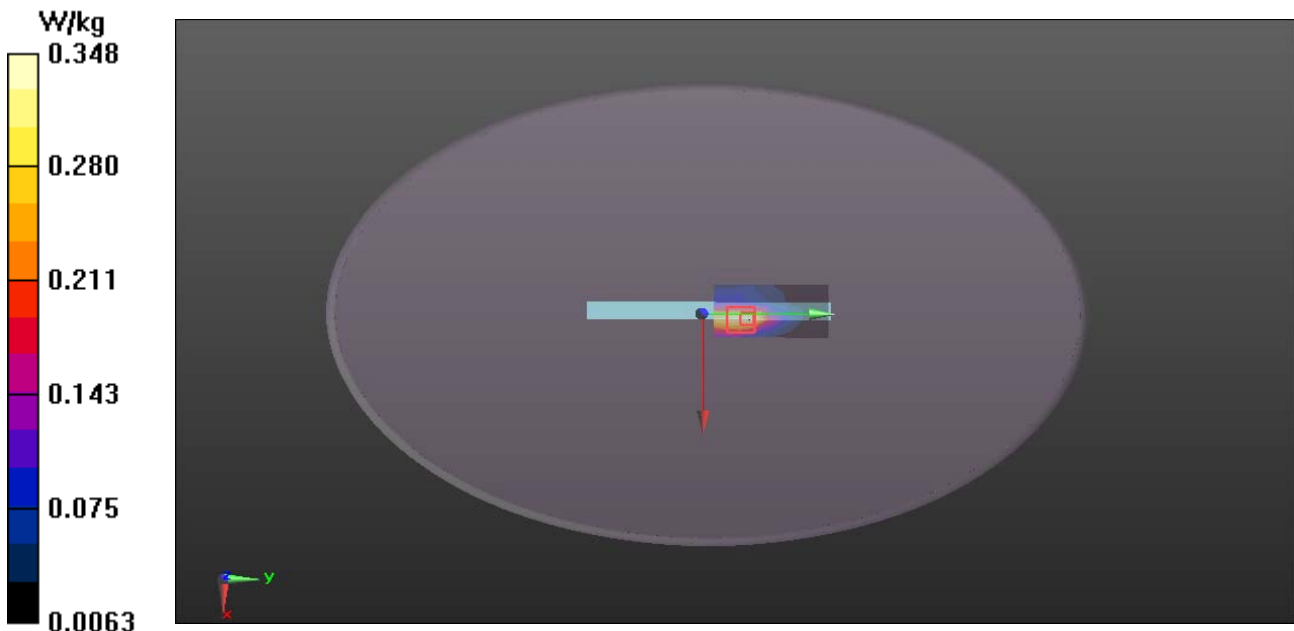

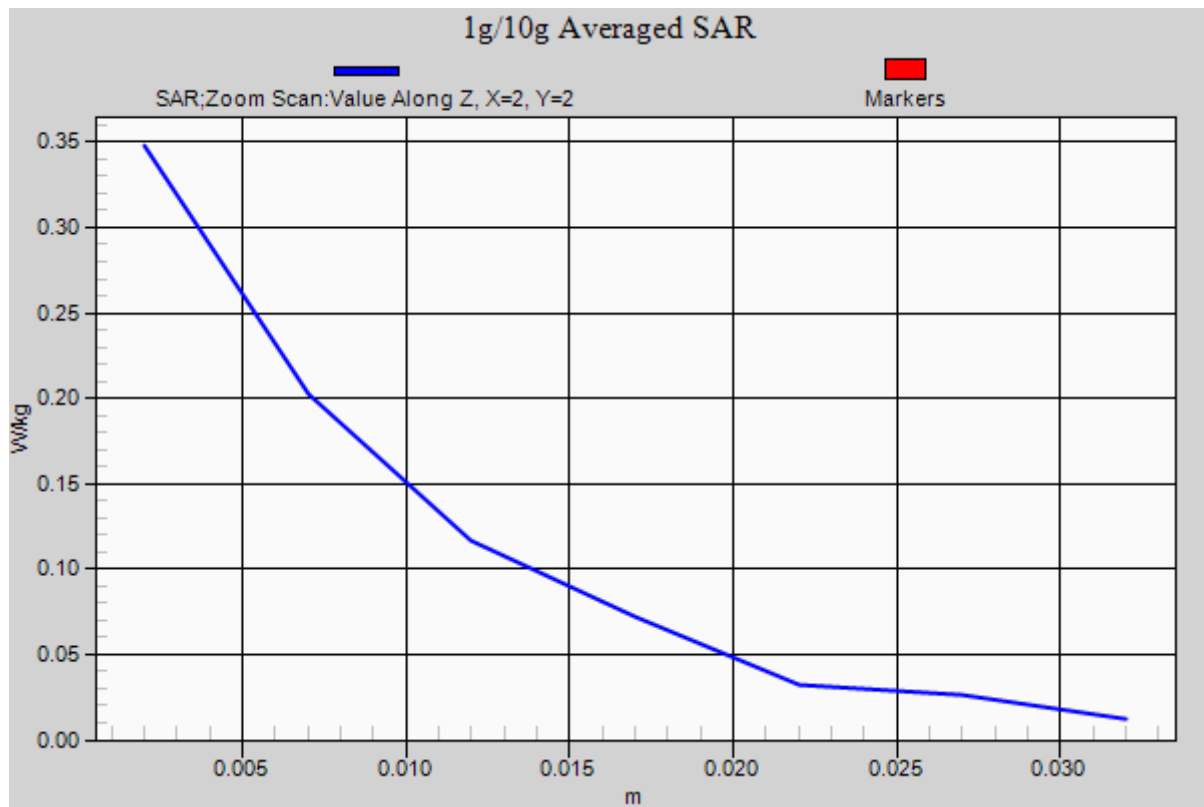



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

PCS1900-Body Down Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/ PCS1900 Body Down Middle CH661/Area Scan (6x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.262 W/kg

PCS1900/ PCS1900 Body Down Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.236 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.088 W/kg

Maximum value of SAR (measured) = 0.285 W/kg

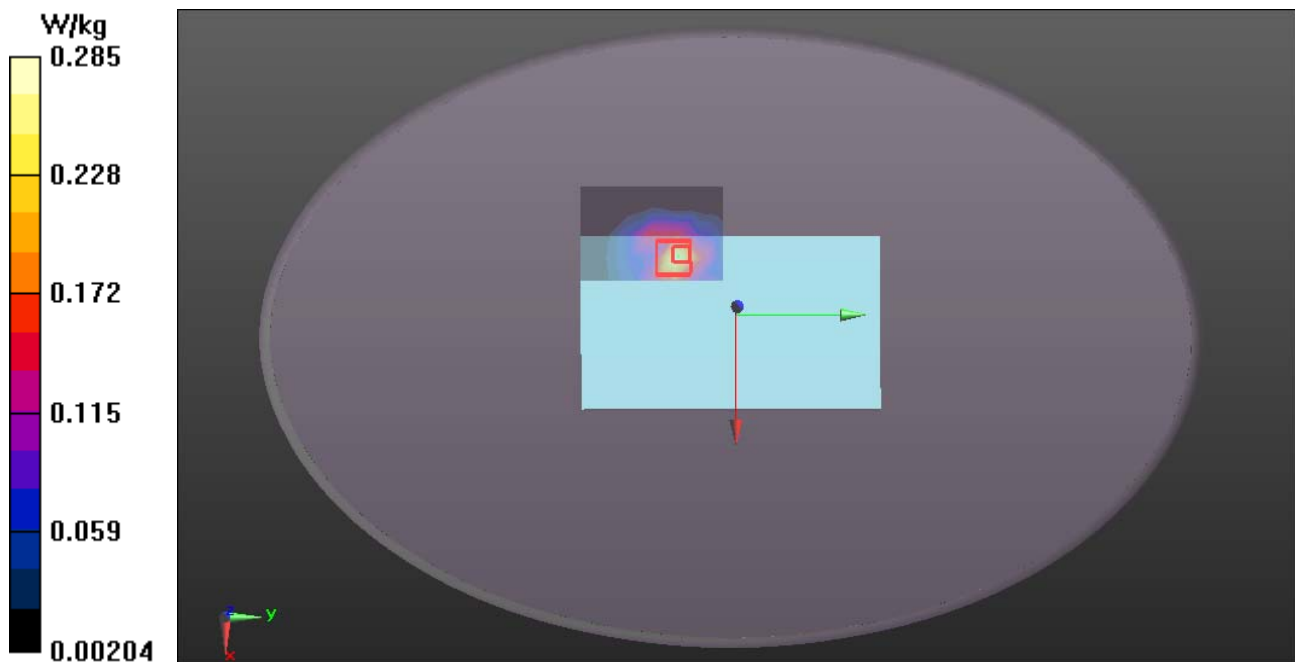



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

PCS1900-Body - Right Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

PCS1900/ PCS1900 Body Right Middle CH661/Area Scan (9x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.286 W/kg


PCS1900/ PCS1900 Body Right Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.617 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.160 W/kg

SAR(1 g) = 0.118 W/kg; SAR(10 g) = 0.080 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

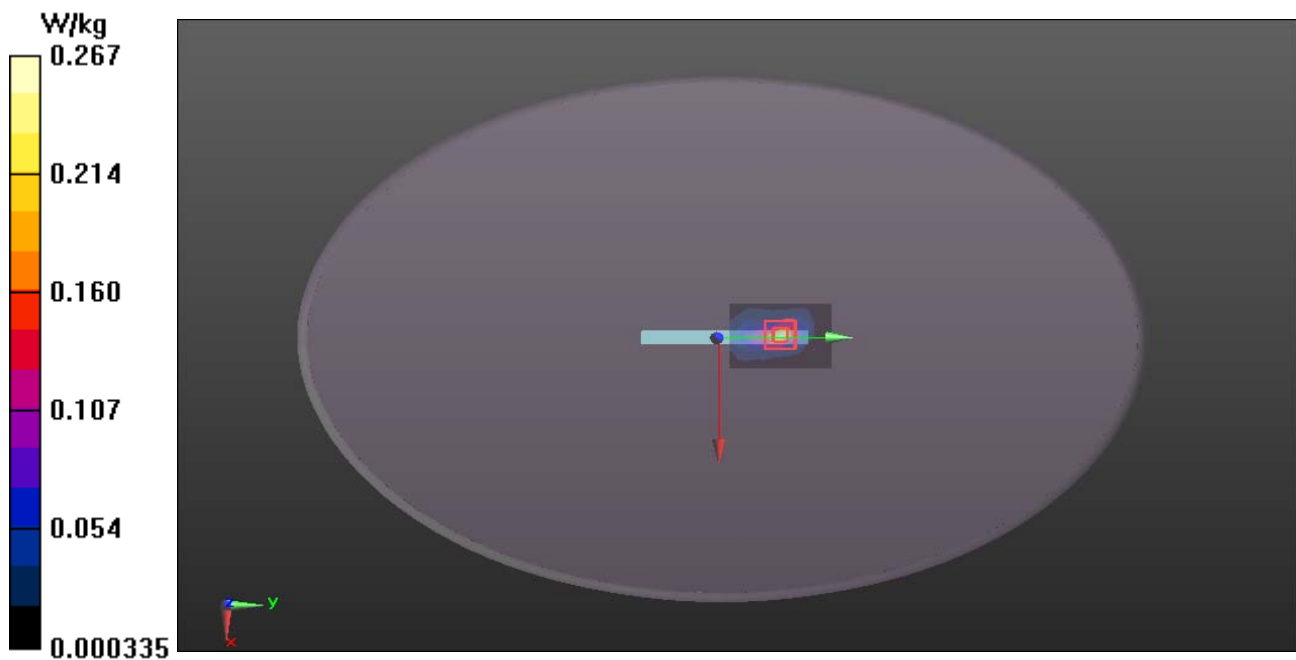



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

PCS1900-Body – Top Middle CH661

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: Generic GSM; Communication System Band: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:7.99834

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.534$ S/m; $\epsilon_r = 51.14$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(7.29, 7.29, 7.29); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

PCS1900/PCS 1900 Body Top Middle CH661/Area Scan (5x8x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.488 W/kg

PCS1900/PCS 1900 Body Top Middle CH661/Zoom Scan (5x5x7)/Cube 0: Measurement grid:


dx=8mm, dy=8mm, dz=5mm


Reference Value = 5.889 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.135 W/kg

Maximum value of SAR (measured) = 0.372 W/kg

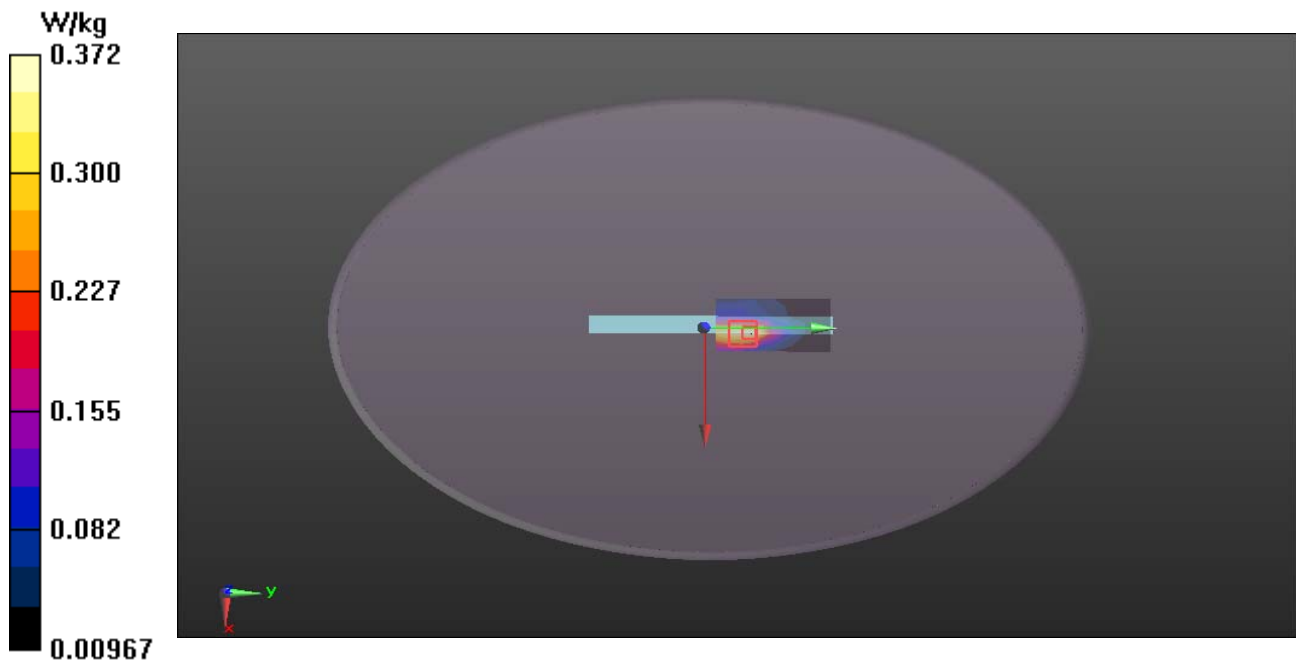

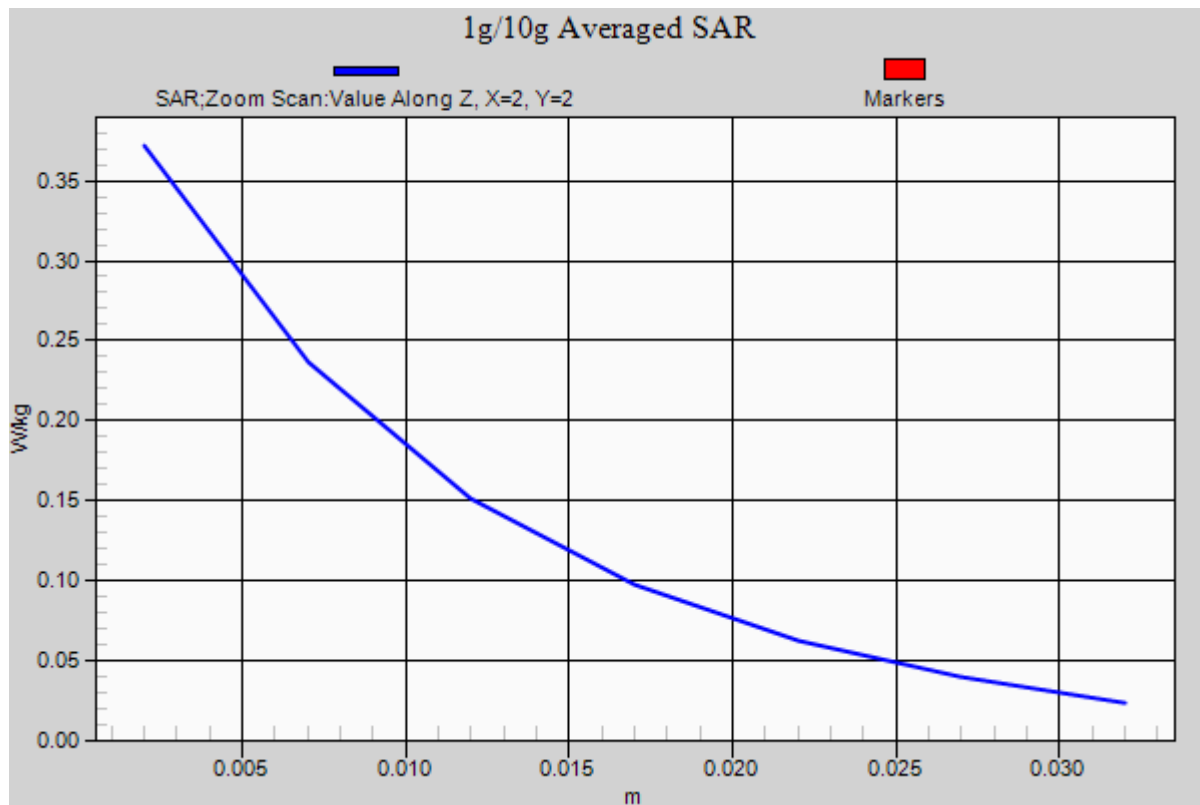



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

WCDMA Band II-Body Down Middle CH9400

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880.0$ MHz; $\sigma = 0.96$ S/m; $\epsilon_r = 55.858$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.12, 9.12, 9.12); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

WCDMA/WCDMA Band II Body Down Middle CH9400/Area Scan (6x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.295 W/kg

WCDMA/WCDMA Band II Body Down Middle CH9400/Zoom Scan (5x5x7)/Cube 0: Measurement


grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm


Reference Value = 16.922 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.395 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.122 W/kg

Maximum value of SAR (measured) = 0.286 W/kg

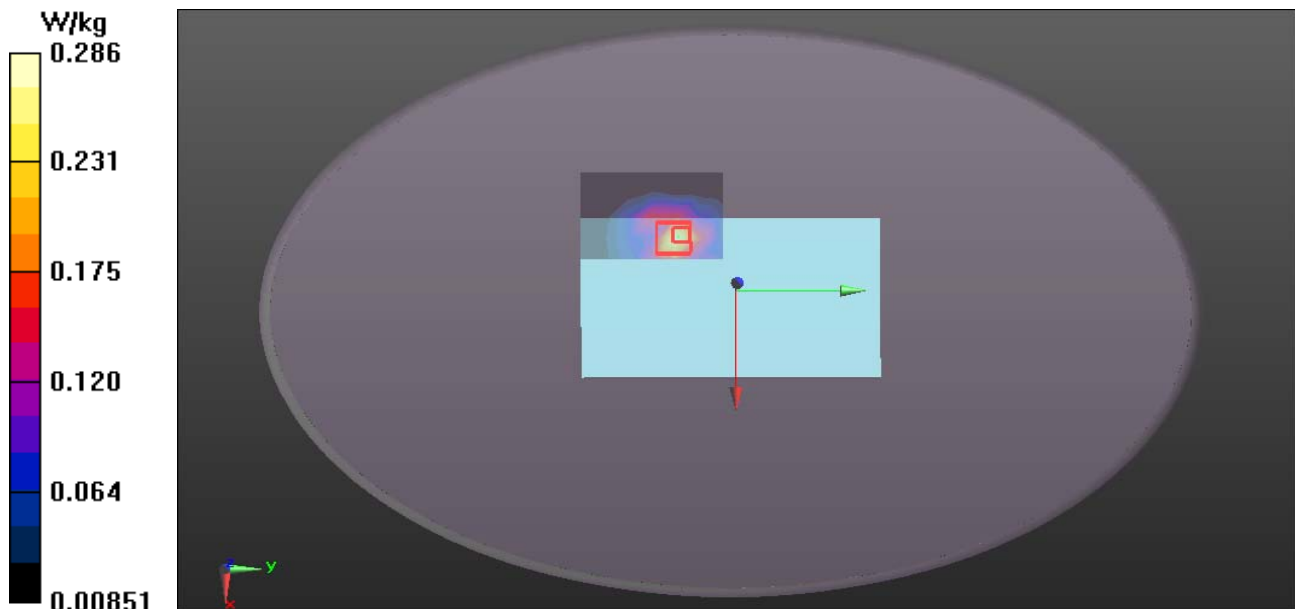

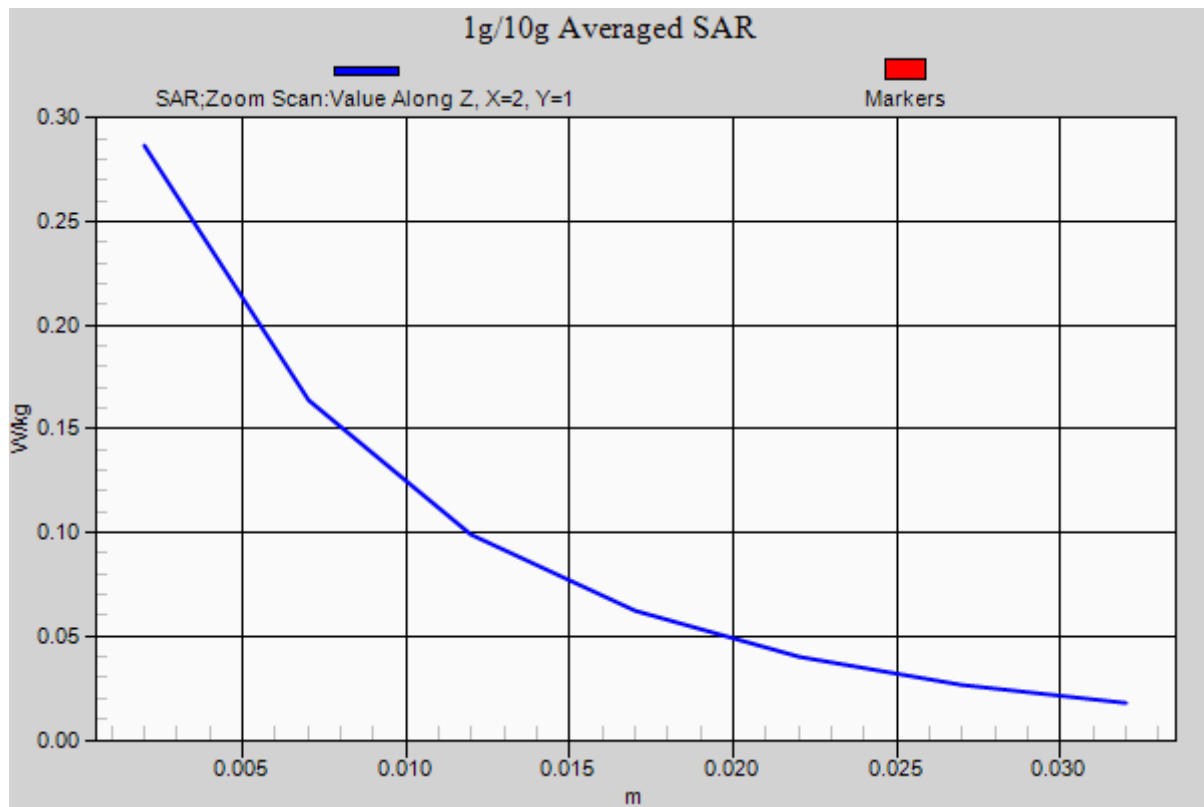



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

WCDMA Band II-Body - Right Middle CH9400

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880.0$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.723$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

WCDMA Band II/WCDMA Band II Body Right Middle CH9400/Area Scan (9x6x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.125 W/kg

WCDMA Band II/WCDMA Band II Body Right Middle CH9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.339 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 0.151 W/kg

SAR(1 g) = 0.104 W/kg; SAR(10 g) = 0.071 W/kg

Maximum value of SAR (measured) = 0.129 W/kg

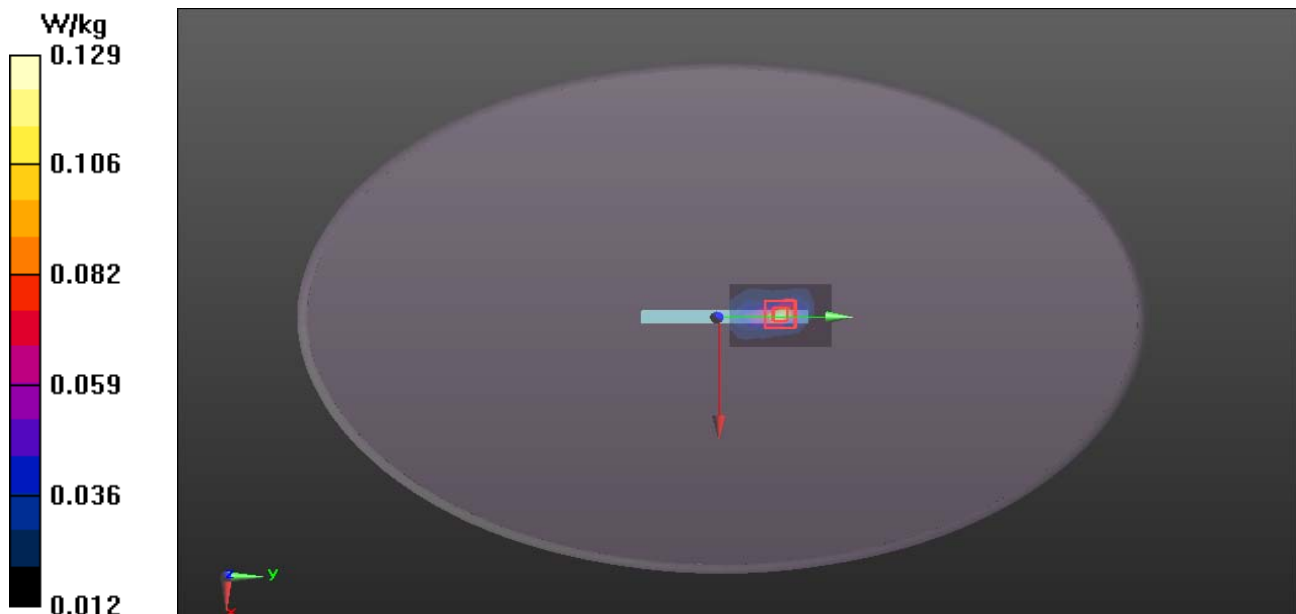



Test Laboratory: Compliance Certification Services Inc.

Date: 6/19/2013

WCDMA Band II-Body – Top Middle CH9400

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: FDD WCDMA; Communication System Band: Band II; Frequency: 1880.0 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880.0$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.723$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.8°C; Liquid Temperature: 21.8°C

Phantom section: Flat Section

Measurement Standard: DAS5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(9.03, 9.03, 9.03); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

WCDMA Band II/WCDMA Band II Body Top Middle CH9400/Area Scan (5x8x1): Measurement grid:

$dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.121 W/kg

WCDMA Band II/WCDMA Band II Body Top Middle CH9400/Zoom Scan (5x5x7)/Cube 0:


Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.665 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.153 W/kg

SAR(1 g) = 0.103 W/kg; SAR(10 g) = 0.065 W/kg

Maximum value of SAR (measured) = 0.127 W/kg

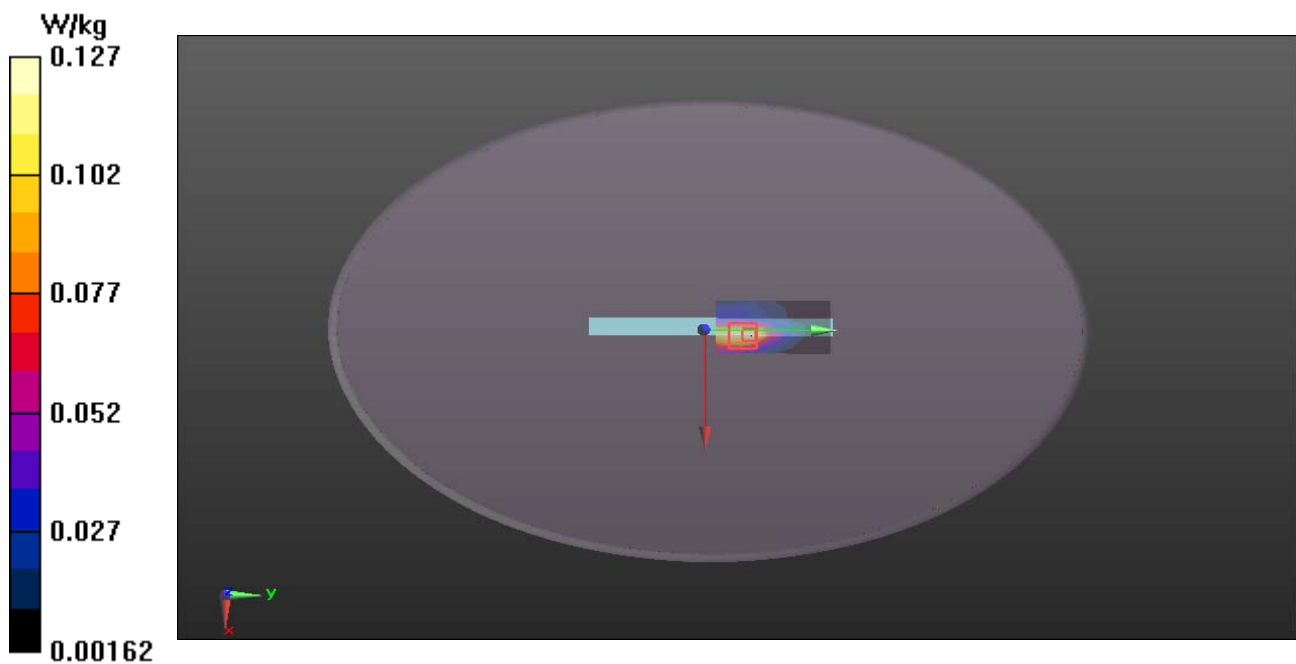



Test Laboratory: Compliance Certification Services Inc.

Date: 6/21/2013

IEEE 802.11b-Boby Down Middle CH6

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.6°C; Liquid Temperature: 21.6°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASY52 52.8.4(1052);

802.11b/802.11b Body Down Middle CH6/Area Scan (7x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.187 W/kg


802.11b/802.11b Body Down Middle CH6/Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 1.583 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.350 W/kg

SAR(1 g) = 0.168 W/kg; SAR(10 g) = 0.094 W/kg

Maximum value of SAR (measured) = 0.229 W/kg

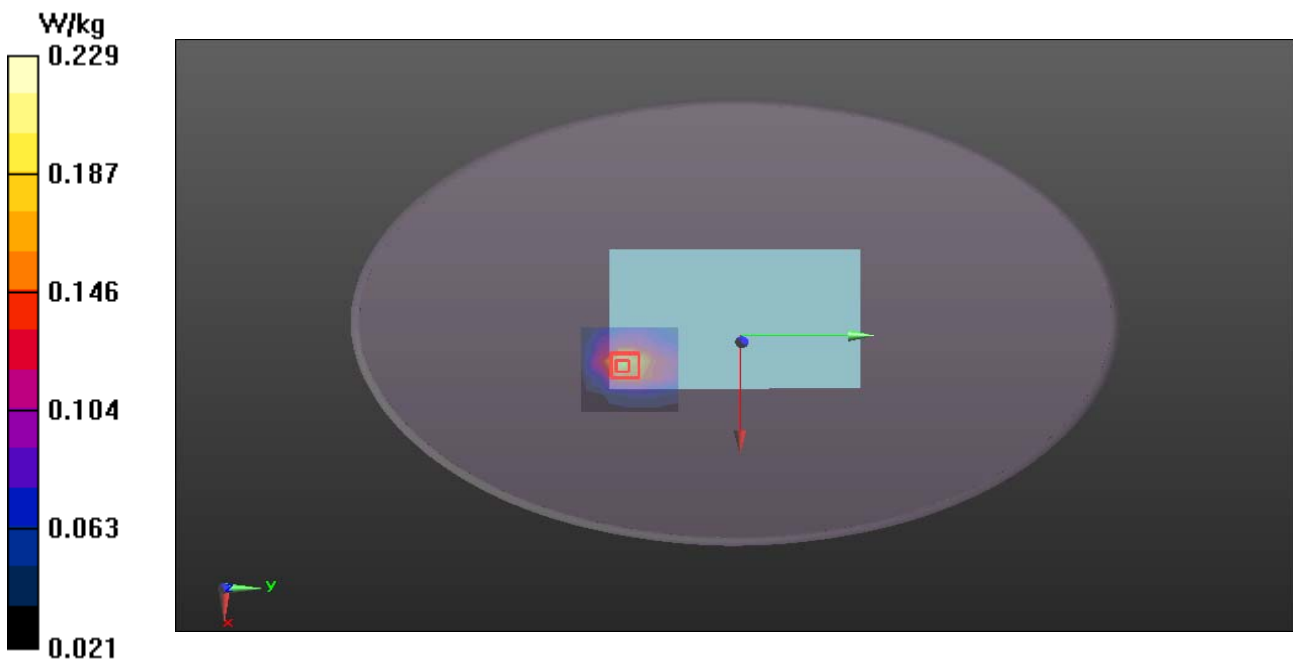

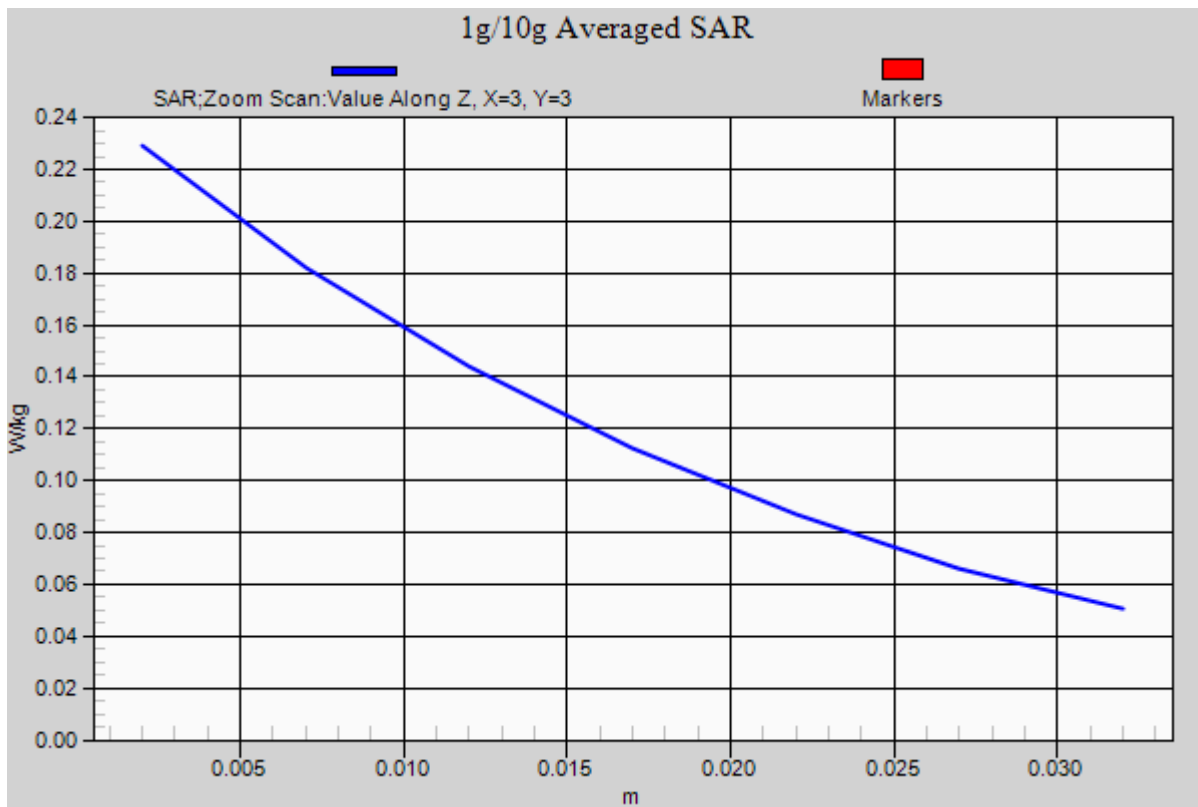



Test Laboratory: Compliance Certification Services Inc.

Date: 6/21/2013

IEEE 802.11b-Boby – Right Middle CH6

DUT: Tablet PC; Type: Destiny; Serial: 358836030010230

Communication System: IEEE 802.11b; Communication System Band: ISM 2.4GHz Band; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.883$ S/m; $\epsilon_r = 38.021$; $\rho = 1000$ kg/m³

Room Ambient Temperature: 22.6°C; Liquid Temperature: 21.6°C

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: EX3DV4 - SN3798; ConvF(6.87, 6.87, 6.87); Calibrated: 7/25/2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 7/20/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- DASYS 52.8.4(1052);

802.11b/802.11b Bobby Right Middle CH6/Area Scan (6x9x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.137 W/kg

802.11b/802.11b Bobby Right Middle CH6/Zoom Scan (8x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.785 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.081 W/kg

Maximum value of SAR (measured) = 0.161 W/kg

