

**FCC 47 CFR PART 15 SUBPART C****CERTIFICATION TEST REPORT***For***BOLT+ Power Pack****MODEL NUMBER: 920-0902-000****REPORT NUMBER: 4791216058-RF-1****ISSUE DATE: June 18, 2024****FCC ID: SXO-9200902***Prepared for***Sphero HK Limited****Unit 4307-08, Level 43, Tower 1 Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T.  
Hongkong***Prepared by***UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch****Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China****Tel: +86 769 22038881****Fax: +86 769 33244054****Website: [www.ul.com](http://www.ul.com)**

## Revision History

Rev.	Issue Date	Revisions	Revised By
V0	June 18, 2024	Initial Issue	

<b>Summary of Test Results</b>		
<b>Description of Test Item</b>	<b>Standard</b>	<b>Results</b>
Radiated Emission Test	FCC 15.209	PASS
20dB Bandwidth	FCC 15.215	PASS
AC Power Line Conducted Emission	FCC Part 15.207	PASS

Note 1: This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

Note 2: The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when < Simple Acceptance > decision rule is applied

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY.....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>7</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>7</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT .....</i>	<i>8</i>
5.2. <i>TEST MODE.....</i>	<i>8</i>
5.3. <i>ACCESSORY .....</i>	<i>9</i>
5.4. <i>MEASURING INSTRUMENT LIST.....</i>	<i>10</i>
<b>6. 20dB BANDWIDTH TEST .....</b>	<b>11</b>
<b>7. RADIATED EMISSION TEST .....</b>	<b>13</b>
7.1. <i>SPURIOUS EMISSIONS BELOW 30 MHz.....</i>	<i>17</i>
7.2. <i>SPURIOUS EMISSIONS 30 MHz ~ 1 GHz .....</i>	<i>20</i>
<b>8. AC POWER LINE CONDUCTED EMISSION .....</b>	<b>22</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Sphero HK Limited  
Address: Unit 4307-08, Level 43, Tower 1 Metroplaza, 223 Hing Fong Road, Kwai Fong, N.T.Hongkong

### Manufacturer Information

Company Name: Sphero, Inc.  
Address: 7121 B Shelby Ave, Dock 19 Greenville, TX, 75402 USA

### EUT Information

EUT Name: BOLT+ Power Pack  
Model: 920-0902-000  
Brand: Sphero  
Sample Received Date: April 15, 2024  
Sample Status: Normal  
Sample ID: 7147934  
Date of Tested: April 18, 2024 to June 18, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS


Prepared By:



Denny Huang

Senior Project Engineer

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

## 2. TEST METHODOLOGY

All tests were performed in accordance with the standard FCC CFR 47 Part 2, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 15, ANSI C63.10-2013.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4102.01)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA.</p> <p><b>FCC (FCC Designation No.: CN1187)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules</p> <p><b>ISED (Company No.: 21320)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046.</p> <p><b>VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202)</b> UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155</p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction Emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
DTS and 99% Occupied Bandwidth	±0.0196%

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

EUT Name	BOLT+ Power Pack	
Model	920-0902-000	
Product Description	Operation Frequency	111 kHz to 205 kHz
Rated Output Power	3 W	
Antenna type	Coil	
Ratings	DC 12 V, 5 A	

### 5.2. TEST MODE

Test Mode	Description
Mode 1	Charging with 3 W (1 % battery status of 15 pcs client device)
Mode 2	Charging with 3 W (50 % battery status of 15 pcs client device)
Mode 3	Charging with 3 W (99 % battery status of 15 pcs client device)

Note: All the modes had been tested, but only the worst data was recorded in the report.

### 5.3. ACCESSORY

#### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remark
1	BOLT+	Sphero	920-0600-000	/
2	BOLT+ Charging Cradle	Sphero	920-0710-000	/

Note: BOLT+ can monitor battery level through an app.

#### I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	DC	DC	Unshielded	0.8	/


#### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	AC/DC Adapter	/	SNB1205000P2	Input:AC 100 V ~ 240V, 50 ~ 60Hz, 1.5 A Output: DC 12 V, 5 A
2	AC/DC Adapter	Inno Vision	IN-PS-12006250	Input: 100-240 Vac, 50/60 Hz, 2.0 A (max.) Output: 12.0V --- 6.25A, 75.0W

#### TEST SETUP

The EUT support wireless charging.

#### SETUP DIAGRAM FOR TEST

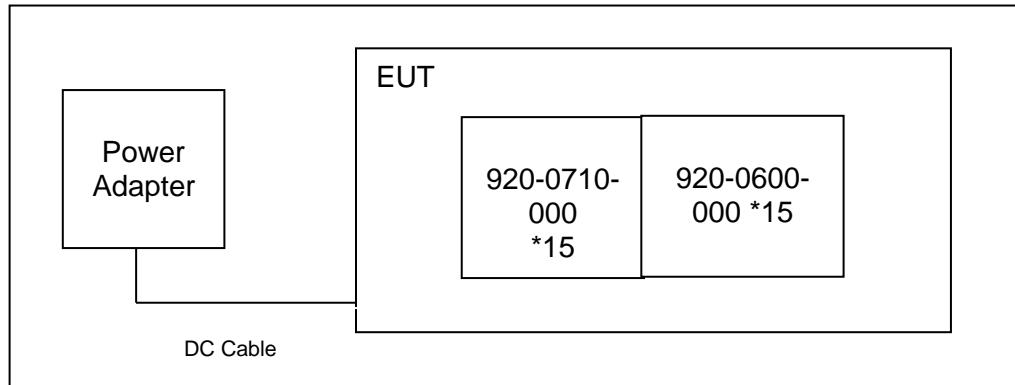

## 5.4. MEASURING INSTRUMENT LIST

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct. 12, 2023	Oct. 11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130960	Aug. 2, 2021	Aug. 1, 2024
Preamplifier	HP	8447D	2944A09099	Oct. 12, 2023	Oct. 11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec. 14, 2021	Dec. 13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-305-00067	Oct. 12, 2023	Oct. 11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument						
Used	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
<input checked="" type="checkbox"/>	Signal & Spectrum analyzer	R&S	FSW	1312.8000K26-103950-sj	Oct. 12, 2023	Oct. 11, 2024

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	101961	Oct. 13, 2023	Oct. 12, 2024
Two-Line V-Network	ROHDE & SCHWARZ	ENV216	101983	Oct. 13, 2023	Oct. 12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

## 6. 20dB BANDWIDTH TEST

### LIMITS

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.215, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.


### TEST PROCEDURE

Connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	1% to 5% of the bandwidth
VBW	approximately 3×RBW
Trace	Max hold
Sweep	Auto couple

Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 99%/20 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP

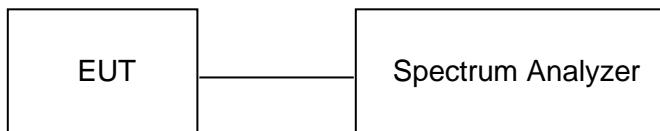


### TEST ENVIRONMENT

Temperature	23.5 °C	Relative Humidity	53 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

### RESULTS

Frequency (kHz)	99% occupied Bandwidth (kHz)	20dB Bandwidth (Hz)
138.8	50	52

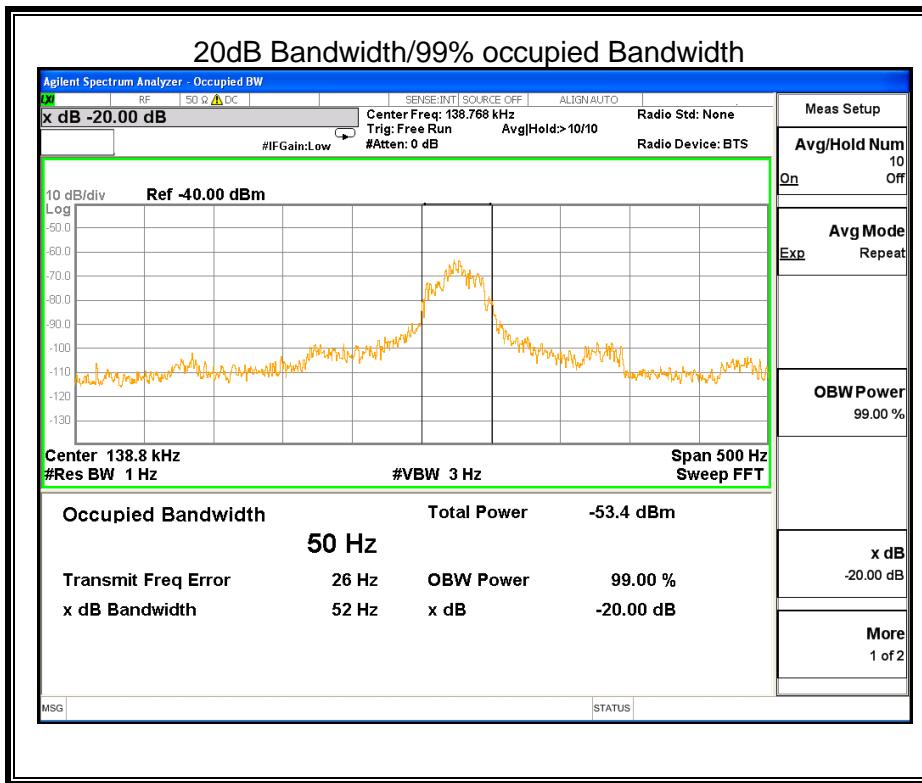

## 7. RADIATED EMISSION TEST

### LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.


Radiated emissions limits for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

## TEST SETUP AND PROCEDURE

Below 30 MHz

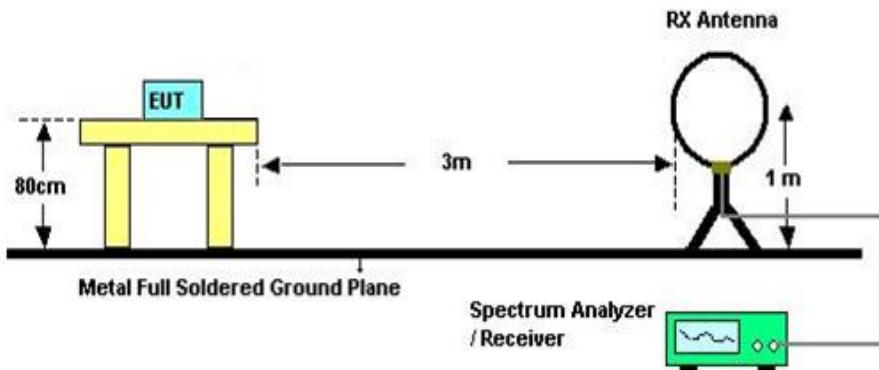


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz) / 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1.3 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30 m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.

Below 1 GHz and above 30 MHz

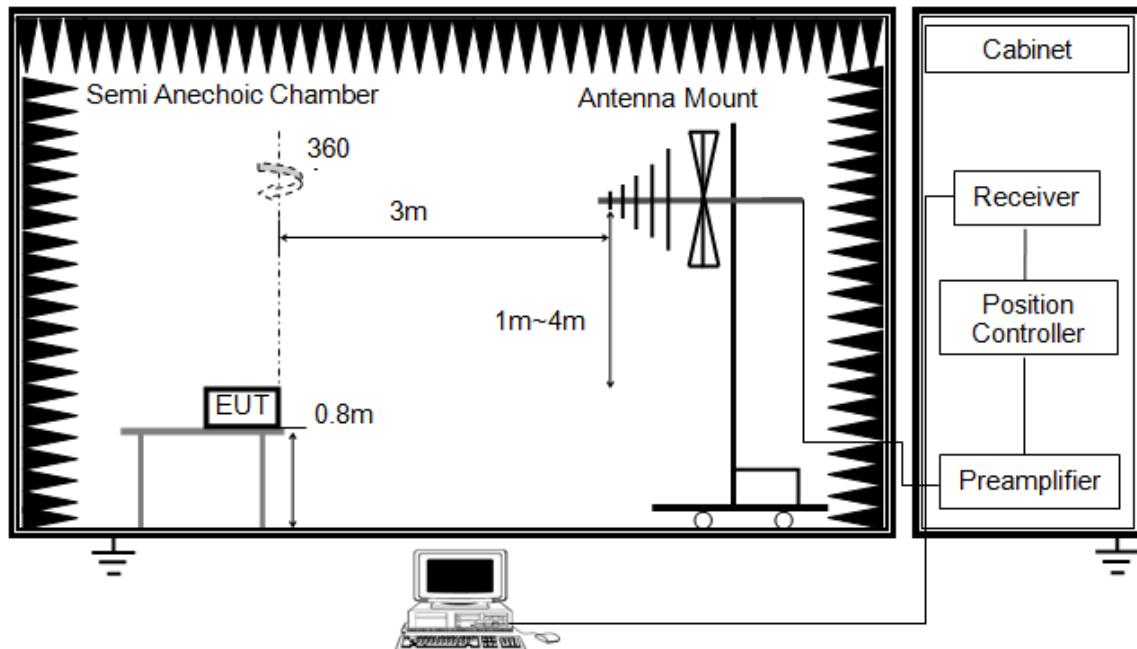

The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

**TEST ENVIRONMENT**


Temperature	21.4 °C	Relative Humidity	68 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**RESULTS**

## 7.1. SPURIOUS EMISSIONS BELOW 30 MHz


### FCC PART 15C BELOW 30MHz SPURIOUS EMISSIONS FOR PLAN A (LOOP ANTENNA FACE ON TO THE EUT)

9 kHz ~ 150 kHz

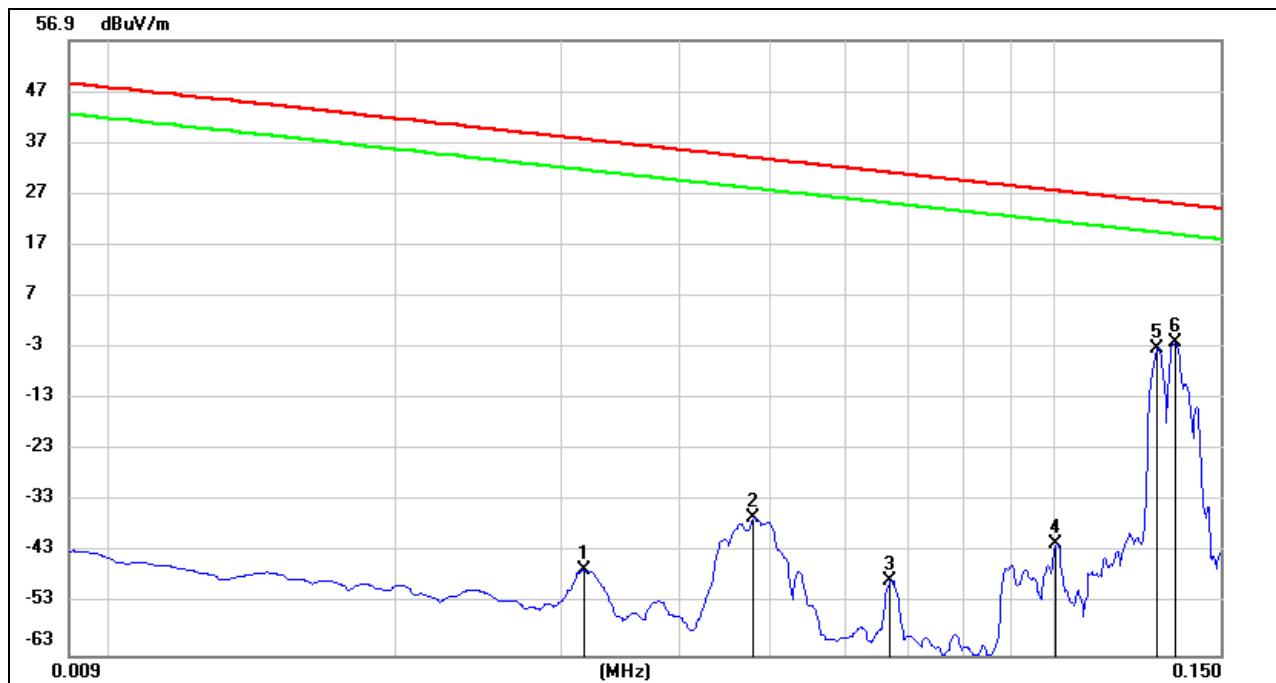

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0316	62.39	-108.82	-46.43	37.61	-84.04	peak
2	0.0480	72.62	-108.98	-36.36	33.97	-70.33	peak
3	0.0670	60.59	-109.00	-48.41	31.08	-79.49	peak
4	0.1005	67.52	-109.00	-41.48	27.56	-69.04	Fundamental
5	0.1287	105.88	-109.00	-3.12	25.42	-28.54	Fundamental
6	0.1343	107.10	-109.00	-1.90	25.04	-26.94	peak


Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result are deemed to comply with AV limit.  
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.  
 4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).

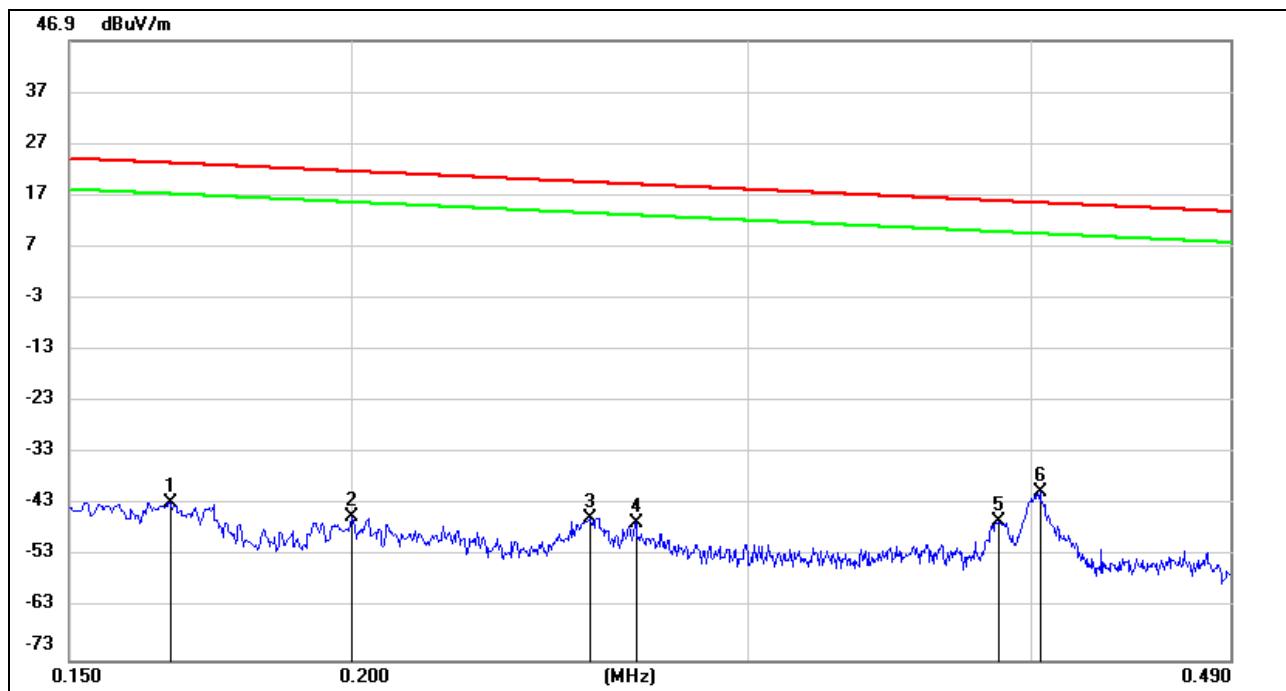150 kHz ~ 490 kHz


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1663	66.39	-109.00	-42.61	23.19	-65.80	peak
2	0.2000	63.68	-109.00	-45.32	21.58	-66.90	peak
3	0.2553	63.47	-109.00	-45.53	19.46	-64.99	peak
4	0.2676	62.38	-109.00	-46.62	19.05	-65.67	peak
5	0.3873	62.78	-108.98	-46.20	15.84	-62.04	peak
6	0.4035	68.28	-108.97	-40.69	15.48	-56.17	peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).

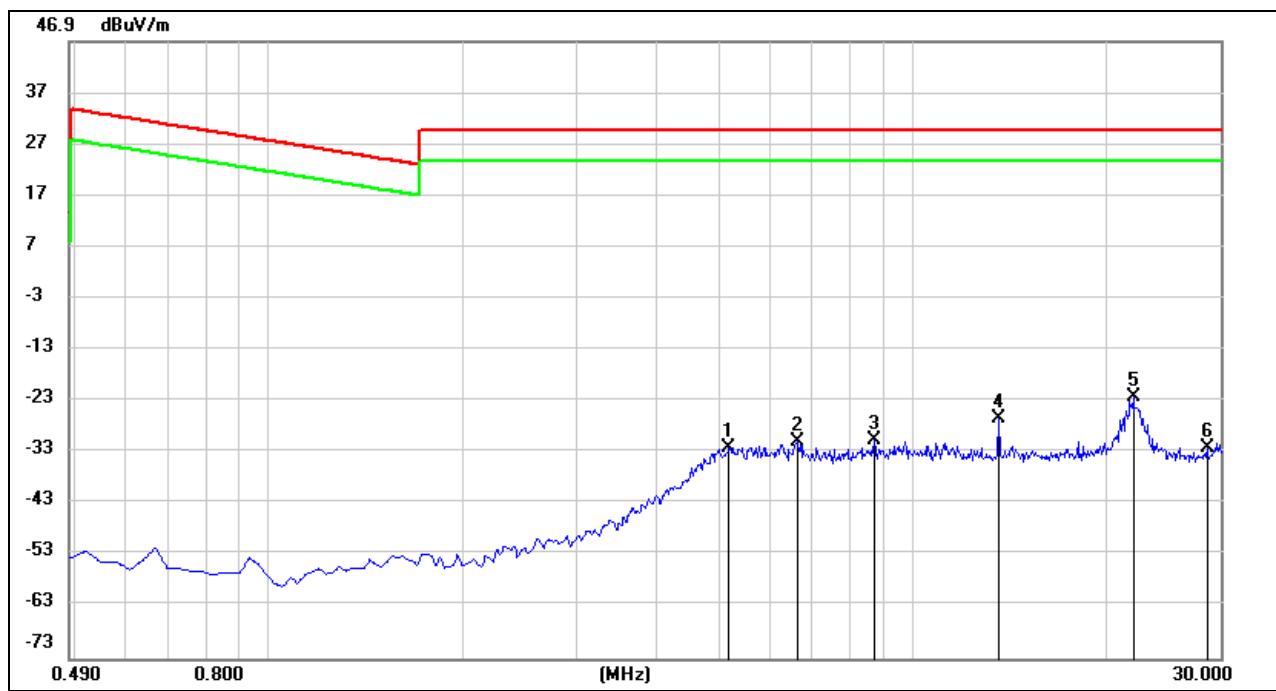
490 kHz ~ 30 MHz


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5.1820	36.32	-68.41	-32.09	29.54	-61.63	peak
2	6.6280	37.44	-68.49	-31.05	29.54	-60.59	peak
3	8.7232	37.66	-68.33	-30.67	29.54	-60.21	peak
4	13.5629	41.71	-68.16	-26.45	29.54	-55.99	peak
5	22.0026	45.51	-67.90	-22.39	29.54	-51.93	peak
6	28.5835	35.78	-67.83	-32.05	29.54	-61.59	peak

Note: 1. Measurement = Reading Level + Correct Factor.  
 2. If Peak Result complies with AV limit, AV Result are deemed to comply with AV limit.  
 3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.  
 4. The test was performed at 3 m test site, but we added the corresponding factor to extrapolated the result to the specified distance according to FCC 15.31(f)(2).


## 7.2. SPURIOUS EMISSIONS 30 MHz ~ 1 GHz

### FCC PART15C SPURIOUS EMISSIONS FOR PLAN A (HORIZONTAL)

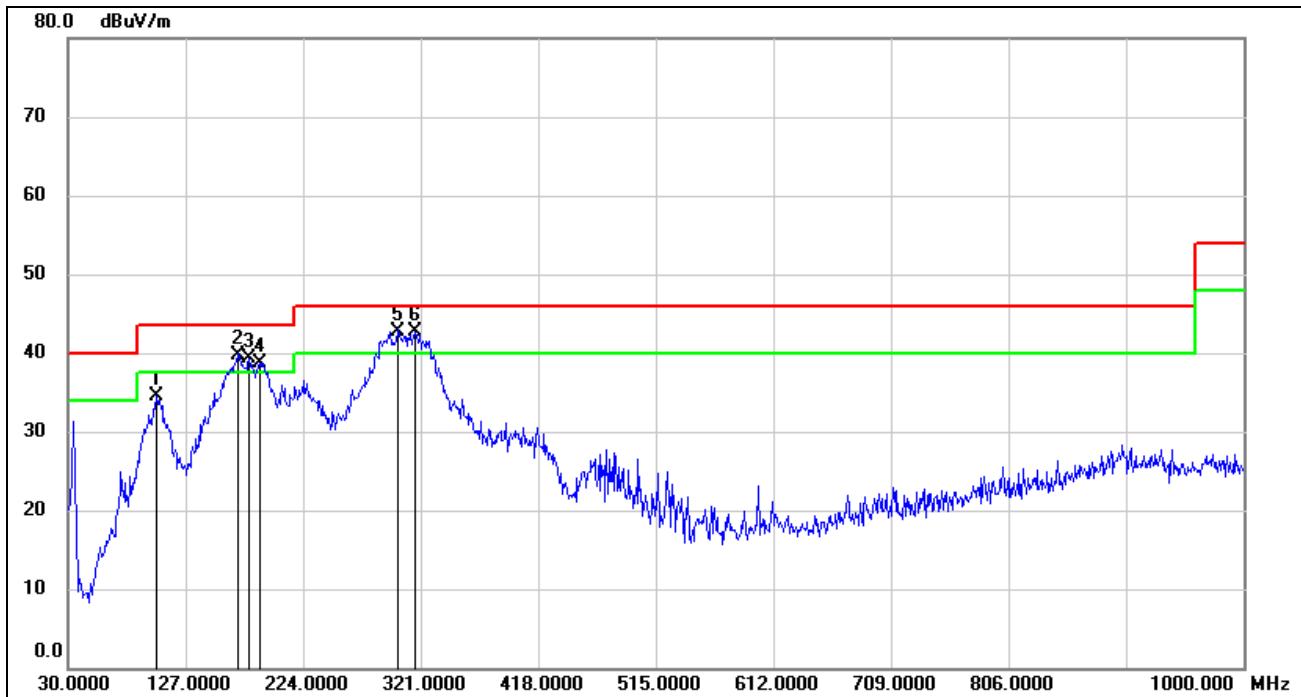

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	102.7500	50.77	-16.26	34.51	43.50	-8.99	QP
2	170.6500	52.01	-12.21	39.80	43.50	-3.70	QP
3	179.3800	51.15	-11.92	39.23	43.50	-4.27	QP
4	188.1100	50.97	-12.17	38.80	43.50	-4.70	QP
5	302.5700	54.39	-11.59	42.80	46.00	-3.20	QP
6	316.1500	53.64	-11.02	42.62	46.00	-3.38	QP

Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
 4. All the noise ared created from the digital circuit. It is not created by wireless charging circuit.

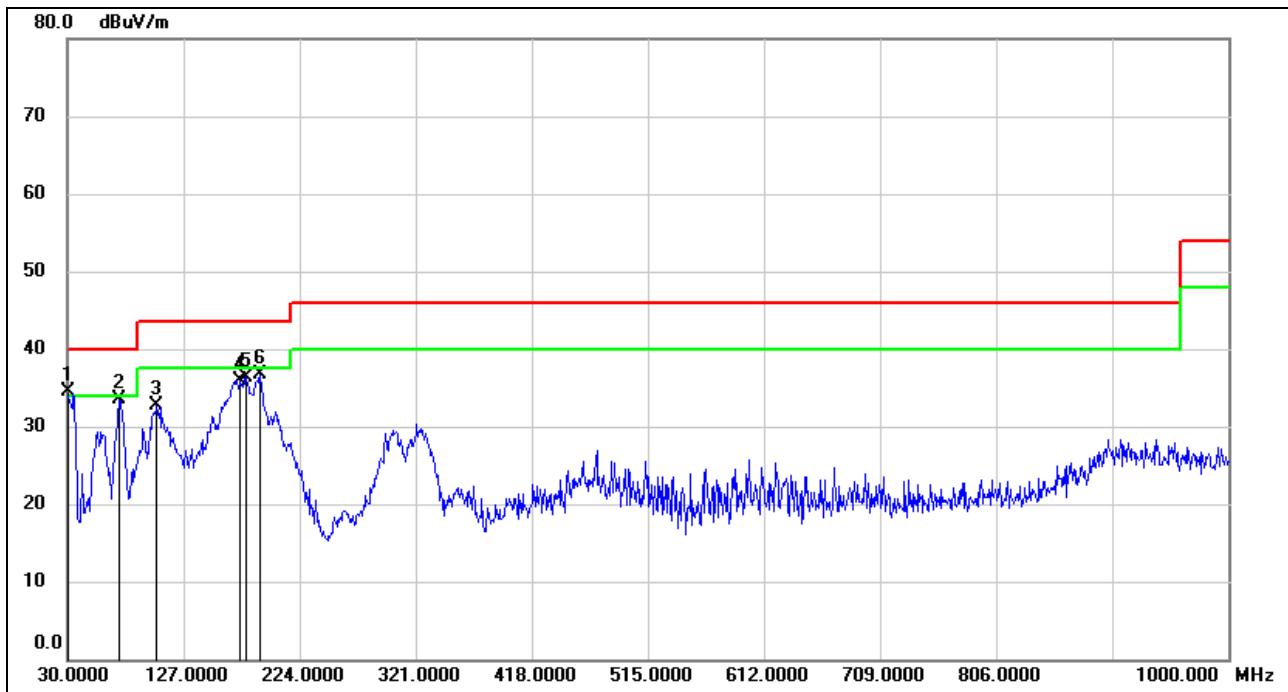**FCC PART15C SPURIOUS EMISSIONS FOR PLAN B (VERTICAL)**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	47.76	-13.34	34.42	40.00	-5.58	QP
2	72.6800	49.34	-15.78	33.56	40.00	-6.44	QP
3	104.6900	48.69	-16.07	32.62	43.50	-10.88	QP
4	174.5300	48.03	-12.08	35.95	43.50	-7.55	QP
5	179.3800	48.17	-11.92	36.25	43.50	-7.25	QP
6	191.0200	48.91	-12.21	36.70	43.50	-6.80	QP

Note: 1. Result Level = Read Level + Correct Factor.  
 2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
 3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto  
 4. All the noise ared created from the digital circuit. It is not created by wireless charging circuit.

## 8. AC POWER LINE CONDUCTED EMISSION

### LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST PROCEDURE


#### TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### TEST SETUP

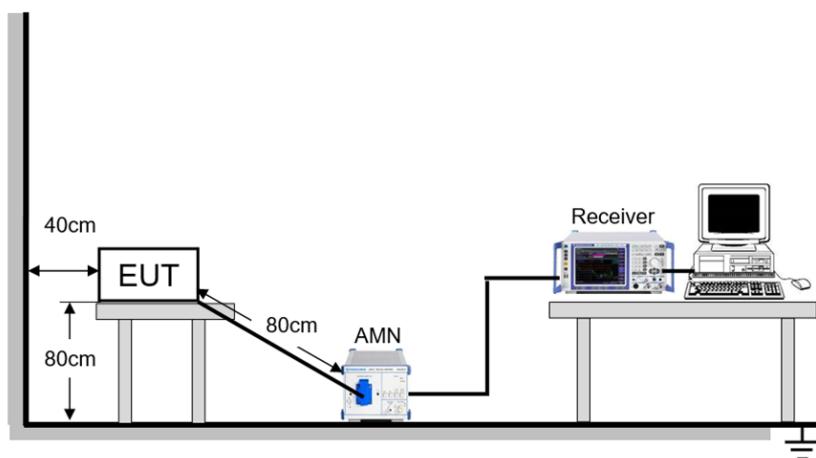


**TEST ENVIRONMENT**

Temperature	24.3 °C	Relative Humidity	54%
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V, 60 Hz

**TEST RESULTS**

Test Mode:	Mode 1	Test Voltage	AC 120 V/60 Hz
Line	L		

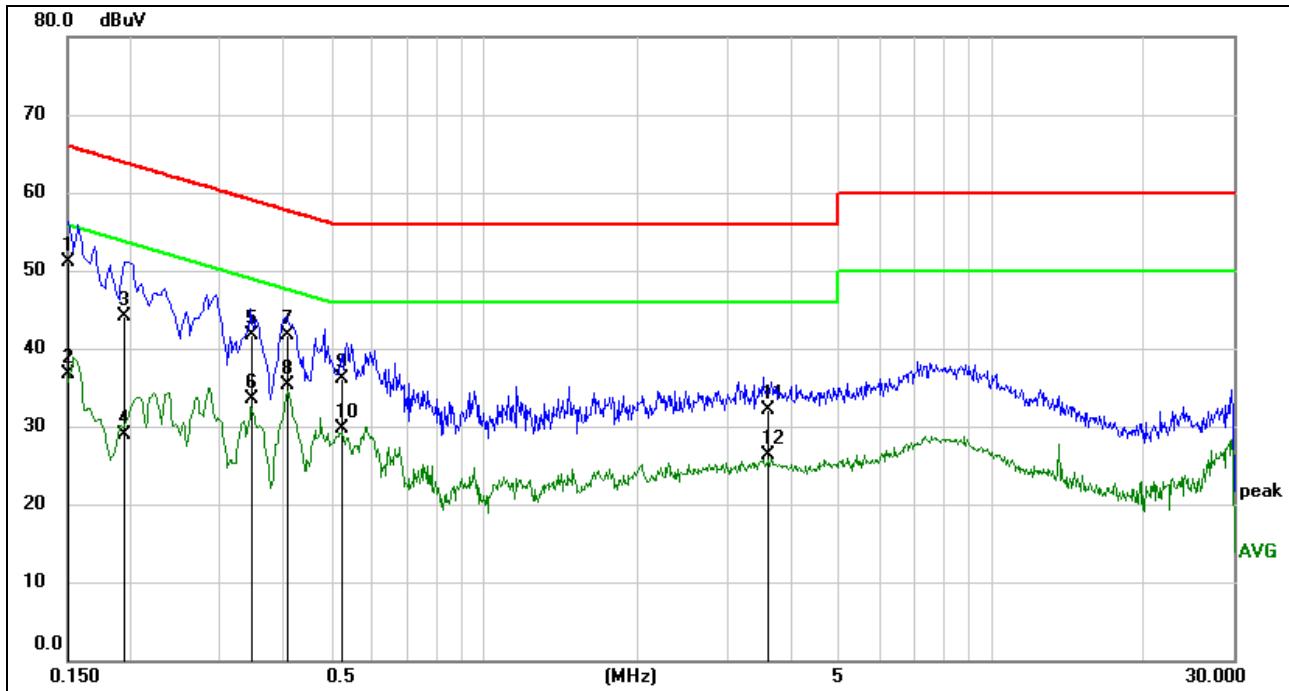


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1508	40.91	10.24	51.15	65.96	-14.81	QP
2	0.1508	26.48	10.24	36.72	55.96	-19.24	AVG
3	0.1937	33.86	10.15	44.01	63.88	-19.87	QP
4	0.1937	18.67	10.15	28.82	53.88	-25.06	AVG
5	0.3469	31.54	10.09	41.63	59.04	-17.41	QP
6	0.3469	23.32	10.09	33.41	49.04	-15.63	AVG
7	0.4091	31.70	10.07	41.77	57.67	-15.90	QP
8	0.4091	25.24	10.07	35.31	47.67	-12.36	AVG
9	0.5212	26.05	10.04	36.09	56.00	-19.91	QP
10	0.5212	19.65	10.04	29.69	46.00	-16.31	AVG
11	3.6073	21.79	10.27	32.06	56.00	-23.94	QP
12	3.6073	16.01	10.27	26.28	46.00	-19.72	AVG

**Note:**

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Test Mode:	Mode 1	Test Voltage	AC 120 V/60 Hz
Line	N		

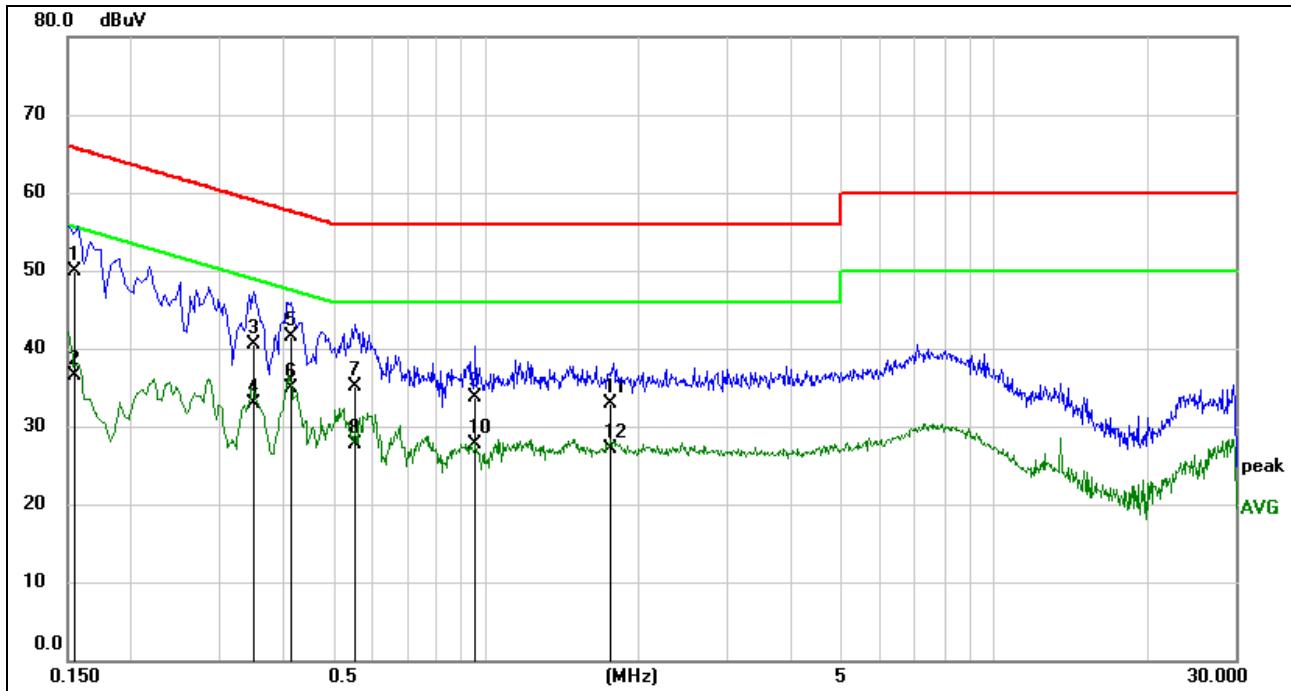

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1546	39.70	10.23	49.93	65.75	-15.82	QP
2	0.1546	26.35	10.23	36.58	55.75	-19.17	AVG
3	0.3501	30.38	10.09	40.47	58.96	-18.49	QP
4	0.3501	22.84	10.09	32.93	48.96	-16.03	AVG
5	0.4115	31.35	10.07	41.42	57.62	-16.20	QP
6	0.4115	24.91	10.07	34.98	47.62	-12.64	AVG
7	0.5516	25.16	10.04	35.20	56.00	-20.80	QP
8	0.5516	17.75	10.04	27.79	46.00	-18.21	AVG
9	0.9515	23.83	9.86	33.69	56.00	-22.31	QP
10	0.9515	17.83	9.86	27.69	46.00	-18.31	AVG
11	1.7653	22.82	9.99	32.81	56.00	-23.19	QP
12	1.7653	17.16	9.99	27.15	46.00	-18.85	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

## END OF REPORT