

**TEST REPORT****Report Number: 17031690HKG-002**

Application  
for  
Class II Permissive Change of 47 CFR Part 15 Certification

Spider-Man Interactive App-Enabled Super Hero

**FCC ID: SXO-SP001**

This report contains the data of WLAN (WiFi) portion only.

Prepared and Checked by:

***Signed On File***

Yao Xin Lu, Josie  
Engineer

Approved by:

---

Koo Wai Ip  
Technical Supervisor  
April 27, 2017

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

**Intertek Testing Services Hong Kong Ltd.**

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.  
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: [www.hk.intertek-etssemko.com](http://www.hk.intertek-etssemko.com)

## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

<b>Applicant Name:</b>	Sphero HK Limited
<b>Applicant Address:</b>	4/F., 299 QRC, 287-299, Queen's Road Central, Sheung Wan, Hong Kong.
<b>Manufacturer Name:</b>	Sphero, Inc.
<b>Manufacturer Address:</b>	4772 Walnut Street, Suite 206, Boulder, CO 80301, USA
<b>FCC Specification Standard:</b>	FCC Part 15, October 1, 2015 Edition
<b>FCC ID:</b>	SXO-SP001
<b>FCC Model(s):</b>	SP001
<b>Type of EUT:</b>	Spread Spectrum Transmitter
<b>Description of EUT:</b>	Spider-Man Interactive App-Enabled Super Hero
<b>Serial Number:</b>	N/A
<b>Sample Receipt Date:</b>	March 29, 2017
<b>Date of Test:</b>	March 29, 2017 to April 22, 2017
<b>Report Date:</b>	April 27, 2017
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

# INTERTEK TESTING SERVICES

---

## Table of Contents

1.0 Test Results Summary & Statement of Compliance.....	4
1.1 Summary of Test Results .....	4
1.2 Statement of Compliance .....	4
2.0 General Description.....	6
2.1 Product Description .....	6
2.2 Test Methodology.....	7
2.3 Test Facility .....	7
2.3 Purpose of Change .....	7
3.0 System Test Configuration .....	9
3.1 Justification .....	9
3.2 EUT Exercising Software.....	10
3.3 Details of EUT and Description of Accessories .....	11
3.4 Measurement Uncertainty .....	11
4.0 Test Results .....	13
4.1 Out of Band Conducted Emissions .....	13
4.2 Field Strength Calculation.....	30
4.3 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions.....	31
4.3.1 Radiated Emission Configuration Photograph.....	31
4.3.2 Radiated Emission Data .....	31
4.3.3 Radiated Emission Test Setup.....	45
4.3.4 Transmitter Duty Cycle Calculation .....	46
4.4 AC Power Line Conducted Emission .....	47
4.4.1 AC Power Line Conducted Emission Configuration Photograph.....	47
4.4.2 AC Power Line Conducted Emission Data .....	47
4.4.3 Conducted Emission Test Setup.....	50
5.0 Equipment List.....	52

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 1**  
**TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

# INTERTEK TESTING SERVICES

---

## 1.0 Test Results Summary & Statement of Compliance

### 1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details see section
Antenna Requirement	15.203	Pass	2.1
Out of Band Antenna Conducted Emission	15.247(d)	Pass	4.1
Radiated Emission in Restricted Bands and Spurious Emissions	15.247(d), 15.209	Pass	4.3
AC Power Line Conducted Emission	15.207	Pass	4.4

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2015 Edition

## **INTERTEK TESTING SERVICES**

---

### **EXHIBIT 2**

### **GENERAL DESCRIPTION**

## INTERTEK TESTING SERVICES

---

### 2.0 General Description

#### 2.1 Product Description

The Equipment-Under-Test (EUT) is a Wireless Spiderman toy. The EUT contains both WLAN (WiFi) and Bluetooth (Bluetooth 4.0) modules. It has sound and light during normal play. An iOS/Android app installed in Smartphone can connect with the EUT via Bluetooth and WiFi. The EUT is powered by a 3.7VDC rechargeable battery and be charged by the computer with a USB charging cable.

##### For the WLAN (WiFi) module:

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels. For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps. For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps. For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

##### For Bluetooth module:

For Bluetooth 4.0 BLE mode, it occupies a frequency range from 2402MHz to 2480MHz (40 channels with channel spacing of 2MHz). It transmits via GFSK modulation.

The antenna(s) used in the EUT is integral, and the test sample is a prototype.

The circuit description is saved with filename: descri.pdf.

## INTERTEK TESTING SERVICES

---

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). Preliminary radiated scans and all radiated measurements were performed in radiated emission test sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to ANSI C63.10 (2013) and KDB Publication No.558074 D01 v03r05 (08-April-2016) All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The radiated emission test site and antenna port conducted measurement facility used to collect the radiated data and conductive data are at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

### 2.4 Purpose of Change

The purpose of change is saved with filename: product change.pdf

---

## INTERTEK TESTING SERVICES

---

### EXHIBIT 3

#### SYSTEM TEST CONFIGURATION

## INTERTEK TESTING SERVICES

---

### 3.0 System Test Configuration

#### 3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The device was powered by new 3.7V rechargeable battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.209. Digital circuitries used to control additional functions other than the operation of the transmitter are subject to FCC Part 15 Section 15.109 Limits.

RF module and antenna is the same with original granted model. Therefore tests of Min. 6dB RF Bandwidth and Power Spectral Density are skipped.

## INTERTEK TESTING SERVICES

---

### 3.1 Justification – Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to Exhibit 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

The EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT power cord connected to one LISN (Line impedance stabilization network), which provided 50ohm coupling impedance for measuring instrument. Meanwhile, the peripheral or support equipment power cords connected to a separate LISN. The ac powers for all LISNs were obtained from the same power source. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Different data rates have been tested. Worst case is reported only.

All relevant operation modes have been tested, and the worst case data is included in this report.

All data rates were tested under normal mode of WiFi. Only the worst-case data is shown in the report for DSSS and OFDM.

For simultaneous transmission, both WiFi and Bluetooth portions are also switched on when taking radiated emission for determining worst-case spurious emission.

### 3.2 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

(1) The EUT is powered by new 3.7V rechargeable battery.

#### Description of Accessories:

- (1) 1 X USB charging cable of 1.0m in length (Supplied by Client)
- (2) 1 X charging stand (Supplied by Client)
- (2) Notebook (HP Probook 430) (Provided by Intertek)
- (3) iPod Touch (Provided by Client)

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are  $\pm 5.3\text{dB}$  and  $\pm 0.99\text{dB}$  respectively. The value of the Measurement uncertainty for conducted emission test is  $\pm 4.2\text{dB}$ .

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

---

## INTERTEK TESTING SERVICES

---

### EXHIBIT 4 TEST RESULTS

## INTERTEK TESTING SERVICES

---

### 4.0 Test Results

#### 4.1 Out of Band Conducted Emissions

For 802.11b/g/n20MHz/N40MHz, the maximum conducted (peak) output power was used to demonstrate compliance as described in 9.1. Then the display line (in red) shown in the following plots denotes the limit at 20dB below maximum measured in-band peak PSD level in 100 KHz bandwidth.

The measurement procedures under sections 11 of KDB558074 D01 v05r03 (08-April-2016) were used.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

#### Limits:


All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB for 802.11b,g,n20MHz,n40MHz below the maximum measured in-band peak PSD level.

The plots of reference level measurement and out of band conducted emissions are as below.


# INTERTEK TESTING SERVICES

## Plots of bandedge

802.11b, Lowest channel

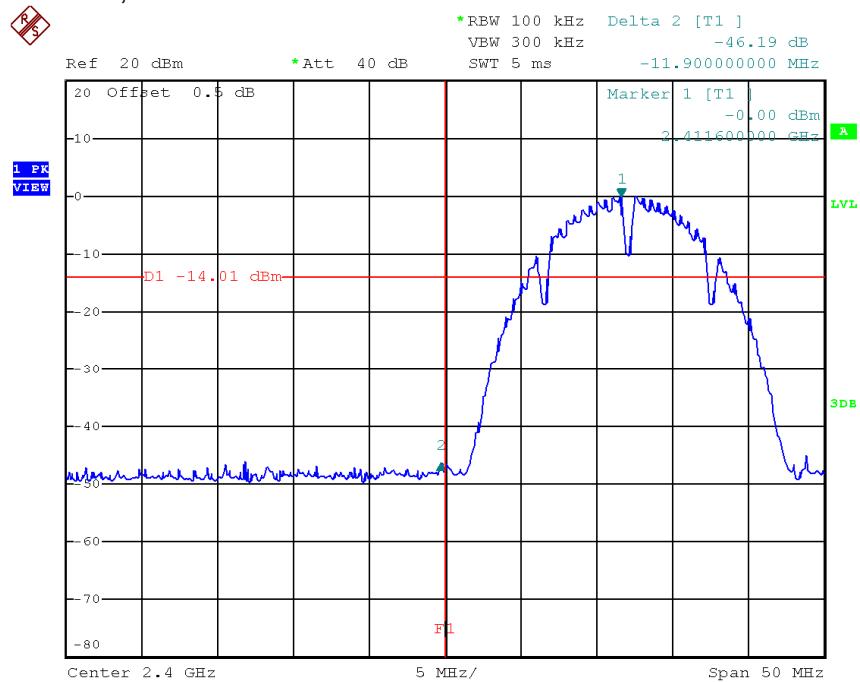


802.11b, Highest channel

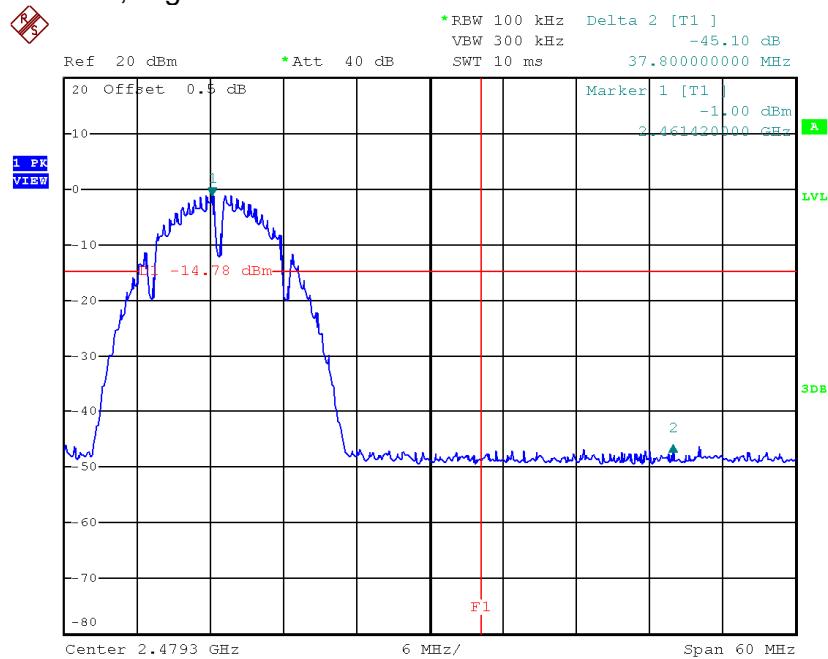


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11b, Lowest Channel, Plot A

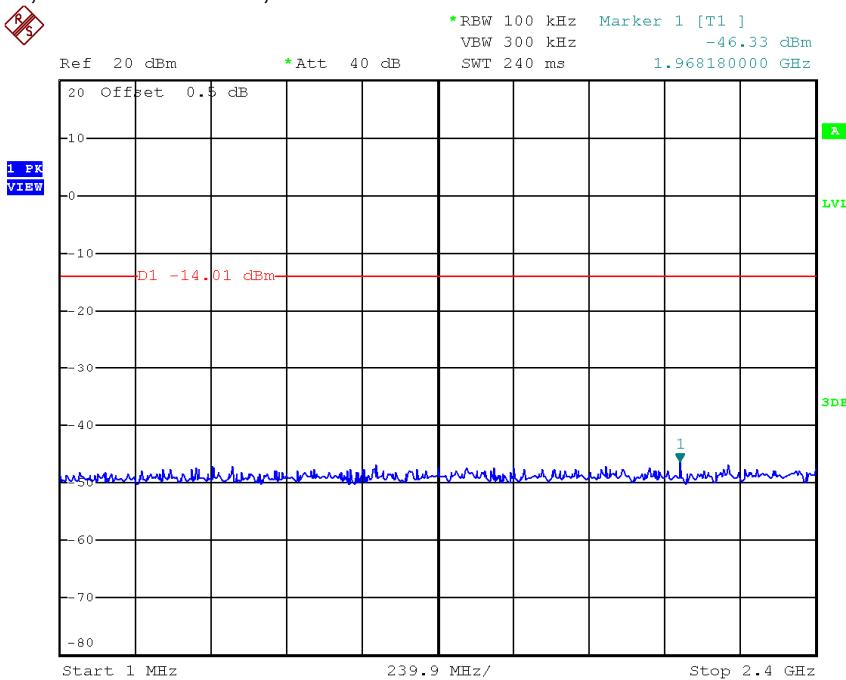


802.11b, Lowest Channel, Plot B

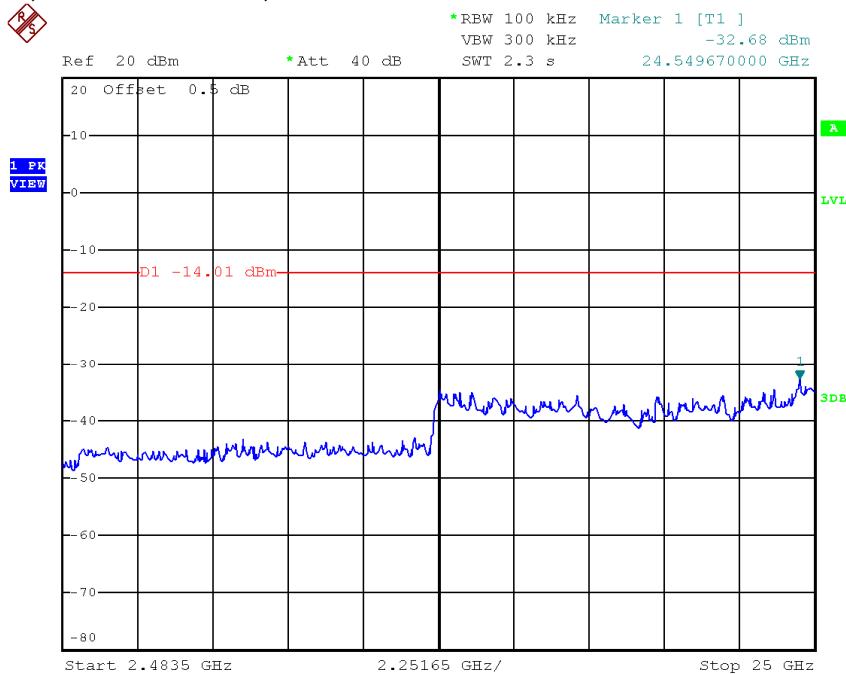


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11b, Middle Channel, Plot A

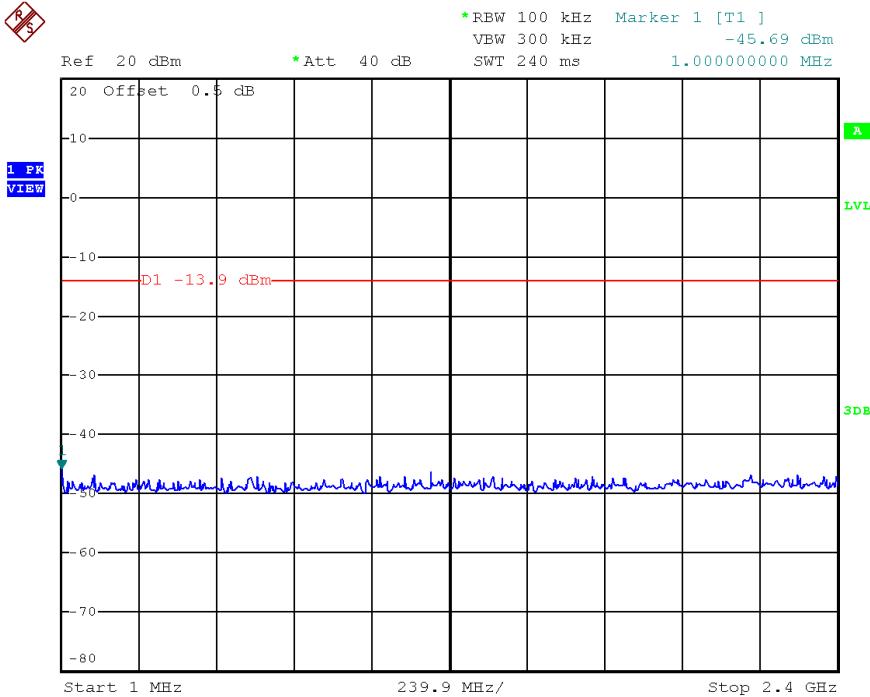


802.11b, Middle Channel, Plot B

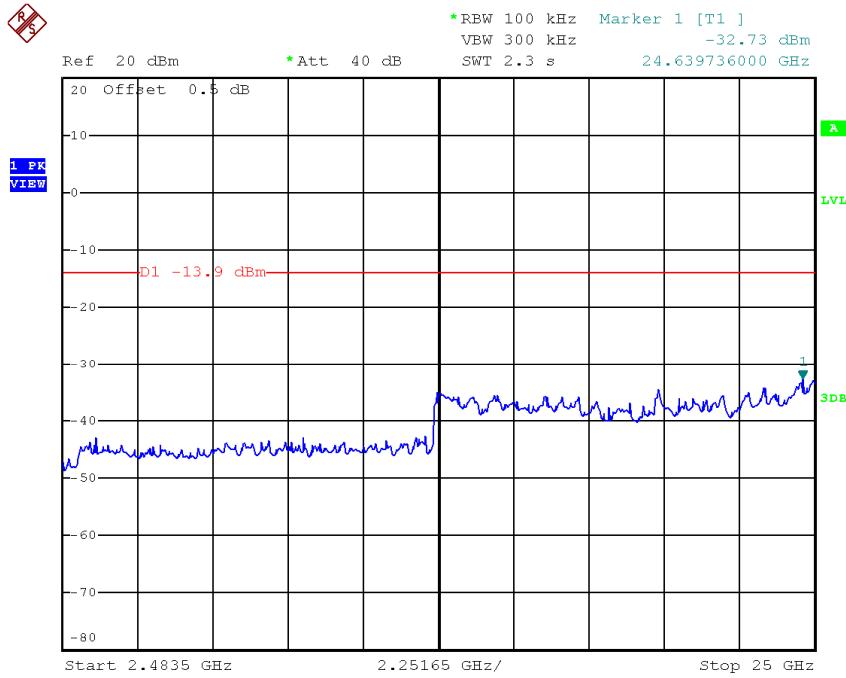


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11b, Highest Channel, Plot A

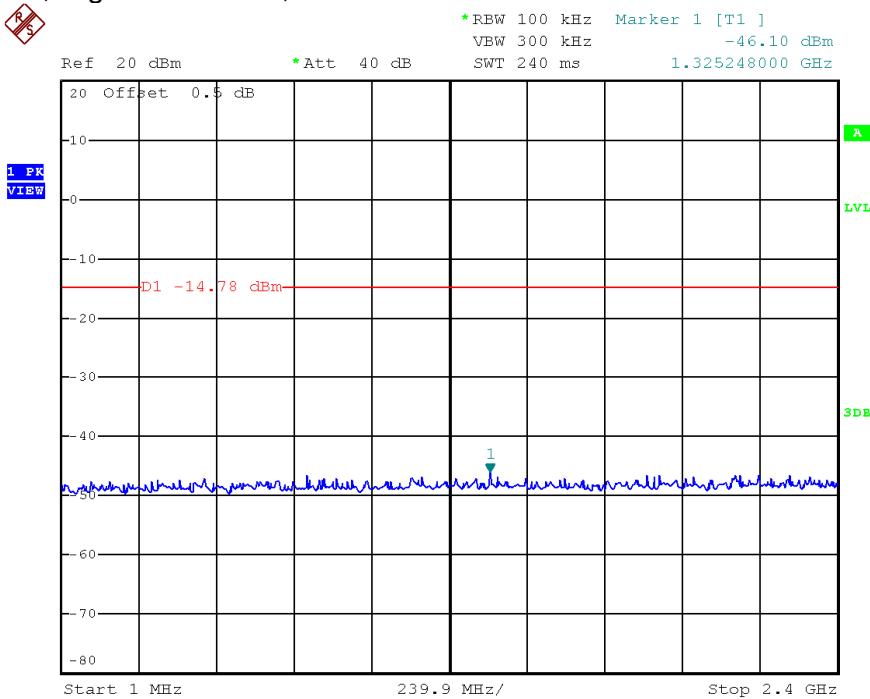


802.11b, Highest Channel, Plot B

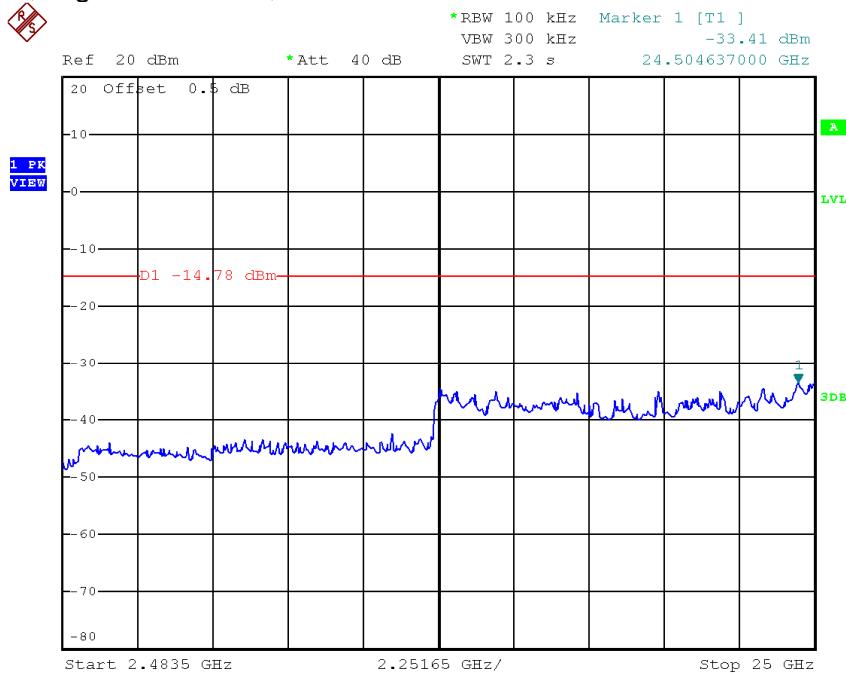


# INTERTEK TESTING SERVICES

## Plots of bandedge

802.11g, Lowest channel

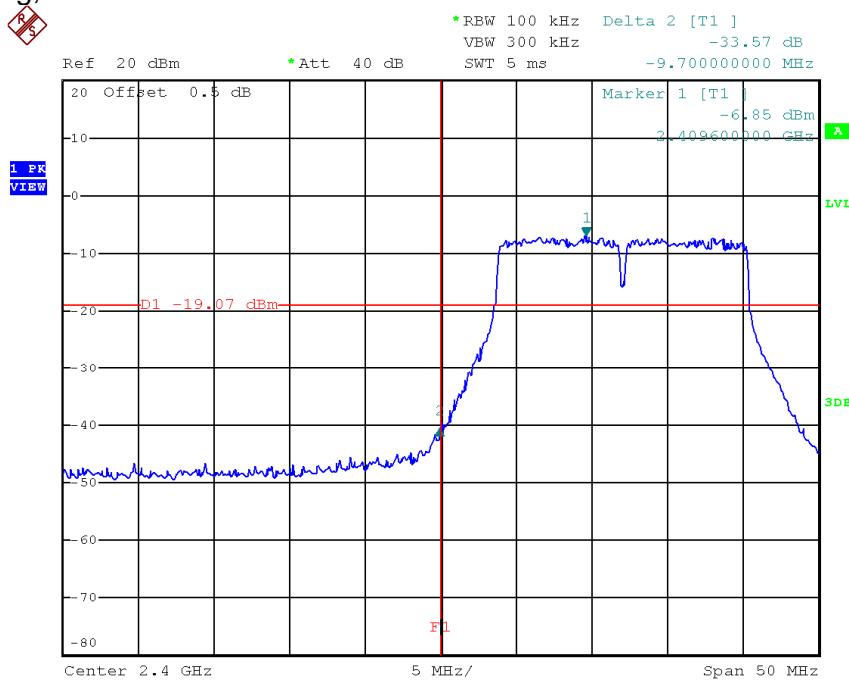


802.11b, Highest channel

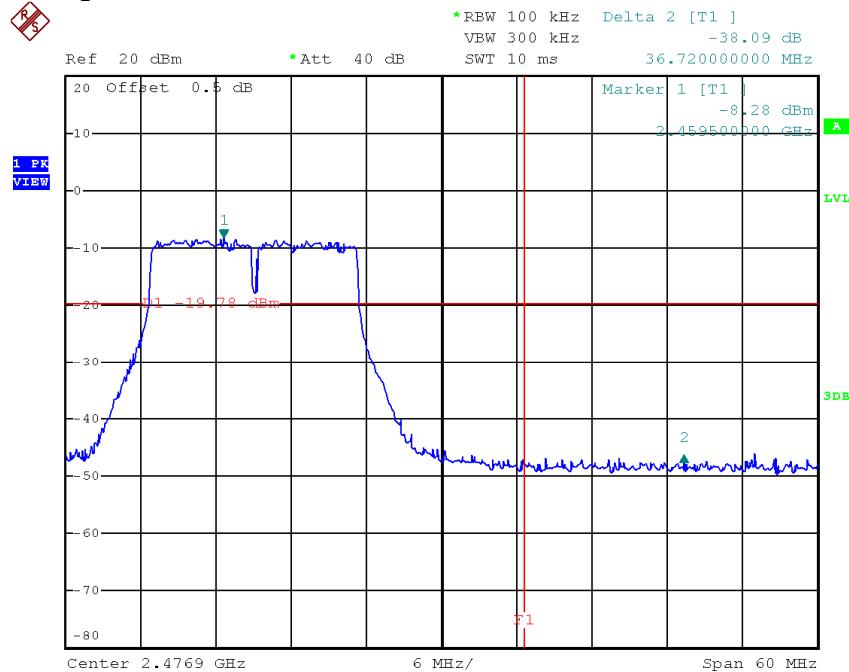


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11g, Lowest Channel, Plot A

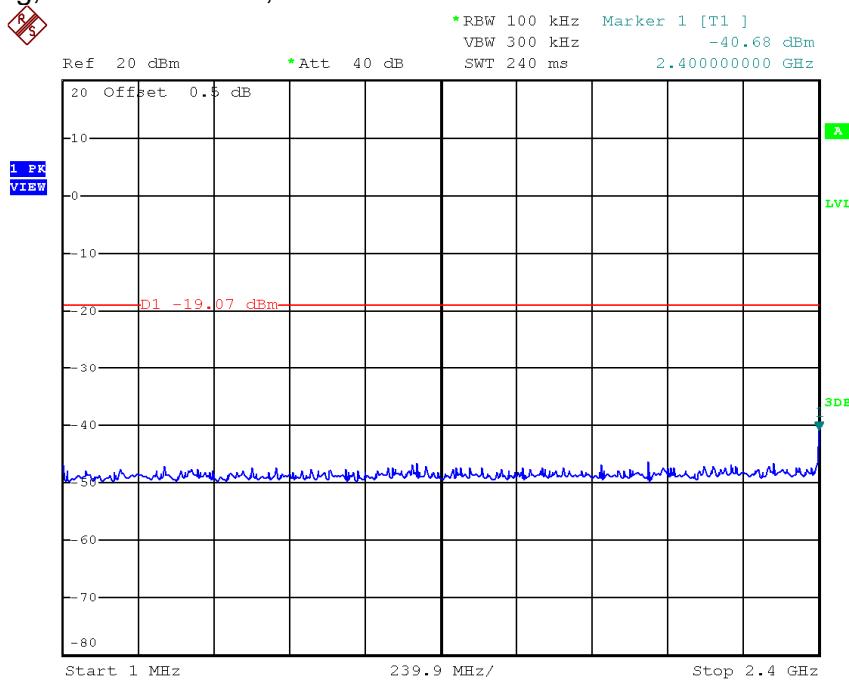


802.11g, Lowest Channel, Plot B

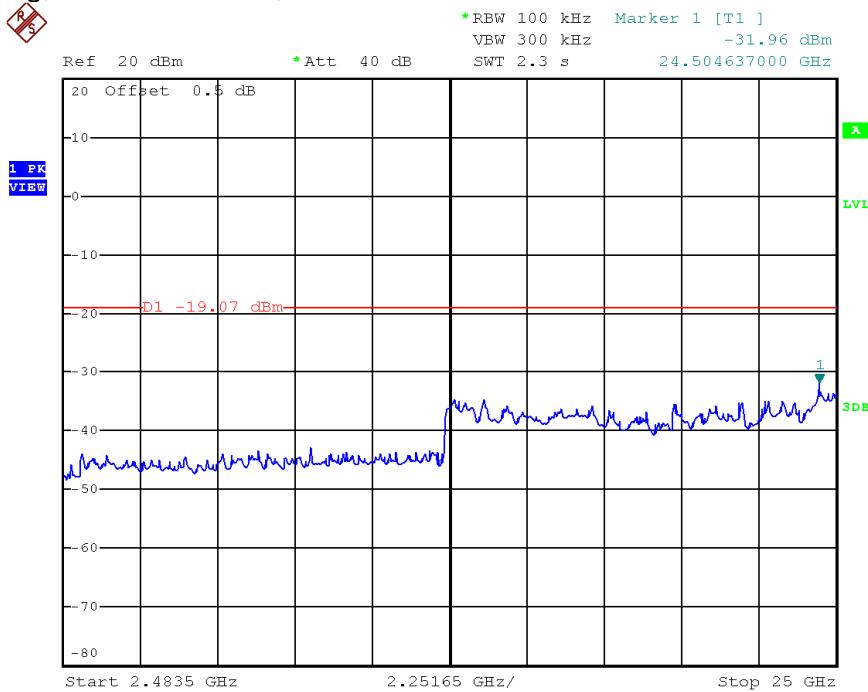


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11g, Middle Channel, Plot A

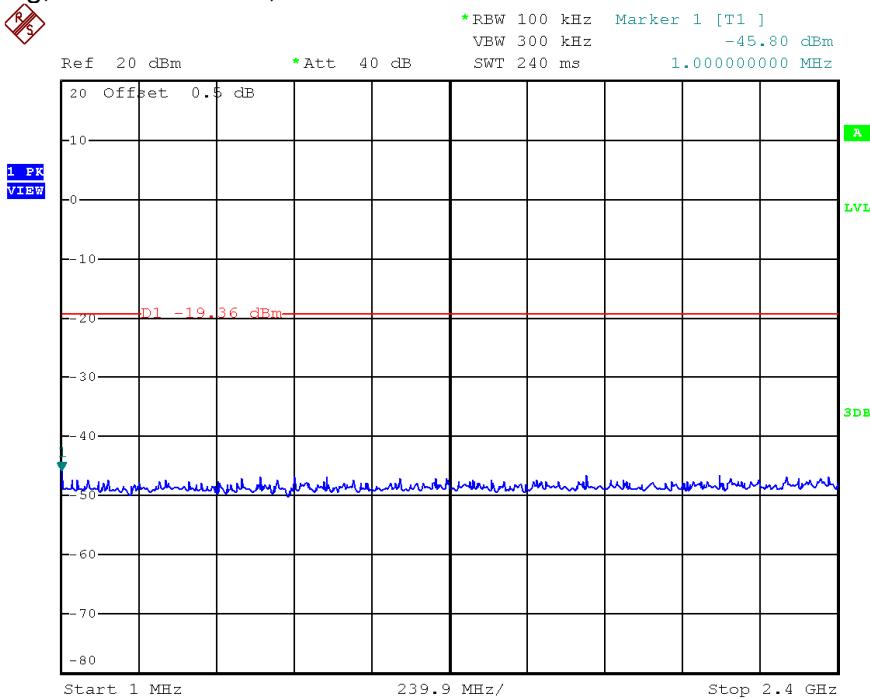


802.11g, Middle Channel, Plot B

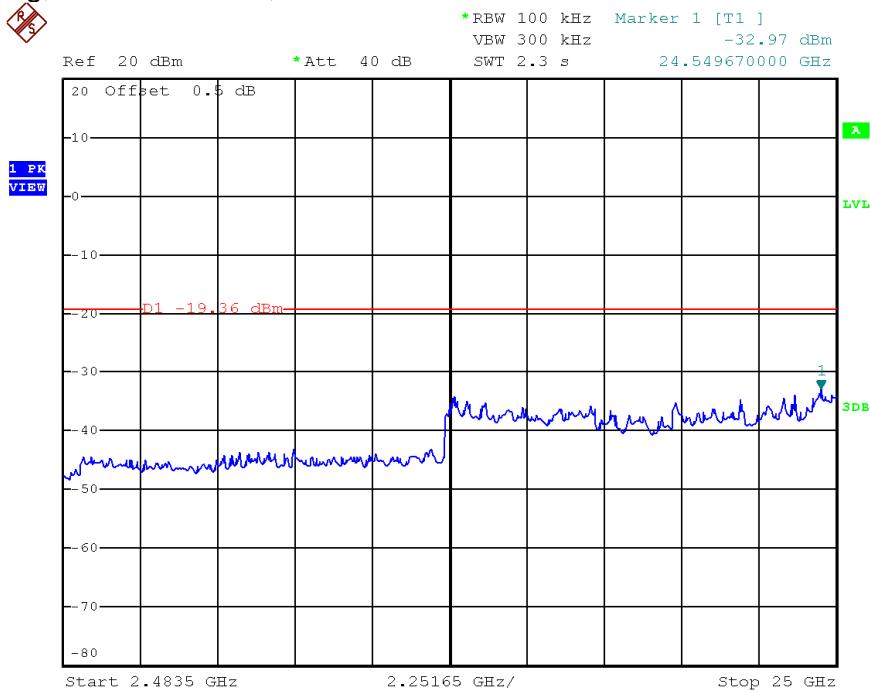


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11g, Highest Channel, Plot A

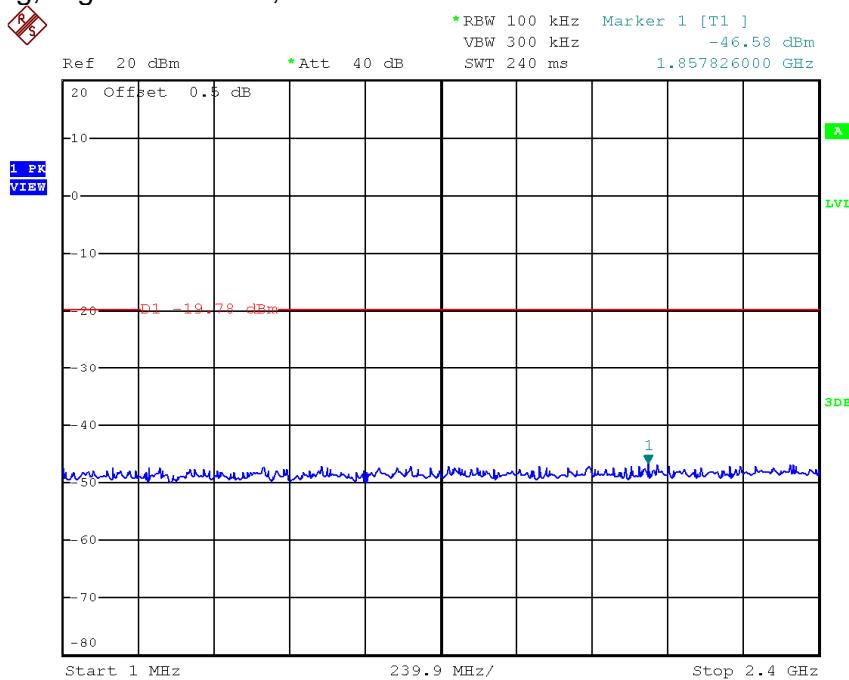


802.11g, Highest Channel, Plot B

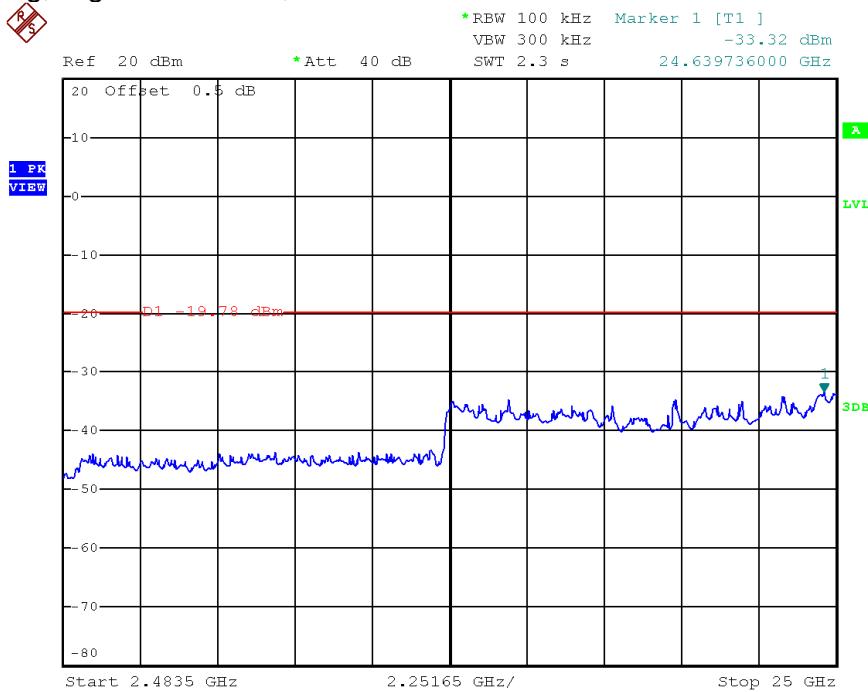


# INTERTEK TESTING SERVICES

## Plots of bandedge

802.11n (20m), Lowest channel

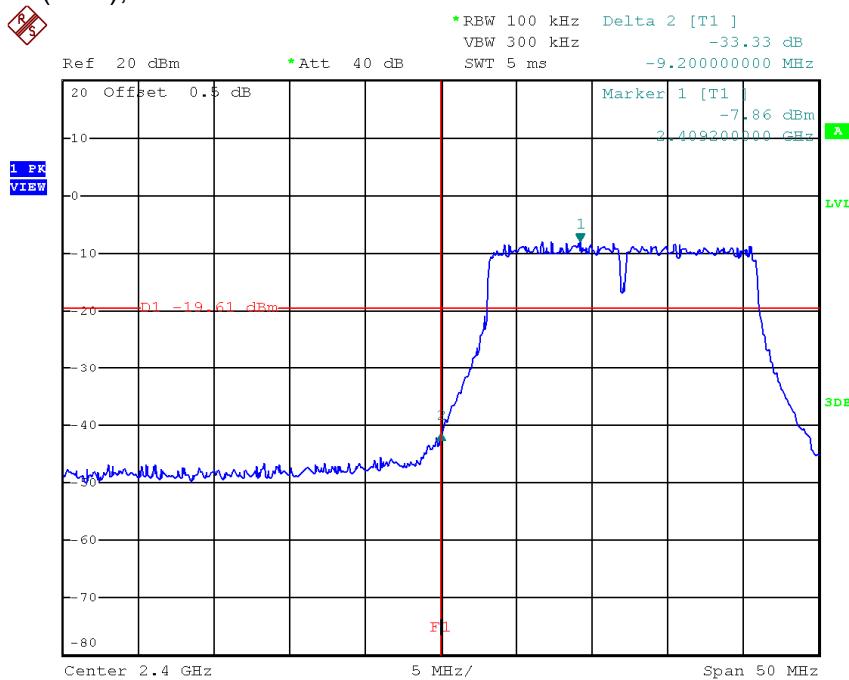


802.11n (20m), Highest channel

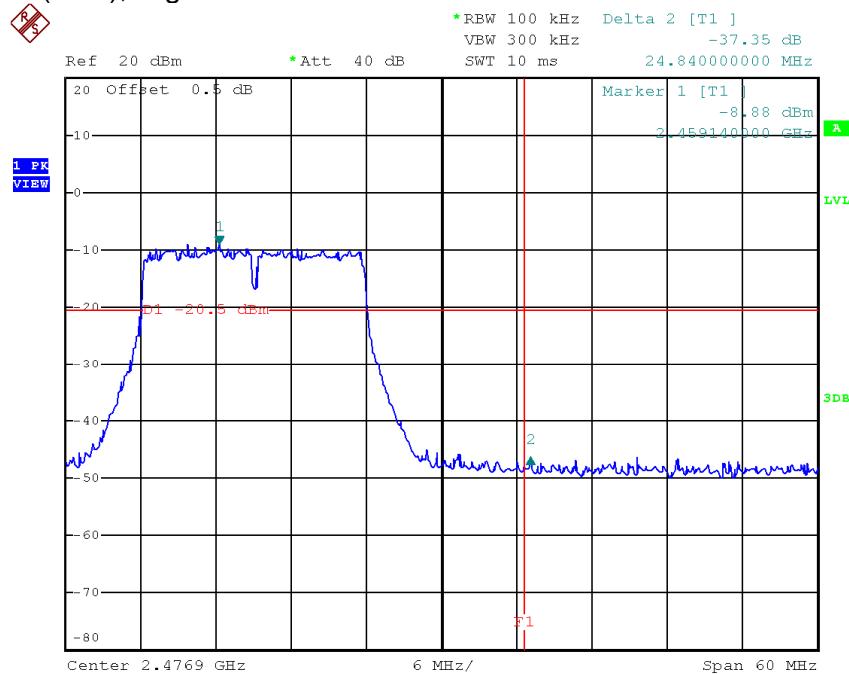


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (20m), Lowest Channel, Plot A

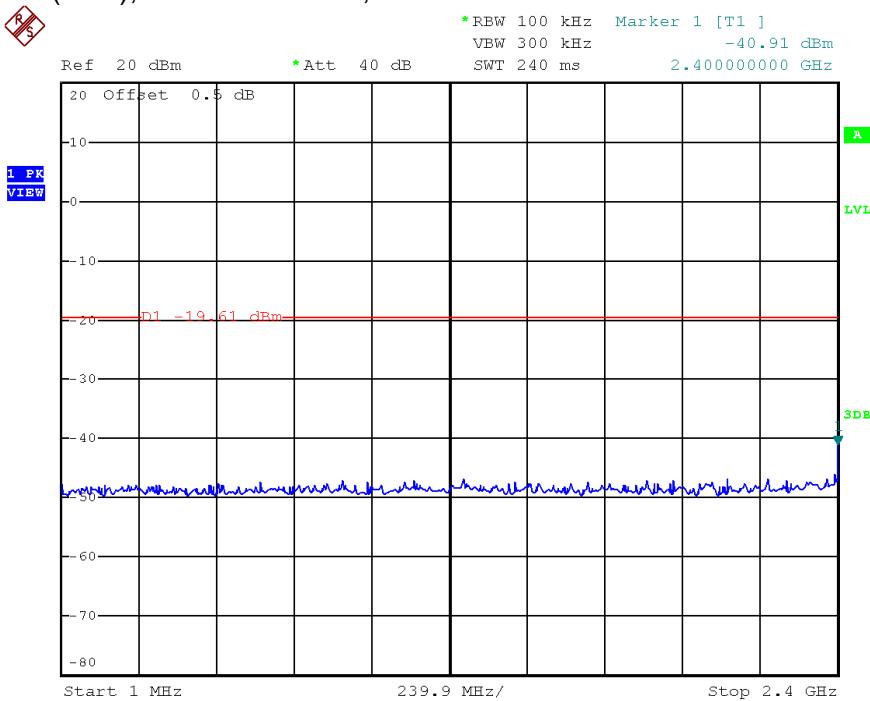


802.11n (20m), Lowest Channel, Plot B

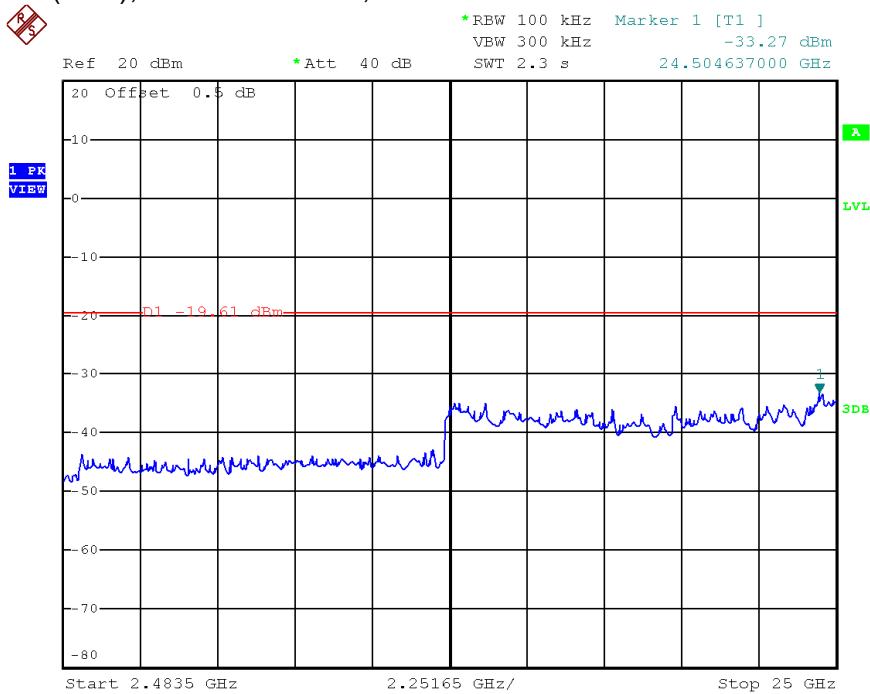


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (20m), Middle Channel, Plot A

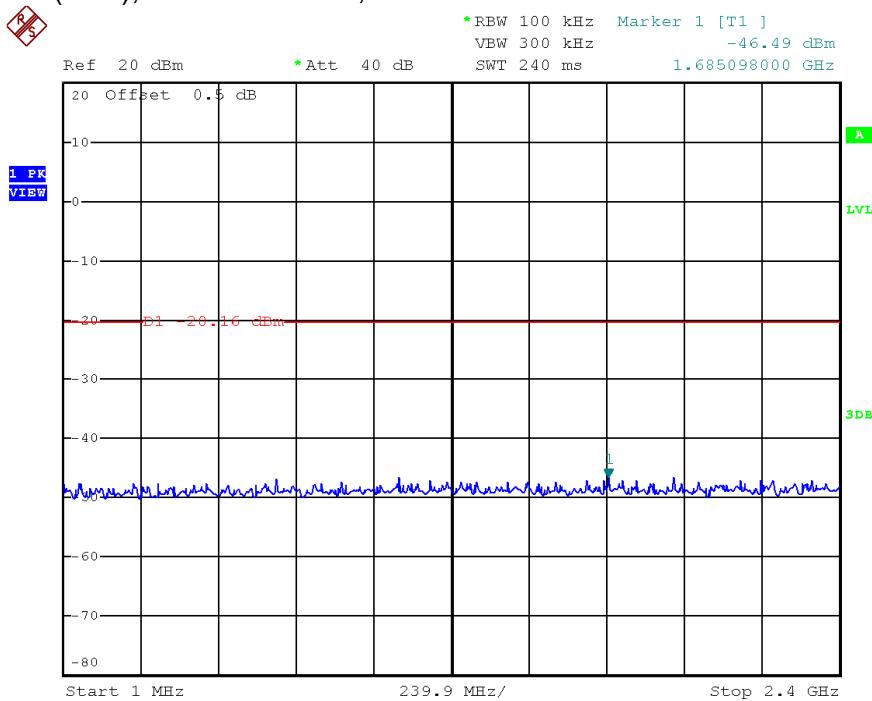


802.11n (20m), Middle Channel, Plot B

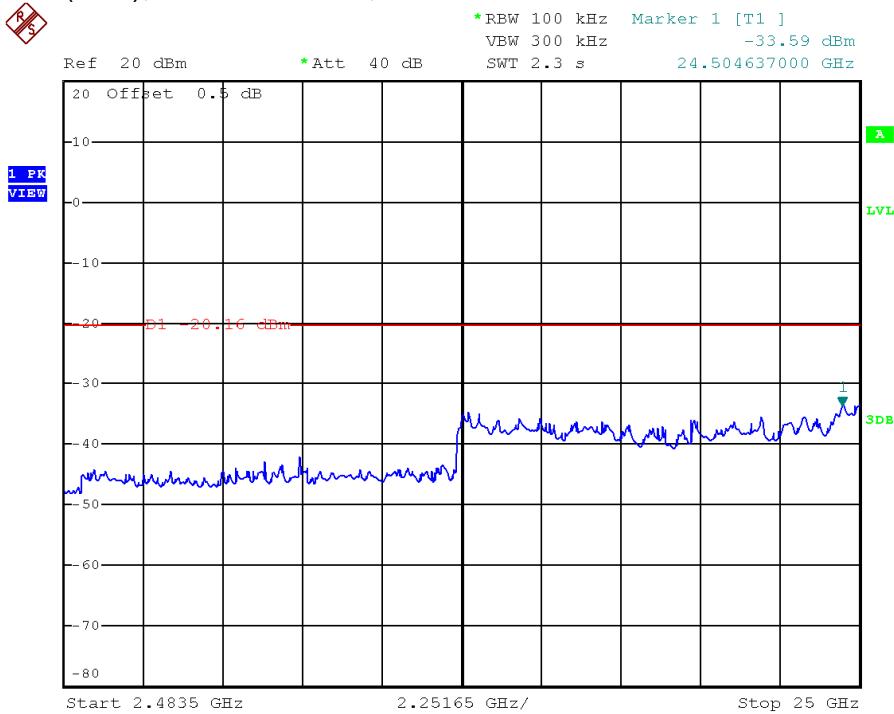


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (20m), Highest Channel, Plot A

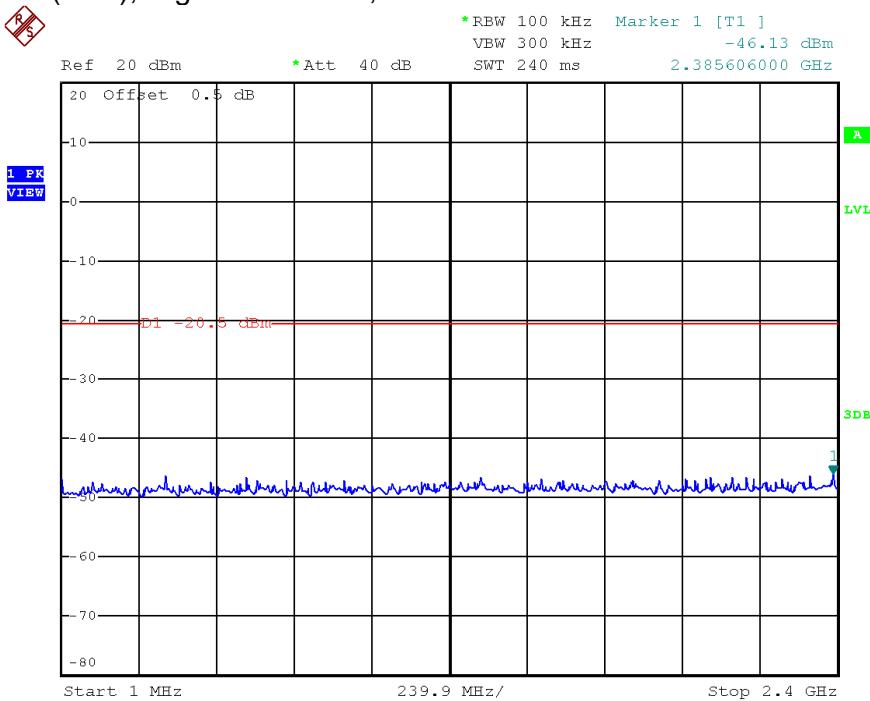


802.11n (20m), Highest Channel, Plot B

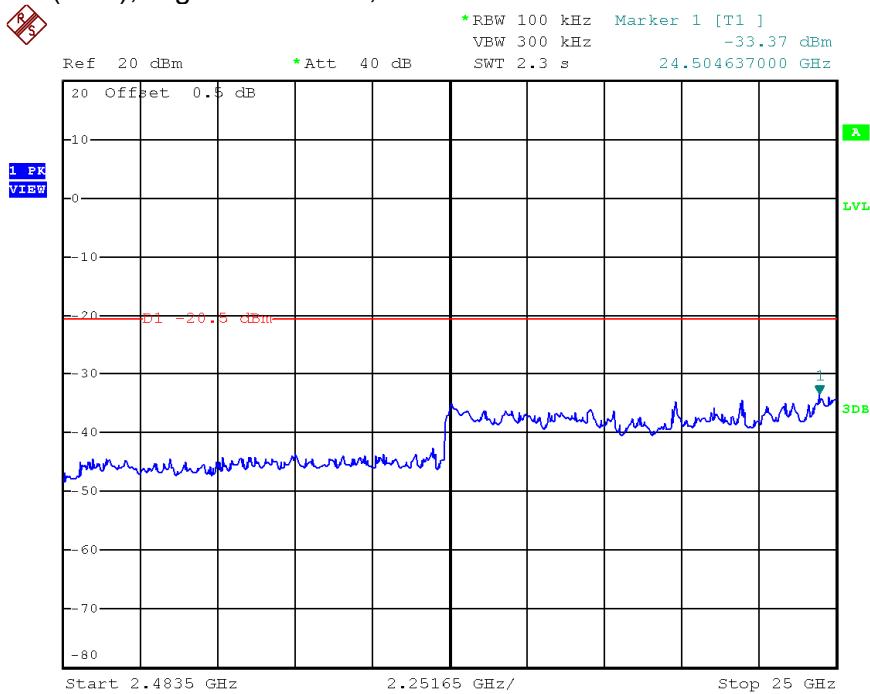


# INTERTEK TESTING SERVICES

## Plots of bandedge

802.11n (40m), Lowest Channel

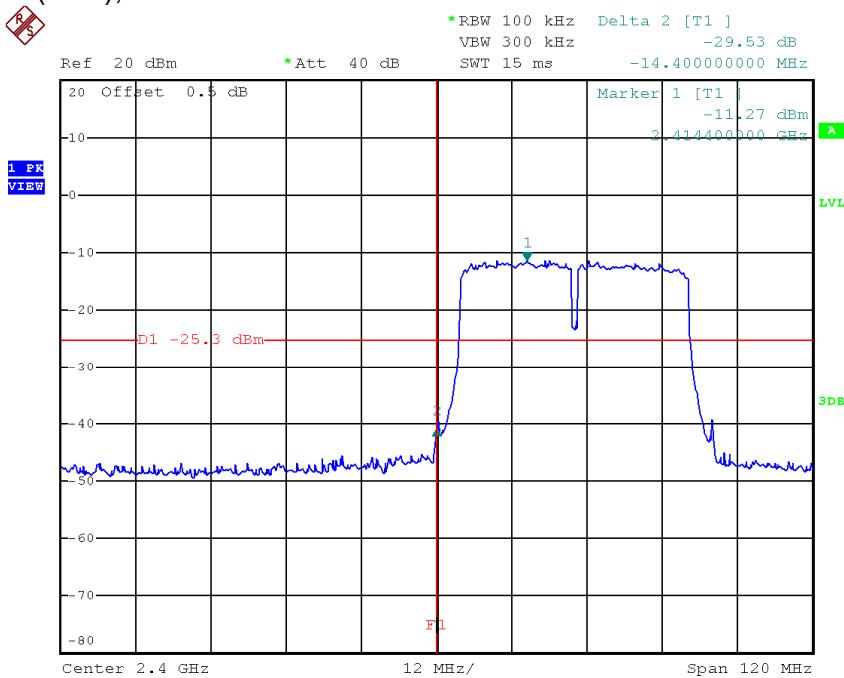


802.11n (40m), Highest Channel

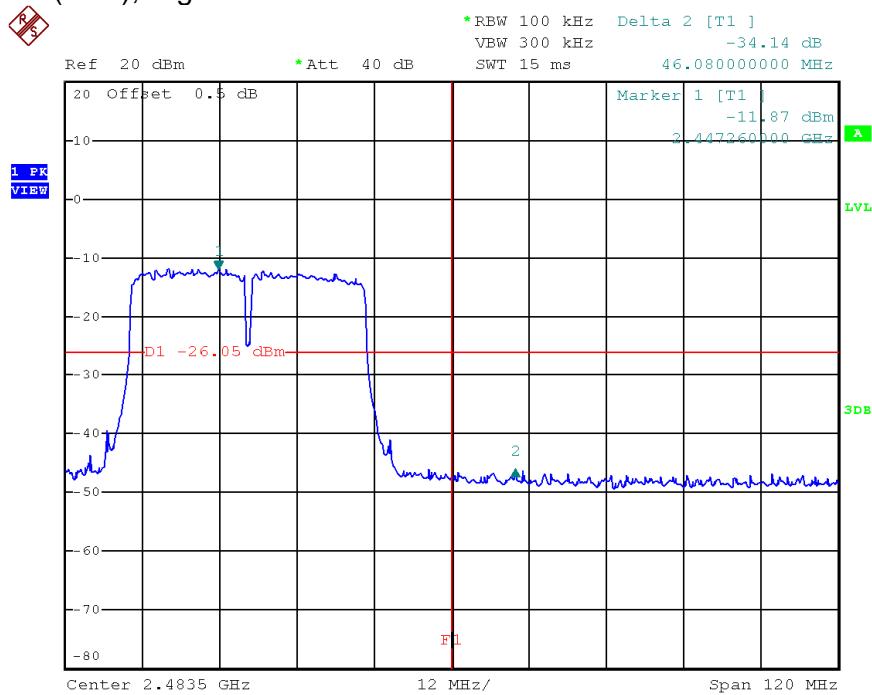


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (40m), Lowest Channel, Plot A

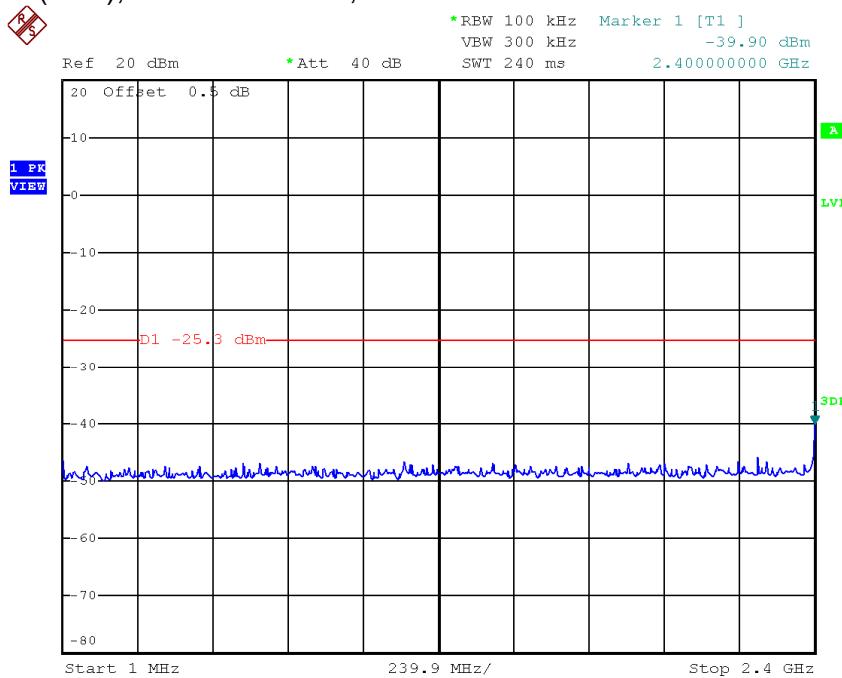


802.11n (40m), Lowest Channel, Plot B

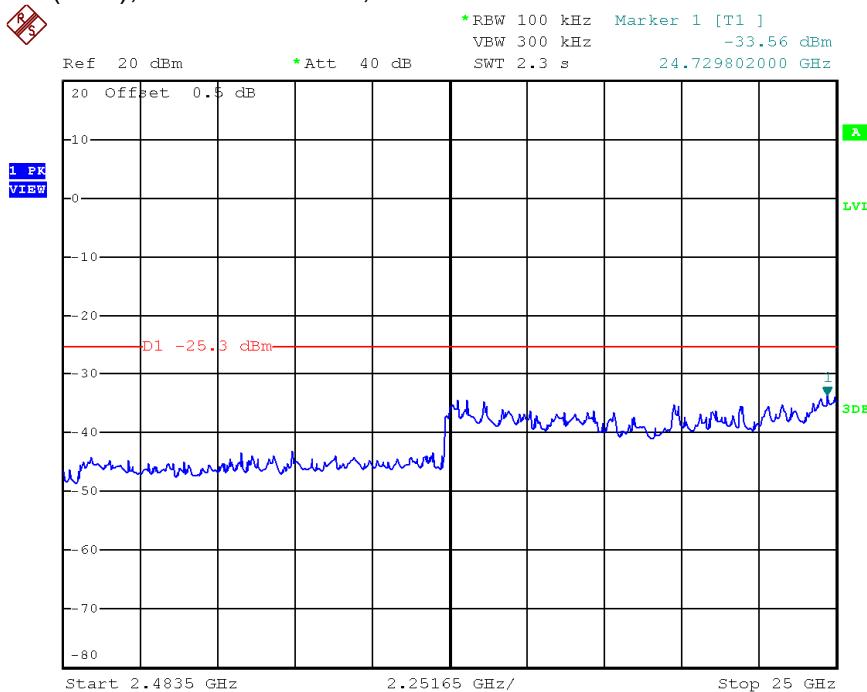


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (40m), Middle Channel, Plot A

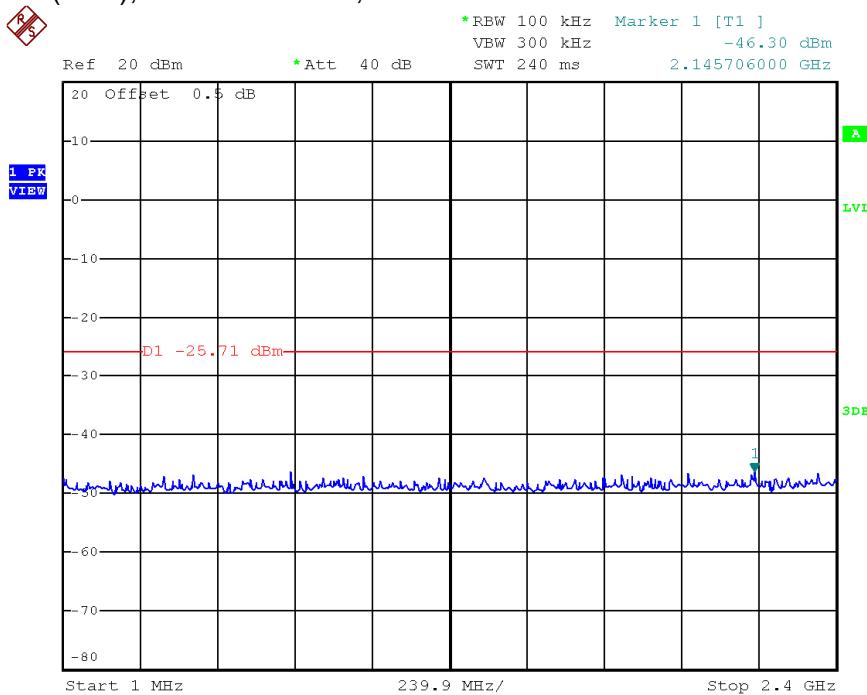


802.11n (40m), Middle Channel, Plot B

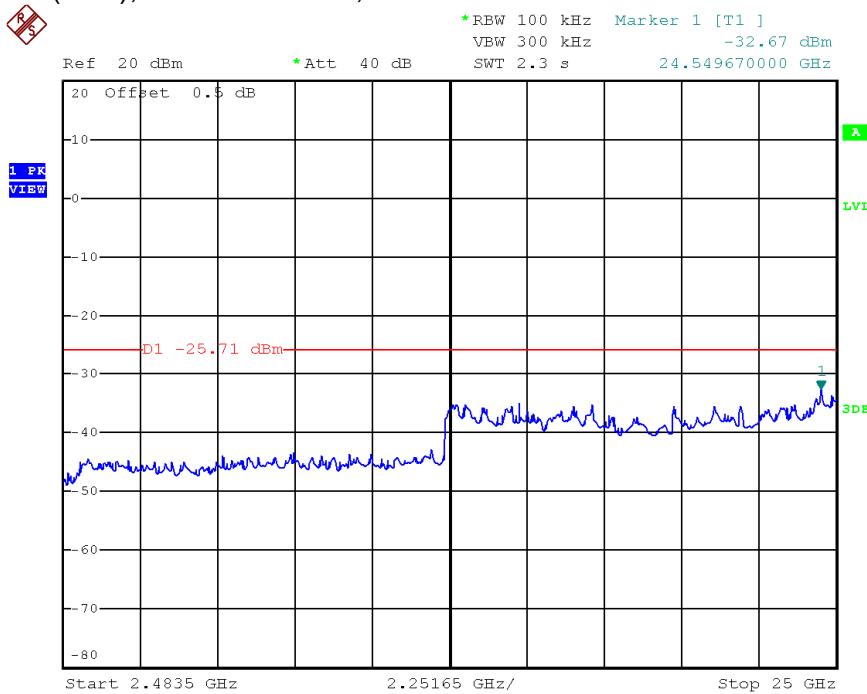


# INTERTEK TESTING SERVICES

## Plots of out of band conducted emissions

802.11n (40m), Highest Channel, Plot A

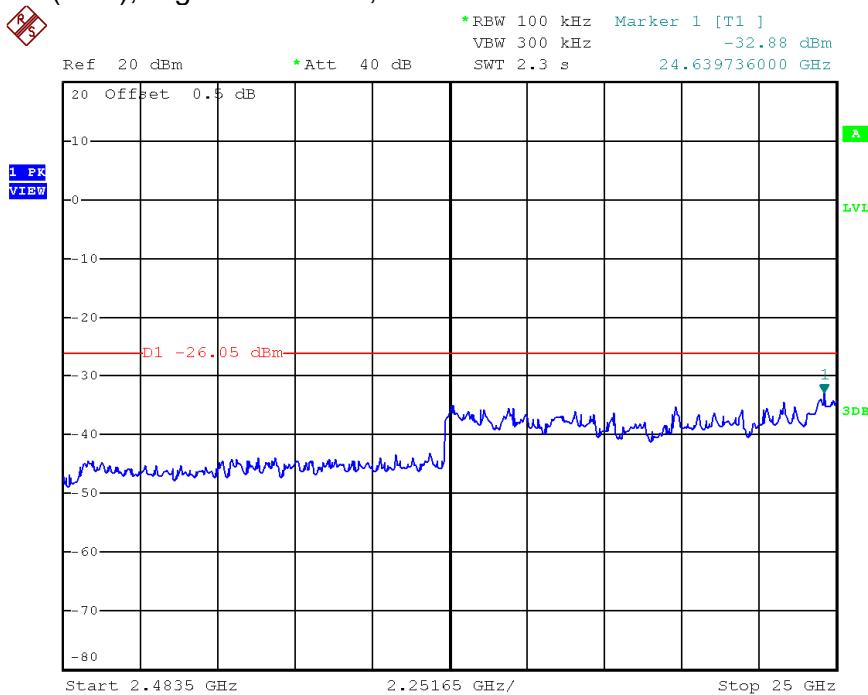

802.11n (40m), Highest Channel, Plot B

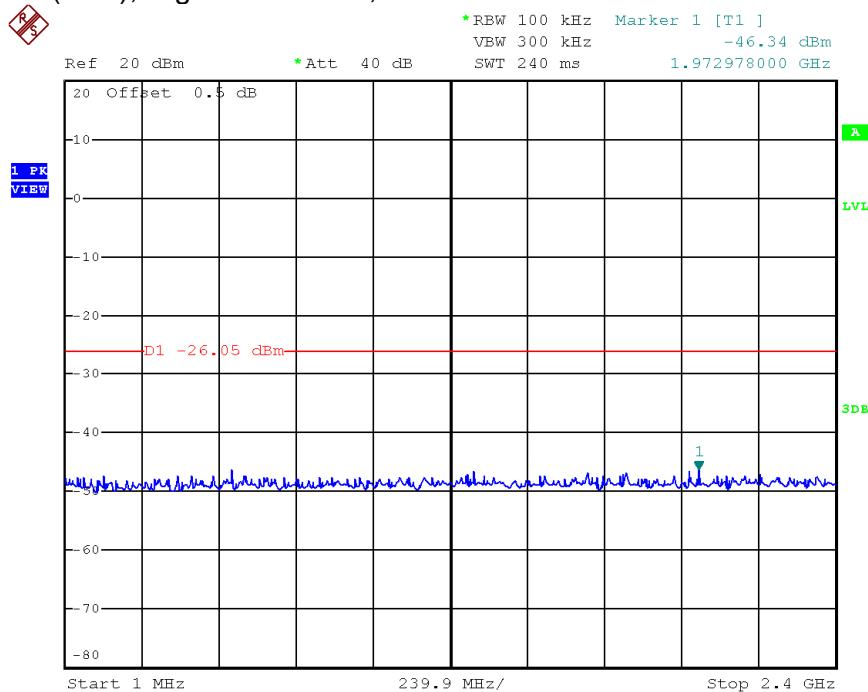

## INTERTEK TESTING SERVICES

---

### 4.2 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where      FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

PD = Pulse Desensitization in dB

AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB $\mu$ V/m. This value in dB $\mu$ V/m is converted to its corresponding level in  $\mu$ V/m.

RA = 62.0 dB $\mu$ V

AF = 7.4 dB

CF = 1.6 dB

AG = 29.0 dB

PD = 0.0 dB

AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### 4.3 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

#### 4.3.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

201.569 MHz

The worst case radiated emission configuration photographs are saved with filename:  
config photos.pdf

#### 4.3.2 Radiated Emission Data

The data in tables 1-13 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 1.0 dB margin

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 1  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>49.3</b>	<b>33</b>	<b>29.4</b>	<b>45.7</b>	<b>54.0</b>	<b>-8.3</b>
<b>H</b>	<b>4824.000</b>	<b>31.4</b>	<b>33</b>	<b>34.9</b>	<b>33.3</b>	<b>54.0</b>	<b>-20.7</b>
<b>H</b>	<b>12060.000</b>	<b>36.2</b>	<b>33</b>	<b>40.5</b>	<b>43.7</b>	<b>54.0</b>	<b>-10.3</b>
<b>H</b>	<b>14472.000</b>	<b>37.5</b>	<b>33</b>	<b>40.0</b>	<b>44.5</b>	<b>54.0</b>	<b>-9.5</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>54.7</b>	<b>33</b>	<b>29.4</b>	<b>51.1</b>	<b>74.0</b>	<b>-22.9</b>
<b>H</b>	<b>4824.000</b>	<b>43.5</b>	<b>33</b>	<b>34.9</b>	<b>45.4</b>	<b>74.0</b>	<b>-28.6</b>
<b>H</b>	<b>12060.000</b>	<b>48.1</b>	<b>33</b>	<b>40.5</b>	<b>55.6</b>	<b>74.0</b>	<b>-18.4</b>
<b>H</b>	<b>14472.000</b>	<b>49.4</b>	<b>33</b>	<b>40.0</b>	<b>56.4</b>	<b>74.0</b>	<b>-17.6</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 2  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>31.2</b>	<b>33</b>	<b>34.9</b>	<b>33.1</b>	<b>54.0</b>	<b>-20.9</b>
<b>H</b>	<b>7311.000</b>	<b>33.5</b>	<b>33</b>	<b>37.9</b>	<b>38.4</b>	<b>54.0</b>	<b>-15.6</b>
<b>H</b>	<b>12185.000</b>	<b>36.3</b>	<b>33</b>	<b>40.5</b>	<b>43.8</b>	<b>54.0</b>	<b>-10.2</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>43.4</b>	<b>33</b>	<b>34.9</b>	<b>45.3</b>	<b>74.0</b>	<b>-28.7</b>
<b>H</b>	<b>7311.000</b>	<b>45.5</b>	<b>33</b>	<b>37.9</b>	<b>50.4</b>	<b>74.0</b>	<b>-23.6</b>
<b>H</b>	<b>12185.000</b>	<b>48.2</b>	<b>33</b>	<b>40.5</b>	<b>55.7</b>	<b>74.0</b>	<b>-18.3</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 3  
IEEE 802.11b (DSSS, 1 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>49.4</b>	<b>33</b>	<b>29.4</b>	<b>45.8</b>	<b>54.0</b>	<b>-8.2</b>
<b>H</b>	<b>4924.000</b>	<b>31.1</b>	<b>33</b>	<b>34.9</b>	<b>33.0</b>	<b>54.0</b>	<b>-21.0</b>
<b>H</b>	<b>7386.000</b>	<b>33.8</b>	<b>33</b>	<b>37.9</b>	<b>38.7</b>	<b>54.0</b>	<b>-15.3</b>
<b>H</b>	<b>12310.000</b>	<b>36.0</b>	<b>33</b>	<b>40.5</b>	<b>43.5</b>	<b>54.0</b>	<b>-10.5</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>54.8</b>	<b>33</b>	<b>29.4</b>	<b>51.2</b>	<b>74.0</b>	<b>-22.8</b>
<b>H</b>	<b>4924.000</b>	<b>42.8</b>	<b>33</b>	<b>34.9</b>	<b>44.7</b>	<b>74.0</b>	<b>-29.3</b>
<b>H</b>	<b>7386.000</b>	<b>45.9</b>	<b>33</b>	<b>37.9</b>	<b>50.8</b>	<b>74.0</b>	<b>-23.2</b>
<b>H</b>	<b>12310.000</b>	<b>47.9</b>	<b>33</b>	<b>40.5</b>	<b>55.4</b>	<b>74.0</b>	<b>-18.6</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 4  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>49.5</b>	<b>33</b>	<b>29.4</b>	<b>45.9</b>	<b>54.0</b>	<b>-8.1</b>
<b>H</b>	<b>4824.000</b>	<b>31.1</b>	<b>33</b>	<b>34.9</b>	<b>33.0</b>	<b>54.0</b>	<b>-21.0</b>
<b>H</b>	<b>12060.000</b>	<b>36.2</b>	<b>33</b>	<b>40.5</b>	<b>43.7</b>	<b>54.0</b>	<b>-10.3</b>
<b>H</b>	<b>14472.000</b>	<b>37.3</b>	<b>33</b>	<b>40.0</b>	<b>44.3</b>	<b>54.0</b>	<b>-9.7</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>57.0</b>	<b>33</b>	<b>29.4</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>
<b>H</b>	<b>4824.000</b>	<b>42.9</b>	<b>33</b>	<b>34.9</b>	<b>44.8</b>	<b>74.0</b>	<b>-29.2</b>
<b>H</b>	<b>12060.000</b>	<b>48.3</b>	<b>33</b>	<b>40.5</b>	<b>55.8</b>	<b>74.0</b>	<b>-18.2</b>
<b>H</b>	<b>14472.000</b>	<b>49.2</b>	<b>33</b>	<b>40.0</b>	<b>56.2</b>	<b>74.0</b>	<b>-17.8</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 5  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>31.3</b>	<b>33</b>	<b>34.9</b>	<b>33.2</b>	<b>54.0</b>	<b>-20.8</b>
<b>H</b>	<b>7311.000</b>	<b>33.8</b>	<b>33</b>	<b>37.9</b>	<b>38.7</b>	<b>54.0</b>	<b>-15.3</b>
<b>H</b>	<b>12185.000</b>	<b>35.9</b>	<b>33</b>	<b>40.5</b>	<b>43.4</b>	<b>54.0</b>	<b>-10.6</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>43.1</b>	<b>33</b>	<b>34.9</b>	<b>45.0</b>	<b>74.0</b>	<b>-29.0</b>
<b>H</b>	<b>7311.000</b>	<b>45.7</b>	<b>33</b>	<b>37.9</b>	<b>50.6</b>	<b>74.0</b>	<b>-23.4</b>
<b>H</b>	<b>12185.000</b>	<b>48.0</b>	<b>33</b>	<b>40.5</b>	<b>55.5</b>	<b>74.0</b>	<b>-18.5</b>

NOTES:

1. Peak detector is used for the peak data of emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 6  
IEEE 802.11g (OFDM, 6 Mbps)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>49.8</b>	<b>33</b>	<b>29.4</b>	<b>46.2</b>	<b>54.0</b>	<b>-7.8</b>
<b>H</b>	<b>4924.000</b>	<b>31.5</b>	<b>33</b>	<b>34.9</b>	<b>33.4</b>	<b>54.0</b>	<b>-20.6</b>
<b>H</b>	<b>7386.000</b>	<b>33.5</b>	<b>33</b>	<b>37.9</b>	<b>38.4</b>	<b>54.0</b>	<b>-15.6</b>
<b>H</b>	<b>12310.000</b>	<b>36.1</b>	<b>33</b>	<b>40.5</b>	<b>43.6</b>	<b>54.0</b>	<b>-10.4</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>57.1</b>	<b>33</b>	<b>29.4</b>	<b>53.5</b>	<b>74.0</b>	<b>-20.5</b>
<b>H</b>	<b>4924.000</b>	<b>43.2</b>	<b>33</b>	<b>34.9</b>	<b>45.1</b>	<b>74.0</b>	<b>-28.9</b>
<b>H</b>	<b>7386.000</b>	<b>45.5</b>	<b>33</b>	<b>37.9</b>	<b>50.4</b>	<b>74.0</b>	<b>-23.6</b>
<b>H</b>	<b>12310.000</b>	<b>48.2</b>	<b>33</b>	<b>40.5</b>	<b>55.7</b>	<b>74.0</b>	<b>-18.3</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 01

Table 7  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>49.7</b>	<b>33</b>	<b>29.4</b>	<b>46.1</b>	<b>54.0</b>	<b>-7.9</b>
<b>H</b>	<b>4824.000</b>	<b>30.9</b>	<b>33</b>	<b>34.9</b>	<b>32.8</b>	<b>54.0</b>	<b>-21.2</b>
<b>H</b>	<b>12060.000</b>	<b>36.1</b>	<b>33</b>	<b>40.5</b>	<b>43.6</b>	<b>54.0</b>	<b>-10.4</b>
<b>H</b>	<b>14472.000</b>	<b>37.6</b>	<b>33</b>	<b>40.0</b>	<b>44.6</b>	<b>54.0</b>	<b>-9.4</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>57.0</b>	<b>33</b>	<b>29.4</b>	<b>53.4</b>	<b>74.0</b>	<b>-20.6</b>
<b>H</b>	<b>4824.000</b>	<b>42.9</b>	<b>33</b>	<b>34.9</b>	<b>44.8</b>	<b>74.0</b>	<b>-29.2</b>
<b>H</b>	<b>12060.000</b>	<b>48.0</b>	<b>33</b>	<b>40.5</b>	<b>55.5</b>	<b>74.0</b>	<b>-18.5</b>
<b>H</b>	<b>14472.000</b>	<b>49.7</b>	<b>33</b>	<b>40.0</b>	<b>56.7</b>	<b>74.0</b>	<b>-17.3</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 8  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>31.3</b>	<b>33</b>	<b>34.9</b>	<b>33.2</b>	<b>54.0</b>	<b>-20.8</b>
<b>H</b>	<b>7311.000</b>	<b>33.7</b>	<b>33</b>	<b>37.9</b>	<b>38.6</b>	<b>54.0</b>	<b>-15.4</b>
<b>H</b>	<b>12185.000</b>	<b>36.2</b>	<b>33</b>	<b>40.5</b>	<b>43.7</b>	<b>54.0</b>	<b>-10.3</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>43.3</b>	<b>33</b>	<b>34.9</b>	<b>45.2</b>	<b>74.0</b>	<b>-28.8</b>
<b>H</b>	<b>7311.000</b>	<b>45.8</b>	<b>33</b>	<b>37.9</b>	<b>50.7</b>	<b>74.0</b>	<b>-23.3</b>
<b>H</b>	<b>12185.000</b>	<b>48.2</b>	<b>33</b>	<b>40.5</b>	<b>55.7</b>	<b>74.0</b>	<b>-18.3</b>

NOTES:

1. Peak detector is used for the peak data of emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 11

Table 9  
IEEE 802.11n (20MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>50.1</b>	<b>33</b>	<b>29.4</b>	<b>46.5</b>	<b>54.0</b>	<b>-7.5</b>
<b>H</b>	<b>4924.000</b>	<b>31.1</b>	<b>33</b>	<b>34.9</b>	<b>33.0</b>	<b>54.0</b>	<b>-21.0</b>
<b>H</b>	<b>7386.000</b>	<b>33.4</b>	<b>33</b>	<b>37.9</b>	<b>38.3</b>	<b>54.0</b>	<b>-15.7</b>
<b>H</b>	<b>12310.000</b>	<b>36.0</b>	<b>33</b>	<b>40.5</b>	<b>43.5</b>	<b>54.0</b>	<b>-10.5</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>57.2</b>	<b>33</b>	<b>29.4</b>	<b>53.6</b>	<b>74.0</b>	<b>-20.4</b>
<b>H</b>	<b>4924.000</b>	<b>43.0</b>	<b>33</b>	<b>34.9</b>	<b>44.9</b>	<b>74.0</b>	<b>-29.1</b>
<b>H</b>	<b>7386.000</b>	<b>45.5</b>	<b>33</b>	<b>37.9</b>	<b>50.4</b>	<b>74.0</b>	<b>-23.6</b>
<b>H</b>	<b>12310.000</b>	<b>48.3</b>	<b>33</b>	<b>40.5</b>	<b>55.8</b>	<b>74.0</b>	<b>-18.2</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 03

Table 10  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>48.2</b>	<b>33</b>	<b>29.4</b>	<b>44.6</b>	<b>54.0</b>	<b>-9.4</b>
<b>H</b>	<b>4844.000</b>	<b>30.6</b>	<b>33</b>	<b>34.9</b>	<b>32.5</b>	<b>54.0</b>	<b>-21.5</b>
<b>H</b>	<b>7266.000</b>	<b>33.3</b>	<b>33</b>	<b>37.9</b>	<b>38.2</b>	<b>54.0</b>	<b>-15.8</b>
<b>H</b>	<b>12110.000</b>	<b>35.8</b>	<b>33</b>	<b>40.5</b>	<b>43.3</b>	<b>54.0</b>	<b>-10.7</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2390.000</b>	<b>54.8</b>	<b>33</b>	<b>29.4</b>	<b>51.2</b>	<b>74.0</b>	<b>-22.8</b>
<b>H</b>	<b>4844.000</b>	<b>42.5</b>	<b>33</b>	<b>34.9</b>	<b>44.4</b>	<b>74.0</b>	<b>-29.6</b>
<b>H</b>	<b>7266.000</b>	<b>44.8</b>	<b>33</b>	<b>37.9</b>	<b>49.7</b>	<b>74.0</b>	<b>-24.3</b>
<b>H</b>	<b>12110.000</b>	<b>47.8</b>	<b>33</b>	<b>40.5</b>	<b>55.3</b>	<b>74.0</b>	<b>-18.7</b>

NOTES:

1. Peak detector is used for the peak data of emission measurement.
2. Average detector is used for the average data of emission measurement.
3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
4. Negative value in the margin column shows emission below limit.
5. Horn antenna is used for the emission over 1000MHz.
6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205
7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.
8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 06

Table 11  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>30.7</b>	<b>33</b>	<b>34.9</b>	<b>32.6</b>	<b>54.0</b>	<b>-21.4</b>
<b>H</b>	<b>7311.000</b>	<b>33.4</b>	<b>33</b>	<b>37.9</b>	<b>38.3</b>	<b>54.0</b>	<b>-15.7</b>
<b>H</b>	<b>12185.000</b>	<b>35.9</b>	<b>33</b>	<b>40.5</b>	<b>43.4</b>	<b>54.0</b>	<b>-10.6</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>4874.000</b>	<b>42.6</b>	<b>33</b>	<b>34.9</b>	<b>44.5</b>	<b>74.0</b>	<b>-29.5</b>
<b>H</b>	<b>7311.000</b>	<b>44.9</b>	<b>33</b>	<b>37.9</b>	<b>49.8</b>	<b>74.0</b>	<b>-24.2</b>
<b>H</b>	<b>12185.000</b>	<b>48.0</b>	<b>33</b>	<b>40.5</b>	<b>55.5</b>	<b>74.0</b>	<b>-18.5</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 09

Table 12  
IEEE 802.11n (40MHz) (OFDM, MCS0)

### Radiated Emission Data

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Average Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>48.3</b>	<b>33</b>	<b>29.4</b>	<b>44.7</b>	<b>54.0</b>	<b>-9.3</b>
<b>H</b>	<b>4904.000</b>	<b>30.9</b>	<b>33</b>	<b>34.9</b>	<b>32.8</b>	<b>54.0</b>	<b>-21.2</b>
<b>H</b>	<b>7356.000</b>	<b>32.7</b>	<b>33</b>	<b>37.9</b>	<b>37.6</b>	<b>54.0</b>	<b>-16.4</b>
<b>H</b>	<b>12260.000</b>	<b>36.2</b>	<b>33</b>	<b>40.5</b>	<b>43.7</b>	<b>54.0</b>	<b>-10.3</b>

Polari-zation	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB $\mu$ V/m)	Peak Limit at 3m (dB $\mu$ V/m)	Margin (dB)
<b>H</b>	<b>2483.500</b>	<b>54.6</b>	<b>33</b>	<b>29.4</b>	<b>51.0</b>	<b>74.0</b>	<b>-23.0</b>
<b>H</b>	<b>4904.000</b>	<b>42.4</b>	<b>33</b>	<b>34.9</b>	<b>44.3</b>	<b>74.0</b>	<b>-29.7</b>
<b>H</b>	<b>7356.000</b>	<b>44.4</b>	<b>33</b>	<b>37.9</b>	<b>49.3</b>	<b>74.0</b>	<b>-24.7</b>
<b>H</b>	<b>12260.000</b>	<b>48.1</b>	<b>33</b>	<b>40.5</b>	<b>55.6</b>	<b>74.0</b>	<b>-18.4</b>

NOTES: 1. Peak detector is used for the peak data of emission measurement.

2. Average detector is used for the average data of emission measurement.

3. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.

4. Negative value in the margin column shows emission below limit.

5. Horn antenna is used for the emission over 1000MHz.

6. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205

7. For the measurement of radiated emission, summation method was used which numerical integrating (in terms of linear power) over the transmitter occupied bandwidth.

8. For the linear power measurement, data in 1MHz spacing was collected by spectrum analyzer with 1MHz resolution bandwidth.

## INTERTEK TESTING SERVICES

---

Mode: PC Charging & Play

Table 13

### Radiated Emission Data

Polarization	Frequency (MHz)	Reading (dB $\mu$ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Limit at 3m (dB $\mu$ V/m)	Margin (dB)
H	58.615	34.2	16	11.0	29.2	40.0	-10.8
H	107.843	37.3	16	14.0	35.3	43.5	-8.2
<b>H</b>	<b>131.001</b>	<b>44.4</b>	<b>16</b>	<b>14.0</b>	<b>42.4</b>	<b>43.5</b>	<b>-1.1</b>
H	198.538	41.1	16	16.0	41.1	43.5	-2.4
H	201.569	42.5	16	16.0	42.5	43.5	-1.0
H	207.874	39.5	16	17.0	40.5	43.5	-3.0
<b>V</b>	<b>258.314</b>	<b>25.2</b>	<b>16</b>	<b>21.0</b>	<b>30.2</b>	<b>46.0</b>	<b>-15.8</b>
H	603.634	17.5	16	29.0	30.5	46.0	-15.5

NOTES: 1. Peak detector is used for the emission measurement.

2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.


3. Negative value in the margin column shows emission below limit.

4. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205


## INTERTEK TESTING SERVICES

### 4.3.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

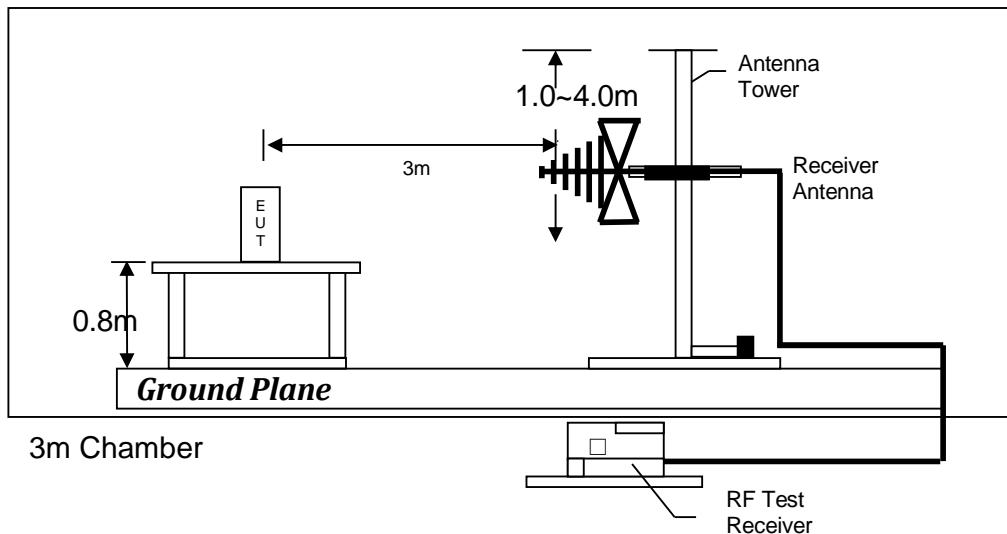

Test setup of radiated emissions up to 1GHz

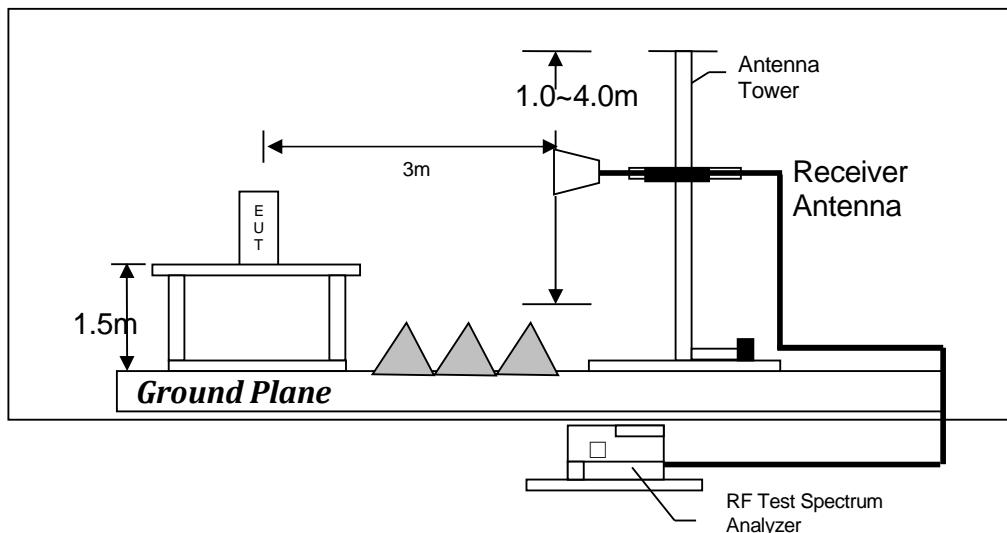

Test setup of radiated emissions above 1GHz

## INTERTEK TESTING SERVICES

---

### 4.3.4 Transmitter Duty Cycle Calculation

Not applicable – No average factor is required.

## INTERTEK TESTING SERVICES

---

### 4.4 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.4.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

172.5 kHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


#### 4.4.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 13.34 dB margin compare with Quasi Peak limit

# INTERTEK TESTING SERVICES

## Worst Case: PC Charging & Play

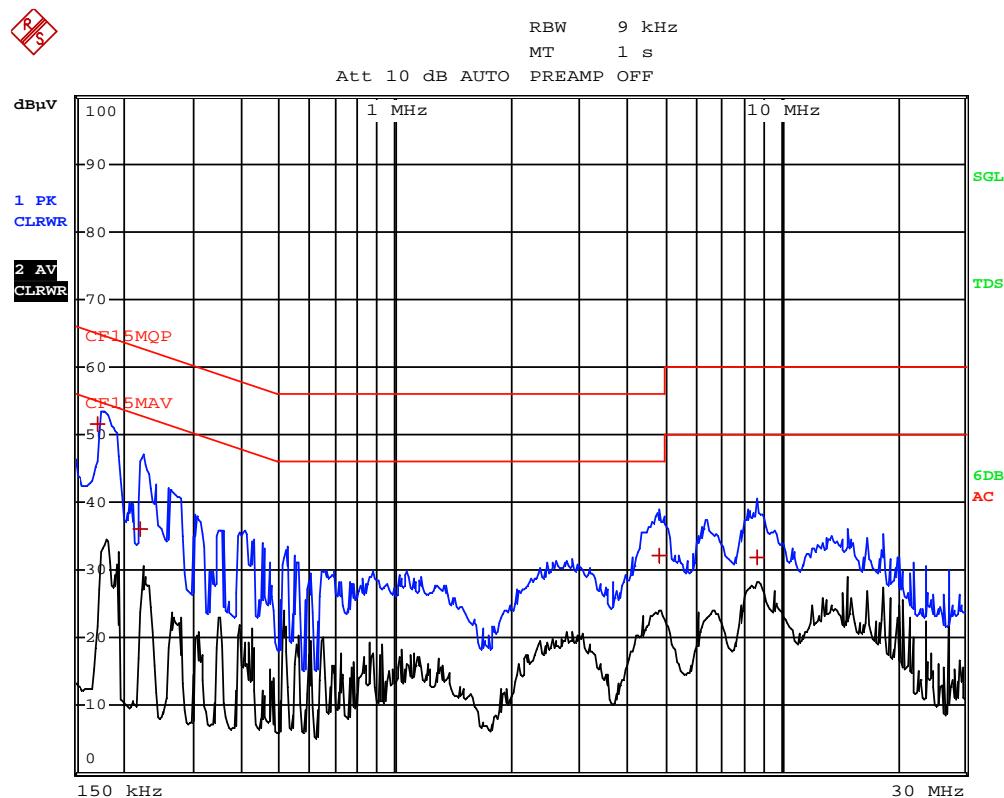

# INTERTEK TESTING SERVICES

---


## Worst Case: PC Charging & Play

EDIT PEAK LIST (Final Measurement Results)				
	TRACE	FREQUENCY	LEVEL dB $\mu$ V	DELTA LIMIT dB
Trace1:		CF15MQP		
Trace2:		CF15MAV		
Trace3:		---		
1	Quasi Peak	172.5 kHz	51.49 N	-13.34
1	Quasi Peak	222 kHz	36.05 L1	-26.69
1	Quasi Peak	4.839 MHz	32.19 L1	-23.81
1	Quasi Peak	8.682 MHz	31.83 L1	-28.16

## INTERTEK TESTING SERVICES

---

### 4.4.3 Conducted Emission Test Setup

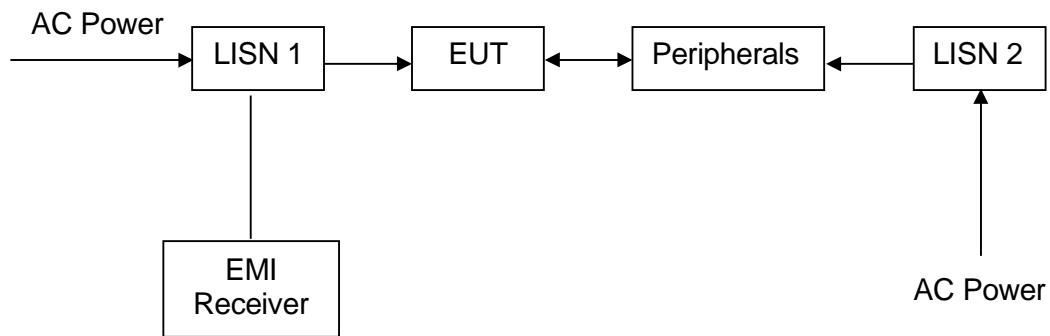

## INTERTEK TESTING SERVICES

---

### EXHIBIT 5 EQUIPMENT LIST

## INTERTEK TESTING SERVICES

---

### 5.0 Equipment List

#### 1) Radiated Emissions Test

Equipment	Spectrum Analyzer	EMI Test Receiver (9kHz to 26.5GHz)	BiConiLog Antenna
Registration No.	EW-2253	EW-3156	EW-3061
Manufacturer	R&S	R&S	EMCO
Model No.	FSP40	ESR26	3142E
Calibration Date	Jun. 15, 2016	Dec. 06, 2016	Sep. 23, 2016
Calibration Due Date	Jun. 15, 2017	Dec. 06, 2017	Sep. 23, 2017

Equipment	Double Ridged Guide Antenna	Broad-Band Horn Antenna
Registration No.	EW-1133	EW-1679
Manufacturer	EMCO	SCHWARZBECK
Model No.	3115	BBHA9170
Calibration Date	Nov. 05, 2015	Jun. 28, 2016
Calibration Due Date	Nov. 05, 2017	Jun. 28, 2017

#### 2) Conducted Emissions Test

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Artificial Mains	Pulse Limiter
Registration No.	EW-3156	EW-0192	EW-3248
Manufacturer	R&S	R&S	R&S
Model No.	ESR26	ESH3-Z5	E3H3-Z2
Calibration Date	Dec. 06, 2016	Aug. 26, 2016	Oct. 12, 2016
Calibration Due Date	Dec. 06, 2017	Aug. 26, 2017	Oct. 12, 2017

#### 3) Conductive Measurement Test

Equipment	Spectrum Analyzer
Registration No.	EW-2249
Manufacturer	R&S
Model No.	FSP30
Calibration Date	Dec. 23, 2016
Calibration Due Date	Nov. 27, 2017

**END OF TEST REPORT**