

TEST REPORT

Report No.: 17052048HKG-001

Sphero HK Limited

Application For Certification
(Original Grant)

FCC ID: SXO-VD01
IC: 10016A-VD01

Transceiver

PREPARED AND CHECKED BY:

APPROVED BY:

Signed On File
Leung Sung Tak, Andy
Engineer

Wong Kwok Yeung, Kenneth
Senior Lead Engineer
Date: June 15, 2017

TEST REPORT**GENERAL INFORMATION**

Grantee:	Sphero HK Limited
Grantee Address:	4/F., 299 QRC, 287-299, Queen's Road Central, Sheung Wan, Hong Kong.
Contact Person:	Jackal Ma
Tel:	852 9788 7164
Fax:	N/A
e-mail:	N/A
Manufacturer:	Sphero, Inc.
Manufacturer Address:	4772 Walnut Street, Suite 206, Boulder, CO 80301, USA
Brand Name:	sphero
Model / HVIN:	VD01
Type of EUT:	Transceiver
Description of EUT:	BB-9E App-Enabled Droid
Serial Number:	N/A
FCC ID / IC:	SXO-VD01 / 10016A-VD01
Date of Sample Submitted:	May 26, 2017
Date of Test:	May 26, 2017 to June 07, 2017
Report No.:	17052048HKG-001
Report Date:	June 15, 2017
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

TEST REPORT**SUMMARY OF TEST RESULT**

TEST SPECIFICATION	REFERENCE	RESULTS
Radiated Emission	15.249, 15.209 /	
Radiated Emission on the Bandedge	RSS-210 B.10, RSS-210 4.4	Pass
Radiated Emission in Restricted Bands	15.205 / RSS-210 4.1	Pass

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2015 Edition

RSS-210 Issue 9, August 2016

RSS-Gen Issue 4, November 2014

Note:

1. The EUT uses a permanently attached antenna which, in accordance to section 15.203, is considered sufficient to comply with the provisions of this section.
2. Pursuant to FCC part 15 Section 15.215(c), the 20 dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

TEST REPORT**TABLE OF CONTENTS**

1.0 GENERAL DESCRIPTION	5
1.1 Product Description	5
1.2 Related Submittal(s) Grants	5
1.3 Test Methodology	5
1.4 Test Facility	5
2.0 SYSTEM TEST CONFIGURATION.....	6
2.1 Justification.....	6
2.2 EUT Exercising Software	6
2.3 Special Accessories	6
2.4 Measurement Uncertainty.....	6
2.5 Support Equipment List and Description.....	6
3.0 EMISSION RESULTS	7
3.1 Field Strength Calculation	7
3.2 Radiated Emission Configuration Photograph	8
3.3 Radiated Emission Data	8
4.0 EQUIPMENT PHOTOGRAPHS	13
5.0 PRODUCT LABELLING	13
6.0 TECHNICAL SPECIFICATIONS	13
7.0 INSTRUCTION MANUAL.....	13
8.0 MISCELLANEOUS INFORMATION.....	14
8.1 Radiated Emission on the Bandedge	14
8.2 Discussion of Pulse Desensitization	17
8.3 Calculation of Average Factor.....	17
8.4 Emissions Test Procedures.....	19
8.5 Occupied Bandwidth.....	22
9.0 CONFIDENTIALITY REQUEST	23
10.0 EQUIPMENT LIST	23

TEST REPORT**1.0 GENERAL DESCRIPTION****1.1 Product Description**

The Equipment Under Test (EUT) is a 2.4GHz toy (Bluetooth 4.0 BLE), which is operating from 2402MHz to 2480MHz with 2MHz channel spacing. The EUT is powered by 2 x 3.7VDC lithium batteries. After switched on the EUT and paired with the smartphone, the EUT can be controlled to move forward, backward, left and right.

Antenna Type: Internal, Integral

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

1.2 Related Submittal(s) Grants

This is a single application for certification of a transceiver.

1.3 Test Methodology

Radiated emission measurements were performed according to the procedures in ANSI C63.10 (2013). All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **“Justification Section”** of this Application.

1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042V-1.

TEST REPORT**2.0 SYSTEM TEST CONFIGURATION****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in ANSI C63.10 (2013).

The device was powered by new DC 7.4VDC (2 x 3.7V lithium batteries).

For maximizing emissions, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data reported in Exhibit 3.0.

The unit was operated standalone and placed in the center of the turntable.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

2.2 EUT Exercising Software

There was no special software to exercise the device. Once the unit is powered up, it transmits the RF signal continuously.

2.3 Special Accessories

There are no special accessories necessary for compliance of this product.

2.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

2.5 Support Equipment List and Description

N/A.

TEST REPORT**3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

3.1 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Average Factor (optional) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - AV$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RA = Receiver Amplitude (including preamplifier) in $\text{dB}\mu\text{V}$

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

AV = Average Factor in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in $\text{dB}\mu\text{V}/\text{m}$

RR = RA - AG - AV in $\text{dB}\mu\text{V}$

LF = CF + AF in dB

Assume a receiver reading of 52.0 $\text{dB}\mu\text{V}$ is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and average factor of 5 dB are subtracted, giving a field strength of 27 $\text{dB}\mu\text{V}/\text{m}$. This value in $\text{dB}\mu\text{V}/\text{m}$ was converted to its corresponding level in $\mu\text{V}/\text{m}$.

$$RA = 52.0 \text{ dB}\mu\text{V}/\text{m}$$

$$AF = 7.4 \text{ dB}$$

$$RR = 18.0 \text{ dB}\mu\text{V}$$

$$CF = 1.6 \text{ dB}$$

$$LF = 9.0 \text{ dB}$$

$$AG = 29.0 \text{ dB}$$

$$AV = 5.0 \text{ dB}$$

$$FS = RR + LF$$

$$FS = 18 + 9 = 27 \text{ dB}\mu\text{V}/\text{m}$$

$$\text{Level in } \mu\text{V}/\text{m} = \text{Common Antilogarithm} [(27 \text{ dB}\mu\text{V}/\text{m})/20] = 22.4 \mu\text{V}/\text{m}$$

TEST REPORT**3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 729.491 MHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

3.3 Radiated Emission Data

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 10.5 dB

TEST REPORT

RADIATED EMISSIONS

Model: VD01

Date of Test: June 07, 2017

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

 Table 1
 Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Lowest Channel

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-AMP GAIN (dB)	ANTENNA FACTOR (dB)	NET AT 3M - PEAK (dB μ V/m)	AVERAGE FACTOR (dB)	CALCULATED AT 3M (dB μ V/m)	AVERAGE LIMIT AT 3M (dB μ V/m)	AVERAGE MARGIN (dB)
H	2402.000	89.7	33	29.4	86.1	48.4	37.7	94.0	-56.3
H	4804.000	49.9	33	34.9	51.8	48.4	3.4	54.0	-50.6
V	7206.000	46.9	33	37.9	51.8	48.4	3.4	54.0	-50.6
H	9608.000	37.3	33	40.4	44.7	48.4	-3.7	54.0	-57.7
H	12010.000	40.4	33	40.5	47.9	48.4	-0.5	54.0	-54.5
H	14412.000	43.5	33	40.0	50.5	48.4	2.1	54.0	-51.9

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-AMP GAIN (dB)	ANTENNA FACTOR (dB)	NET AT 3M - PEAK (dB μ V/m)	PEAK LIMIT AT 3M (dB μ V/m)	MARGIN (dB)
H	2402.000	89.7	33	29.4	86.1	114.0	-27.9
H	4804.000	49.9	33	34.9	51.8	74.0	-22.2
V	7206.000	46.9	33	37.9	51.8	74.0	-22.2
H	9608.000	37.3	33	40.4	44.7	74.0	-29.3
H	12010.000	40.4	33	40.5	47.9	74.0	-26.1
H	14412.000	43.5	33	40.0	50.5	74.0	-23.5

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: VD01

Date of Test: June 07, 2017

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 2
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Middle Channel

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-	ANTENNA FACTOR (dB)	NET AT	AVERAGE FACTOR (dB)	CALCULATED AT 3M (dB μ V/m)	AVERAGE	
			AMP GAIN (dB)		3M - PEAK (dB μ V/m)			LIMIT AT 3M (dB μ V/m)	MARGIN (dB)
H	2440.000	91.0	33	29.4	87.4	48.4	39.0	94.0	-55.0
H	4880.000	51.9	33	34.9	53.8	48.4	5.4	54.0	-48.6
V	7320.000	47.9	33	37.9	52.8	48.4	4.4	54.0	-49.6
H	9760.000	38.3	33	40.4	45.7	48.4	-2.7	54.0	-56.7
H	12200.000	40.8	33	40.5	48.3	48.4	-0.1	54.0	-54.1
H	14640.000	45.0	33	38.4	50.4	48.4	2.0	54.0	-52.0

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-AMP	ANTENNA FACTOR (dB)	NET AT	PEAK LIMIT		MARGIN (dB)
			GAIN (dB)		3M - PEAK (dB μ V/m)	AT 3M (dB μ V/m)		
H	2440.000	91.0	33	29.4	87.4	114.0		-26.6
H	4880.000	51.9	33	34.9	53.8	74.0	-20.2	
V	7320.000	47.9	33	37.9	52.8	74.0	-21.2	
H	9760.000	38.3	33	40.4	45.7	74.0		-28.3
H	12200.000	40.8	33	40.5	48.3	74.0	-25.7	
H	14640.000	45.0	33	38.4	50.4	74.0		-23.6

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: VD01

Date of Test: June 07, 2017

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 3
Pursuant to FCC Part 15 Section 15.249 / RSS-210 B10.0 Requirement

Highest Channel

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-	ANTENNA FACTOR (dB)	NET AT	AVERAGE FACTOR (dB)	CALCULATED AT 3M (dB μ V/m)	AVERAGE	
			AMP GAIN (dB)		3M - PEAK (dB μ V/m)			LIMIT AT 3M (dB μ V/m)	MARGIN (dB)
H	2480.000	91.6	33	29.4	88.0	48.4	39.6	94.0	-54.4
H	4960.000	51.3	33	34.9	53.2	48.4	4.8	54.0	-49.2
V	7440.000	47.4	33	37.9	52.3	48.4	3.9	54.0	-50.1
H	9920.000	38.0	33	40.4	45.4	48.4	-3.0	54.0	-57.0
H	12400.000	40.7	33	40.5	48.2	48.4	-0.2	54.0	-54.2
H	14880.000	45.8	33	38.4	51.2	48.4	2.8	54.0	-51.2

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-AMP	ANTENNA FACTOR (dB)	NET AT	PEAK LIMIT		MARGIN (dB)
			GAIN (dB)		3M - PEAK (dB μ V/m)	AT 3M (dB μ V/m)		
H	2480.000	91.6	33	29.4	88.0	114.0		-26.0
H	4960.000	51.3	33	34.9	53.2	74.0	-20.8	
V	7440.000	47.4	33	37.9	52.3	74.0	-21.7	
H	9920.000	38.0	33	40.4	45.4	74.0		-28.6
H	12400.000	40.7	33	40.5	48.2	74.0	-25.8	
H	14880.000	45.8	33	38.4	51.2	74.0		-22.8

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
6. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

Model: VD01

Date of Test: June 07, 2017

Worst-Case Operating Mode: Transmitting (Bluetooth 4.0 BLE)

Table 4
Pursuant to FCC Part 15 Section 15.209 / RSS-210 4.4 Requirement

POLARIZATION	FREQUENCY (MHz)	READING (dB μ V)	PRE-AMP (dB)	ANTENNA FACTOR (dB)	NET AT 3M (dB μ V/m)	LIMIT AT 3M (dB μ V/m)	MARGIN (dB)
V	31.212	24.1	16	10.0	18.1	40.0	-21.9
H	106.023	26.4	16	13.0	23.4	43.5	-20.1
V	119.240	26.2	16	14.0	24.2	43.5	-19.3
H	159.131	27.5	16	16.0	27.5	43.5	-16.0
H	212.117	25.4	16	17.0	26.4	43.5	-17.1
H	265.103	22.2	16	21.0	27.2	46.0	-18.8
H	291.778	25.0	16	22.0	31.0	46.0	-15.0
H	344.886	25.4	16	24.0	33.4	46.0	-12.6
H	397.751	25.8	16	25.0	34.8	46.0	-11.2
H	450.980	22.3	16	26.0	32.3	46.0	-13.7
V	729.491	21.5	16	30.0	35.5	46.0	-10.5

NOTES: 1. Peak Detector Data unless otherwise stated.

2. All measurements were made at 3 meters. Harmonic emissions not detected at the 3-meter distances were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other harmonic emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative sign in the column shows value below limit.
4. Horn antenna is used for the emission over 1000MHz.
5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 4.1.
6. Measurement Uncertainty is $\pm 5.3\text{dB}$ at a level of confidence of 95%.

TEST REPORT**4.0 EQUIPMENT PHOTOGRAPHS**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

5.0 PRODUCT LABELLING

For electronics filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

6.0 TECHNICAL SPECIFICATIONS

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

7.0 INSTRUCTION MANUAL

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States and Canada.

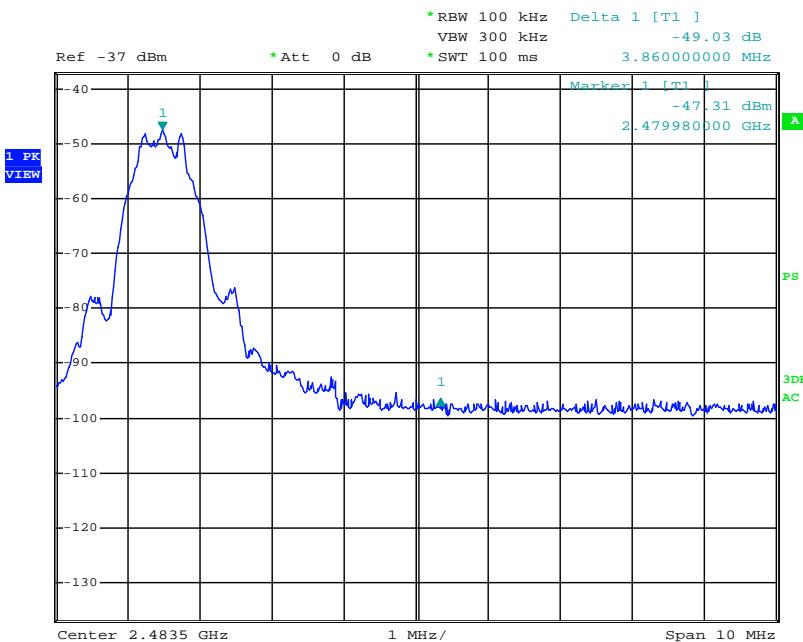
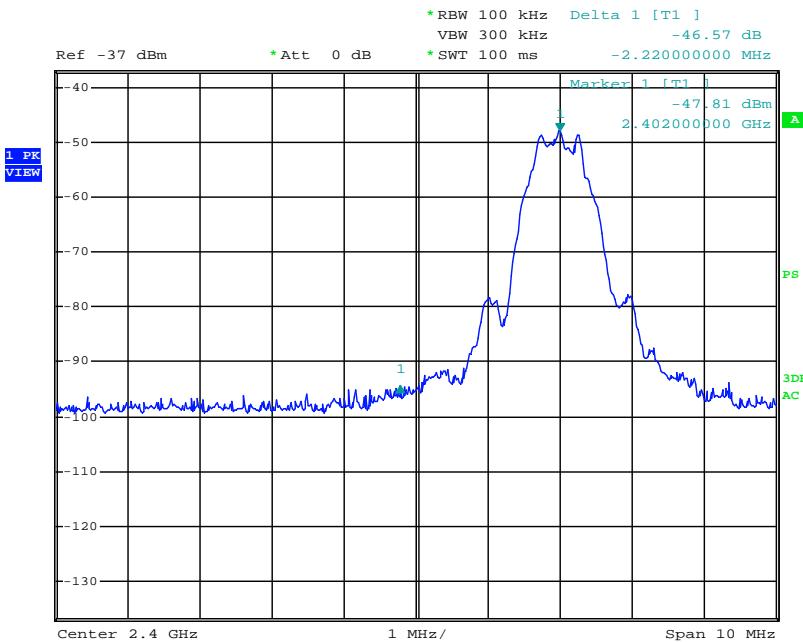
TEST REPORT**8.0 MISCELLANEOUS INFORMATION**

The miscellaneous information includes details of the test procedure and measured bandwidth / calculation of factor such as pulse desensitization and averaging factor (calculation and timing diagram).

8.1 Radiated Emission on the Bandedge

From the following plots, they show that the fundamental emissions are confined in the specified band (2400MHz to 2483.5MHz). In case of the fundamental emissions are within two standard bandwidths from the bandedge, the delta measurement technique is used for determining bandedge compliance. Standard bandwidth is the bandwidth specified by ANSI C63.10 (2013) for frequency being measured.

Emissions radiated outside of the specified frequency bands, except harmonics, are attenuated by 50dB below the level of the fundamental or to the general radiated emissions limits in Section 15.209 / RSS-210 4.4, whichever is the lesser attenuation, which meet the requirement of part 15.249(d) / RSS-210 B.10.

TEST REPORT
Peak Measurement


TEST REPORTPeak Measurement

Bandedge compliance is determined by applying marker-delta method, i.e. (Bandedge Plot).

Lower bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 86.1 \text{ dB}\mu\text{V/m} - 46.6 \text{ dB} \\ &= 39.5 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 37.7 \text{ dB}\mu\text{V/m} - 46.6 \text{ dB} \\ &= -8.9 \text{ dB}\mu\text{V/m} \end{aligned}$$

Upper bandedge

Peak Resultant field strength = Fundamental emissions (peak value) – delta from the plot

$$\begin{aligned} &= 88.0 \text{ dB}\mu\text{V/m} - 49.0 \text{ dB} \\ &= 39.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

Average Resultant field strength = Fundamental emissions (average value) – delta from the plot

$$\begin{aligned} &= 39.6 \text{ dB}\mu\text{V/m} - 49.0 \text{ dB} \\ &= -9.4 \text{ dB}\mu\text{V/m} \end{aligned}$$

The resultant field strength meets the general radiated emission limit in Section 15.209 / RSS-210 4.4, which does not exceed 74 dB μ V/m (Peak Limit) and 54 dB μ V/m (Average Limit).

TEST REPORT**8.2 Discussion of Pulse Desensitization**

Pulse desensitivity is not applicable for this device. The effective period (Teff) is approximately 0.38ms for a digital “1” bit which illustrated on technical specification, with a resolution bandwidth (3dB) of 1MHz, so the pulse desensitivity factor is 0dB.

8.3 Calculation of Average Factor

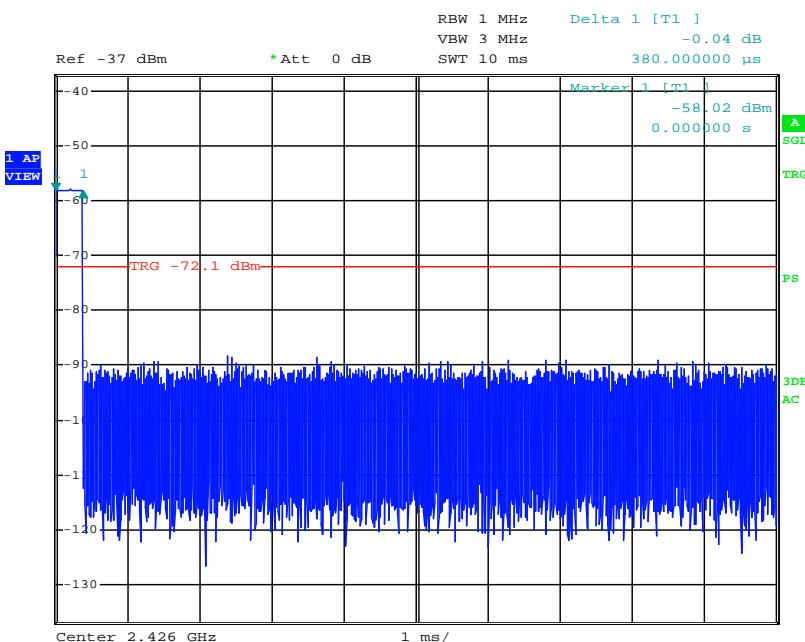
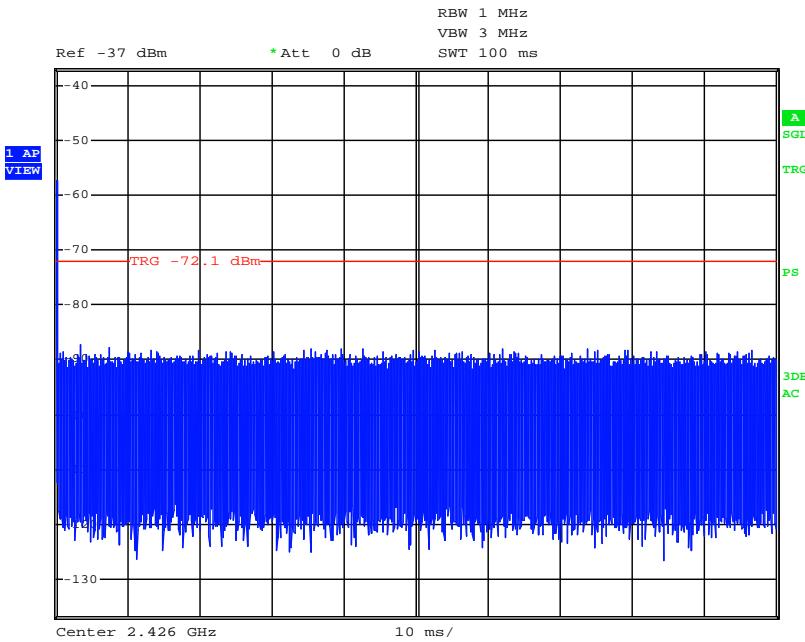
The duty cycle is simply the on-time divided by the period:

The duration of one cycle = 100ms

Effective period of the cycle = $0.38 \times 1 = 0.38\text{ms}$

$DC = 0.38/100 = 0.0038$

Therefore, the averaging factor is found by $20\log 0.0038 = -48.4\text{dB}$.

TEST REPORT
Average Factor


TEST REPORT**8.4 Emissions Test Procedures**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of transmitter operating under the Part 15, Subpart C rules.

The transmitting equipment under test (EUT) is placed on a wooden turntable which is four feet in diameter and approximately 0.8m in height above the ground plane for emission measurement at or below 1GHz and 1.5m in height above the ground plane for emission measurement above 1GHz. During the radiated emissions test, the turntable is rotated and any cables leaving the EUT are manipulated to find the configuration resulting in maximum emissions. The EUT is adjusted through all three orthogonal axis to obtain maximum emission levels. The antenna height and polarization are also varied during the testing to search for maximum signal levels. The height of the antenna is varied from one to four meters.

Detector function for radiated emissions is in peak mode. Average readings, when required, are taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Exhibit 8.3.

The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.

TEST REPORT**8.4 Emissions Test Procedures (cont'd)**

The EUT is warmed up for 15 minutes prior to the test.

AC power to the unit is varied from 85% to 115% nominal and variation in the fundamental emission field strength is recorded. If battery powered, a new, fully charged battery is used.

Conducted measurements were made as described in ANSI C63.10 (2013).

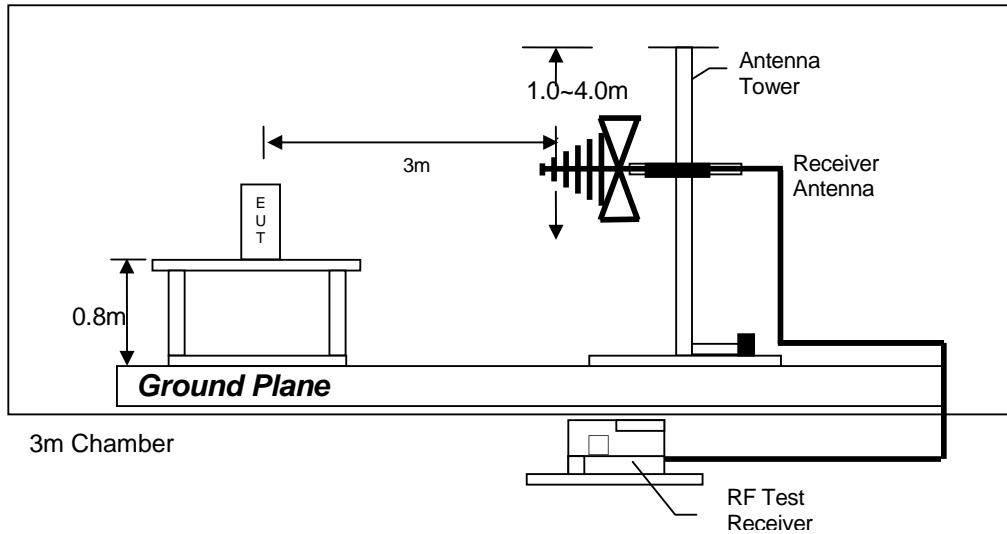
The IF bandwidth used for measurement of radiated signal strength was 100 kHz or greater when frequency is below 1000 MHz. Where pulsed transmissions of short enough pulse duration warrant, a greater bandwidth is selected according to the recommendations of Hewlett Packard Application Note 150-2. A discussion of whether pulse desensitivity is applicable to this unit is included in this report (See Exhibit 8.1). Above 1000 MHz, a resolution bandwidth of 3 MHz is used.

Transmitter measurements are normally conducted at a measurement distance of three meters. However, to assure low enough noise floor in the forbidden bands and above 1 GHz, signals are acquired at a distance of one meter or less. All measurements are extrapolated to three meters using inverse scaling, unless otherwise reported. Measurements taken at a closer distance are so marked.


TEST REPORT

8.4.1 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.



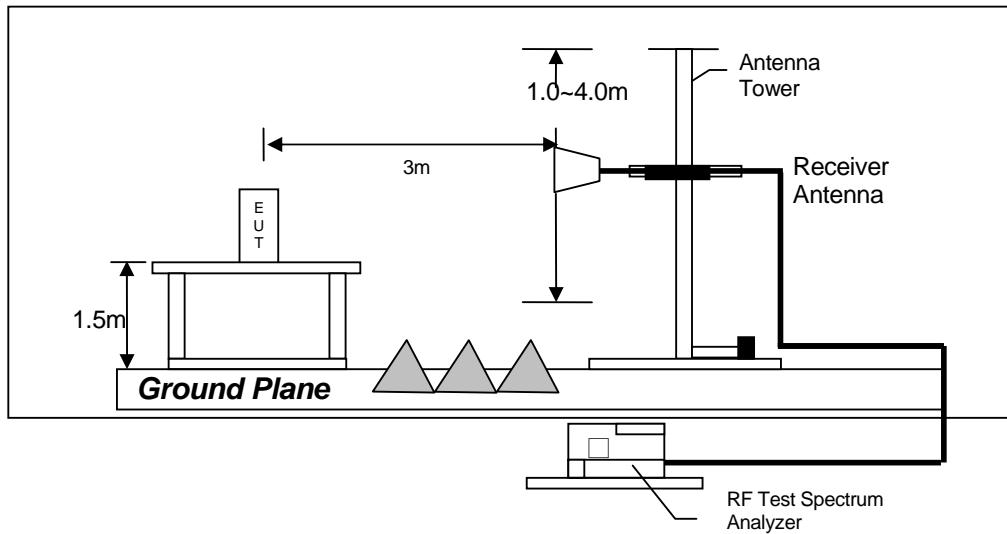Test setup of radiated emissions up to 1GHz



Test setup of radiated emissions above 1GHz


TEST REPORT

8.5 Occupied Bandwidth

Occupied Bandwidth Results:

Bluetooth (MHz)	Occupied Bandwidth (MHz)
Low Channel: 2402	1.06
Middle Channel: 2442	1.04
High Channel: 2480	1.04

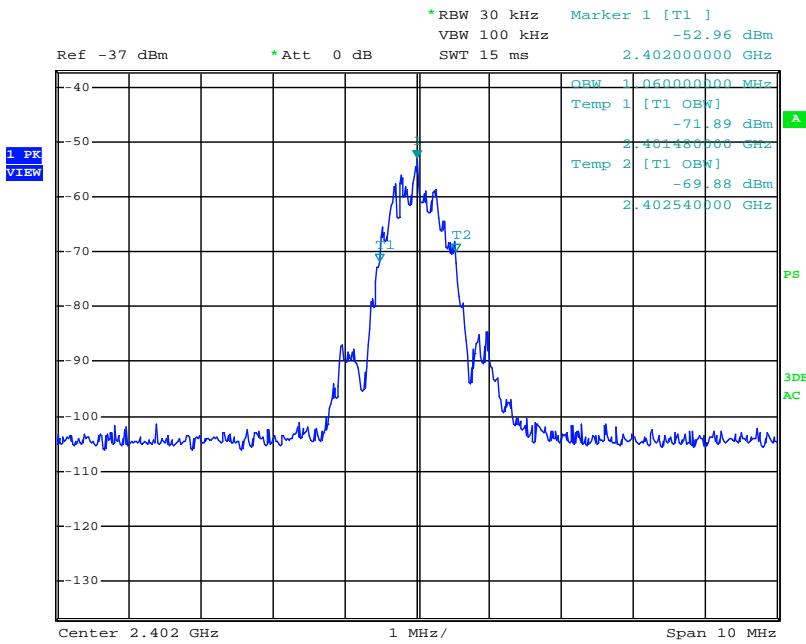The worst case is shown as below



TEST REPORT**9.0 CONFIDENTIALITY REQUEST**

For electronic filing, a preliminary copy of the confidentiality request is saved with filename: request.pdf.

10.0 EQUIPMENT LIST

1) Radiated Emissions Test

EQUIPMENT	EMI TEST RECEIVER	SPECTRUM ANALYZER
Registration No.	EW-3156	EW-2253
Manufacturer	R&S	R&S
Model No.	ESR26	FSP40
Calibration Date	Dec. 06, 2016	Jun. 15, 2016
Calibration Due Date	Dec. 06, 2017	Jun. 15, 2017

EQUIPMENT	BICONICAL ANTENNA	LOG PERIODIC ANTENNA	DOUBLE RIDGED GUIDE ANTENNA
Registration No.	EW-0571	EW-0447	EW-0194
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	May 18, 2016	May 18, 2016	Aug. 10, 2016
Calibration Due Date	Nov. 18, 2017	Nov. 18, 2017	Feb. 10, 2018

3) Bandedge Measurement

EQUIPMENT	SPECTRUM ANALYZER
Registration No.	EW-2329
Manufacturer	R&S
Model No.	FSP3
Calibration Date	Aug. 26, 2016
Calibration Due Date	Aug. 26, 2017

END OF TEST REPORT