

FCC REPORT

Applicant: SHENZHEN 3NOD INFORMATION TECHNOLOGY CO., LTD

Address of Applicant: F5/F6, Zhongfu Road 15, Tangxiayong Village, Songgang Town, Baoan District Shenzhen 518057 China

Equipment Under Test (EUT)

Product Name: MID

Model No.: T8014TQ, T8014

FCC ID: SXPT8014TQ

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2013

Date of sample receipt: December 02, 2014

Date of Test: December 02-04, 2014

Date of report issued: December 04, 2014

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature of Robinson Lo is written over a circular blue official seal. The seal contains the text 'GTS', 'GLOBAL TECHNOLOGY SERVICES', 'GLOBAL TESTING', and the date '12/04/2014'.

Robinson Lo

Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	December 04, 2014	Original

Prepared By:

Sam. Gao

Date:

December 04, 2014

Project Engineer

Check By:

hank. yan

Date:

December 04, 2014

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	7
5.4 DESCRIPTION OF SUPPORT UNITS	7
5.5 TEST FACILITY	7
5.6 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	15
7.5 POWER SPECTRAL DENSITY	17
7.6 BAND EDGES	19
7.6.1 Conducted Emission Method	19
7.6.2 Radiated Emission Method	20
7.7 SPURIOUS EMISSION	23
7.7.1 Conducted Emission Method	23
7.7.2 Radiated Emission Method	25
8 TEST SETUP PHOTO	31
9 EUT CONSTRUCTIONAL DETAILS	32

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	SHENZHEN 3NOD INFORMATION TECHNOLOGY CO., LTD
Address of Applicant:	F5/F6, Zhongfu Road 15, Tangxiayong Village, Songgang Town, Baoan District Shenzhen 518057 China
Manufacturer:	SHENZHEN 3NOD INFORMATION TECHNOLOGY CO., LTD
Address of Manufacturer:	F5/F6, Zhongfu Road 15, Tangxiayong Village, Songgang Town, Baoan District Shenzhen 518057 China
Factory:	SHENZHEN 3NOD INFORMATION TECHNOLOGY CO., LTD
Address of Factory:	F5/F6, Zhongfu Road 15, Tangxiayong Village, Songgang Town, Baoan District Shenzhen 518057 China

5.2 General Description of EUT

Product Name:	MID
Model No.:	T8014TQ, T8014
Operation Frequency:	2402MHz~2480MHz
Channel Numbers:	40
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral antenna
Antenna Gain:	2.0dBi (declare by Applicant)
Power Supply:	Model No.: AW010WR-0500200UU Input: AC 100-240V, 50/60Hz, 0.4A Output: DC 5.0V, 2A Or DC 3.7V Li-ion battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	11	2422MHz	21	2442MHz	31	2462MHz
2	2404MHz	12	2424MHz	22	2444MHz	32	2464MHz
...
9	2418MHz	19	2438MHz	29	2458MHz	39	2478MHz
10	2420MHz	20	2440MHz	30	2460MHz	40	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2442MHz
The Highest channel	2480MHz

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
-------------------	--

Remark: During the test, the new battery was used.

5.4 Description of Support Units

None

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS —Registration No.: CNAS L5775**

CNAS has accredited Global United Technology Services Co., Ltd. To ISO/IEC 17025 General Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China

Tel: 0755-27798480

Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 29 2014	Mar. 28 2015
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Jul. 01 2014	Jun 30 2015
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Jul. 01 2014	Jun 30 2015
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	Jul. 01 2014	Jun 30 2015
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 27 2014	June 26 2015
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 28 2014	Mar. 27 2015
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 29 2014	Mar. 28 2015
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 29 2014	Mar. 28 2015
11	Coaxial cable	GTS	N/A	GTS210	Mar. 29 2014	Mar. 28 2015
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 29 2014	Mar. 28 2015
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	Jul. 01 2014	Jun. 30, 2015
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	Jul. 01 2014	Jun. 30, 2015
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 27 2014	June 26 2015
16	Band filter	Amindeon	82346	GTS219	Mar. 29 2014	Mar. 28 2015
17	Power Meter	Anritsu	ML2495A	GTS540	July 01 2014	June 30 2015
18	Power Sensor	Anritsu	MA2411B	GTS541	July 01 2014	June 30 2015


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS264	July 01 2014	June 30 2015
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS223	July 01 2014	June 30 2015
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS224	July 01 2014	June 30 2015
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July 01 2014	June 30 2015
5	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS226	July 01 2014	June 30 2015
6	Coaxial Cable	GTS	N/A	GTS227	July 01 2014	June 30 2015
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 08 2014	July 07 2015

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
E.U.T Antenna: <i>The antenna is Integral antenna, the best case gain of the antenna is 2.0dBi</i>	

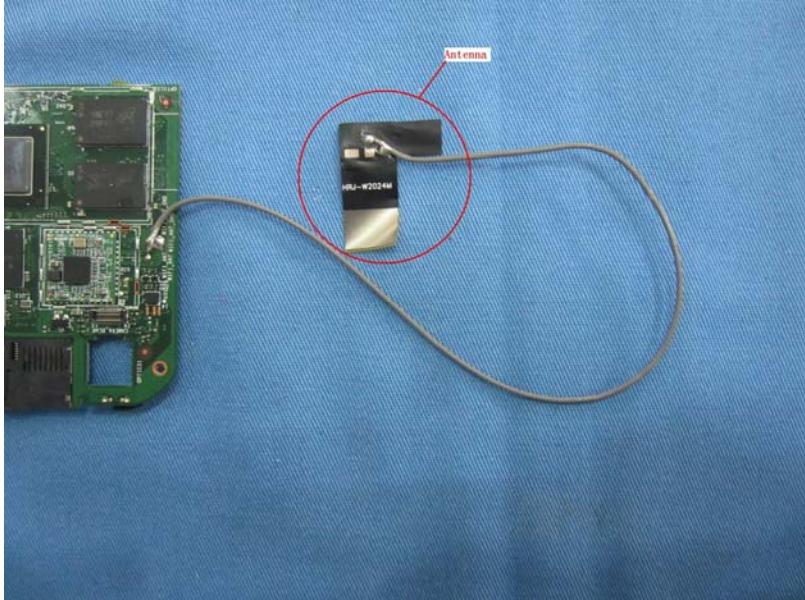


7.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.4:2003																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<small>* Decreases with the logarithm of the frequency.</small>																
Test setup:	<p>Reference Plane</p> <p>LISN</p> <p>40cm</p> <p>80cm</p> <p>AUX Equipment</p> <p>E.U.T</p> <p>Test table/Insulation plane</p> <p>EMI Receiver</p> <p>Filter</p> <p>AC power</p> <p>Remark E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

Measurement data

Line:

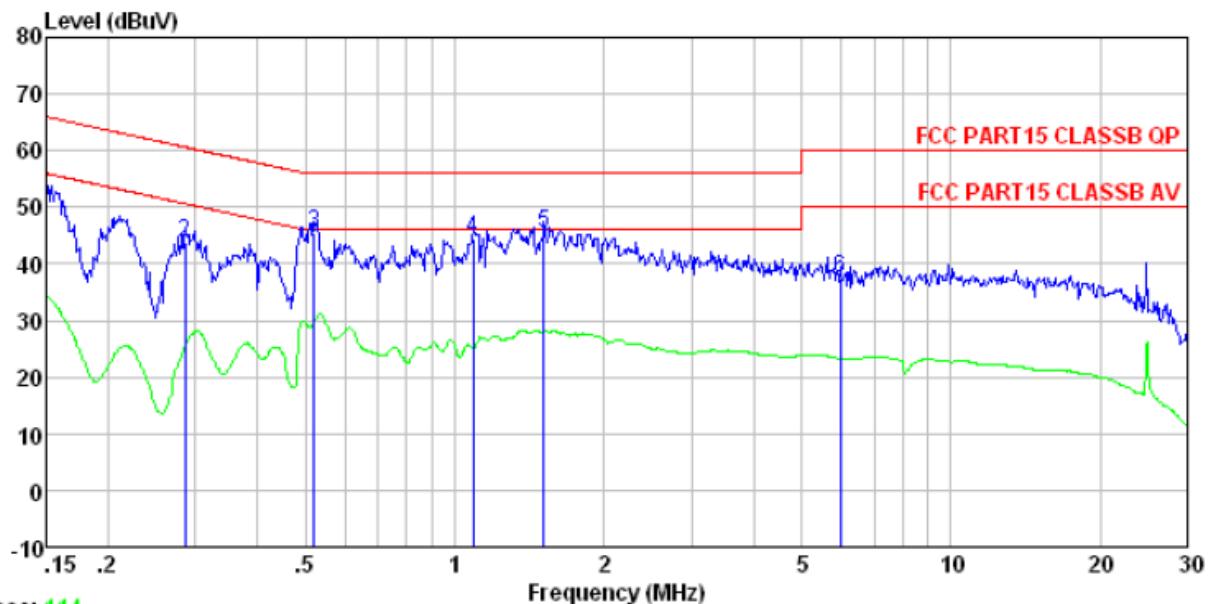

Trace: 114

Condition : FCC PART15 CLASSB QP LISN-2013 LINE


Job No. : 2085RF

Test mode : Bluetooth4.0 mode

Test Engineer: MIke

	Read Freq	LISN Level	Cable Factor	Limit Level	Over Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	51.93	0.15	0.12	52.20	66.00	-13.80 QP
2	0.286	43.75	0.11	0.10	43.96	60.63	-16.67 QP
3	0.521	45.35	0.12	0.11	45.58	56.00	-10.42 QP
4	1.088	44.32	0.13	0.13	44.58	56.00	-11.42 QP
5	1.511	45.23	0.12	0.14	45.49	56.00	-10.51 QP
6	5.993	37.03	0.22	0.16	37.41	60.00	-22.59 QP

Neutral:

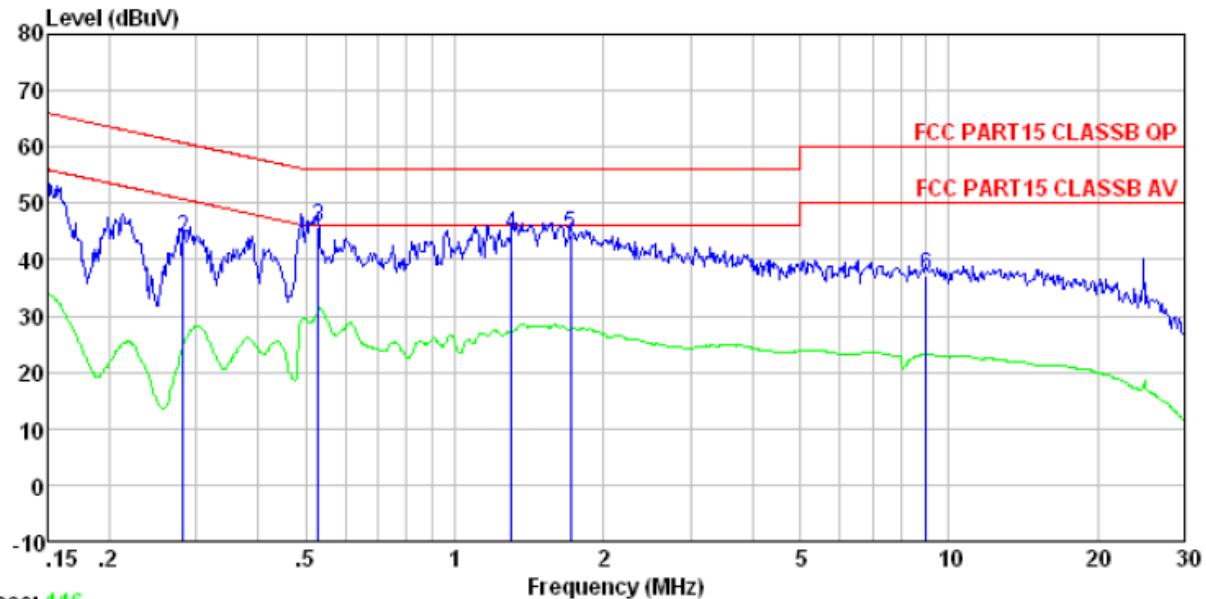


Freq	Read	LISN	Cable	Limit	Over	Remark
	Level	Factor	Loss			
MHz	dBuV	dB	dB	dBuV	dBuV	dB
1	0.150	52.21	0.07	0.12	52.40	66.00 -13.60 QP
2	0.282	43.65	0.06	0.10	43.81	60.76 -16.95 QP
3	0.529	45.72	0.07	0.11	45.90	56.00 -10.10 QP
4	1.303	44.36	0.09	0.13	44.58	56.00 -11.42 QP
5	1.716	44.12	0.09	0.14	44.35	56.00 -11.65 QP
6	9.011	36.63	0.22	0.19	37.04	60.00 -22.96 QP

Notes:


1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss
4. *If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.*

7.3 Conducted Output Power

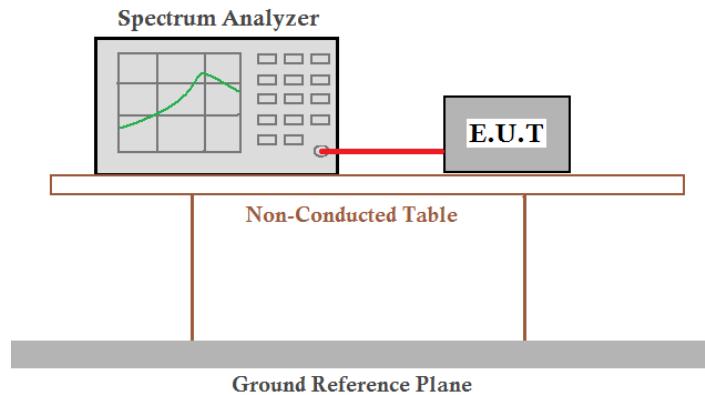
Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	 <p>The diagram illustrates the test setup for conducted output power. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a coaxial cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	-2.49	30.00	Pass
Middle	-2.39		
Highest	-2.85		

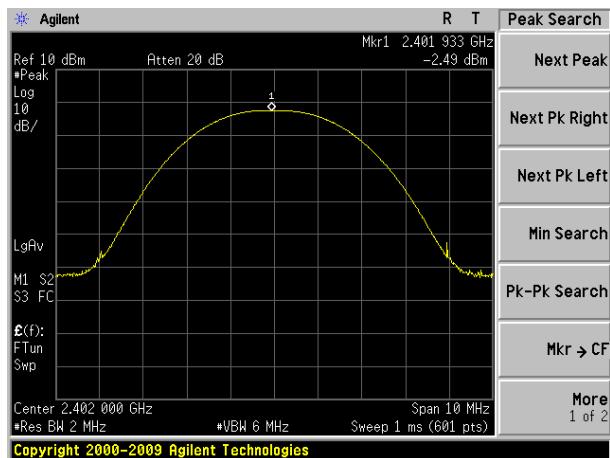Test plot as follows:


Lowest channel

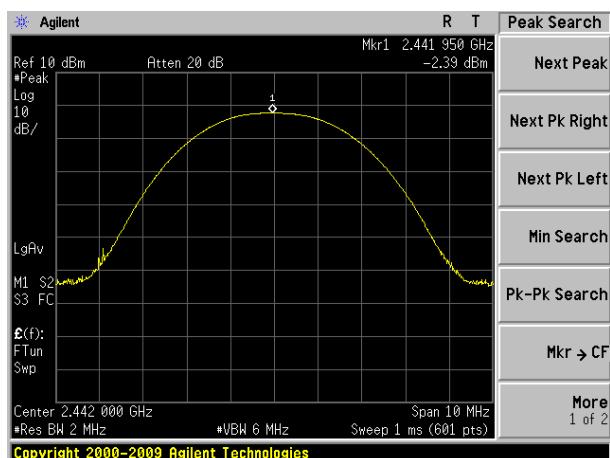


Middle channel

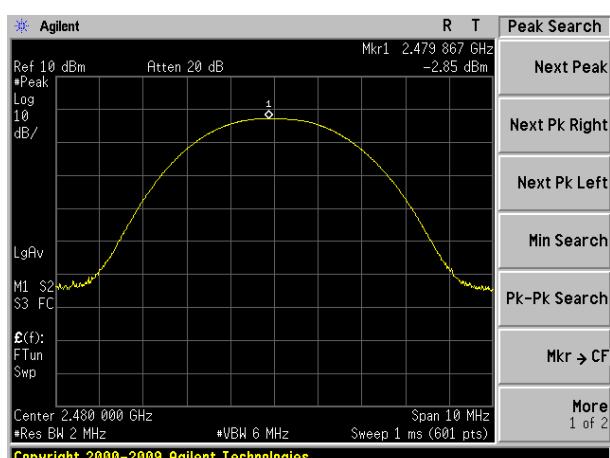

Highest channel

7.4 Channel Bandwidth

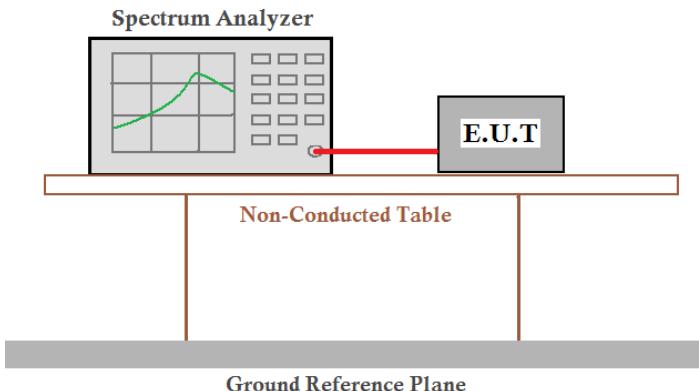Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data

Test channel	Channel Bandwidth (KHz)	Limit(KHz)	Result
Lowest	804.054	>500	Pass
Middle	805.891		
Highest	803.571		

Test plot as follows:



Lowest channel




Middle channel




Highest channel

7.5 Power Spectral Density

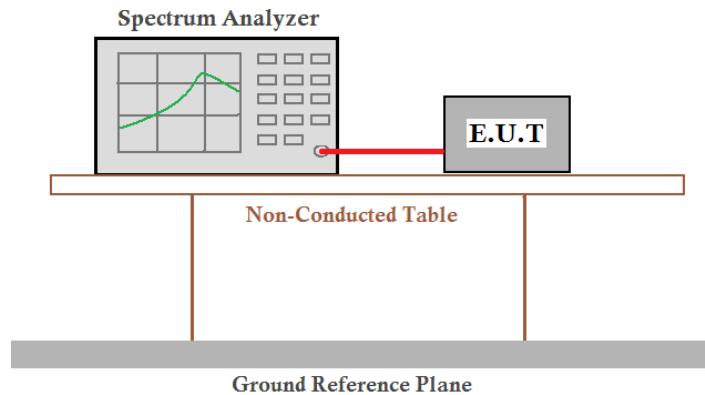
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T (Equipment Under Test) via a cable. The setup is placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	-4.78	8.00	Pass
Middle	-4.73		
Highest	-5.28		

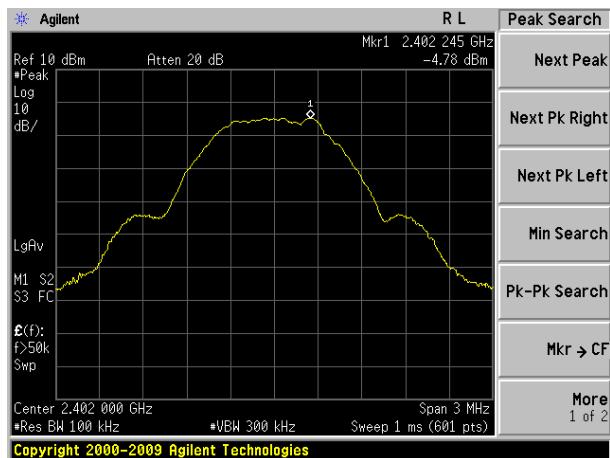Test plot as follows:


Lowest channel

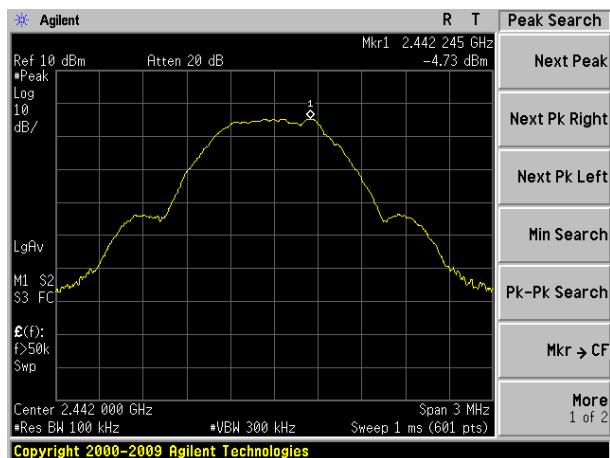


Middle channel

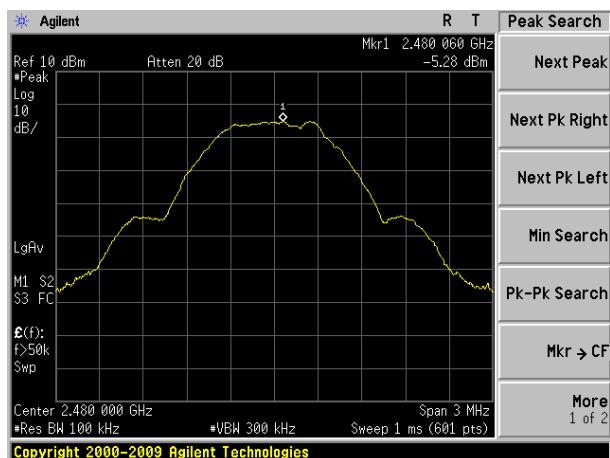


Highest channel

7.6 Band edges


7.6.1 Conducted Emission Method

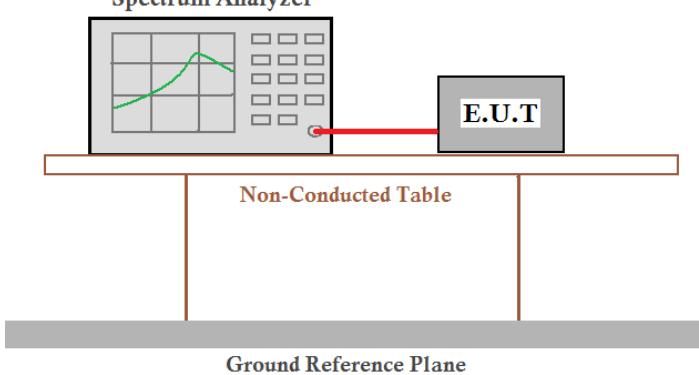Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p style="text-align: center;">Spectrum Analyzer</p>  <p style="text-align: center;">Non-Conducted Table</p> <p style="text-align: center;">Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Test plot as follows:

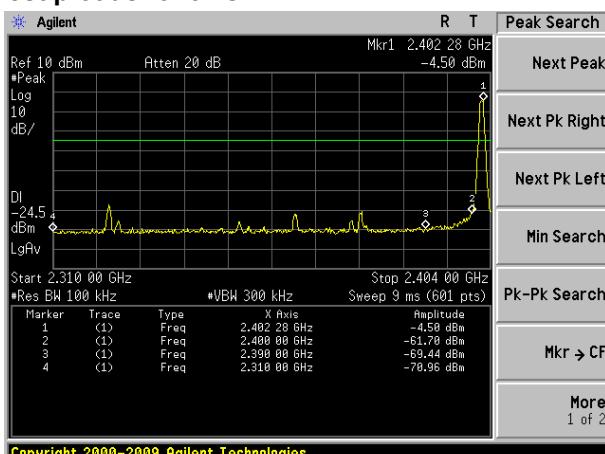

Lowest channel

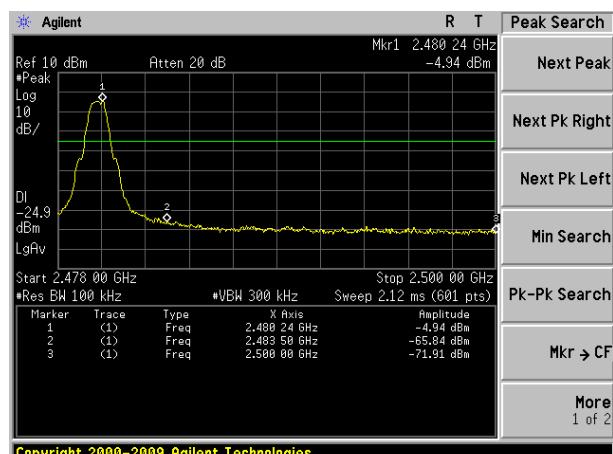

Highest channel

7.6.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.4: 2003								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report. 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.3 for details								
Test results:	Pass								

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest
---------------	--------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	40.02	27.91	5.30	34.11	39.12	74.00	-34.88	Vertical
2390.00	37.76	27.59	5.38	34.01	36.72	74.00	-37.28	Vertical
2400.00	59.44	27.58	5.39	34.01	58.40	74.00	-15.60	Vertical
2310.00	37.90	27.91	5.30	34.11	37.00	74.00	-37.00	Horizontal
2390.00	38.93	27.59	5.38	34.01	37.89	74.00	-36.11	Horizontal
2400.00	60.75	27.58	5.39	34.01	59.71	74.00	-14.29	Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	23.49	27.91	5.30	34.11	22.59	54.00	-31.41	Vertical
2390.00	21.94	27.59	5.38	34.01	20.90	54.00	-33.10	Vertical
2400.00	43.49	27.58	5.39	34.01	42.45	54.00	-11.55	Vertical
2310.00	22.51	27.91	5.30	34.11	21.61	54.00	-32.39	Horizontal
2390.00	21.54	27.59	5.38	34.01	20.50	54.00	-33.50	Horizontal
2400.00	44.42	27.58	5.39	34.01	43.38	54.00	-10.62	Horizontal

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.56	27.53	5.47	33.92	39.64	74.00	-34.36	Vertical
2500.00	39.56	27.55	5.49	33.90	38.70	74.00	-35.30	Vertical
2483.50	43.89	27.53	5.47	33.92	42.97	74.00	-31.03	Horizontal
2500.00	39.54	27.55	5.49	33.90	38.68	74.00	-35.32	Horizontal

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	25.39	27.53	5.47	33.92	24.47	54.00	-29.53	Vertical
2500.00	24.29	27.55	5.49	33.90	23.43	54.00	-30.57	Vertical
2483.50	27.58	27.53	5.47	33.92	26.66	54.00	-27.34	Horizontal
2500.00	25.81	27.55	5.49	33.90	24.95	54.00	-29.05	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
2. *The emission levels of other frequencies are very lower than the limit and not show in test report.*


7.7 Spurious Emission

7.7.1 Conducted Emission Method

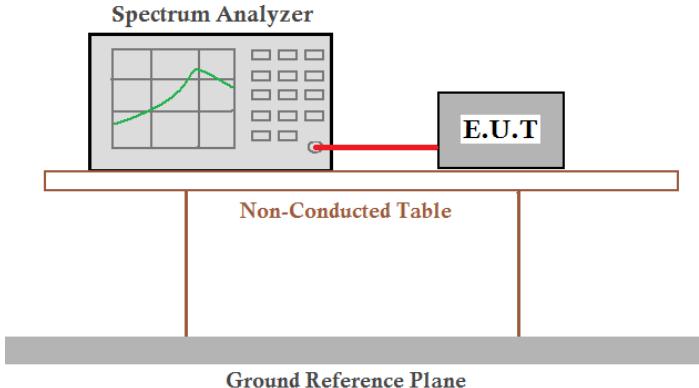Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.4:2003 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	 <p>The diagram illustrates the test setup for conducted emission measurement. A Spectrum Analyzer is connected to the E.U.T (Equipment Under Test) via a cable. The E.U.T is placed on a Non-Conducted Table. The entire setup is positioned above a Ground Reference Plane.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Test plot as follows:

Lowest channel

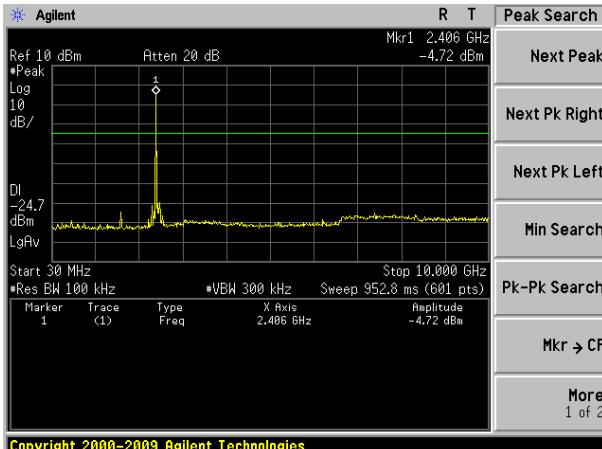

Copyright 2000-2009 Agilent Technologies


30MHz~10GHz

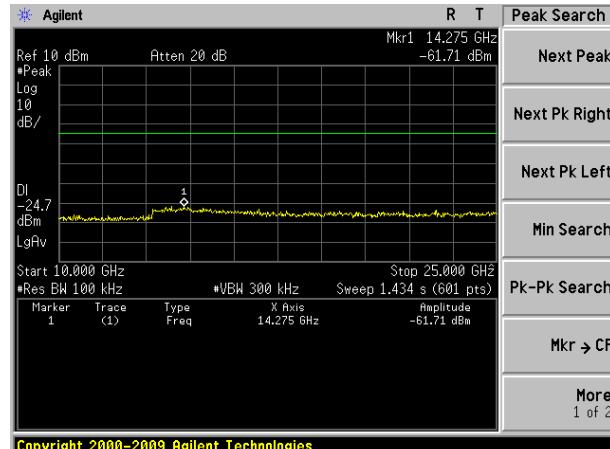

Copyright 2000-2009 Agilent Technologies


10GHz~25GHz

Middle channel

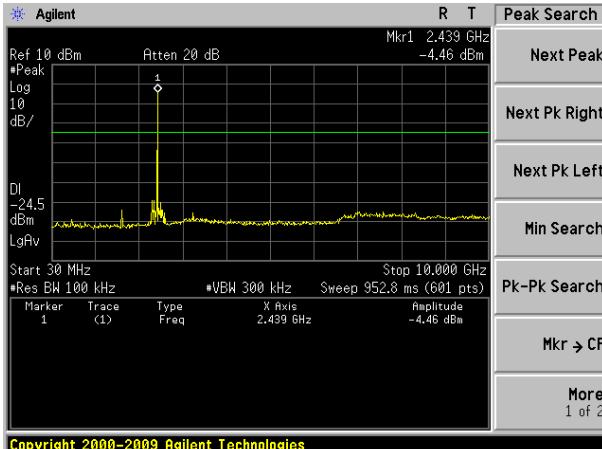

Copyright 2000-2009 Agilent Technologies


30MHz~10GHz

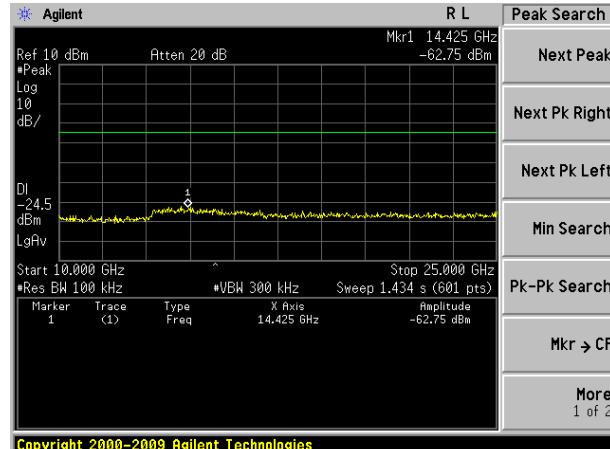

Copyright 2000-2009 Agilent Technologies


10GHz~25GHz

Highest channel

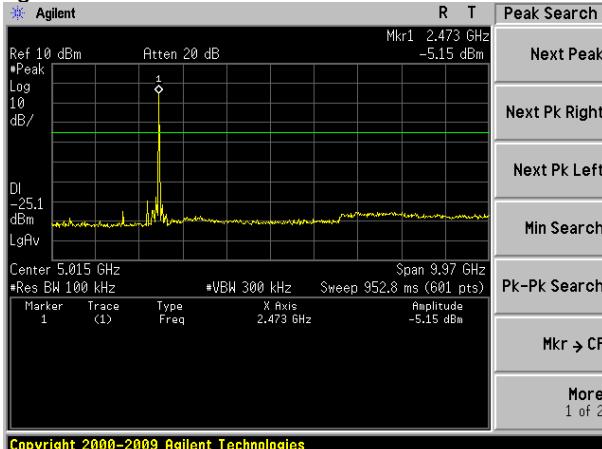

Copyright 2000-2009 Agilent Technologies

30MHz~10GHz

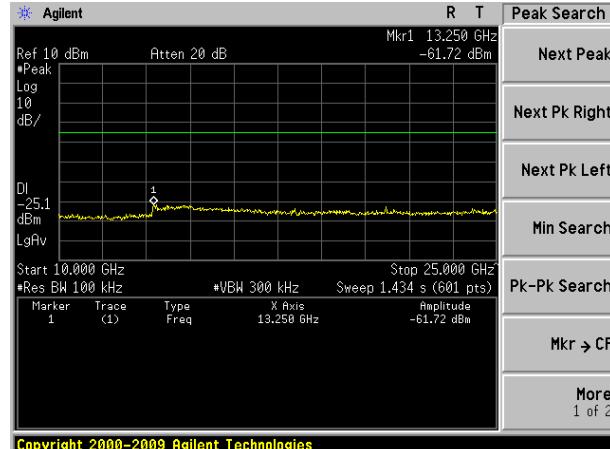

Copyright 2000-2009 Agilent Technologies

10GHz~25GHz

7.7.2 Radiated Emission Method

Test Requirement:	FCC Part15 C Section 15.209								
Test Method:	ANSI C63.4: 2003								
Test Frequency Range:	30MHz to 25GHz								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	30MHz-88MHz	40.00		Quasi-peak					
	88MHz-216MHz	43.50		Quasi-peak					
	216MHz-960MHz	46.00		Quasi-peak					
	960MHz-1GHz	54.00		Quasi-peak					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:	Below 1GHz Above 1GHz 								
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8 meters above								

	<p>the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <ol style="list-style-type: none">2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.7. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the X-axis which it is worse case.

Measurement Data**■ Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
48.33	38.15	15.35	0.75	31.98	22.27	40.00	-17.73	Vertical
72.08	40.69	10.26	0.96	31.85	20.06	40.00	-19.94	Vertical
116.13	36.48	13.10	1.33	31.84	19.07	43.50	-24.43	Vertical
178.13	42.63	11.55	1.73	32.08	23.83	43.50	-19.67	Vertical
251.18	36.51	14.07	2.13	32.16	20.55	46.00	-25.45	Vertical
510.04	36.66	18.79	3.35	31.51	27.29	46.00	-18.71	Vertical
42.45	35.71	15.57	0.69	32.03	19.94	40.00	-20.06	Horizontal
97.46	36.30	15.00	1.17	31.75	20.72	43.50	-22.78	Horizontal
125.01	47.46	11.70	1.40	31.88	28.68	43.50	-14.82	Horizontal
155.36	43.08	10.48	1.60	32.00	23.16	43.50	-20.34	Horizontal
317.70	44.74	15.31	2.45	32.12	30.38	46.00	-15.62	Horizontal
779.61	35.92	21.82	4.38	31.30	30.82	46.00	-15.18	Horizontal

■ Above 1GHz

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	41.87	31.78	8.60	32.09	50.16	74.00	-23.84	Vertical
7206.00	43.48	36.15	11.65	32.00	59.28	74.00	-14.72	Vertical
9608.00	32.30	37.95	14.14	31.62	52.77	74.00	-21.23	Vertical
12010.00	33.02	39.08	15.03	35.51	51.62	74.00	-22.38	Vertical
14412.00	*					74.00		Vertical
4804.00	33.91	31.78	8.60	32.09	42.20	74.00	-31.80	Horizontal
7206.00	34.48	36.15	11.65	32.00	50.28	74.00	-23.72	Horizontal
9608.00	22.94	37.95	14.14	31.62	43.41	74.00	-30.59	Horizontal
12010.00	23.65	39.08	15.03	35.51	42.25	74.00	-31.75	Horizontal
14412.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804.00	27.79	31.78	8.60	32.09	36.08	54.00	-17.92	Vertical
7206.00	28.02	36.15	11.65	32.00	43.82	54.00	-10.18	Vertical
9608.00	20.12	37.95	14.14	31.62	40.59	54.00	-13.41	Vertical
12010.00	18.63	39.08	15.03	35.51	37.23	54.00	-16.77	Vertical
14412.00	*					54.00		Vertical
4804.00	22.13	31.78	8.60	32.09	30.42	54.00	-23.58	Horizontal
7206.00	22.21	36.15	11.65	32.00	38.01	54.00	-15.99	Horizontal
9608.00	11.75	37.95	14.14	31.62	32.22	54.00	-21.78	Horizontal
12010.00	10.79	39.08	15.03	35.51	29.39	54.00	-24.61	Horizontal
14412.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	47.27	31.86	8.67	32.12	55.68	74.00	-18.32	Vertical
7326.00	40.08	36.41	11.72	31.89	56.32	74.00	-17.68	Vertical
9768.00	30.13	38.35	14.27	31.62	51.13	74.00	-22.87	Vertical
12210.00	31.27	38.89	15.16	35.65	49.67	74.00	-24.33	Vertical
14652.00	*					74.00		Vertical
4884.00	35.38	31.86	8.67	32.12	43.79	74.00	-30.21	Horizontal
7326.00	31.25	36.41	11.72	31.89	47.49	74.00	-26.51	Horizontal
9768.00	22.81	38.35	14.27	31.62	43.81	74.00	-30.19	Horizontal
12210.00	24.27	38.89	15.16	35.65	42.67	74.00	-31.33	Horizontal
14652.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4884.00	31.27	31.86	8.67	32.12	39.68	54.00	-14.32	Vertical
7326.00	24.19	36.41	11.72	31.89	40.43	54.00	-13.57	Vertical
9768.00	15.21	38.35	14.27	31.62	36.21	54.00	-17.79	Vertical
12210.00	17.65	38.89	15.16	35.65	36.05	54.00	-17.95	Vertical
14652.00	*					54.00		Vertical
4884.00	23.57	31.86	8.67	32.12	31.98	54.00	-22.02	Horizontal
7326.00	18.85	36.41	11.72	31.89	35.09	54.00	-18.91	Horizontal
9768.00	9.96	38.35	14.27	31.62	30.96	54.00	-23.04	Horizontal
12210.00	12.27	38.89	15.16	35.65	30.67	54.00	-23.33	Horizontal
14652.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	45.76	31.93	8.73	32.16	54.26	74.00	-19.74	Vertical
7440.00	36.63	36.59	11.79	31.78	53.23	74.00	-20.77	Vertical
9920.00	28.69	38.81	14.38	31.88	50.00	74.00	-24.00	Vertical
12400.00	31.59	38.76	15.27	35.27	50.35	74.00	-23.65	Vertical
14880.00	*					74.00		Vertical
4960.00	33.14	31.93	8.73	32.16	41.64	74.00	-32.36	Horizontal
7440.00	31.46	36.59	11.79	31.78	48.06	74.00	-25.94	Horizontal
9920.00	24.81	38.81	14.38	31.88	46.12	74.00	-27.88	Horizontal
12400.00	26.87	38.76	15.27	35.27	45.63	74.00	-28.37	Horizontal
14880.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	30.38	31.93	8.73	32.16	38.88	54.00	-15.12	Vertical
7440.00	21.95	36.59	11.79	31.78	38.55	54.00	-15.45	Vertical
9920.00	14.20	38.81	14.38	31.88	35.51	54.00	-18.49	Vertical
12400.00	17.09	38.76	15.27	35.27	35.85	54.00	-18.15	Vertical
14880.00	*					54.00		Vertical
4960.00	21.51	31.93	8.73	32.16	30.01	54.00	-23.99	Horizontal
7440.00	19.12	36.59	11.79	31.78	35.72	54.00	-18.28	Horizontal
9920.00	12.32	38.81	14.38	31.88	33.63	54.00	-20.37	Horizontal
12400.00	15.69	38.76	15.27	35.27	34.45	54.00	-19.55	Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo

Radiated Emission

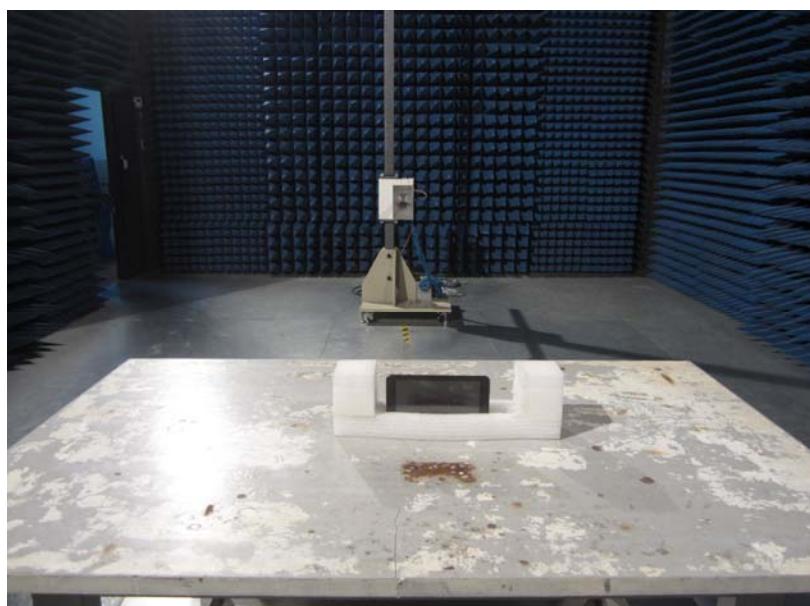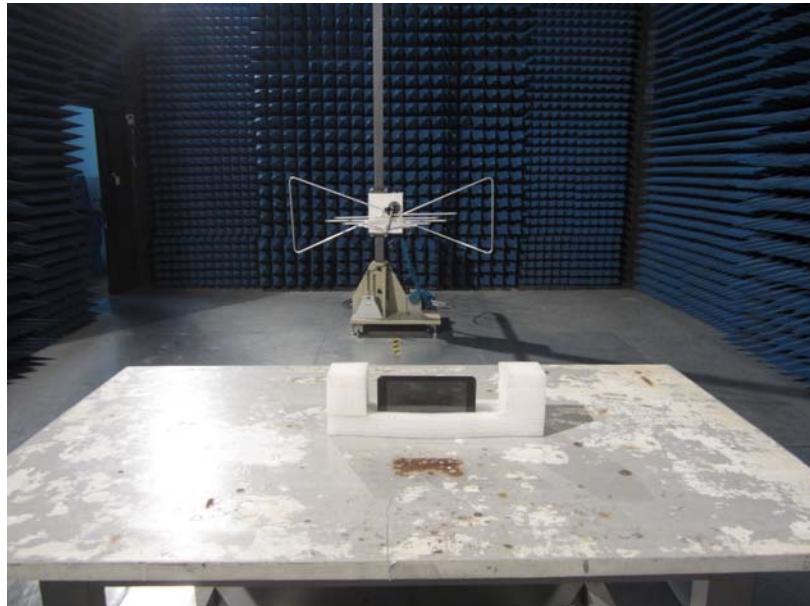

Conducted Emission



9 EUT Constructional Details

Reference to the test report No. GTSE14120208501

-----End-----