

Shenzhen Wangcai Semiconductor Co.,Ltd.

No. 191, Tai'an Road, Wei Town, Zhangmutou Town, Dongguan City

客户/Client: 易湘瑞 ESORUN

Name/TYPE : Coil

Product model: G43.5+20*0.8mm 磁片带槽线长 38mm 8.1UH

Product number: 10.0110.2308

Project number: Sai2025030801

Date: 2025-3-08

本公司工程部/For Enginer Departner Only	
修改内容/Rrvised Content	认可日期/APPproved Date

编制/Prepared

审核/Checked

认可/Approved

Rao Zhipeng

Xie Liang

客户认可回签/Authorixed Signaturure Company Chop		
工程/ Enginrer	认可/QC APPproved	认可日期/APPproved

Shenzhen WangcaiSemiconductor Co., Ltd.

No. 191, Tai'an Road, Wei Town, Zhangmutou Town, Dongguan City

一、线圈工艺/Winding Procese:

NO	windin g	Wire gauges	Numbe r of turns	Winding direction	remark
1	N1	2UEW-B-0.08*80	11TS	CCW	
2					

二 . 电气性能/FEATURES:

1.测试条件 (Test conditions) : 25°C,65%RH@100KHz/1V

1.1 电感量 (Inductance)

1.11 L0A (Single Coil) =4.5uH±20%

1.12 L0A(Coil+Magnetic Disc)=8.1uH±10%

1.2 Q 值=80MIN

1.3 直流电阻 (DCR) : 75mΩ MAX

1.4 工作温度(Operating Temperature) : -25°C ~85°C

2.测试仪器(Test instrument) : **L:**创达 1068+1310;**DCR:**502BC;**SIZE:**Callipers

3. List of materials

NO	project	material
1	WIRE	φ 0.08*80 2UEW
2	FERRITE	43.5*5.3*0.8mm+20*0.8 ferrite hard magnet
3	GLUE	White glue
4	SOLDER	XCD-907B
5	Adhesive	No adhesive,
6	High temperature adhesive	7MM HIGH TEMPERATURE TAPE

Shenzhen Wangcai Semiconductor Co., Ltd.

No. 191, Tai'an Road, Wei Town, Zhangmutou Town, Dongguan City


三．参考图/CIRCUIT DIAGRAM



单位：MM

四．外形图/OUTSIDE DIAGRA

产品尺寸说明 Product Size(单位：MM)

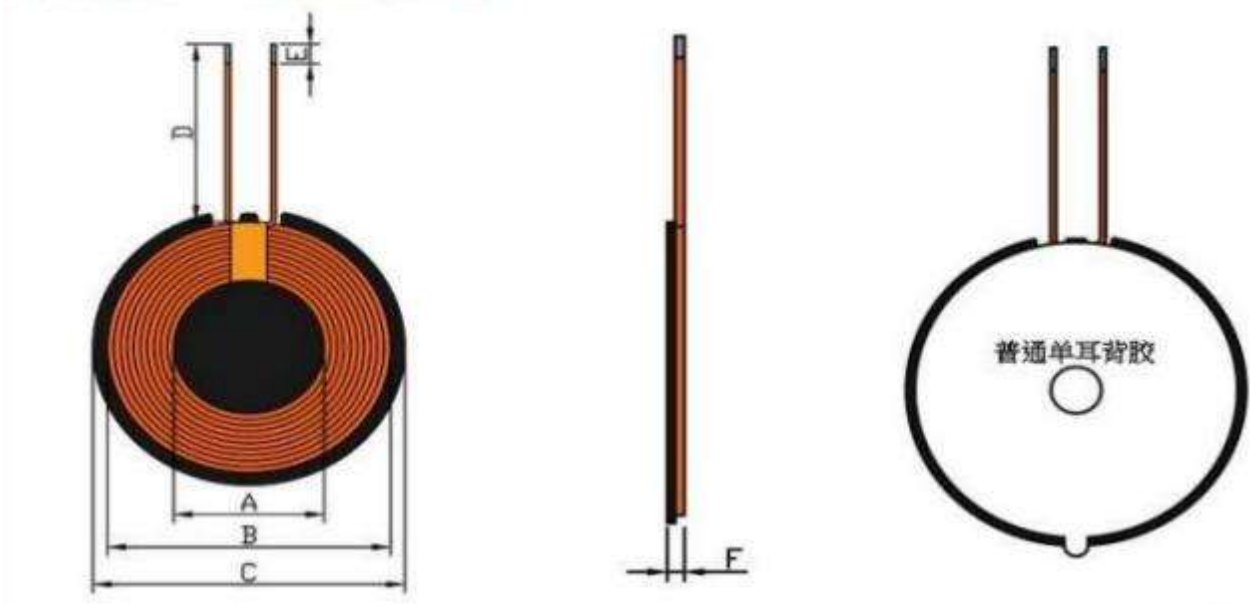

Note: 7MM high-temperature adhesive tape is wound at the coil outlet position, and the adhesive is canceled

stan dard	A	B	C	D	And	F
STD	20.5±0.5	39.5±1	43.5±1	38±2	3±1.5	2.3Max


UNIT：MM

Shenzhen Wangcai Semiconductor Co., Ltd.

No. 191, Tai'an Road, Wei Town, Zhangmutou Town, Dongguan City

五. 包装/PACKAGE

5.1 包装图片 Packing pictures:

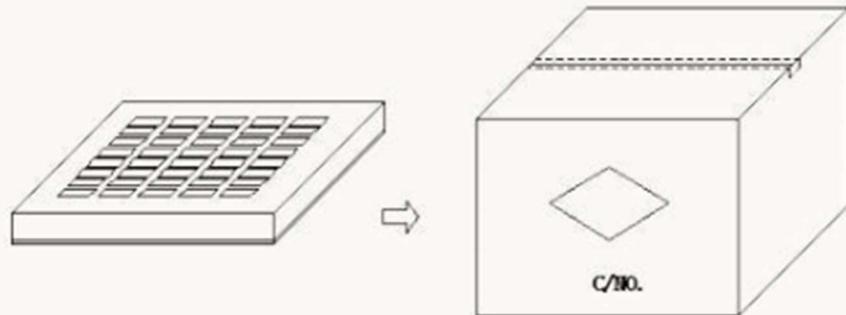

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	600 Pcs	345*330*50 mm
箱 Big Carton	2400 Pcs	360*340*280 mm

5.3 The packaging is based on the existing packaging tray as the reference standard, and the actual shipping packaging shall prevail, and can be customized if there is a special need.

六、贮存和使用条件 Storage and Use condition

6.1 贮存条件 Storage condition

6.1.1 Recommended storage conditions: temperature -25°C~ 85°C, humidity 70% (Max.)

Recommended keeping conditions: -25°C ~85°C , 70%RH (Max.)

6.1.2 Storage period: within six months from the date of production

Storage life : Within the limits of six months from being produced.

6.2 使用条件 Use condition

Limitations: Temperature=-25°C~ 85°C, Humidity≤ 90%

Use condition limit: T=-25°C~85°C , RH≤ 90